

Assumptions to the Annual Energy Outlook 1999 (AEO99)



With Projections to 2020

December 1998

Contents

Introduction	2
Macroeconomic Activity Module	11
International Energy Module	13
Household Expenditures Module	17
Residential Demand Module	18
Commercial Demand Module	25
Industrial Demand Module	33
Transportation Demand Module	41
Electricity Market Module	58
Oil and Gas Supply Module	71
Natural Gas Transmission and Distribution Module	78
Petroleum Market Module.	83
Coal Market Module.	93
Renewable Fuels Module	99
List of Acronyms	112

Introduction

This paper presents the major assumptions of the National Energy Modeling System (NEMS) used to generate the projections in the *Annual Energy Outlook 1999*¹ (*AEO99*), including general features of the model structure, assumptions concerning energy markets, and the key input data and parameters that are most significant in formulating the model results. Detailed documentation of the modeling system is available in a series of documentation reports.² A synopsis of NEMS, the model components, and the interrelationships of the modules is presented in *The National Energy Modeling System: An Overview*.³

The National Energy Modeling System

The projections in the *AEO99* were produced with the National Energy Modeling System. NEMS is developed and maintained by the Office of Integrated Analysis and Forecasting of the Energy Information Administration (EIA) to provide projections of domestic energy-economy markets in the midterm time period and perform policy analyses requested by decisionmakers and analysts in the U.S. Congress, the Department of Energy's Office of Policy and International Affairs, other DOE offices, and other government agencies.


The time horizon of NEMS is approximately 20 years, the midterm period in which the structure of the economy and the nature of energy markets are sufficiently understood that it is possible to represent considerable structural and regional detail. Because of the diverse nature of energy supply, demand, and conversion in the United States, NEMS supports regional modeling and analysis in order to represent the regional differences in energy markets, to provide policy impacts at the regional level, and to portray transportation flows. The level of regional detail for the end-use demand modules is the nine Census divisions. Other regional structures include production and consumption regions specific to oil, gas, and coal supply and distribution, the North American Electric Reliability Council regions and subregions for electricity, and aggregations of the Petroleum Administration for Defense Districts (PADD) for refineries. Only national results are presented in the *AEO99*, with the regional and other detailed results available on the EIA CD-ROM and EIA Home Page. (<http://www.eia.doe.gov/oiaf/forecasting/aeo99/homepage.html>)

For each fuel and consuming sector, NEMS balances the energy supply and demand, accounting for the economic competition between the various energy fuels and sources. NEMS is organized and implemented as a modular system (Figure 1). The modules represent each of the fuel supply markets, conversion sectors, and end-use consumption sectors of the energy system. NEMS also includes macroeconomic and international modules. The primary flows of information among each of these modules are the delivered prices of energy to the end user and the quantities consumed by product, region, and sector. The delivered prices of fuel encompass all the activities necessary to produce, import, and transport fuels to the end user. The information flows also include other data such as economic activity, domestic production activity, and international petroleum supply availability.

The integrating module of NEMS controls the execution of each of the component modules. To facilitate modularity, the components do not pass information to each other directly but communicate through a central data storage location. This modular design provides the capability to execute modules individually, thus allowing decentralized development of the system and independent analysis and testing of individual modules. This modularity allows use of the methodology and level of detail most appropriate for each energy sector. NEMS solves by calling each supply, conversion, and end-use demand module in sequence until the delivered prices of energy and the quantities demanded have converged within tolerance, thus achieving an economic equilibrium of supply and demand in the consuming sectors. Solution is reached annually through the midterm horizon. Other variables are also evaluated for convergence such as petroleum product imports, crude oil imports, and several macroeconomic indicators.

Each NEMS component also represents the impact and cost of legislation and environmental regulations that affect that sector. NEMS reflects all current legislation and environmental regulations, such as the Clean Air Act Amendments of 1990 (CAAA90), the ozone transport rule (OTR), and the costs of compliance with other regulations. NEMS also includes an analysis of the impacts of the provisions of the Climate Change Action Plan (CCAP), which are separately described under each module.

Figure 1. National Energy Modeling System

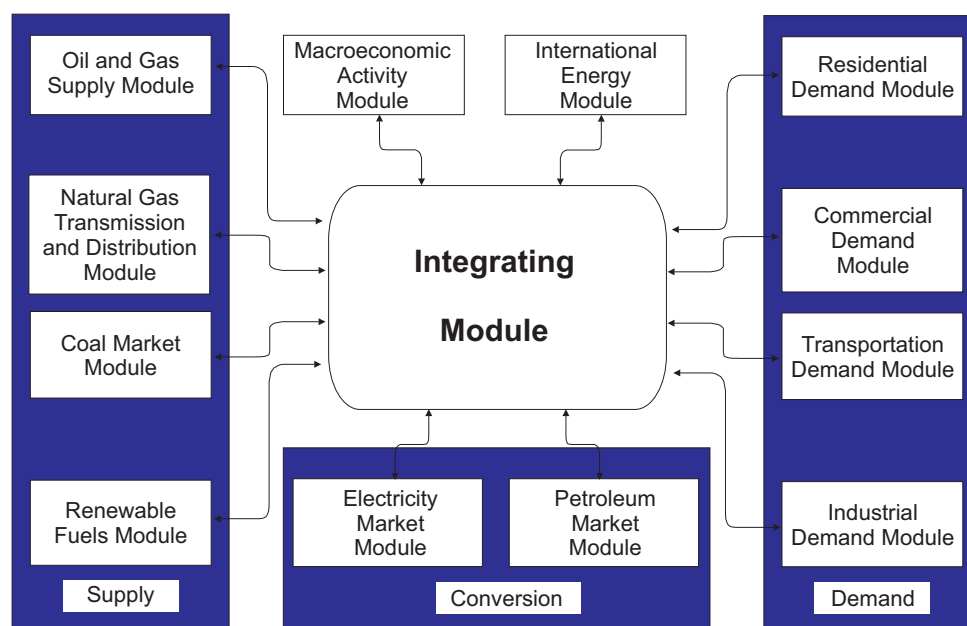

Component Modules

The component modules of NEMS represent the individual supply, demand, and conversion sectors of domestic energy markets and also include international and macroeconomic modules. In general, the modules interact through values representing the prices of energy delivered to the consuming sectors and the quantities of end-use energy consumption. This section provides brief summaries of each of the modules.

Macroeconomic Activity Module

The Macroeconomic Activity Module provides a set of essential macroeconomic drivers to the energy modules, and a macroeconomic feedback mechanism within NEMS. Key macroeconomic variables include gross domestic product (GDP), interest rates, disposable income, and employment. Industrial drivers are calculated for thirty-five industrial sectors. This module is a kernel regression representation of the DRI/McGraw-Hill (DRI) U.S. Macroeconomic Model of the U.S. Economy.

International Energy Module

The International Module represents the world oil markets, calculating the average world oil price and computing supply curves for five categories of imported crude oil for the Petroleum Market Module (PMM) of NEMS, in response to changes in U.S. import requirements. International petroleum product supply curves, including curves for oxygenates, are also calculated.

Household Expenditures Module

The Household Expenditures Module provides estimates of average household direct expenditures for energy used in the home and in private motor vehicle transportation. The forecasts of expenditures reflect the projections from NEMS for the residential and transportation sectors. The projected household energy expenditures incorporate the changes in residential energy prices and motor gasoline price determined in NEMS, as well as the changes in the efficiency of energy use for residential end-uses and in light-duty vehicle fuel efficiency. Average expenditures estimates are provided for households by income group and Census division.

Residential and Commercial Demand Modules

The Residential Demand Module forecasts consumption of residential sector energy by housing type and end use, subject to delivered energy prices, availability of renewable sources of energy, and housing starts. The Commercial Demand Module forecasts consumption of commercial sector energy by building types and nonbuilding uses of energy and by category of end use, subject to delivered prices of energy, availability of renewable sources of energy, and macroeconomic variables representing interest rates and floorspace construction. Both modules estimate the equipment stock for the major end-use services, incorporating assessments of advanced technologies, including representations of renewable energy technologies, and analyses of both building shell and appliance standards.

Industrial Demand Module

The Industrial Demand Module forecasts the consumption of energy for heat and power and for feedstocks and raw materials in each of sixteen industry groups subject to the delivered prices of energy and macroeconomic variables representing employment and the value of output for each industry. The industries are classified into three groups—energy intensive, nonenergy intensive, and nonmanufacturing. Of the eight energy-intensive industries, seven are modeled in the Industrial Demand Module with components for boiler/steam/cogeneration (BSC), buildings, and process/assembly (PA) use of energy. A representation of cogeneration and a recycling component are also included. The use of energy for petroleum refining is modeled in the Petroleum Market Module, and the projected consumption is included in the industrial totals.

Transportation Demand Module

The Transportation Demand Module forecasts consumption of transportation sector fuels, including petroleum products, electricity, methanol, ethanol, compressed natural gas, and hydrogen by transportation mode, vehicle vintage, and size class, subject to delivered prices of energy fuels and macroeconomic variables representing disposable personal income, GDP, population, interest rates, and the value of output for industries in the freight sector. Fleet vehicles are represented separately to allow analysis of the CAAA90 and other legislative proposals, and the module includes a component to explicitly assess the penetration of alternative-fuel vehicles.

Electricity Market Module

The Electricity Market Module (EMM) represents generation, transmission, and pricing of electricity, subject to delivered prices for coal, petroleum products, and natural gas, costs of generation by centralized renewables, macroeconomic variables for costs of capital and domestic investment, and electricity load shapes and demand. There are three primary submodules—capacity planning, fuel dispatching, finance and pricing. Nonutility generation and transmission and trade are represented in the planning and dispatching submodules. The levelized fuel cost of uranium fuel for nuclear generation is directly incorporated into the EMM. All CAAA90 and OTR compliance options are explicitly represented in the capacity expansion and dispatch decisions. Both new generating technologies and renewable technologies compete directly in these decisions.

Renewable Fuels Module

The Renewable Fuels Module includes submodules that provide explicit representation of the supply of biomass (including wood and energy crops), municipal solid waste (including landfill gas), wind energy, solar thermal electric and photovoltaic energy, and geothermal energy. It contains natural resource supply estimates and provides costs and performance criteria to the EMM. The EMM represents market penetration of renewable technologies used for centralized electricity generation.

Oil and Gas Supply Module

The Oil and Gas Supply Module represents domestic crude oil (including lease condensate), natural gas liquids, and natural gas supply within an integrated framework that captures the interrelationships among the various sources of supply—onshore, offshore, and Alaska—using both conventional and nonconventional techniques, including enhanced oil recovery and unconventional gas recovery from tight gas formations,

shale, and coalbeds. This framework analyzes cash flow and profitability to compute investment and drilling in each of the supply sources, subject to the prices for crude oil and natural gas, the domestic recoverable resource base, and technology. Oil and gas production functions are computed at a level of twelve supply regions, including three offshore and three Alaskan regions. This module also represents foreign sources of natural gas, including pipeline imports and exports with Canada and Mexico, and liquefied natural gas imports and exports. Crude oil production quantities are input to the Petroleum Market Module in NEMS for conversion and blending into refined petroleum products. The supply curves for natural gas are input to the Natural Gas Transmission and Distribution Module for use in determining prices and quantities.

Natural Gas Transmission and Distribution Module

The Natural Gas Transmission and Distribution Module represents the transmission, distribution, and pricing of natural gas, subject to end-use demand for natural gas, the supply of domestic natural gas, and the availability of natural gas traded on the international market, on a seasonal basis. The module tracks the flow of natural gas in an aggregate, domestic pipeline network, connecting the domestic and foreign supply sources with twelve demand regions. This capability allows the analysis of impacts of interregional constraints in the interstate natural gas pipeline network and the identification of pipeline and storage capacity expansion requirements. The key components of pipeline and distributor tariffs are included in the pricing algorithms.

Petroleum Market Module

The Petroleum Market Module forecasts prices of petroleum products, crude oil and product import activity, and domestic refinery operations, including fuel consumption, subject to the demand for petroleum products, availability and price of imported petroleum, and domestic production of crude oil, natural gas liquids, and alcohol fuels. The module represents refining activities in three regions. The first region includes Petroleum Administration for Defense District (PADD) I, the second includes PADDs II, III, IV, and the third includes PADD V. The module uses the same crude oil types as the International Energy Module. It explicitly models the requirements of the CAAA90 and the costs of new automotive fuels, such as oxygenated and reformulated gasoline, and includes oxygenate production and blending for reformulated gasoline. Costs include capacity expansion for refinery processing units. End-use prices are based on the marginal costs of production, plus markups representing product distribution costs, State and Federal taxes, and environmental costs. State taxes are assumed to increase with inflation. On the other hand, Federal taxes are assumed to remain constant at nominal 1997 levels, not increasing with inflation.

Coal Market Module

The Coal Market Module represents mining, transportation, and pricing of coal, subject to the end-use demand for coal differentiated by physical characteristics, such as the heat and sulfur content. The coal supply curves include a response to mine production, labor productivity, and factor input costs. Twelve coal types are represented, differentiated by thermal grade, sulfur content, and mining process. Production and distribution are computed for eleven supply and thirteen demand regions, using imputed coal transportation costs and trends in factor input costs. The Coal Market Module also forecasts the requirements for U.S. coal exports and imports. The international coal market component of the module computes trade in four types of coal for twenty import and sixteen export regions. Both the domestic and international coal markets are represented in a linear program.

Cases for the Annual Energy Outlook 1999

The *AEO99* presents five cases which differ from each other due to fundamental assumptions concerning the domestic economy and world oil market conditions. Three alternative assumptions are specified for each of these two factors, with the reference case using the midlevel assumption for each.

- **Economic Growth** - In the reference case, productivity grows at an average annual rate of 1.3 percent from 1997 through 2020 and the labor force at 0.8 percent per year, yielding a growth in real GDP of 2.1 percent per year. In the high economic growth case, productivity and the labor force grow at 1.6 and 1.0 percent per year, respectively, resulting in GDP growth of 2.6 percent annually. The

average annual growth in productivity, the labor force, and GDP are 1.0, 0.5, and 1.5 percent, respectively, in the low economic growth case.

- **World Oil Markets** - In the reference case, the average world oil price increases to \$22.73 per barrel (in real 1997 dollars) in 2020. Reflecting uncertainty in world markets, the price in 2020 reaches \$14.57 per barrel in the low oil price case and \$29.35 per barrel in the high oil price case.

In addition to these five cases, additional cases presented in Table 1 explore the impacts of changing key assumptions in individual sectors.

Many of the side cases were designed to examine the impacts of varying key assumptions for individual modules or a subset of the NEMS modules, and thus the full market consequences, such as the consumption or price impacts, are not captured. In a fully integrated run, the impacts would tend to narrow the range of the differences from the reference case. For example, the best available technology side case in the residential demand assumed that all future equipment purchases are made from a selection of the most efficient technologies available in a particular year. In a fully integrated NEMS run, the lower resulting fuel consumption would have the effect of lowering slightly the market prices of those fuels with the concomitant impact of increasing economic growth, thus stimulating some additional consumption. As another example, the higher electricity demand side case results in higher electricity prices. If the end-use demand modules were executed in a full run, the demand for electricity would be reduced slightly as a result of the higher prices and resulting lower economic growth, thus moderating somewhat the input assumptions. The results of these cases should be considered the maximum range of the impacts that could occur with the assumptions defined for the case.

All projections are based on Federal, State, and local laws and regulations in effect on July 1, 1998, including the additional fuels taxes in the Omnibus Budget Reconciliation Act of 1993, the CAAA90, the Energy Policy Act of 1992, the Outer Continental Shelf Deep Water Royalty Relief Act of 1995, and the Tax Payer Relief Act of 1997. Pending legislation and sections of existing legislation for which funds have not been appropriated are not reflected in these forecasts.

The projections include analysis of the provisions of the CCAP developed in 1993, which consists of forty-four actions to achieve carbon stabilization in the United States by 2000, relative to 1990. Thirteen of the actions not related to the combustion of energy fuels or to carbon dioxide and are not incorporated in the analysis. Since funding for many of the CCAP programs has been curtailed in budget negotiations, their full impact is not reflected in these projections. In addition, since some of the energy savings associated with CCAP programs are already in the baseline, the full projected impacts were reduced.

Emissions

Carbon emissions from energy use are dependent on the carbon content of the fuel and the fraction of the fuel consumed in combustion. The product of the carbon content at full combustion and the combustion fraction yields an adjusted carbon emission factor for each fuel. The emissions factors are expressed in millions of metric tons of carbon emitted per quadrillion Btu of energy use, or equivalently, in kilograms of carbon per million Btu. The adjusted emissions factors are multiplied by energy consumption to arrive at the carbon emissions projections.

For fuel uses of energy, the combustion fractions are assumed to be 0.99 for liquid fuels and 0.995 for gaseous fuels. The carbon in nonfuel use of energy, such as for asphalt and petrochemical feedstocks, is assumed to be sequestered in the product and not released to the atmosphere. For energy categories that are mixes of fuel and nonfuel uses, the combustion fractions are based on the proportion of fuel use. Any carbon emitted by renewable sources is considered balanced by the carbon sequestration that occurred in its creation. Therefore, following convention, net emissions of carbon from renewable sources is taken as zero, and no emission coefficient is reported. Renewable fuels include hydroelectric power, biomass, photovoltaic, geothermal, ethanol, and wind energy.

Table 2 presents the carbon coefficients at full combustion, the combustion fractions, and the adjusted carbon emission factors used for *AEO99*.

Table 1. Summary of AEO99 Cases

Case Name	Description	Integration mode
<i>Reference</i>	Baseline economic growth, world oil price, and technology assumptions	Fully Integrated
<i>Low Economic Growth</i>	Gross Domestic product grows at an average annual rate of 1.5 percent, compared to the reference case growth of 2.1 percent.	Fully Integrated
<i>High Economic Growth</i>	Gross domestic product grows at an average annual rate of 2.6 percent, compared to the reference case growth of 2.1 percent.	Fully Integrated
<i>Low World Oil Price</i>	World oil prices are \$14.57 per barrel in 2020, compared to \$22.73 per barrel in the reference case.	Partially Integrated
<i>High World Oil Price</i>	World oil prices are \$29.35 per barrel in 2020, compared to \$22.73 per barrel in the reference case.	Partially Integrated
<i>Residential: 1999 Technology</i>	Future equipment purchases based on equipment available in 1999. Building shell efficiencies fixed at 1999 levels.	Standalone
<i>Residential: High Technology</i>	Earlier availability, lower costs, and higher efficiencies assumed for more advanced equipment.	Standalone
<i>Residential: Best Available Technology</i>	Future equipment purchases and new building shells based on most efficient technologies available. Existing building shell efficiencies increase by 30 percent from 1993 values by 2020.	Standalone
<i>Commercial: 1999 Technology</i>	Future equipment purchases based on equipment available in 1999. Building shell efficiencies fixed at 1999 levels.	Standalone
<i>Commercial: High Technology</i>	Earlier availability, lower costs, and higher efficiencies assumed for more advanced equipment.	Standalone
<i>Commercial: Best Available Technology</i>	Future equipment purchases based on most efficient technologies available. Building shell efficiencies increase by 50 percent from reference values by 2020.	Standalone
<i>Industrial: 1999 Technology</i>	Efficiency of plant and equipment fixed at 1999 levels.	Standalone
<i>Industrial: High Technology</i>	Earlier availability, lower costs, and higher efficiencies assumed for more advanced equipment.	Standalone
<i>Transportation: 1999 Technology</i>	Efficiencies for new equipment in all modes of travel are fixed at 1999 levels.	Standalone
<i>Transportation: High Technology</i>	Reduced costs and improved efficiencies are assumed for advanced technologies.	Standalone
<i>Consumption: 1999 Technology</i>	Combination of the residential, commercial, industrial, and transportation 1999 technology cases and electricity low fossil technology case.	Fully Integrated
<i>Consumption: High Technology</i>	Combination of the residential, commercial, industrial, and transportation high technology cases and electricity high fossil technology case.	Fully Integrated
<i>Electricity: Low Nuclear</i>	Higher capital investments assumed after 30 and 40 years of operation.	Partially Integrated
<i>Electricity: High Nuclear</i>	No capital investments are required for license renewal.	Partially Integrated
<i>Electricity: High Demand</i>	Electricity demand increases at an annual rate of 2.0 percent, compared to 1.4 percent in the reference case.	Partially Integrated

Table 1. Summary of the AEO99 cases (continued)

Case Name	Description	Integration mode
<i>Electricity: Low Fossil Technology</i>	New generating technologies are assumed not to improve over time from 1997.	Fully Integrated
<i>Electricity: High Fossil Technology</i>	Costs and efficiencies for advanced fossil-fired generating technologies are assumed to improve from reference case values.	Fully Integrated
<i>Electricity: Competitive Pricing</i>	Competitive pricing is phased in over 10 years in all regions of the country.	Fully Integrated
<i>Electricity: 5.5-Percent Renewable Portfolio Standard</i>	Nonhydroelectric renewable generation increases to 5.5 percent of total generation for the period 2010-2015.	Fully Integrated
<i>Renewables: High Renewables</i>	Lower costs and higher efficiencies are assumed for new renewable generating technologies.	Fully Integrated
<i>Oil and Gas: Slow Technology</i>	Cost, finding rate, and success rate parameters adjusted for slower improvement.	Fully Integrated
<i>Oil and Gas: Rapid Technology</i>	Cost, finding rate, and success rate parameters adjusted for more rapid improvement.	Fully Integrated
<i>Oil and Gas: Automaker's National Low-Sulfur Gasoline</i>	Starting in 2004, sulfur levels of all gasoline in the United States meet a 40 ppm annual average standard.	Standalone
<i>Oil and Gas: API/NPRA Regional Reduced-Sulfur Gasoline</i>	Starting in 2004, gasoline in Federal reformulated gasoline areas and in 23 States and East Texas meets a 150 ppm annual average standard. California gasoline continues to meet the current 40 ppm standard, and gasoline in all other areas of the country meets a 300 ppm standard. In 2010, the areas that were using 150 ppm gasoline are assumed to switch to 40 ppm gasoline.	Standalone
<i>Coal: Low Mining Cost</i>	Productivity increases at an annual rate of 3.8 percent, compared to the reference case growth of 2.3 percent. Real wages decrease by 0.5 percent annually, compared to constant real wages in the reference case.	Partially Integrated
<i>Coal: High Mining Cost</i>	Productivity increases at an annual rate of 1.2 percent, compared to the reference case growth of 2.3 percent. Real wages increase by 0.5 percent annually, compared to constant real wages in the reference case.	Partially Integrated

Table 2. Carbon Emission Factors (Kilograms-carbon per million Btu)

Fuel Type	Carbon Coefficient at Full Combustion	Combustion Fraction	Adjusted Emissions Factor
Petroleum			
Motor Gasoline	19.35	0.990	19.16
Liquefied Petroleum Gas			
Used as Fuel	16.87	0.995	16.79
Used as Feedstock	17.11	0.200	3.42
Jet Fuel	19.33	0.990	19.14
Distillate Fuel	19.95	0.990	19.75
Residual Fuel	21.49	0.990	21.28
Asphalt and Road Oil	20.62	0.000	0.00
Lubricants	20.24	0.600	12.14
Petrochemical Feedstocks	19.37	0.200	3.87
Kerosene	19.72	0.990	19.52
Petroleum Coke	27.85	0.500	13.93
Petroleum Still Gas	17.51	0.995	17.42
Other Industrial	20.31	0.990	20.11
Coal			
Residential and Commercial	25.92	0.990	25.74
Metallurgical	25.55	0.990	25.28
Industrial Other	25.61	0.990	25.38
Electric Utility ¹	25.74	0.990	25.48
Natural Gas			
Used as Fuel	14.47	0.995	14.40
Used as Feedstocks	14.47	0.774	11.20

¹Emission factors for coal used for electricity generation are specified by coal supply region and types of coal, so the average carbon contents for coal varies throughout the forecast. The 1997 average is 25.74.

Source: Energy Information Administration, Emissions of Greenhouse Gases in the United States 1997, DOE/EIA-0573(97), (Washington, DC, October 1998).

Notes and Sources

- [1] Energy Information Administration, *Annual Energy Outlook 1999* (AEO99), DOE/EIA-0383(99), (Washington, DC, December 1998).
- [2] NEMS documentation reports are available on the EIA CD-ROM and the EIA Homepage (<http://www.eia.doe.gov/bookshelf.html>). For ordering information on the CD-ROM, contact STAT-USA's toll free order number: 1-800-STAT-USA or by calling (202) 482-1986.
- [3] Energy Information Administration, *The National Energy Modeling System: An Overview 1998*, DOE/EIA-0581(98), (Washington, DC, February 1998).

Macroeconomic Activity Module

The Macroeconomic Activity Module (MAM) represents the interaction between the U.S. economy as a whole and energy markets. The rate of growth of the economy, measured by the growth in gross domestic product (GDP) is a key determinant of the growth in demand for energy. Associated economic factors, such as interest rates and disposable income, strongly influence various elements of the supply and demand for energy. At the same time, reactions to energy markets by the aggregate economy, such as a slowdown in economic growth resulting from increasing energy prices, are also reflected in this module. A detailed description of the MAM is provided in the EIA publication, *Model Documentation Report: Macroeconomic Activity Module (MAM) of the National Energy Modeling System*, DOE/EIA-M065, (Washington, DC, February 1994).

Key Assumptions

The output of the Nation's economy, measured by GDP, is expected to increase by 2.1 percent between 1997 and 2020 in the reference case. The growth in GDP can be decomposed into two key factors: the growth rate of the labor force and rate of productivity change associated with the labor force. As Table 3 indicates, the rate of growth of GDP is slower in the latter half of the forecast period due to a slowdown in the expansion of the labor force. The growth of the labor force depends upon the forecasted population growth and the labor force participation rate. The Census Bureau's middle series population projection is used as a basis for the *AEO99*. Total population is expected to grow by 0.8 percent between 1997 and 2020, with a higher rate of growth pre-2000 and a slower rate of growth post-2000. Over the forecast period, the labor force participation rate is expected to peak in 2007 and then decline as "baby boom" cohorts begin to retire. Combining population projections with labor force participation rates gives an increase in labor force earlier in the forecast horizon and then post-2000, the economy experiences slower growth as demographic trends affect future economic growth.

Table 3. Growth in Gross Domestic Product, Labor Force, and Productivity
(Percent per Year)

Assumptions	1997-2000	2000-2005	2005-2010	2010-2015	2015-2020	1997-2020
GDP (Billion Chain-Weighted \$1992)						
High Growth	3.2	2.8	2.9	2.3	2.1	2.6
Reference	2.5	2.3	2.4	1.8	1.6	2.1
Low Growth	1.8	1.7	1.9	1.2	1.0	1.5
Labor Force						
High Growth	1.6	1.3	1.3	0.7	0.5	1.0
Reference	1.4	1.0	1.0	0.5	0.3	0.8
Low Growth	1.1	0.7	0.8	0.2	0.0	0.5
Productivity						
High Growth	1.5	1.5	1.7	1.5	1.5	1.6
Reference	1.1	1.3	1.4	1.3	1.3	1.3
Low Growth	0.8	1.0	1.1	1.0	1.0	1.0

Source: Energy Information Administration, *AEO99* National Energy Modeling System runs: aeo99b.d100198a; lmac99.d100198a; and hmac99.d100198a

The productivity of labor is the second major reason for economic growth and combines the positive effects of a growing capital stock of the economy as well as technological change occurring over time. A key to achieving the reference case's long-run 2.1 percent growth is an anticipated recovery in productivity growth. Productivity growth slowed in the 1970's, compared to the growth experienced post-World War II. There is no consensus about why productivity growth declined so much after 1973. However, between 1980 and 1990, business investment's share of GDP declined at the same time that both the Federal budget deficit and the trade deficit increased. Since 1991, the economic recovery has been led by strong gains in business investment as a result of lower interest rates. Productivity has shown recent strong gains as economic output has increased more rapidly than employment gains.

In the reference case, productivity growth remains relatively constant throughout the forecast period. The Federal deficit is expected to diminish over time, helping lead a recovery in private investment and spending on research and development. Business fixed investment rises as a share of GDP. The resulting growth in the capital stock and the technology base of that capital stock helps to sustain productivity growth exceeding 1 percent. This growth in productivity offsets some of the decline in the labor force growth, but the economy continues to slow down over time.

To reflect the uncertainty in forecasts of economic growth, the *AEO99* forecasts use high and low economic growth cases along with the reference case to project the possible energy markets. All three economic growth cases are based on forecasts prepared by Data Resources, Inc. (DRI).⁴ The DRI forecasts used in *AEO99* are the August 1998 Trend Growth scenario along with the February 1998 Optimistic and Pessimistic growth projections.

The high economic growth case incorporates higher population, labor force and productivity growth rates than the reference case. Due to the higher productivity gains, inflation and interest rates are lower compared to the reference case. Investment, disposable income, and industrial production are increased. Economic output is projected to increase by 2.6 percent between 1997 and 2020. The low economic growth case assumes lower population, labor force, and productivity gains, with resulting higher prices and interest rates and lower industrial output growth. In the low economic growth case, economic output is expected to increase by 1.5 percent over the forecast horizon.

The regional disaggregation of the economic variables uses regional shares based on a regional model solution. These shares change over time, but do not change as energy prices change from the projected reference price path.

⁴ The underlying macroeconomic growth cases use DRI/McGraw-Hill's August 1998 T250898 and February TO250298 and TP250298.

International Energy Module

The International Energy Module determines changes in the world oil price and the supply prices of petroleum products for import to the United States in response to changes in U.S. import requirements.


A market clearing method is used to determine the price at which worldwide demand for oil is equal to the worldwide supply. The module determines new values for oil production and demand for regions outside the United States, along with a new world oil price that balances supply and demand in the international oil market. A detailed description of the International Energy Module is provided in the EIA publication, *Model Documentation Report: The International Energy Module of the National Energy Modeling System*, DOE/EIA-M071, (Washington, DC, April 1994).

Key Assumptions

The level of oil production by countries in the OPEC is a key factor influencing the world oil price projections incorporated into *AEO99*. Non-OPEC production, worldwide regional economic growth rates and the associated regional demand for oil are additional factors affecting the world oil price.

OPEC oil production is assumed to increase throughout the forecast, making OPEC the source for the worldwide increase in oil consumption expected over the forecast period (Figure 2). OPEC is assumed to be the source of additional production because its member nations hold a major portion of the world's total reserves—reaching almost 800 billion barrels, over 78 percent of the world's total, at the end of 1997.⁵ For the *AEO99* forecasts, three different OPEC production paths are the principal assumptions leading to the three world oil price path cases examined: the low oil price case, reference case, and high oil price case. The values assumed for OPEC production for the three world oil price cases are given in Figure 2. Non-OPEC oil production is expected to follow a gradually rising path—with an increase of more than 1.0 percent per year over the forecast period—as advances in both exploration and extraction technologies result in this upward trend (Figure 3). One fixed path for non-OPEC oil production is initially input for all three world oil price case projections. Non-OPEC production depends upon the values of world oil prices, so the final forecast solutions of the levels of non-OPEC production for the three oil prices cases diverge from the initial assumptions. Production is higher in the high oil price case since more marginal wells are profitable at the higher prices. Likewise, lower world oil prices are associated with lower production levels. The final non-OPEC production paths for the three oil price cases are shown in Figure 3.


Figure 2. OPEC Oil Production, 1970-2020
(Million Barrels per Day)

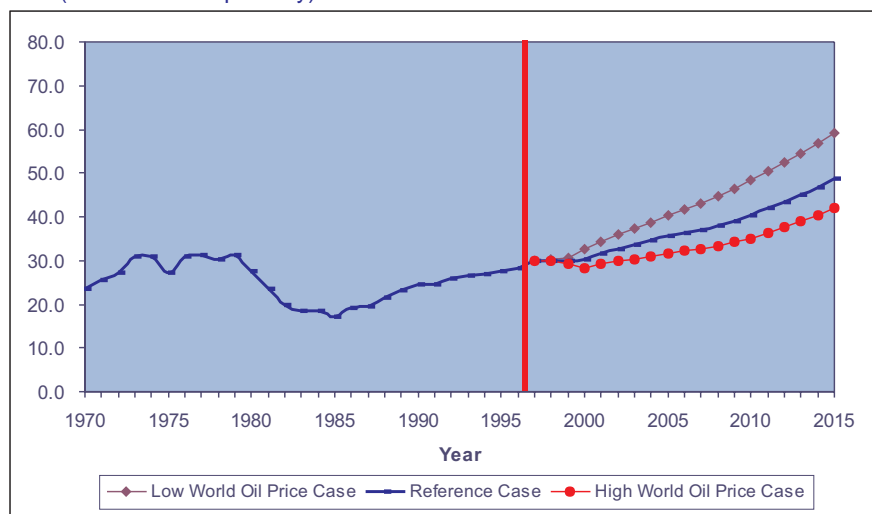

OPEC = Organization of Petroleum Exporting Countries.

Sources: Energy Information Administration. *AEO99* National Energy Modeling System runs: lwop98.d100298a; aeo99b.d100198a; and hwop99.d100298b.

Figure 3. Non-OPEC Oil Production, 1970-2020
(Million Barrels per Day)

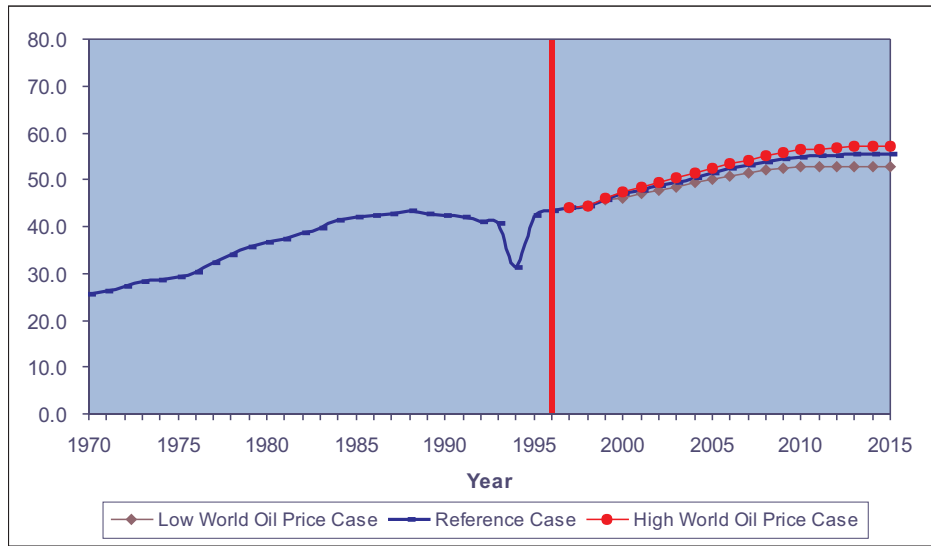

OPEC = Organization of Petroleum Exporting Countries.

Sources: Energy Information Administration. AEO99 National Energy Modeling System runs: lwop98.d100298a; aeo99b.d100198a; and hwop99.d100298b.

The assumed growth rates for GDP for various regions in the world are shown in Table 4. This set of growth rates for GDP was assumed for all three price cases. The GDP growth rate assumptions are from selected issues of The WEFA Group, *World Economic Outlook*. The WEFA GDP growth rates have been used for all regions of the world except for the developing countries, for which the GDP growth rates have been assumed to be about 1 percentage point per year lower than the WEFA values.

Table 4. Average Annual Regional Gross Domestic Product Growth Rates, 1997-2020
(Percent per Year)

Region	Gross Domestic Product
Organization for Economic Cooperation and Development	2.0
Other Developing Countries	3.7
Eurasia	5.2
China	6.8
Former Soviet Union	3.5
Eastern Europe	4.4
Total World	2.9

Source: The WEFA Group, *World Economic Outlook*, (July 1998), Volume 1, and EIA, *World Energy Projection System* (1998)

The WEFA GDP forecasts are made with limited consideration of prospective energy market conditions. EIA's analysis indicates that economic growth by the developing countries at the rates suggested by WEFA would put upward pressures on energy production and prices (particularly for oil) that could not be sustained by the market. These high economic growth rates would lead to oil prices high enough to retard economic growth. The 1-percentage-point reduction in economic growth rates for developing countries provides a better balance between sustainable economic growth rates and growth in energy production.

The values for growth in oil demand calculated in the International Energy Module, which depend upon the oil price levels as well as the GDP growth rates, are shown in Table 5 for the three oil price cases by regions of the world. The different rates of growth for oil consumption in the three price cases reflect the different levels in consumption calculated for the different oil prices.

Economic growth and oil consumption in the Former Soviet Union (FSU) are expected to reverse the downward trends exhibited over the past half-dozen years. After 1997, oil consumption in the FSU is

expected to begin gradually rising and increase by almost 70% by the end of the forecast period. After 1997, oil production in the FSU also recovers and the FSU remains a net exporter through 2020. In contrast, China is expected to remain a net importer of oil through 2020.

Petroleum product imports are represented in the projections through a series of curves that present the quantity of each product that the world market is willing to supply to U.S. markets for each of the five Petroleum Administration for Defense Districts (PADDs). Curves are provided for ten products: traditional gasoline (including aviation), reformulated gasoline, No. 2 heating oil, low-sulfur distillate oil, high- and low-sulfur residual oil, jet fuel (including naphtha jet), liquefied petroleum gas, petrochemical feedstocks, and other. The curves are calculated using the World Oil Refining Logistics Demand (WORLD) Model.⁶ The WORLD model uses as inputs worldwide demand for crude oil and petroleum products for world oil prices that are in the range of prices assumed for *AEO99*, as well as values for worldwide petroleum production over this price range. The refinery technology incorporated in the model is updated using the most recently available Oil & Gas Journal Database.⁷

Table 5. Average Annual Regional Growth Rates for Oil Demand, 1997-2020
(Percent per Year)

Region	Low Price	Reference	High Price
Organization for Economic Cooperation and Development	1.5	1.1	0.8
Organization of Petroleum Exporting Countries	2.0	2.0	2.0
Other Developing Countries	3.7	3.3	3.1
Eurasia	3.6	3.3	3.1
China	4.8	4.3	4.1
Former Soviet Union	2.5	2.3	2.1
Eastern Europe	3.1	2.9	2.8
Total World	2.3	2.0	1.8

Source: Energy Information Administration, *AEO99* National Energy Modeling System runs: lwop99.d100298b; aeo99b.d100198a; and hwop99.d100298b.

Notes and Sources

- [5] EIA, *International Energy Outlook 1998*, DOE/EIA-0484(98) (Washington DC, April 1998).
- [6] EIA, *EIA Model Documentation: World Oil Refining Logistics Demand Model, "WORLD" Reference Manual*, DOE/EIA-M058, (Washington, DC, March 1994).
- [7] Oil & Gas Journal, *World Wide Refinery Survey*, (data as of January 1, 1996).

Household Expenditures Module

The Household Expenditures Module (HEM) constructs household energy expenditure profiles using historical survey data on household income, population and demographic characteristics, and consumption and expenditures for fuels for various end-uses. These data are combined with NEMS forecasts of household disposable income, fuel consumption, and fuel expenditures by end-use and household type. The HEM disaggregation algorithm uses these combined results to forecast household fuel consumption and expenditures by income quintile and Census Division.

Key Assumptions

The historical input data used to develop the HEM version for the *AEO99* consists of recent household survey responses, aggregated to the desired level of detail. Two surveys performed by the Energy Information Administration are included in the *AEO99* HEM database, and together these input data are used to develop a set of baseline household consumption profiles for the direct fuel expenditure analysis. These surveys are the 1993 Residential Energy Consumption Survey (RECS) and the 1991 Residential Transportation Energy Consumption Survey (RTECS).

HEM uses the consumption forecast by NEMS for the residential and transportation sectors as inputs to the disaggregation algorithm that results in the direct fuel expenditure analysis. Household end-use and personal transportation service consumption are obtained by HEM from the NEMS Residential and Transportation Demand Modules. Household disposable income is adjusted with forecasts of total disposable income from the NEMS Macroeconomic Activity Module.

The fundamental assumptions underlying HEM's processing of the historical and NEMS forecast data to obtain its results are:

- Individual households are assumed not to migrate between income quintiles throughout the analysis period.
- All households within a household segment are assumed to consume the average quantity of fuel for that segment. Distributions about, or deviations from, the average are not explicitly modeled.
- The change in average household consumption between forecast year y and survey base year y_0 is captured from the NEMS run at the finest available level of detail, and the same proportional change is assumed to occur in each HEM subsegment of the analysis.

Application of the HEM algorithm produces a direct household fuel expenditure forecast at the finest level of disaggregation; namely, by fuel, end-use service, housing type and vintage, ethnicity, disposable income quintile, Census Division, and year. Results obtained are summed across end-uses to yield total direct fuel expenditures as a function of disposable income for each household segment. The consolidation of these high-resolution results into national average household expenditure results requires a weighted averaging in order to obtain the desired aggregations. The weighing scheme used requires the proportions of households of each type and vintage headed by householders of each ethnicity and income quintile. The survey data provides these historical subsegment proportions, and for the *AEO99* they are assumed to remain constant throughout the forecast period.

Residential Demand Module

The NEMS Residential Demand Module forecasts future residential sector energy requirements based on projections of the number of households and the stock, efficiency, and intensity of use of energy-consuming equipment. The Residential Demand Module projections begin with a base year estimates of the housing stock, the types and numbers of energy-consuming appliances servicing the stock, and the “unit energy consumption” by appliance (or UEC—in million Btu per household per year). The projection process adds new housing units to the stock, determines the equipment installed in new units, retires existing housing units, and retires and replaces appliances. The primary exogenous drivers for the module are housing starts by type (single-family, multifamily and mobile homes) and Census Division and prices for each energy source for each of the nine Census Divisions. The Residential Demand Module also requires projections of available equipment over the forecast horizon. Over time, equipment efficiency tends to increase because of general technological advances and also because of Federal and/or state efficiency standards. As energy prices and available equipment changes over the forecast horizon, the module includes projected changes to the type and efficiency of equipment purchased as well as projected changes in the usage intensity of the equipment stock.

The end-use services for which equipment stocks are modeled include space conditioning (heating and cooling), water heating, refrigeration, freezers, dishwashers, clothes washers, furnace fans, cooking, and clothes drying. In addition to the major equipment-driven end-uses, the average energy consumption per household is projected for secondary heating, lighting, color televisions, personal computers, and other electric and nonelectric appliances. The module’s output includes number of households, equipment stock, average equipment efficiencies, and energy consumed by service, fuel, and geographic location. The fuels represented are distillate fuel oil, liquefied petroleum gas, natural gas, kerosene, electricity, wood, geothermal, coal, and solar (active) energy.

One of the implicit assumptions embodied in the Residential Demand Module is that through 2020, there will be no radical changes in technology or consumer behavior. No new regulations of efficiency beyond those currently embodied in law or new government programs fostering efficiency improvements are assumed. Technologies which have not gained widespread acceptance today, will not achieve significant penetration by 2020. Currently available technologies will evolve in both efficiency and cost. In general, for the same real cost, future technologies will be less expensive than those available today. When choosing new or replacement technologies, consumers will behave similarly to the way they now behave. The intensity of end-uses will change moderately in response to price changes. Electric end uses will continue to expand, but at a decreasing rate⁸

Key Assumptions

Housing Stock Submodule

A very important determinant of future energy consumption is the projected number of households. Base year estimates for 1993 are derived from the Energy Information Administration’s (EIA) *Residential Energy Consumption Survey* (RECS) (Table 6). The forecast for occupied housing units is done separately for each Census Division. It is based on the combination of the previous year’s surviving stock with projected housing starts provided by the NEMS Macroeconomic Activity Module. The housing stock submodule assumes a constant survival rate (the percentage of households which are present in the current forecast year, which were also present in the preceding year) for each type of housing unit; 99.6 percent for single-family units, 99.6 percent for multifamily units, and 96.5 percent for mobile home units. Projected fuel consumption is dependent not only on the projected number of housing units, but also on the type and geographic distribution of the houses. The intensity of space heating energy use varies greatly across the various climate zones in the United States. Also, fuel prevalence varies across the country—oil (distillate) is more frequently used as a heating fuel in the New England and Middle Atlantic Census Divisions than in the rest of the country, while natural gas dominates in the Midwest. An example of differences by housing type is the more prevalent use of liquefied petroleum gas in mobile homes relative to other housing types.

Table 6. 1993 Households

Region	Single-family Units	Multi-family Units	Mobile Home Units	Total Units
New England	3,094,829	1,747,055	225,381	5,067,265
Mid Atlantic	8,813,412	5,279,802	317,255	14,410,469
East North Central	11,396,562	4,009,539	945,403	16,351,504
West North Central	5,175,494	1,304,775	468,787	6,949,056
South Atlantic	12,193,075	3,733,627	1,440,830	17,367,532
East South Central	4,677,828	639,879	684,169	6,001,876
West South Central	7,959,478	1,686,948	482,358	10,128,784
Mountain	3,643,727	1,060,754	654,887	5,359,368
Pacific	9,854,773	4,785,219	355,646	14,995,638
United States	66,809,178	24,247,598	5,574,716	96,631,492

Source: Energy Information Administration, *Housing Characteristics 1993*, DOE/EIA-314(93), (Washington, DC, June 1995).

Technology Choice Submodule

The key inputs for the Technology Choice Submodule are fuel prices by Census Division and characteristics of available equipment (installed cost, maintenance cost, efficiency and equipment life). Fuel prices are determined by an equilibrium process which considers energy supplies and demands and are passed to this submodule from the integrating module of NEMS. Energy price, combined with equipment UEC (which is a function of efficiency), determines the operating costs of equipment. Equipment characteristics are exogenous to the model and are modified to reflect both Federal standards and anticipated changes in the market place. Table 7 lists capital cost and efficiency for selected residential appliances for the years 1995 and 2005.

Table 7. Installed Cost and Efficiency Ratings of Selected Equipment

Equipment Type	Relative Performance ¹	1998 Installed Cost (\$1998) ²	Efficiency ²	2015 Installed Cost (\$1998) ²	Efficiency ³	Approximate Discount Rate
Electric Heat Pump	Minimum	\$4,100	10.0	\$4,100	10.0	40%
	Best	\$5,555	17.7	\$5,200	18.0	
Natural Gas Furnace	Minimum	\$1,300	0.78	\$1,300	0.78	15%
	Best	\$2,700	0.96	\$1,600	0.96	
Room Air Conditioner	Minimum	\$450	8.7	\$450	9.7	125%
	Best	\$760	11.7	\$760	12.0	
Central Air Conditioner	Minimum	\$2,500	10.0	\$2,500	10.0	50%
	Best	\$3,600	18.0	\$3,100	18.0	
Refrigerator (18 cubic ft)	Minimum	\$530	690	\$530	478	19%
	Best	\$850	518	\$700	400	
Electric Water Heater	Minimum	\$350	0.86	\$350	0.86	83%
	Best	\$1,025	2.60	\$800	2.20	
Solar Water Heater	N/A	\$2,600	2.0	\$2,600	2.0	83%

¹Minimum performance refers to the lowest efficiency equipment available. Best refers to the highest efficiency equipment available.

²Installed costs are given in 1998 dollars.

³Efficiency measurements vary by equipment type. Electric heat pumps and central air conditioners are rated for cooling performance using the Seasonal Energy Efficiency Ratio (SEER); natural gas furnaces are based on Annual Fuel Utilization Efficiency; room air conditioners are based on Energy Efficiency Ratio (EER); refrigerators are based on kilowatt-hours per year; and water heaters are based on Energy Factor (delivered Btu divided by input Btu).

Source: Arthur D. Little, *EIA Technology Forecast Updates*, Reference Number 37125, September 1998.

The Residential Demand Module projects equipment purchases based on a nested choice methodology. The first stage of the choice methodology determines the fuel and technology to be used, the second stage

determines the efficiency of the selected equipment type. For new construction, home heating fuel and technology choices are determined based on life-cycle costs assuming a 20 percent discount rate. The equipment choices for cooling, water heating, and cooking are linked to the space heating choice for new construction. Technology and fuel choice for replacement equipment uses a nested methodology similar to that for new construction, but includes (in addition to the capital and installation costs of the equipment), explicit costs for technology switching (e.g., costs for installing gas lines if switching from electricity or oil to gas, or costs for retrofitting air ducts if switching from electric resistance heat to central heating types). Also, for replacements, there is no linking of fuel choice for water heating and cooking as is done for new construction. Technology switching upon replacement is allowed for space heating, air conditioning, water heating, cooking and clothes drying.

Once the fuel and technology choice for a particular end use is determined, the second stage of the choice methodology determines efficiency. In any given year, there are several available prototypes of varying efficiency (minimum standard, medium low, medium high and highest efficiency). Efficiency choice is based on a functional form and coefficients which give greater or lesser importance to the installed capital cost (first cost) versus the operating cost. Generally, within a technology class, the higher the first cost, the lower the operating cost.

The parameters for the second stage efficiency choice are calibrated to the most recently available shipment data for the major residential appliances. Shipment efficiency data are obtained from industry associations which monitor shipments such as the Association of Home Appliance Manufacturers. Because of this calibration procedure, the model allows the relative importance of first cost versus operating cost to vary by general technology and fuel type (e.g., natural gas furnace, electric heat pump, electric central air conditioner, etc.). Once the model is calibrated, it is possible to calculate (approximately) the apparent discount rates based on the relative weight given to the operating cost savings versus the weight given to the higher cost of more efficient equipment. Discount rates in excess of 30 percent are common in the Residential Demand Module. The prevalence of such high apparent discount rates by consumers has led to the notion of the “efficiency gap”— that is, there are many investments that could be made that provide rates of return in excess of residential borrowing rates (15 to 20 percent for example). There are several studies which document instances of apparent high discount rates.⁹ The efficiency gap literature has been drawn on as the basis for efficiency standards and Federally-Sponsored voluntary programs under the Climate Change Action Plan (CCAP) (see on page 23). Once equipment efficiencies for a technology and fuel are determined, the installed efficiency for its entire stock is calculated.

Appliance Stock Submodule

The Appliance Stock Submodule is an accounting framework which tracks the quantity and average efficiency of equipment by end use, technology, and fuel. It separately tracks equipment requirements for new construction and existing housing units. For existing units, this module calculates equipment which survives from previous years, allows certain end uses to further penetrate into the existing housing stock and calculates the total number of units required for replacement and further penetration. Air conditioning and clothes drying are the two end uses not considered to be “fully penetrated.”

Once a piece of equipment enters into the stock, an accounting of its remaining life is begun. It is assumed that all appliances survive a minimum number of years after installation. A fraction of appliances are removed from the stock once they have survived for the minimum number of years. Between the minimum and maximum life expectancy, all appliances retire based on a linear decay function. For example, if an appliance has a minimum life of 5 years and a maximum life of 15 years, one tenth of the units (1 divided by 15 minus 5) are retired in each of years 6 through 15. It is further assumed that, when a house is retired from the stock, all of the equipment contained in that house retires as well; i.e., there is no secondhand market for this equipment. The assumptions concerning equipment lives are given in Table 8.

Fuel Consumption Submodule

Energy consumption is calculated by multiplying the vintage equipment stocks by their respective UECs. The UECs include adjustments for the average efficiency of the stock vintages, short term price elasticity of demand and “rebound” effects on usage (see discussion on page 22), the size of new construction relative to the existing stock, people per household and shell efficiency and weather effects (space heating and

Table 8. Minimum and Maximum Life Expectancies of Equipment

Equipment	Minimum Life	Maximum Life
Heat Pumps	8	16
Central Forced-Air Furnaces	18	29
Hydronic Space Heaters	20	25
Room Air Conditioners	12	19
Central Air Conditioners	8	16
Water Heaters	12	19
Cooking Stoves	16	21
Clothes Dryers	6	30
Refrigerators	7	26
Freezers	11	31

Source: Lawrence Berkeley Laboratory, *Baseline Data for the Residential Sector and Development of a Residential Forecasting Database*, May 1994, and analysis of RECS 1993 data.

cooling). The various levels of aggregated consumption (consumption by fuel, by service, etc.) are derived from these detailed equipment-specific calculations.

Equipment Efficiency

The average energy consumption of a particular technology is initially based on estimates derived from RECS 1993. Appliance efficiency is either derived from a long history of shipment data (e.g., the efficiency of conventional air-source heat pumps) or assumed based on engineering information concerning typical installed equipment (e.g., the efficiency of ground-source heat pumps). When the average efficiency is computed from shipment data, shipments going back as far as 20 to 30 years are combined with assumptions concerning equipment lifetimes. This allows for not only an average efficiency to be calculated, but also for equipment retirements to be vintaged—older equipment tends to be lower in efficiency and also tends to get retired before newer, more efficient equipment. Once equipment is retired, the Appliance Stock and Technology Choice Modules determine the efficiency of the replacement equipment. It is often the case that the retired equipment is replaced by substantially more efficient equipment.

As the stock efficiency changes over the simulation interval, energy consumption decreases in inverse proportion to efficiency. Also, as efficiency increases, the efficiency rebound effect (discussed below) will offset some of the reductions in energy consumption by increased demand for the end-use service. For example, if the stock average for electric heat pumps is now 10 percent more efficient than in 1993, then all else constant (weather, real energy prices, shell efficiency, etc...), energy consumption per heat pump would average about only 9 percent less.

Adjusting for the Size of New Construction

Information derived from RECS 1993 indicates that new construction (post-1990) is on average roughly 20 percent larger than the existing stock of housing. The residential module uses similar estimates for each Census Division to model the size of new construction by housing type. The energy consumption for space heating, air conditioning, and lighting are assumed to increase with the square footage of the structure (all future new construction is assumed to be of the size of the post-1990 vintage stock from RECS and Bureau Census data¹⁰). This results in an increase in the average size of the housing stock of 1,630 to 1,728 square feet from 1993 through 2020.

Adjusting for Weather and Climate

Weather in any given year always includes short-term deviations from the expected longer-term average (or climate). Recognition of the effect of weather on space heating and air conditioning is necessary to avoid inadvertently projecting abnormal weather conditions into the future. In the residential module, proportionate adjustments are made to space heating and air conditioning UECs by Census Division. These

adjustments are based on National Oceanographic and Atmospheric Administration (NOAA) data for heating and cooling degree-days (HDD and CDD). A 10 percent increase in HDD would increase space heating consumption by 10 percent over what it would have otherwise been. The residential module makes weather adjustments for the years 1993 through 1998. After 1998, long term weather patterns are assumed to occur. The residential module uses 30-year averages of HDD and CDD as normal weather conditions.

Short-Term Price Effect and Efficiency Rebound

It is assumed that energy consumption for a given end-use service is affected by the marginal cost of providing that service. That is, all else equal, a change in the price of a fuel will have an opposite, but less than proportional, effect on fuel consumption. The current value for the short-term elasticity parameter is -0.25. This value implies that for a 1 percent increase in the price of a fuel, there will be a corresponding decrease in energy consumption of -0.25 percent. Another way of affecting the marginal cost of providing a service is through altered equipment efficiency. For example, a 10 percent increase in efficiency will reduce the cost of providing the end-use service by 10 percent. Based on the short-term efficiency rebound parameter, the demand for the service will rise by 1.5 percent (-10 percent multiplied by -0.15). Only space heating and cooling are assumed to be affected by both elasticities and the efficiency rebound effect.

Shell Efficiency

The shell integrity of the building envelope is an important determinant of the heating and cooling load for each type of household. In the NEMS Residential Demand Module, the shell integrity is represented by an index, which changes over time to reflect improvements in the building shell. The shell integrity index is dimensioned by vintage of house, fuel type, service (heating and cooling), and Census Division. The age, location, and type of heating fuel are important factors in determining the level of shell integrity. Housing units which heat with electricity tend to be better insulated than homes that use other fuels. The age of homes are classified by new (post-1993) and existing. Existing homes are characterized by the RECS 1993 survey and are assigned a shell index value based on the mix of homes that exist in the base year (1993). The improvement over time in the shell integrity of these homes is a function of two factors—an assumed annual efficiency improvement and improvements made when real fuel prices increase (no price-related adjustment is made when fuel prices fall). New homes are more efficient than old homes in terms of their building envelope. Based on RECS data and existing building codes, newer homes are roughly 10 percent more efficient than the existing stock, depending upon the heating fuel and Census Division. Over time, the shell integrity of new homes improves as the stringency of building codes increases. The shell integrity index affects the space heating and cooling loads directly, causing a decrease in fuel consumed for these services as the shell integrity improves.

Legislation and Other Federal Programs

Energy Policy Act of 1992 (EPACT)

The EPACT contains several policies which are designed to improve residential sector energy efficiency. The EPACT policies analyzed in the NEMS Residential Demand Module include the sections relating to window labeling programs, low-flow showerheads, and building codes. The impact of building codes is captured in the shell efficiency index for new buildings listed above. Other EPACT provisions, such as home energy efficiency ratings and energy-efficient mortgages, which allow home buyers to qualify for higher loan amounts if the home is energy-efficient, are voluntary, and their effects on residential energy consumption have not been estimated.

The window labeling program is designed to help consumers determine which windows are most energy efficient. These labels already exist for all major residential appliances. Based on analysis of RECS data, it is assumed that the window labeling program will decrease heating loads by 8 percent and cooling loads by 3 percent. Approximately 25 percent of the existing (pre-1994) housing stock is affected by this policy by 2015.

The low-flow showerhead program is designed to cut domestic hot water use for showers. It is assumed that these showerheads cut hot water use by 50 percent for shower use. Since showers account for

approximately 30 percent of domestic hot water use, total hot water use decreases by 15 percent. It is further assumed that these showerheads are installed exclusively in new construction.

National Appliance Energy Conservation Act of 1987

The Technology Choice Submodule incorporates equipment standards established by the National Appliance Energy Conservation Act of 1987 (NAECA). Some of the NAECA standards implemented in the module include: a Seasonal Energy Efficiency Rating (SEER) of 10.0 for heat pumps; an Annual Fuel Utilization Efficiency (energy output over energy input) of 0.78 for oil and gas furnaces; an Efficiency Factor of .88 for electric water heaters; and refrigerator standards that set consumption limits to 976 kilowatt-hours per year in 1990, 691 kilowatt-hours per year in 1993, and 483 kilowatt-hours per year in 2002.

Climate Change Action Plan

The Climate Change Action Plan (CCAP) contains many policies which are designed to reduce carbon emissions in the United States to the 1990 levels. The CCAP strategies which directly affect the residential sector are Actions 8 through 11. The Residential Demand Module for *AEO99* includes effects from Action Items 6, 7, 8, 10, and 11 (the House and Senate appropriations included no funding for Action 9). Specifically, these sections relate to Federal Efficiency Standards for several household appliances, stricter building codes, and the expansion of “Golden Carrot” demand-pull type programs. Analyses relating to CCAP programs are on an ongoing basis, as funding changes over time.

Action Item 6 includes voluntary programs sponsored by the Department of energy (DOE) and the Environmental Protection Agency (EPA) aimed at market-pull partnerships with industry. Among the programs in Action Item 6 are DOE’s R&D efforts to commercialize advanced energy-efficient technologies and EPA’s Energy Star Programs for residential homes, air conditioning, ductwork and lighting.

CCAP Action Items 8, 10 and 11 are policies designed to reduce energy consumption by strengthening building shell efficiency and promoting energy efficient mortgages. In *AEO99*, the shell integrity (efficiency) of new construction increases relative to 1993 levels as stricter building codes, energy-efficient mortgages, and home energy rating systems become more widespread. The combined energy savings due to CCAP Actions 6 through 11 results in approximately 1.2 MMT of carbon emissions savings in the year 2000 and 11.5 MMT in 2010.

Residential Technology Cases

In addition to the *AEO99* reference case, three side cases were developed to examine the effect of equipment and building standards on residential energy use—a *1999 technology case*, a *best available technology case*, and a *high technology case*. These side cases were analyzed in stand-alone (not integrated with the supply modules) NEMS runs and thus do not include supply-responses to the altered residential consumption patterns of the two cases. *AEO99* also analyzed an integrated *high technology case (consumption high technology)*, which combines the *high technology cases* of the four end-use demand sectors and the *electricity high fossil technology case*.

The *1999 technology case* assumes that all future equipment purchases are made based only on equipment available in 1999. This case further assumes that building shell efficiencies will not improve beyond 1999 levels. In the reference case, the 2020 housing stock shell efficiency is 7 percent higher than in 1993 for heating (5 percent for cooling).

The *high technology case* assumes earlier availability, lower costs, and/or higher efficiencies for more advanced equipment than the reference case. Equipment assumptions were developed by engineering technology experts, considering the potential impact on technology given increased research and development into more advanced technologies.¹¹ In the *high technology case*, heating shell efficiency increases by 33 percent and cooling shell efficiency by 30 percent, relative to 1993.

The *best available technology case* assumes that all equipment purchases from 2000 forward are based on the highest available efficiency in the *high technology case* in a particular simulation year, disregarding the economic costs of such a case. It is merely designed to show how much the choice of the highest-efficiency equipment could affect energy consumption. In this case, heating shell efficiency increases by 40 percent and cooling shell efficiency by 38 percent, relative to 1993.

Notes and Sources

- [8] The Model Documentation Report contains additional details concerning model structure and operation. Refer to Energy Information Administration, *Model Documentation Report: Residential Sector Demand Module of the National Energy Modeling System*, DOE/EIA M065(99), (January 1999).
- [9] Among the explanations often mentioned for observed high average implicit discount rates are: market failures, (i.e., cases where incentives are not properly aligned for markets to result in purchases based on energy economics alone); unmeasured technology costs (i.e., extra costs of adoption which are not included or difficult to measure like employee down-time); characteristics of efficient technologies viewed as less desirable than their less efficient alternatives (such as equipment noise levels or lighting quality characteristics); and the risk inherent in making irreversible investment decisions. Examples of market failures/barriers include: decision makers having less than complete information, cases where energy equipment decisions are made by parties not responsible for energy bills (e.g., landlord/tenants, builders/home buyers), discount horizons which are truncated (which might be caused by mean occupancy times that are less than the simple payback time and that could possibly be classified as an information failure), and lack of appropriate credit vehicles for making efficiency investments, to name a few. The use of high implicit discount rates in NEMS merely recognizes that such rates are typically found to apply to energy-efficiency investments.
- [10] U.S. Bureau of Census, *Characteristics of New Housing*, C25/95-A.
- [11] The high technology assumptions are based on Energy Information Administration, *Technology Forecast Updates-Residential and Commercial Building technologies-Advanced Adoption Case* (Arthur D. Little, Inc., September 1998).

Commercial Demand Module

The NEMS Commercial Sector Demand Module generates forecasts of commercial sector energy demand through 2020. The definition of the commercial sector is consistent with EIA's State Energy Data System (SEDS). That is, the commercial sector includes business establishments that are not engaged in transportation or in manufacturing or other types of industrial activity (e.g., agriculture, mining or construction). The bulk of commercial sector energy is consumed within buildings, however, street lights, pumps, bridges, and public services are also included if the establishment operating them is considered commercial. Since most of commercial energy consumption occurs in buildings, the commercial module relies on the data from the EIA Commercial Buildings Energy Consumption Survey (CBECS) for characterizing the commercial sector activity mix as well as the equipment stock and fuels consumed to provide end use services.¹²

The commercial module forecasts consumption by fuel¹³ at the Census Division level using prices from the NEMS energy supply modules, macroeconomic variables from the NEMS Macroeconomic Activity Module (MAM), as well as external data sources (technology characterizations, for example). Energy demands are forecast for ten end-use services¹⁴ for eleven building categories¹⁵ in each of the nine Census Divisions. The model begins by developing forecasts of floorspace for the 99 building category and Census Division combinations. Next, the ten end-use service demands required for the projected floorspace are developed. Technologies are then chosen to meet the projected service demands for the seven major end uses.¹⁶ Once technologies are chosen, the energy consumed by the equipment stock (both previously existing and purchased equipment) chosen to meet the projected end-use service demands is developed.¹⁷

Key Assumptions

The key assumptions made by the commercial module are presented in terms of the flow of the calculations described above. Each section below will summarize the assumptions in each of the commercial module submodules: floorspace, service demand, technology choice, and end-use consumption. The four submodules are executed sequentially in the order presented, and the outputs of each submodule become the inputs to subsequently executed submodules. As a result, key forecast drivers for the floorspace submodule are also key drivers for the service demand submodule, and so on.

Floorspace Submodule

Floorspace is forecast by starting with the previous year's stock of floorspace and eliminating a certain portion to represent the removal of buildings. Total floorspace is the sum of the surviving floorspace plus new additions to the stock derived from the Macroeconomic Activity Module's floorspace projection.¹⁸

Existing Floorspace and Attrition

Existing floorspace is based on the estimated floorspace reported in the *Commercial Buildings Energy Consumption Survey 1995* (Table 9). Over time the 1995 stock is projected to decline as buildings are removed from service (floorspace attrition). Floorspace attrition is estimated by a logistic decay function, the shape of which is dependent upon the values of two parameters: average building lifetime and *gamma*. *Gamma* controls the acceleration of the rate of retirement around the average building lifetime. The current values for the average building lifetime and *gamma* are 59 years and 5.4, respectively.¹⁹

New Construction Additions to Floorspace

The commercial module develops estimates of projected commercial floorspace additions by combining the surviving floorspace estimates with the Data Resources, Inc. (DRI) total floorspace forecast from MAM. A total NEMS floorspace projection is calculated by applying DRI's assumed floorspace growth rate within each Census Division and DRI building type to the corresponding NEMS Commercial Demand Module's building types based on the CBECS building types shares. The NEMS surviving floorspace from the

previous year is then subtracted from the total NEMS floorspace projection for the current year to yield new floorspace additions.²⁰

Table 9. 1995 Total Floorspace by Census Division and Principal Building Activity
(Millions of Square Feet)

	Assembly	Education	Food Sales	Food Service	Health Care	Lodging	Large Office	Small Office	Merc/Service	Ware-house	Other	Total
New England	290	567	11	38	70	150	211	351	820	308	324	3,140
Middle Atlantic	846	1,363	68	127	248	199	1,026	656	2,019	1,172	1,020	8,743
East North Central	1,028	1,336	43	417	250	642	869	747	1,994	1,624	705	9,655
West North Central	563	661	25	57	155	267	358	426	1,209	420	528	4,669
South Atlantic	906	932	107	173	270	729	1,099	1,045	2,103	1,543	568	9,475
East South Central	670	379	50	105	137	324	260	335	1,325	1,032	300	4,917
West South Central	797	1,004	129	164	208	261	482	563	1,436	861	533	6,438
Mountain	707	547	85	58	87	383	435	411	456	522	164	3,855
Pacific	934	951	124	213	217	663	1,016	881	1,366	999	516	7,881
United States	6,741	7,740	642	1,352	1,642	3,618	5,756	5,414	12,728	8,481	4,658	58,772

Source: Energy Information Administration, *Commercial Buildings Energy Consumption Survey 1995 Public Use Data*.

Note: totals may not equal sum of components due to independent rounding.

Service Demand Submodule

Once the building stock is projected, the Commercial Demand module develops a forecast of demand for energy-consuming services required for the projected floorspace. The module projects service demands for the following explicit end-use services: space heating, space cooling, ventilation, water heating, lighting, cooking, refrigeration, personal computer office equipment, and other office equipment.²¹ The service demand intensity (SDI) is measured in thousand Btu of end-use service demand per square foot and differs across service, Census Division and building type. The SDIs are based on a hybrid engineering and statistical approach of CBECS consumption data.²² Projected service demand is the product of square feet and SDI for all end uses across the eleven building categories with adjustments for changes in shell efficiency for space heating and cooling.

Shell Efficiency

The shell integrity of the building envelope is an important determinant of the heating and cooling loads for each type of building. In the NEMS Commercial Demand Module, the shell efficiency is represented by an index, which changes over time to reflect improvements in the building shell. This index is dimensioned by building type and Census Division and applies directly to heating. For cooling, the effects are computed from the index, but differ from heating effects, because of different marginal effects of shell integrity and because of internal building loads. In the *AEO99* reference case, shell improvements for new buildings are up to 24 percent more efficient than the 1995 stock of similar buildings. Over the forecast horizon, new building shells improve in efficiency by 6 percent relative to their efficiency in 1995. For existing buildings, efficiency is assumed to increase by 4 percent over the 1995 stock average. The shell efficiency index affects the space heating and cooling service demand intensities causing changes in fuel consumed for these services as the shell integrity improves.

Technology Choice Submodule

The technology choice submodule develops projections of the results of the capital purchase decisions for equipment fueled by the three major fuels (electricity, natural gas, and distillate fuel). Capital purchase decisions are driven by assumptions concerning behavioral rule proportions and time preferences as well as projected fuel prices, average utilization of equipment (the "capacity factors"), relative technology capital costs, and operating and maintenance (O&M) costs.

Decision Types

In each forecast year, equipment is potentially purchased for three “decision types”. Equipment must be purchased for newly added floorspace and to replace a proportion of equipment in existing floorspace projected to wear out.²³ Equipment is also potentially purchased for retrofitting equipment which has become economically obsolete. The purchase of retrofit equipment occurs only if the annual operating costs of a current technology exceed the annualized capital and operating costs of a technology available as a retrofit candidate.

Behavioral Rules

The commercial module allows the use of three alternate assumptions about equipment choice behavior. These assumptions constrain the equipment choice among three choice sets, which are progressively more restrictive. The choice sets vary by decision type and building type:

- **Unrestricted Choice Behavior** - This rule assumes that commercial consumers consider *all* types of equipment that meet a given service, across all fuels, when faced with a capital purchase decision.
- **Same Fuel Behavior** - This rule restricts the capital purchase decision to the set of technologies that consume the *same fuel that currently meets the decision maker's service demand*.
- **Same Technology Behavior** - Under this rule, commercial consumers consider only the available models of the *same technology and fuel* that currently meet service demand, when facing a capital stock decision.

Under any of the above three behavior rules, equipment that meets the service at the lowest annualized lifecycle cost is chosen. Table 10 illustrates the proportions of floorspace subject to the different behavior rules for space heating technology choices in large office buildings.

Table 10. Assumed Behavior Rules for Choosing Space Heating Equipment in Large Office Buildings
(Percent)

	Unrestricted	Same Fuel	Same Technology	Total
New Equipment Decision	21	30	49	100
Replacement Decision	8	35	57	100
Retrofit Decision	0	5	95	100

Source: Energy Information Administration, *Model Documentation Report: Commercial Sector Demand Module of the National Energy Modeling System*, DOE/EIA-M066(99) (Forthcoming January 1999).

Time Preferences

The time preferences of owners of commercial buildings are assumed to be distributed among six alternate time preference premiums (Table 11). Adding the time preference premiums to the 10-year Treasury Bill rate results in implicit discount rates, also known as hurdle rates, applicable to the assumed proportions of commercial floorspace. The effect of the use of this distribution of discount rates is to prevent a single technology from dominating purchase decisions in the lifecycle cost comparisons. The distribution used for *AEO99* assigns some floorspace a very high discount or hurdle rate to simulate floorspace which will never retrofit existing equipment and which will only purchase equipment with the lowest capital cost. Discount rates for the remaining five segments of the distribution get progressively lower, simulating increased sensitivity to the fuel costs of the equipment that is purchased.

Table 11. Assumed Distribution of Time Preference Premiums
(Percent)

Proportion of Floorspace-All Services Except Lighting	Proportion of Floorspace-Lighting	Time Preference Premium
27.0	27.0	1000.0
25.4	25.4	152.9
20.4	20.4	55.4
16.2	16.2	30.9
10.0	6.0	19.9
1.0	5.0	13.6
100.0	100.0	--

Source: Energy Information Administration. *Model Documentation Report: Commercial Sector Demand Module of the National Energy Modeling System*, DOE/EIA-M066(99) (Forthcoming, January 1999).

Technology Characterization Database

The technology characterization database organizes all relevant technology data by end use, fuel, and Census Division. Equipment is identified in the database by a technology index as well as a vintage index, the index of the fuel it consumes, the index of the service it provides, its initial market share, the Census Division index for which the entry under consideration applies, its efficiency (or coefficient of performance; efficacy in the case of lighting equipment), installed capital cost per unit of service demand satisfied, operating and maintenance cost per unit of service demand satisfied, average service life, year of initial availability, and last year available for purchase. Equipment may only be selected to satisfy service demand if the year in which the decision is made falls within the window of availability. Equipment acquired prior to the lapse of its availability continues to be treated as part of the existing stock and is subject to replacement or retrofitting. This flexibility in limiting equipment availability allows the direct modeling of equipment efficiency standards. Table 12 provides a sample of the technology data for space heating in the New England Census Division.

End-Use Consumption Submodule

The end-use consumption submodule calculates the consumption of each of the three major fuels for the ten end-use services plus fuel consumption for Cogeneration and district services. For the ten end-use services, energy consumption is calculated as the end-use service demand met by a particular type of equipment divided by its efficiency and summed over all existing equipment types. This calculation includes dimensions for Census Division, building type and fuel. Consumption of the five minor fuels is forecast based on historical trends.

Equipment Efficiency

The average energy consumption of a particular appliance is based initially on estimates derived from CBECS 1995. As the stock efficiency changes over the model simulation, energy consumption decreases nearly, but not quite proportionally to the efficiency increase. The difference is due to the calculation of efficiency using the harmonic average and also the efficiency rebound effect discussed below. For example, if on average, electric heat pumps are now 10 percent more efficient than in 1995, then all else constant (weather, real energy prices, shell efficiency, etc...), energy consumption per heat pump would now average about 9 percent less. The Service Demand and Technology Choice Submodules together determine the average efficiency of the stocks used in adjusting the initial average energy consumption.

Adjusting for Weather and Climate

Weather in any given year always includes short-term deviations from the expected longer-term average (or climate). Recognition of the effect of weather on space heating and air conditioning is necessary to avoid projecting abnormal weather conditions into the future. In the commercial module, proportionate adjustments are made to space heating and air conditioning demand by Census Division. These adjustments are based on NOAA data for HDD and CDD. A 10 percent increase in HDD would increase space heating consumption by 10 percent over what it would have otherwise been. The commercial module

makes weather adjustments for the years 1996 through 1998. After 1998, long term weather patterns are assumed based on 30-year averages of HDD and CDD.

Table 12. Capital Cost and Efficiency Ratings of Selected Commercial Space Heating Equipment

Equipment Type	Vintage	Efficiency ¹	Capital Cost (\$1987 per Mbtu/hour) ²	Maintenance Cost (\$1987 per Mbtu/hour) ²	Service Life (Years)
Electric Heat Pump	Current Standard	6.8	\$71.92	\$2.10	12
	1998- typical	7.5	\$77.18	\$2.10	12
	1998- high efficiency	9.4	\$96.47	\$2.10	12
	2005- typical	8.0	\$77.18	\$2.10	12
	2005- high efficiency	9.5	\$94.72	\$2.10	12
	2015 - typical	8.5	\$73.67	\$2.10	12
	2015 - high efficiency	10.0	\$91.21	\$2.10	12
Ground-Source Heat Pump	1998- typical	3.4	\$166.67	\$1.35	20
	1998- high efficiency	4.0	\$250.00	\$1.35	20
	2005- typical	3.4	\$145.83	\$1.35	20
	2005- high efficiency	4.1	\$225.00	\$1.35	20
	2015- typical	3.8	\$135.42	\$1.35	20
	2015 -high efficiency	4.2	\$197.92	\$1.35	20
Electric Boiler	Current Standard	0.98	\$16.48	\$0.09	21
Packaged Electric	1995	0.93	\$18.63	\$3.29	18
Natural Gas Furnace	Current Standard	0.80	\$9.21	\$0.69	20
	1998- high efficiency	0.92	\$11.12	\$0.67	20
	2015 - typical	0.81	\$9.21	\$0.68	20
Natural Gas Boiler	Current Standard	0.80	\$7.95	\$0.26	25
	1998 - high efficiency	0.90	\$11.49	\$0.35	25
	2005- typical	0.81	\$7.76	\$0.26	25
	2005- high efficiency	0.90	\$9.49	\$0.30	25
Natural Gas Heat Pump	1998- engine driven	4.1	\$229.17	\$4.69	13
	2005- engine driven	4.1	\$166.67	\$3.65	13
	2005- absorption	1.4	\$173.61	\$4.17	15
Distillate Oil Furnace	Current Standard	0.81	\$10.58	\$0.69	15
	1998	0.83	\$16.06	\$0.69	15
	2000	0.86	\$16.26	\$0.69	15
	2010	0.89	\$16.81	\$0.69	15
Distillate Oil Boiler	Current Standard	0.83	\$12.28	\$0.06	20
	1998- high efficiency	0.87	\$17.19	\$0.06	20
	2005- typical	0.83	\$12.16	\$0.06	20
	2005- high efficiency	0.87	\$16.45	\$0.06	20

1_/ Efficiency measurements vary by equipment type. Electric air-source and natural gas heat pumps are rated for heating performance using the Heating Seasonal Performance Factor (HSPF); natural gas and distillate furnaces are based on Annual Fuel Utilization Efficiency; ground-source heat pumps are rated on coefficient of performance; and boilers are based on combustion efficiency.

2_/ Capital and maintenance costs are given in 1987 dollars.

Source: Arthur D. Little, "EIA Technology Forecast Updates-Residential and Commercial Building Technologies-Reference Case", Reference Number 37125, September 1998.

Short-Term Price Effect and Efficiency Rebound

It is assumed that energy consumption for a given end-use service is affected by the marginal cost of providing that service. That is, all else equal, a change in the price of a fuel will have an inverse, but less than proportional, effect on fuel consumption. The current value for the short-term elasticity parameter is -0.25

for end uses affected by short-term price effects. For example, for lighting this value implies that for a 1 percent increase in the price of a fuel, there will be a corresponding decrease in energy consumption of 0.25 percent. Another way of affecting the marginal cost of providing a service is through equipment efficiency. As equipment efficiency changes over time, so will the marginal cost of providing the end-use service. For example, a 10 percent increase in efficiency will reduce the cost of providing the service by 10 percent. The short-term elasticity parameter for efficiency rebound effects is -0.15 for affected end uses; therefore, the demand for the service will rise by 1.5 percent (-10 percent x -0.15). Currently, all services except refrigeration are affected by the short-term price effect and services affected by efficiency rebound are space heating and cooling, water heating, ventilation and lighting.

Cogeneration

Nonutility power production applications within the commercial sector are concentrated in education, health care, office, and warehouse buildings. Historical data from Form EIA-867, *Annual Nonutility Power Producer Report*, are used to derive electricity cogeneration for 1996 by Census Division, building type, and fuel. After 1996, a forecast of electricity cogeneration, as disaggregated above, is developed as follows: first, relative prices of energy sources for generation are compared with the price of electricity; second, if the price of electricity increases relative to generation fuels, then cogeneration increases based on a sensitivity parameter.²⁴ If the price of electricity falls relative to the prices of other fuels, then cogeneration decreases based on the same sensitivity parameter. For each year of the forecast period, all cogenerated electricity is assumed to be sold to the grid and, subsequently, a portion is bought back to meet part of the consumption necessary to satisfy service demands.

Legislation and Other Federal Programs

Energy Policy Act of 1992 (EPACT)

A key assumption incorporated in the technology selection process is that the equipment efficiency standards described in the EPACT constrain minimum equipment efficiencies. The effects of standards are modeled by modifying the technology database to eliminate equipment that no longer meets minimum efficiency requirements. For standards effective January 1, 1994, affected equipment includes electric heat pumps—minimum coefficient of performance of 1.64, furnaces and boilers—minimum annual fuel utilization efficiency of 0.8, fluorescent lighting—minimum efficacy of 75 lumens per watt, incandescent lighting—minimum efficacy of 16.9, air conditioners—minimum seasonal energy efficiency ratio of 10.5, electric water heaters—minimum energy factor of 0.85 and gas and oil water heaters—minimum energy factors of 0.78.

Climate Change Action Plan

The Climate Change Action Plan (CCAP) contains 5 Action Items which affect the commercial sector. Action Items 1, 4 and 5 are designed to stimulate investment in more efficient building shells and equipment for heating, cooling and other end uses. Action Item 2, EPA's Green Lights Program targets the retrofit of lighting equipment. Action Item 3 was unfunded and therefore not modeled. The commercial module includes several features that allow projected efficiency to increase in response to voluntary programs (e.g., the distribution of time preference premiums and shell efficiency parameters). For Action Items 1, 2, 4 and 5, retrofits of equipment for space heating and air conditioning are incorporated in the distribution of premiums given in Table 11. Also, based partly on these actions, the shell efficiency of new and existing buildings is assumed to increase from 1995 through 2020. Shells for new buildings increase in efficiency by 6 percent over this period, while shells for existing buildings increase in efficiency by 4 percent. In total, the action items result in energy savings which are estimated to reduce carbon emissions by the commercial sector by 13.0 million metric tons for the year 2010.

Commercial Technology Cases

In addition to the *AEO99* reference case, three side cases were developed to examine the effect of equipment and building standards on commercial energy use—a *1999 technology case*, a *high technology case*, and a *best available technology case*. These side cases were analyzed in stand-alone (not integrated with the NEMS demand and supply modules) commercial model runs and thus do not include supply-responses to the altered commercial consumption patterns of the three cases. *AEO99* also analyzed an integrated high technology case (*consumption high technology*), which combines the *high technology cases* of the four end-use demand sectors and the *electricity high fossil technology case*.

The *1999 technology case* assumes that all future equipment purchases are made based only on equipment available in 1999. This case further assumes building shell efficiency to be fixed at 1999 levels. In the reference case, existing building shells are allowed to increase in efficiency by 4 percent over 1995 levels, new building shells improve by 6 percent by 2020 relative to new buildings in 1995.

The *high technology case* assumes earlier availability, lower costs, and/or higher efficiencies for more advanced equipment than the reference case. Equipment assumptions were developed by engineering technology experts, considering the potential impact on technology given increased research and development into more advanced technologies.¹¹ In the *high technology case*, building shell efficiencies are assumed to improve 50 percent faster than in the *reference case* from 2000 forward. Existing building shells, therefore, increase by 5.6 percent relative to 1995 levels and new building shells by 8.4 percent relative to their efficiency in 1995 by 2020.

The *best available technology case* assumes that all equipment purchases from 2000 forward are based on the highest available efficiency in the *high technology case* in a particular simulation year, disregarding the economic costs of such a case. It is merely designed to show how much the choice of the highest-efficiency equipment could affect energy consumption. Shell effects in this case are assumed to be the same as for the *high technology case* above.

Fuel shares, where appropriate for a given end use, are allowed to change in the technology cases as the available technologies from each technology type compete to serve certain segments of the commercial floorspace market. For example, in the *best available technology case*, the most efficient gas furnace technology competes with the most efficient electric heat pump technology. This contrasts with the reference case, in which, a greater number of technologies for each fuel with varying efficiencies all compete to serve the heating end use. In general, the fuel choice will be affected as the available choices are constrained or expanded, and will thus differ across the cases.

Notes and Sources

[12] Energy Information Administration, A Look at Commercial Buildings in 1995: Characteristics, Energy Consumption, and Energy Expenditures, DOE/EIA-0625(95), (Washington, DC, October 1998).

[13] The fuels accounted for by the commercial module are electricity, natural gas, distillate fuel oil, residual fuel oil, liquefied petroleum gas (LPG), coal, motor gasoline, and kerosene. In addition to these fuels the use of solar energy is projected based on an exogenous forecast.

[14] The end-use services in the commercial module are heating, cooling, water heating, ventilation, cooking, lighting, refrigeration, PC and non-PC office equipment and a category denoted other to account for all other minor end uses.

[15] The 11 building categories are assembly, education, food sales, food services, health care, lodging, large offices, small offices, mercantile/services, warehouse and other.

[16] Minor end uses are modeled based on penetration rates and efficiency trends.

[17] The detailed documentation of the commercial module contains additional details concerning model structure and operation. Refer to Energy Information Administration, Model Documentation Report: Commercial Sector Demand Module of the National Energy Modeling System, DOE/EIA M066(99), (Forthcoming January 1999).

[18] The floorspace from the Macroeconomic Activity Model is based on the Data Resources Incorporated (DRI) floorspace estimates which are approximately 15 percent lower than the estimate obtained from the CBECS used for the Commercial module. The DRI forecast is developed using the F.W. Dodge data on commercial floorspace. See F.W. Dodge, Building Stock Database Methodology and 1991 Results, Construction Statistics and Forecasts, F.W. Dodge, McGraw-Hill.

[19] The commercial module performs attrition for 9 vintages of floorspace developed from the CBECS 1995 stock estimate and historical floorspace additions data from F.W. Dodge data.

[20] In the event that the computation of additions produce a negative value for a specific building type, it is assumed to be zero.

[21] "Other office equipment" includes copiers, fax machines, typewriters, cash registers, and other miscellaneous office equipment. A tenth category denoted other includes equipment such as elevators, medical, and other laboratory equipment, communications equipment, security equipment, and miscellaneous electrical appliances. Commercial energy consumed outside of buildings and for cogeneration is also included in the "other" category.

[22] Based on updated estimates using CBECS 1995 data and the methodology described in End-Use Energy Consumption Estimates for U.S. Commercial Buildings, 1992, Belzer, D.B., and Wrench, L.E., Pacific Northwest Laboratories, PNNL-11514, Prepared for the U.S. DOE under Contract DE-AC06-76RLO-1830, (Richland, WA, March, 1997).

[23] The proportion of equipment retiring is inversely related to the equipment life.

[24] The sensitivity parameter assumes that a 10 percent change in relative prices results in a 1 percent change in Cogeneration activity.

Industrial Demand Module

The NEMS Industrial Demand Module estimates energy consumption by energy source (fuels and feedstocks) for 9 manufacturing and 6 nonmanufacturing industries. The manufacturing industries are further subdivided into the energy-intensive manufacturing industries and nonenergy-intensive manufacturing industries. The distinction between the two sets of manufacturing industries pertains to the level of modeling. The energy-intensive industries are modeled through the use of a detailed process flow accounting procedure, whereas the nonenergy-intensive and the nonmanufacturing industries are modeled with substantially less detail (Table 13). The Industrial Demand Module forecasts energy consumption at the four Census region levels; energy consumption at the Census Division level is allocated by using the SEDS²⁵ data.

The energy-intensive industries (food and kindred products, paper and allied products, bulk chemicals, glass and glass products, hydraulic cement, blast furnace and basic steel products, and primary aluminum) are modeled in considerable detail. Each industry is modeled as three separate but interrelated components consisting of the Process Assembly (PA) Component, the Buildings Component (BLD), and the Boiler/Steam/Cogeneration (BSC) Component. The BSC Component satisfies the steam demand from the PA and BLD Components. In some industries, the PA Component produces byproducts that are consumed in the BSC Component. For the energy-intensive industries, the PA Component is separated into the major production processes or end uses.

Petroleum refining (Standard Industrial Classification 2911) is modeled in detail in a separate module of NEMS, and the projected energy consumption is included in the manufacturing total. Forecasts of refining energy use and oil and gas lease and plant fuel and fuels consumed in cogeneration (Standard Industrial Classification 1311) are exogenous to the Industrial Demand Module, but endogenous to the NEMS modeling system.

Key Assumptions

The NEMS Industrial Demand Module primarily uses a bottom-up process modeling approach. An energy accounting framework traces energy flows from fuels to the industry's output. An important assumption in the development of this system is the use of 1994 baseline Unit Energy Consumption (UEC) estimates based on analysis of the Manufacturing Energy Consumption Survey 1994.²⁶ The UEC represents the energy required to produce one unit of the industry's output. The output may be defined in terms of physical units (e.g., tons of steel) or in terms of the dollar value of output.

The module depicts the seven most energy-intensive manufacturing industries (apart from petroleum refining, which is modeled in the Petroleum Market Module of NEMS) with a detailed process flow approach. The dominant process technologies are characterized by a combination of unit energy consumption estimates and "technology possibility curves." The technology possibility curves indicate the energy intensity of new and existing stock relative to the 1994 stock over time. Rates of energy efficiency improvements assumed for new and existing plants vary by industry and process. These assumed rates were developed using professional engineering judgments regarding the energy characteristics, year of availability, and rate of market adoption of new process technologies.

Table 13. Industry Categories

Energy-Intensive Manufacturing		Nonenergy-Intensive Manufacturing		Nonmanufacturing Industries	
Food and Kindred Products	(SIC 20)	Metals-Based Durables	(SIC 34, 35, 36, 37, 38)	Agricultural Production -Crops	(SIC 01)
Paper and Allied Products	(SIC 26)	Other Manufacturing	(all remaining manufacturing SIC)	Other Agriculture Including Livestock	(SIC 02, 07, 08, 09)
Bulk Chemicals	(SIC 281, 282, 286, 287)			Coal Mining	(SIC 12)
Glass and Glass Products	(SIC 321, 322, 329)			Oil and Gas Mining	(SIC 13)
Hydraulic Cement	(SIC 324)			Metal and Other Nonmetallic Mining	(SIC 10, 14)
Blast Furnaces and Basic Steel	(SIC 331)			Construction	(SIC 15, 16, 17)
Primary Aluminum	(SIC 3334)				

SIC = Standard Industrial Classification.

Source: Office of Management and Budget, Standard Industrial Classification Manual 1987 (Springfield, VA, National Technical Information Service).

Process/Assembly Component

The Process/Assembly (PA) Component models each major manufacturing production step for the energy-intensive industries. The throughput production for each process step is computed as well as the energy required to produce it.

Within this component, the UEC is adjusted based on the technology possibility curves for each step. For example, additions to waste fiber pulping capacity are assumed to require only 93 percent as much energy as does the average existing plant (Table 14). The technology possibility curve is a means of embodying assumptions regarding new technology adoption in the manufacturing industry and the associated increased energy efficiency of capital without characterizing individual technologies. It is unlikely that new technology is employed in all new capacity additions. Many facilities will only partially incorporate the technology or will need time to debug the operating aspects of the newly installed capacity. To some extent, all industries will increase the energy efficiency of their process and assembly steps. The reasons for the increased efficiency are not likely to be directly attributable to changing energy prices but due to other exogenous factors. Since the exact nature of the technology improvement is too uncertain to model in detail, the module employs a technology possibility curve to characterize the bundle of technologies available for each process step.

Fuel shares for process and assembly energy use in six of the energy-intensive manufacturing industries²⁷ are adjusted for changes in relative fuel prices. The six industries are food, paper, chemicals, glass, cement, and steel. In each industry, two logit fuel-sharing equations are applied to revise the initial fuel shares obtained from the process-assembly component. The resharing does not affect the industry's total energy use—only the fuel shares. The methodology adjusts total fuel shares across all process stages and vintages of equipment to account for aggregate market response to changes in relative fuel prices.

Table 14. Coefficients for Technology Possibility Curve

Industry/ Process Unit	Old Facilities			New Facilities		
	REI 1994	REI' 2020	Slope b	REI 1994	REI' 2020	Slope b
Food	1.000	0.892	-0.0044	0.900	0.792	-0.0049
Pulp & Paper						
Wood Preparation	1.000	0.909	-0.0037	0.840	0.830	-0.0004
Waste Pulping	1.000	0.938	-0.0025	0.930	0.882	-0.0021
Mechanical Pulping	1.000	0.904	-0.0039	0.840	0.821	-0.0009
Semi-Chemical	1.000	0.870	-0.0054	0.794	0.756	-0.0019
Kraft, Sulfite, misc. chemicals	1.000	0.784	-0.0093	0.730	0.590	-0.0082
Bleaching	1.000	0.879	-0.0050	0.852	0.769	-0.0039
Paper Making	1.000	0.763	-0.0104	0.750	0.546	-0.0122
Bulk Chemicals	1.000	0.892	-0.0044	0.900	0.792	-0.0049
Glass¹						
Batch Preparation	1.000	0.936	-0.0025	0.882	0.882	0
Melting/Refining	1.000	0.783	-0.0094	0.877	0.577	-0.0160
Forming	1.000	0.912	-0.0035	0.921	0.831	-0.0040
Post-Forming	1.000	0.871	-0.0053	0.780	0.759	-0.0011
Cement						
Dry Process	1.000	0.815	-0.0078	0.790	0.646	-0.0077
Wet Process ²	1.000	0.954	-0.0025	NA	NA	NA
Finish Grinding	1.000	0.899	-0.0041	0.813	0.813	0
Steel³						
Coke Oven	1.000	0.904	-0.0039	0.840	0.820	-0.0009
BF/BOF	1.000	0.899	-0.0041	1.000	0.799	-0.0086
EAF	1.000	0.919	-0.0033	0.960	0.841	-0.0051
Ingot Casting/Primary Rolling ²	1.000	1.000	0	NA	NA	NA
Continuous Casting	1.000	1.000	0	1.000	1.000	0
Hot Rolling	1.000	0.672	-0.0152	0.500	0.381	-0.0104
Cold Rolling	1.000	0.768	-0.0101	0.840	0.550	-0.0162
Aluminum						
Primary aluminum	1.000	0.898	-0.0041	0.910	0.804	-0.0048
Semi-Fabrication	1.000	0.734	-0.0118	0.610	0.497	-0.0078

¹REIs and slope apply to virgin and recycled materials.

²No new plants are likely to be built with these technologies.

³Net shape casting is projected to reduce the energy requirements for hot and cold rolling rather than for the continuous casting step.

⁴SIC = Standard Industrial Classification.

REI = Relative Energy Intensity.

NA = Not applicable.

BF = Blast furnace.

BOF = Basic oxygen furnace.

EAF = Electric arc furnace.

Source: Energy Information Administration, *Model Documentation Report, Industrial Sector Demand Module of the National Energy Modeling System*, DOE/EIA-M064(99) (Washington, DC, January 1999).

The fuel share adjustments are done in two stages. The first stage determines the fuel shares of electricity and nonelectricity energy. The latter group excludes boiler fuel and feedstocks. The second stage determines the fossil fuel shares of nonelectricity energy. In each case, a new fuel-group share, $NEWSHR_i$, is established as a function of the initial, default fuel-group shares, $DEFLTSHR_i$, and fuel-group prices indices, $PRCRAT_i$. The price indices are the ratio of the current year price to the base year price, in real dollars. The formulation is as follows:

$$NEWSHR_i = \frac{DEFLTSHR_i * e^{(\beta_i - \beta_j * PRCRAT_j)}}{\sum_{j=1}^N DEFLTSHR_j * e^{(\beta_j - \beta_j * PRCRAT_j)}}$$

The coefficients β_j are all assumed to be 0.2.

The form of the equation results in unchanged fuel shares when the price indices are all 1, or unchanged from their 1997 levels. The implied own-price elasticity of demand is about -0.1.

Byproducts produced in the PA Component serve as fuels for the BSC Component. In the industrial module, byproducts are assumed to be consumed before purchased fuel.

Buildings Component

The total buildings energy demand by industry for each region is the product of the building UEC and regional industrial employment. Building UEC's were derived by first estimating energy requirements for building lighting, air conditioning, and space heating, where space heating was further divided to estimate the amount provided by direct combustion of fossil fuels and that provided by steam (Table 15). Energy consumption in the BLD Component for an industry is assumed to grow at the same rate as regional employment for that industry.

Table 15. Building Component Unit Energy Consumption
(Trillion Btu/Thousand People Employed)

Industry	Building Use and Energy Source			
	Lighting Electric UEC	Electric UEC	HVAC Natural Gas UEC	Steam UEC
Food & Kindred Products	0.007	0.009	0.014	0.045
Paper & Allied Products	0.0131	0.016	0.023	0.0082
Bulk Chemicals	0.0159	0.0299	0.68	0.0058
Glass and Glass Products	0.0133	0.019	0.044	0.004
Hydraulic Cement	0.029	0.029	0.029	0.0568
Blast Furnaces & Basic Steel	0.0123	0.0184	0.0674	0.011
Primary Aluminum	0.0187	0.0266	0.0062	0.0053
Metal Based Durables	0.0083	0.0125	0.0153	0.0019
Other Non-Intensive MFG Fabricated Metals	0.007	0.0103	0.0134	0.0036

UEC = Unit Energy Consumption.

HVAC = Heating, Ventilation, Air Conditioning.

Source: Energy Information Administration, *Model Documentation Report: Industrial Sector Demand Module of the National Energy Modeling System*, DOE/EIA-MO64(99), (Washington, DC, January 1999).

Boiler/Steam/Cogeneration Component

The steam demand and byproducts from the PA and BLD Components are passed to the BSC Component, which applies a heat rate and a fuel share equation (Table 16) to the boiler steam requirements to compute the required energy consumption.

Table 16. Logit Function Parameters for Estimating Boiler Fuel Shares

Industry	Alpha	Natural Gas	Steam Coal	Oil
Food	-0.25	0.55	0.21	0.24
Paper and Allied Products	-0.25	0.51	0.34	0.16
Bulk Chemicals	-0.25	0.59	0.11	0.30
Glass and Glass Products	-0.25	0.91	0.0	0.09
Cement	-0.25	0.97	0.0	0.03
Steel	-0.25	0.27	0.15	0.58
Aluminum	-0.25	1.00	0.0	0.0
Metals-Based Durables	-0.25	0.67	0.25	0.08
Other Non-Int MFG	-0.25	0.69	0.21	0.09

Source: Energy Information Administration, *Model Documentation Report: Industrial Sector Demand Module of the National Energy Modeling System*, DOE/EIA-MO64(99), (Washington, DC, January 1999).

Alpha: User-specified.

The boiler fuel shares are calculated using a logit formulation. The equation is calibrated to 1994 so that the actual boiler fuel shares are produced for the relative prices that prevailed in 1994. The equation for each manufacturing industry is as follows:

$$ShareFuel_j = \frac{(P_j^\alpha \beta_j)}{\sum_{i=1}^3 P_i^\alpha (\beta_i)}$$

where the fuels are coal, petroleum, and natural gas. The P_i are the fuel prices; α_i are sensitivity parameters; and the β_i are calibrated to reproduce the 1994 fuel shares using the relative prices that prevailed in 1994. The byproduct fuels are consumed before the quantity of purchased fuels is estimated. The boiler fuel shares are assumed to be those estimated using the 1994 MECS.²⁸

Technology

The amount of energy consumption reported by the industrial module is also a function of vintage of the capital stock that produces the output. It is assumed that new vintage stock will consist of state-of-the-art technologies that are more energy efficient than the average efficiency of the existing capital stock. Consequently, the amount of energy required to produce a unit of output using new capital stock is less than that required by the existing capital stock. Capital stock is grouped into three vintages: old, middle, and new. The old vintage consists of capital in production prior to 1995 and is assumed to retire at a fixed rate each year (Table 17). Middle vintage capital is that which is added after 1994 but not including the year of the forecast. New production capacity is built in the forecast years when the capacity of the existing stock of capital in the industrial model cannot produce the output forecasted by the NEMS Regional Macroeconomic Model. Capital additions during the forecast horizon are retired in subsequent years at the same rate as the pre-1995 capital stock.

The energy intensity of the new capital stock relative to 1994 capital stock is reflected in the parameter of the technology possibility curve estimated for the major production steps for each of the energy-intensive industries. These curves are based on engineering judgment of the likely future path of energy intensity changes (Table 14). The energy intensity of the existing capital stock also is assumed to decrease over time, but not as rapidly as new capital stock. The net effect is that over time the amount of energy required to produce a unit of output declines. Although total energy consumption in the industrial sector is projected to increase, overall energy intensity is projected to decrease.

Cogeneration

Cogeneration (the generation of electricity and steam) has been a standard practice in the industrial sector for many years. The cogeneration estimates in the module are based on the assumption that the historical relationship between industrial steam demand and cogeneration will continue in the future. The data source

Table 17. Retirement Rates

Industry	Retirement Rate (percent)	Industry	Retirement Rate (percent)
Food and Kindred Products	1.7	Glass and Glass Products	1.3
Pulp and Paper	2.3	Hydraulic Cement	1.2
Bulk Chemicals	1.9	Glass and Glass Products	1.3
Blast Furnace and Basic Steel Products		Primary Aluminum	2.1
Blast Furnace/Basic Oxygen Furnace	1.0	Metal-Based Durables	1.5
Metal-Based Durables	1.5	Other MFG.	2.3
Electric Arc Furnace	1.5		
Coke Ovens	1.5		
Other Steel	2.9		

Source: Energy Information Administration, *Model Documentation Report: Industrial Sector Demand Module of the National Energy Modeling System*, DOE/EIA-MO64(99), (Washington, DC, January 1999).

Note: Except for the Blast Furnace and Basic Steel Products Industry, the retirement rate is the same for each process step or end-use within an industry.

is Form EIA-867, *Annual Nonutility Power Producer Report*, consisting of data from approximately 400 cogenerators for 1989-1994.

Legislation

Energy Policy Act of 1992 (EPACT)

EPACT and the Clean Air Act Amendments of 1990 (CAAA90) contain several implications for the industrial module. These implications fall into three categories: coke oven standards; efficiency standards for boilers, furnaces, and electric motors; and industrial process technologies. The industrial module assumes the leakage standards for coke oven doors do not reduce the efficiency of producing coke or increase unit energy consumption. The industrial module uses heat rates of 1.25 (80 percent efficiency) and 1.22 (82 percent efficiency) for gas and oil burners respectively. These efficiencies meet the EPACT standards. The standards for electric motors call for a 10-percent efficiency increase. The industrial module incorporates a 10-percent savings for state-of-the-art motors increasing to 20-percent savings in 2015. Given the time lag in the legislation and the expected lifetime of electric motors, no further adjustments are necessary to meet the EPACT standards for electric motors. The industrial module incorporates the necessary reductions in unit energy consumption for the energy-intensive industries.

Climate Change Action Plan

Several programs included in the Climate Change Action Plan (CCAP) target the industrial sector. Note that the potential impacts of the Climate Wise Program are also included in the CCAP impacts. The intent of these programs is to reduce greenhouse gas emissions by lowering industrial energy consumption. The Department of Energy (DOE) program offices estimated that full implementation of these programs would reduce industrial electricity consumption by 79 billion kilowatthours and fossil energy consumption by 359 trillion Btu by 2010. However, since the energy savings associated with the voluntary programs in the CCAP largely duplicate savings that would have occurred in their absence and since some programs were not fully funded, total CCAP energy savings were reduced. The *Annual Energy Outlook 1999 (AEO99)* assumes that CCAP reduces electricity consumption by 41 billion kilowatthours and fossil energy consumption by 90

trillion Btu in 2010. The fossil energy is assumed to be 85 percent natural gas and 15 percent steam coal. In this situation, carbon emissions would be reduced by about 7 million metric tons (1 percent) in 2010.

High Technology and 1999 Technology Cases

The high *technology case* assumes earlier availability, lower costs, and higher efficiency for more advanced equipment.²⁹ Changes in aggregate energy intensity result both from changing equipment and production efficiency and from changes in the composition of industrial output. Since the composition of industrial output remains the same as in the reference case, aggregate intensity declines by only 1.4 percent annually even though the intensity declines for some individual industries doubles. In the reference case, aggregate intensity declines by 1.0 percent annually.

AEO99 also analyzed an integrated high technology case (*consumption high technology*), which combines the *high technology cases* of the four end-use demand sectors and the *electricity high fossil technology case*.

1999 technology case holds the energy efficiency of plant and equipment constant at the 1999 level over the forecast. Both cases were run with only the Industrial Demand Module rather than as a fully integrated NEMS run, (i.e., the other demand models and the supply models of NEMS were not executed). Consequently, no potential feedback effects from energy market interactions were captured.

Notes and Sources

- [25] Energy Information Administration, *State Energy Data Report 1995*, DOE/EIA-0214(95), (Washington, D.C., August 1998).
- [26] Energy Information Administration, *Manufacturing Consumption of Energy 1994*, DOE/EIA-0512(94), (Washington, D.C., December 1997).
- [27] Primary aluminum is excluded because they use only electricity in the process and assembly component.
- [28] Energy Information Administration, *Manufacturing Energy Consumption Survey: Consumption of Energy 1994*, DOE/EIA-0512(94), (Washington, D.C., December 1994).
- [29] These assumptions are based in part on Arthur D. Little, "Aggressive Technology for the NEMS model," (September 1998).

Transportation Demand Module

The NEMS Transportation Demand Module estimates energy consumption across the nine Census Divisions and over ten fuel types. Each fuel type is modeled according to fuel-specific technology attributes applicable by transportation mode. Total transportation energy consumption is the sum of energy use in eight transport modes: light-duty vehicles (cars, light trucks, industry sport utility vehicles and vans), commercial light trucks (8501-10,000 lbs), freight trucks (>10,000 lbs), freight and passenger airplanes, freight rail, freight shipping, mass transit, and miscellaneous transport such as mass transit. Light-duty vehicle fuel consumption is further subdivided into personal usage and commercial fleet consumption.

Key Assumptions

Macroeconomic Sector Inputs

Macroeconomic sector inputs used in the NEMS Transportation Demand Module (Table 18) consist of the following: gross domestic product (GDP), industrial output by Standard Industrial Classification code, personal disposable income, new car and light truck sales, total population, driving age population, total value of imports and exports, and the military budget. The share of total vehicle sales that represent light truck sales is assumed to approach forty-six percent by 2020.

Table 18. Macroeconomic Inputs to the Transportation Module
(Millions)

Macroeconomic Input	1995	2000	2005	2010	2015	2020
New Car Sales	7.8	7.7	7.5	7.9	8.1	8.0
New Light Truck Sales	5.8	6.1	6.4	6.9	6.9	6.9
Real Disposable Income (billion 1992 Chain-Weighted Dollars)	5,183	5,622	6,311	7,170	8,006	8,905
Real GDP (billion 1992 Chain-Weighted Dollars)	7,270	7,830	8,769	9,896	10,800	11,680
Driving Age Population	206.3	212.8	223.5	235.0	245.4	255.1
Total Population	268.2	275.2	286.5	298.3	310.7	323.4

Source: Energy Information Administration, AEO99 National Energy Modeling System run: aeo99b.d100198a.

Light-Duty Vehicle Assumptions

The light duty vehicle Fuel Economy Module includes 59 fuel saving technologies with data specific to car and light truck including incremental fuel efficiency improvement, incremental cost, first year of introduction, and fractional horsepower change. These assumed technology characterizations are scaled up or down to approximate the differences in each attribute for 6 EPA size classes of cars and light trucks (Tables 19 and 20).

The vehicle sales share module holds vehicle sales shares by import and domestic manufacturers constant within a vehicle size class at 1997 level from the National Highway Traffic and Safety Administration data.³⁰

Table 19. Standard Technology Matrix For Cars

	Fractional Fuel Efficiency Change	Incremental Cost (1990 \$)	Incremental Cost (\$/Unit Wt.)	Incremental Weight (Lbs.)	Incremental Weight (Lbs./Unit Wt.)	First Year Introduced	Fractional Horsepower Change
Front Wheel Drive	0.060	160	0.00	0	-0.08	1980	0
Unit Body	0.040	80	0.00	0	-0.05	1980	0
Material Substitution II	0.033	0	0.60	0	-0.05	1987	0
Material Substitution III	0.066	0	0.80	0	-0.10	1997	0
Material Substitution IV	0.099	0	1.00	0	-0.15	2007	0
Material Substitution V	0.099	0	1.50	0	-0.20	2017	0
Drag Reduction II	0.132	32	0.00	0	0.00	1985	0
Drag Reduction III	0.023	64	0.00	0	0.05	1991	0
Drag Reduction IV	0.046	112	0.00	0	0.01	2004	0
Drag Reduction V	0.069	176	0.00	0	0.02	2014	0
TCLU	0.092	40	0.00	0	0.00	1980	0
4-Speed Automatic	0.030	225	0.00	30	0.00	1980	0.05
5-Speed Automatic	0.045	325	0.00	40	0.00	1995	0.07
CVT	0.100	250	0.00	20	0.00	1995	0.07
6-Speed Manual	0.020	100	0.00	30	0.00	1991	0.05
Electronic Transmission I	0.005	20	0.00	5	0.00	1988	0
Electronic Transmission II	0.015	40	0.00	5	0.00	1998	0
Roller Cam	0.020	16	0.00	0	0.00	1987	0
OHC 4	0.030	100	0.00	0	0.00	1980	0.20
OHC 6	0.030	140	0.00	0	0.00	1980	0.20
OHC 8	0.030	170	0.00	0	0.00	1980	0.20
4C/4V	0.080	240	0.00	30	0.00	1988	0.45
6C/4V	0.080	320	0.00	45	0.00	1991	0.45
8C/4V	0.080	400	0.00	60	0.00	1991	0.45
Cylinder Reduction	0.030	-100	0.00	-150	0.00	1988	-0.10
4C/5V	0.100	300	0.00	45	0.00	1998	0.55
Turbo	0.050	500	0.00	80	0.00	1980	0.45
Engine Friction Reduction I	0.020	20	0.00	0	0.00	1987	0
Engine Friction Reduction II	0.035	50	0.00	0	0.00	1996	0
Engine Friction Reduction III	0.050	90	0.00	0	0.00	2006	0
Engine Friction Reduction IV	0.065	140	0.00	0	0.00	2016	0
VVT I	0.080	140	0.00	40	0.00	1998	0.10
VVT II	0.100	180	0.00	40	0.00	2008	0.15
Lean Burn	0.100	150	0.00	0	0.00	2099	0
Two Stroke	0.150	150	0.00	-150	0.00	2099	0
TBI	0.020	40	0.00	0	0.00	1982	0.05
MPI	0.035	80	0.00	0	0.00	1987	0.10
Air Pump	0.010	0	0.00	-10	0.00	1982	0
DFS	0.015	15	0.00	0	0.00	1987	0.10
Oil 5W-30	0.005	2	0.00	0	0.00	1987	0
Oil Synthetic	0.015	5	0.00	0	0.00	1997	0
Tires I	0.010	16	0.00	0	0.00	1992	0
Tires II	0.020	32	0.00	0	0.00	2002	0
Tires III	0.030	48	0.00	0	0.00	2012	0
Tires IV	0.040	64	0.00	0	0.00	2018	0
ACC I	0.005	15	0.00	0	0.00	1992	0
ACC II	0.010	30	0.00	0	0.00	1997	0
EPS	0.015	40	0.00	0	0.00	2002	0
4WD Improvements	0.030	100	0.00	0	-0.05	2002	0
Air Bags	-0.010	300	0.00	35	0.00	1987	0
Emissions Tier I	-0.010	150	0.00	10	0.00	1994	0
Emissions Tier II	-0.010	300	0.00	20	0.00	2003	0
ABS	-0.005	300	0.00	10	0.00	1987	0
Side Impact	-0.005	100	0.00	20	0.00	1996	0
Roof Crush	-0.003	100	0.00	5	0.00	2001	0
Increased Size/Wt.	-0.133	0	0.00	0	0.20	1991	0
GDI/4-cyl	0.170	1000	0.00	0	0.00	2005	0
GDI/6-cyl	0.170	1200	0.00	0	0.00	2005	0
Gasoline Hybrid	0.450	0	75.00	0	0.05	2001	0

N/A = Non Applicable

Source: Energy and Environment Analysis, *Changes to the Fuel Economy Module Final Report*, prepared for the Energy Information Administration (EIA), (June 1998).

Table 20. Standard Technology Matrix For Trucks

	Fractional Fuel Efficiency Change	Incremental Cost (1990 \$)	Incremental Cost (\$/Unit Wt.)	Incremental Weight (Lbs.)	Incremental Weight (Lbs./Unit Wt.)	First Year Introduced	Fractional Horsepower Change
Front Wheel Drive	0.020	160.00	0.00	0	-0.08	1985	0
Unit Body	0.060	80.00	0.00	0	-0.05	1995	0
Material Substitution II	0.033	0.00	0.60	0	-0.05	1996	0
Material Substitution III	0.066	0.00	0.80	0	-0.10	2006	0
Material Substitution IV	0.099	0.00	1.00	0	-0.15	2016	0
Material Substitution V	0.132	0.00	1.50	0	-0.20	2026	0
Drag Reduction II	0.023	32.00	0.00	0	0.00	1990	0
Drag Reduction III	0.046	64.00	0.00	0	0.05	1997	0
Drag Reduction IV	0.069	112.00	0.00	0	0.01	2007	0
Drag Reduction V	0.092	176.00	0.00	0	0.02	2017	0
TCLU	0.030	40.00	0.00	0	0.00	1980	0
4-Speed Automatic	0.045	225.00	0.00	30	0.00	1980	0.05
5-Speed Automatic	0.065	325.00	0.00	40	0.00	1997	0.07
CVT	0.100	250.00	0.00	20	0.00	2005	0.07
6-Speed Manual	0.020	100.00	0.00	30	0.00	1997	0.05
Electronic Transmission I	0.005	20.00	0.00	5	0.00	1991	0
Electronic Transmission II	0.015	40.00	0.00	5	0.00	2006	0
Roller Cam	0.020	16.00	0.00	0	0.00	1986	0
OHC 4	0.030	100.00	0.00	0	0.00	1980	0.15
OHC 6	0.030	140.00	0.00	0	0.00	1985	0.15
OHC 8	0.030	170.00	0.00	0	0.00	1995	0.15
4C/4V	0.060	240.00	0.00	30	0.00	1990	0.30
6C/4V	0.060	320.00	0.00	45	0.00	1990	0.30
8C/4V	0.060	400.00	0.00	60	0.00	2002	0.30
Cylinder Reduction	0.030	-100.00	0.00	-150	0.00	1990	-0.10
4C/5V	0.080	300.00	0.00	45	0.00	1997	0.55
Turbo	0.050	500.00	0.00	80	0.00	1980	0.45
Engine Friction Reduction I	0.020	20.00	0.00	0	0.00	1991	0
Engine Friction Reduction II	0.035	50.00	0.00	0	0.00	2002	0
Engine Friction Reduction III	0.050	90.00	0.00	0	0.00	2012	0
Engine Friction Reduction IV	0.065	140.00	0.00	0	0.00	2022	0
VVT I	0.080	140.00	0.00	40	0.00	2006	0.10
VVT II	0.100	180.00	0.00	40	0.00	2016	0.15
Lean Burn	0.100	150.00	0.00	0	0.00	2099	0
Two Stroke	0.150	150.00	0.00	-150	0.00	2099	0
TBI	0.020	40.00	0.00	0	0.00	1985	0.05
MPI	0.035	80.00	0.00	0	0.00	1985	0.10
Air Pump	0.010	0.00	0.00	-10	0.00	1985	0
DFS	0.015	15.00	0.00	0	0.00	1985	0.10
Oil %w-30	0.005	2.00	0.00	0	0.00	1987	0
Oil Synthetic	0.015	5.00	0.00	0	0.00	1997	0
Tires I	0.010	16.00	0.00	0	0.00	1992	0
Tires II	0.020	32.00	0.00	0	0.00	2002	0
Tires III	0.030	48.00	0.00	0	0.00	2012	0
Tires IV	0.040	64.00	0.00	0	0.00	2018	0
ACC I	0.005	15.00	0.00	0	0.00	1997	0
ACC II	0.010	30.00	0.00	0	0.00	2007	0
EPS	0.015	40.00	0.00	0	0.00	2002	0
4WD Improvements	0.030	100.00	0.00	0	-0.05	2002	0
Air Bags	-0.010	300.00	0.00	35	0.00	1992	0
Emissions Tier I	-0.010	150.00	0.00	10	0.00	1996	0
Emissions Tier II	-0.010	300.00	0.00	20	0.00	2004	0
ABS	-0.005	300.00	0.00	10	0.00	1990	0
Side Impact	-0.005	100.00	0.00	20	0.00	1996	0
Roof Crush	-0.003	100.00	0.00	5	0.00	2001	0
Increased Size/Wt.	-0.200	0.00	0.00	0	0.30	1991	0
GDI/4-cyl	0.170	1000.00	0.00	0	0.00	2005	0
GDI/6-cyl	0.170	1200.00	0.00	0	0.00	2005	0
Gasoline Hybrid	0.450	0.00	75.00	0	0.05	2001	0

N/A = Non Applicable

Source: Energy and Environment Analysis, *Changes to the Fuel Economy Module*, Final Report, prepared for the Energy Information Administration (EIA), (June 1998).

The fuel economy module utilizes 59 new technologies for each size class and origin of manufacturer (domestic or foreign) based on the cost-effectiveness of each technology and an initial availability year. The discounted stream of fuel savings is compared to the marginal cost of each technology. The fuel economy module assumes the following:

- All fuel saving technologies have a 4-year payback period.
- The real discount rate remains steady at 8 percent.
- Corporate Average Fuel Efficiency standards remain constant at 1998 levels.
- Expected future fuel prices are calculated based on an extrapolation of the growth rate between fuel prices 3 years and 5 years prior to the present year. This assumption is founded upon an assumed lead time of 3 to 5 years to significantly modify the vehicles offered by a manufacturer.
- Degradation factors (Table 21) used to convert Environmental Protection Agency-rated fuel economy to actual “on the road” fuel economy are based on application of a logistic curve to the projections of three factors: increases in city/highway driving, increasing congestion levels, and rising highway speeds.^{31,32,33,34} Degradation factors are also adjusted to reflect the percentage of reformulated gasoline consumed.

Table 21. The Average Length of Time Vehicles Are Kept Before they are Sold to Others
(Months)

Vehicle Type	Business	Utility	Government
Cars	35	68	81
Light Trucks	56	60	82
Medium Trucks	83	86	96
Heavy Trucks	103	132	117

Source: Oak Ridge National Laboratory, *Fleet Vehicles in the United States: Composition, Operating Characteristics, and Fueling Practices*, prepared for the Department of Energy, Office of Transportation Technologies and Office of Policy, Planning, and Analysis (Oak Ridge, TN, May 1992).

- The vehicle miles traveled (VMT) module forecasts VMT as a function of the cost of driving per mile, income per capita, ratio of female to male VMT, and age distribution of the driving population (Figure 4). The ratio of female to male VMT is assumed to asymptotically approach 100 percent by 2010. VMT per driver by age group was also assumed to be more uniformly distributed to younger and older age groups. AEO99 assumed that all age group VMT per driver approaches one-half of the difference between itself and the maximum VMT per driver age category. Total VMT is calibrated to Federal Highway Administration VMT data.^{34,35} The fuel price elasticity rises from -0.05 to -0.2 as fuel prices rise above reference case levels in each year.
- The share of light truck sales is assumed to reach a maximum of 46 percent of total sales by 2010. However, the light truck share will gradually decline to 41 percent if fuel prices rise to approximately \$1.50/gal. The size class sales shares will also gravitate to 26 percent for subcompacts, 40 percent for compacts, 23 percent for mid size, and 10 percent for luxury if fuel prices exceed reference case levels approximately \$1.50/gal.

Commercial Light-Duty Fleet Assumptions

With the current focus of transportation legislation on commercial fleets and their composition, the Transportation Demand Module has been redesigned to divide commercial light-duty fleets into three types of fleets: business, government, and utility. Based on this classification, commercial light-duty fleet vehicles vary in survival rates and duration in the fleet, before being combined with the personal vehicle stock (Table 22). Sales shares of fleet vehicles by fleet type also remain constant over the forecast period. Automobile fleets are divided into the following shares: business (87.39%), government (7.42%), and utilities (5.19%). Light truck fleets are divided into the following shares: business (83.50%), government (14.1%), and utilities

(2.40%)^{36,37}. Both car (23.70%) and light truck (28.57%) fleet sales are assumed to be a constant fraction of total car and light truck sales.

Table 22. Car and Light Truck Degradation Factors

	1997	2000	2005	2010	2015	2020
Cars	0.869	0.857	0.849	0.841	0.841	0.841
Light Trucks	0.817	0.805	0.798	0.790	0.790	0.790

1997-2020: Energy Information Administration, AEO99 National Energy Modeling System run: aeo99b.d100198a.

Alternative-fuel shares of fleet sales by fleet type are initially set according to historical shares (business (0.36%), government (2.21%), utility (2.64%))^{38,39} then compared to a minimum constraint level of sales based on legislative initiatives, such as the Energy Policy Act and the Low Emission Vehicle Program.^{38,39,40,41} Size class sales of alternative-fuel and conventional vehicles are held constant at anticipated levels (Table 23).⁴² Individual sales shares of alternative-fuel fleet vehicles by technology type are assumed to remain at anticipated levels for utility, government, and for business fleets in accordance with the technology shares applied from EIA surveys^{36,37} (Table 24).

Table 23. Commercial Fleet Size Class Shares by Fleet and Vehicle Type 1992
(Percentage)

Fleet Type by Size Class	Automobiles	Light Trucks
Business Fleet		
Small	4.55	37.34
Medium	71.59	37.90
Large	23.86	24.76
Government Fleet		
Small	4.35	21.34
Medium	56.52	44.39
Large	39.13	34.27
Utility Fleet		
Small	16.67	30.03
Medium	70.00	38.51
Large	13.33	31.46

Source: Oak Ridge National Laboratory, *Fleet Vehicles in the United States: Composition, Operating Characteristics, and Fueling Practices*, unpublished final report prepared for the Department of Energy, Office of Transportation Technologies and Office of Policy, Planning, and Analysis, (Oak Ridge, TN, May 1992).

Annual VMT per vehicle by fleet type stays constant over the forecast period based on the Oak Ridge National Laboratory fleet data.


Fleet fuel economy for both conventional and alternative-fuel vehicles is assumed to be the same as the personal new vehicle fuel economy and is subdivided into three size classes.

Table 24. Anticipated Purchases of Alternative-Fuel Vehicles by Fleet Type and Technology Type
(Percentage)

AFV Technology	Business	Government	Utility
Ethanol	0.02	3.06	0.00
Methanol	1.62	21.98	3.37
Electric	0.90	0.19	3.10
CNG	9.46	58.73	66.94
LPG	88.00	16.04	26.58

Sources: Energy Information Administration, *Describing Current and Potential Markets for Alternative Fuel Vehicles*, DOE/EIA-0604(96), (Washington, DC, March 1996). Energy Information Administration, *Alternatives to Traditional Transportation Fuels 1995*, DOE/EIA-0585(95), (Washington, DC, December 1996).

Figure 4. VMT per Driver by Age Group

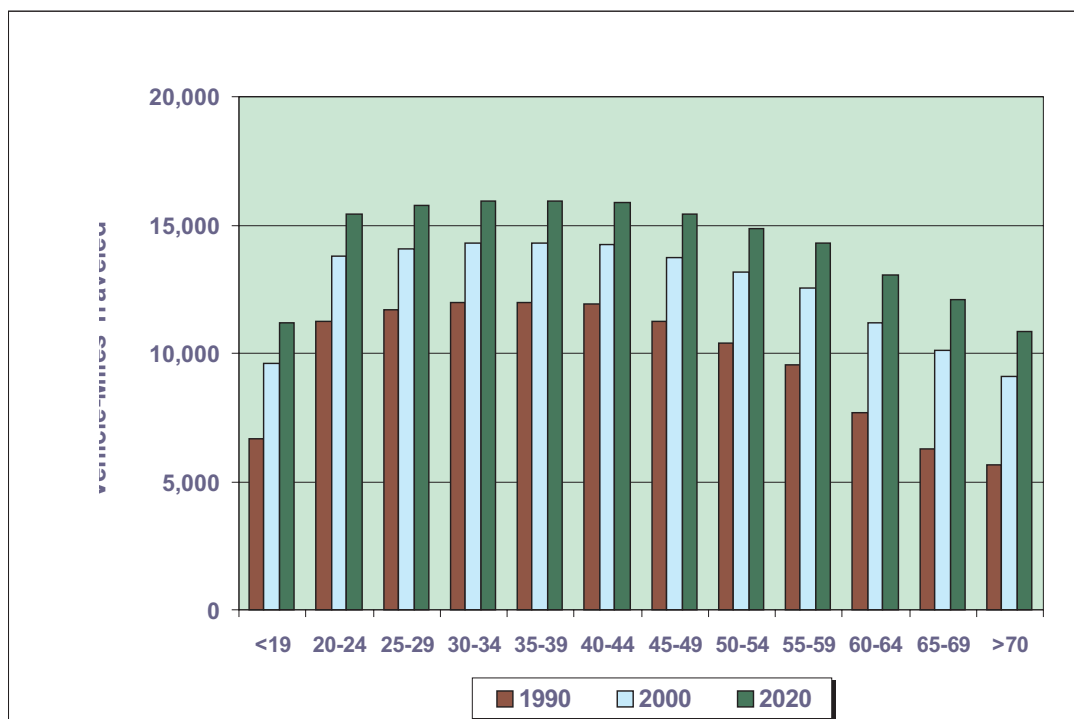

Source: 1990 values: U.S. Dept. of Transportation, *1990 National Personal Transportation Survey*, Washington D.C. February 1995; Forecast: EIA, *AEO99 National Energy Modeling System* run: aeo99b.d100199a.

The Light Commercial Truck Module

The Light Commercial Truck Module of the NEMS Transportation Model is constructed to represent trucks that weight 8501 lbs. to 10,000 lbs. These vehicles are assumed to be used for commercial freight purposes.

The primary source of data for this model is the microdata file of the 1992 Truck Inventory and Use Survey (TIUS), which provides numerous details on truck stock and usage patterns at a high level of disaggregation. The data derived from this source are used to allocate and sort the summary truck data presented in the Federal Highway Administration’s annual publication of highway statistics, which constitute the baseline from which the NEMS forecast is made (Figure 5). TIUS data are also used to distribute estimated sales of trucks, obtained from the Macroeconomic Model, among the affected models according to their weight class (Figure 6). Finally, the TIUS microdata set is used to construct a characterization of these Light Commercial


Trucks, comprising their average annual miles of travel, fuel economy, and distribution among several aggregate industrial groupings chosen for their correspondence with output measures currently being forecast by NEMS (Tables 25 and 26). It is expected that projected growth in industrial output will provide a useful proxy for the growth in demand for the services of light commercial trucks.

Over the forecast period 1997-2020 VMT for light commercial trucks is a function of industrial output for agriculture, mining, construction, trade, utilities, and personal VMT. Forecasted fuel efficiencies are assumed to increase at the same annual growth rate of light-duty trucks (<8500 lbs.).

Alternative-Fuel Vehicle Technology Choice Assumptions


The alternative-fuel vehicle (AFV) technology choice module utilizes a discrete choice specification, which uses vehicle attributes as inputs and forecasts vehicle sales shares among the following 15 light-duty technologies: gasoline internal combustion engine (ICE), direct injection diesel ICE, ethanol flex, ethanol neat, methanol flex, methanol neat, electric dedicated (uses only electricity), diesel electric hybrid, compressed natural gas (CNG), CNG bi-fuel, LPG, LPG bi-fuel, fuel cell gasoline, fuel cell methanol, and fuel cell liquid hydrogen.⁴³ Direct injection gasoline and gasoline electric hybrid technologies are included in the conventional gasoline ICE technologies.

Figure 5. Distribution of FHWA Single-Unit Truck Stocks

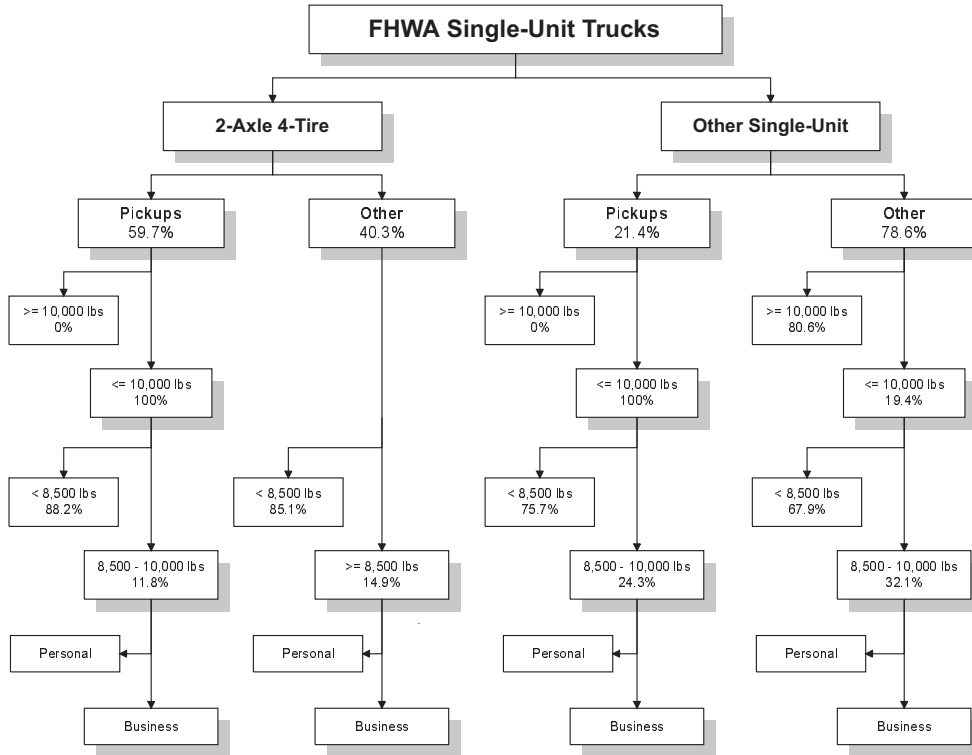

Source: U.S. Dept. Of Transportation, Federal Highway Administration, Highway Statistics 1995, Nov. 1996; U.S. Dept. Of Commerce, Bureau of the Census, Truck Inventory and Use Survey 1992,

Figure 6. Distribution of Light Truck Sales

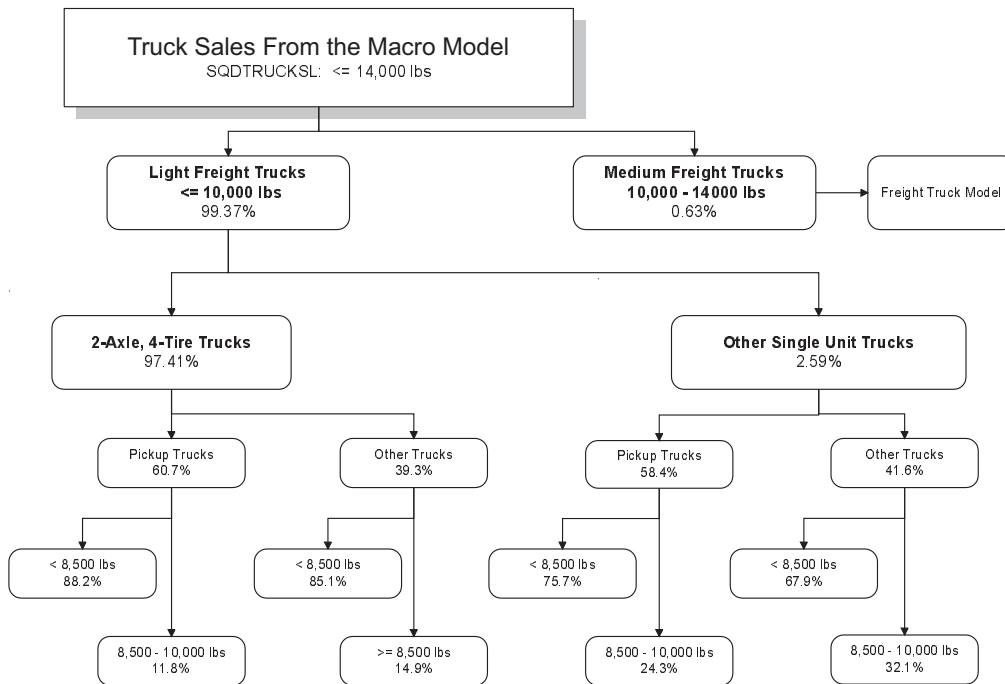

Source: U.S. Dept. Of Transportation, Federal Highway Administration, Highway Statistics 1995, Nov. 1996; U.S. Dept. Of Commerce, Bureau of the Census, Truck Inventory and Use Survey 1992,

Table 25. Anticipated Annual Miles, by Major Use (1992 TIUS)
(Aggregated for NEMS)

Major Use	Single-Unit Trucks, 6,000 - 10,000 lbs.			
	2 Axle, 4 Tire		Other Single-Unit	
	Pickup	Other	Pickup	Other
Agriculture	11,920	8,569	15,197	7,054
Mining	20,231	24,871	18,520	17,786
Construction	15,909	15,195	13,043	10,074
Trade	13,313	15,394	10,009	11,832
Utilities	13,023	13,776	9,947	9,996
Personal	9,980	10,148	8,429	5,852

Source: 1992 TIUS- U.S. Dept. Of Transportation, Federal Highway Administration, Highway Statistics 1995, Nov. 1996; U.S. Dept. Of Commerce, Bureau of the Census, Truck Inventory and Use Survey 1992, TC-92-T-52, (Washington DC., May 1995).

Table 26. Average Miles Per Gallon: Biweighted Mean Iterated

Major Use	2 Axle, 4 Tire			
	Pickup	Other	Pickup	Other
Agriculture	12.77	8.75	11.79	8.66
Mining	13.12	11.92	12.00	10.10
Construction	13.45	11.79	12.58	8.92
Trade	13.55	11.57	12.71	8.98
Utilities	13.33	10.25	13.57	8.65
Personal	13.67	13.99	12.29	10.78

Source: U.S. Dept. Of Commerce, Bureau of the Census, Truck Inventory and Use Survey 1992, TC-92-T-52, (Washington, DC., May 1995).

Listed in Table 27 are a few examples of the input variables that correspond to the vehicle attributes used in the analysis. With the exception of vehicle fuel economy, vehicle price, and vehicle range, all other attributes are exogenously set, based on offline analysis.^{44,45}

Table 27. Alternative-Fuel Vehicle Attribute Inputs For Three Stage Logit Model

Compact Vehicle Size Class	Year	Gasoline	Ethanol Flex	Methanol Flex	CNG	Diesel Electric Vehicle Hybrid	Fuel Cell Gasoline
Vehicle Price (thousand 1990 dollars)	1997	16.00	16.80	16.80	20.00	N/A	N/A
	2020	17.60	18.00	17.80	20.70	29.60 ¹	33.00 ¹
Vehicle MPG (miles/gallon)	1997	30.31	30.41	30.69	32.33	N/A	N/A
	2020	33.76	33.00	33.29	34.67	53.22	48.14
Vehicle Range (100 miles)	1997	4.50	3.22	2.52	2.65	N/A	N/A
	2020	5.08	3.51	2.74	2.88	6.25	4.80
Fuel Availability Relative to Gasoline	1997	1.00	1.00	1.00	0.02	1.00	1.00
	2020	1.00	1.00	1.00	0.22	1.00	1.00
Commercial Availability Indexed To Gasoline	1997	1.00	0.007	0.007	0.001	N/A	N/A
	2020	1.00	0.999	0.999	0.993	0.999	0.999

¹Electric vehicle battery replacement cost included.

CNG = Compressed natural gas.

MPG = Miles per gallon.

N/A = Not Available Commercially.

Sources: Vehicle prices, fuel efficiency, and range: Energy and Environmental Analysis, Updates to the *Fuel Economy Module Final Report*, Prepared for EIA, (June 1998).

Fuel and Commercial availability: Department of Energy, Office of Transportation Technologies and Energy Efficiency and Renewable Energy, *Alternative-Fuel Vehicle Model*, 1994.

Vehicle attributes vary by six EPA size classes for cars and light trucks, and fuel availability varies by Census Division. It is assumed that the logit model coefficients can be used for both estimates for future sales shares of both cars and light trucks separately. Vehicle prices are assumed to follow exponential curves of economies of scale in production dependent upon the volumes and cost curves which vary by AFV technologies. Where applicable, AFV fuel efficient technologies are calculated relative to conventional gasoline miles per gallon. It is assumed that many fuel efficiency improvements to conventional vehicles will be transferred to alternative-fuel vehicles. Specific individual alternative-fuel technological improvements are also handled dependent upon the AFV technology type, cost, research and development, and availability over time. Commercial availability estimates are assumed values according to a logistic curve based on the initial technology introduction date and were constructed in cooperation with the Office of Energy Efficiency and Renewable Energy of the Department of Energy (DOE). Coefficients summarizing consumer valuation of vehicle attributes were derived from a stated preference survey conducted in the U.S.⁴⁶ and are assumed to be representative of the United States. Initial AFV vehicle stocks are set according to EIA surveys.^{36,37} A fuel switching algorithm based on the relative fuel prices for AF compared to gasoline is used to determine the percentage of total VMT represented by AF in bi-fuel and flex-fuel alcohol vehicles. An upper limit of 50 percent and a lower limit of 25 percent is assumed.

Freight Truck Assumptions

The freight stock truck module converts industrial output in dollar terms to an equivalent measure of volume by using a freight adjustment coefficient.^{47,48} These freight truck adjustment coefficients vary by NEMS Standard Industrial Classification (SIC) code, gradually diminishing their deviation over time and are estimated from historical freight data. Freight truck load factors (ton-miles per truck) by SIC code are constants formulated from historical load factors³⁹. All freight trucks are subdivided into medium, and heavy-duty trucks. Freight truck fuel efficiency growth rates relative to fuel prices are tied to historical growth rates by size class and are also dependent on the maximum penetration, introduction year, fuel trigger price (based on cost-effectiveness), and fuel economy improvement of the technologies including alternative fuel technologies (Table 28).⁴⁹ VMT freight estimates by size class and technology are based on matching freight needs as measured by the growth in industrial output by SIC code to VMT levels associated with truck stocks and new vehicles. Fuel consumption by freight trucks is regionalized according to the *State Energy Data Report* distillate regional shares.⁵⁰

Initial freight trucks are obtained by the Federal Highway Administration (FHWA) and are distributed by Truck and Inventory Use Survey (TIUS) shares.

Table 28. Diesel Technology Characteristics for the Freight Truck Model

	Fuel Economy Improvement (%)		Maximum Penetration (%)		Introduction Yr	Fuel Trigger Price (\$1987 per MMBtu)
	Medium	Large	Medium	Large		
Existing Technologies						
Aerodynamic Features	5	13	40	100	n/a	\$8.00
Radial Tires	4	1	90	100	n/a	\$8.00
Axle or Drive Ratio to Maximize Fuel Economy	6	10	50	100	n/a	\$8.00
Fuel Economy Engine with Low RPM, Turbo Charge, etc.	7	9	80	100	n/a	\$8.00
Variable Fan Drive	3	5	40	100	n/a	\$8.00
New Technologies						
Improved Tires & Lubricants	5	5	100	100	1994	\$10.72
Electronic Engine Controls	4	4	70	98	1994	\$8.94
Electronic Transmission Controls	1	1	75	98	1994	\$28.60
Advanced Drag Reduction	15	15	40	40	1997	\$2.40
Turbocompound Diesel Engine	10	10	75	90	2010	\$7.15
Heat Engine-LE 55	17	17	100	100	9999	\$99.00

Source: U.S. Dept. of Energy, Office of Heavy Vehicle Technologies (OHVT), OHVT *Technology Roadmap DOE/OSTI-11690 (October 1997)*

Freight and Transit Rail Assumptions

The freight rail module receives industrial output by SIC code measured in real 1987 dollars and converts these dollars into an adjusted volume equivalent. Specific NEMS coal production from the Coal Module is also used to adjust coal rail travel. Freight rail adjustment coefficients, which are used to convert dollars into volume equivalents, remain constant and are based on historical data.^{47,48} Initial freight rail efficiencies are based on the freight model from Argonne National Laboratory.⁵² The distribution of rail fuel consumption by fuel type remains constant and is based on historical data (Table 28).⁵¹ Regional freight rail consumption estimates are distributed according to the *State Energy Data Report 1994*.⁵⁰

Freight Domestic and International Shipping Assumptions

The freight domestic shipping module also converts industrial output by SIC code measured in dollars, to a volumetric equivalent by SIC code.^{47,48} These freight adjustment coefficients are based on analysis of historical data and remain constant throughout the forecast period. Domestic shipping efficiencies are based on the freight model by Argonne National Laboratory. The energy consumption in the freight international shipping module is a function of the total level of imports and exports. The distribution of domestic and international shipping fuel consumption by fuel type remains constant throughout the analysis and is based on historical data. Regional domestic and international shipping consumption estimates are distributed according to the *State Energy Data Report* residual oil regional shares.⁵⁰

Air Travel Demand Assumptions

The air travel demand module calculates the ticket price for travel as a function of fuel cost. Similar to the light-duty vehicle module, the air travel fuel price elasticity rises from -0.04 to -0.2 if jet fuel prices exceed reference case levels. A demographic index based on the propensity to fly was introduced into the air travel demand equation.^{53,54} The propensity to fly was made a function of the age and sex group distribution over the forecast period.^{55,56} The air travel demand module assumes that these relationships between the groups and their propensity to fly remain constant over time. International revenue passenger miles are calculated as a percentage of domestic revenue passenger miles based on an extrapolation of historical data, which asymptotically approaches 56 percent by 2020.⁵⁷ The revenue ton miles of air freights are based on merchandise exports and gross domestic product.

Aircraft Stock/Efficiency Assumptions

The aircraft stock and efficiency module consists of a stock model of both wide and narrow body planes by vintage. The shifting of passenger load between narrow and wide body aircraft occurs at a constant historical annual 1-percent rate.⁵⁸ The available seat-miles per plane, which measure the carrying capacity of the airplanes by aircraft type, remain constant and are based on holding the seat-miles and the number of planes constant within an aircraft type.⁵⁸ The difference between the seat-miles demanded and the available seat-miles represents newly purchased aircraft. Aircraft purchases in a given year cannot exceed historical annual growth rates, a constraint that sets an upper limit on the application of new aircraft to meet the gap between seat-miles demanded and available seat-miles. With a constraint on new aircraft purchases, it is assumed that when the gap exceeds historical aircraft sales levels, planes that have been temporarily stored or retired will be brought back into service. Technological availability, economic viability, and efficiency characteristics of new aircraft are based on the technologies listed in the Oak Ridge National Laboratory Air Transport Energy Use Model. (Table 31)⁵⁹ Fuel efficiency of new aircraft acquisitions represents, at a minimum, a 5-percent improvement over the stock efficiency of surviving airplanes.⁵⁹ Maximum growth rates of fuel efficiency for new aircraft are based on a future technology improvement list consisting of an estimate of the introduction year, jet fuel price, and an estimate of the proposed marginal fuel efficiency improvement. Regional shares of all types of aircraft fuel are assumed to be constant and are consistent with the *State Energy Data Report* estimate of regional jet fuel shares.

Legislation

Energy Policy Act of 1992 (EPACT)

Fleet alternative-fuel vehicle sales necessary to meet the EPACT regulations were derived based on the mandates as they currently stand and the Commercial Fleet Vehicle Module calculations. Total projected AFV sales are divided into fleets by government, business, and fuel providers (Table 29). Although inclusion of the business fleet is dependent upon a rulemaking by the Secretary of Energy, the assumption is that fuel displacement goals set in EPACT can only be reached by inclusion of the business fleet. It is assumed that business fleet EPACT mandates do not take effect until the year 2002 based on the late mandated schedule of proposed rulemaking.

Table 29. EPACT Legislative Mandates for Percentage AFV Purchases by Fleet Type, Year

Year	Municipal & Business	Federal	State	Fuel Providers	Electric Utilities
1996	-	25	-	-	-
1997	-	33	10	30	-
1998	-	50	15	50	30
1999	-	75	25	70	50
2000	-	75	50	90	70
2001	-	75	75	90	90
2002	20	75	75	90	90
2003	40	75	75	90	90
2004	60	75	75	90	90
2005	70	75	75	70	90

Source: EIA, *Alternatives to Traditional Transportation Fuels 1994*, DOE/EIA-0585(94), (Washington, D.C, February 1996).

Because the commercial fleet model operates on three fleet type representations (business, government, and utility), the federal and state mandates were weighted by fleet vehicle stocks to create a composite mandate for both. The same combining methodology was used to create a composite mandate for electric utilities and fuel providers based on fleet vehicle stocks.^{36,37} Fleet vehicle stocks by car and light truck were disaggregated to include only fleets of 50 or more (in accordance with EPACT) by using a fleet size distribution function based on The Fleet Factbook and the Truck and Inventory Use Survey.^{38,39} To account for the EPACT regulations which stipulate that “covered” fleets (which refers to fleets bound by the EPACT mandates) include only fleets in the metropolitan statistical areas (MSA’s) of 250,000 population or greater, 90 percent of the business and utility fleets were included and 63 percent were included for government fleets.⁴⁰ EPACT covered fleets were to only include those fleets that could be centrally fueled, which was assumed to be 50 percent of the fleets for all fleet types, and only fleets of 50 or more that had 20 vehicles or more in those MSA’s of 250,000 or greater population; it was assumed that 90 percent of all fleets were within this category except for business fleets, which were assumed to be 75 percent.⁴⁰

Low Emission Vehicle Program (LEVP)

The LEVP, which began in California, which was originally instituted in New York and Massachusetts, has now been rolled back to begin in 2003 at the original 10 percent mandate for California, Massachusetts and New York. The following Zero Emission Vehicle (ZEV) sales percentage numbers (Table 30) come from the California Air Resources Board.⁶⁰ All of the ULEV sales were assumed to meet the ULEV air standards with reformulated gasoline and a heated catalytic converter.

The AFV sales module compares these legislatively mandated sales to the results from the AFV logit market-driven sales shares. The legislatively mandated sales serve as a minimum constraint to AFV sales (Table 32).

Climate Change Action Plan

There were four programs implemented from the Climate Change Action Plan (CCAP) transportation policies—reform Federal subsidy for employer-provided parking, adopt a transportation system efficiency

strategy, promote telecommuting, and develop fuel economy labels for tires. The combined effect of the Federal subsidy, system efficiency, and telecommuting policies was a reduction in VMT of 1.6 percent in 2010, representing a decline in consumption of approximately 270 trillion Btu which increases to 2.45 percent VMT reduction and a decline in fuel consumption of 470 trillion Btu by 2020. The fuel economy tire labeling program improved fuel efficiency by 4 percent among vehicles that switched to low rolling resistance tires, and resulted in a reduction in fuel consumption of 1 trillion Btu by 2010. Total reductions of carbon emissions from CCAP reach 6.5 million metric tons per year by 2010.

Table 30. Original and Revised California Low Emission Vehicle Program Legislatively Mandated Alternative-Fuel Vehicle Sales
(Percentage)

Vehicle	1997	1998	1999	2000	2001	2002	2003
Original							
Zero Emission Vehicles	--	2	2	2	5	5	10
Revised							
Zero Emission Vehicles	--	--	--	--	--	--	10

Source: California Air Resources Board, *Proposed Regulations for Low Emission Vehicles and Clean Fuels, Staff Report*, August 13, 1990.

Table 31. Future New Aircraft Technology Improvement List

Proposed Technology	Introduction Year	Jet Fuel Price Necessary For Cost- Effectiveness (1987 dollars per MBtu)	Seat-Miles per Gallon Gain Over 1990 (percent)	
			Narrow Body	Wide Body
Engines				
Ultra-high Bypass	1995	4.15	10	10
Propfan	2000	10.08	23	0
Aerodynamics				
Hybrid Laminar Flow	2020	11.34	15	15
Advanced Aerodynamics	2000	12.60	18	18
Other				
Weight Reducing Materials	2000	-	15	15
Thermodynamics	2010	9.04	20	20

Source: Greene, D.L., *Energy Efficiency Improvement Potential of Commercial Aircraft to 2010*, ORNL-6622, 6/1990., and from data tables in the Air Transportation Energy Use Model (ATEM), Oak Ridge National Laboratory.

Table 32. EPACT Alternative-Fuel Fleet Sale Estimates
(Thousands)

Vehicle Type	Fleet Type	2000	2005	2010	2020
Automobiles	Government	48.65	61.17	64.80	65.59
	Business	0.00	64.34	66.69	66.23
	Fuel Provider	65.31	73.35	77.69	78.64
Light Trucks	Government	57.97	87.02	93.69	93.30
	Business	0.00	18.49	19.90	19.82
	Fuel Provider	16.46	19.74	21.25	21.16

Source: Energy Information Administration (EIA), AEO99 National Energy Modeling System run: aeo99b.d100198a.

Advanced Technology and 1999 Technology Cases

In the *advanced technology case*, the light-duty vehicle assumptions for alternative fuel vehicles are presented in Table 33 and are based on the yearly U.S. Department of Energy Office of Energy Efficiency and Renewables Office of Transportation Technologies (OTT) Program Analysis⁶². The conventional fuel saving technology characteristics come from a study by the American Council For an Energy Efficient Economy.⁶¹ In the *advanced technology case*, fuel efficiency improvements from new technology more than offset the increasing travel in each transportation mode. As a result, the total energy consumption in the transportation sector was 7.9 percent lower (2.90 quadrillion Btu) than in the reference case by 2020.

Table 33. Alternative-Fuel Large Car Vehicle Assumptions Relative to Conventional Gasoline Vehicle, 2020
(Thousands)

Technology	Year of Introduction	Year of Maturity	Vehicle Cost Ratio	Fuel Economy Ratio	Relative Vehicle Range
Advanced Diesel	2007	2017	Intro: 1.11 Mat.: 1.04	Intro: 1.35 Mat.: 1.35	Intro: 1.20 Mat.: 1.20
Diesel Hybrid	2003	2014	Intro: 1.15 Mat.: 1.04	Intro: 1.5 Mat.: 2.00	Intro: 1.20 Mat.: 1.20
Fuel Cell	2007	2015	Intro: 1.20 Mat.: 1.09	Intro: 2.10 Mat.: 3.00	Intro: 1.00 Mat.: 1.00
Natural Gas	2000	2006	Intro: 1.11 Mat.: 1.03	Intro: 1.0 Mat.: 1.0	Intro: 0.66 Mat.: 0.75
Flex Alcohol	1998	1998	Intro: 1.0 Mat.: 1.0	Intro: 1.0 Mat.: 1.0	Intro: 1.0 Mat.: 1.0

Source: U.S. Department of Energy, Office of Energy Efficiency and Renewables, Office of Transportation Technologies, *OTT Program Analysis Methodology: Quality Metrics 99*, December, 1997.

The *1999 technology case* assumes that new fuel efficiency technologies are held constant at 1999 levels over the forecast. As a result, the energy use in the transportation sector was 7.5 percent higher (2.77 quadrillion Btu) than in the reference case by 2020. Both cases were run with only the transportation demand module rather than as a fully integrated NEMS run. Consequently, no potential macroeconomic feedback on travel demand, or fuel economy was captured.

Freight trucks in the *advanced technology case* were constructed in accordance with the assumptions from a Department of Energy (DOE) study.⁴⁹ The following technologies were made commercially available within the forecast period: advanced drag reduction, turbocompound diesel engine, heat engine CLE-55, and reduced empty weight technologies. Additionally, shorter market penetration periods, and technology prices were made cost-effective at \$6/MMBtu for diesel fuel, instead of the range of \$8-28.60/MMBtu in the *AEO99* reference case.

The air model assumptions for the *advanced technology case* were also constructed to replicate the assumptions in the DOE interlab study.⁴³ Aircraft load factors were increased to 69% for domestic and 72% for international travel. Efficiency improvements were approximately 51% higher than the 1997 levels for new aircraft by 2020, which is the equivalent of a 1.8% annual growth rate.

Table 34. High Technology Matrix For Trucks

	Fractional Fuel Efficiency Change	Incremental Cost (1990 \$)	Incremental Cost (\$/Unit Wt.)	Incremental Weight (Lbs.)	Incremental Weight (Lbs./Unit Wt.)	First Year Introduced	Fractional Horsepower Change
Front Wheel Drive	0.020	160.00	0.00	0	-0.08	1985	0
Unit Body	0.060	80.00	0.00	0	-0.05	1995	0
Material Substitution II	0.033	0.00	0.60	0	-0.05	1986	0
Material Substitution III	0.066	0.00	0.80	0	-0.10	2006	0
Material Substitution IV	0.099	0.00	1.00	0	-0.15	2016	0
Material Substitution V	0.132	0.00	1.50	0	-0.20	2026	0
Drag Reduction II	0.023	32.00	0.00	0	0.00	1990	0
Drag Reduction III	0.046	64.00	0.00	0	0.05	1997	0
Drag Reduction IV	0.069	112.00	0.00	0	0.01	2007	0
Drag Reduction V	0.092	176.00	0.00	0	0.02	2017	0
TCLU	0.030	40.00	0.00	0	0.00	1980	0
4-Speed Automatic	0.045	225.00	0.00	30	0.00	1980	0.05
5-Speed Automatic	0.065	325.00	0.00	40	0.00	1997	0.07
CVT	0.100	250.00	0.00	20	0.00	2005	0.07
6-Speed Manual	0.020	100.00	0.00	30	0.00	1997	0.05
Electronic Transmission I	0.005	20.00	0.00	5	0.00	1991	0
Electronic Transmission II	0.015	40.00	0.00	5	0.00	2006	0
Roller Cam	0.020	16.00	0.00	0	0.00	1986	0
OHC 4	0.030	100.00	0.00	0	0.00	1980	0.2
OHC 6	0.030	140.00	0.00	0	0.00	1985	0.2
OHC 8	0.030	170.00	0.00	0	0.00	1995	0.2
4C/4V	0.060	240.00	0.00	30	0.00	1990	0.45
6C/4V	0.060	320.00	0.00	45	0.00	1990	0.45
8C/4V	0.060	400.00	0.00	60	0.00	2002	0.45
Cylinder Reduction	0.030	-100.00	0.00	-150	0.00	1990	-0.1
4C/5V	0.080	300.00	0.00	45	0.00	1997	0.55
Turbo	0.050	500.00	0.00	80	0.00	1980	0.45
Engine Friction Reduction I	0.020	20.00	0.00	0	0.00	1991	0
Engine Friction Reduction II	0.035	50.00	0.00	0	0.00	2002	0
Engine Friction Reduction III	0.050	90.00	0.00	0	0.00	2012	0
Engine Friction Reduction IV	0.065	140.00	0.00	0	0.00	2022	0
VVT I	0.080	140.00	0.00	40	0.00	2006	0.1
VVT II	0.100	180.00	0.00	40	0.00	2016	0.15
Lean Burn	0.150	150.00	0.00	0	0.00	2018	0
Two Stroke	0.150	150.00	0.00	-150	0.00	2008	0
TBI	0.020	40.00	0.00	0	0.00	1985	0.05
MPI	0.035	80.00	0.00	0	0.00	1985	0.1
Air Pump	0.010	0.00	0.00	-10	0.00	1985	0
DFS	0.015	15.00	0.00	0	0.00	1985	0.1
Oil 5W-30	0.005	2.00	0.00	0	0.00	1987	0
Oil Synthetic	0.015	5.00	0.00	0	0.00	1997	0
Tires I	0.010	16.00	0.00	0	0.00	1992	0
Tires II	0.020	32.00	0.00	0	0.00	2002	0
Tires III	0.030	48.00	0.00	0	0.00	2012	0
Tires IV	0.040	64.00	0.00	0	0.00	2018	0
ACC I	0.005	15.00	0.00	0	0.00	1997	0
ACC II	0.010	30.00	0.00	0	0.00	2007	0
EPS	0.015	40.00	0.00	0	0.00	2002	0
4WD Improvements	0.030	100.00	0.00	0	-0.05	2002	0
Air Bags	-0.010	300.00	0.00	35	0.00	1992	0
Emissions Tier I	-0.010	150.00	0.00	10	0.00	1996	0
Emissions Tier II	-0.010	300.00	0.00	20	0.00	2004	0
ABS	-0.005	300.00	0.00	10	0.00	1990	0
Side Impact	-0.005	100.00	0.00	20	0.00	1996	0
Roof Crush	-0.003	100.00	0.00	5	0.00	2001	0
Increased Size/Wt.	-0.033	0.00	0.00	0	0.05	1991	0
GDI/4-cyl	0.170	1000.00	0.00	0	0.00	2005	0.02
GDI/6-cyl	0.170	1200.00	0.00	0	0.00	2005	0
Gasoline Hybrid	0.450	0.00	75.00	0	0.05	2001	0

Source: Energy and Environmental Analysis, *Changes to the Fuel Economy Module, Final Report, 12-3, prepared for Energy Information Administration (EIA), (June 1998).*

Table 35. High Technology Matrix For Cars

	Fractional Fuel Efficiency Change	Incremental Cost (1990 \$)	Incremental Cost/ (\$/Unit Wt.)	Incremental Weight (Lbs.)	Incremental Weight (Lbs./ Unit Wt.)	First Year Introduced	Fractional Horsepower Change
Front Wheel Drive	0.060	160.00	0.00	0	-0.08	1980	0
Unit Body	0.040	80.00	0.00	0	-0.05	1980	0
Material Substitution II	0.033	0.00	0.60	0	-0.05	1987	0
Material Substitution III	0.066	0.00	0.80	0	-0.10	1997	0
Material Substitution IV	0.099	0.00	1.00	0	-0.15	2007	0
Material Substitution V	0.132	0.00	15.0	0	-0.20	2017	0
Drag Reduction II	0.023	32.00	0.00	0	0.00	1985	0
Drag Reduction III	0.046	64.00	0.00	0	0.05	1991	0
Drag Reduction IV	0.069	112.00	0.00	0	0.01	2004	0
Drag Reduction V	0.092	176.00	0.00	0	0.02	2014	0
TCLU	0.030	40.00	0.00	0	0.00	1980	0
4-Speed Automatic	0.045	225.00	0.00	30	0.00	1980	0.05
5-Speed Automatic	0.065	325.00	0.00	40	0.00	1995	0.07
CVT	0.100	250.00	0.00	20	0.00	1995	0.07
6-Speed Manual	0.020	100.00	0.00	30	0.00	1991	0.05
Electronic Transmission I	0.005	20.00	0.00	5	0.00	1988	0
Electronic Transmission II	0.015	40.00	0.00	5	0.00	1998	0
Roller Cam	0.020	16.00	0.00	0	0.00	1987	0
OHC 4	0.030	100.00	0.00	0	0.00	1980	0.20
OHC 6	0.030	140.00	0.00	0	0.00	1980	0.20
OHC 8	0.030	170.00	0.00	0	0.00	1980	0.20
4C/4V	0.080	240.00	0.00	30	0.00	1988	0.45
6C/4V	0.080	320.00	0.00	45	0.00	1991	0.45
8C/4V	0.080	400.00	0.00	60	0.00	1991	0.45
Cylinder Reduction	0.030	-100.00	0.00	-150	0.00	1988	-0.10
4C/5V	0.100	300.00	0.00	45	0.00	1998	0.55
Turbo	0.050	500.00	0.00	80	0.00	1980	0.45
Engine Friction Reduction I	0.020	20.00	0.00	0	0.00	1987	0
Engine Friction Reduction II	0.035	50.00	0.00	0	0.00	1996	0
Engine Friction Reduction III	0.050	90.00	0.00	0	0.00	2006	0
Engine Friction Reduction IV	0.065	140.00	0.00	0	0.00	2016	0
VVT I	0.080	140.00	0.00	40	0.00	1998	0.10
VVT II	0.100	180.00	0.00	40	0.00	2008	0.15
Lean Burn	0.100	150.00	0.00	0	0.00	2012	0
Two Stroke	0.150	150.00	0.00	-150	0.00	2004	0
TBI	0.020	40.00	0.00	0	0.00	1982	0.05
MPI	0.035	80.00	0.00	0	0.00	1987	0.10
Air Pump	0.010	0.00	0.00	-10	0.00	1982	0
DFS	0.015	15.00	0.00	0	0.00	1987	0.10
Oil %w-30	0.005	2.00	0.00	0	0.00	1987	0
Oil Synthetic	0.015	5.00	0.00	0	0.00	1997	0
Tires I	0.010	16.00	0.00	0	0.00	1992	0
Tires II	0.020	32.00	0.00	0	0.00	2002	0
Tires III	0.030	48.00	0.00	0	0.00	2012	0
Tires IV	0.040	64.00	0.00	0	0.00	2018	0
ACC I	0.005	15.00	0.00	0	0.00	1992	0
ACC II	0.010	30.00	0.00	0	0.00	1997	0
EPS	0.015	40.00	0.00	0	0.00	2002	0
4WD Improvements	0.030	100.00	0.00	0	-0.05	2002	0
Air Bags	-0.010	300.00	0.00	35	0.00	1987	0
Emissions Tier I	-0.010	150.00	0.00	10	0.00	1994	0
Emissions Tier II	-0.010	300.00	0.00	20	0.00	2003	0
ABS	-0.005	300.00	0.00	10	0.00	1987	0
Side Impact	-0.005	100.00	0.00	20	0.00	1996	0
Roof Crush	-0.003	100.00	0.00	5	0.00	2001	0
Increased Size/Wt.	-0.033	0.00	0.00	0	0.05	1991	0
GDI/4-cyl	0.170	1000.00	0.00	0	0.00	2005	0
GDI/6-cyl	0.170	1200.00	0.00	0	0.00	2005	0
Gasoline Hybrid	0.450	0.00	75.00	0	0.05	2005	0

Source: Energy and Environmental Analysis, *NEMS Fuel Economy Model LDV High Technology Update, Final Documentation*, prepared for Energy Information Administration, (June 1998).

Notes and Sources

- [30] U.S. Department of Transportation, *National Highway Traffic and Safety Administration, Mid-Model Year Fuel Economy Reports from Automanufacturers*, (1997).
- [31] Maples, John D., *The Light-Duty Vehicle MPG Gap: Its Size Today and Potential Impacts in the Future*, University of Tennessee Transportation Center, Knoxville, TN, (May 28, 1993, Draft).
- [32] Decision Analysis Corporation of Virginia, *Fuel Efficiency Degradation Factor*, Final Report, Prepared for Energy Information Administration (EIA), (Vienna, VA, August 3, 1992).
- [33] U.S. Department of Transportation, *Federal Highway Administration, New Perspectives in Commuting*, (Washington, DC, July 1992).
- [34] U.S. Department of Transportation, *Federal Highway Administration, Highway Statistics 1996*, FHWA-PL-96-023, (Washington, DC, 1996).
- [35] Decision Analysis Corporation of Virginia, *NEMS Transportation Sector Model: Re-estimation of VMT Model*, Prepared for Energy Information Administration (EIA), (Vienna, VA, June 30, 1995).
- [36] Energy Information Administration, *Describing Current and Potential Markets for Alternative Fuel Vehicles*, DOE/EIA-0604(96), (Washington, DC, March 1996).
- [37] Energy Information Administration, *Alternatives to Traditional Transportation Fuels 1996*, DOE/(EIA-0585(96)), (Washington, DC, December 1997).
- [38] Bobbit, *The Fleet Fact Book*, Redondo Beach, (California, 1995).
- [39] U.S. Department of Commerce and Bureau of Census, *Truck Inventory and Use Survey 1992*, TC-92-T-52, (Washington, DC, May 1995).
- [40] U.S. Department of Energy, Office of Policy, *Assessment of Costs and Benefits of Flexible and Alternative Fuel Use in the U.S. Transportation Sector, Technical Report Fourteen: Market Potential and Impacts of Alternative-Fuel Use in Light-Duty Vehicles: A 2000/2010 Analysis*, (Washington, DC, 1995).
- [41] California Resources Board, *Proposed Regulations for Low-Emission Vehicles and Fuels*, Staff Report, (August 13, 1990).
- [42] Oak Ridge National Laboratory, *Fleet Vehicles in the United States: Composition, Operating Characteristics, and Fueling Practices*, Prepared for the Department of Energy, Office of Transportation Technologies and Office of Policy, Planning, and Analysis, (Oak Ridge, TN, May 1992).
- [43] U.S. Department of Energy, Office of Energy Efficiency and Renewable Energy, prepared by Interlaboratory Working Group, *Scenarios of U.S. Carbon Reductions: Potential Impacts of Energy Technologies by 2010 and Beyond*, (Washington DC, 1998).
- [44] U.S. Department of Energy, *Office of Transportation Technologies and Energy Efficiency and Renewable Energy, Alternative-Fuel Vehicle Model*, 1998.
- [45] Energy and Environmental Analysis, *Changes to the Fuel Economy Module*, Final Report, Prepared for Energy Information Administration (EIA), (June 1998).
- [46] U.S. Department of Energy, Office of Transportation Technologies, and Argonne National Laboratory, *National Alternative Fuel Vehicle Survey*, Draft, August 21, 1998.
- [47] Decision Analysis Corporation of Virginia, *Re-estimation of Freight Adjustment Coefficients*, Report Prepared for Energy Information Administration (EIA), (February 28, 1995).
- [48] Reebie Associates, *TRANSEARCH Freight Commodity Flow Database*, (Greenwich, CT, 1992).

- [49] U.S. Department of Energy, Office of Heavy Vehicle, Technologies (OHVT), *OHVT Technology Roadmap*, DOE/OSTI-11690, (October 1997).
- [50] Energy Information Administration, *State Energy Data Report 1995*, DOE/EIA-0214(95), (Washington, DC, December 1997).
- [51] U.S. Department of Transportation, *Federal Railroad Administration, 1989 Carload Waybill Statistics; Territorial Distribution, Traffic and Revenue by Commodity Classes*, (September 1991 and prior issues).
- [52] Argonne National Laboratory, *Transportation Energy Demand Through 2010*, (Argonne, IL, 1992).
- [53] Army Corps of Engineers, *Waterborne Commerce of the United States*, (Waterborne Statistics Center: New Orleans, LA, 1993).
- [54] Transportation Research Board, *Forecasting Civil Aviation Activity: Methods and Approaches, Appendix A*, Transportation Research Circular Number 372, (June 1991).
- [55] Decision Analysis Corporation of Virginia, *Re-estimation of NEMS Air Transportation Model*, Prepared for the Energy Information Administration (EIA), (Vienna, VA, 1995).
- [56] Air Transport Association of America, *Air Travel Survey*, (Washington DC, 1990).
- [57] U.S. Department of Transportation, *Air Carrier Traffic Statistics Monthly*, (December 1996).
- [58] U.S. Department of Transportation, *Federal Aviation Administration, FAA Aviation Forecasts Fiscal Years 1996-2008*, (Washington, DC, March 1997, and previous editions).
- [59] Oak Ridge National Laboratory, *Energy Efficiency Improvement of Potential Commercial Aircraft to 2010, ORNL-6622*, (Oak Ridge, TN, June 1990), Oak Ridge National Laboratory, *Air Transport Energy Use Model*, Draft Report, (Oak Ridge, TN, April 1991).
- [60] California Air Resources Board, *Proposed Regulations for Low Emission Vehicles and Clean Fuels, Staff Report*, (August 13, 1990).
- [61] DeCicco, John, and Marc Ross, *An Updated Assessment of the Near-Term Potential for Improving Automotive Fuel Economy*, American Council for an Energy Efficient Economy, November 1993.
- [62] U.S. Department of Energy, Office of Energy Efficiency and Renewables, Office of Transportation Technologies, *OTT Program Analysis Methodology: Quality Metrics 99*, (December, 1997).

Electricity Market Module

The NEMS Electricity Market Module (EMM) represents the planning, operations, and pricing of electricity in the United States. It is composed of four primary submodules—electricity capacity planning, electricity fuel dispatching, load and demand-side management, and electricity finance and pricing. In addition, nonutility generation and supply and electricity transmission and trade are represented in the planning and dispatching submodules.

Based on fuel prices and electricity demands provided by the other modules of the NEMS, the EMM determines the most economical way to supply electricity, within environmental and operational constraints. There are assumptions about the operations of the electricity sector and the costs of various options in each of the EMM submodules. The major assumptions are summarized below.

Key Assumptions

Capacity Types

Twenty-six capacity types are presented in the EMM (Table 36).

Table 36. Capacity Types Represented in the Electricity Market Module

Capacity Type
Coal Steam pre-1965; Unscrubbed coal - Sulfur dioxide <=1.20 pounds per million Btu
Coal Steam pre-1965; Unscrubbed coal - Sulfur dioxide <=3.34 pounds per million Btu
Coal Steam pre-1965; Unscrubbed coal - Sulfur dioxide >=3.34 pounds per million Btu
Coal Steam post-1965; Unscrubbed coal - Sulfur dioxide <= 1.20 pounds per million Btu
Coal Steam post-1965; Unscrubbed coal - Sulfur dioxide <= 3.34 pounds per million Btu
Coal Steam post-1965; Unscrubbed coal - Sulfur dioxide >=3.34 pounds per million Btu
Coal Steam with Scrubber
New High Sulfur Pulverized Coal with Wet Flue Gas Desulfurization
New Advanced Coal - Integrated Coal Gasification Combined Cycle
Oil/Gas Steam - Oil/Gas Steam Turbine
Combined Cycle - Conventional Gas/Oil Combined Cycle Combustion Turbine
New Advanced Combined Cycle - Advanced Gas/Oil Combined Cycle Combustion Turbine
Combustion Turbine - Conventional Combustion Turbine
Advanced Combustion Turbine - Steam Injected Gas Turbine
Molten Carbonate Fuel Cell
Advanced Nuclear Advanced Light Under Reactor
Conventional Hydropower - Hydraulic Turbine
Pipeline Hydropower - Hydraulic Turbine
Pumped Storage - Hydraulic Turbine Reversible
Geothermal - Dual Flash
Geothermal - Binary
Municipal Solid Waste - Mass Burn
Biomass - Integrated Gasification Combined-Cycle
Solar Thermal - Central Receiver
Solar Photovoltaic - Fixed-Flat Plate
Wind

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

New Generating Plant Characteristics

The operational characteristics of new generating technologies are the most important inputs to the electricity capacity planning submodule. The key characteristics for these technologies are summarized in Table 37. These characteristics are used, in combination with fuel price foresight from the NEMS Integrating Module, to compare resource options when new capacity is needed. Heat rates for fossil-fueled technologies decline linearly between 1995 and 2010. The assumptions for nuclear technologies are described later in this section.

The overnight costs listed for each technology in Table 37 are the base costs estimated to build a plant in *Middletown, U.S.A.* Differences in plant costs due to regional distinctions are calculated by applying regional multipliers (Tables 38 and 39) to the cost of labor, factory equipment, and site material for each new generating technology.

Table 37. Cost and Performance Characteristics of New Central Station Electricity Generating Technologies

Technology	Year Available	Size (mW)	Leadtime (Year)	Overnight Capital Costs ¹ First-of-a-kind (\$1997/kW)	Overnight Capital Costs ¹ Nth-of-a-kind (\$1997/kW)	Variable O&M (1997 Mills/kWhr)	Fixed O&M (\$1997/kW)	Heatrate First-of-a-kind (Btu/kWhr)	Heatrate Nth-of-a-kind (Btu/kWhr)
Scrubbed Coal New	1997	400	4	1,093	1,093	3.33	23.03	9,585	9,087
Integrated Gas Comb Cycle	1997	428	4	1,606	1,091	0.79	32.13	8,470	6,968
Gas/Oil Steam Turbine	1997	300	2	1,004	1,004	0.51	30.70	9,500	9,500
Conv Gas/Oil Comb Cycle	1997	250	3	445	445	0.51	15.35	8,030	7,000
Adv Gas/Oil Comb Cycle	1997	400	3	575	405	0.51	14.23	6,985	6,350
Conv Combustion Turbine	1998	160	2	329	329	0.10	6.35	11,900	10,600
Adv Combustion Turbine	1997	120	2	461	325	0.10	9.01	9,700	8,000
Fuel Cells	2001	10	2	2,146	1,458	2.05	14.74	6,000	5,361
Advanced Nuclear	2001	600	4	2,371	1,570	0.41	56.29	10,400	10,400
Biomass	2001	100	4	2,205	1,448	5.32	44.00	9,224	8,219
MSW ²	1996	30	1	N/A	5,892	5.53 ²	0.00	16,000	16,000
Geothermal ³	1997	50	4	1,831	1,831	0.00	85.90	32,391	N/A
Wind	1997	50	3	1,109	776	0.00	25.92	N/A	N/A
Solar Thermal ^{4,5}	1997	100	3	2,904	1,907	0.00	46.58	N/A	N/A
Photovoltaic ⁵	1998	5	2	4,162	2,903	0.00	9.82	N/A	N/A

¹Overnight capital cost plus project contingencies, excluding regional multipliers (See Tables 38 and 39).

²Because municipal solid waste (MSW) does not compete with other technologies in the model, these values are used only in calculating the average costs of electricity.

³Because geothermal cost and performance parameters are specific for each of the 51 sites in the database, the Nth-of-a-kind capital cost and heatrate are averages for the capacity built in 2000.

⁴Solar thermal is assumed to operate economically only in Electricity Market Module regions 2, 5, and 10-13, that is, West of the Mississippi River, because of its requirement for significant direct, normal insolation.

⁵Capital costs for solar technologies are net of (reduced by) the 10 percent investment tax credit.

O&M = Operation and maintenance.

Sources: Most values are derived by the Energy Information Administration, Office of Integrated Analysis and Forecasting from analysis of reports and discussions with various sources from industry, government, and the National Laboratories, with the following specific sources — **Solar Thermal**: California Energy Commission Memorandum, *Technology Characterization for ER94*, August 6, 1993. **Photovoltaic**: *Technical Assessment Guide-Electric Power Research Institute* (EPRI-TAG1993). **MSW**: EPRI-TAG 1993.

Table 38. Regional Multipliers for New Construction, Fossil-Fueled and Nuclear Generating Technologies

EMM Region	NE, NY	MAAC	STV	MAPP, ECAR MAIN	SPP
Factory Equipment	1.09	1.01	0.95	1.01	1.03
Site Labor	1.33	0.97	0.69	1.03	0.98
Site Material	1.08	0.97	0.93	1.00	1.00
EMM Region	RA	NWP	FL	CNV	ERCOT
Factory Equipment	1.05	0.99	0.90	1.01	1.02
Site Labor	1.02	1.20	0.70	1.45	0.89
Site Material	1.03	1.00	0.80	1.01	0.98

Note: See Part II, Detailed Tables, Tables 54 through 66 for regional descriptions. Source: Argonne National Laboratory, *Cost and Performance Database for Electric Power Generating Technologies*.

Table 39. Regional Multipliers for New Construction, Renewable Energy Technologies

EMM	Number/Region	Multiplier
1	ECAR	1.01;
2	ERCOT	1.00; 0.98 for MSW
3	MAAC	1.00; 0.99 for MSW
4	MAIN	1.01
5	MAPP	1.01
6	NY	1.12; 1.16 for MSW
7	NE	1.12; 1.16 for MSW
8	FL	0.86; 0.83 for MSW
9	STV	0.91; 0.87 for MSW
10	SPP	1.02; 1.01 for MSW
11	NWP	1.02; 1.00 for geothermal; 1.05 for MSW
12	RA	1.04; 1.00 for geothermal
13	CNV	1.07; 1.00 for geothermal; 1.13 for MSW

Source: Argonne National Laboratory, *Cost and Performance Database for Electric Power Generating Technologies*.

Representation of Electricity Demand

The annual electricity demand projections from the NEMS demand modules are converted into load duration curves for each of the EMM regions (based on North American Electric Reliability Council regions and subregions) using historical hourly load data. However, unlike traditional load duration curves where the demands for an entire period would be ordered from highest to lowest, losing their chronological order, the load duration curves in the EMM are segmented into nine different time slices (Table 40). The time periods shown were mainly chosen to accommodate intermittent generating technologies (i.e., solar and wind facilities) and demand-side management programs.

Table 40. Load Segments for the Electricity Market Module

Season	Months	Period	Hours
Summer	June-September	Daytime	0700-1800
		Morning/Evening	0500-0700, 1800-2400
		Night	0000-0500
Winter	December-March	Daytime	0800-1600
		Morning/Evening	0500-0800, 1600-2400
		Night	0000-0500
Off-peak	April-May	Daytime	0700-1700
	October-November	Morning/Evening	0500-0700, 1700-2400
		Night	0000-0500

Note: Both the summer and winter peak periods are represented by 2 vertical slices each (a peak slice and an off-peak slice). The remaining 7 periods are represented by 1 vertical slice each, resulting in a total of 11 vertical slices.

Reserve margins—the percentage of capacity required in excess of peak demand needed for unforeseeable outages—are also assumed for each EMM region. Fifteen percent reserve margins are assumed for NWP and NY, fourteen percent for CNV and RA, and thirteen percent for ECAR, ERCOT, MAAC, MAIN, MAPP, SPP and STV, eight percent for NE, and four percent for FL.

Fossil Fuel-Fired Steam Plant Maintenance/Retirement

Fossil-fired steam plant retirements are calculated endogenously within the model. Fossil plants are retired when it is no longer economical to continue running them. Each year, the model determines whether the market price of electricity is sufficient to support the continued operating of existing plants. If the revenue from these plants is not sufficient to cover the going forward costs - mainly fuel and operations and maintenance costs - the plant will be retired.

Nuclear Power Plant Orders and Retirements

There are no nuclear units currently under construction in the United States, and the AEO99 does not assume any new units become operational in the forecast period.

It is assumed that nuclear power plants will operate until some major capital expenditure is required to repair the effects of aging. The decision to either incur the costs of repairing the unit or retire the unit is based on the relative economics of the alternatives. In the reference case, it is first assumed that a retrofit costing \$150 per kilowatt will be required after 30 years of operation to operate the plant for another 10 years. Plants that have already incurred a major expenditure (such as a steam generator replacement) are assumed not to need additional retrofits and to run for 40 years. For other units, the capital investment is assumed to be recovered over 10 years, and an annual payment is calculated. If the combined operating costs and capital payment costs are cheaper than building new capacity, then the plant is run through its license period. If it is not economical, the plant is retired at 30 years.

It is also assumed that nuclear licenses will be renewed at the end of 40 years, if it is economical to continue running the plant. A more extensive capital investment (\$250 per kilowatt) is assumed to be required to operate a nuclear unit for 20 years past its current license expiration date. If this investment, recovered after 20 years, is less expensive than building new capacity, the unit is assumed to continue operating. Otherwise, it will be retired when it reaches the expiration date on its license. For both of these investment decisions, adjustments are made for new units to capture the improvements in their designs compared with older units.

Interregional Electricity Trade

Both firm and economy electricity transactions among utilities in different regions are represented within the EMM. In general, firm power transactions involve the trading of capacity and energy to help another region satisfy its reserve margin requirement, while economy transactions involve energy transactions motivated by the marginal generation costs of different regions. The flow of power from region to region is constrained by the existing and planned capacity limits as reported on the April 1995, *Coordinated Bulk Power Supply Program Report*, (DOE Form OE-411). Known firm power contracts are locked in for the term of the contract. In addition, in certain regions where data show an established commitment to build plants to serve another region, new plants are permitted to be built to serve the other region's needs. This option is available to compete with other resource options.

Economy transactions are determined in the dispatching submodule by comparing the marginal generating costs of adjacent regions in each time slice. If one region has less expensive generating resources available in a given time period (adjusting for transmission losses and transmission capacity limits) than another region, the regions are allowed to exchange power. The price for the economy transactions is assumed to be set by splitting the difference between the exporting and importing region's marginal generation costs.

International Electricity Trade

Two components of international firm power trade are represented in the EMM—existing and planned transactions, and unplanned transactions. Existing and planned transactions are obtained from the North American Electric Reliability Council regional publications of the *Coordinated Bulk Power Supply Program Report*, (DOE Form OE-411). Unplanned firm power trade is represented by competing Canadian supply with U.S. domestic supply options. Canadian supply is represented via supply curves using cost data from the Department of Energy report *Northern Lights: The Economic and Practical Potential of Imported Power from Canada*, (DOE/PE-0079).

International economy trade is determined endogenously based on surplus energy expected to be available from Canada by region in each time slice. Canadian surplus energy is determined using Canadian electricity supply and demand projections as reported in the Canadian National Energy Board report *Energy Supply and Demand 1993-2010*.

Electricity Finance and Pricing

The reference case assumes a transition to competitive pricing in California, New York, the New England states, the Mid-Atlantic States and the Mid-America Interconnected Network (Illinois, plus parts of Missouri

and Wisconsin). Although other states such as Oklahoma, Wisconsin, and Montana have decided to allow consumers to choose their electricity suppliers, the regional configuration of these suppliers assumed in the reference case prevents representation of competitive markets in the regions in which these states are located. Nevertheless, the reference case assumes that: in California, the price of electricity will remain constant between 1996 and 2001 for commercial and industrial consumers while residential customers will enjoy a 10 percent reduction in current prices starting in 1998; the market will transition from a regulated to a competitive market between 2002 and 2007; and California markets will be fully competitive by 2008. Similarly, in the other competitive regions, the transition period is assumed to occur from 1998 through 2007 with full competitive pricing of electricity beginning in 2008.

The price of electricity to the consumer is comprised of the price of generation, transmission and distribution. Transmission and distribution are considered to remain regulated in the *AEO*; that is, the price of transmission and distribution is based on the average cost for each customer class. In the competitive regions, the generation component of price is based on marginal cost, which is defined as the cost of the last (or most expensive) unit dispatched. The marginal cost includes fuel, operating and maintenance, taxes, and a reliability price adjustment, which represents the value of capacity in periods of high demand. Therefore, the price of electricity in the regulated regions consists of the average cost of generation, transmission, and distribution for each customer class. The price of electricity in the five regions with a competitive generation market consists of the marginal cost of generation summed with the average costs of transmission and distribution.

In recent years, the move towards competition in the electricity business has led utilities to make efforts to reduce costs to improve their market position. These cost reduction efforts are reflected in utility operating data reported to the Federal Energy Regulatory Commission (FERC) and trends evidenced there have been incorporated in the *AEO99*. The key trends are discussed below:

- **Reduced General and Administrative Expenses (G&A)** - Over the 1990 through 1994 period, utilities have reduced their employment by 65,000, a reduction of nearly 3 percent annually. This trend has been incorporated by reducing G&A expenditures at a rate of 2.5 percent annually over the next 10 years.
- **Reduced Fossil Plant Operations Expenditures (O&M)** - Again, over the 1990 through 1994 period, utility fossil plant operation and maintenance costs (all operating costs other than fuel) fell at a rate of nearly 3 percent annually. As with G&A, this trend has been incorporated by reducing fossil O&M expenditures at a rate of 2.5 percent annually over the next 10 years.
- **Reduced Nuclear Operations and Maintenance Expenditures** - In the *AEO99* nuclear O&M expenditures are reduced over time to reflect the impact of older more expensive plants retiring in the later years of the forecast. In 2020 nuclear capacity is 50 gigawatts below the 1997 level and nuclear O&M expenditures are reduced 5 percent to reflect this.

Demand-Side Management

Improvements in energy efficiency induced by rising energy prices, new appliance standards, and utility demand-side management programs are represented in the end-use demand models. Appliance choice decisions are a function of the relative costs and performance characteristics of a menu of technology options. In 1996, utilities reported spending over \$1.90 billion on demand-side management programs. These expenditures are expected to decrease slightly to over \$1.81 billion by the year 2001.⁶³

Fuel Price Expectations

Capacity planning decisions for the electric power industry are based on a lifecycle cost analysis over a 30-year period. This requires foresight assumptions for fuel prices. Expected prices for coal, natural gas, and oil are derived using adaptive expectations, in which future prices are extrapolated from recent historical trends.⁶⁴ For each projection year, coal prices are assumed to decrease one percent annually from that year's projected price until the end of the subsequent 30 year period or until the cumulative decrease based on the annual one percent reduction equals or exceeds 0.75. If the cumulative increase equals or exceeds 0.75 then coal prices are assumed to remain constant from that year to the end of the 30 year period. For

each oil product, future prices are estimated by applying a constant markup to an external forecast of world oil prices. The markups are calculated by taking the differences between the regional product prices and the world oil price for the previous forecast year. For natural gas, expected wellhead prices are based on a nonlinear function that relates the expected price to the cumulative domestic gas production. Delivered prices are developed by applying a constant markup, which represents the difference between the delivered and wellhead prices from the prior forecast year.

The approach for natural gas was developed to have the following properties:

1. The natural gas wellhead price should be upward sloping as a function of cumulative gas production.
2. The rate of change in wellhead prices should increase as fewer economical reserves remain to be discovered and produced.

The approach assumes that at some point in the future a given target price, PF, results when cumulative gas production reaches a given level, QF. The target values for PF and QF were assumed to be \$6.00 per thousand cubic feet (1995 dollars) and 2000 trillion cubic feet, respectively. Gas hydrates are included in the resource base. The future annual production is assumed to be constant at the prior year's level.

The expected wellhead gas price equation is of the following form:

$$P_k = A * Q_k^{0.75} + B$$

where P is the wellhead price for year k, Q is the cumulative production from 1991 to year k, and A and B are determined each year such that the price equation will intersect the future target point (PF, QF).

Technological Optimism and Learning Factors

Overnight costs are calculated for each new generating technology by applying the regional cost multipliers from Table 38 to the base overnight cost in Table 37. For advanced generating technologies these costs are assumed to be fifth-of-a-kind costs (the overnight cost for the fifth unit constructed). Technological optimism factors (Table 41) are applied to the first-of-a-kind unit (the first unit constructed of that technology) and decrease linearly until the fifth unit is constructed. In addition, overnight costs for advanced generating technologies other than wind decrease by 10 percent for each doubling of capacity for the first through the fifth unit, decrease by 5 percent for each doubling of capacity for the sixth through the fortieth unit, and decrease by 2.5 percent for each doubling of capacity past the forty-first unit. The cost of unit technologies decrease by 8 percent for each doubling of capacity from the first to the fifth unit and decrease by 5 percent for each doubling, thereafter. In the case of conventional generating technologies, no technological optimism factors are applied. Construction costs as computed from the regional multipliers and the base overnight costs are assumed to be the cost per kilowatt for the first forty units constructed. Costs then decrease by 2.5 percent for each doubling of capacity for past forty units.

In *AEO99*, capital costs for all new electricity generating technologies (fossil, nuclear, and renewable) decrease in response to foreign and domestic experience. Foreign units of new technologies are assumed to contribute to reductions in capital costs for units that are installed in the United States to the extent that (1) the technology characteristics are similar to those used in U.S. markets, (2) the design and construction firms and key personnel compete in the U.S. market, (3) the owning and operating firm competes actively in the U.S. market, and (4) there exists relatively complete information about the status of the associated facility. If the new foreign units do not satisfy one or more of these requirements, they are given a reduce weight or not included in the learning effects calculation.

International learning effects this year include 1,553 megawatts advanced coal (gasification), 2,330 megawatts advanced combined cycle, 360 megawatts advanced combustion turbine, 110 megawatts geothermal, 1,250 megawatts wind, 115 megawatts grid-connected photovoltaics, and 57 megawatts biomass integrated combined cycle capacity in operation, under construction, or under contract for construction outside the United States. Table 66 shows identified offshore units contributing to U.S. learning in *AEO99*.

Table 41. Technological Optimism and Learning Factors for New Generating Technologies

Technology	Optimism Factor	Learning Factor Units 1 to 5	Learning Factor Units 6 to 40	Learning Factor Above Unit 40
Scrubbed Coal New	1.00	N/A	N/A	0.025
Integrated Gas Comb Cycle	1.16	0.100	0.050	0.025
Gas/Oil Steam Turbine	1.00	N/A	N/A	0.025
Conv Gas/Oil Comb Cycle	1.00	N/A	N/A	0.025
Adv Gas/Oil Comb Cycle	1.12	0.100	0.050	0.025
Conv Combustion Turbine	1.00	N/A	N/A	0.025
Adv Combustion Turbine	1.12	0.100	0.050	0.025
Fuel Cells	1.16	0.100	0.050	0.025
Advanced Nuclear	1.19	0.100	0.050	0.025
Biomass	1.19	0.100	0.050	0.025
Municipal Solid Waste ¹	N/A	N/A	N/A	N/A
Geothermal	N/A	0.100	0.050	0.025
Wind	1.00	0.080	0.050	0.050
Solar Thermal	1.19	0.100	0.050	0.025
Photovoltaic	1.12	0.100	0.050	0.025

¹ Municipal Solid Waste does not compete in the model with other technologies; thereby, Optimism and Learning Factors are not computed.

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Legislation

Clean Air Act Amendments of 1990 (CAAA90)

It is assumed that electricity producers comply with the CAAA90, which mandate a limit of 9.48 million short tons of sulfur dioxide emissions by 2000 and 8.95 million tons by 2010. Utilities are assumed to comply with the limits on sulfur emissions by retrofitting units with flue gas desulfurization (FGD) equipment, transferring or purchasing sulfur emission allowances, operating high-sulfur coal units at a lower capacity utilization rate, or switching to low-sulfur fuels. The costs for FGD equipment average approximately \$144 per kilowatt, in 1987 dollars, although the costs vary widely across the regions. It is also assumed that the market for trading emission allowances is allowed to operate without regulation and that the States do not further regulate the selection of coal to be used.

Utilities are assumed to comply with the mandates set forth in the CAAA90 with respect to the SO₂ and NO_x standards. It is assumed that utilities will comply with CAAA90 and reduce their emissions of sulfur dioxide (SO₂) by 10 million tons over the forecast period. Consequently, the forecast assumes that the cost associated with purchasing an SO₂ allowance (dollars per ton of SO₂) is equivalent to the marginal cost of compliance (dollars per ton of SO₂ removed).

As specified in the CAAA90, EPA has developed a two-phase NO_x program, with the first set of standards taking force in 1996 while the second set is to be implemented in 2000 (Table 42). Dry bottom wall-fired, and tangential fired boilers, the most common boiler types, referred to as Group 1 Boilers, were required to make significant reductions beginning in 1996 and further reductions in 2000. Relative to their uncontrolled emission rates, which range roughly between 0.6 and 1.0 pounds per million Btu, they are required to make reductions of between 25 and 50 percent to meet the Phase I limits and further reductions to meet their Phase II limits. Both Phase I and Phase II NO_x limits are incorporated in the NEMS.

Table 42. NO_x Emissions Standards
(Pounds per million Btu)

Boiler Type	# Boilers	Phase I Limit	Phase II Limit
Group 1 Boilers			
Dry Bottom Wall-Fired	284	0.50	0.45
Tangential	296	0.45	0.38
Group 2 Boilers			
Cell Burners	35	NA	0.68
Cyclones	88	NA	0.94
Wet Bottom Wall-Fired	38	NA	0.86
Vertically Fired	29	NA	0.80
Fluidized Bed	5	NA	0.29

NA = Not Applicable

Source: Environmental Protection Agency, Nitrogen Oxide Emission Reduction Program

Ozone Transport Rule

Powerplant operators are assumed to comply with the Ozone Transport Rule (OTR) issued on September 24, 1998. The OTR sets summer season (May through September) nitrogen dioxide (NO₂) emission caps for 22 midwestern and eastern states beginning in 2003. The model evaluates the economical options available for meeting the caps. It is assumed that, the states will set up a region wide cap and trade program, rather than attempting to meet their individual caps. The compliance technologies available include various combustion controls, selective noncatalytic reduction, and selective catalytic reduction.

Energy Policy Act of 1992 (EPACT)

The provisions of the EPACT include revised licensing procedures for nuclear plants and the creation of exempt wholesale generators (EWGs).

EPACT allows the issuance of a combined construction and operating license for nuclear plants; however, it also allows for a post-construction hearing and judicial review. The uncertainty associated with waste, regulatory, and financial issues is sufficiently large to require their resolution or some manner of financial protection for investors before investments in nuclear power would take place. Unresolved, these conditions would lead to investments in alternative capacity additions or a delay in capital investment. Therefore, no newly ordered nuclear plants are assumed to become operational by 2020.

EPACT reformed the Public Utility Holding Company Act of 1935 (PUHCA). Prior to the passage of EPACT, PUHCA required that utility holding companies register with the Securities and Exchange Commission (SEC) and restricted their business activities and corporate structures.⁶⁵ Entities that wished to develop facilities in several States were regulated under PUHCA. To avoid the stringent SEC regulation, nonutilities had to limit their development to a single State or limit their ownership share of projects to less than 10 percent. EPACT changed this by creating a class of generators that, under certain conditions, are exempt from PUHCA restrictions. These EWGs can be affiliated with an existing utility (affiliated power producers) or independently owned (independent power producers). In general, subject to State commission approval, these facilities are free to sell their generation to any electric utility, but they cannot sell to a retail consumer. These EWGs are represented in NEMS.

Climate Change Action Plan

As a result of the Climate Challenge Program (CCAP) many utilities have announced efforts to voluntarily reduce their greenhouse gas emissions between now and 2000. These efforts cover a wide variety of programs including increasing DSM investments, repowering (fuel-switching) of fossil plants, restarting of nuclear plants that have been out-of-service, planting trees, and purchasing emission offsets from international sources. To the degree possible, each one of the participation agreements was examined to determine if the commitments made were addressed in the normal reference case assumptions or whether

they were addressable in NEMS. Programs like tree planting and emission offset purchasing are not addressable in NEMS. With regard to the other programs, they are, for the most part, captured in NEMS. For example, utilities annually report to EIA their plans (over the next 10 years) to bring a plant back on line, repower a plant, life extend a plant, cancel a previously planned plant, build a new plant, or switch fuel at a plant. Additionally, reduced transmission losses due to improved transformer efficiencies are incorporated. These data are inputs to NEMS. Thus, programs that would affect these areas are reflected in NEMS input data. However, because many of the agreements do not identify the specific plants where action is planned, it is not possible to determine which of the specified actions, together with their greenhouse gas emission savings, should be attributed to the Climate Challenge Program and which are just the result of normal business operations.

FERC Orders 888 and 889

FERC has issued two related rules (Orders 888 and 889) designed to bring low cost power to consumers through competition, ensure continued reliability in the industry, and provide for open and equitable transmission services by owners of these facilities. Specifically, Order 888 requires open access to the transmission grid currently owned and operated by utilities. The transmission owners must file nondiscriminatory tariffs that offer other suppliers the same services that the owners provide for themselves. Order 888 also allows these utilities to recover stranded costs (investments in generating assets that are unrecoverable due to consumers selecting another supplier). Order 889 requires utilities to implement standards of conduct and an Open Access Same-time Information System (OASIS) through which utilities and non-utilities can receive information regarding the transmission system. Consequently, utilities are expected to functionally or physically unbundle their marketing functions from their transmission functions.

These orders are represented in the EMM by assuming that the debt/equity financing structure for new technologies is the same for utilities and nonutilities.

Electricity and Renewable Technology Cases

High Electricity Demand Case

The *high electricity demand case* assumes that electricity demand grows at 2.0 percent annually between 1996 and 2020, and 1.8 percent between 1990 and 1997. In the reference case, electricity demand is projected to grow 1.4 percent annually between 1997 and 2020. No attempt was made to determine the changes necessary in the end-use sectors needed to result in the stronger demand growth.

The *high electricity demand case* is a partially integrated run, i.e., the Macroeconomic Activity, Petroleum Marketing, International Energy, and end-use demand modules use the reference case values and are not affected by the higher electricity demand growth. Conversely, the Oil and Gas, Natural Gas Transmission and Distribution, Coal Market, and Renewable Fuels Modules are allowed to interact with the EMM in the high electricity demand case. *AEO99* also analyzed an integrated *high technology case (consumption high technology)*, which combines the *high technology cases* of the four end-use demand sectors and the *electricity high fossil technology case*.

Low and High Fossil Cases

The *low fossil case* assumes that the costs of advanced generating technologies (integrated coal-gasification combined-cycle, advanced natural gas combined-cycle and turbines, and fuel cells) will remain at the first-of-a-kind cost during the projection period. Capital costs of conventional generating technologies are the same as those assumed in the reference case (Table 43). In the *high fossil case*, efficiencies of advanced fossil generating technologies are higher than the reference case, based on discussions with the Department of Energy, Office of Fossil Energy, while efficiencies of conventional technologies are the same as used in the reference case.

The *low and high fossil runs* are partially-integrated runs, i.e., the Macroeconomic Activity, Petroleum Market, International Energy, and end-use demand modules use the reference case values and are not affected by changes in generating capacity mix. Conversely, the Oil and Gas Supply, Natural Gas

Transmission and Distribution, Coal Market, and Renewable Fuels Modules are allowed to interact with the EMM in the *low and high fossil cases*.

Low and High Nuclear Cases

The *low and high nuclear cases* were developed with different assumptions regarding the capital investments at the 30 and 40 year decision points, which changes the retirement decisions. In the low nuclear case, the cost reduction adjustments for the new plants were removed, making these units face higher capital investments. The high nuclear case assumes that there are no aging effects and, therefore, no capital expenditures required during the current license life or for license renewal.

The *low and high nuclear cases* are partially-integrated model runs, i.e., the Macroeconomic Activity, Petroleum Market, and International Energy modules use the reference case outputs and are not affected by changes in nuclear capacity. Conversely, the Oil and Gas Supply, Natural Gas Transmission and Distribution, Coal Market, and Renewable Fuels Modules interact with the EMM in the high and low nuclear cases.

High Renewables Case

For the *high renewables case*, EIA incorporates approximations of renewable energy technology characterizations prepared jointly by the U.S. Department of Energy and the Electric Power Research Institute, technology assumptions of lower capital and operating costs, and higher efficiencies (capacity factors) for new renewable energy generating technologies than used in the reference case.⁶⁶ EIA also assumed that the yields for energy crops grown on pasture and crop land are nearly 20 percent higher than in the reference case. Further, for the high renewables case, EIA assumes that additional capacity effects of State RPS programs included in the reference case will extend beyond 2010, by 2020 adding 97 megawatts of additional generating capacity. All other technologies and other NEMS modeling characteristics remain unchanged from the reference case (Table 44).

Renewable Portfolio Standard Case

A case was run in which a minimum level of nonhydroelectric renewable generation was required. In this case, the minimum percentage of renewable generation (defined as generation from wind, biomass, geothermal, solar thermal, photovoltaic, and landfill gases divided by total sales and multiplied by 100) increased from 2 percent to 5.5 percent over the period 2000 through 2020 inclusive. This was a fully integrated run, in which all the modules were used. As in the reference case, New York, California, New England, the Middle Atlantic, and MAIN (Illinois-Wisconsin-Michigan) use marginal-cost-based pricing for electricity generation, while other regions are assumed to use the average cost methodology for electricity prices.

Competitive Pricing Cases

The competitive pricing case assumes that all regions of the country will gradually move toward marginal-cost-based pricing for generation services. Prices for transmission and distribution services are assumed to continue to be based on average costs. Competitive pricing for generation services is phased in over 10 years (1998-2007) by computing a weighted average of the traditional average-cost-based price and a price based on marginal costs. The weighting factor changes over time—initially weighting the average-cost-based price more heavily, then decreasing the weight over the phase-in period—until the price is based solely on marginal costs. Other than the pricing methodology, all other assumptions in the competitive pricing case are the same as those in the reference case.

It is also assumed that some consumers will be able to respond to time-of-use pricing by altering their demand patterns. Through “load shifting”, consumer can reduce usage during a peak period, when prices are high and supply is tight, and shift that usage to an off-peak period.

Table 43. Cost and Performance Characteristics for Fossil-Fueled Generating Technologies: Three Cases

Technology	Fifth-of-a-Kind Reference (1997\$/kW)	First-of-a-Kind Reference (1997\$/kW)	Overnight Costs			Heat Rate		
			Reference (1997\$/kW)	High Fossil (1997\$/kW)	Low Fossil (1997\$/kW)	Reference (Btu/kWh)	High Fossil (Btu/kWh)	Low Fossil (Btu/kWh)
Pulverized Coal	\$1,093	\$1,093						
2000			\$1,017	\$1,093	\$1,093	9,419	9,419	9,419
2005			\$1,091	\$1,092	\$1,090	9,253	9,253	9,253
2010			\$1,086	\$1,090	\$1,070	9,087	9,087	9,087
2015			\$1,083	\$1,090	\$1,054	9,087	9,087	9,087
2020			\$1,080	\$1,090	\$1,038	9,087	9,087	9,087
Integrated Coal Gasification Combined-Cycle	\$1,091	\$1,606						
2000			\$1,202	\$1,017	\$1,606	7,969	7,937	8,470
2005			\$1,089	\$909	\$1,606	7,489	7,403	8,470
2010			\$1,036	\$831	\$1,606	6,968	6,870	8,470
2015			\$974	\$785	\$1,606	6,968	6,870	8,470
2020			\$924	\$762	\$1,606	6,968	6,870	8,470
Conv. Comb.-Cycle	\$445	\$445						
2000			\$442	\$442	\$442	7,687	7,687	7,687
2005			\$443	\$437	\$422	7,343	7,343	7,343
2010			\$432	\$436	\$415	7,000	7,000	7,000
2015			\$432	\$436	\$408	7,000	7,000	7,000
2020			\$432	\$436	\$404	7,000	7,000	7,000
Adv. Comb.-Cycle	\$405	\$575						
2000			\$424	\$364	\$575	6,927	6,919	6,985
2005			\$333	\$285	\$575	6,639	6,587	6,985
2010			\$325	\$278	\$575	6,350	6,255	6,985
2015			\$320	\$276	\$575	6,350	6,255	6,985
2020			\$318	\$274	\$575	6,350	6,255	6,985
Conv. Comb. Turbine	\$329	\$329						
2000			\$311	\$311	\$311	11,467	11,467	11,467
2005			\$305	\$307	\$304	11,033	11,033	11,033
2010			\$304	\$306	\$302	10,600	10,600	10,600
2015			\$303	\$306	\$299	10,600	10,600	10,600
2020			\$302	\$306	\$296	10,600	10,600	10,600
Adv. Comb. Turbine	\$325	\$461						
2000			\$293	\$244	\$461	9,133	8,865	9,700
2005			\$264	\$226	\$461	8,567	8,699	9,700
2010			\$260	\$222	\$461	8,000	8,533	9,700
2015			\$255	\$218	\$461	8,000	8,500	9,700
2020			\$253	\$217	\$461	8,000	8,500	9,700
Fuel Cell	\$1,570	\$2,371						
2000			\$1,869	\$1,607	\$2,159	5,787	5,760	6,000
2005			\$1,823	\$1,568	\$2,159	5,574	5,521	6,000
2010			\$1,823	\$1,568	\$2,159	5,361	5,281	6,000
2015			\$1,823	\$1,568	\$2,159	5,361	5,281	6,000
2020			\$1,823	\$1,568	\$2,159	5,361	5,281	6,000

N/A = Not Applicable.

Source: AEO99 National Energy Modeling System runs: aeo99b.d100198a,htecel.d100798a, ltecel.d100398a.

Table 44. Cost and Performance Characteristics for Renewable Energy Generating Technologies: Two Cases

Technology/Year	Overnight Costs ¹				Capacity Factor	
	Fifth-of-a-Kind (\$1997/kW)	First-of-a-Kind (\$1997/kW)	Reference Case (\$1997/kW)	High Renewables Case (\$1997/kW)	Reference (%) Case	High Renewables (%) Case
Biomass Integrated Gasification Combined Cycle (IGCC)	1,448	2,205				
2000			2,205	1,757	80	80
2005			1,909	1,532	80	80
2010			1,467	1,359	80	80
2015			1,397	1,262	80	80
2020			1,304	1,167	80	80
Geothermal ²	1,831	1,831				
2000			1,831	1,555	87	87 ⁵
2005			1,425	1,444	87	87 ⁵
2010			1,561	1,362	87	87 ⁵
2015			1,669	1,312	87	87 ⁵
2020			1,539	1,264	87	87 ⁵
Solar Thermal ³	1,907	2,904				
2000			2,904	4,051	42	42
2005			2,868	3,234	42	44
2010			2,824	2,418	42	56
2015			2,795	2,380	42	68
2020			2,642	2,342	42	77
Photovoltaic ⁴	2,903	4,162				
2000			4,076	4,653	28	21
2005			2,657	2,636	28	21
2010			2,474	1,364	29	21
2015			2,421	1,186	30	21
2020			2,387	1,015	30	21
Wind	776	1,109				
2000			1,109	693	30	37
2005			753	664	32	41
2010			736	623	34	45
2015			726	615	36	46

¹Decision year overnight cost plus project contingencies, excluding regional multipliers (See Table 39)

²Geothermal capital costs can increase when natural resource limitations offset learning effects.

³For Solar Thermal, EIA assumes lower initial costs than assumed by the Department of Energy Office of Energy Efficiency and Renewable Energy; however, no commercial-scale units are in service or planned. Capital costs for solar technologies are net of (reduced by) the 10 percent investment tax credit.

⁴For Photovoltaics, the reference case features crystalline silicon modules, which are more expensive and more efficient than the less expensive but also less efficient thin film modules assumed in the high renewables case. Capital costs for solar technologies are net of (reduced by) the 10 percent investment tax credit.

⁵The U.S. Department of Energy (DOE) Office of Energy Efficiency and Renewable Energy assumes higher capacity factors, all greater than 90 percent.

Source: AEO99 National Energy Modeling System runs: aeo99b.d100198a, hirenew.d100398b

Notes and Sources

[63] Form EIA-861, Annual Electric Utility Report, 1993.

[64] Energy Information Administration, NEMS Integrating Module Documentation Report, DOE/EIA-M057(95), (Washington, DC, May 1995).

[65] A registered utility holding company is defined as any company that owns or controls 10% of the voting securities of a public utility company. PUHCA defines a public utility company as any company that owns or operates generation, transmission, or distribution facilities for the sale of electricity to the public.

[66] Electric Power Research Institute and U.S. Department of Energy, Office of Utility Technologies *Renewable Energy Technology Characterizations* (EPRI TR-109496, December 1997) or <http://www.eren.doe.gov/utilities/techchar.html>.

Oil and Gas Supply Module

The NEMS Oil and Gas Supply Module (OGSM) constitutes a comprehensive framework with which to analyze oil and gas supply. A detailed description of the OGSM is provided in the EIA publication, *Model Documentation Report: The Oil and Gas Supply Module (OGSM)*, DOE/EIA-M063(99), (Washington, DC, January 1999). The OGSM provides crude oil and natural gas short-term supply parameters to both the Natural Gas Transmission and Distribution Module and the Petroleum Market Module. The OGSM simulates the activity of numerous firms that produce oil and natural gas from domestic fields throughout the United States, acquire natural gas from foreign producers for resale in the United States, or sell U.S. gas to foreign consumers.

OGSM encompasses domestic crude oil and natural gas supply by both conventional and nonconventional recovery techniques. Nonconventional recovery includes enhanced oil recovery and unconventional gas recovery from tight gas formations, gas shale, and coalbeds. Foreign gas transactions may occur via either pipeline (Canada or Mexico) or transport ships as liquefied natural gas (LNG).

Primary inputs for the module are varied. One set of key assumptions concerns estimates of domestic technically recoverable oil and gas resources. Other major factors affecting the projection include the start date and threshold price for the Alaskan Natural Gas Transportation System (ANGTS), projections for enhanced oil recovery production, supplemental gas supplies over time, and natural gas import and export capacities.

Key Assumptions

Domestic Oil and Gas Technically Recoverable Resources

Domestic oil and gas technically recoverable resources⁶⁷ consist of proved reserves,⁶⁸ inferred reserves,⁶⁹ and undiscovered technically recoverable resources.⁷⁰ OGSM resource assumptions are based on estimates of technically recoverable resources from the United States Geological Survey (USGS) and the Minerals Management Service (MMS) of the Department of the Interior, with supplemental adjustments to the USGS nonconventional resources by Advanced Resources International (ARI), an independent consulting firm.⁷¹ While undiscovered resources for Alaska are based on USGS estimates; estimates of recoverable resources are obtained on a field by field basis from a variety of sources including trade press. Published estimates in Tables 45 and 46 reflect the removal of intervening reserve additions between the dates of the USGS (1/1/94) and MMS (1/1/95) estimates and 1/1/97.

Alaskan Natural Gas

The outlook for natural gas production from the North Slope of Alaska is affected strongly by the unique circumstances regarding its transport to market. Unlike virtually all other identified deposits of natural gas in the United States, North Slope gas lacks a means of economic transport to major commercial markets. The lack of viable marketing potential at present has led to the use of Prudhoe Bay gas to maximize crude oil recovery in that field. This use is expected to delay extraction of gas for market until the post-2005 period. The estimates for gas from the North Slope that will be transported to lower 48 States markets through ANGTS are dependent on the capacity of this system. ANGTS is projected to flow gas to market in two phases, and it is assumed that production will be available to fully utilize the capacity in both phases, if constructed. Operational capacity for the first phase is 767 billion cubic feet per year delivered to the U.S./Canadian border. Annual capacity increases to 1,150 billion cubic feet upon the completion of the second phase. Operation for each phase is assumed to begin at midyear; thus only half of the capacity is available for the first year of operation, with full capacity available in each year thereafter. It is assumed that ANGTS will not begin operation until 2005 at the earliest, to support oil recovery in the Prudhoe Bay field. Each phase of ANGTS is brought on line in OGSM when the appropriate border-crossing price is reached for gas delivered to the lower 48 States. The price for phase one is \$3.96 in 1997 dollars per thousand cubic feet. When this price is reached, ANGTS is brought on line in the following year, with a total flow of 383 billion cubic feet, reaching the full capacity of 767 billion cubic feet in subsequent years. If a higher threshold price of \$5.31, in 1997 dollars per thousand cubic feet is reached, then phase two will begin the following year.

The flow will increase by 192 billion cubic feet, to 959 billion cubic feet, and in each subsequent year the flow will be 1,150 billion cubic feet. This methodology is applied in all the cases.

The projection for supplemental gas supply is identified for three separate categories: synthetic natural gas (SNG) from liquids, SNG from coal, and other supplemental supplies.

Projected SNG production from liquids is based on an econometrically derived equation, with the independent variable being the regional average market price for natural gas. SNG from the currently operating Great Plains Coal Gasification Plant is assumed to continue through 2008, at 57.67 billion cubic feet per year. In all cases, it is assumed that in midyear 2009 the Great Plains facility will stop producing natural gas when the current purchase contract expires and natural gas production is not economical. At that time, the facility is assumed to be more profitable. Other supplemental supplies are held at a constant level of 44.04 billion cubic feet per year throughout the forecast because this level is consistent with historical data and there is no reason to believe this will change significantly in the context of a reference case forecast.

Table 45. Crude Oil Technically Recoverable Resources
(Billion Barrels)

Crude Oil Resource Category	As of January 1, 1997
Undiscovered	27.08
Onshore	19.83
Deep (>10,000 ft)	3.92
Shallow (0-10,000ft)	15.91
Offshore	7.25
Deep (>200 meter W.D.)	4.07
Shallow (0-200 meter W.D.)	3.18
Inferred Reserves	49.20
EOR	12.70
Other Onshore	31.64
Deep (>10,000 ft)	0.96
Shallow (0-10,000 ft)	30.68
Offshore	4.86
Deep (>200 meter W.D.)	2.73
Shallow (0-200 meter W.D.)	2.13
Total Lower 48 States Unproved	76.28
Alaska	10.53
Total U.S. Unproved	86.81
Proved Reserves	23.32
Total Crude Oil	110.13

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Note: Resources in restricted areas (where drilling is prohibited) are not included in this table. Also, the EOR and Alaska values are not explicitly utilized in the OGSM, but are included here to complete the table.

Table 46. Natural Gas Technically Recoverable Resources
(Trillion Cubic Feet)

Natural Gas Resource Category	As of January 1, 1997
Nonassociated Gas	
Undiscovered	268.55
Onshore	173.89
Deep (>10,000 ft)	86.90
Shallow (0-10,000 ft)	86.99
Offshore	94.66
Deep (>200 meters W.D.)	40.15
Shallow (0-200 meters W.D.)	54.51
Inferred Reserves	233.30
Onshore	196.74
Deep (>10,000 ft)	26.23
Shallow (0-10,000 ft)	170.51
Offshore	36.56
Deep (>200 meters W.D.)	14.09
Shallow (0-200 meters W.D.)	22.47
Unconventional Gas Recovery	371.86
• Tight Gas	264.66
• Shale	52.64
• Coalbed	54.56
Assoc-Dissolved Gas	124.30
Total Lower 48 Unproved	998.01
Alaska	11.46
Total U.S. Unproved	1,009.47
Proved Reserves	166.47
Total Natural Gas	1,175.94

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Note: Resources in restricted areas (where drilling is prohibited) are not included in this table. Also, the Associated Dissolved Gas and the Alaska values are not explicitly utilized in the OGSM, but are included here to complete the table.

Natural Gas Imports and Exports

U.S. natural gas trade with Mexico and natural gas exports from the United States to Canada are determined exogenously to NEMS. U. S. exports of LNG are also exogenously determined. U.S. import flows from Canada are determined endogenously within the model but are constrained by assumed pipeline capacities. Exogenously specified projections of pipeline import and export values from Canada and Mexico are shown in Table 47.

Table 47. U.S. Natural Gas Imports and Exports
(Billion Cubic Feet per Year)

Year	Canada		Mexico	
	Imports ¹	Exports	Imports	Exports
2000	5,233	56	20	60
2005	5,632	56	20	84
2010	5,839	56	20	109
2015	6,109	56	20	137
2020	6,333	56	20	192

¹Canadian "import" figures represent design capacity, not actual flow projections, because flows are not an assumption. Canadian import flows are determined endogenously within the model.

Notes: Imports are imports to the United States. Exports are exports from the United States.

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Canadian production and exports to the United States are determined endogenously within the model. Natural gas exports to Canada from the United States are assumed to be a constant 51 billion cubic feet in each projection year because this is the current level and there is no forecast for pipeline expansion for exports. The Canadian economically recoverable resource base estimate used in the model for the beginning of year 1990 is 304 trillion cubic feet for gas, derived from figures published by the National Energy Board. This quantity was assumed to increase at a rate of 2 percent each projection year to reflect improvements in and penetration of technology.

Annual U.S. exports of LNG were assumed to be a constant at 67.6 billion cubic feet in each projection year. LNG imports are determined endogenously within the model. The outlook for LNG imports was based on a combination of influences, including available gasification capacity, announced plans by each company, tanker availability, expected utilization rates, projected gas prices and liquefaction capacity, and long-term contracts with a responsible purchaser. LNG import capacity in 1996 is 0.3 trillion cubic feet. The outlook for LNG imports also includes an implicit assumption that no major operational or institutional difficulties arise that are not resolved expeditiously.

Currently, only two LNG import terminals are in operation: the DISTRIGAS facility in Everett, Massachusetts, and the Trunkline facility in Lake Charles, Louisiana. The other two existing import terminals, at Cove Point, Maryland, and at Elba Island, Georgia, are not expected to reopen for tanker imports in the projection period.

Offshore Royalty Relief

The Outer Continental Shelf Deep Water Royalty Act (Public Law 104-58) gives the Secretary of Interior the authority to suspend royalty requirements on new production from qualifying leases and requires that royalty payments be waived on new leases sold in the 5 years following November 28, 1997. The volume of production on which no royalties are due is assumed to be 17.5 million barrels of oil equivalent (BOE) in water depths of 200 to 400 meters, 52.5 million BOE in water depths of 400 to 800 meters, and 87.5 million BOE in water depths greater than 800 meters. In any year during which the arithmetic average of the closing prices on the New York Mercantile Exchange for light sweet crude oil exceeds \$28 per barrel or natural gas exceeds \$3.50 per million Btu, any production of crude oil or natural gas will be subject to royalties at the lease stipulated royalty rate.

Climate Change Action Plan

The natural gas production forecasts incorporate the expected results of the Climate Change Action Plan (CCAP)— Action Item 35, entitled *Launch Coalbed Methane Outreach Program*. Under Action Item 35, the Department of Energy (DOE) and the Environmental Protection Agency (EPA) created a program to raise the awareness among key coal companies and State agencies of the potential for cost-effective methane emissions reduction.

Estimates of the production resulting from this program through 2020 have been obtained from EPA. These production projections are presented in Table 48.

Table 48. Production from Mines Reached by CCAP Action Item 35

Year	Production (billion cubic feet)
1997	13.9
1998	17.2
1999	20.4
2000	23.7
2005	26.4
2010	29.1
2015	31.8
2020	34.6

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

The annual production increases resulting (linear interpolations for interim year) from CCAP Action Item 35 are added to baseline forecasts of coalbed methane production from the OGSM. The additional production is allocated regionally based on sharing factors derived from analysis in the EPA report, *Opportunities to Reduce Anthropogenic Methane Emissions in the United States*.⁷²

Rapid and Slow Technology Cases

Two alternative cases were created to assess the sensitivity of the projections to changes in the assumed rates of progress in oil and natural gas supply technologies. To create these cases, conventional oil and natural gas reference case parameters for the effects of technological progress on finding rates, drilling, lease equipment and operating costs, and success rates were adjusted upward and downward by 50 percent. (Table 49)

A number of key exploration and production technologies for enhanced oil recovery and unconventional gas recovery were assumed to penetrate at alternative rates with varying degrees of effectiveness..

All other parameters in the model were kept at their reference case values, including technology parameters for other modules, parameters affecting foreign oil supply, and assumptions about imports and exports of LNG and natural gas trade between the United States and Mexico.

Table 49. Assumed Average Annual Rates of Technological Progress on Costs Finding Rates, and Success Rates
(Percent)

Category	Natural Gas			Crude Oil		
	Slow Technological Progress	Reference	Rapid Technological Progress	Slow Technological Progress	Reference	Rapid Technological Progress
Costs						
Drilling						
• Onshore	0.65	1.29	1.94	0.65	1.29	1.84
• Offshore	1.01	2.02	3.03	1.01	2.02	3.03
• Alaska	0.50	1.00	1.50	0.50	1.00	1.50
Lease Equipment						
• Onshore	0.30	0.59	0.89	0.30	0.59	0.89
• Offshore	0.70	1.40	2.10	0.70	1.40	2.10
• Alaska	0.50	1.00	1.50	0.50	1.00	1.50
Operating						
• Onshore	0.27	0.54	0.81	0.27	0.54	0.81
• Offshore	0.30	0.60	0.90	0.30	0.60	0.90
Alaska	0.50	1.00	1.50	0.50	1.00	1.50
Finding Rates						
New Field Wildcats						
Onshore						
• Shallow						
<i>Northeast</i>	0.50	1.00	1.50	0.50	1.00	1.50
<i>Gulf Coast</i>	1.00	2.00	3.00	1.00	2.00	3.00
<i>MidContinent</i>	1.50	3.00	4.50	1.00	2.00	3.00
<i>Southwest</i>	2.50	5.00	7.50	2.00	4.00	6.00
<i>Rocky Mountain</i>	1.00	2.00	3.00	1.00	2.00	3.00
<i>West Coast</i>	0.50	1.00	1.50	0.50	1.00	1.50
• Deep						
<i>Northeast</i>	0.00	0.00	0.00	0.00	0.00	0.00
<i>Gulf Coast</i>	1.00	2.00	3.00	0.50	1.00	1.50
<i>MidContinent</i>	1.00	2.00	3.00	0.50	1.00	1.50
<i>Southwest</i>	3.00	6.00	9.00	3.00	6.00	9.00
<i>Rocky Mountain</i>	1.00	2.00	3.00	0.50	1.00	1.50
<i>West Coast</i>	0.00	0.00	0.00	0.00	0.00	0.00
Offshore	1.50	3.00	4.50	1.00	2.00	3.00
Other Exploratory						
Onshore						
• Shallow	3.11	6.21	9.32	4.54	9.07	13.61
• Deep	2.30	4.59	6.89	7.96	15.91	23.87
Offshore	2.54	5.08	7.62	2.39	4.78	7.17
Developmental						
Onshore						
• Shallow	1.59	3.17	4.76	0.03	0.05	0.08
• Deep	3.53	7.05	10.58	0.04	0.07	0.11
Offshore	2.54	5.08	7.62	2.39	4.78	7.17
Success Rate						
• Exploratory	0.25	0.50	0.75	0.25	0.50	0.75
• Developmental	0.00	0.00	0.00	0.00	0.00	0.00

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Notes and Sources

[67] Technically recoverable resources are resources in accumulations producible using current recovery technology but without reference to economic profitability. These are oil and natural gas resources that may be produced at the surface from a well as a consequence of natural pressure within the subsurface reservoir, artificial lifting of oil from the reservoir to the surface, and the maintenance of reservoir pressure by fluid injection. These resources are generally conceived as existing in accumulations of sufficient size to be amenable to the application of existing recovery technology.

[68] Proved reserves are the estimated quantities that analysis of geological and engineering data demonstrate with reasonable certainty to be recoverable in future years from known reservoirs under existing economic and operating conditions.

[69] Inferred reserves are that part of expected ultimate recovery from known fields in excess of cumulative production plus current reserves.

[70] Undiscovered resources are located outside oil and gas fields in which the presence of resources has been confirmed by exploratory drilling; they include resources from undiscovered pools within confirmed fields when they occur as unrelated accumulations controlled by distinctly separate structural features or stratigraphic conditions.

[71] Donald L. Goutier and others, U.S. Department of Interior, U.S. Geological Survey, 1995 National Assessment of the United States Oil and Gas Resources, (Washington, D.C., 1995); U.S. Department of Interior, Minerals Management Service, an Assessment of the Undiscovered Hydrocarbon Potential of the Nation's Outer Continental Shelf, OGS Report MMS 96-0034 (1996);

[72] United States Environmental Protection Agency, Opportunities to Reduce Anthropogenic Emissions in the United States: Report to Congress, EPA430-R-93-012, (Washington, DC, October 1993).

Natural Gas Transmission and Distribution Module

The NEMS Natural Gas Transmission and Distribution Module (NGTDM) derives domestic natural gas production, wellhead and border prices, end-use prices, and flows of natural gas through the regional interstate network, for both a peak (December through March) and off peak period during each forecast year. These are derived by obtaining market equilibrium across the three main components of the natural gas market: the supply component, the demand component, and the transmission and distribution network that links them. In addition, natural gas flow patterns are a function of the pattern in the previous year, coupled with the relative prices of gas supply options as translated to the represented market “hubs.” The major assumptions used within the NGTDM are grouped into five general categories. They relate to (1) the classification of demand into core and noncore transportation service classes, (2) the pricing of transmission and distribution services, (3) pipeline and storage capacity expansion and utilization, (4) the implementation of recent regulatory reform, and (5) the implementation of provisions of the Climate Change Action Plan (CCAP). A complete listing of NGTDM assumptions and in-depth methodology descriptions are presented in *Model Documentation Report: Natural Gas Transmission and Distribution Model of the National Energy Modeling System*, DOE/EIA-MO62/1, January 1999.

Key Assumptions

Demand Classification

Customers demanding natural gas are classified as either core or noncore customers, with core customers assumed to transport their gas under firm (or near firm) transportation agreements and noncore customers assumed to transport their gas under interruptible or short-term capacity release transportation agreements. All residential, commercial, and transportation (vehicles using compressed natural gas) end-use customers are assumed to be core customers. Industrial customers fall into both categories, with industrial boilers and refineries assumed to be noncore and all other industrial users assumed to be core. Likewise, customers in the electric generator sector are assumed to be both core and noncore.⁷³ Gas steam and gas combined-cycle units are considered to be core; and the remaining units are classified as noncore.

End-use sector specific load patterns are based on recent historical patterns and do not change over the forecast. (There is no representation of the impacts of demand-side management programs or changes in load patterns from new technologies like natural gas cooling.) However, pipeline load factors do change over the forecast as the composition of end-use changes across sectors and as more pipeline and storage capacity becomes available.

Pricing of Services

Transportation rates for interstate pipeline services (both between NGTDM regions and within a region) are calculated assuming that the costs of new pipeline capacity will be rolled into the existing rate base. The flow of gas in the peak period is based on reservation and usage charges; while the off-peak flows are just based on usage fees. While cost-of-service still forms the basis for pricing these services, an adjustment to the tariffs is made based on changes in utilization to reflect a more market-based approach. Capital expenditures for refurbishment in operations and maintenance costs are not considered, nor are potential future expenditures for pipeline safety (refurbishment costs include any expenditures for repair and/or replacement of existing pipe). Reductions in operations and maintenance costs, and total administrative and general costs, as a result of efficiency improvements, are accounted for based on a frontier analysis, and an assumption that firms will approach the frontier at a rate of 4 percent per year.

End-use prices for residential, commercial, and core industrial customers are derived by adding a markup to the regional hub price of natural gas in both peak and off-peak periods. (Prices are only reported on an annual basis and represent quantity-weighted averages of the two seasons.) These markups include the cost of service provided by intraregional interstate pipelines, intrastate pipelines, and local distributors. The intrastate tariffs are accounted for endogenously through historical model benchmarking. Distributor tariffs

represent the difference between the regional end-use and citygate price, independent of whether or not a customer class typically purchase gas through a local distributor. The distribution tariffs are initially based on 1997 historical data (Table 50), but they are adjusted throughout the forecast in response to changes in consumption levels and cost of labor and capital, and assumed industry efficiency improvements. It is assumed that independent of changes in costs related to the cost of capital and labor and consumption levels, the cost of providing distribution services will decline 1 percent per year through 2015 as a result of efficiency improvements.

Table 50. Base Year Average 1997 Annual Distributor Markup for Local Transportation Service

Region	Residential	Commercial	Core Industrial	Core Electric Generators
New England	5.28	2.89	0.14	-1.36
Mid Atlantic	5.21	2.55	0.61	-0.59
East North Central	2.34	1.83	-0.05	-1.61
West North Central	2.43	1.47	-0.47	-0.98
South Atlantic	4.25	2.72	-0.12	-0.60
East South Central	3.46	2.52	-0.20	-0.60
West South Central	3.01	1.76	-0.10	-0.34
Mountain	1.68	0.96	0.23	-0.65
Pacific	3.17	2.12	3.62	-0.03
Florida	8.68	2.98	-1.54	-0.70
Arizona/New Mexico	3.85	2.10	0.30	0.04
California	3.82	3.52	0.34	0.56

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting. Derived from Form EIA-176, *Annual Report of Natural and Supplemental Gas Supply and Disposition* for residential, commercial, and citygate, from the *Manufacturing Energy Consumption Survey Consumption of Energy 1994*, (Form EIA-846) for core industrial, and derived from Form FERC-423 for core electric generators, *Monthly Report of Cost and Quality of Fuels for Electric Plants* for core electric

End-use prices for noncore industrial and electric generator customers are established by adding a markup to the natural gas market price at the corresponding core or noncore segment at the regional market hub. These markups are endogenously derived as the difference between estimated historical 1996 end-use prices⁷⁴, and the NGTDM regional hub price, and held constant throughout the forecast. End-use prices for core electric generator customers are similarly established with markups initially based on 1997 end-use prices. However, these markups are adjusted each forecast year by a fraction (0.05) of the annual percentage change in the core electric generator consumption. This adjustment is intended to reflect anticipated additional infrastructure devoted to serving core electric generation consumption growth.

The vehicle natural gas (VNG) sector is divided into fleet and non-fleet vehicles. The distributor tariffs for natural gas to fleet vehicles are set to *EIA's Natural Gas Annual* historical end-use minus citygate prices plus Federal and State VNG taxes (Table 51). The price to non-fleet vehicles is based on the industrial sector firm price plus an assumed \$4.03 (1997 dollars per thousand cubic feet) dispensing charge plus Federal and State taxes, get constant in nominal dollars. It is assumed that the retailer will lower the dispensing charge by up to 20 percent if needed to be competitive with gasoline prices.

Table 51. Vehicle Natural Gas (VNG) Pricing

Modified Census Divisions	Total Federal and State VNG Tax ¹ (Nominal dollars per thousand cubic feet)
New England	2.86
Middle Atlantic	1.22
East North Central	2.11
West North Central	1.98
South Atlantic (excludes Florida)	2.16
East South Central	1.96
West South Central	1.87
Mountain (excludes Arizona and New Mexico)	1.66
Pacific (excludes California)	2.39
Florida	1.51
Arizona and New Mexico	1.10
California	1.06

¹Assuming a \$0.4852 (nominal dollars per thousand cubic feet) Federal Tax.

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting, based on the Federal tax published in the Information Resources, Inc., publication *Octane Week*, August 9, 1993, and State taxes published in Energy Information Administration, *Alternatives to Traditional Transportation Fuels 1995*, DOE/EIA-0585(95), December 1996, Table 15.

Capacity Expansion and Utilization

For the first 2 forecast years of the model, announced pipeline and storage capacity expansions (that are deemed highly likely to occur) are used to establish limits on flows and storage in the model. Subsequently, pipeline and storage capacity is added when increases in demand, coupled with anticipated price impacts, warrant such additions (i.e., flow is allowed to exceed current capacity if the demand still exists given the adjusted tariff, thus indicating an expansion). A simple representation is incorporated to capture the average capital costs for pipeline and storage expansion and the resulting tariff. Costs are regionalized by applying regional cost factors reflecting differences in terrain and labor costs.

It is assumed that pipelines and local distribution companies build and subscribe to a portfolio of pipeline and storage capacity to serve a region-specific colder-than-normal winter demand level, currently set at 5 percent for all pipeline area. Maximum pipeline capacity utilization in the peak period is set at 99 percent. In the off-peak period, the maximum is assumed to vary between 75 and 99 percent of the design capacity. The overall level and profile of consumption as well as the availability and price of supplies generally cause realized pipeline utilization levels to be lower than the maximum. For each sector, consumption is disaggregated into peak and off-peak periods based on average historical patterns, and held constant throughout the forecast period.

Additions to underground storage capacity are constrained to capture limitations of geology in each of the market regions. The constraints limit total storage additions to be less than an expansion factor times the 1990 storage capacity.

The model methodology represents net injections of natural gas into storage in the off-peak period and net withdrawals during the peak period. Total annual net storage withdrawals equal zero in all years of the forecast.

Legislation and Regulation

The methodology for pricing firm pipeline transportation services is consistent with FERC's alternative ratemaking and capacity release position in that it allows flexibility in the rates pipelines charge. The methodology is market-based in that prices for transportation services will respond positively to increased demand for services while prices will decline (reflecting discounts to retain customers) should the demand for services decline. The model only included the current legislation and regulation.

Climate Change Action Plan

The Climate Change Action Plan (CCAP) initiatives to increase the natural gas share of total energy use through Federal regulatory reform (Action 23) are reflected in the methodology for the pricing of pipeline services. Provisions of the CCAP to expand the Natural Gas Star program (Action 32) are assumed to recover 35 billion cubic feet of natural gas per year by the year 2000 that otherwise might be lost to fugitive emissions. This is phased in by recovering 21 and 28 billion cubic feet per year in 1998 and 1999, respectively. The full 35 billion cubic feet is recovered from 2000 through the end of the forecast period.

Notes and Sources

- [73] The electric generator end-use category includes gas consumption by any facility whose sole purpose is electricity generation (including independent power producers). Natural gas consumption by cogenerators (producers of electricity as a by-product of another process) is included in industrial end-use consumption.
- [74] Historical core and noncore industrial prices were based on data from the *Manufacturing Consumption of Energy 1991, 1994*.

Petroleum Market Module

The NEMS Petroleum Market Module (PMM) forecasts petroleum product prices and sources of supply for meeting petroleum product demand. The sources of supply include crude oil (both domestic and imported), petroleum product imports, other refinery inputs including alcohol and ethers, natural gas plant liquids production, and refinery processing gain. In addition, the PMM estimates capacity expansion and fuel consumption of domestic refineries.

The PMM contains a linear programming representation of refining activities in three U.S. regions. This representation provides the marginal costs of production for a number of traditional and new petroleum products. The linear programming results are used to determine end-use product prices for each Census Division using the assumptions and methods described below.⁷⁵

Key Assumptions

Product Types and Specifications

The PMM models refinery production of the products shown in Table 52.

The costs of producing new formulations of gasoline and diesel fuel that will be phased in as a result of the Clean Air Act Amendments of 1990 (CAA90) are determined within the linear programming representation by incorporating specifications and demands for these fuels. The PMM assumes that the specifications for these new fuels will remain the same as specified in current legislation.

Table 52. Petroleum Product Categories

Product Category	Specific Products
Motor Gasoline	Traditional Unleaded, Oxygenated, Reformulated
Jet Fuel	Kerosene-type
Distillates	Kerosene, Heating Oil, Highway Diesel
Residual Fuels	Low Sulfur, High Sulfur
Liquefied Petroleum Gases	Propane, Liquefied Petroleum Gases Mixed
Petrochemical Feedstocks	Petrochemical Naptha, Petrochemical Gas Oil, Propylene, Aromatics
Others	Lubricating products and Waxes, Asphalt/Road Oil, Still Gas Petroleum Coke, Special Naphthas

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Motor Gasoline Specifications and Market Shares

The PMM models the production and distribution of three different types of gasoline: traditional, oxygenated, and reformulated. The following specifications are included in PMM to differentiate between traditional and reformulated gasoline blends (Table 53): octane, oxygen content, Reid vapor pressure (Rvp), benzene content, aromatic content, sulfur content, olefin content, and the percent evaporated at 200 and 300 degrees Fahrenheit (E200 and E300).

Traditional gasoline must comply with antidumping requirements aimed at preventing the quality of traditional gasoline from eroding as the reformulated gasoline program is implemented. Starting in 1998, traditional gasoline must meet the Complex Model compliance standards which cannot exceed average 1990 levels of toxic and nitrogen oxide emissions.⁷⁶ Traditional gasoline during the 1998-2020 time period is assumed to have “1990 baseline” specifications.

Oxygenated gasoline, which has been required during winter in many U.S. cities since October of 1992, requires an oxygenated content of 2.7 percent by weight. Oxygenated gasoline is assumed to have specifications identical to traditional gasoline with the exception of a higher oxygen requirement. Some

areas that require oxygenated gasoline will also require reformulated gasoline. For the sake of simplicity, the areas of overlap are assumed to require gasoline meeting the reformulated specifications.

Reformulated gasoline has been required in many areas in the U.S. since January 1995 (Table 53). In 1998, the EPA began certifying reformulated gasoline using the “complex model,” which allows refiners to specify reformulated gasoline based on emissions reductions from their company, 1990 baseline or the EPA’s 1990 baseline. The PMM uses a set of specifications that meet the “complex model” requirements, but it does not attempt to determine the optimal specifications that meet the “complex model.” Specifications such as Rvp, aromatics, sulfur, and olefin content change in the year 2000 reflecting “phase II” emission reduction requirements for the complex model (Table 53).

Table 53. Year Round Gasoline Specifications by Petroleum Administration for Defense Districts (PADD)

PADD	Reid	Oxygen		Aromatics	Benzene	Sulfur	Olefin	Percent	Percent
	Vapor Pressure (Max)	Weight Percent (Min)	Weight Percent (Max)	Volume Percent (Max)	Volume Percent (Max)		Volume Percent (Max)	Evaporated at 200°	Evaluated at 300°
Traditional									
PADD I-V	10.0	—	—	28.6	1.6	338.4	10.8	41.0	83.0
Reformulated									
PADD I-IV	8.5	2.1	2.7	25.0	0.95	135.0	12.0	49.0	87.0
PADD V	8.2	1.8	2.2	25.0	1.0	40.0	6.0	49.0	91.0

Max = Maximum.

Min = Minimum.

PADD = Petroleum Administration for Defense District.

PPM = Parts per million by weight.

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

The CAAA90 provided for special treatment of California that would allow different specifications for oxygenated and reformulated gasoline in that State. In 1992, California requested a waiver from the winter oxygen requirements of 2.7 percent to reduce the requirement to a range of 1.8 to 2.2 percent. The PMM assumes that Petroleum Administration for Defense District (PADD) V refiners must meet the California specifications. The specifications for reformulated gasoline in PADD V are the same as California standards.

Rvp limitations are effective during summer months, which are defined differently in different regions. In addition, different Rvp specifications apply within each refining region, or PADD. The PMM assumes that these variations in Rvp are captured in the annual average specifications, which are based on summertime Rvp limits, wintertime estimates, and seasonal weights.

Motor Gasoline Market Shares

Within the PMM, total gasoline demand is disaggregated into demand for traditional, oxygenated, and reformulated gasoline by applying assumptions about the annual market shares for each type. The shares are able to change over time based on assumptions about the market penetration of new fuels. In *AEO99*, the annual market shares for each region reflect actual 1997 market shares and are held constant throughout the forecast. The Census Divisions 3 and 4 market shares were adjusted because St. Louis, Missouri, will be joining the Federal reformulated gasoline program in the summer of 1999. (See Table 54 for *AEO99* market share assumptions.)

Table 54. Market Share for Gasoline Types by Census Division
(Percentage)

Gasoline Type/Year	Census Division								
	1	2	3	4	5	6	7	8	9
Traditional Gasoline	13	42	82	87	82	95	72	67	21
Oxygenated Gasoline (2.7% oxygen)	0	0	0	13	0	0	1	19	5
Reformulated Gasoline (2.0% oxygen)	87	58	18	0	18	5	27	14	74

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Diesel Fuel Specifications and Market Shares

In order to account for diesel desulfurization regulations, low-sulfur diesel is differentiated from other distillates. Diesel fuel in Census Divisions 1 through 8 is assumed to meet Federal requirements, while diesel fuel in Census Division 9 is assumed to meet California Air Resources Board (CARB) standards.

The PMM contains a sharing methodology to allocate distillate demands between low and high sulfur. Market shares for low-sulfur diesel and distillate fuel are estimated based on data from EIA's annual *Fuel Oil and Kerosene Sales 1997*, (on line: http://www.eia.doe.gov/oil_gas/fok/1996/fokframe96.html, November 3, 1997). Since about 20 percent of current demand in the transportation sector is off highway, 80 percent of transportation demand for distillate fuel is assumed to be low sulfur. Consumption of low-sulfur distillate outside of the transportation sector is assumed to be zero.

End-Use Product Prices

End-use petroleum product prices are based on marginal costs of production plus production-related fixed costs plus distribution costs and taxes. The marginal costs of production are determined by the model and represent variable costs of production including additional costs for meeting reformulated fuels provisions of the CAAA90. Environmental costs associated with controlling pollution at refineries⁷⁷ (Table 55) are reflected as fixed costs (associated operation and maintenance costs prior to 1996 are excluded). Assuming that refinery-related fixed costs are recovered in the prices of light products, fixed costs are allocated among

Table 55. Summary of Refinery Site Environmental Costs by Petroleum Administration for Defense Districts (PADD) (1997 Dollars per Barrel)

Cost Category	PADD I	PADD II	PADD III	PADD IV	PADD V
Environmental Costs	0.64	0.65	0.51	0.95	0.72

PADD = Petroleum Administration for Defense District.

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

the prices of liquefied petroleum gases, gasoline, distillate, kerosene, and jet fuel. These costs are based on average annual estimates and are assumed to remain constant over the forecast period.

The costs of distributing and marketing petroleum products are represented by adding fixed distribution costs to the marginal and refinery fixed costs of products. The distribution costs are applied at the Census Division level (Table 56) and are assumed to be constant throughout the forecast and across scenarios.

Distribution costs for each product, sector, and Census Division represent average historical differences between end-use and wholesale prices. The costs for kerosene are the average difference between end-use prices of kerosene and wholesale distillate prices. Distribution cost for M85 are assumed to be equivalent to distribution costs for gasoline.

Table 56. Petroleum Product End-Use Markups by Sector and Census Division
(1997 Dollars per Gallon)

Sector/Product	Census Division								
	1	2	3	4	5	6	7	8	9
Residential Sector									
Distillate Fuel Oil	0.38	0.43	0.31	0.27	0.42	0.30	0.19	0.27	0.38
Kerosene	0.53	0.58	0.47	0.42	0.51	0.37	0.41	0.58	0.95
Liquefied Petroleum Gases	0.84	0.89	0.52	0.34	0.76	0.63	0.55	0.53	0.83
Commercial Sector									
Distillate Fuel Oil	0.14	0.12	0.04	0.02	0.06	0.03	0.04	0.03	0.06
Gasoline	0.15	0.14	0.13	0.15	0.14	0.16	0.18	0.15	0.14
Kerosene	0.28	0.21	0.20	0.14	0.21	0.24	0.20	0.13	0.24
Liquefied Petroleum Gases	0.63	0.61	0.44	0.38	0.58	0.38	0.24	0.41	0.58
Low-Sulfur Residual Fuel Oil	0.01	0.06	0.04	0.02	0.04	0.05	-0.02	-0.02	0.09
Utility Sector									
Distillate Fuel Oil	0.00	0.03	0.02	0.01	0.00	0.07	0.04	0.04	0.06
High-Sulfur Residual Fuel Oil	-0.01	0.02	0.11	0.03	0.00	-0.03	0.26	0.01	0.07
Low-Sulfur Residual Fuel Oil	-0.01	0.01	0.17	0.01	0.01	0.13	0.07	0.11	0.20
Transportation Sector									
Distillate Fuel Oil	0.22	0.16	0.13	0.11	0.13	0.13	0.13	0.13	0.19
E85 ¹	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
Gasoline	0.15	0.13	0.13	0.16	0.13	0.16	0.18	0.15	0.13
High-Sulfur Residual Fuel Oil	-0.02	0.03	0.13	0.00	-0.01	0.06	0.05	0.21	0.10
Jet Fuel	0.00	0.00	-0.02	-0.03	-0.05	0.01	0.00	0.03	0.01
Liquefied Petroleum Gases	0.67	0.60	0.50	0.36	0.54	0.37	0.20	0.38	0.54
M85 ²	0.15	0.13	0.13	0.16	0.13	0.16	0.18	0.15	0.13
Industrial Sector									
Asphalt and Road Oil	0.23	0.17	0.26	0.30	0.18	0.16	0.24	0.30	0.28
Distillate Fuel Oil	0.13	0.11	0.10	0.09	0.10	0.08	0.09	0.08	0.11
Gasoline	0.15	0.13	0.13	0.17	0.13	0.17	0.17	0.16	0.13
Kerosene	0.28	0.21	0.21	0.12	0.18	0.24	0.21	0.16	0.23
Liquefied Petroleum Gases	0.62	0.55	0.49	0.31	0.53	0.32	0.10	0.29	0.55
Low-Sulfur Residual Fuel Oil	0.01	0.04	0.05	-0.01	0.03	0.05	-0.01	0.03	0.08

¹85 percent ethanol and 15 percent gasoline.

²85 percent methanol and 15 percent gasoline

Note: Use conversion factors listed in Table 1 of the *Annual Energy Outlook 1998* to convert values to physical units.

Sources: Markups based on data from Energy Information Administration (EIA), Form EIA-782A, *Refiners'/Gas Plant Operators' Monthly Petroleum Product Sales Report*; EIA, Form EIA-782B, *Resellers'/Retailers' Monthly Petroleum Report Product Sales Report*; EIA, Form FERC-423, *Monthly Report of Cost and Quality of Fuels for Electric Plants*; EIA, Form EIA-759 *Monthly Power Plant Report*; EIA, *State Energy Data Report 1995*, DOE/EIA-0214(95), (Washington, DC, December 1997); EIA, *State Energy Price and Expenditures Report 1995*, DOE/EIA-0376(95), (Washington, DC, August 1998); and EIA, *Petroleum Marketing Monthly March 1998*, DOE/EIA-0380(98/03), (Washington, DC, March 1998).

State and Federal taxes are also added to transportation fuels to determine final end-use prices (Tables 57 and 58). Recent tax trend analysis indicated that State taxes increase at the rate of inflation, therefore, State taxes are held constant in real terms throughout the forecast. Federal taxes are assumed to remain at current levels in accordance with the overall *AEO99* assumption of current laws and regulation. Federal taxes are deflated as follows:

Table 57. State-Level Taxes on Petroleum Transportation Fuels by Census Division
(1997 Dollars per Gallon)

Year/Product	Census Division								
	1	2	3	4	5	6	7	8	9
Gasoline ¹	0.24	0.20	0.22	0.19	0.16	0.18	0.19	0.21	0.23
Diesel	0.20	0.24	0.21	0.19	0.17	0.15	0.18	0.18	0.22
Liquefied Petroleum Gases	0.10	0.13	0.16	0.17	0.16	0.16	0.15	0.13	0.05
M85 ²	0.25	0.15	0.19	0.14	0.13	0.16	0.19	0.20	0.12
E85 ³	0.25	0.10	0.16	0.19	0.15	0.16	0.19	0.20	0.12
Jet Fuel	0.03	0.03	0.01	0.03	0.04	0.03	0.00	0.03	0.02

¹Tax also applies to gasoline consumed in the commercial and industrial sectors.

² 85 percent methanol and 15 percent gasoline.

³ 85 percent ethanol and 15 percent gasoline.

Source: Aggregated from Federal Highway Administration, Tax Rates on Motor Fuel February 1, 1998, Table MF-121T, <http://www.fhwa.dot.gov/ohim/mmfmov.pdf>, (Washington, DC, March 1997). *Clean Fuels Report* (Washington, DC, April 1998).

Table 58. Federal Taxes
(1997 Dollars per Gallon)

Product	Tax
Gasoline	0.18
Diesel	0.24
Jet Fuel	0.04
Liquefied Petroleum Gases	0.13
M85 ¹	0.13
E85 ²	0.13

¹85 percent methanol and 15 percent gasoline.

²85 percent ethanol and 15 percent gasoline

Sources: Omnibus Budget Reconciliation Act of 1993 (H.R. 2264); Tax Payer Relief Act of 1997 (PL 105-34) and *Clean Fuels Report* (Washington, DC, April 1998).

$$\text{Federal Tax}_{\text{product, year}} = \text{Current Federal Tax}_{\text{product}} / \text{GDP Deflator}_{\text{year}}$$

Crude Oil Quality

In the PMM, the quality of crude oil is characterized by average gravity and sulfur levels. Both domestic and imported crude oil are divided into five categories as defined by the ranges of gravity and sulfur shown in Table 59.

Table 59. Crude Oil Specifications

Crude Oil Categories	Sulfur (percent)	Gravity (degrees API)
Low Sulfur Light	0 - 0.5	> 24
Medium Sulfur Heavy	0.35 - 1.1	> 24
High Sulfur Light	> 1.1	> 32
High Sulfur Heavy	> 1.1	24 - 33
High Sulfur Very Heavy	> 0.7	0 - 23

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

A “composite” crude oil with the appropriate yields and qualities is developed for each category by averaging the characteristics of specific crude oil streams that fall into each category. While the domestic and foreign categories are the same, the composite crudes for each category may differ because different crude streams make up the composites. For domestic crude oil, an estimate of total production is made first, then shared out to each of the five categories based on historical data. For imported crude oil, a separate supply curve is provided for each of the five categories.

Regional Assumptions

PMM reflects three refining regions: PADD I, PADD V, and a third region including PADD II-IV. Individual refineries are aggregated into one linear programming representation for each region. In order to interact with other NEMS modules with different regional representations, certain PMM inputs and outputs are converted from a PMM region to a non-PMM regional structure and vice versa.

Capacity Expansion Assumptions

PMM allows for capacity expansion of all processing units including distillation capacity, vacuum distillation, hydrotreating, coking, fluid catalytic cracking, hydrocracking, alkylation, and methyl tertiary butyl ether manufacture. Capacity expansion occurs by processing unit, starting from base year capacities established by PADD using historical data.

Expansion is determined when the value received from the additional product sales exceeds the investment and operating costs of the new unit. The investment costs assume a 15-percent rate of return over a 15-year plant life. Expansion through 1999 is determined by adding to the existing capacities of units planned and under construction that are expected to begin operating during this time. Capacity expansion plans are done every 3 years. For example, after the model has reached a solution for forecast year 2000, the PMM looks ahead and determines the optimal capacities given the demands and prices existing in the 2004 forecast year. The PMM then allows 50 percent of that capacity to be built in forecast year 2002, 25 percent in 2003, and 25 percent in 2004. At the end of 2004, the cycle begins anew, looking ahead to 2007.

Strategic Petroleum Reserve Fill Rate

AEO99 assumes no additions for the Strategic Petroleum Reserve during the forecast period. Additions to the Strategic Petroleum Reserve have not been included in recent budgets.

Short-term Methodology

Petroleum balance and price information for the years 1998 and 1999 are projected at the U.S. level in the *Short-term Energy Outlook, September 1998 (STEO)*. The PMM assumes the STEO results for these years, using regional estimates derived from the national STEO projections.

Biofuels (Ethanol) Supply Submodule

Background

The Biofuels (Ethanol) Supply Submodule provides supply functions on an annual basis through 2020 for ethanol produced from both corn and biomass to produce transportation fuel.

Assumptions

- Corn feedstock supplies and costs are provided exogenously to NEMS. Feedstock costs reflect credits for co-products (livestock feed, corn oil, etc.). Feedstock supplies and costs reflect the competition between corn and its co-products and alternative crops, such as soybeans and their co-products.
- Biomass feedstock supplies and costs are taken from the NEMS Renewable Fuels Model. Capital and operating costs for biomass ethanol are derived from an Oak Ridge National Laboratory report.⁷⁸

- All corn ethanol production is projected to come from PADD II, where most of the corn is grown. This is not an assumption of the model, but rather a result of the exogenous projections of feedstock costs and quantities. However, it is assumed that the supply will approximate reality to the point that it includes most of the production. Currently, biomass ethanol is also assumed to be produced in PADD II.
- The tax subsidy to ethanol of \$0.54 per gallon of ethanol (5.4 cents per gallon subsidy to gasoline at a 10-percent volumetric blending portion) is applied within the premium. This subsidy is scheduled to be reduced to 51 cents by 2007. The tax subsidy is held constant in nominal terms, decreasing with inflation throughout the forecast. The subsidy is assumed not to expire during the forecast period.
- Interregional transportation costs are included in the Petroleum Market Model and are not part of the Biofuels Supply submodule.

Legislation

The PMM reflects recent national and regional legislative and regulatory changes that will affect future petroleum supply and product prices. It incorporates taxes imposed by the 1993 Budget Reconciliation Act and the 1997 Tax Payer Relief Act as well as costs resulting from environmental legislation.

The Budget Reconciliation Act imposes a tax increase of 4.3 cents per gallon on transportation fuels including gasoline, diesel, liquefied petroleum gases, and jet fuel. Except for jet fuel, the tax began on October 1, 1993. Jet fuel was granted a 2-year delay and was enacted in 1996.

The Tax Payer Relief Act of 1997 reduced excise taxes on liquefied petroleum gases and methanol produced from natural gas. The reductions set taxes on these products equal to the Federal gasoline tax on a Btu basis.

With a goal of reducing tailpipe emissions in areas failing to meet Federal air quality standards (nonattainment areas), Title II of the Clean Air Act Amendments of 1990 (CAAA90) established regulations for gasoline formulation. Starting in November 1992, gasoline sold during the winter in the initial 39 carbon monoxide nonattainment areas was required to be oxygenated.⁷⁹ Starting in 1995, gasoline sold in major U.S. cities that are considered the most severe ozone nonattainment areas must be reformulated to reduce volatile organic compounds (which contribute to ozone formation) and toxic air pollutants, as well as meet a number of other new specifications. Additional areas with less severe ozone problems have chosen to “opt in” to the reformulated gasoline requirement. In 1998 reformulated gasoline will be required to meet a performance based definition, “The Complex Model”. In 2000 the performance measures will become more stringent.

Title II of the CAAA90 also established regulations on the sulfur and aromatics content of diesel fuel, which took effect October 1, 1993. All diesel fuel sold for use on highways now contains less sulfur and meets new aromatics or cetane level standards.

A number of pieces of legislation are aimed at controlling air, water, and waste emissions from refineries themselves. The PMM incorporates related environmental investments as refinery fixed costs. The estimated expenditures are based on results of the 1993 National Petroleum Council Study.⁸⁰ These investments reflect compliance with Titles I, III, and V of CAAA90, the Clean Water Act, the Resource Conservation and Recovery Act, and anticipated regulations including the phaseout of hydrofluoric acid and a broad-based requirement for corrective action. No costs for remediation beyond the refinery site are included.

Lifting the ban on exporting Alaskan crude oil was passed and signed into law (PL 104-58) in November 1995. Alaskan exports of crude oil have represented about 60 percent of U.S. crude oil exports since November 1995 and are assumed to equal 60 percent of total U.S. crude oil exports in the forecast.

Reduced Sulfur Gasoline Cases

In early 1999 the EPA is expected to propose tighter restrictions on the amount of sulfur allowed in gasoline. Two alternative cases were created to assess the sensitivity of gasoline price and supply to assumed changes to gasoline sulfur limits for gasoline in various parts of the country. The alternative cases reflect proposals for sulfur reduction programs that have been submitted to the EPA by two groups: automakers - the American Automobile Manufacturers Association and the Association of International Automobile Manufacturers, and gasoline producers - the American Petroleum Institute (API) and the National Petrochemical and Refiners Association (NPRA).

Automakers' National Low Sulfur Gasoline: The alternative case reflects the American Automobile Manufacturers Association/ Association of International Automobile Manufacturers (automakers) petition to the EPA to reduce the average allowable sulfur content of gasoline in the United States to 40 ppm, which is equivalent to the current standard in the State of California. The reduced sulfur standard is assumed to be enforced nationwide in 2004 as it is associated with requirements for technology for lower emissions "Tier 2" vehicles which are required for model year 2004.

API/NPRA Regional Reduced Sulfur Gasoline: The alternative case reflects a proposal by the American Petroleum Institute/National Petrochemical and Refiners Association for a reduced sulfur gasoline program beginning in 2004. The proposal is a regional plan in which all gasoline in Federal reformulated gasoline areas and in 23 States and in East Texas must meet an annual average of 150 ppm (See Table 60). Gasoline in California would continue to meet statewide gasoline requirements which includes a 40 ppm annual average sulfur limit, while gasoline in all other parts of the country would have an annual average 300 ppm. The "second step" of the proposal includes further reduction of sulfur in 2010 for areas that require year-round Nox control gasoline. The actual sulfur level and participants would be determined by a EPA study in 2006. The alternative case assumes 40 ppm gasoline requirements beginning in 2010 for the areas with the 150 ppm limit in 2004.

Table 60. Key Assumptions for Reduced Sulfur Gasoline Cases

Demand, Prices and Imports	2004				2010		
	1997	Reference	API/NPRA Regional Reduced Sulfur	Automakers' National Low Sulfur	Reference	API/NPRA Regional Reduced Sulfur	Automakers' National Low Sulfur
Assumed Gasoline Content by Area (parts per million)							
California Reformulated Gasoline ¹	40	40	40	40	40	40	40
Federal Reformulated Gasoline Areas ²	340	150	150	40	150	40	40
23 Eastern States and East Texas ³	340	340	150	40	340	40	40
All Other Areas	340	340	300	40	340	300	40
Percentage of Total Gasoline Demand by Sulfur Content							
340 ppm average ⁴	89%	66%	-	-	66%	-	-
Less than 300 ppm	-	-	24%	-	-	24%	-
Less than 150 ppm	-	23%	65%	-	23%	-	-
Less than 40 ppm	11%	11%	11%	100%	11%	76%	100%

¹California requires a 40 parts per million (ppm) flat limit, or 30 ppm annual average with an 80 ppm cap.

²Required areas: Baltimore, Chicago, Houston, Los Angeles, Milwaukee, New York City, Philadelphia, San Diego, Sacramento, and Washington, DC, and the entire states of Connecticut, Delaware, New Jersey, Massachusetts, and Rhode Island. Plus opt-in areas in Arizona, Kentucky, Maine, Missouri, Maryland, New Hampshire, New York, Texas, and Virginia.

³Includes Alabama, Florida, Georgia, Illinois, Indiana, Kentucky, Louisiana, Maine, Maryland, Michigan, Mississippi, Missouri, New Hampshire, New York, North Carolina, Ohio, Pennsylvania, South Carolina, Tennessee, Vermont, Virginia, West Virginia, and Wisconsin.

⁴The current average sulfur content is 340 parts per million (ppm) through 1000 ppm is the maximum allowed.

DC = District of Columbia.

API/NPRA = American Petroleum Institute and National Petrochemical and Refiners Association.

Note: Side cases were run without the fully integrated modeling system, so not all potential feedbacks were captured.

Source: Energy Information Administration, AEO99 National Energy Modeling System runs AEO99B.D100198A, TRLAP.D100198A, and TRLAAMA.D101698A.

Notes and Sources

[75] Energy Information Administration, EIA Model Documentation: Petroleum Market Model of the National Energy Modeling System, DOE/EIA-MO59, January 1999.

[76] Federal Register, Environmental Protection Agency, 40 CFR Part 80, Regulation of Fuels and Fuel Additives: *Standards for Reformulated and Conventional Gasoline, Rules and Regulations*, p. 7800, (Washington, DC, February 1994).

[77] Environmental cost estimates are based on National Petroleum Council, U.S. Petroleum Refining - Meeting Requirements for Cleaner Fuels and Refineries, Volume I, (Washington, DC, August 1993). Associated operating and maintenance base costs predating 1995 are excluded as they are reflected in the refinery fixed operating cost estimates.

[78] M. Walsh, R. Perlock, D. Becker, A Turhollow, and R. Graham, "*Evolution of the Fuel Ethanol Industry: Feedstock Availability and Price*", Oak Ridge National Laboratory (June 5, 1997).

[79] Oxygenated gasoline must contain an oxygen content of 2.7 percent by weight.

[80] National Petroleum Council, U.S. Petroleum Refining - Meeting Requirements for Cleaner Fuels and Refineries, Volume I, (Washington, DC, August 1993).

Coal Market Module

The NEMS Coal Market Module (CMM) provides forecasts of U.S. coal production, consumption, exports, distribution, and prices. The CMM comprises three functional areas: coal production, coal distribution, and coal exports. A detailed description of the CMM is provided in the EIA publication, *Model Documentation: Coal Market Module of the National Energy Modeling System*, DOE/EIA-MO60.

Key Assumptions

Coal Production

The coal production submodule of the CMM generates a different set of supply curves for the CMM for each year of the forecast. Separate supply curves are developed for each of 11 supply regions, and 12 coal types (unique combinations of thermal grade, sulfur content, and mine type). The modeling approach used to construct regional coal supply curves addresses the relationship between the minemouth price of coal and corresponding levels of coal production, labor productivity, and the cost of factor inputs (mining equipment, mine labor, and fuel requirements).

The key assumptions underlying the coal production modeling are:

- Mining costs are assumed to vary with changes in mine production, labor productivity, and factor input costs. Factor input costs are represented by projections of electricity prices from the Electricity Market Module (EMM) and estimates of future coal mine labor and mining equipment costs.
- Between 1978 and 1997, U.S. coal mining productivity (measured in short tons of coal produced per miner per hour) increased at an average rate of 6.7 percent per year. The major factors underlying these gains were interfuel price competition, structural change in the industry, and technological improvements in coal mining.⁸¹ Based on the expectation that further penetration of certain more productive mining technologies, such as longwall methods and large capacity surface mining equipment, will gradually level off, productivity improvements are assumed to continue, but to decline in magnitude. Different rates of improvement are assumed by region and by mine type, surface and underground. On a national basis, labor productivity increases on average at a rate of 2.3 percent a year over the entire forecast, declining from an annual rate of 6.2 percent in 1997 to approximately 1.3 percent over the 2010 to 2020 period. These estimates are based on recent historical data reported on Form EIA-7A, *Coal Production Report*, and expectations regarding the penetration and impact of new coal mining technologies.⁸²
- Between 1985 and 1997, the average hourly wage for U.S. coal miners (in 1997 dollars) declined at an average rate of 1.1 percent per year, falling from \$21.64 to \$19.01.⁸³ In the reference case, the wage rate for U.S. coal miners, is assumed to remain constant in 1997 dollars (i.e., increase at the general rate of inflation), as it has since 1993.

Coal Distribution

The coal distribution submodule of the CMM determines the least-cost (minemouth price plus transportation cost) supplies of coal by supply region for a given set of coal demands in each demand sector in each demand region using a linear programming algorithm. Production and distribution are computed for 11 supply and 13 demand regions for 18 demand subsectors.

The projected levels of industrial, coking, and residential/commercial coal demand are provided by the industrial, commercial, and residential demand modules; electricity coal demands are provided by the EMM, and coal export demands are provided from the CMM itself.

The key assumptions underlying the coal distribution modeling are:

- Base-year transportation costs are estimates of average transportation costs for each origin-destination pair. These costs are computed as the difference between the average delivered price for a demand region (by sector and for export) and the average minemouth price for a supply region. Delivered price data are from Form EIA-3, *Quarterly Coal Consumption Report-Manufacturing Plants*, Form EIA-5, *Coke Plant Report-Quarterly*, Federal Energy Regulatory Commission (FERC) Form 423, *Monthly Report of Cost and Quality of Fuels for Electric Plants*, and the U.S. Bureau of the Census' Monthly Report EM-545. Minemouth price data are from Form EIA-7A, *Coal Production Report*.
- Coal transportation costs are modified over time in response to projected variations in reference case fuel costs (No. 2 diesel fuel in the industrial sector), labor costs, the producer price index for transportation equipment, and a time trend. The transportation rate multipliers used for all five *AEO99* cases are shown in Table 61.
- Electric utility demand received by the CMM is subdivided into "coal groups" representing demands for different sulfur and thermal heat content categories. This process allows the CMM to determine the economically optimal blend of different coals to minimize delivered cost, while meeting the sulfur emissions requirements of the Clean Air Act Amendments of 1990. Similarly, nonutility demands are subdivided into subsectors with their own coal groups to ensure that, for example, lignite is not used to meet a coking coal demand.

Table 61. Transportation Rate Multipliers
(1997=1.000)

Year	Reference Case	High Oil Price	Low Oil Price	High Economic Growth	Low Economic Growth
1997	1.0000	1.0000	1.0000	1.0000	1.0000
2000	0.9853	0.9996	0.9710	0.9782	0.9960
2005	0.9803	0.9949	0.9634	0.9834	0.9781
2010	0.9274	0.9444	0.9065	0.9467	0.9087
2015	0.8498	0.8663	0.8288	0.8818	0.8134
2020	0.7669	0.7790	0.7469	0.8082	0.7163

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Coal Exports

Coal exports are modeled as part of the CMM's linear program that provides annual forecasts of U.S. steam and metallurgical coal exports, in the context of world coal trade. The linear program determines the pattern of world coal trade flows that minimize the production and transportation costs of meeting a prespecified set of regional world coal import demands. It does this subject to constraints on export capacity, trade flows, and sulfur emissions.

The CMM projects steam and metallurgical coal trade flows from 16 coal-exporting regions of the world to 20 import regions for 4 coal types (coking, low-sulfur steam, high-sulfur steam, and subbituminous). It includes five U.S. export regions and four U.S. import regions.

The key assumptions underlying coal export modeling are:

- The coal market is competitive. In other words, no large suppliers or groups of producers are able to influence the price through adjusting their output. Producers' decisions on how much and who they supply are driven by their costs, rather than prices being set by perceptions of what the market can bear. In this situation, the buyer gains the full consumer surplus.
- Coal buyers (importing regions) tend to spread their purchases among several suppliers in order to reduce the impact of potential supply disruption, even though this adds to their purchase costs. Similarly, producers choose not to rely on any one buyer and instead endeavor to diversify their sales.

- Coking coal is treated as homogeneous. The model does not address quality parameters that define coking coals. The values of these quality parameters are defined within small ranges and affect world coking coal flows very little.

Data inputs for coal export modeling:

- U.S. coal exports are determined, in part, by the projected level of world coal import demand. World steam and metallurgical coal import demands for the *AEO99* forecast cases are shown in Tables 62 and 63.
- Step-function coal export supply curves for all non-U.S. supply regions. The curves provide estimates of export prices per metric ton, inclusive of minemouth and inland freight costs, as well as the capacities for each of the supply steps.
- Ocean transportation rates (in dollar per metric ton) for feasible coal shipments between international supply regions and international demand regions. The rates take into account maximum vessel sizes that can be handled at export and import piers and through canals and reflect route distances in thousand nautical miles.

Legislation

It is assumed that provisions of the Energy Policy Act of 1992 that relate to the future funding of the Health and Benefits Fund of the United Mine Workers of America will have no significant effect on estimated production costs, although liabilities of company's contributions will be redistributed. Electricity sector demand for coal, which represented 90 percent of domestic coal demand in 1997, incorporates the provisions of the Clean Air Act Amendments of 1990. It is assumed that electricity producers will be granted full flexibility to meet the specified reductions in sulfur dioxide emissions.

Climate Change Action Plan

Provisions of the Climate Change Action Plan (CCAP) that concern coalbed methane recovery are incorporated in the Oil and Gas Supply Module.

Mining Cost Cases

In the reference case, labor productivity is assumed to increase at an average rate of 2.3 percent a year through 2020, while wage rates remain constant in 1997 dollars. Two alternative cases were modeled in the NEMS CMM, assuming different growth rates for both labor productivity and miner wages. In a low mining cost sensitivity case, productivity increases at 3.8 percent a year, and real wages decline by 0.5 percent a year. In a high mining cost sensitivity case, productivity increases by only 1.2 percent a year, and real wages increase by 0.5 percent a year. In the alternative cases, the annual growth rates for productivity were increased and decreased by mine type (underground and surface), based on historical variations in labor productivity during the years 1980 through 1997. Both cases were run using only the NEMS Energy Supply Modules (Oil and Gas Supply Module, Natural Gas Transmission and Distribution Module, Coal Markets Module, and Renewable Fuels Module), the Petroleum Market Module, and the Electricity Market Module, rather than as a fully integrated NEMS run. Consequently, no price-induced demand feedback in end-use coal markets was captured. In an integrated run, the demand response would tend to moderate the magnitude of the equilibrium price response.

Table 62. World Steam Coal Import Demand by Import Region, 2000-2020
(Million Metric Tons of Coal Equivalent)

Import Regions ¹	2000	2005	2010	2015	2020
The Americas	19.9	19.3	21.1	22.2	25.1
United States	5.8	5.9	6.0	6.1	6.2
Canada	8.3	5.9	5.3	5.5	6.1
Mexico	2.0	3.6	5.6	6.1	8.1
South America	3.8	3.9	4.2	4.5	4.7
Europe	105.1	112.0	110.9	109.9	110.5
Scandinavia	14.9	13.6	12.6	11.8	11.2
U.K./Ireland	9.6	10.5	10.9	11.4	11.9
Germany	18.2	23.7	23.3	22.8	22.8
Other NW Europe	24.2	24.5	23.5	22.6	22.0
Iberia	12.9	12.9	12.4	11.9	11.5
Italy	9.1	8.7	8.2	7.8	7.3
Med/E Europe	16.2	18.1	20.0	21.6	23.8
Asia	148.8	169.3	195.0	210.0	225.7
Japan	64.5	73.5	84.2	84.9	85.5
East Asia	58.9	61.4	65.7	71.1	76.1
China/Hong Kong	12.3	16.0	20.6	23.4	27.9
ASEAN	8.1	10.1	13.4	16.3	18.7
Indian Sub	5.0	8.3	11.1	14.3	17.5
Total	273.8	300.6	327.0	342.1	361.3

¹Import Regions: **United States:** United States; **Canada:** Canada; **Mexico:** Mexico; **South America:** Argentina, Brazil, Chile; **Scandinavia:** Denmark, Finland, Norway, Sweden; **U.K./Ireland:** Ireland, United Kingdom; **Germany:** Austria, Germany; **Other NW Europe:** Belgium, France, Luxembourg, Netherlands; **Iberia:** Portugal, Spain; **Italy:** Italy; **Med/E Europe:** Algeria, Bulgaria, Croatia, Egypt, Greece, Israel, Malta, Morocco, Romania, Tunisia, Turkey; **Japan:** Japan; **East Asia:** North Korea, South Korea, Taiwan; **China/Hong Kong:** China, Hong Kong; **ASEAN:** Malaysia, Philippines, Thailand; **Indian Sub:** Bangladesh, India, Iran, Pakistan, Sri Lanka.

Notes: One "metric ton of coal equivalent" contains 27.78 million Btu. Totals may not equal sum of components due to independent rounding.

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Table 63. World Metallurgical Coal Import Demand by Import Region, 2000-2020
(Million Metric Tons of Coal Equivalent)

Import Regions ¹	2000	2005	2010	2015	2020
The Americas	22.3	22.6	23.9	25.7	27.6
United States	0.9	0.9	0.9	0.9	0.9
Canada	4.3	4.3	3.9	3.6	3.5
Mexico	3.2	3.2	3.2	3.2	3.2
South America	13.9	14.4	15.9	18.0	20.0
Europe	52.7	52.4	51.2	50.1	48.5
Scandinavia	3.1	2.8	2.5	2.2	1.9
U.K./Ireland	7.0	6.6	6.2	5.8	5.4
Germany	3.7	5.3	5.8	6.3	6.3
Other NW Europe	16.3	15.3	14.5	13.9	13.4
Iberia	3.4	2.9	2.5	2.1	1.7
Italy	6.4	6.2	5.9	5.6	5.3
Med/E Europe	12.8	13.3	13.8	14.2	14.5
Asia	94.8	94.9	98.5	98.8	98.7
Japan	60.1	55.2	54.2	51.3	49.5
East Asia	22.1	25.5	28.9	30.6	31.2
China/Hong Kong	0.2	0.2	0.2	0.2	0.2
ASEAN	0.0	0.0	0.0	0.0	0.0
Indian Sub	12.4	14.0	15.2	16.7	17.8
Total	169.8	169.9	173.6	174.6	174.8

¹Import Regions: **United States:** United States; **Canada:** Canada; **Mexico:** Mexico; **South America:** Argentina, Brazil, Chile; **Scandinavia:** Denmark, Finland, Norway, Sweden; **U.K./Ireland:** Ireland, United Kingdom; **Germany:** Austria, Germany; **Other NW Europe:** Belgium, France, Luxembourg, Netherlands; **Iberia:** Portugal, Spain; **Italy:** Italy; **Med/E Europe:** Algeria, Bulgaria, Croatia, Egypt, Greece, Israel, Malta, Morocco, Romania, Tunisia, Turkey; **Japan:** Japan; **East Asia:** North Korea, South Korea, Taiwan; **China/Hong Kong:** China, Hong Kong; **ASEAN:** Malaysia, Philippines, Thailand; **Indian Sub:** Bangladesh, India, Iran, Pakistan, Sri Lanka.

Notes: One "metric ton of coal equivalent" contains 27.78 million Btu. Totals may not equal sum of components due to independent rounding.

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Notes and Sources

- [81] Energy Information Administration, *The U.S. Coal Industry, 1970-1990: Two Decades of Change*, DOE/EIA-0559, (Washington, DC, November 1992).
- [82] Stanley C. Suboleski, et.al., *Central Appalachia: Coal Mine Productivity and Expansion*, Electric Power Research Institute, EPRI IE-7117, (September 1991).
- [83] U.S. Department of Labor, Bureau of Labor Statistics.

Renewable Fuels Module

The NEMS Renewable Fuels Module (RFM) consists of five distinct submodules that represent the major renewable energy technologies. Although it is described here, conventional hydroelectric is included in the Electricity Market Module (EMM) and is not part of the RFM. Similarly, ethanol modeling is included in the Petroleum Market Module (PMM). Some renewables, such as municipal solid waste (MSW) and other biomass materials, are fuels in the conventional sense of the word, while others, such as wind and solar radiation, are energy sources that do not require the production or consumption of a fuel. Renewable technologies cover the gamut of commercial market penetration, from hydroelectric power, which was an original source of electricity generation, to newer power systems using wind, solar, and geothermal energy. In some cases, they require technological innovation to become cost effective or have inherent characteristics, such as intermittence, which make their penetration into the electricity grid dependent upon new methods for integration within utility system plans or upon low-cost energy storage.

The submodules of the RFM interact only with modules outside of the RFM and not with other RFM submodules. These interactions occur through common elements of the model with the Electricity Market Module (EMM). Because of the high level of integration with the EMM, the final outputs (levels of consumption and market penetration over time) for renewable energy technologies are largely dependent upon the EMM.

The EMM represents learning effects for new technologies, which are implemented as a decrease in capital costs as a function of the level of market penetration. For *AEO99*, learning effects in the EMM occur in three phases, with capital costs declining most rapidly (usually 10 percent) for every doubling of capacity from the 1st through the 5th unit, less rapidly from the 5th through the 40th unit (usually 5 percent per doubling), and at a much slower rate thereafter per each doubling (2.5 percent). The RFM provides the 5th (nth) unit costs. In addition, unit size is provided to the EMM for renewable technologies, so that the level of market penetration can be determined.

For *AEO99*, two increasing costs are superimposed onto the capital costs of renewable energy technologies to represent two phenomena:

- Short-term cost adjustment factors, which increase technology capital costs as a result of rapid U.S. buildup in a single year and reflecting limitations on the infrastructure to accommodate unexpected demand growth. These short-term factors are invoked when demand for new capacity in any year exceeds 25 percent of the prior year's total U.S. capacity. For every 1 percent increase in total U.S. capacity over the previous year greater than 25 percent, capital costs rise 0.5 percent. These factors apply to biomass, geothermal, municipal solid waste, solar, and wind technologies.
- For biomass and wind only, increased costs resulting from a large cumulative increase in use of a given resource, reflecting any or all of three general factors: (1) resource degradation, (2) transmission network upgrades, and (3) market factors. Presumably best land resources are used first. Increasing resource use necessitates resort to less efficient land - less accessible, less productive, more difficult to use (e.g, land roughness, slope, terrain variability, or productivity, wind turbulence or wind variability). Second, as capacity increases, especially for intermittent technologies like wind power, existing local and long-distance transmission networks require upgrading, increasing overall costs. Third, market pressures from competing land uses increase costs as cumulative capacity increases, including for agricultural or other production alternatives, residential or recreational use, aesthetics, or from broader environmental preferences. As a result, for *AEO99*, each EMM region's biomass and wind resource estimates are parceled into five cost levels. For biomass, the increases that are applied to initial capital cost are 0, 15, 50, 75 and 100 percent for successive increments of the resource. For wind, the increases are 0, 20, 50, 100 and 200 percent respectively. The size of the resource increments vary by technology and region.

For an in-depth discussion of the learning functions, see the EMM section and the background section of the model summary for the Geothermal Electric Submodule. A detailed description of the RFM is provided in the EIA publication, *Model Documentation: Renewable Fuels Module of the National Energy Modeling System*, DOE/EIA-M069.

Key Assumptions

Nonelectric Renewable Energy Uses

In addition to projections for renewable energy used in electricity generation, the *AEO99* contains projections of nonelectric renewable energy uses for industrial and residential wood consumption, solar residential and commercial hot water heating, and residential and commercial geothermal (ground-source) heat pumps. Additional renewable energy applications, such as direct solar thermal industrial applications or direct lighting, off-grid electricity generation, and heat from geothermal resources used directly (e.g., district heating and greenhouses), are not included in the projections.

Electric Power Generation

The RFM specifically and EMM in general consider only grid-connected electricity generation. Off-grid sources, such as off-grid applications of photovoltaic, dish-Stirling solar, and wind generation, are not included in the energy projections for the *AEO99*. The renewable submodules that interact with the EMM are the grid-connected solar (thermal and photovoltaic), wind, geothermal, biomass, and MSW submodules. Most provide specific data that characterize that resource in a useful manner. In addition, a set of technology cost and performance values is provided directly to the EMM. These data are central to the build and dispatch decisions of the EMM with the exception of MSW. The values are presented in Table 37 of the EMM section.

Conventional Hydroelectricity

Background

The Hydroelectric Power Data File in the EMM represents reported plans for new conventional hydroelectric power capacity connected to the transmission grid reported on Form EIA-860, *Annual Electric Generator Report*, and Form EIA-867, *Annual Nonutility Power Producer Report*. It does not estimate additional unplanned capacity, nor estimate pumped storage hydroelectric capacity, which is considered a storage medium for coal and nuclear power and not a renewable energy use. Hydroelectric power is not competed against any other generating technologies for capacity expansion, and all the hydropower generated is assumed to be consumed. Data maintained for hydropower include the available capacity, capacity factors, and costs (capital, and fixed and variable operating and maintenance). The fossil-fuel heat rate equivalents for hydropower are provided to the report writer for energy consumption calculation purposes only.

Assumption

- Because of hydroelectric power's position in the merit order of generation, it is assumed that all available installed hydroelectric capacity will be used within the constraints of available water supply and general operating requirements (including environmental regulations).

Solar Electric Submodule

Background

The Solar Electric Submodule (SOLES) currently includes two solar technologies: 100 megawatt central receiver (power tower) solar thermal (ST) and 5 megawatt fixed-flat plate thin-film copper-indium-diselenide (CIS) photovoltaic (PV) technologies. PV is assumed available in all thirteen EMM regions, while ST is available only in the six primarily Western regions where direct normal solar insolation is sufficient. Capital costs for both technologies are determined by EIA using multiple sources, including technology characterizations by the Department of Energy's Office of Energy Efficiency and Renewable Energy and the Electric Power Research Institute (EPRI)⁸⁴. Most other cost and performance characteristics for ST are obtained or derived from the August 6, 1993, California Energy Commission memorandum, *Technology Characterization for ER 94*; and, for PV, from the Electric Power Research Institute, *Technical Assessment Guide (TAG) 1993*. In addition, capacity factors are obtained from information provided by the National Renewable Energy Laboratory (NREL); limits to learning are determined by EIA.

Assumptions

- Capacity factors for solar technologies are assumed to vary by time of day and season of year, such that nine separate capacity factors are provided for each modeled region, three for time of day, and for each of three broad seasonal groups (summer, winter, and spring/fall). The current solar thermal annual capacity factor for the region including California, for example, is assumed to average 40 percent; California's current PV capacity factor is assumed to average 24.6 percent.
- In order to incorporate assumed improvements in photovoltaic technologies, all PV capacity factors are assumed to improve linearly a total of 10 percent from 2005 through 2015; for example, California's annual average capacity factor for PV increases from 24.6 percent to almost 27.1 percent by 2015.
- Because solar technologies are more expensive than other utility grid-connected technologies, early penetration will be driven by broader economic decisions such as the desire to become familiar with a new technology or environmental considerations. Early year's penetration for such reasons is included as supplemental additions.
- Solar resources are well in excess of conceivable demand for new capacity; therefore, energy supplies are considered unlimited within regions (at specified daily, seasonal, and regional capacity factors). Accordingly, there is no reason to track solar resources in NEMS. In the seven regions where ST technology is not modeled, the level of direct, normal insolation (the kind needed for that technology) is insufficient to make that technology commercially viable through 2020.
- NEMS models the Energy Policy Act of 1992 (EPACT) 10-percent investment tax credit for solar electric power generation by tax-paying entities. Because it does not distinguish publicly-owned from privately-owned facilities, and EIA assumes that most new capacity will be privately-owned, the model does not include EPACT's 1.5 cent renewable energy production incentive for publicly owned new solar capacity.

Wind-Electric Power Submodule

Background

Because of limits to windy land area, wind is considered a finite resource, so the submodule calculates maximum available capacity by Electricity Market Module Supply Regions. The minimum economically viable wind speed is about 13 mph, and wind speeds are categorized into three wind classes according to annual average wind speed. The RFM keeps track of wind capacity (megawatts) within a region and moves to the next best wind class when one category is exhausted. Wind resource data on the amount and quality of wind per EMM region come from a Pacific Northwest Laboratory study and a subsequent update.⁸⁵ The technological performance, cost, and other wind data used in NEMS are derived by EIA from consultation with industry experts.⁸⁶

Maximum wind capacity, capacity factors, and incentives are provided to the EMM for capacity planning and dispatch decisions. These form the basis on which the EMM decides how much power generation capacity is available from wind energy. The fossil-fuel heat rate equivalents for wind are provided to the report writer for energy consumption calculation purposes only.

Assumptions

- Only grid-connected (utility and nonutility) generation is included. The forecasts do not include off-grid electric generation.
- In the wind submodule, wind supply is constrained by three modeling measures, addressing (1) average wind speed, (2) distance from existing transmission lines, and (3) resource degradation, transmission network upgrade costs, and market factors.

- First availability of wind power (among three wind classes) is based on the Pacific Northwest Laboratory Environmental and Moderate Land-Use Exclusions Scenario, in which some of the windy land area is not available for siting of wind turbines. The percent of total windy land unavailable under this scenario consists of all environmentally protected lands (such as parks and wilderness areas), all urban lands, all wetlands, 50 percent of forest lands, 30 percent of agricultural lands, and 10 percent of range and barren lands.
- Wind resources are mapped by distance from existing transmission capacity among three distance categories, accepting wind resources within (1) 0-5, (2) 5-10, and (3) 10-20 miles on either side of the transmission lines. Transmission cost factors are added to the resources further from the transmission lines.
- For AEO99, capital costs for wind technologies are also assumed to increase in response to (1) declining quality of land or wind resources other than average annual wind speed, such as terrain slope, terrain roughness, terrain accessibility, wind turbulence, wind variability, or other natural resource factors, (2) increasing cost of upgrading existing local and network distribution and transmission lines to accommodate growing quantities of intermittent wind power, and (3) market conditions, the increasing costs of alternative land uses, including for aesthetic or environmental reasons. Capital costs are left unchanged for some initial share, then increased 20, 50, 100 percent, and finally 200 percent, to represent the aggregation of these factors. Proportions in each category vary by EMM region.
- Depending on the EMM region, the cost of competing fuels and other factors, wind plants can be built to meet system capacity requirements or as “fuel savers” to displace generation from existing capacity. For wind to penetrate as a fuel saver, its total capital and fixed operations and maintenance costs minus applicable subsidies from the EPACT, must be less than the variable operating and fuel costs for existing (non-wind) capacity.
- Because of downwind turbulence and other aerodynamic effects, the model assumes an average spacing between turbine rows of 5 rotor diameters and a lateral spacing between turbines of 10 rotor diameters. This spacing requirement determines the amount of power that can be generated from windy land area and is factored into requests for generating capacity by the EMM.
- It is expected that wind turbine technology will improve in performance and that blade lengths will increase, as the cubic relationship between the area swept by the rotor and power generation provides a large incentive for increasing blade length. Capacity factors are assumed to increase to a national average of about 34 percent in the best wind class. However, as better wind resources are depleted, capacity factors go down.

Geothermal-Electric Power Submodule

Background

In developing geothermal capacity growth projections, the focus is on hydrothermal resources; extraction of energy from hot dry rock resources is not included. This is because the technology probably will at best be available after 2010, and reliable cost and resource data are not available. The Geothermal-Electric Power Submodule (GES) utilizes a process of resource accounting based on Sandia National Laboratory's 1991 geothermal resource assessment.⁸⁷ Site-specific costs, including those for drilling, steam collection, and electricity transmission to the grid, as well as site characteristics, are used in identifying available resources and capacities by EMM region. The cost and performance values are based on dual flash and binary cycle technologies. The costs from 51 sites are aggregated into a set of regional supply curves for each year. For each iteration of a model run, a value for avoided cost is obtained from the Electricity Capacity Planning Submodule to establish the levelized cost at which to truncate the curves, thereby excluding the higher cost resources. Capital cost learning on the generating units which emulates what is done in the EMM is incorporated in the GES⁸⁸. For AEO99, the capacity factor has been set at 87 percent, based on historical data.

Assumptions

- Existing and planned capacity data are accessed directly by the EMM. The data are obtained from Forms EIA-860 and EIA-867.
- An investment tax credit of 10 percent is assumed to be available in all forecast years based on the EPACT.
- Plant retirements are generally assumed to occur 30 years after startup. An exception is made for wells affected by a project to bring water to parts of The Geysers site which is expected to halt the enthalpy decline occurring there. Of these (six) wells, half are assumed to be retired after 35 years, the others in 40 years.
- Capital and operating costs vary by site and year; values shown in Table 37 are indicative of those used by EMM for geothermal build and dispatch decisions.

Biomass Electric Power Submodule

Background

Biomass consumed for electricity generation is modeled in two parts in NEMS. Capacity in the wood products and paper industries, the so-called captive capacity, is included in the industrial sector module as cogeneration. Generation by the electricity sector is represented in the EMM, with capital and operating costs and capacity factors as shown in Table 37, as well as fuel costs, being passed to the EMM where it competes with other sources. Fuel costs are provided in sets of regional supply schedules. Projections for ethanol are produced by the Petroleum Market Module (PMM), with the quantities of biomass consumed for ethanol decremented from, and prices obtained from, these same supply schedules.

Assumptions

- Existing and planned capacity data are accessed directly by the EMM. The data are obtained from Forms EIA-860 and EIA-867.
- The conversion technology represented, upon which the costs in Table 37 are based, is an advanced gasification-combined cycle plant that is similar to a coal-fired gasifier. Costs in the reference case were developed by EIA to be consistent with coal gasifier costs. Co-firing with coal is a distinct possibility, but it would not add capacity and is not included in the reference case but is allowed in the renewable portfolio standard case.
- In place of the previously used capacity constraints, short-term and long-term cost adjustment factors have been installed. These values are described in the RFM introduction.
- Fuel supply schedules are a composite of four fuel types; forestry materials, wood residues, agricultural residues and energy crops. The first three are combined into a single supply schedule for each region which does not change for the full forecast period. Energy crops data are presented in yearly schedules from 2010 to 2020 in combination with the other material types for each region. The forestry materials component is made up of logging residues, rough rotten salvable dead wood and excess small pole trees.⁸⁹ The wood residue component consists of primary mill residues, silvicultural trimmings and urban wood such as pallets, construction waste and demolition debris that are not otherwise used.⁹⁰ Agricultural residues are wheat straw and corn stover only, which make up the great majority of crop residues.⁹¹ Energy crops data is for hybrid poplar, willow and switchgrass grown on three land types. Costs range from zero to over five dollars per million Btu.⁹² The maximum amount of resources in each supply category is shown in Table 64.

Table 64. U.S Biomass Resources, by Region and Type, 2020
(Trillion Btu)

	Forest Resources	Mill Residue	Energy Crops	Agricultural Residue	Total
1. ECAR	780	132	850	211	1973
2. ERCOT	126	40	264	24	454
3. MAAC	268	39	103	26	435
4. MAIN	204	38	813	182	1236
5. MAPP	260	37	2304	295	2896
6. NPCC/NY	272	34	91	8	405
7. NPCC/NE	466	37	24	0	527
8. SERC/FL	124	38	10	3	174
9. SERC	1608	281	669	34	2592
10. SPP	795	127	1365	82	2369
11. NWP	1097	137	15	33	1282
12. W/RA	195	29	0	28	251
13. W/CNV	346	73	0	17	436
Total US	6541	1041	6508	940	15030

Municipal Solid Waste-Electric Power Submodule

Background

Municipal solid waste (MSW) combustion is treated within NEMS as a separate technology whose electricity production is determined exogenous to the EMM. The cost of producing electricity is passed to the EMM only as an input to the calculation that derives the average cost of producing electricity. Energy from MSW is a byproduct of waste disposal activity and, therefore, does not compete against other technologies in model decisions regarding new capacity additions.⁹³

Assumptions

- MSW is assumed to displace other energy forms lower in the merit order.
- Build decisions are based on a stepwise process involving waste disposal parameters.
 - Gross domestic product (GDP) and population are used as the drivers in an econometric equation that establishes the supply of MSW.
 - The values are extrapolated from historical Environmental Protection Agency (EPA) values for MSW and multiplied by 1.47 to reflect a broader definition of materials known to be combusted. The factor 1.47 is derived from information in the Biocycle State Survey.⁹⁴
 - The heat content of the MSW is set at 5,190 Btu per pound, and is assumed to remain at that level throughout the projection.
 - The percentage of waste combusted is assumed to remain constant at 11 percent of a growing waste stream. Using the Biocycle-based value for generation of the MSW waste stream, the percentage currently combusted is reduced from the EPA value of 17 percent⁹⁵ to 12 percent.
 - The total energy from MSW projected for the United States is limited to the portion currently used for electricity generation (about 92 percent) and is disaggregated into regions. This regional breakdown is performed by maintaining the projected 1996 distribution of these factors as represented in the EIA database of MSW plants. Steam from MSW is represented in industrial cogeneration.

- An estimate is made of energy produced from landfill gas. Data values are entered in a spreadsheet that considers existing and additional landfills and a profile of gas generation from the waste. It is assumed that the percent of the gas emitted that will be captured for energy conversion will increase from 13 percent in 1995 to 40 percent in 2020, based on an EPA estimate of a tripling of landfills that will capture the gas. The resulting generating capacity is added to the capacity for MSW combustion, is disaggregated by region and passed to the EMM.

Legislation

Energy Policy Act of 1992 (EPACT)

The RFM includes the investment tax and energy production credits called for in the EPACT for the appropriate energy types. EPACT provides a renewable electricity production credit of 1.5 cents per kilowatt-hour for electricity produced by wind, applied to plants that become operational between January 1, 1994, and December 31, 1999. The credit extends for 10 years after the date of initial operation. EPACT also includes provisions that allow an investment tax credit of 10 percent for solar and geothermal technologies that generate electric power. This credit is represented as a 10-percent reduction in the capital costs in the RFM.

Supplemental Capacity Additions

In addition to the reported generating capacity plans from the EIA-860 and EIA-867 and capacity projected through the use of the EMM/RFM, the *AEO99* also includes 2,897 megawatts additional generating capacity powered by renewable resources. Summarized in Table 65, some of the capacity represents mandated new capacity required by state laws, EIA estimates for expected new capacity under recent state-enacted renewable portfolio standards (RPS), estimates of winning bids in California's renewables funding program (Assembly Bill 1890), expected new capacity under known voluntary programs, such as "green marketing" efforts, and other reported plans; finally, EIA includes minimal "floor" estimates for solar photovoltaic and solar thermal capacity assumed to be built for reasons not represented in the RFM, such as for testing, investment, learning, or for use in niche markets. Table 65 details the planned additions.

Table 65. Post-1996 Supplemental Capacity Additions (Megawatts, Net Summer Capability)

Rationale	Geothermal	Biomass	Municipal Solid Waste	Solar Thermal	Solar Photovoltaic	Wind	Total
Mandates	0.0	125.9	0.0	0.0	0.0	667.0	792.9
Portfolio Standards	19.0	136.9	56.5	55.0	108.4	262.5	638.3
California AB1890 ¹	149.1	11.0	68.5	0.0	0.0	350.4	579.0
Voluntary Programs ²	0.0	0.0	9.4	0.0	10.0	47.3	66.7
Other Reported Plans	0.0	14.3	0.0	0.1	8.4	190.5	213.3
EIA Estimates (Floors)	0.0	0.0	0.0	107.0	500.0	0.0	607.0
Total	168.1	288.1	134.4	162.1	626.8	1,517.7	2,897.2

¹Partially supported by funding under California Assembly Bill 1890.

²Plans, such as "Green Marketing" efforts and other activities known to EIA.

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

International Learning

For *AEO99*, capital costs for all new electricity generating technologies decrease in response to foreign as well as domestic experience (Table 66). For estimate of international learning in the EMM (see Table 41). In the EMM, international learning effects are limited to the equivalent of one unit of a new technology per year; as a result, both wind and solar photovoltaic effects are limited to 50 megawatts and 5 megawatts per year, respectively, despite much greater actual additions observed and expected over the forecast period.

Climate Change Action Plan

Action Item 26, “*Form Renewable Energy Market Mobilization Collaborative with Technology Demonstration*,” of the Climate Change Action Plan (CCAP),⁹⁶ is designed to spur field validation of selected renewable energy technologies by supporting specified electric utility tests. The demonstrations, along with information dissemination, intend to address market barriers by increasing utility and investor confidence in the technologies. Technologies included in Action Item 26 include assistance to “ice breaker” geothermal plants, site testing advanced wind turbines, and assistance and collaboration in launching test biomass-fueled and photovoltaic electricity generating technologies.

The electricity generating capacity effects on *AEO99* of Action Item 26 are incorporated in EIA’s projections for renewable technologies. The supplemental capacity additions include additions that will be cost-shared by DOE and industry. While the stated goal of this action item is “increased utility and investor experience and confidence” in renewable technologies, in general, no additional cost declines beyond those discussed above are assumed.

Table 66. Current and Planned U.S. Generating Capacity, New Technologies, as of August 21, 1998

New Technology	Plant Name	State	Program ¹	Net Summer Capability (Megawatts)	Year On Line
Current Fossil, Nuclear, and Renewable Energy Capacity (1996, 1997)					
Advanced Clean Coal (Gasification)	Polk	Florida		251	1996
	El Dorado	Kansas		38	1996
Advanced Combined Cycle	-	-	-	0	-
Advanced Combustion Turbine	Gilbert Station	New Jersey	-	157	1996
	Hawthorn	Missouri	-	171	1997
Nuclear				0	-
Geothermal	Salton Sea	California	-	32.3	1996
	Hawaii Electric	Hawaii	-	28.5	1996
Biomass Integrated Combined Cycle (Gasification)	-	-	-	0	-
Landfill Gas	SMUD Digester Gas	California	Mandate	16.2	1996
	Hawaii Electric	Hawaii		43.7	1996
	Mid American	Iowa		6.2	1996
	TU Electric	Texas		1.7	1996
	Wisc. Public Service	Wisconsin		1.5	1997
Solar Thermal	-	-	-	0	-
Solar Photovoltaic	New York Power Auth.	New York	-	1	1996
	Caroll Springs Mtn.	Arizona	-	0.2	1997
	Star Test Facility	Arizona	-	0.2	1997
Wind	Hawaii Electric	Hawaii	-	7	1997
	Green Mountain Power	Vermont		6.1	1997
Planned Fossil, Nuclear, and Renewable Energy Capacity (1998+)					
Advanced Clean Coal (Gasification)	Pinon Pine	Nevada	-	95	1998
	Star Delaware City	Delaware	-	228	1999
	Exxon Baytown	Texas	-	228	2000
Advanced Combined Cycle	Bridgeport Harbor	Connecticut	-	494	1999
	St. Francis	Missouri	-	238	1999
	Island Cogeneration	California	-	228	1999
	Agawam	-	-	257	1999
Advanced Combustion Turbine	-	-	-	0	-
Nuclear	-	-	-	-	-
Geothermal	Imperial Valley	California	AB1890	9.5	2000
	Salton Sea	California	AB1890	46.6	2000
	Four Mile Hill	California	AB1890	47.4	2001
	Telephone Flats	California	AB1890	45.6	2001
	Nevada RPS ¹	Nevada	RPS	19	2000-2001

Table 66. Current and Planed U.S. Generating Capacity, New Technologies, as of August 21, 1998 (Cont.)

New Technology	Plant Name	State	Program	Net Summer Capacity (Megawatts)	Year On Line
Biomass Integrated Combined Cycle (Gasification)	IES Utilities	Iowa	Mandate	7.1	1998
	Green Mtn. Power	Vermont	AB1890	14.3	1999
	AB1890	California	-	11	1999-2001
	NSP Alfalfa Producers	Minnesota	Mandate	71.3	2001
	NSP Biomass II-a	Minnesota	Mandate	23.8	2002
	NSP Biomass II-b	Minnesota	Mandate	23.8	2002
	Massachusetts RPS	Massachusetts	RPS	55.1	2002-2010
	Connecticut RPS	Connecticut	RPS	81.8	2000-2009
Landfill Gas	SMUD Landfill Gas	California	-	7.9	1999
	AB1890	California	AB1890	68.5	1998-2001
	Connecticut RPS	California	RPS	56.6	2000-2009
Solar Thermal	APS Test Facilities	Arizona	-	0.06	1998
	Arizona RPS	Arizona	RPS	55	2000-2003
Solar Photovoltaic	Niagara Mohawk	New York	-	0.12	1998
	APS Flagstaff	Arizona	-	0.08	1998
	APS Tempe	Arizona	-	0.08	1998
	APE Scottsdale	Arizona	-	0.05	1998
	LA Department Wtr&Pwr	California	-	0.25	1999
	APS Glendale	Arizona	RPS	0.1	1999
	SMUD-PV	California	-	10	1998-2002
	Arizona RPS	Arizona	-	25	1999-2001
	Team Up Estimates	U.S.	-	7.25	2000
	Massachusetts RPS	Massachusetts	RPS	40.5	2001-2010
	Nevada RPS	Nevada	RPS	39	2000-2011
	Connecticut RPS	Connecticut	RPS	3.85	2000-2009
	Ponnequin I, II	Colorado	-	10.4	1998
	Medicine Bow	Colorado	-	1.2	1998
	NSP Phase II	Minnesota	Mandate	107.3	1998
	Foote Creek	Wyoming	-	41.4	1998
	Vansycle Ridge	Oregon	-	24.9	1998
NE Wisconsin	Wisconsin	Mandate	1.2	1998	
Cedar Falls	Iowa	-	2.3	1998	
Springview	Nebraska	-	1.5	1998	

Table 66. Current and Planned U.S. Generating Capacity, New Technologies, as of August 21, 1998 (Cont.)

New Technology	Plant Name	State	Program	Net Summer Capacity (Megawatts)	Year On Line
	Cooperative Power	Minnesota	-	2	1998
	Madison Gas & Electric	Wisconsin	-	1.2	1998
	Akron	Iowa	-	0.6	1998
	Waverly	Iowa	Mandate	1.5	1999
	NSP Phase IIa, III	Minnesota	Mandate	136	1999
	Mid American	Iowa	Mandate	112.5	1999
	Pub. Svc. Colorado	Colorado	-	10	1999
	IES Utilities	Iowa	Mandate	94.5	1999
	NIMO Lowville I	New York	Mandate	1	1999
	Big Springs	Texas	-	35	1999
Wind	Texas Wind Power	Texas	-	4.5	1999
	C&SW	Texas	-	75	1999
	NIMO AWS Scientific I	New York	-	1	1999
	Madison Gas & Electric	Wisconsin	-	11.2	1999
	Interstate Power	Iowa	Mandate	42	1999
	Forest City Com. Sch.	Iowa	-	0.6	1999
	NIMO Lowville II	New York	Mandate	2	2000
	Wisconsin Public Svc.	Wisconsin	Mandate	9	2000
	NIMO AWS Scientific II	New York	-	2	2001
	NSP Phase IIIa	Minnesota	Mandate	160	1999-2002
	AB1890	California	AB1890	350.4	1999-2001
	Massachusetts RPS	Massachusetts	RPS	200	2001-2010
	Nevada RPS	Nevada	RPS	3	2010
	Connecticut RPS	Connecticut	RPS	59.5	2000-2009

¹Includes measures of EIA-developed estimates for mandates, state Renewable Portfolio Standards (RPS), or California's renewables funding program (AB1890).

Source: Energy Information Administration, Office of Integrated Analysis and Forecasting.

Notes and Sources

- [84] Electric Power Research Institute and U.S. Department of Energy, Office of Utility Technologies *Renewable Energy Technology Characterizations* (EPRI TR-109496, December 1997) or www.eren.doe.gov/utilities/techchar.html.
- [85] D.L. Elliott, L.L. Wendell, and G.L. Gower, *An Assessment of the Available Windy Land Area and Wind Energy Potential in the Contiguous United States*, Richland, WA: Pacific Northwest Laboratory, (August 1991); Pacific Northwest Laboratory, *An Assessment of the Available Windy Land Area and Wind Energy Potential in the Contiguous United States*, (PNL-7789), prepared for the U.S. Department of Energy under Contract DE-AC06-76RLO 1830, (August 1991), and Schwartz, N.N.; Elliot, O.L.; and Gower, GL: *Gridded State Maps of Wind Electric Potential Proceedings Wind Power 1992*, (Seattle, WA, October 19-23, 1992).
- [86] Energy Information Administration analysts discussed input values with the Electric Power Research Institute, U.S. Dept. of Energy's Office of Energy Efficiency and Renewable Energy, Lawrence Berkeley National Laboratory, RLA Consulting, and the Zond Corporation.
- [87] Sandia National Laboratories, *Supply of Geothermal Power from Hydrothermal Sources: A Study of the Cost of Power in 20 and 40 Years*, (Albuquerque, NM, June 1991).
- [88] DynCorp-Meridian Inc., *Model Documentation, Geothermal Electric Submodule of the Renewable Fuels Module of the National Energy Modeling System*, (Alexandria VA, December 1994) and DynCorp Environmental, Energy and National Security Programs Inc., *Model Documentation, Renewable Fuels Module; Modifications to the Geothermal Electricity Supply Submodule*, prepared for the Energy Information Administration, (Alexandria, VA, September 1995).
- [89] United States Department of Agriculture, U.S. Forest Service, *Forest Resources of the United States, 1992*, General Technical Report RM-234, (Fort Collins CO, June 1994)
- [90] Antares Group Inc., *Biomass Residue Supply Curves for the U.S.*, prepared for the National Renewable Energy Laboratory, November 1998.
- [91] Walsh, M.E., et.al., Oak Ridge National Laboratory, *Evolution of the Fuel Ethanol Industry: Feedstock Availability and Price* (Oak Ridge, TN, April 21, 1998).
- [92] Graham, R.L., et.al., Oak Ridge National Laboratory, *The Oak Ridge Energy Crop County Level Database*, (Oak Ridge TN, December, 1996).
- [93] For more details on the methodology, see the *Model Documentation on Renewable Fuels Module of the National Energy Modeling System*, DOE/EIA-M069(95), (Washington,D.C., July 1995).
- [94] Biocycle, *The state of Garbage in America*, Annual Series (April 1988 - April 1997).
- [95] 1996 estimate from the U.S. Environmental Protection Agency (EPA), *Characterization of Municipal Solid Waste in the United States: 1997 Update*, Report#: EPA530-R-98-007(Prairie Village, KS, May 1998) (Table 34).

[96] U.S. Department of Energy, *The Climate Change Action Plan: Technical Supplement*, DOE/PO-0011, (Washington, DC, March 1994) p. 57.

List of Acronyms

AEO	<i>Annual Energy Outlook</i>
AEO98	<i>Annual Energy Outlook 1998</i>
AEO99	<i>Annual Energy Outlook 1999</i>
AFV	AFV Alternative-Fuel Vehicle
AGA	American Gas Association
ANGTS	Alaskan Natural Gas Transportation System
BEA	Bureau of Economic Analysis
BSC	Boiler/Steam/Cogeneration
BTU	British Thermal Unit
CAA90	Clean Air Act Amendments of 1990
CBES	Commercial Buildings Energy Consumption Surveys
CCAP	Climate Change Action Plan
CDD	Cooling Degree-Days
CNG	Compressed Natural Gas
DOE	U.S. Department of Energy
DRB	Demonstrated Reserve Base
DRI	Data Resources, Inc./McGraw Hill
EER	Energy Efficiency Ratio
EIA	Energy Information Administration
EIS	Environmental Impact Statement
EPA	U.S. Environmental Protection Agency
EPACT	Energy Policy Act of 1992
EWG	Exempt Wholesale Generator
FAA	Federal Aviation Administration
FERC	Federal Energy Regulatory Commission
FGD	Flue Gas Desulfurization
FSU	Former Soviet Union
GDP	Gross domestic product
GRI	Gas Research Institute
HSPF	Heating Season Performance Factor
HDD	Heating Degree-Days
IEA	International Energy Agency
ICE	Internal Combustion Engine
LEVP	Low Emissions Vehicle Program
LNG	Liquefied Natural Gas
LPG	Liquefied Petroleum Gas
MSW	Municipal Solid Waste
NAECA	National Appliance Energy Conservation Act of 1987
NEMS	National Energy Modeling System
NERC	National Electric Reliability Council
NOAA	National Oceanic and Atmospheric Administration
NRC	Natural Resources Canada
O&M	Operation and Maintenance
OPEC	Organization of Petroleum Exporting Countries

List of Acronyms

OTT	Office of Transportation Technologies
PADD	Petroleum Administration for Defense Districts
PURPA	Public Utility Regulatory Policies Act of 1978
PUHCA	Public Utility Holding Company Act of 1935
PV	Photovoltaic
R&D	Research & Development
RFG	Reformulated gasoline
RECS	Residential Energy Consumption Survey
RPS	Renewable Portfolio Standards
SEC	Securities and Exchange Commission
SDI	State Demand Intensity
SEDS	State Energy Data System
SEER	Seasonal Energy Efficiency Ratio
SIC	Standard Industrial Classification
SNG	Synthetic Natural Gas
TIUS	Truck Inventory and Use Survey
TVA	Tennessee Valley Authority
UEC	Unit Energy Consumption
VMT	Vehicle Miles Traveled
ZEV	Zero Emission Vehicles
WEFA	The WEFA Group (formerly the Wharton Econometric Forecasting Associates)