



Digital Audio Continues to Evolve

The Latest Digital Radio Audio Test Results Specific to Firefighters

By D.J. Atkinson


In June 2008, the Public Safety Communications Research (PSCR) program published a report highlighting the challenges of achieving intelligible radio communications in the presence of high levels of background noise encountered on the fire ground. Since then, radio manufacturers and public safety cooperated to improve the intelligibility of fire ground communications. Under the sponsorship of the Department of Homeland Security (DHS) Office for Interoperability and Compatibility (OIC), the PSCR completed testing in March of some of the specific improvements applied to radio communications in the presence of high levels of background noise.

The following provides a brief overview of the recent test. Results from the test are then highlighted, demonstrating an overall improvement in intelligibility. The improvement observed in this test comes from changes to best practices and technical improvements to the voice coder (vocoder) used in Project 25 (P25) digital radios. In addition, this article examines potential intelligibility impacts of transitioning to P25 Phase 2, where the bit rate available to the vocoder is cut in half. Finally,

this article notes conditions where intelligibility improvement is still desirable and suggests some ideas for future work.

Overview of the Test

The communications intelligibility test resulted from about 18 months of test plan development in the Audio Performance Working Group (APWG) of the P25 standards committees. The working group was created specifically to investigate improving the overall audio performance of P25 radio

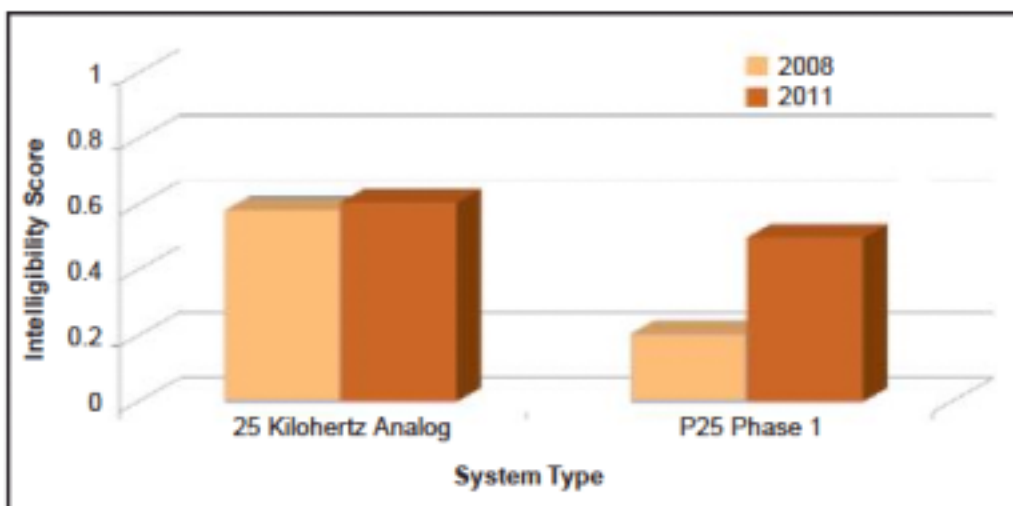

Comparison of vocoder improvement for SCBA mask with PASS alarm noise

systems. The test plan was developed with input from practitioners and radio manufacturers participating in the APWG and was executed by the PSCR in Boulder, Colo.

The test had two primary objectives. The first was to evaluate the impact of best practice changes recommended by the International Association of Fire Chiefs (IAFC). The second was to evaluate the impact of technical changes to the vocoder implemented in P25 radio systems.

The test included 14 environments and four communications systems. The parameters that varied across the environments included no mask or one of two self-contained breathing apparatus (SCBA) masks, no background noise or one of three different background noises, and either a clean or impaired radio channel. The systems included in the test were 12.5-kilohertz analog, 25-kilohertz analog, P25 and P25 Phase 2.

About 60 public-safety practitioners from across the continental United States traveled to Boulder to participate. Participation consisted of a brief hearing screening and then sitting in a sound booth trying to understand the intelligibility test words. Participants listened to 1,500 to 2,000 words during a two- to four-hour period. Results were recorded by a computer program and analyzed after all participants had finished their testing.

Best Practices Improvements

In some of the environments tested in 2008, there was low intelligibility for all the systems tested. In response to this, the IAFC modified its best practices for radio use. Specifically, the IAFC recommended that a radio microphone be held tight against the voice port of an SCBA mask.

From a statistical standpoint, the results for the environment with an SCBA mask and no background noise are equivalent for the two analog systems. However, the P25 Phase 1 system benefited from a noticeable improvement in intelligibility based on the changed best practice. This

shows that the best practice can help in some situations and doesn't appear to cause any degradation.

Technical Improvements

In 2008, the biggest difference between analog and P25 communications system intelligibility was observed in the environment that used a mask with a personal alert safety system (PASS) alarm as back-

ground noise. To increase the intelligibility of the P25 system, the vocoder developer designed and implemented enhancements to the vocoder. One enhancement was directed at improving intelligibility in the presence of PASS noise.

As expected, there was no significant change in the intelligibility of the analog system. However, there was marked improvement in P25

THE SUBWAY AT CENTRAL STATION TRANSPORTS MILLIONS OF PEOPLE EVERY DAY.

THE MAINLINE HAS DERAILED, THE NUMBER OF TRAPPED AND INJURED ARE UNKNOWN.

FIRST RESPONDERS ARE ON THE SCENE.

BUT THEY CAN'T COMMUNICATE WITH DISPATCH!



WHY? The communication load has caused your Signal Booster to fail!

Bird® Digital Booster 613-8-Series

Bird's 700/800 MHz Digital Signal Booster can be configured so the system can amplify first responders' specific signals to prevent situations like this, making communication available during all times of crisis. The digital signal booster's built in test signals can be used to check the coverage of the system under a full communications load before a tragedy like this occurs. Additionally, the standard NEMA4 style enclosure with the optional NFPA/IFC compliant features ensures the booster's operation under extreme environmental conditions including loss of power.



Bird® Technologies Group's provides American built leadership in signal boosters – 25 years and counting.



866.695.4569 • www.birdrf.com/db/mcp

Do PSCR's Testing Methods Relate to the Real World?

Two frequently asked questions relate to what basis Public Safety Communications Research (PSCR) uses for its intelligibility testing methods and how well those testing methods relate to the real world.

The starting point for developing a repeatable test methodology is finding applicable standards.

The core of the testing method comes

from NFPA 1981-2007, "Open-Circuit Self Contained Breathing Apparatus (SCBA) for Emergency Services," 2007 edition. This standard specifies the means for conducting intelligibility tests on SCBA for listeners in the same room as the talker, as well as setting performance objectives for that environment. It includes the listening environment, as well as specifying a modified rhyme test

(MRT) as defined in ANSI S3.2, "American National Standard Method for Measuring the Intelligibility of Speech Over Communication Systems," 1989.

While these two standards provide the basis for the testing methods used by PSCR, they don't quite cover the exact scenarios under evaluation. PSCR had to extend these test methods to cover the addition of radio systems and high levels of public-safety-specific background noise to the test. The challenge is to do so in a repeatable manner that doesn't jeopardize the hearing of a talker who might be placed in such a high-noise environment for the 30 – 40 hours it would take to record the speech samples.

This is done through the use of a head and torso simulator (ITU-T Recommendation P.58, "Head and Torso Simulator (HATS) for Telephony," August 1996) containing an artificial mouth (ITU-T Recommendation P.51, "Artificial Mouth," August 1996). Use of the HATS addresses both repeatability and safety concerns in PSCR experiments. For repeatability, the HATS serves as a platform where pre-recorded speech material can be appropriately equalized and volume leveled so that all samples are consistent — a feat not practical for a live talker. Also, the HATS can sit in a room for days on end in loud environments without the noise causing hearing loss.

For validation, it becomes important to know if there are any measurable differences between using a live talker and using the HATS for the speech source. To perform this validation, a small experiment was conducted using the HATS and a talker for the same two environments: wearing an SCBA mask without background noise and wearing an SCBA mask with PASS noise present. All speech samples were spoken by the same talker to provide the most consistency across the test conditions. When statistically analyzed, there were no significant differences between the conditions using the HATS and those using a live talker. One can therefore infer that use of the HATS is a reasonable and safe approximation of putting a real talker into a high-noise environment, and should yield equivalent results.

— D.J. Atkinson

TRANSMITTER COMBINERS
UHF 700/800MHz

CAVITY FERRITE COMBINER

CERAMIC COMBINER

UEN / TEIRA / P25 / UAS / NEXEDGE / MOTTRBO

 **fiplex**
COMMUNICATIONS INC.

Fiplex USA
Ph: +1 305 884 8991
Fax: +1 305 884 4041
e-mail: info@fiplex.com
www.fiplex.com

PROUDLY
MADE IN USA

Phase 1 system intelligibility. Even so, the intelligibility of the P25 system in this environment is less than the analog system, meaning that there is still room for improvement.

P25 Phase 2 Expectations

The P25 committees are developing Phase 2 standards. P25 Phase 2 supports the move to 6.25-kilohertz-equivalent channels from the 12.5-kilohertz channels used for Phase 1. As the channel bandwidth is narrowed, the bit rate available to transport speech is also reduced. The Phase 2 vocoder must operate at half of the bit rate of the Phase 1 vocoder. Because the Phase 2 vocoder hadn't been evaluated in high-background-noise environments, this test included the Phase 2 vocoder.

In each of the 14 environments tested, the intelligibility of the Phase 1 and 2 vocoders were observed to be equivalent. This equivalence is because of selecting a vocoder for Phase 2 that is technologically similar to that used in Phase 1. A further benefit of this selection is that most improvements made to the Phase 1 vocoder (such as those made to help with the PASS alarm) are directly applicable to the Phase 2 vocoder.

General Observations

The effort practitioners and manufacturers are putting into improving intelligibility is making a difference. This comes from looking at all aspects of the system and making small improvements to multiple components, resulting in an overall large improvement. While this article only presents a couple of areas of improvement, manufacturers and users are working together to find others.

One remaining area for investigating intelligibility improvement is the application of active noise cancellation to microphones. Multiple manufacturers are now producing radios that include active noise cancellation, and anecdotal reports show noise cancellation provides notable improvements in intelligibility in high-background-noise environments.

It may be useful to perform an experiment to quantify the benefits of noise-canceling microphones.

Also under investigation are alternative microphone accessories for radios. These include throat microphones, bone conduction microphones and microphones placed inside an SCBA mask. These alternative microphones can improve intelligibility, but the challenge comes in making them practical and affordable for the fire service.

Overall, excellent progress has

been made to improve intelligibility in high-background-noise environments. With continued effort, there are promises of even more improvements. This will result in better communications for firefighters and improve their safety. ■

D.J. Atkinson is a lead electronics engineer with the Public Safety Communications Research (PSCR) program in Boulder, Colo., working on public-safety communications and information sharing. Email comments to dj@its.bldrdoc.gov.

3M™ Peltor™ ORA TAC with Ambient Listening



Sounds Clear Fits in the Ear



Listen, Communicate and Protect

Hearing protection with ambient listening is now more comfortable. The New 3M™ Peltor™ ORA TAC delivers many wearer-friendly advantages including:

Omni-directional reception • No ear cups reduce weight & heat • Fits with most respirators, eye wear, face masks, helmets and hard hats • Quick radio connect/disconnect • Moisture-resistant PTT • Automatic protection against impact noise

ORA TAC is designed for high noise/high heat work applications such as: Aviation Ground Mechanics • Oil & Gas • Mining • Fire & Rescue • Military

For more information visit 3M.com/ORATAC



Leading the Advancement of Hearing Conservation™

