

# COUPP, the “Chicagoland Observatory for Underground Particle Physics”

## From T-945 to P-961

### University of Chicago

Juan Collar (PI, spokesperson), Keith Crum, Smriti Mishra,, Brian Odom, Nathan Riley, Matthew Szydagis

### Indiana University South Bend

Ed Behnke, Ilan Levine (PI), Nate Vander Werf

### Fermilab

Peter Cooper, Mike Crisler, Martin Hu, Erik Ramberg, Andrew Sonnenschein, Bob Tschirhart

### Additional materials:

General approach, deactivation of surface nucleation sites: [astro-ph/0503398](http://astro-ph/0503398)

DMSAG presentation (denser version of these transparencies): <http://cfcp.uchicago.edu/~collar/dmsag9.pdf>

DMSAG Q&A (background projections for the next phase of the project): <http://cfcp.uchicago.edu/~collar/COUPPbckgs.pdf>



NSF proposal (complementary to P-961 proposal): <http://cfcp.uchicago.edu/~collar/nsfcoupp250.pdf>



# COUPP approach to WIMP detection:

- Detection of single bubbles induced by high- $dE/dx$  nuclear recoils in heavy liquid bubble chambers
- $>10^{10}$  rejection factor for MIPs. *INTRINSIC* (no data cuts)
- Scalability: large masses easily monitored (built-in “amplification”). Choice of three triggers: pressure, acoustic, motion (video))
- Revisit an old detector technology with improvements leading to extended (unlimited?) stability (*ultra-clean* BC)
- Excellent sensitivity to both SD and SI couplings ( $CF_3I$ )
- Target fluid can be replaced (e.g.,  $C_3F_8$ ,  $C_4F_{10}$ ,  $CF_3Br$ ). Useful for separation between n- and WIMP-recoils and pinpointing WIMP in SUSY parameter space.
- High spatial granularity = additional n rejection mechanism
- Low cost ( $<350$  USD/kg target mass *all inclusive*), room temperature operation, safe chemistry (fire-extinguishing industrial refrigerants), moderate pressures ( $<200$  psig)
- Single concentration: reducing  $\alpha$ -emitters in fluids to levels already achieved elsewhere ( $\sim 10^{-17}$ ) will lead to complete probing of SUSY models

Dark matter particle from galactic halo  
velocity  $\sim 300$  km/s  
mass 10–10000 GeV (SUSY?)

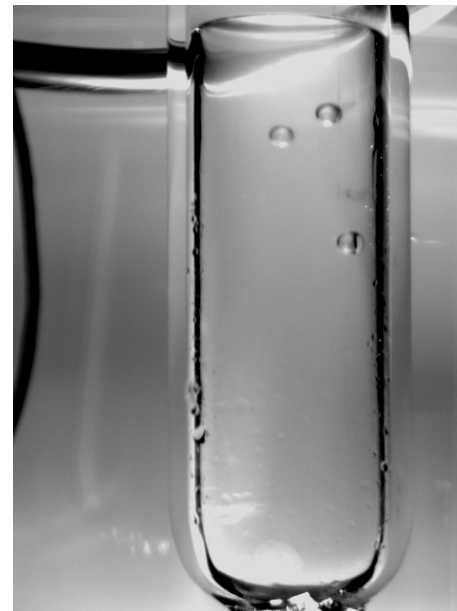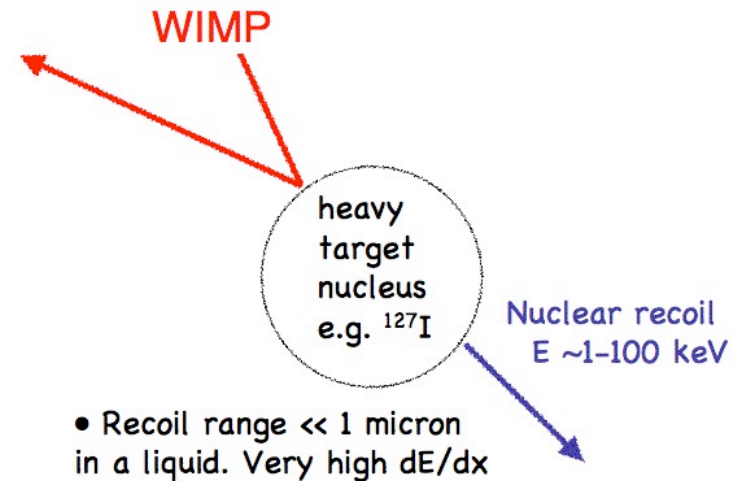

Signal is single bubble corresponding to point-like WIMP recoil (not tracks as in conventional BC)

$\leftarrow$  neutron-induced event (multiple scattering)



# COUPP approach to WIMP detection:

- Detection of single bubbles induced by high- $dE/dx$  nuclear recoils in heavy liquid bubble chambers
- $>10^{10}$  rejection factor for MIPs. *INTRINSIC* (no data cuts)
- Scalability: large masses easily monitored (built-in "amplification"). Choice of three triggers: pressure, acoustic, motion (video)
- Revisit an old detector technology with improvements leading to extended (unlimited?) stability (*ultra-clean BC*)
- Excellent sensitivity to both SD and SI couplings ( $CF_3I$ )
- Target fluid can be replaced (e.g.,  $C_3F_8$ ,  $C_4F_{10}$ ,  $CF_3Br$ ). Useful for separation between n- and WIMP-recoils and pinpointing WIMP in SUSY parameter space.
- High spatial granularity = additional n rejection mechanism
- Low cost (<350 USD/kg target mass *all inclusive*), room temperature operation, safe chemistry (fire-extinguishing industrial refrigerants), moderate pressures (<200 psig)
- Single concentration: reducing  $\alpha$ -emitters in fluids to levels already achieved elsewhere ( $\sim 10^{-17}$ ) will lead to complete probing of SUSY models


Seitz model of bubble nucleation (classical BC theory):

$$E > E_e = 4\pi r_e^2 \left( \gamma - T \frac{\partial \gamma}{\partial T} \right) + \frac{4}{3} \pi r_e^3 \rho_v \frac{h_{fg}}{M} + \frac{4}{3} \pi r_e^3 P, \quad r_e = 2\gamma / \Delta P$$

$$dE/dx > E_e / (ar_e)$$

Threshold in deposited energy

Threshold also in stopping power, allows for efficient *INTRINSIC* MIP background rejection

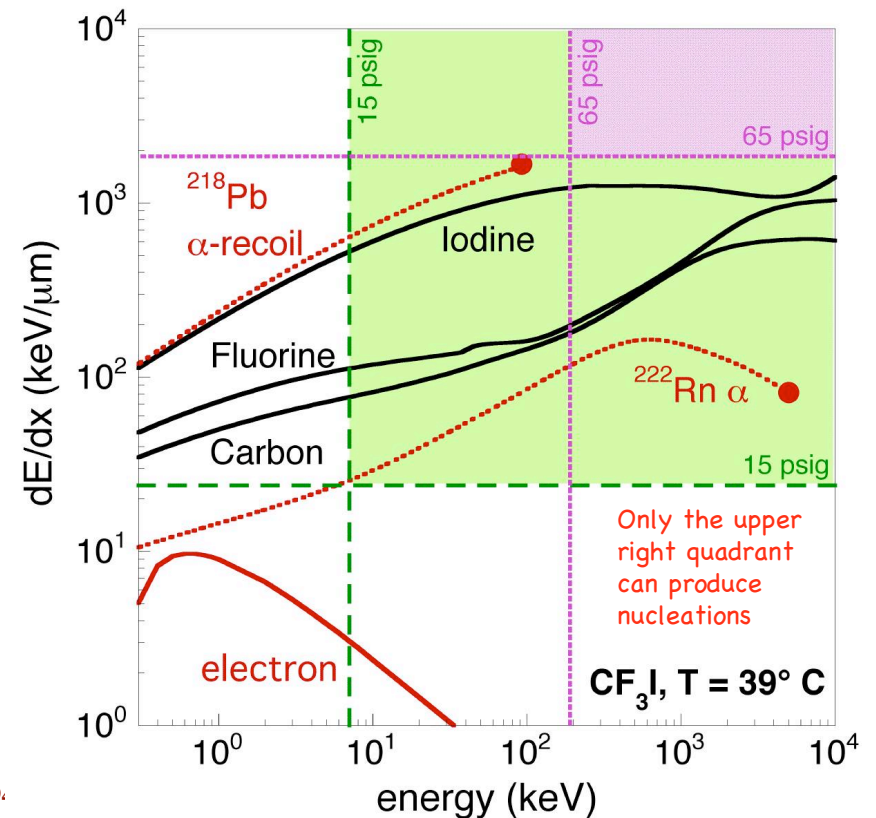


## COUPP approach to WIMP detection:

---

- Detection of single bubbles induced by high-dE/dx nuclear recoils in heavy liquid bubble chambers
- $>10^{10}$  rejection factor for MIPs. *INTRINSIC* (no data cuts)
- Scalability: large masses easily monitored (built-in “amplification”). Choice of three triggers: pressure, acoustic, motion (video)
- Revisit an old detector technology with improvements leading to extended (unlimited?) stability (*ultra-clean* BC)
- Excellent sensitivity to both SD and SI couplings ( $\text{CF}_3\text{I}$ )
- Target fluid can be replaced (e.g.,  $\text{C}_3\text{F}_8$ ,  $\text{C}_4\text{F}_{10}$ ,  $\text{CF}_3\text{Br}$ ). Useful for separation between n- and WIMP-recoils and pinpointing WIMP in SUSY parameter space.
- High spatial granularity = additional n rejection mechanism
- Low cost ( $<350$  USD/kg target mass *all inclusive*), room temperature operation, safe chemistry (fire-extinguishing industrial refrigerants), moderate pressures ( $<200$  psig)
- Single concentration: reducing  $\alpha$ -emitters in fluids to levels already achieved elsewhere ( $\sim 10^{-17}$ ) will lead to complete probing of SUSY models

neutron-induced nucleation in 20 c.c.  $\text{CF}_3\text{Br}$  (0.1 s real-time span)  
Movie available from <http://cfcp.uchicago.edu/~collar/bubble.mov>

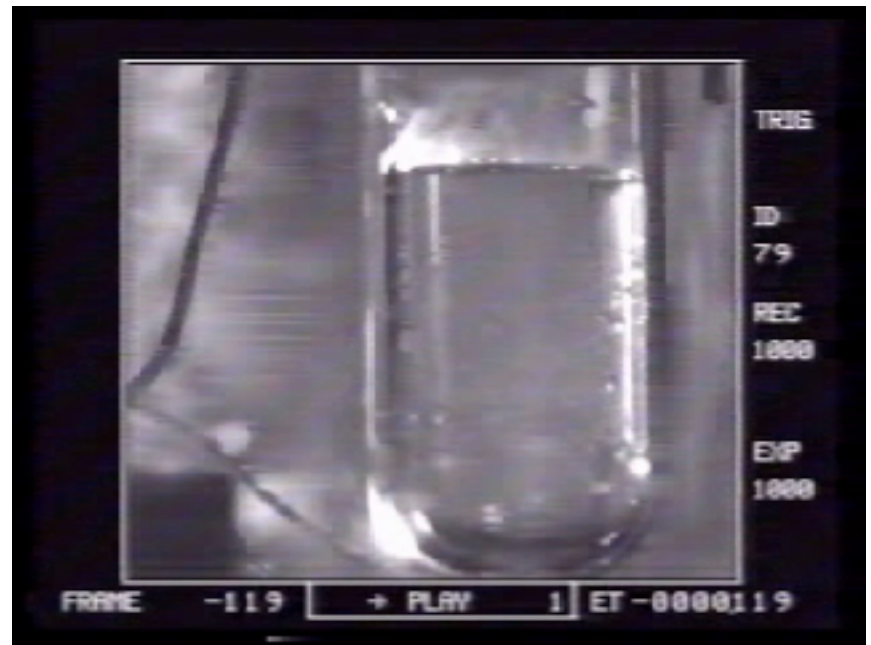


# COUPP approach to WIMP detection:


- Detection of single bubbles induced by high-dE/dx nuclear recoils in heavy liquid bubble chambers
- $>10^{10}$  rejection factor for MIPs. *INTRINSIC* (no data cuts)
- Scalability: large masses easily monitored (built-in "amplification"). Choice of three triggers: pressure, acoustic, motion (video)
- Revisit an old detector technology with improvements leading to extended (unlimited?) stability (*ultra-clean BC*)
- Excellent sensitivity to both SD and SI couplings ( $\text{CF}_3\text{I}$ )
- Target fluid can be replaced (e.g.,  $\text{C}_3\text{F}_8$ ,  $\text{C}_4\text{F}_{10}$ ,  $\text{CF}_3\text{Br}$ ). Useful for separation between n- and WIMP-recoils and pinpointing WIMP in SUSY parameter space.
- High spatial granularity = additional n rejection mechanism
- Low cost ( $<350$  USD/kg target mass *all inclusive*), room temperature operation, safe chemistry (fire-extinguishing industrial refrigerants), moderate pressures ( $<200$  psig)
- Single concentration: reducing  $\alpha$ -emitters in fluids to levels already achieved elsewhere ( $\sim 10^{-17}$ ) will lead to complete probing of SUSY models

FNAL PAC

Spontaneous bulk nucleation rate  
 $\text{Log}_n(-2.5\text{E}5) / \text{kg day}!!$  ( $T_c = 122^\circ\text{C}$ , run at  $\sim 40^\circ\text{C}$ )

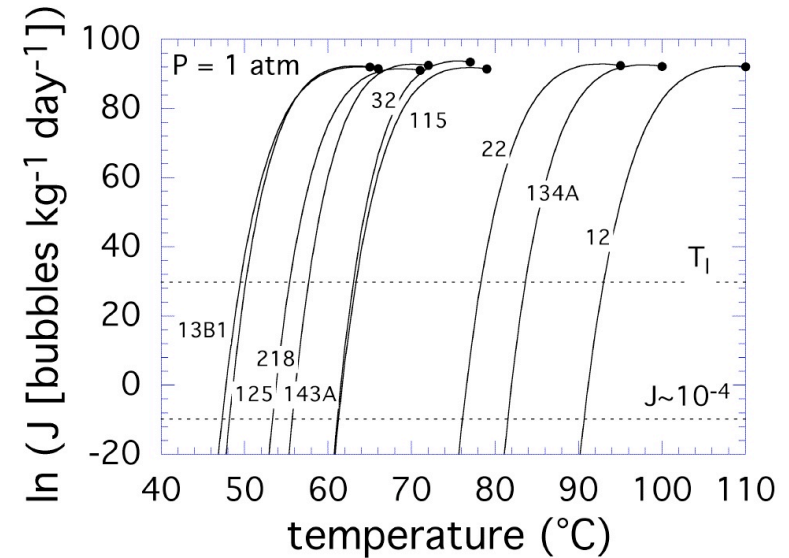

Surface nucleations are produced by gas-filled voids: learned how to control them (cleaning, outgassing, buffer liquid, etc.: [astro-ph/0503398](#))

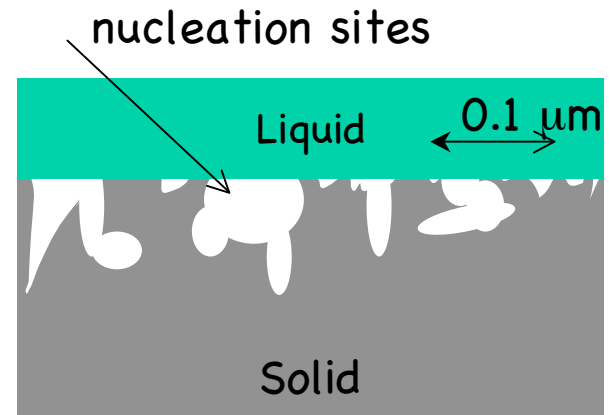


COUPP, from T-945 to P-961

J.I. Collar 10/19/06

# COUPP approach to WIMP detection:

- Detection of single bubbles induced by high-dE/dx nuclear recoils in heavy liquid bubble chambers
- $>10^{10}$  rejection factor for MIPs. *INTRINSIC* (no data cuts)
- Scalability: large masses easily monitored (built-in "amplification"). Choice of three triggers: pressure, acoustic, motion (video)
- Revisit an old detector technology with improvements leading to extended (unlimited?) stability (*ultra-clean BC*)
- Excellent sensitivity to both SD and SI couplings ( $CF_3I$ )
- Target fluid can be replaced (e.g.,  $C_3F_8$ ,  $C_4F_{10}$ ,  $CF_3Br$ ). Useful for separation between n- and WIMP-recoils and pinpointing WIMP in SUSY parameter space.
- High spatial granularity = additional n rejection mechanism
- Low cost ( $<350$  USD/kg target mass *all inclusive*), room temperature operation, safe chemistry (fire-extinguishing industrial refrigerants), moderate pressures ( $<200$  psig)
- Single concentration: reducing  $\alpha$ -emitters in fluids to levels already achieved elsewhere ( $\sim 10^{-17}$ ) will lead to complete probing of SUSY models

## An old precept: attack on both fronts

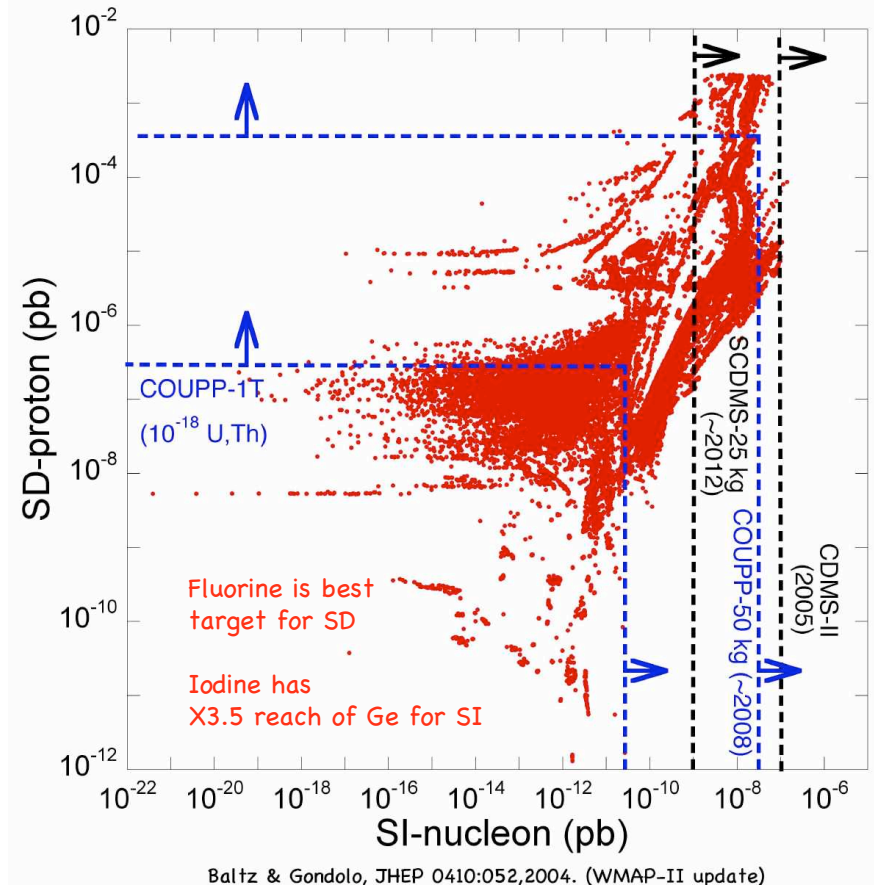


SD SUSY space harder to get to, but more robust predictions (astro-ph/0001511, 0509269, and refs. therein)




# COUPP approach to WIMP detection:

- Detection of single bubbles induced by high-dE/dx nuclear recoils in heavy liquid bubble chambers
- $>10^{10}$  rejection factor for MIPs. *INTRINSIC* (no data cuts)
- Scalability: large masses easily monitored (built-in "amplification"). Choice of three triggers: pressure, acoustic, motion (video)
- Revisit an old detector technology with improvements leading to extended (unlimited?) stability (*ultra-clean BC*)
- Excellent sensitivity to both SD and SI couplings ( $CF_3I$ )
- Target fluid can be replaced (e.g.,  $C_3F_8$ ,  $C_4F_{10}$ ,  $CF_3Br$ ). Useful for separation between n- and WIMP-recoils and pinpointing WIMP in SUSY parameter space.
- High spatial granularity = additional n rejection mechanism
- Low cost ( $<350$  USD/kg target mass *all inclusive*), room temperature operation, safe chemistry (fire-extinguishing industrial refrigerants), moderate pressures ( $<200$  psig)
- Single concentration: reducing  $\alpha$ -emitters in fluids to levels already achieved elsewhere ( $\sim 10^{-17}$ ) will lead to complete probing of SUSY models

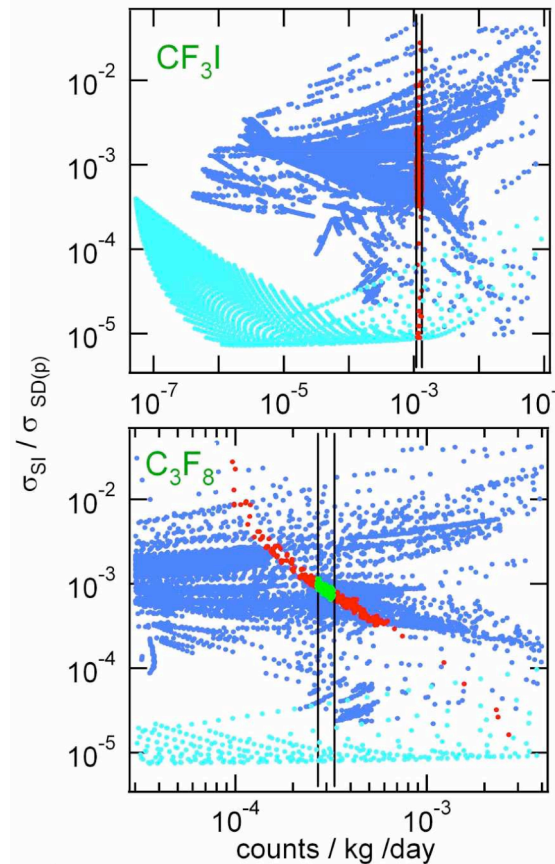

Bertone, Cerdeno, Collar and Odom (in preparation)

Rate measured in  $CF_3I$  and  $C_3F_8$  (vertical bands) tightly constrains responsible SUSY parameter space and type of WIMP (LSP vs LKKP)

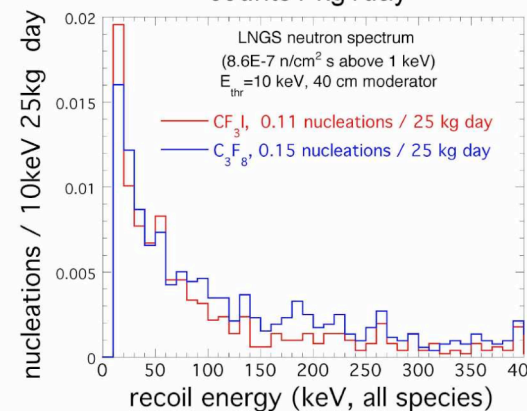


Neutrons on the other hand produce essentially the same rates in both ( $\sigma_n$  for F and I are very similar)  
J.I. Collar 10/19/06

# COUPP approach to WIMP detection:

- Detection of single bubbles induced by high-dE/dx nuclear recoils in heavy liquid bubble chambers
- $>10^{10}$  rejection factor for MIPs. *INTRINSIC* (no data cuts)
- Scalability: large masses easily monitored (built-in “amplification”). Choice of three triggers: pressure, acoustic, motion (video))
- Revisit an old detector technology with improvements leading to extended (unlimited?) stability (*ultra-clean* BC)
- Excellent sensitivity to both SD and SI couplings ( $CF_3I$ )
- Target fluid can be replaced (e.g.,  $C_3F_8$ ,  $C_4F_{10}$ ,  $CF_3Br$ ). Useful for separation between n- and WIMP-recoils and pinpointing WIMP in SUSY parameter space.
- High spatial granularity = additional n rejection mechanism
- Low cost (<350 USD/kg target mass *all inclusive*), room temperature operation, safe chemistry (fire-extinguishing industrial refrigerants), moderate pressures (<200 psig)
- Single concentration: reducing  $\alpha$ -emitters in fluids to levels already achieved elsewhere ( $\sim 10^{-17}$ ) will lead to complete probing of SUSY models

Stereo view of a typical event in 2 kg chamber

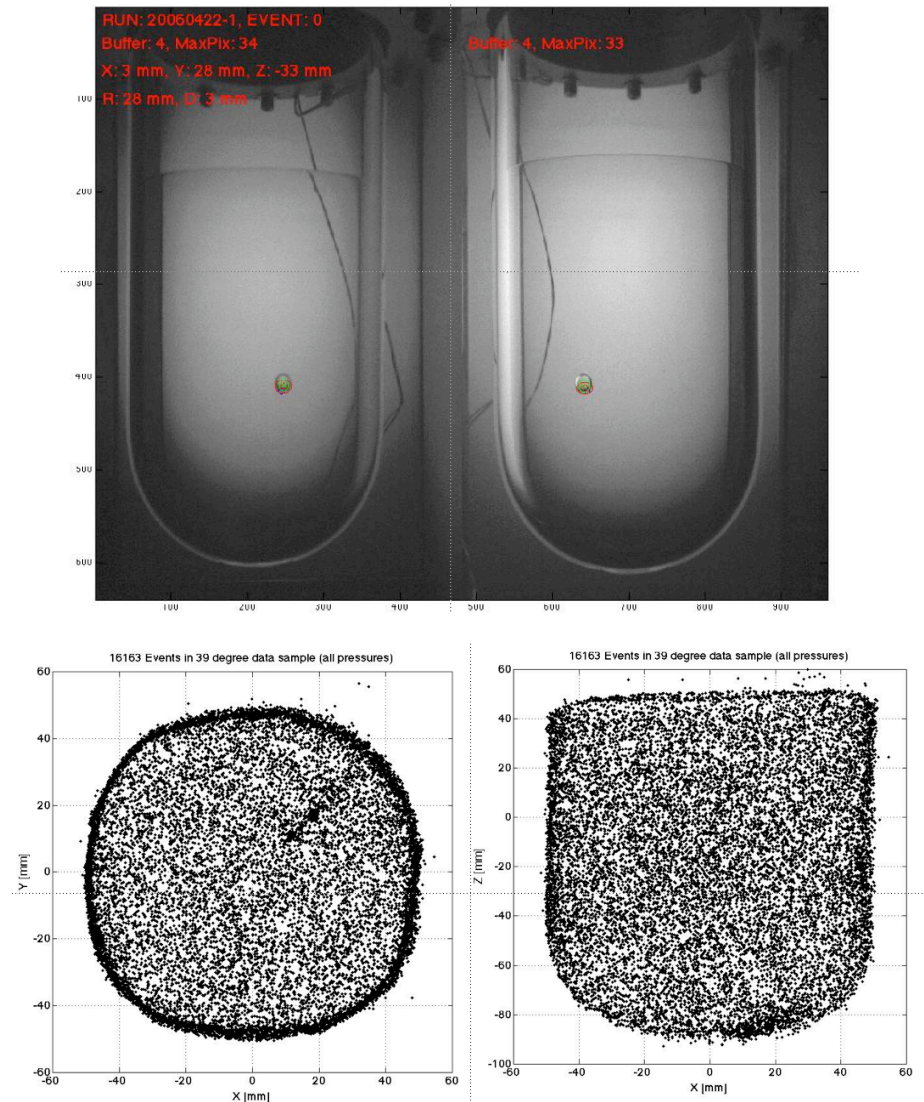


Spatial distribution of bubbles ( $\sim 1$  mm resol.)  
J.I. Collar 10/19/06



# COUPP approach to WIMP detection:

- Detection of single bubbles induced by high-dE/dx nuclear recoils in heavy liquid bubble chambers
- $>10^{10}$  rejection factor for MIPs. *INTRINSIC* (no data cuts)
- Scalability: large masses easily monitored (built-in "amplification"). Choice of three triggers: pressure, acoustic, motion (video)
- Revisit an old detector technology with improvements leading to extended (unlimited?) stability (*ultra-clean* BC)
- Excellent sensitivity to both SD and SI couplings ( $\text{CF}_3\text{I}$ )
- Target fluid can be replaced (e.g.,  $\text{C}_3\text{F}_8$ ,  $\text{C}_4\text{F}_{10}$ ,  $\text{CF}_3\text{Br}$ ). Useful for separation between n- and WIMP-recoils and pinpointing WIMP in SUSY parameter space.
- High spatial granularity = additional n rejection mechanism
- Low cost (<350 USD/kg target mass *all inclusive*), room temperature operation, safe chemistry (fire-extinguishing industrial refrigerants), moderate pressures (<200 psig)
- Single concentration: reducing  $\alpha$ -emitters in fluids to levels already achieved elsewhere ( $\sim 10^{-17}$ ) will lead to complete probing of SUSY models

Larger chambers will be "self-shielding"

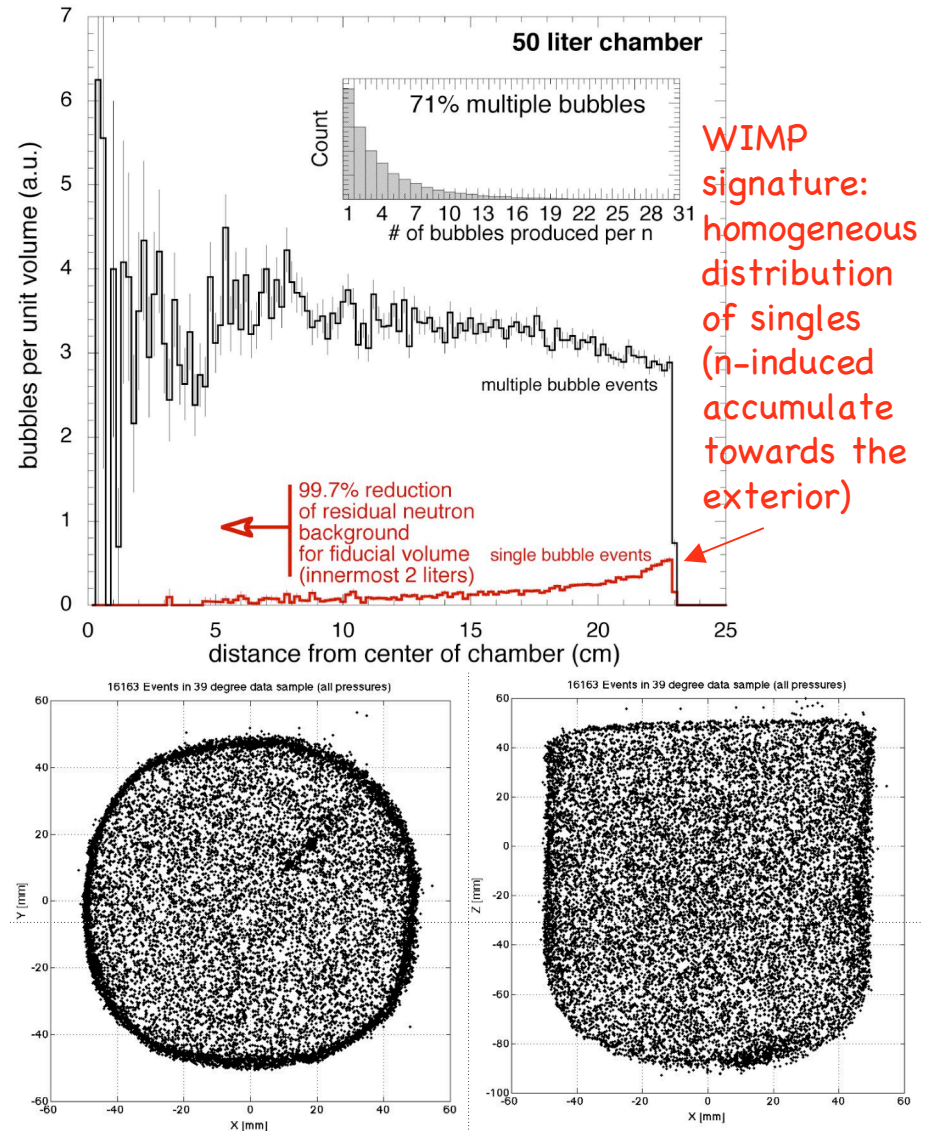


WIMP signature: homogeneous distribution of singles (n-induced accumulate towards the exterior)

Spatial distribution of bubbles ( $\sim 1$  mm resol.)

# COUPP approach to WIMP detection:

- Detection of single bubbles induced by high-dE/dx nuclear recoils in heavy liquid bubble chambers
- $>10^{10}$  rejection factor for MIPs. *INTRINSIC* (no data cuts)
- Scalability: large masses easily monitored (built-in "amplification"). Choice of three triggers: pressure, acoustic, motion (video)
- Revisit an old detector technology with improvements leading to extended (unlimited?) stability (*ultra-clean* BC)
- Excellent sensitivity to both SD and SI couplings ( $\text{CF}_3\text{I}$ )
- Target fluid can be replaced (e.g.,  $\text{C}_3\text{F}_8$ ,  $\text{C}_4\text{F}_{10}$ ,  $\text{CF}_3\text{Br}$ ). Useful for separation between n- and WIMP-recoils and pinpointing WIMP in SUSY parameter space.
- High spatial granularity = additional n rejection mechanism
- Low cost (<350 USD/kg target mass *all inclusive*), room temperature operation, safe chemistry (fire-extinguishing industrial refrigerants), moderate pressures (<200 psig)
- Single concentration: reducing  $\alpha$ -emitters in fluids to levels already achieved elsewhere ( $\sim 10^{-17}$ ) will lead to complete probing of SUSY models

Larger chambers will be "self-shielding"

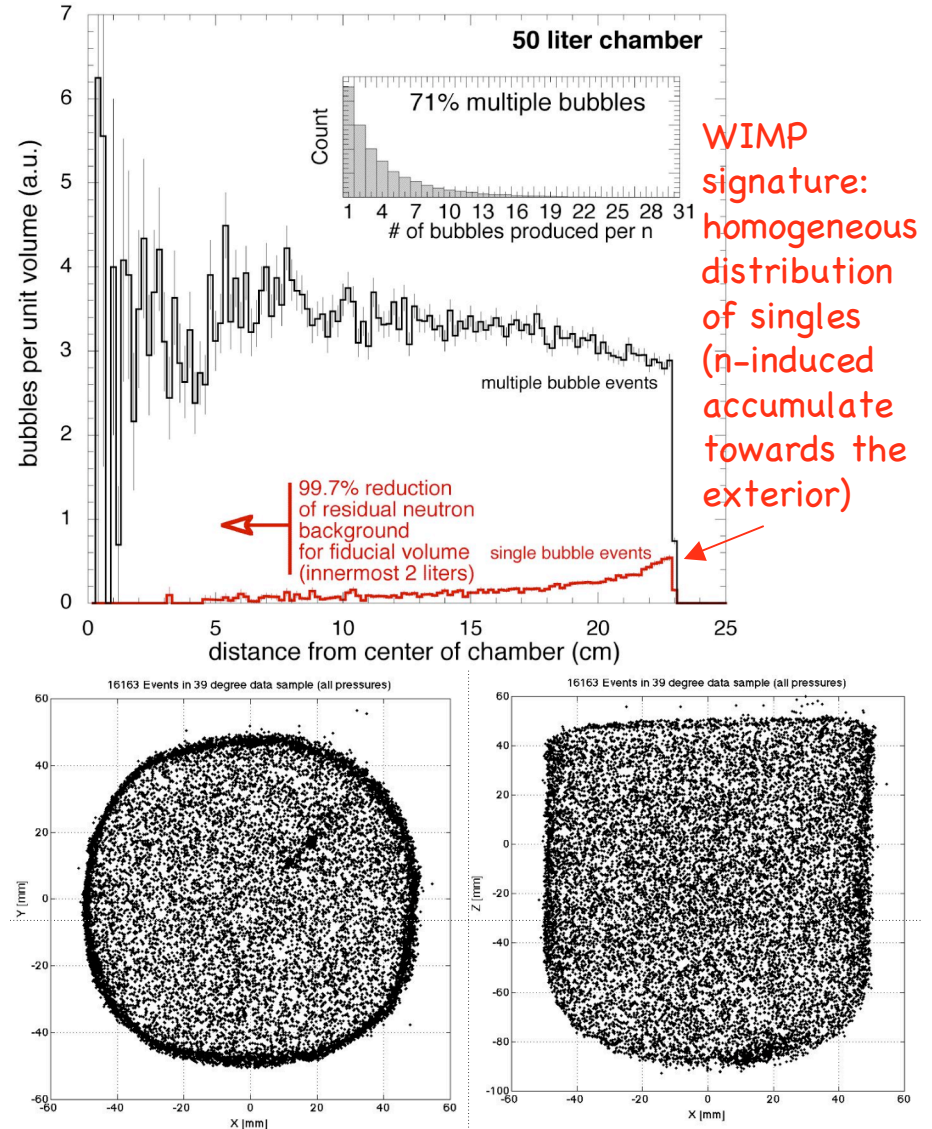

WIMP signature: homogeneous distribution of singles (n-induced accumulate towards the exterior)


Spatial distribution of bubbles ( $\sim 1$  mm resol.)

## COUPP approach to WIMP detection:

---


- Detection of single bubbles induced by high- $dE/dx$  nuclear recoils in heavy liquid bubble chambers
- $>10^{10}$  rejection factor for MIPs. *INTRINSIC* (no data cuts)
- Scalability: large masses easily monitored (built-in “amplification”). Choice of three triggers: pressure, acoustic, motion (video))
- Revisit an old detector technology with improvements leading to extended (unlimited?) stability (*ultra-clean* BC)
- Excellent sensitivity to both SD and SI couplings ( $CF_3I$ )
- Target fluid can be replaced (e.g.,  $C_3F_8$ ,  $C_4F_{10}$ ,  $CF_3Br$ ). Useful for separation between n- and WIMP-recoils and pinpointing WIMP in SUSY parameter space.
- High spatial granularity = additional n rejection mechanism
- Low cost ( $<350$  USD/kg target mass *all inclusive*), room temperature operation, safe chemistry (fire-extinguishing industrial refrigerants), moderate pressures ( $<200$  psig)
- Single concentration: reducing  $\alpha$ -emitters in fluids to levels already achieved elsewhere ( $\sim 10^{-17}$ ) will lead to complete probing of SUSY models

Example, consider  $^{222}Rn \rightarrow ^{218}Po$ :


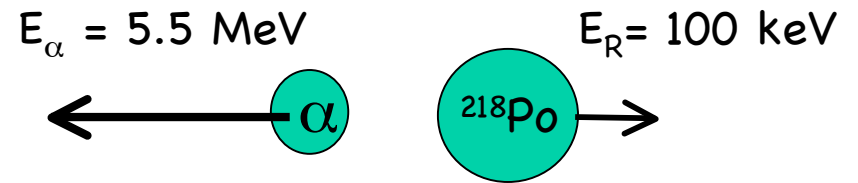


- The recoiling nucleus creates a bubble in a BC sensitive to lower energy WIMP ( $\sim 10$  keV) recoils
- $^{238}U$  and  $^{232}Th$  decay series include many  $\alpha$  emitters, including Radon ( $^{222}Rn$ ) and its daughters.

**COUPP @  
NuMI Tunnel Project  
(Fermilab Test Beam  
Proposal T945)**

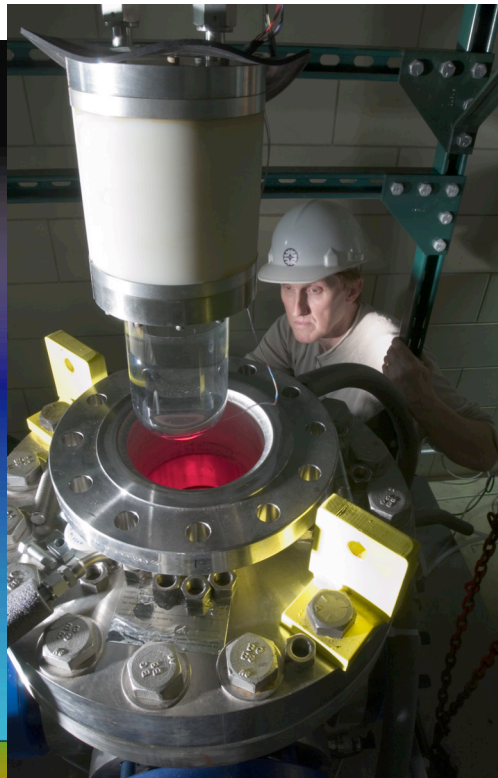


2kg (1l)  $CF_3I$   
chamber  
built at UC  
installed  
May '05

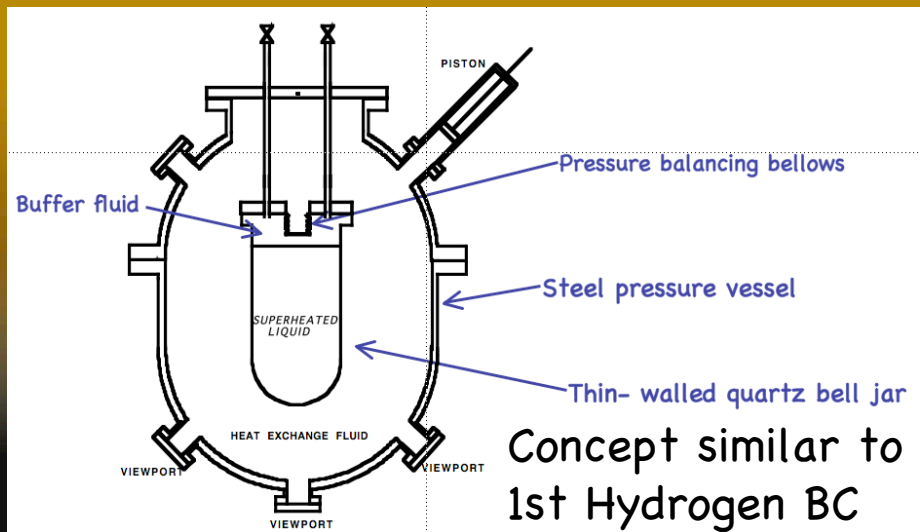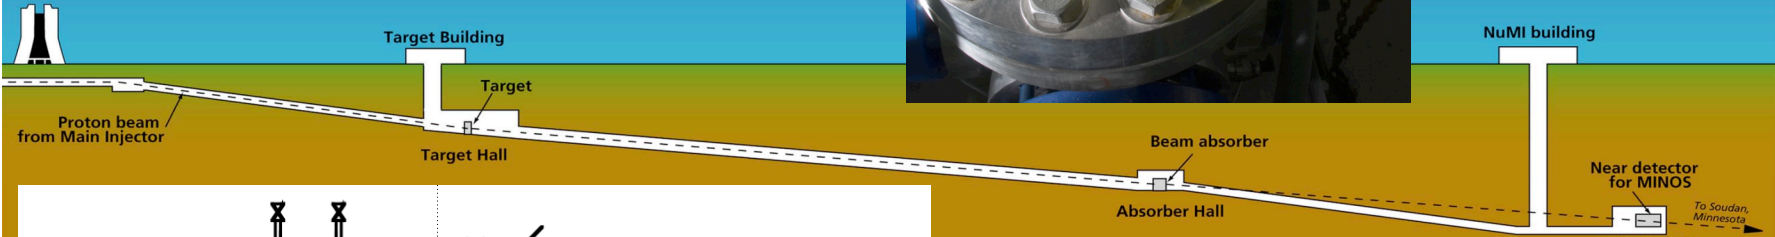


test site  
~300 m.w.e.





# COUPP @ NuMI Tunnel (Fermilab Test Beam Proposal T945)

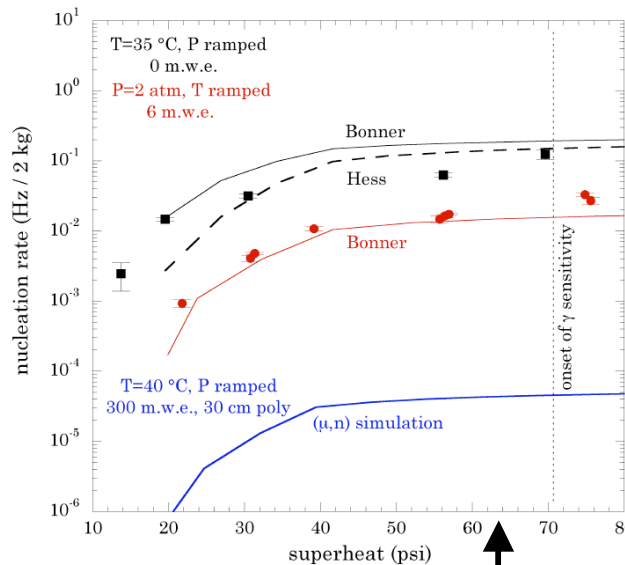


Nucleation rate at surface and shallow UC site (6 m.w.e.) in good agreement with environmental n's (a first "calibration") >100 improvement expected at NuMI

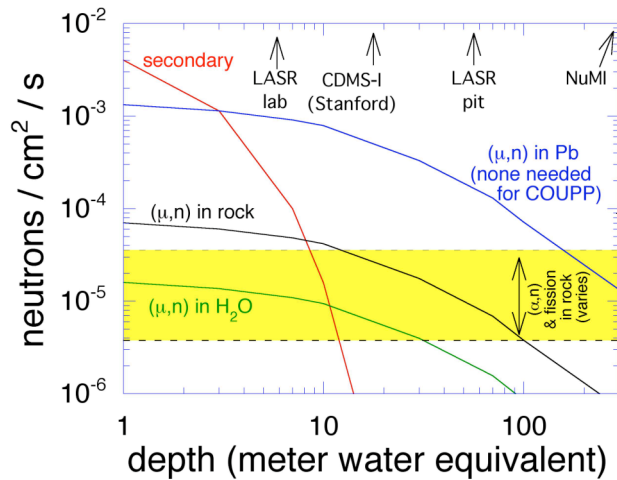

n flux already dominated by rock radioactivity in a site this deep. Muon veto and 30 cm of polyethylene allow to reach ~0.03 c/kg day (= CDMS-II sensitivity)

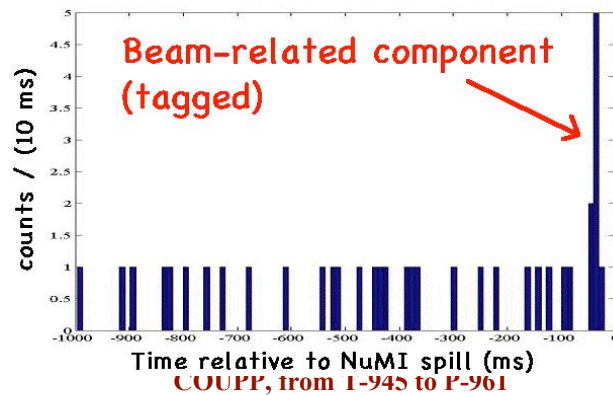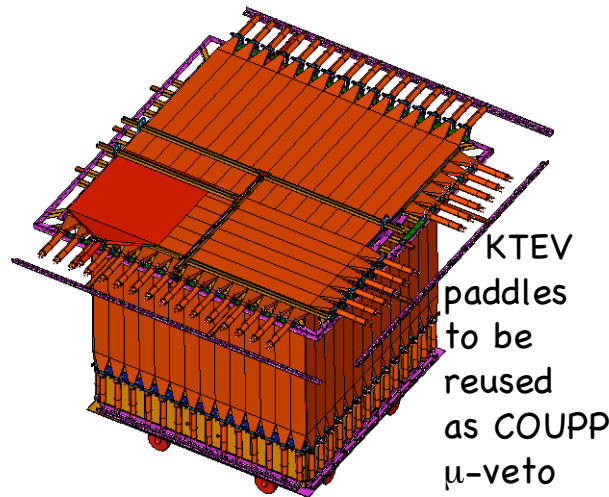

NuMI neutron flux ~ 3E-5 n / cm<sup>2</sup> s

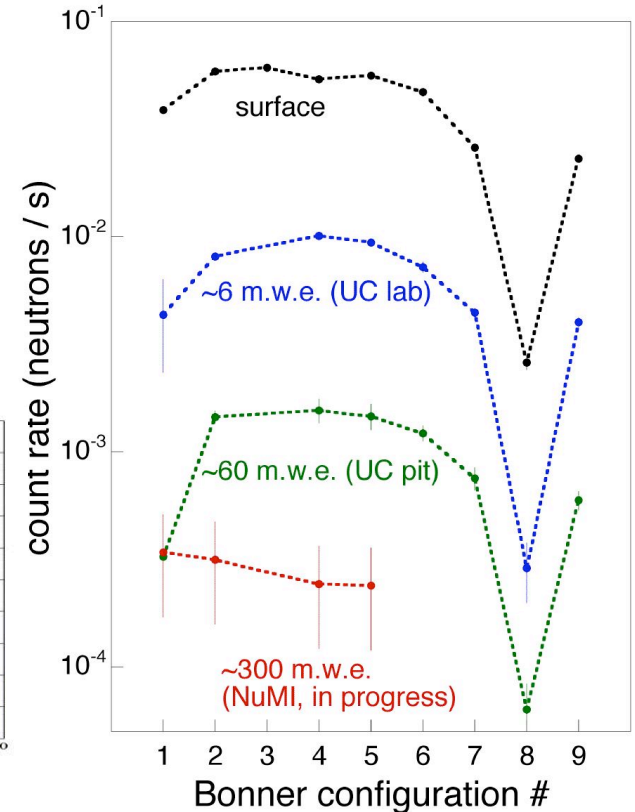

# Continuous Operation: December '05 to Oct '06

307 days in run  
115k expansions  
140 seconds mean  
superheated time

170 live days  
= 55% of calendar time


~70% live time after stabilization

50.8k bubbles counted

324 GB in Enstore


## Goals of TBP T945:

- Demonstrate reliable operation.
- Study backgrounds (they were expected!)
- Calibrate with sources:  $\gamma$ , n.

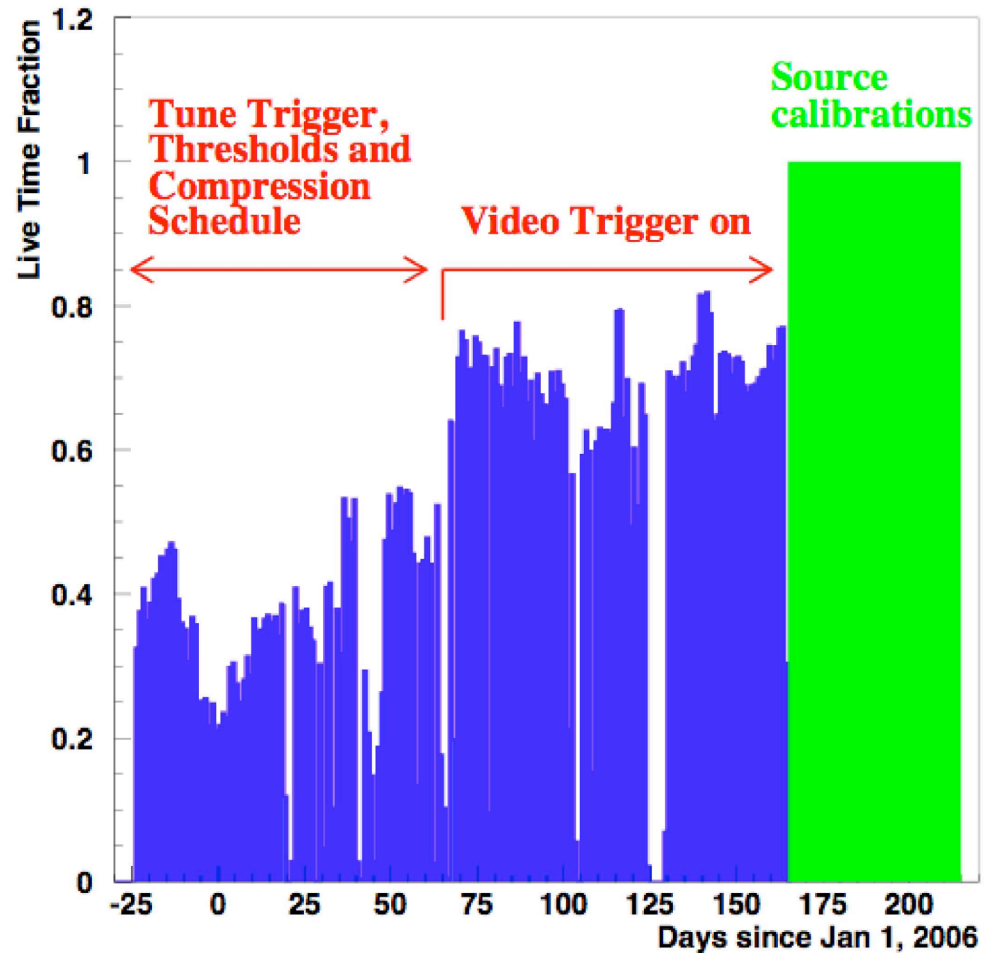




# Two (expected) backgrounds found and addressed during T945

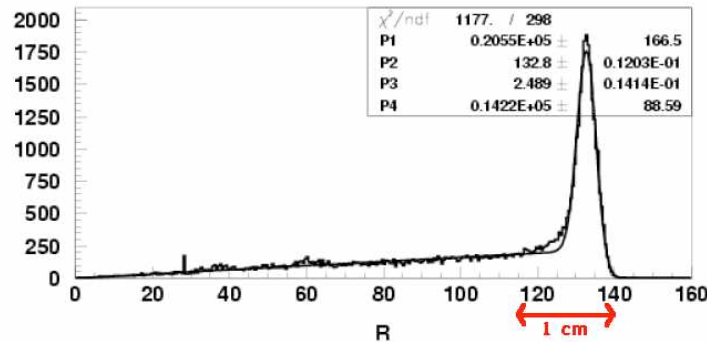


## 1) Excess surface nucleations from Rn daughter implantation

- Rate consistent with ~200 days of quartz exposure to air
- Tell-tale pressure sensitivity onset ( $\alpha$ 's)
- Can be rejected, but must be reduced by > 10 to allow >60% live-time in ~50kg chambers
- Addressed via modified etch at vessel manufacturer (up to x200 reduction expected)

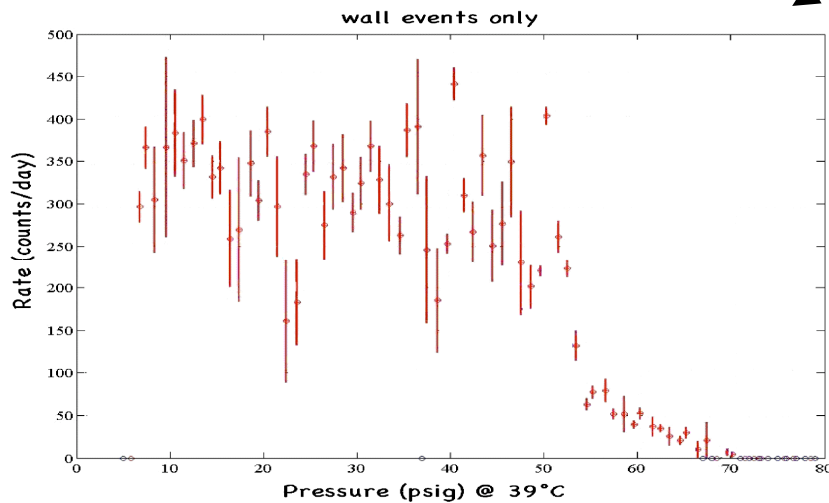


time difference for fiducal events 2006/06/08 22.15

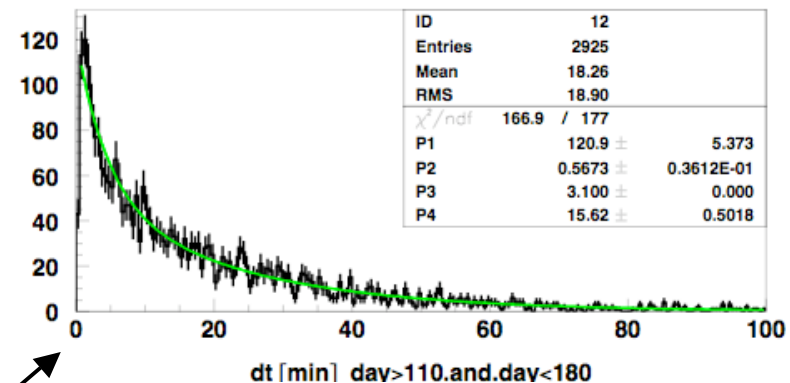


## 2) Radon Decays Presently Dominate Bulk Events

- Rn sources present: viton o-ring, thoriated weld lines.
- Time correlations of bulk events are consistent with 3.1 minute half-life of Po-218 (this provides rejection)
- Addressed by use of metallic gaskets, lanthanated tips for flange welding and custom-made bellows (electron beam welded)

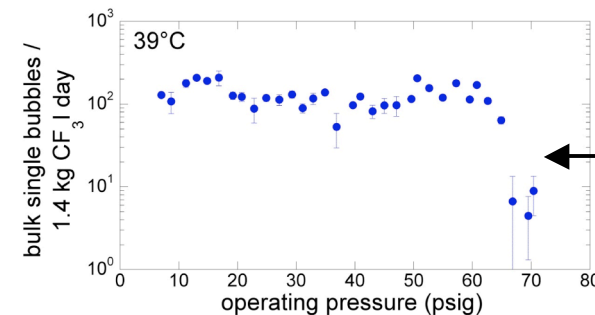



Second signature: P-onset as predicted, flat rate below.

$^{137}\text{Cs}$  (13mCi)

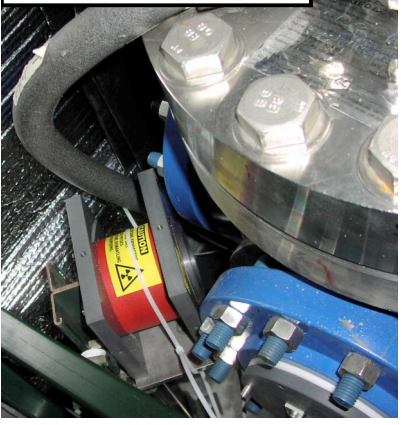

# Gamma and neutron calibrations *in situ*:

Best MIP rejection factor measured anywhere (<math>10^{-10}</math> INTRINSIC, no data cuts)

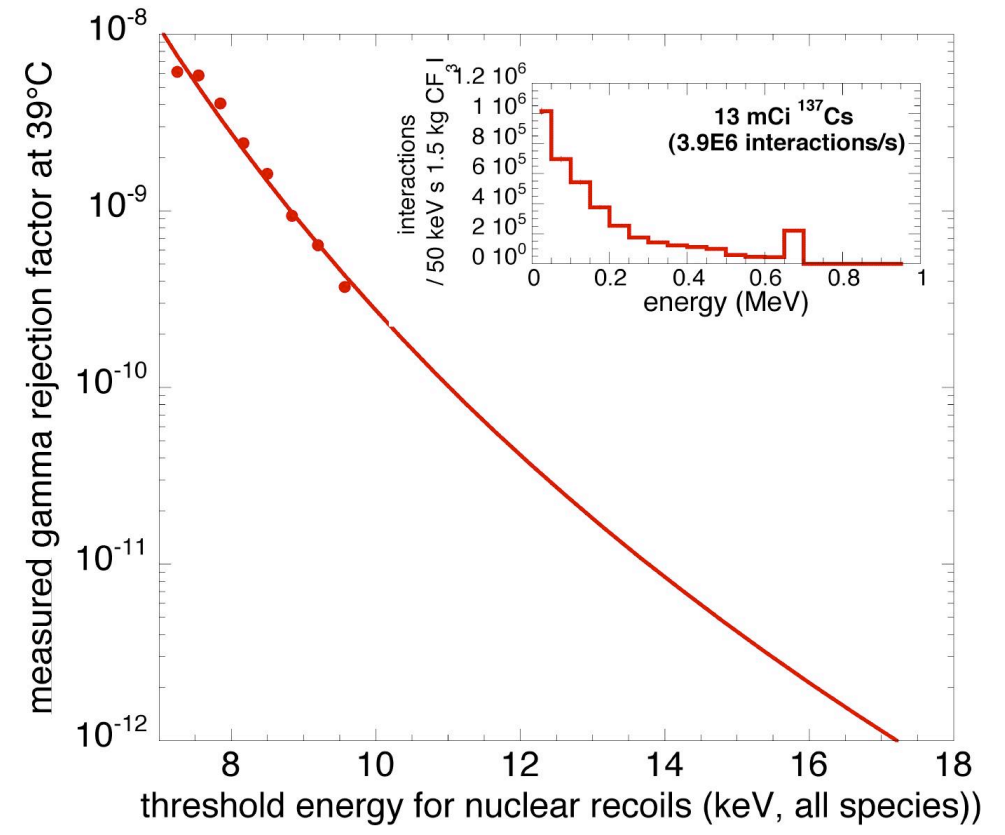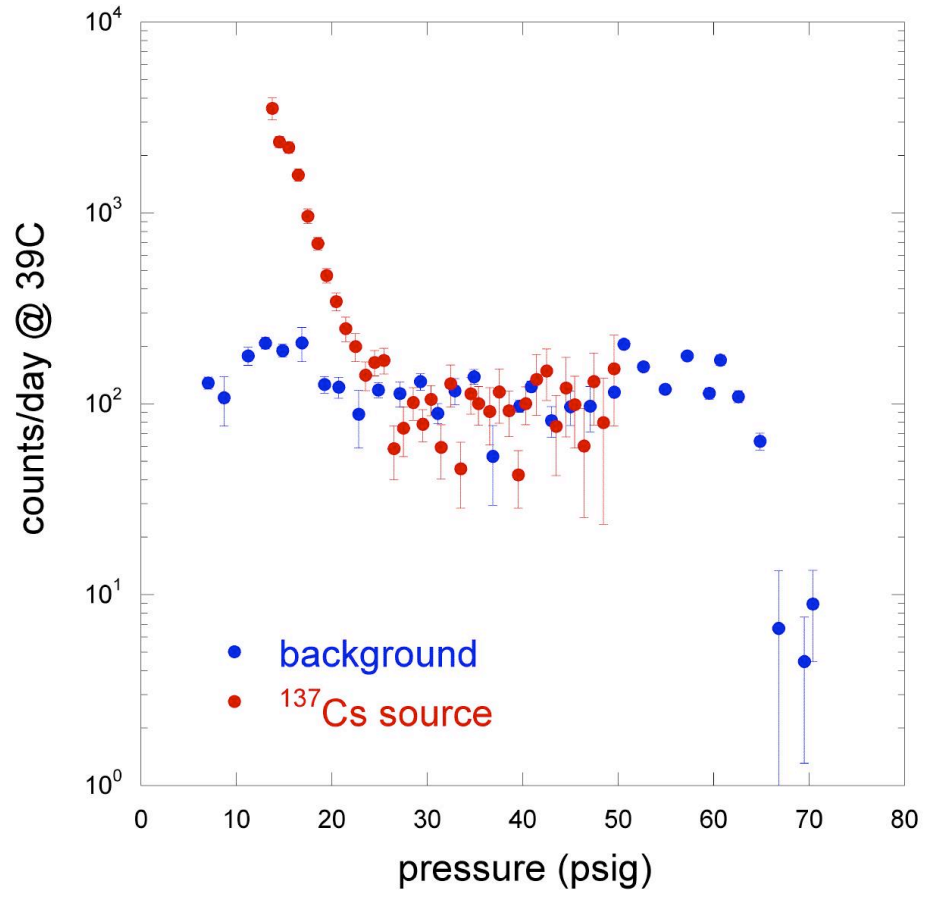

Other experiments as a reference:  
 XENON  $\sim 10^{-2}$   
 CDMS  $10^{-4}$ - $10^{-5}$   
 WARP  $\sim 10^{-7}$ - $10^{-8}$

$^{14}\text{C}$  betas not an Issue for COUPP (typical O(100)/kg-day)  
No need for high-Z shield nor attention to chamber material selection

rom T-945 to P-961



LH Collar 10/19/06

# Gamma and neutron calibrations *in situ*:

Switchable  
Am/Be (5 n/s)



$O(0.2)$  n/day  
when OFF.  
Second  
generation  
design  
produces  
none.

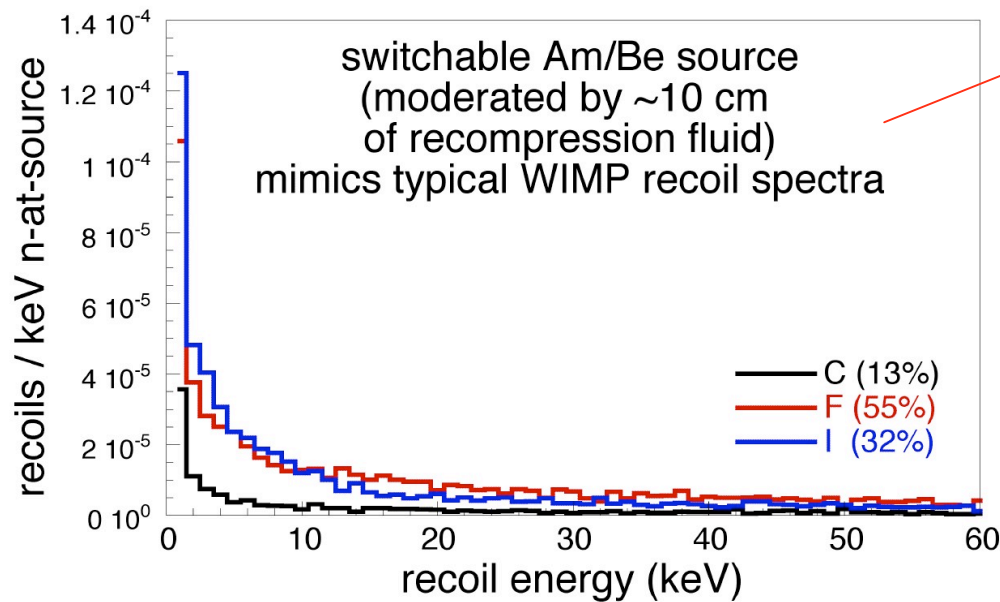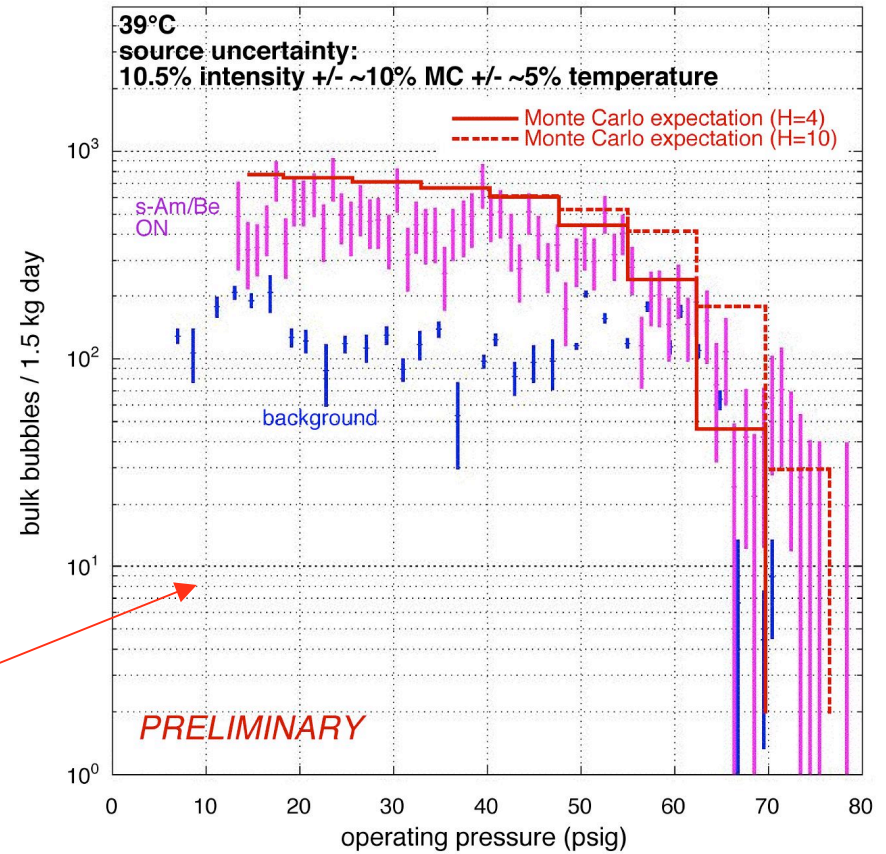

S-Am/Be can be used for  
~daily calibration of  
chamber response  
(important when searching  
for DM modulations)



# Physics Reach at Fermilab Site

Goal for P-961: reduce background to  $\ll 1$  event per kg per day

## Summary of improvements for next refill:

- Etched quartz vessel (surface nucleations)
- metallic gaskets, lanthanated welds (Rn)
- e-beam welded bellows (Rn)
- TAMApure or SNO H<sub>2</sub>O ( $< 10^{-15}$  U and Th)
- CF<sub>3</sub>I U,Th measured to  $\sim 10^{-14}$  sensitivity (ongoing AMS@ANL), use of nitric acid scrubbing column and multiple distillation if finite value found
- Better commercial chemical purity of CF<sub>3</sub>I, electropolished storage vessels
- Attention to U,Th in dust (class <100 conditions, limited exposure, improved cleaning)


U,Th in CF <sub>3</sub> I and buffer liquid	$10^{-14}$ - $10^{-15}$ within reach (commercial H <sub>2</sub> O + AMS radioassay). But beyond?	✗
Rn penetration	Sealed container.	✓
Rn emanation	Expected $< 5\mu\text{Bq}/\text{m}^2$ from SS and SiO <sub>2</sub> . Metallic gaskets, lanthanated tips, clean valves. Also time correlations.	✓
Rn adsorption (ulterior <sup>210</sup> Pb release)	Cleaning (etching, ultrasound, EDTA)	?
Rn daughter implantation	Spatial resolution tags these but limits live-time in large chambers. Should be down to $< 40 \alpha's / \text{m}^2 \text{ day}$ now (sufficient)	?
Dust control	$\sim 0.1$ events / day / m <sup>2</sup> inner surface per hour of class 200 air exposure after the last cleaning (10 ppm U,Th in dust assumed)	✓

A two-step process: we can get to  $\sim 10^{-14}$ - $10^{-15}$  U,Th relatively easy, REAL challenge is to get beyond (KAMLAND is  $< 10^{-17}$  U,Th)


# Physics Reach at Fermilab Site

Goal for P-961: reduce background to  $\ll 1$  event per kg per day

## Spin-independent

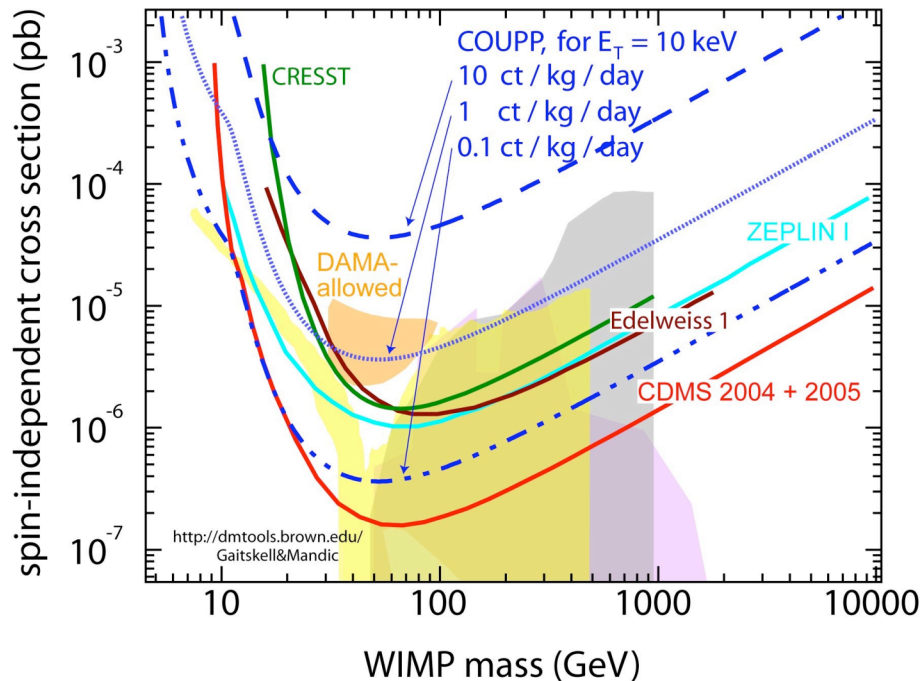

## Spin-dependent

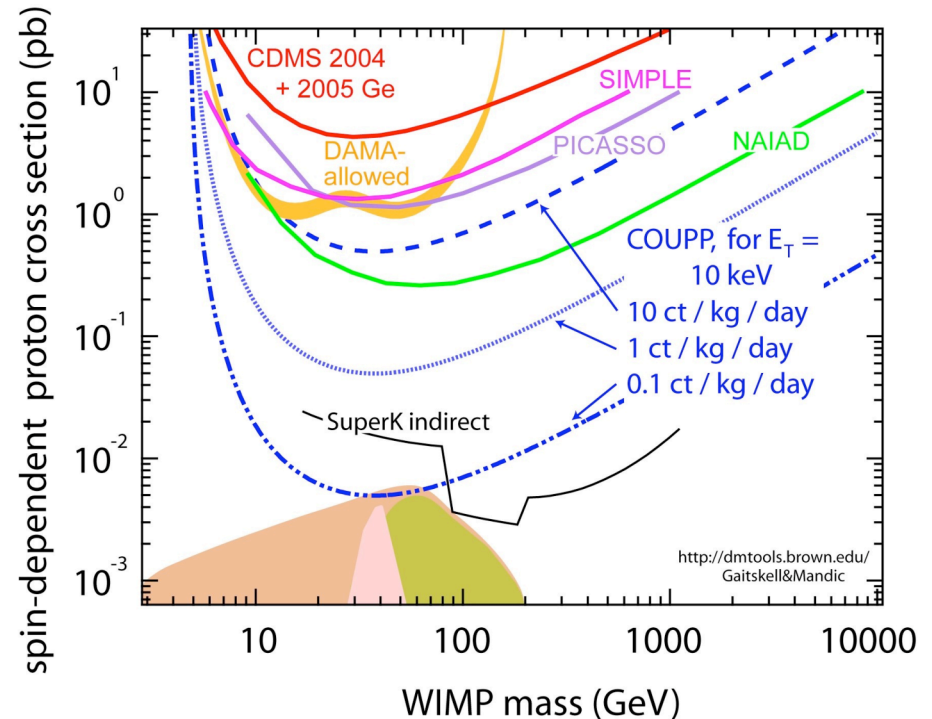

Three projections are offered:  $\sim 10$  c/kg-d can be extracted from present data.  $\sim 1$  c/kg-d expected from simulated ( $\mu, n$ ).  $\sim 0.1$  c/kg-d is for 90% efficient  $\mu$  veto.


A further reduction to  $\sim 0.03$  c/kg-d is possible (simulated gallery n's percolate through 30 cm polyethylene shield at that level).

By then better than  $10^{-15}$  U,Th needed (World best is KAMLAND @  $\sim 10^{-18}$ ).

# Physics Reach at Fermilab Site

Goal for P-961: reduce background to  $\ll 1$  event per kg per day

Where exactly are we in sensitivity as of today?  
(next refill should improve it dramatically)

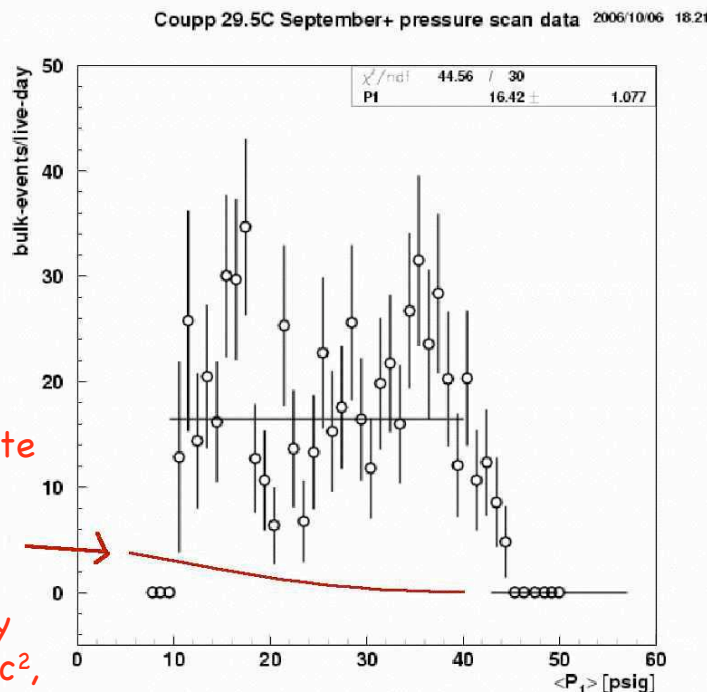


WIMP signal from candidate at limit of world's best present SD sensitivity ( $m_\chi = 50 \text{ GeV}/c^2$ ,  $\sigma_{wp} = 0.3 \text{ pb}$ )

Telltale signature: Response to  $\alpha$ 's is flat, not the case for WIMPs (or neutrons)

FNAL PAC

COUPP, from T-945 to P-961

## Spin-dependent

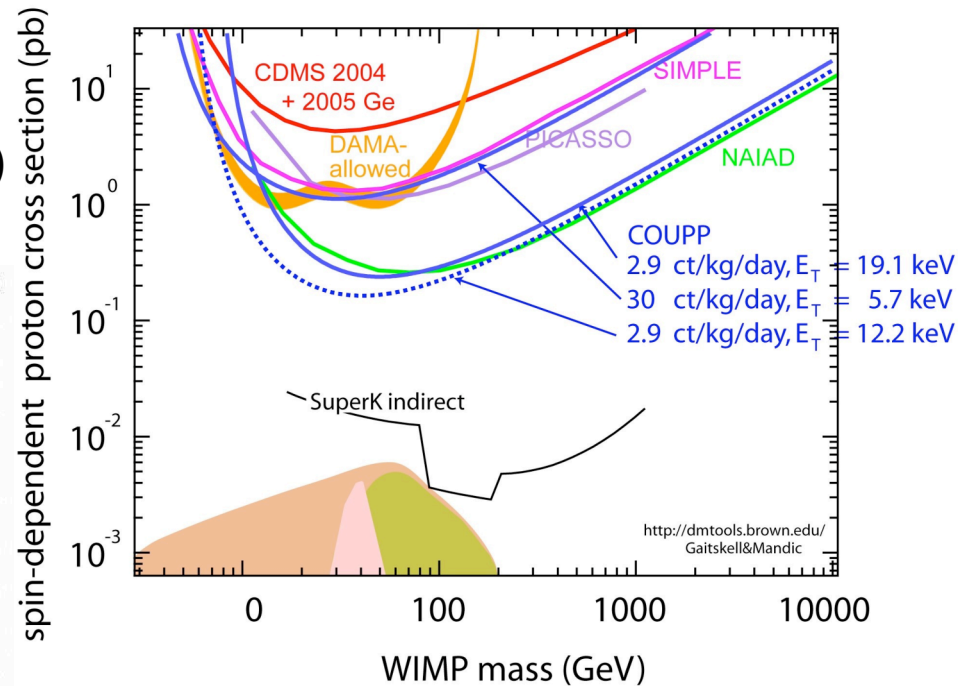

Not a limit yet

(trying to include systematics, increase statistics, reduce threshold)

However, even before any Rn mitigation best SD limits are within reach  
(the effect of optimal targets and MIP insensitivity)


J.I. Collar 10/19/06



# Physics Reach at Fermilab Site

Goal for P-961: reduce background to  $\ll 1$  event per kg per day

Where exactly are we in sensitivity as of today?  
(next refill should improve it dramatically)

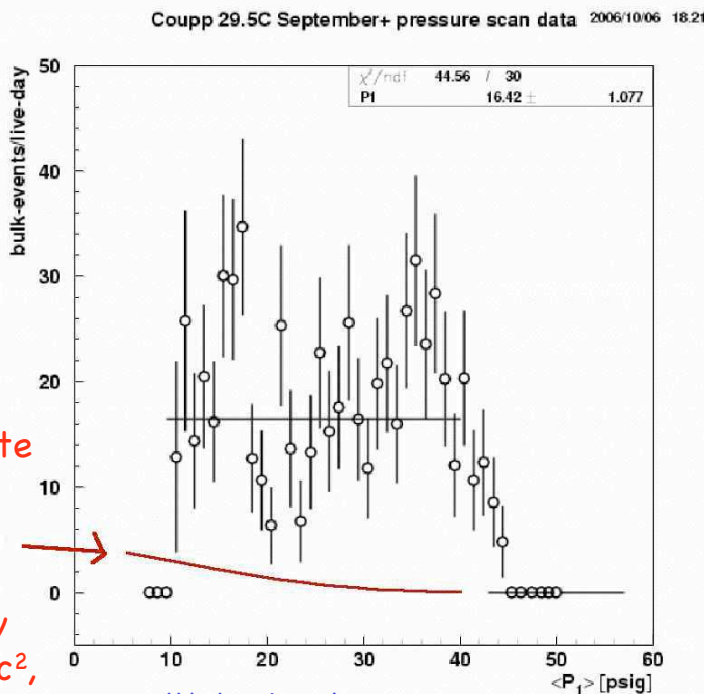


WIMP signal from candidate at limit of world's best present SD sensitivity ( $m_\chi = 50 \text{ GeV}/c^2$ ,  $\sigma_{\text{wp}} = 0.3 \text{ pb}$ )

Telltale signature: Response to  $\alpha$ 's is flat, not the case for WIMPs (or neutrons)

FNAL PAC

COUPP, from T-945 to P-961

## Spin-dependent

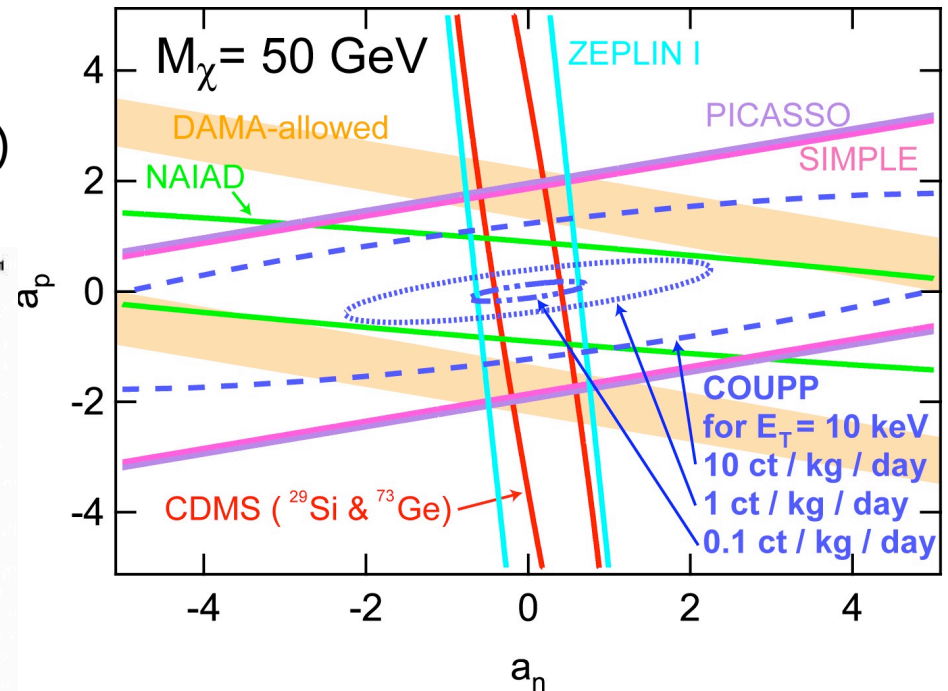

Not a limit yet

(trying to include systematics, increase statistics, reduce threshold)

However, even before any Rn mitigation best SD limits are within reach

(the effect of optimal targets and MIP insensitivity)

J.I. Collar 10/19/06


# Numerous ongoing activities

"skinny" chamber for inelastic n scattering exp.


Modular recompression and P-control unit




- Determination of free parameters (efficiency, softness of threshold and "Harper" factor) using dedicated small chambers.
- Separation of response to Iodine and Fluorine recoils (two methods, inelastic neutron scattering and pion beam test)
- Measurement of U,Th in  $CF_3I$  down to  $<10^{-14}$  using AMS @ ANL, w/ and w/o purification stage (scrubbing column).
- Design and construction of 20 and 60 kg modules. Monolithic "blind" bubble chambers (encapsulated cameras inside). Applications to neutron detection (DOE/NNSA funded).
- Others: recompression and P-stabilization units for upcoming chambers, ultralow-background high-sensitivity fast neutron monitor (to be housed within shield), development of  $CF_3I$  SDDs (for alpha calibrations)

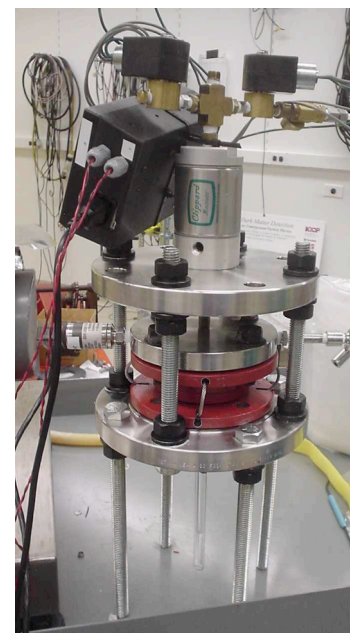

AMS of  $CF_3I$  @ ANL  
( $10^{-14}$  g/g U,Th sensitivity)

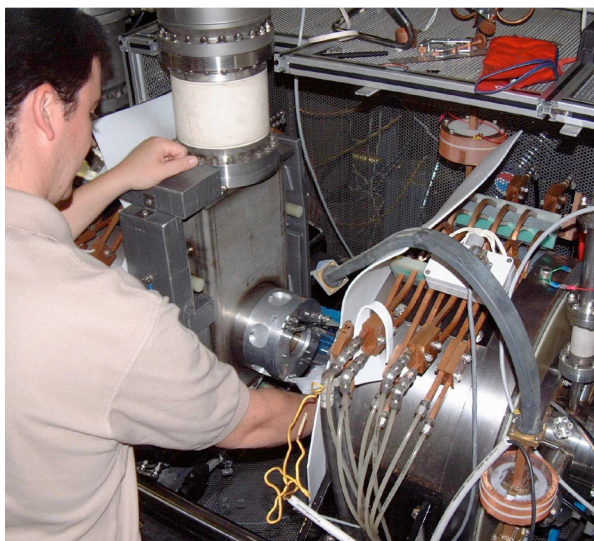

FNAL PAC

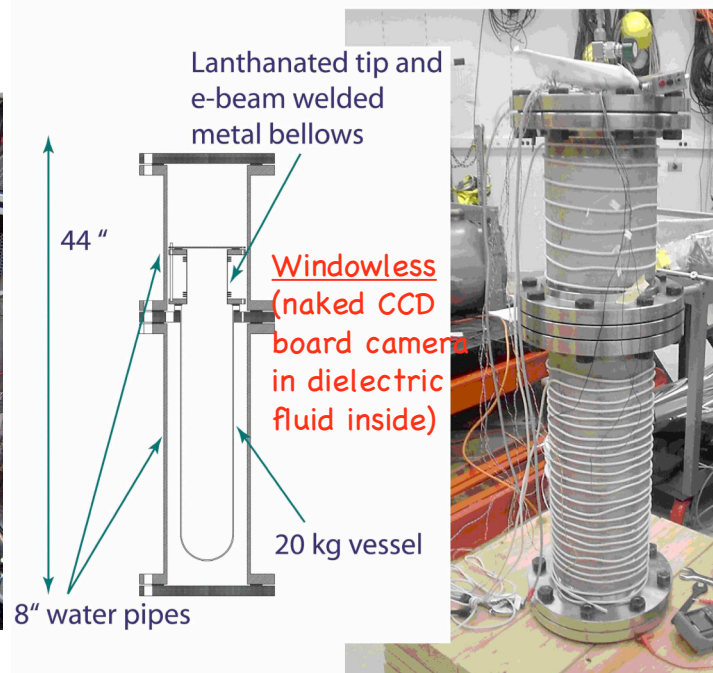


1 l chamber for pion beam calibration





# Infrastructure is in place

Spray-wash system for RF cavities (FNAL)

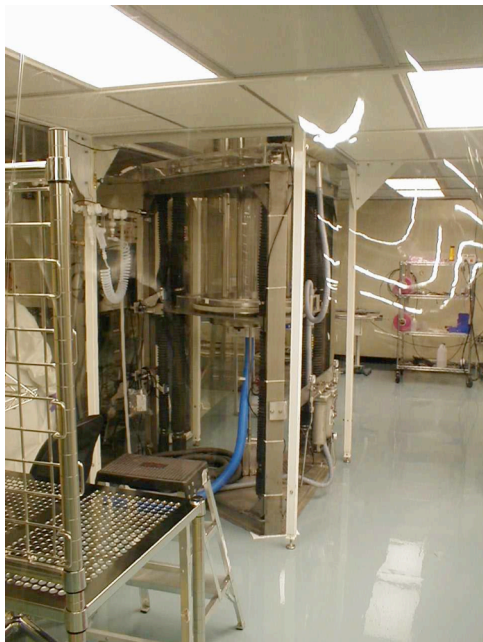

Clean room gowning area (FNAL)



Ultrasound baths



Clean room (UC)



Most important:



~300 m.w.e.  
location "on site"  
and in  
nobody's way...

(muon veto under  
construction  
visible)

COUPP, from T-945 to P-96

# Short term plans (next 3 years)

- Replace inner vessel of 1-liter chamber with measures against Radon and other improvements.
- Commission muon veto system to extend sensitivity at NuMi site.

Goals: Understand backgrounds.

World's best sensitivity for spin-dependent scattering.

Potentially competitive with CDMS-II for spin-independent.

Attract the partnership and expertise needed for the longer term by demonstrating viability.

- Improve understanding of bubble nucleation threshold and efficiency through test beam experiments and neutron experiments. Study response of  $C_3F_8$  and  $C_4F_{10}$ .
- Obtain modest additional funding aiming at the construction of a target mass  $O(250)kg$ . Multiple modules envisioned at this stage (facilitates upgrades as backgrounds become evident).

Present funding: CAREER (NSF), KICP (NSF+Kavli), NSF (IUSB), DOE/NNSA, DOE (Wilson fellowship)

Short term targeted funding envisioned:  $\sim 1MUSD$  (NSF, 4yr),  $\sim 250K/yr$  (DOE).

- Finish design and construction of chambers in the 20–60 kg regime.
- Commission chambers at Fermilab NuMi site. Goals: Further understanding of weaker backgrounds.
- Deploy chambers at a deep underground location (Soudan? DUSEL? SNOlab?)

# Longer term plans

- Successful runs deep underground with  $\sim 50$  kg modules may lead to the design of larger devices. Needless to say, the ability to reach state-of-the-art alpha-emitter radiopurity must also be in place before this.



# To wind it up

- COUPP is at a turning point. Safe, reliable long-term operation of a considerable target mass (2 kg) has already been illustrated during T-945.
- COUPP is unparalleled in the speed at which it can be scaled-up. Similarly, in potential sensitivity vs. cost. For COUPP to reach its full promise, we will work in parallel on chamber development and alpha-emitter mitigation.



**Fact:**  
The COUPP target mass presently under construction (80 kg) has the SI-equivalent potential reach of ~150 kg of Ge (superCDMS circa 2014) (backgrounds?)

- COUPP's concentration is not just on developing yet another method to increase sensitivity to DM particles, but also on demonstrating that the signals come from WIMPs and not some background. No DM detector is perfect in this sense, calling for a variety of techniques. COUPP has much to offer on this front.

# What We Request from Fermilab in Stage I

- Completion of a 60-kg prototype bubble chamber.
- Upgrade and improvement of our data acquisition and controls software.
- A commissioning/physics data run with the 60-kg bubble chamber in the MINOS site.
- Engineering and design to prepare a deep underground site proposal.
- Preparation of an MOU between Fermilab/COUPP and the Deep Underground Site.



# What We Will Request from Fermilab in Stage II

- Deep Underground Site preparation.
- Shielding for the deep underground site experiment.
- Upgrade (if necessary) of 60 kg bubble chamber.
- 60 kg physics data in a deep underground site.

# Stage I Fermilab Resources

An estimate of the resources required from Fermilab for Stage I (FY07 and FY08) of our 60 kg proposal is tabulated below.

2 year timeline to deployment of 60kg detector					
Institution	Year	FY06	FY07	FY08	totals
Fermilab	M&S R&D (\$k)	250	250		500
Fermilab	M&S (\$k)			250	250
Fermilab	Mechanical Engineer	0.25	1	1	2.25
Fermilab	Designer/Drafter	0.5	1	1	2.5
Fermilab	Mechanical Technician	2	3	3	8
Fermilab	Electrical Engineer		0.25	0.25	0.5
Fermilab	Electrical Technician		0.5	0.5	1
Fermilab	Computing Professional		0.5	0.5	1
Fermilab	DAQ Professional		0.5	0.5	1
Fermilab	total FTE's	2.75	6.75	6.75	16.25


There will be additional NSF funding requests in support of the COUPP efforts at KICP and IUSB. These requests will also be or order \$250k/year over the next 3 years. In the case of the NSF proposal approximately 50% of the request will be for personnel (1 postdoc and 1 grad student at UC, 1 engineer at IUSB), the rest for chamber construction costs.

# THANKS !

Fermilab Directorate (for patience, we proposed this two years ago...)

- PPD (for R&D support, Engineering, tech support...)
- CD (for scientific and computing support.
- AD (for scientific and clean-room support)
- Test Beam Program (logistical support, tech support)

We're Looking Forward to Exciting New Physics

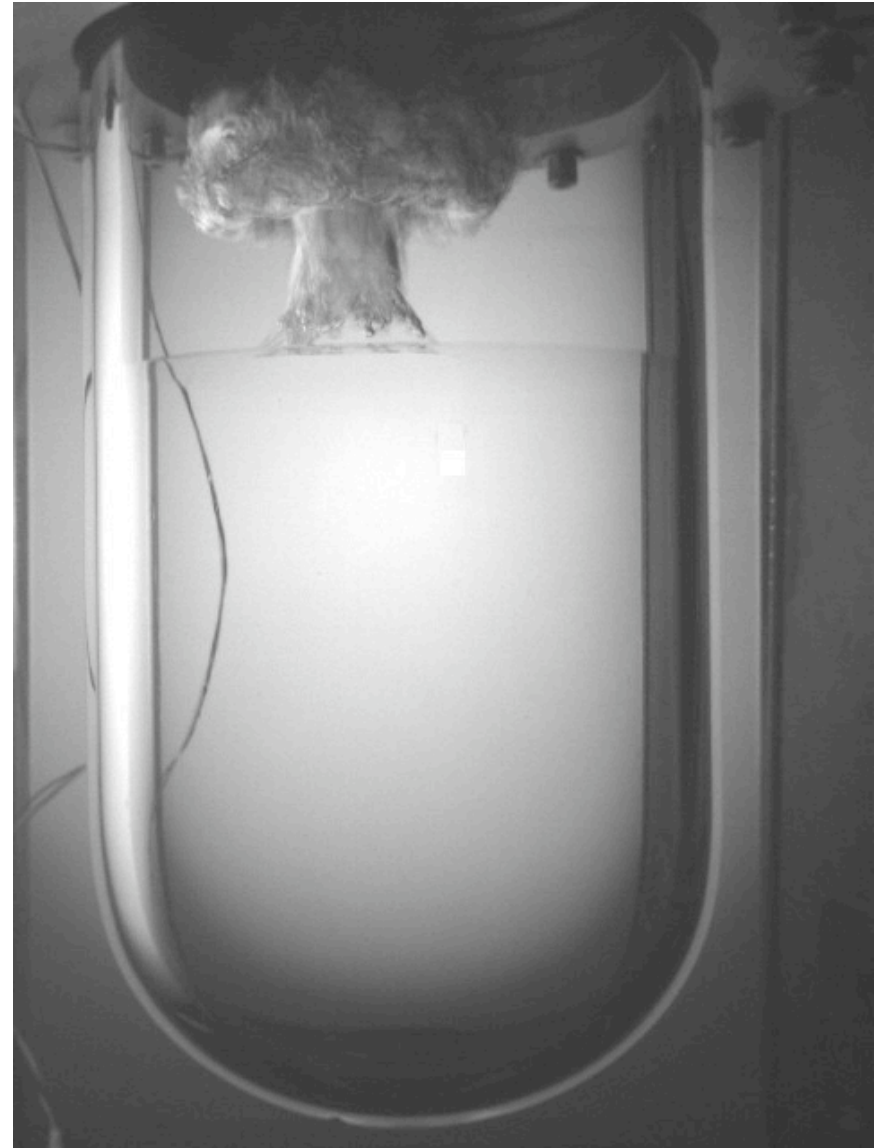

## Questions?