

**MUON ACCELERATOR R&D PROGRAM:
A PROPOSAL FOR THE NEXT 5 YEARS
Revision 0; November 18, 2008**

Abstract

This document contains a description of a 5-year R&D program aimed at completing a Design Feasibility Study (DFS) for a Muon Collider and, with international participation, a Reference Design Report (RDR) for a muon-based Neutrino Factory. It also includes the supporting component development and experimental efforts that will inform the design studies and permit an initial down-selection of candidate technologies for the ionization cooling and acceleration systems. We intend to carry out this plan with participants from the three sponsoring U.S. national laboratories (BNL, FNAL, and LBNL), along with those from a number of other U.S. laboratories, universities, and SBIR companies. The R&D program that we propose will provide the HEP community with detailed information on future facilities based on intense beams of muons—the Muon Collider and the Neutrino Factory. We believe that these facilities offer the promise of extraordinary physics capabilities. The Muon Collider presents a powerful option to explore the energy frontier and the Neutrino Factory gives the opportunity to perform the most sensitive neutrino oscillation experiments possible, while also opening expanded avenues for study of new physics in the neutrino sector. The synergy between the two facilities presents the opportunity for an extremely broad physics program and a unique pathway in accelerator facilities. Our work will give clear answers to the questions of expected capabilities and performance of these muon-based facilities, and will provide defensible estimates for their cost. This information, together with the physics insights gained from the next-generation neutrino and LHC experiments, will allow the HEP community to make well-informed decisions regarding the optimal choice of new facilities. We believe that this work is an absolutely critical part of any broad strategic program in accelerator R&D and, as the P5 panel has recently indicated, is essential for the long-term health of high-energy physics.

Introduction.....	1
Present Status.....	3
Muon Collider DFS Plans.....	5
Physics and Detector Studies.....	5
Accelerator Design and Simulations.....	7
Cost Estimation.....	19
Neutrino Factory RDR.....	20
Component Development and Experiments	29
MICE Experiment.....	29
RF Systems.....	32
Magnets.....	34
Cooling Section Tests and Experiments.....	39
Summary of Component R&D Goals.....	41
University, International, and SBIR Company Participation.....	42
Summary.....	42
References.....	44
Appendix 1.....	47

Executive Summary

The physics program that could be pursued at a high-energy lepton collider has captured the imagination of the world high energy physics community. A lepton collider with sufficient energy and luminosity would facilitate:

- understanding the mechanism behind mass generation and electroweak symmetry breaking
- searching for, and perhaps discovering, supersymmetric particles and confirming their nature
- hunting for signs of extra space-time dimensions and quantum gravity.

Past studies have motivated lepton colliders with multi-TeV center-of-mass energies and luminosities of the order of $10^{34} \text{ cm}^{-2}\text{s}^{-1}$. Physics results obtained from CERN's Large Hadron Collider on the time scale of ~ 2013 are expected to establish the desired energy for the next lepton collider and refine our knowledge of the required luminosity. The Particle Physics Project Prioritization Panel (P5) has recommended^a “...R&D for alternative accelerator technologies, to permit an informed choice when the lepton collider energy is established.” At present, the alternatives for a multi-TeV collider are: *a*) a $\mu^+\mu^-$ collider (MC); *b*) a normal-conducting RF e^+e^- linear accelerator (X-band NLC-type or two-beam CLIC-type); or *c*) a plasma wakefield e^+e^- linear accelerator driven either by lasers or by short electron bunches. Since muons—being much heavier particles than electrons—emit negligible synchrotron radiation, the MC promises superior attributes in a number of areas compared with either e^+e^- scheme. The absence of synchrotron radiation allows high-energy muon bunches to be stored in a compact collider ring, so a MC complex would fit conveniently on the site of an existing laboratory, e.g., Fermilab. Moreover, the radiation of particles in the collision of muon bunches is orders of magnitude lower than in e^+e^- collisions, and hence the $\mu^+\mu^-$ collisions would be more monochromatic. These attributes could well prove decisive in selecting the technology of the lepton collider to follow LHC.

To achieve the desired luminosity, a MC will need a muon source capable of delivering $O(10^{21})$ muons per year within the acceptance of an accelerator. In addition to facilitating a MC, a muon source with this capability^b would also enable a new type of neutrino facility in which muons decaying in a storage ring with long straight sections produce a neutrino beam with unique properties. It has been shown that the resulting Neutrino Factory (NF) would deliver unparalleled performance in studying neutrino mixing and provide tremendous sensitivity to new physics in the neutrino sector. Both the MC and NF require similar—perhaps identical—front ends, and hence much of their associated R&D is in common.

Muon Collider and Neutrino Factory R&D has been supported in the U.S. for the last decade. The main R&D accomplishments include: *a*) the construction and successful

^a See http://www.science.doe.gov/hep/files/pdfs/P5_Report%2006022008.pdf

^bProspects for a MC and/or a NF in the U.S. have recently improved due to the possibility of launching an 8 GeV SC RF proton linac project (Project-X) at Fermilab, since the upgraded linac could serve as the required proton driver.

completion of an international proof-of-principle MC/NF high-power target experiment (MERIT); *b*) the launching of an international muon ionization cooling experiment (MICE); and *c*) a series of MC and NF design and simulation studies that have progressively improved the performance and cost-effectiveness of the simulated NF design and prepared the way for a corresponding MC end-to-end design and initial cost estimate. Neutrino Factory R&D is now being pursued by an international community that has launched the “International Design Study of a Neutrino Factory (IDS-NF)”, and aspires to deliver a Reference Design Report (NF-RDR) for a baseline design by 2012. The U.S. MC and NF R&D community is making key contributions to many aspects of the IDS-NF, with an emphasis on those common to both MC and NF designs. Since a MC requires a much more ambitious muon cooling scheme, MC R&D is less advanced. Present MC cooling channel designs employ components with assumed performance that in some cases has not yet been achieved.

The long-term MC development plan presented to P5 comprises three important steps toward bringing the high-energy physics frontier back to the U.S.: *i*) a study to demonstrate MC feasibility by 2013; *ii*) a subsequent program of muon beam demonstration experiments, component tests, and prototyping over the following 7–10 years; and *iii*) the start of MC construction in the early to mid 2020s. In parallel with this MC effort, the medium-term Neutrino Factory development plan presented to P5 comprises: *i*) completing the MICE experiment and participating in the IDS-NF to deliver a NF-RDR by 2012; and (assuming the community wishes to proceed) *ii*) pre-construction R&D for the next few years with an option to begin construction in the late 2010s. This document describes a proposal for a unified, national Muon Accelerator R&D program for the coming 5 years (2009–2013)—the first step in the plan presented to P5.

The main deliverables of the national Muon Accelerator R&D program will be:

1. A Design Feasibility Study Report (DFSR) for a multi-TeV MC including a physics and detector study that refines our understanding of the required performance and documents the associated physics reach, an end-to-end simulation of the MC accelerator complex using demonstrated, or likely soon-to-be demonstrated, technologies, a defensible cost estimate, and an identification of further technology R&D that should be pursued to improve the performance and/or the cost effectiveness of the design.
2. Component development and experiments that are needed to inform the MC-DFSR studies, and enable an initial down-selection of candidate technologies for the required ionization cooling and acceleration systems.
3. Participation in the International Neutrino Factory Design Study (IDS-NF) to produce a Reference Design Report (RDR) for a NF by 2012. The emphasis of the proposed U.S. participation is on: *a*) design, simulation and cost estimates for those parts of the NF front-end that are (or could be) in common with a MC; *b*) studying how the evolving Fermilab proton source can be used for the Neutrino

Factory RDR design; and *c*) studying how the resulting NF would fit on the Fermilab site.

The present annual level of support for all MC- and NF-related R&D in the U.S. is about \$7M. The projected funding for the 5-year program proposed here reaches about \$22M/yr, i.e., a threefold increase (see table below). With this increased support^c, we expect to demonstrate feasibility of the MC based on a credible design, an end-to-end simulation of the full accelerator complex, and a first cost estimate. We will also accomplish sufficient hardware R&D (RF, magnets, and cooling section prototyping) to guide, and give confidence in, our simulation studies.

Previous-year (FY08) support for the NF and MC R&D, and the requested level of support for the unified national 5-year plan of the Muon Accelerator R&D program.

	FY08	FY09	FY10	FY11	FY12	FY13
Effort (FTE)	37	48	79	81	79	43
SWF (\$M)	5.5	9	14	15	15	8
M&S (\$M)	1.6	4	7	7	6	4
Total (\$M)	7.1	13	21	22	21	12

The program is foreseen to comprise participants from the three sponsoring U.S. laboratories (BNL, FNAL, LBNL) and a number of other U.S. laboratories, universities and SBIR companies. Significant international collaboration with the UK, and with other countries, to understand, develop and exploit the accelerator science and technology of muon accelerators is also anticipated. Most of the support is envisioned to come from the DOE/OHEP Accelerator Science budget, with small (~12%) contributions from the DOE/OHEP Detector R&D budget and from the DOE SBIR/STTR and University grants.

By ~2013 we expect that new physics results from the LHC and from the next generation of neutrino experiments (Double Chooz, Daya Bay, T2K, and Nova) will be available. These will provide the worldwide HEP community with the knowledge it needs to identify which types of facilities are best suited to fully exploit the exciting new physics opportunities that will undoubtedly arise. In particular, we expect that the physics cases for both a multi-TeV lepton collider and a Neutrino Factory will be more fully understood in this time frame. Our proposed work will give clear answers to the questions of expected capabilities and performance of muon-based facilities, and will provide defensible estimates for their cost. This information will allow the HEP community to make well-informed decisions regarding the optimal choice of new facilities. We believe that this work is an absolutely critical part of any broad strategic program in accelerator R&D and, as the P5 panel has recently indicated, is essential for the long-term health of high-energy physics.

^cThe present level of support will only suffice to enable us to meet our existing commitments to the international R&D program, namely MICE and the IDS-NF, and to pursue a reduced-scope version of the RF R&D program described in our proposal.

1. INTRODUCTION

The physics potential of a high-energy lepton collider has captured the imagination of the world high energy physics community. Understanding the mechanism behind mass generation and electroweak symmetry breaking, searching for and perhaps discovering supersymmetric particles and confirming their nature, and hunting for signs of extra space-time dimensions and quantum gravity, constitute some of the major physics goals of a new lepton collider. In addition, making precision measurements of standard model processes will open windows on physics at energy scales beyond our direct reach. The unexpected is our fondest hope. The Muon Collider provides a possible approach to a multi-TeV lepton collider, and hence a way to explore new territory beyond the reach of present colliders. In addition, the Neutrino Factory has been shown to deliver unparalleled performance in studying neutrino mixing and has tremendous sensitivity to new physics in the neutrino sector.

We request support to continue Muon Accelerator R&D at an enhanced level, sufficient to enable us to deliver, within five years, (a) a Muon Collider Design Feasibility Study Report (MC-DFSR), (b) a NF Reference Design Report (NF-RDR), and (c) results from component development and proof-of-principle demonstrations sufficient to inform the design choices associated with the MC-DFSR and NF-RDR studies. The M&S and SWF support needed to conduct our proposed R&D program and the associated funding profile are presented in Appendix 1.

Muon Collider [1-4] and Neutrino Factory [5-11] accelerator complexes are shown schematically in Fig. 1. At the front-end both NFs and MCs require similar, perhaps identical, intense muon sources, and hence there is significant overlap in NF and MC R&D. The muon source is designed to deliver $O(10^{21})$ low energy muons per year within the acceptance of an accelerator, and consists of (i) a multi-MW proton source delivering a multi-GeV proton beam onto a pion production target, (ii) a high-field target solenoid that radially confines the secondary charged pions, (iii) a long solenoidal channel in which the pions decay to produce positive and negative muons, (iv) a system of rf cavities that capture the muons in bunches and reduce their energy spread (phase rotation), and (v) a muon ionization cooling channel that reduces the transverse phase space occupied by the beam by a factor of a few in each transverse direction. At this point the beam will fit within the acceptance of an accelerator for a NF. However, to obtain sufficient luminosity, a MC requires further muon cooling. In particular, the 6D phase-space must be reduced by $O(10^6)$, which requires a longer and more ambitious cooling channel. Finally, in both NF and MC schemes, after the cooling channel the muons are accelerated to the desired energy and injected into a storage ring. In a NF the ring has long straight sections in which the neutrino beam is formed by the decaying muons. In a MC, positive and negative muons are injected in opposite directions and collide for about 1000 turns before the muons decay.

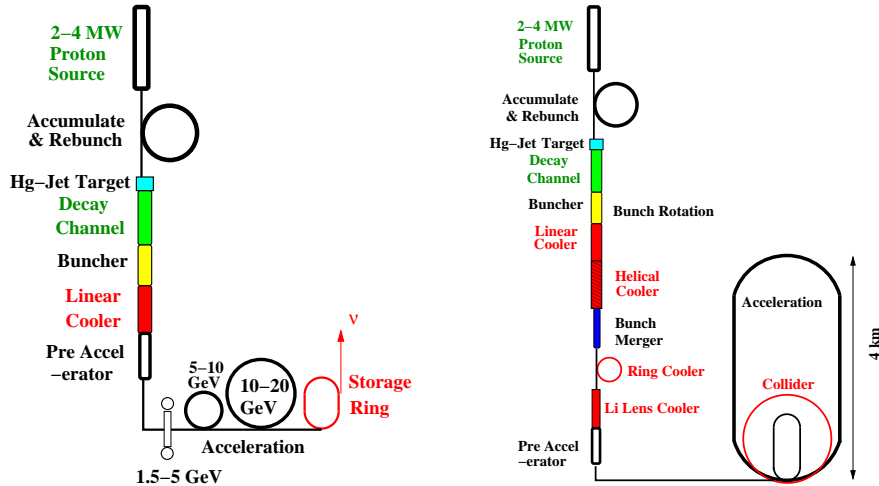


Fig. 1. (left) Schematic of 20 GeV NF; (right) schematic of 1.5 TeV MC.

The Neutrino Factory and Muon Collider Collaboration (NFMCC [12]) has been pursuing muon accelerator R&D since 1996. The initial work on the overall Muon Collider (MC) concept resulted in the “Muon Collider Feasibility Study Report” in June 1996 [3]. The Neutrino Factory (NF) concept emerged in 1997 [5]. Since 1997 the NFMCC has pursued both NF and MC design and simulation studies [4,6,9,10], together with component development and proof-of-principle demonstration experiments. In late 2006, the Muon Collider R&D effort was complemented by the addition of the Muon Collider Task Force (MCTF [13]) centered at Fermilab, but including participation from some NFMCC institutions and from the SBIR funded company Muons, Inc. [14]. The MCTF produced an initial R&D plan [15] in 2006, and a report [16] summarizing the first year of activities in January 2008. The focus of the MCTF studies has been on exploring designs and technologies for the 6D muon cooling channel needed (beyond the NF front-end) for a MC, and the design of the MC ring.

The NFMCC and MCTF programs are coordinated by the Muon Collider Coordinating Committee, which comprises of the leadership of the two groups. The muon accelerator R&D programs (NFMCC and MCTF) are reviewed annually by the Muon Technical Advisory Committee (MUTAC), which reports to the Muon Collaboration Oversight Group (MCOG), comprising members from the directorates of the three NFMCC sponsoring laboratories (BNL, FNAL, and LBNL). Following the review this year, and given the present status of the R&D, both MUTAC and MCOG have encouraged [17] the NFMCC and MCTF to produce a joint 5-year plan aimed at delivering a Muon Collider DFSR by 2013, together with an appropriate contribution to the IDS-NF effort to produce an RDR.

This request by MUTAC and MCOG was reinforced by the HEPAP P5 report (May 2008) : “...besides ILC, other lepton collider options with the potential for greater energy reach and reduced cost need to be developed. ...Additional R&D is also needed on longer-term concepts including the muon collider and laser- and plasma-based linear colliders. Each has potential for greater energy reach and significant cost savings, but all still require feasibility demonstrations...”

Recommendations :

The panel recommends a broad strategic program in accelerator R&D, including work on ILC technologies, superconducting rf, high-gradient normal-conducting accelerators, neutrino factories and muon colliders, plasma and laser acceleration, and other enabling technologies, along with support of basic accelerator science.”

The Report also emphasizes that : “...a muon collider may be an effective means to reach multi-TeV energies. A muon collider would be free of the beam effects that can limit an e^+e^- collider at very high energies and would have the potential for highly efficient conversion of site power to useful collision energy. Using muons instead of electrons also has the advantage that recirculating linacs could use the accelerating structures multiple times to provide energy to both particle beams simultaneously. The challenge for a muon collider is to produce, collect, cool and accelerate enough muons to provide the luminosity required to study new phenomena in detail. Recent studies using a jet of mercury in a strong magnetic field have demonstrated that such a target is capable of surviving a four-megawatt proton beam. This first step toward providing muons is very encouraging. The next step is the demonstration of cooling using a combination of ionization energy loss and dispersion in a low-energy, low-frequency, acceleration system. Support for R&D for this program has been very limited. Demonstrating its feasibility or understanding its limitations will require a higher level of support.”

2. PRESENT STATUS

We believe that NF R&D is now ready for an international effort to produce an RDR by 2012, and MC R&D is ready for a concerted effort to produce a DFSR on a 2013 timescale.

The Neutrino Factory design studies that have prepared the way for an RDR include (i) Feasibility Study 1 [6,7], which was hosted by FNAL in 1999 and resulted in an end-to-end design and simulation for a NF together with a first cost estimate, (ii) Feasibility Study 2 [9], which was hosted by BNL in 2001 and resulted in an improved design that increased the performance of the NF to meet the requirements established by the earlier physics study [7], (iii) Feasibility Study 2a [10, 11], which, based on work in the period 2002–2005, updated the Study 2 design to improve its cost effectiveness, reducing the estimated cost by about one-third while maintaining performance, (iv) the International Scoping Study (ISS) [18,19,20], which was an international NF study hosted by RAL in 2006 that established a baseline design (similar to the Study 2a design). Following the internationalization of NF R&D and the successful outcome of the ISS, the International Design Study of a Neutrino Factory (IDS-NF) is now under way. Participants of the IDS-NF [21] aspire to deliver a NF RDR by 2012.

In addition to the design and simulation studies, the NFMCC has pursued component development and proof-of-principle experiments that inform the design studies and

establish the viability of the proposed accelerator subsystems. NF feasibility studies 1 and 2 identified the systems requiring critical hardware R&D as:

1. a target that can be operated within a high field solenoid with a 4 MW primary proton beam, and
2. an ionization cooling channel in which rf cavities operate along with energy absorbers within a lattice of multi-Tesla solenoids.

The proof-of-principle MERCURY Intense Target (MERIT) experiment [22], designed and constructed by the NFMCC with its international partners, ran successfully at CERN at the end of 2007. MERIT has established the viability of using a liquid-mercury jet injected into a high field solenoid with a 4 MW proton beam suitable for a NF and/or MC. The Muon Ionization Cooling Experiment (MICE) [23] is an international multi-phase proof-of-principle experiment that is hosted by RAL. The MICE muon beam line is currently being commissioned, and the remaining components have been designed and are under construction, with the NFMCC contributing major pieces of the test channel and instrumentation. MICE is expected to be completed by 2011–2012.

Complementing the MICE cooling channel demonstration, the MuCool program has been developing and testing cooling channel components. In particular, a good understanding of the performance of rf cavities operating within multi-Tesla solenoidal fields is critical if we are to have confidence in the design of muon ionization cooling channels. MuCool measurements [24] have shown that normal conducting rf (NCRF) copper vacuum cavities break down at lower gradients in multi-Tesla magnetic fields. The measurements also indicate that surface preparation is important, and that, although not yet tested with beam, the breakdown effect may be mitigated by using high-pressure gas within the cavity. In addition, new ideas for “magnetically insulated” cavities and for using advanced surface treatments (i.e., atomic layer deposition, ALD) are promising. An important part of our proposed muon accelerator R&D plan is to vigorously pursue the rf R&D program to establish the viable options for high-gradient NCRF operating within magnetic lattices, and to measure the associated operational parameters.

MCTF and NFMCC researchers have made great progress in the design and simulation of a multi-TeV MC:

- a novel Interaction Region (IR) optics scheme has been proposed that allows significantly larger energy spread in the colliding beams than previously considered;
- muon beam dynamics in ILC-type 1.3 GHz superconducting rf cavities has been numerically studied;
- detailed modeling and particle tracking have been initiated for the three most promising ionization cooling channel approaches—the Helical Cooling Channel (HCC), the “Guggenheim” channel, and the “FOFO Snake” channel composed of tilted superconducting solenoids.

A significant program has been started to explore the upgrade parameters of the Fermilab 8 GeV “Project X” linac, which is an appropriate candidate for a high-intensity proton source for the MC and/or NF complex. Altogether, this progress has led to a widely-accepted vision of Fermilab’s long-term future in which the Muon Collider becomes the

next U.S.-based energy frontier facility. In addition, the MCTF group has designed and installed a 400 MeV proton beam line from the FNAL linac to the MuCool Test Area (MTA). That beam line, which is currently being installed, will enable a series of new experiments with high intensity beams in the MTA hall.

Anticipating success of the MICE and NCRF R&D programs, by 2012 the proof-of-principle tests for a NF front-end will be complete. In parallel, we propose to pursue the basic hardware R&D needed to inform the technical choices that must be made in designing a MC 6D cooling channel. This, together with a vigorous design and simulation activity, will enable a MC DFSR along with a first cost estimate. Hence, with proper funding support, by the end of 2013 we would have both a NF RDR and a MC DFSR.

3. MUON COLLIDER DFS PLAN

3.1 Physics and Detector Studies

In the next decade the physics of the Terascale will be explored at the LHC. Furthermore, planned experiments studying neutrino oscillations, quark/lepton flavor physics, and rare processes may also provide insight into new physics at the Terascale and beyond. This new physics might be new gauge bosons, additional fermion generations or fundamental scalars. It might be SUSY or new dynamics or even extra dimensions. In any case, it is hard to imagine a scenario in which a multi-TeV lepton collider would not be required to fully explore the new physics.

A multi-TeV muon collider provides a very attractive possibility for studying the details of Terascale physics after the initial running of the LHC. The goal of our proposed physics and detector studies is to understand the required muon collider parameters (in particular luminosity and energy) and map out, as a function of these parameters, the associated physics potential. The physics studies will set benchmarks for various new physics scenarios (e.g., SUSY, Extra Dimensions, New Strong Dynamics) as well as Standard Model processes. The development of the physics case will be coordinated with the studies of detector performance, the design of the interaction region, and studies of the background environment. This coordination will be required to determine the signal efficiencies and background rates.

During the first two years we will refine the physics case and the physics reach as a function of energy and luminosity of the collider. This will enable us to specify the baseline parameters for the collider before the final year of MC design studies. It is important to establish a software platform for the physics studies as early as possible and dedicated resources, both manpower and equipment, are needed. The physics case needs to have broad laboratory theory group involvement and support. The larger theory community also needs to be included in this effort. A series of workshops will be held to stimulate interest and ideas from the larger theory community. An initial report on the physics case should be completed in this period.

The last three years will be devoted to detailed physics studies, including a more complete detector simulation. In this period comparisons with other possible facilities, e.g., CLIC and SLHC, will be made. Any new information from LHC experiments on the physics at the Terascale will be incorporated and the physics case updated.

The detectors that will record and measure the charged and neutral particles produced in collisions at a Muon Collider are quite challenging. They must operate in an environment that is very different from that of the ILC or CLIC. Compared with hadronic interactions, lepton collisions generate events essentially free from backgrounds from underlying events and multiple interactions. They provide accurate knowledge of the center-of-mass energy, initial state helicity and charge, and produce all particle species democratically. Muon Collider detectors need not contend with extreme data rates. Most likely they can, in fact, record events without the need for electronic pre-selection and without the biases such selection may introduce.

The challenges for the detectors lie in the areas of precision, radiation hardness and background rejection due to the copious background from muon decays. To define the physics reach of the detector, a realistic simulation is needed, one that includes beamstrahlung, background from muon decays in flight, and a realistic evaluation of the bunch structure of the beams with time stamping. This would allow for realistic pattern recognition and track fitting of charged tracks. We foresee that in the first year setting up the simulation will take most of the effort. The simulation studies will be further refined and tools will be developed in the subsequent years to establish the physics reach.

As for vertex detectors and trackers, there is sufficient overlap of the requirements for the LHC upgrade experiments and the ILC experiments that we do not see any additional effort needed for the DFSR for the MC detector. We do, however, see a significant effort in establishing the required calorimetry for a Muon Collider detector. To mitigate detector backgrounds, previous Muon Collider final focus shielding designs resulted in an uninstrumented cone in the forward direction of 20° opening angle. Possibilities for limiting the opening angle or partly instrumenting this cone need to be explored.

Many of the interesting physics processes at a lepton collider appear in multi-jet final states, often accompanied by charged leptons or missing energy. The reconstruction of the invariant mass of two or more jets will provide an essential tool for identifying and distinguishing W s, Z s, H s, and top, and for discovering new states or decay modes. Ideally, the di-jet mass resolution should be comparable to the natural decay widths of the parent particles, around a few GeV or less. Improving the jet energy resolution to 3–4% of the total jet energy, which is about a factor of two better than that achieved at LEP, will provide such di-jet mass resolution. Achieving such resolution represents a considerable technical challenge. The main emphasis for ILC detectors is to employ “Particle Flow” to improve the jet energy resolution. It is unclear if this algorithm will retain this performance with jet energies increasing to 1 TeV and above. We anticipate that the majority of the detector R&D to be carried out is to establish the calorimetry for a

Muon Collider detector operating in a high background environment. A promising technology is dual readout total absorption calorimetry, which we expect to explore.

Our detector study plan is:

Year 1: Establish a realistic simulation of the Muon Collider background environment, and study the final-focus shielding design.

Year 2: Define detector requirements based on physics studies and expected backgrounds, and hence identify and plan the detector R&D that will best inform the DFSR studies, and then begin this R&D.

Years 3–4: Carry out detector R&D and further simulation studies, establishing the likely detector performance.

Year 5: Write the detector section of the DFSR.

3.2. Accelerator Design and Simulations

3.2.1 Overview

A major focus of NFMCC-MCTF activities is the design and simulation of the accelerator subsystems required by a multi-TeV muon collider. Here, we describe the accelerator design and simulation tasks that must be accomplished in order to complete a Muon Collider DFSR by 2013. The possibility of building a Muon Collider was first seriously considered by Budker, Skrinsky and their colleagues at Novosibirsk around 1970 [25]. Practical methods for implementing such a collider were studied by the U.S. Muon Collaboration¹ in the late 1990s [3,4]. The recent burst of activity in collider design studies was spurred by the creation of the MCTF at Fermilab in 2006 [26].

At the current time there are three overall scenarios for the MC accelerator systems that are under active investigation. These involve different choices for the desired collider parameters and for the design of the accelerator subsystems. These scenarios have come to be identified by their requirements for the transverse emittance in the collider ring as the low (LEMC), medium (MEMC), and high (HEMC) emittance muon colliders. Main parameters for these scenarios are listed in Table 1.

There are a number of reasons why multiple designs are being considered. Muons have well-known features that complicate the accelerator design. Foremost among these are their short lifetime and their diffuse production in pion decay. As a result, muon beams are generated with emittances and energy spreads that are enormous by conventional accelerator standards. Some of the differences in the collider scenarios reflect different assessments of the optimal choice of collider parameters, for example the number of muons per bunch or the pulse repetition rate. An important goal of the R&D program

¹ This is the original name for what later became the NFMCC.

Table 1. Parameters for a 1.5 TeV (c.m.) muon collider [26].

	LEMC	MEMC	HEMC
Avg. luminosity ($10^{34} \text{ cm}^{-2} \text{ s}^{-1}$)	2.7	1.33–2	1
Avg. bending field (T)	10	6	6
Proton driver repetition rate (Hz)	65	40–60	13
β^* (cm)	0.5	1	1
Muons per bunch (10^{11})	1	11.3	20
Muon bunches in collider	10	1	1
Norm. Transv. Emittance (μm)	2.1	12.3	25
Norm. Long. Emittance (m)	0.35	0.14	0.07
Energy spread (%)	1	0.2	0.1
Estimated muon survival (%)	31	20	7

outlined here is to characterize both the performance and cost of the various alternatives in order to select the most promising one for further exploration and optimization.

A crucial aspect of a Muon Collider is the massive use of ionization cooling, a technique never before used in an accelerator design. There is a lot of debate on the optimal design of muon cooling channels and on the technical feasibility of the magnets and rf cavities that must be used to reduce the muon emittance to the required levels. The feasibility of these channel designs is uncertain at present because it depends on experimental questions that have not yet been answered. The two most important examples are the limit on the gradient of normal-conducting rf cavities in strong magnetic fields and the possible breakdown of gas-filled rf cavities by intense muon beams.

3.2.2 Goals

As already noted, one of the major goals of the current R&D program is to select among the accelerator alternatives and decide on a single baseline collider design by 2012. To accomplish this, we anticipate the following steps:

- (i) Develop an end-to-end design for a multi-TeV MC that is based on demonstrated technologies and/or technologies that can be demonstrated after a specified R&D program. Identify and document the key R&D tasks.
- (ii) By means of end-to-end simulations (including beam-beam simulations to give luminosity estimates), demonstrate that the design will meet the required machine performance parameters. The subsystems simulated will be based on sufficient engineering input to ensure that the assumed design includes a reasonable level of realism (i.e., realistic gradients, magnetic fields, alignment tolerances, safety windows, spatial constraints, etc.). Simulations will cover proton driver, target, and all downstream systems up to and including the collider ring; beam transfers between systems will be included as part of the simulation.
- (iii) Document the baseline machine design, including required technologies,

description of subsystems, performance estimates (luminosity, cooling performance, backgrounds), and fabrication and installation approaches (sufficient for initial costing purposes).

3.2.3 *Schedule*

- 2009–2010 Study proposed alternatives for the accelerator subsystems.
 Simulate subsystem performance using defensible parameters.
 Cross-check promising subsystems with two simulation codes.
- 2011 Specify a baseline accelerator design and focus on optimizing it,
 minimizing work on non-baseline alternatives.
 Simulate representative matching sections.
 Carry out representative tolerance studies.
- 2012–2013 Complete the design of all matching sections.
 Freeze accelerator design.
 Do an end-to-end simulation of the accelerator systems.
 Do detailed tolerance studies.
 Do necessary simulations for the collider DFSR.

The estimated amount of effort involved in these tasks is included in Appendix 1.

3.2.4 *Proton driver design activities*

Our plan for the proton driver is to design facilities that will use beam from the Project X linac being proposed for Fermilab [27]. We assume here that a reference design for the baseline version of Project X will be prepared independently of our effort. Thus, we consider here only the additional effort needed to determine the modifications that must be made and the facilities that must be added to accommodate the requirements of a muon collider and/or a neutrino factory.²

Muon colliders and neutrino factories presently share common design concepts for the so-called front end facilities just downstream of the pion production target, where the collection and decay of the pions and the capture of muons into bunches occur. These designs impose identical requirements on the rms length of the proton bunches ($\sim 1\text{--}3$ ns). The pion/muon collection scheme depends upon the specified short proton bunch lengths, so that requirement is not likely to be relaxed.

Recent MC and NF designs also impose similar requirements on proton beam power (~ 4 MW). In particular, the three MC parameter sets and the ISS NF design all call for about this power level. The required beam power is unlikely to be a strong function of the center-of-mass energy of an energy-frontier MC. However, if the MC parameter sets turn

² It is our explicit intention to produce a flexible design for a proton complex that can meet the needs of whatever MC and/or NF designs may emerge from the activities described in this plan. Accordingly, proton facilities for both MC and NF will be discussed in this section.

out to be somewhat optimistic, the ability to upgrade beyond 4 MW would be a desirable feature of the proton facilities.

The baseline parameters for Project X currently call for a proton beam power of about 1 MW at 8 GeV. Thus, the intensity capability of Project X must be enhanced to deliver 4 MW for the muon facilities considered here. The Project X baseline design will attempt to preserve the possibility of doubling the repetition rate and the number of protons delivered per cycle. As discussed above, aiming for an even higher beam power than 4 MW would seem prudent. In cooperation with the Project X design team, we will explore upgrade options beyond the baseline parameters for the linac. Because the muon facilities may need even more than 4 MW of beam power, and because those facilities may benefit from high repetition rates, it will also be worthwhile to consider the technical implications of implementing the Project X linac as a CW device.

There is considerable variation among the designs in the rate of delivery of proton bunches to the target (~10–100 per second for the MC and 150–250 per second for the IDS baseline NF in bursts of three or five bunches from a basic 50-Hz cycle). It is obvious that the requirements on beam power, bunch length, and repetition rate, taken together, imply bunch intensities and peak bunch currents that will be difficult to achieve. Meeting those requirements, while also providing flexibility in the number and pattern of bunches per second delivered to the production target, is the major design challenge for the proton complex. We envision that two storage rings, an accumulator and a compressor, will be needed to provide the required flexibility.

In the following subsections, the major proposed subsystems downstream of the linac will be described briefly. The first step in the design effort for each subsystem will be to develop first-order design concepts: major parameters, layouts, beam optics designs and lattices, apertures and acceptances, rf requirements, and so forth. The next step will be to evaluate intensity-dependent effects such as space charge, electron cloud, and coherent instabilities via analytic calculations and computer simulations. Undoubtedly the third step will be to develop strategies to mitigate intensity-dependent effects, iterating if necessary on the designs. Finally, tracking studies including realistic errors will be carried out.

Accumulator. The first storage ring will accumulate many turns of linac beam via charge-stripping of the H^- beam. The incoming beam from the linac will be chopped to allow clean injection into pre-existing rf buckets to form the desired number of bunches. Painting will be necessary in the 4D transverse phase space and possibly also in longitudinal phase space. Very large transverse emittances must be prepared in order to control space-charge forces.

Compressor. The second storage ring will be used to accept one or more bunches at a time from the Accumulator. Then, a 90° bunch rotation in longitudinal phase space will be performed to shorten the bunches just prior to extraction. Of course, during this operation, the momentum spread will become large, of order 5%, so the ring must have a

large momentum acceptance. Also, the space-charge tune shift will be large when the beam is short.

The existing 8-GeV Fermilab Accumulator and Debuncher rings in the Antiproton Source are high-quality storage rings having the right energy and roughly the right circumferences. Furthermore, their apertures are large. They are, however, in a shallow tunnel, which probably obviates using them in their current location. Nonetheless, they might serve the purposes described here if they are relocated to a deeper tunnel.

Combiner. The combiner is a set of transfer lines and kickers downstream of the rings that can allow more than one bunch to arrive simultaneously at the pion production target. The first major subsystem, the “trombone,” sends bunches on paths of different lengths. The second subsystem, the “funnel,” nestles the bunches side-by-side on convergent paths to the pion production target. The schematic diagram in Fig. 2 illustrates the concept.

3.2.5 Target design activities

Much of the design work for the target facility was done as part of NF Studies 1 [6] and 2 [9] and remains valid. However, there is still work needed to flesh out the details of the target system. There are two aspects to this work, the first related to gaining enhanced understanding of the MERIT experiment [28] and the physics issues associated with the Hg-jet target, and the second related to the facility design issues. The second topic is covered in Section 4.2.

Simulations. In the next few years we will need to continue benchmarking the results of the MERIT experiment against detailed simulations of what was expected. Understanding the production rates, the disruption of the jet, and the magnetic field effects will be the key areas of concentration. This work will also need to be extended to the configuration anticipated for an actual NF or MC, which differs somewhat from the setup used in MERIT for logistical reasons. Simulation studies of nozzle performance will be carried out.

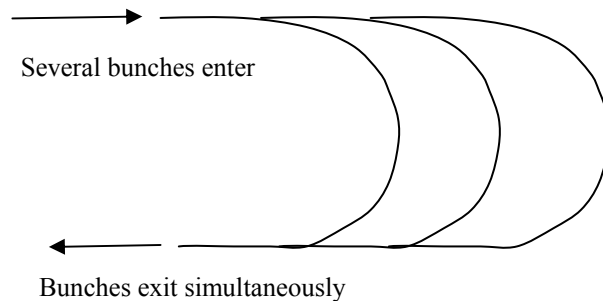


Fig. 2. A possible combiner concept to increase the intensity of proton bunches on the production target.

One aspect of the target system not covered in the MERIT experiment is that of interaction of the Hg jet and/or the proton beam with the Hg pool that serves as the beam dump. Another aspect of the Hg target system we intend to consider is defining and evaluating the efficacy of schemes to distill the mercury to reduce its radiation levels.

3.2.6 *Front end design activities*

Much of the current effort on the collider design is devoted to the “front end” subsystems. In all cases, the front end starts with a pion decay channel and a phase rotation channel to reduce the energy spread of the muon beam. Most of the rest of the front end comprises ionization cooling channels to reduce the emittance of the muon beam. The cooling starts with a precooler to reduce the transverse emittance. Positive and negative muons are then typically separated and sent through dispersive 6D cooling lattices to simultaneously reduce the transverse and longitudinal emittances.

The three collider scenarios we are presently investigating differ mainly in the details of how the cooling is carried out. The HEMC scenario uses a large-pitch helical channel known as the “Guggenheim” to do the 6D cooling. After sufficient longitudinal cooling, the beams are recombined and sent through a final cooling channel containing 50-T HTS solenoids that reduces the normalized transverse emittance to the level required by the collider. The LEMC scenario emphasizes additional cooling and a reduced number of muons per bunch. It uses a tighter-pitch helical cooling channel for 6D cooling and Parametric Ionization Cooling (PIC) and Reverse Emittance Exchange (REMEX) for the final cooling. The muon bunch trains are recombined at higher energy. The MEMC scenario uses parts of each of the previous two scenarios, together with a new idea for 6D cooling in a wiggler-like channel called the “FOFO-snake.”

Decay, bunching, and phase rotation. The first section of the front end captures the pions produced at the target, allows them to decay into muons, bunches the muon beam and reduces its energy spread. Two new alternatives need to be compared with Study 2a—the Neuffer 12-bunch scheme and the LEMC approach using high-pressure hydrogen-gas-filled rf cavities. The former scheme is suitable for either a NF or a MC. However, to assess its performance and cost it must be studied under more realistic assumptions that correspond to a practical implementation. There are several steps needed for this:

- replace continuous magnetic fields with an actual coil geometry
- use “families” of rf cavity frequencies rather than continuously decreasing frequencies where each cavity is different
- include absorbers and rf windows in the simulation
- examine an alternative magnetic lattice having partially bucked fields to reduce the field on the rf cavities
- check the sensitivity to errors of the final configuration

Precooling. A first stage of transverse cooling is useful before separating the muon charges and sending the muon beams into the 6D cooling channels. Two main alternatives are being studied as a possible replacement for the Study 2a cooling channel. These are:

- a Study 2a channel with hydrogen gas absorbers in place of the LiH rf windows
- a LEMC configuration³, which uses liquid hydrogen and no rf in a momentum-dependent helical cooling channel

Although the transverse emittance of the muon beam is very large after the capture and phase rotation sections, it may be possible to use quadrupole magnets for focusing in the first cooling channel. This will be studied briefly to see if it is feasible and if it offers any advantages over solenoidal focusing.

6D cooling. The bulk of the muon cooling is done in the 6D cooling channels. There are three main 6D cooling schemes for the collider. Additional subsystems for charge separation and charge recombination are required, and low-energy bunch merging may also be needed. The three schemes [29] include the Guggenheim channel, the helical cooling channel (HCC), and the FOFO-snake channel.

The Guggenheim channel uses a large-pitch helical lattice. This approach has been under study for a number of years, but much remains to be done. Code must be developed and comparisons must be made between alternative ways of modeling the fields in ICOOL, either using 3D field maps or a multipole expansion. The benefits of a “tapered”⁴ channel must be assessed. Matching sections must be designed and realistic parameters for absorbers and windows must be used in the simulations. Performance will be checked using both ICOOL and G4beamline. If magnetic shielding is needed between “turns” in the lattice, its effect must be evaluated. Also, an evaluation of a configuration with magnetically insulated cavities will be made. To make sure collective effects are benign, we will model space-charge effects at the end of the channel. Finally, an exploration of error sensitivity will be carried out.

A tightly pitched helical cooling channel (HCC) made up of a series of solenoids with their centers arranged along a helical path is also under active investigation [30]. The implementation of such a channel with embedded rf cavities is challenging. A model incorporating realistic cavity parameters will be developed and tested via simulations. A model of the helical magnet must also be developed and its properties incorporated into the simulations. This work is already under way. Matching sections between the HCC and the rest of the front end need to be designed and simulated. Overall optimization of the entire system must be carried out. Here too, we will model space-charge effects at the end of the channel to make sure collective effects are benign, and we will explore error sensitivity. As this system is pressurized with H₂ gas, we will need a structural analysis of the isolation windows and a detailed safety analysis.

³ Our SBIR partner, Muons, Inc., is studying this design.

⁴ By “tapering” we refer to changes in lattice parameters along the cooling section that reduce the equilibrium emittance of the downstream portions compared with the early part of the channel. This enables the beam emittance always to remain well above the equilibrium emittance—a condition that results in optimal cooling efficiency. Such an approach, used to advantage in Study 2, is only possible in a single-pass channel.

The FOFO-snake channel consists of a series of tilted, translated solenoids following a straight path [31]. It acts like a planar wiggler and has the great advantage that both muon charges can be cooled in the same channel. There are several possible implementations of this design to study, including a gas-filled cavity version, a vacuum cavity version, and a magnetically insulated version. The other activities required to assess this approach are the same as those for the other cooling channel options, namely, studies of matching sections, space-charge effects, and error sensitivity.

The helical cooling channels (HCC and Guggenheim) can only transmit muons of a given charge. In these scenarios the muons must first be separated and then recombined after the 6D cooling is finished. Various approaches, including dipole splitters and bent solenoid versions, will be designed and compared. Error sensitivity will be examined.

The HEMC scenario combines each muon bunch train produced in the decay and phase rotation section into a single bunch in the collider partway through the 6D cooling section. Various alternatives for low-energy bunch merging will be explored, including the use of planar wigglers and helical wigglers. A lattice based on magnetically insulated cavities will also be examined. All comparisons will consider error sensitivity.

Final cooling. One of the most challenging goals in the collider design is to get a final normalized transverse emittance on the order of 2–25 $\mu\text{m-rad}$. The strategy used in the cooling channel design is to end the 6D cooling section when the longitudinal emittance is well below the value needed by the collider. Then, either “brute force” transverse cooling or reverse emittance exchange can be used to obtain the required transverse emittance. Four alternatives are being considered for the final stage of cooling. Some schemes use an additional subsystem for high-energy bunch merging.

The 50-T channel uses a straight lattice of very high field HTS solenoids to do the final cooling [32]. Development of this channel requires an optimization of the lattice parameters for various assumed maximum values of the solenoid strength. Lattices must also be matched on both ends and these sections need to be designed and simulated. Collective effects, especially space charge, will be examined, as will magnetically insulated cavities. The selected design will be subjected to an error sensitivity study to validate its performance.

Muons, Inc. is studying the use of parametric resonance together with ionization cooling in a solenoid lattice to produce a very low emittance beam [33]. This scheme also incorporates a final stage of reverse emittance exchange [34]. Several different lattices for PIC (Parametric Ionization Cooling) and REMEX (Reverse Emittance Exchange) will be developed and studied, including aberration-corrected versions and magnetically insulated versions. In each case, matching sections will be designed and channel performance will be simulated, including space-charge effects and the effects of errors.

A third idea for final cooling uses a solenoid lattice operating in a parameter regime where the minimum of the beta function lies at the center of the focusing solenoids. This configuration can produce very small beta functions and naturally allows the addition of

bucking coils to minimize the magnetic field present at the rf cavities. We will design and simulate cooling in a straight lattice, and investigate alternative designs that incorporate dispersion. We will also design the required matching sections, and look at space-charge effects and the effects of errors.

The idea of using a lithium lens channel for the final cooling has been considered since the first MC designs. This is currently being studied by the UCLA group. A straight cooling lattice incorporating lithium lenses must be designed and simulated. Designs for the necessary matching sections must be developed. Space-charge effects and the effects of errors need to be investigated.

In the LEMC scenario, all cooling is done on a muon bunch train. This train is accelerated to high energy before being merged to a single bunch. The bunch recombination ring must be designed and simulated [35]. Injection and extraction systems and transfer lines must be designed and simulated, as must the rf gymnastics to accomplish the bunch merging. The sensitivity to errors must be studied.

End-to-end simulation. One of the major goals for the MC DFSR is to carry out an end-to-end simulation of the whole front end of the collider. This will require that we join all the baseline subsystems into a single model in ICOOL as well as in G4beamline. Then we will make high statistics runs through the full channel. The results from ICOOL and G4beamline will be compared and any discrepancies resolved. We will study the sensitivity of the results to the physics models used in the simulations. We will also study the sensitivity of the performance to the hardware parameters. Muon polarization that is produced in the channel will be assessed, since that may have an effect on the physics produced by the collider. The effects of space charge will be studied at critical locations using a dedicated space-charge code.

Front end code development. The codes ICOOL and G4beamline have been the major tools for designing the front end systems. We will continue to maintain and make minor improvements in these codes. More major changes in the codes will be made as necessary to investigate the performance of the subsystems discussed previously.

RF system. Two of the major uncertainties in the front end design at the moment are the breakdown characteristics of normal conducting rf cavities in strong magnetic fields, and the possibility of beam-induced breakdown of gas-filled rf cavities. There are plans for studying both of these subjects experimentally (see Section 5.2.1), although definitive results may not be available until the end of 2009. As a precaution, we are investigating a number of methods to interpret the experimental results and to ameliorate the problem if it does occur. To understand the experimental results we need to simulate beam breakdown in gas-filled cavities and develop a model of breakdown in vacuum cavities. Understanding breakdown may require detailed space-charge simulations. To ameliorate the possible effects, we are investigating:

- the application of SCRF processing techniques to copper cavities
- using atomic layer deposition to prevent the cavity from breaking down
- designing bucked coil lattices that minimize magnetic fields on the cavities

- designing a magnetically insulated cavity where \vec{B} is perpendicular to \vec{E} .

3.2.7 Acceleration design activities

After cooling, the muon acceleration systems must increase the muon kinetic energy from 140 MeV to, say, 750 GeV at the collider.

Acceleration to high energy. A choice must be made regarding the scenario for acceleration. We assume, as a starting point, a beam accelerated by some variant of the acceleration scenario for a NF, possibly with an additional stage or stages added. The power in the final muon beam is substantial, and thus the efficiency of the acceleration system is an important consideration. A decision must be made among a number of possible scenarios summarized below.

The advantage of a synchrotron for acceleration is that it allows a large number of passes through the rf cavities, reducing both the capital and operating costs of the machine. The challenge is that this acceleration approach requires rapid variation of the magnetic fields [36]. While it may be possible to do this, a short ramping time requires magnets with very thin laminations in order to manage eddy currents. Such “synchrotron” designs are often a variant of a true synchrotron design, in the sense that the fields do not increase uniformly with momentum. A mixture of fixed-field superconducting and ramped warm magnets has been suggested. It must be verified that the rapid changes in the conventional magnets do not induce quenches in the adjacent superconducting devices. It may be necessary to modify the way the magnets ramp to ensure that the beam remains synchronized with the rf. Studying this acceleration scenario will include:

- producing complete lattice designs that accelerate to the desired final energy
- performing engineering studies on the magnets to determine their feasibility and cost
- studying the requirements for the rf systems

A recirculating linear accelerator (RLA) is a straightforward option for accelerating to high energies [37]. Its primary disadvantage is the practical limitation on the number of passes the beam can make through the linac due to the complexity of the switchyard. The study of this acceleration scenario will involve:

- creating lattices that will accelerate to the final energy, including the spreader and recombiner sections
- studying the requirements for the rf systems

Acceleration for a muon collider has had limited study up to this point. In addition to the two scenarios described above, a number of alternative scenarios could be considered. One is to combine the above two options, creating an RLA that uses fast-ramping magnets, allowing for a greater number of passes. Using FFAGs, as has been proposed for a NF, is another possibility. This choice is potentially advantageous, since FFAGs generally become more efficient at higher energy. Another choice is to incorporate a linac

used in the proton driver into the muon acceleration chain. Simulation studies will be used to determine which alternatives have the potential to be most cost effective. For purposes of comparison, we will produce designs for any interesting alternatives at a comparable level of detail to the other systems.

Low-energy acceleration. The low-energy portion of the acceleration chain (up to 50–100 GeV) will likely be accomplished with techniques similar to those in a Neutrino Factory (and perhaps even using the systems from an existing NF). To design this portion of the MC facility we will

- study to what extent the NF acceleration system is suitable for the MC
- make any necessary modifications to the NF acceleration scenario
- include additional similar stages to the NF acceleration scenario where that would be advantageous

Transfer line designs. As for a Neutrino Factory, the MC acceleration system requires transfer lines between acceleration stages and between the final acceleration stage and the collider ring. These transfer lines will each be designed to optimize the phase-space distribution for injection into the next system in the chain.

Single-particle simulations. The beam must be tracked through the entire acceleration system, from cooling up to the collider ring. It is likely that some code development will be needed to achieve this.

Collective effects. Because the intensity of a coalesced bunch for the collider will be quite high, collective effects constitute a potential operational limitation. There are several such effects to consider, and these must be simulated to assess their impact on performance.

Although the muon beam spends only a short time in the accelerator complex, its individual bunches have a substantial charge, and impedance-driven collective effects are likely to be important. For acceleration, the major contribution to the impedance will be the rf cavities. For the MC parameter regime, the charge in a single bunch is large enough to extract a substantial fraction of the stored energy from one of these cavities. As this is a nonstandard operating regime, we must study its beam dynamics implications. We will study the effect of short-range wakes, probably the most important effect, as well as long-range wakes.⁵ We will also consider the effects of having both signs of muons in the machine simultaneously.

Most acceleration scenarios envisage having both muon signs in the same accelerator. The bunches will thus collide parasitically many times during acceleration. The large bunch charge means that the crossings could substantially perturb the beam, so the importance of this must be quantified.

⁵ These will primarily concern fundamental-mode beam loading, but could be affected by cavity higher-order modes as well, so both aspects need investigation.

There is often a question of whether two-stream instabilities (electron cloud, fast-ion) are important in these machines. They are not expected to be so, due primarily to the large amount of time between bunch passages (since there are only a small number of bunches), but this must be verified.

3.2.8 Collider ring design activities

The final part of the MC facility is the collider ring, where the muon beams collide at low-beta interaction points. The proper design of this ring is a prerequisite for the success of the whole project. The design of the interaction region is strongly tied to the design of the detector. Close collaboration between the accelerator and detector groups will be necessary to achieve an acceptable outcome. There are currently three ring designs under consideration. Two of the designs assume high normalized transverse emittance ($\sim 12\text{--}25\ \mu\text{m}\text{-rad}$) in the collider [38]. They differ in the location of the closest dipole to the interaction point (IP) and the arrangement of the sextupole families. The other ring design, for the LEMC scenario, assumes a low normalized transverse emittance of $2\ \mu\text{m}\text{-rad}$.

The goal of these studies is to develop a lattice design that provides:

- parameters necessary to achieve the design average luminosity ($2 \times 10^{34}\ \text{cm}^{-2}\ \text{s}^{-1}$ at $0.75+0.75\ \text{TeV}$), including
 - $\beta^* < 1\ \text{cm}$ in the case of 2 IPs
 - low momentum compaction, $|\alpha_c| < 1 \times 10^{-4}$, in order to obtain an rms bunch length below $1\ \text{cm}$ (i.e., $\sigma_\ell < \beta^* < 1\ \text{cm}$) with moderate rf voltage
 - small circumference $C \sim 3\ \text{km}$ (since luminosity scales as $1/C$)
- momentum acceptance ($0.5\text{--}1\%$) and dynamic aperture sufficient to accommodate a muon beam with the emittance expected from the upstream channel
- reasonable tolerances on field strength, field quality, and alignment errors
- stability of coherent motion of bunches containing $1\text{--}2 \times 10^{12}$ muons
- compatibility with the detector and with protecting the magnets from secondary particles

Work on collider lattices must go hand-in-hand with the magnet, superconducting rf, and detector studies. It includes the steps indicated below:

Analysis of basic solutions. We need to carry out basic lattice design studies of the interaction region (IR), taking into account the constraints due to quadrupole gradients and practical magnet apertures. We need to examine various chromatic correction schemes, such as special correction sections versus local correction within the IR. We need to study the trade-offs of using FODO cells versus achromats for the arcs. We will also examine the performance trade-offs of having one versus two IRs.

Lattice composition and matching. Complete ring lattices need to be designed including special matching sections, injection, collimation, and beam abort.

Design of chromaticity and nonlinear detuning correction circuits. The chromaticity needs to be studied in higher order and the design of the correction schemes needs to be optimized.

Dynamic aperture. The muon beams need to circulate in the collider ring for ~1000 turns. Tracking studies will be made taking into account the effects of magnet imperfections (strength, field quality, and alignment errors) and beam-beam interactions.

Simulation of secondary particle fluxes and detector backgrounds. Placing dipoles and quadrupoles near the IR has a significant effect on the backgrounds in the detector. Conversely, the design of the detector constrains the location and size of the IR magnets. In order to find a mutually acceptable solution, we will iterate on the IR and detector designs.

RF system. We need to design, analyze, and simulate the rf system. We will optimize the design of the accelerating structure, including a higher-order-mode (HOM) analysis. We will then perform wakefield and impedance simulations to evaluate the requirements for HOM damping and/or feedback systems.

Auxiliary systems. We will develop detailed scenarios for closed-orbit correction and explore other tuning algorithms suitable for these short-lived beams. We will examine the suitability for muon beams of the injection, beam abort, and collimation systems.

Coherent effects. We need to calculate the impedance budget and do a stability analysis of the coherent motion of the muon beams.

3.3 Cost Estimation

One of the required tasks in preparing for the MC DFSR is to obtain a cost estimate for the facility. At the stage of development reached by 2013, it is expected that the cost estimate will use a “component-level” approach as opposed to the more detailed “bottom-up” approach. As the first step in this process, a Work Breakdown Structure (WBS) must be set up. Table 2 shows a preliminary WBS scheme that will be used to begin the design and cost-estimating process.

To estimate the resources required to obtain the cost estimate we make several assumptions:

- The WBS will be organized by accelerator system, as indicated in Table 2
- The cost exercise will primarily occur in 2013, after the machine design is frozen
- There will be 1–2 engineers “consulting” part time throughout the design effort

The estimated effort level is summarized in Table 3. The total effort required is approximately 8 FTE integrated over the period from 2009–2013.

Table 2. Initial MC WBS scheme.

WBS	Title
1	Muon Collider Accelerator Complex
1.1	Proton Driver
1.1.1	Ion Source
1.1.2	Beam Transport
1.1.2.1	LEBT
1.1.2.2	MEBT
1.1.2.3	Linac to Target
1.1.3	Linac
1.1.3.1	Cryomodules
1.1.3.2	RF source
1.1.3.3	Instrumentation
1.2	Target Station
1.2.1	Hg jet system
1.2.2	Capture and Decay Channel
1.3	Front End
1.3.1	Bunching
1.3.2	Phase Rotation
1.3.3	Initial Cooling Section
1.3.4	6D Cooling Section
1.3.5	6D to 4D Matching Section
1.3.6	Final Transverse Cooling
1.3.7	Matching to Linac
1.4	Acceleration System
1.4.1	Linac
1.4.2	RLAs
1.4.3	Final Acceleration
1.4.4	Ring Injection Line
1.5	Collider Ring
1.5.1	Magnets
1.5.2	Vacuum
1.5.3	Instrumentation
1.6	RF Systems
1.6.1	NCRF
1.6.2	SCRF
1.6.3	Power Source
1.7	Control System
1.8	Conventional Facilities
1.8.1	Tunnels
1.8.2	Above-ground Support Buildings
1.9	Project Management

4. NEUTRINO FACTORY RDR PLAN

The Neutrino Factory facility study is at a much more advanced stage than that for the Muon Collider. To date there have been four studies of the Neutrino Factory: Study 1 [6] (sponsored by FNAL), Study 2 [9] (sponsored by BNL), Study 2a [10] (organized as part of the APS Neutrino Physics Study) and the International Scoping Study (ISS) [18] (sponsored by CCLRC⁶ in the UK). However, for the Neutrino Factory to be a realistic option for the field requires the continuation of an energetic R&D program leading to the publication of a Reference Design Report in 2012. Among the strengths of the ISS were an integrated, international collaboration and an integrated approach to the study of the accelerator complex, the neutrino detectors, and an evaluation of the physics performance of the facility. These elements are being continued in the International Design Study for

⁶ CCLRC has now been merged into a new UK funding organization, the Science and Technology Facilities Council (STFC).

Table 3. Engineering effort required to support the MC DFSR activity. Ongoing contributions will be involved in the project for 5 years; the remaining persons are assumed to participate only during 2013, after the accelerator design is frozen.

Specialty	FTE	Ongoing?	Total (FTE-yr)
Sr. Mech. Eng.	0.2	Y	1.0
Sr. Electr. Eng.	0.2	Y	1.0
Proj. Eng.	1.0	N	1.0
Vacuum Eng.	0.5	N	0.5
PS and Diagnostics Eng.	0.5	N	0.5
Plant Eng.	1.5	N	1.5
RF Eng.	1.0	N	1.0
Cryogenics Eng.	0.5	N	0.5
Controls Eng.	0.5	N	0.5
Magnet Eng.	0.5	N	0.5
Survey and Alignment Eng.	0.2	N	0.2
ES&H specialist	0.2	N	<u>0.2</u>
TOTAL			8.4

the Neutrino Factory (the IDS-NF), which brings together the various national and regional Neutrino Factory design teams.

The primary goals of the IDS-NF are to:

- deliver a Reference Design Report for the NF accelerator complex and its neutrino detectors by 2012
- estimate the cost of the facility at the +50–75% uncertainty level
- identify possible staging scenarios
- consider possible sites for the accelerator complex and neutrino detectors, taking into account, where appropriate, the existence of suitable infrastructure

Specifications for the accelerator systems developed by the Accelerator Working Group of the ISS are described in [18]. A schematic diagram of the ISS baseline is shown in Fig. 3 and the main parameters of the various subsystems are defined in Table 4. The baseline specification for the stored muon energy is 25 GeV and the facility will deliver a total of 10^{21} useful muon decays per year. The baseline specification for the storage rings is that both signs of muon can be stored simultaneously.

The detector for the Neutrino Factory is optimized for the search for leptonic CP violation, the determination of the mass hierarchy, and the measurement of θ_{13} through the detection of the “golden channel” ($\nu_e \rightarrow \nu_\mu$). In order to accomplish this, two detectors located at different baselines are employed. A detector with a fiducial mass of 50 kton is located at an intermediate baseline (3000–5000 km) and a second detector of fiducial mass 50 kton is located at a long baseline (7000–8000 km). The longer baseline presents some challenging underground engineering issues for the muon storage ring that points in this direction. These issues will be discussed below.

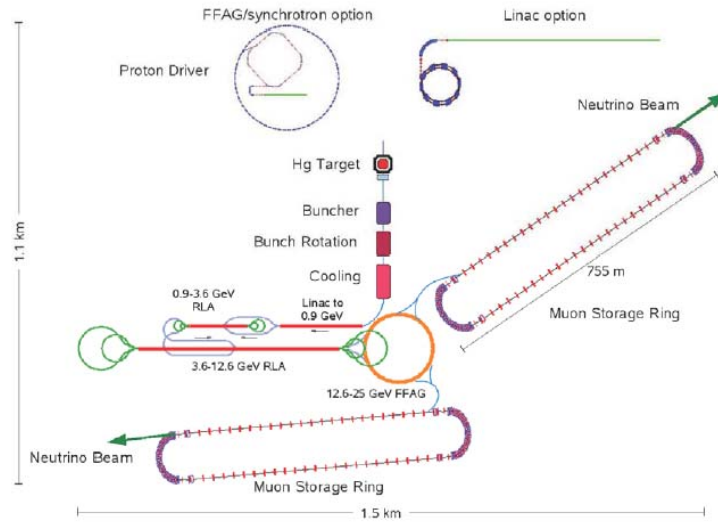


Fig. 3. Diagram of the IDS-NF baseline NF configuration.

The U.S. contribution to the IDS-NF will focus on the following areas:

- Proton driver
- Targetry and target stations
- Pion capture and muon phase rotation
- Ionization cooling
- Accelerator systems
- Site-specific underground engineering issues for the muon storage rings
- Magnetization concepts for neutrino detectors

The first four items are expected to be identical (or very similar) to the corresponding facilities needed for the Muon Collider complex and are covered in more detail in Section 3 of this document. Of course, since we are developing a Reference Design Report for the Neutrino Factory, our work on these topics must meet the needs of the NF RDR with respect to specifics and will thus go into more depth than would be required for a DFSR.⁷

4.1 Proton Driver

U.S. participants in the IDS-NF will explore a NF proton driver based on the Project X linac design being developed at Fermilab. As noted earlier, the incremental effort required for the U.S. contribution to the IDS-NF proton driver design will be to coordinate with the Project X design team to determine possible modifications to the facility that would be needed to meet the requirements of the NF (while also meeting the specifications demanded by the MC). It is expected that small rings for bunch manipulation will be necessary for the NF and their design and specifications (compatible

⁷ Only the costs for this “incremental” effort are counted here.

Table 4: Baseline parameters for the subsystems that make up the Neutrino Factory accelerator complex. The principal interface parameters are shown in bold face.

Baseline specification for the Neutrino Factory accelerator complex			Version	
Sub-system	Parameter	Value	2007/1.0	
Proton driver	Average beam power (MW)	4		
	Pulse repetition frequency (Hz)	50		
	Proton kinetic energy (GeV)	10 ± 5		
	Proton rms bunch length (ns)	2 ± 1		
	Number of proton bunches per pulse	3		
	Sequential extraction delay (μ s)	≥ 17		
	Pulse duration, liquid-Hg target (μ s)	≤ 40		
Target: liquid-mercury jet	Jet diameter (cm)	1		
	Jet velocity (m/s)	20		
	Solenoidal field at interaction point (T)	20		
Pion collection <i>Tapered solenoidal channel</i>	Length (m)	12		
	Field at target (T)	20		
	Diameter at target (cm)	15		
	Field at exit (T)	1.75		
	Diameter at exit (cm)	50		
Decay channel	Length (m)	100		
Adiabatic buncher	Length (m)	50		
Phase rotator	Length (m)	50		
	Energy spread at exit (%)	10.5		
Ionisation cooling channel	Length (m)	80		
	RF frequency (MHz)	201.25		
	Absorber material	LiH		
	Absorber thickness (cm)	1		
	Input emittance (mm rad)	17		
	Output emittance (mm rad)	7.4		
	Central momentum (MeV/c)	220		
	Solenoidal focussing field (T)	2.8		
Acceleration system	Total energy at input (MeV)	244		
	Total energy at end of acceleration (GeV)	25		
	Input transverse acceptance (mm rad)	30		
	Input longitudinal acceptance (mm rad)	150		
	<i>Pre-acceleration linac</i>			
	<i>RLA(1)</i>	Final total energy (GeV)	0.9	
	<i>RLA(2)</i>	Final total energy (GeV)	3.6	
	<i>NFFAG</i>	Final total energy (GeV)	12.6	
		Final total energy (GeV)	25	
	Decay rings	Ring type	Race track	
Straight-section length (m)		600.2		
Race-track circumference (m)		1,608.80		
Number of rings (number of baselines)		2		
Stored muon energy (total energy, GeV)		25		
Beam divergence in production straight (γ^{-1})		0.1		
Bunch spacing (ns)		≥ 100		
Number of μ^\pm decays per year per baseline		5×10^{20}		

with the Project X design) will be included in the NF RDR. Because the main design effort will be driven by the MC requirements, and is therefore covered in the MC portion of this proposal (see Section 3.5), we consider here only the small effort needed to contribute NF-specific design information for the NF-RDR.

4.2 Targetry and Target Station

As was mentioned earlier, the MERIT experiment was a great success and sets the foundation for the high-power target for the facilities that we are studying. The design of the target station itself is already at a relatively advanced stage from the work done in NF Studies 1 and 2. With the input from the MERIT experiment, the U.S. contribution to the IDS-NF in this area will be on more advanced simulations to set definitive benchmarks for the NF/MC target system.⁸

The second aspect of this task will be to make the next iteration on the facility design (following the ORNL/TM-2001/124 technical report) and to develop engineering details of component parts of the system such as the target solenoid. There are particular aspects of the facility design that bear further examination. These include assessment of designs for the upstream and downstream containment windows through which the beam must pass, defining a workable remote-handling scheme for changing components in this highly radioactive area, and design of the water-cooled tungsten carbide inner shielding area. Based on the concepts being developed for other parts of the accelerator complex, it will be worthwhile to consider the implications for the target facility of utilizing HTS conductor for some portion of the hybrid target solenoid. The HTS material tends to be very radiation resistant—a potential advantage in the target environment.

4.3 Pion Capture and Muon Phase Rotation

After the target station, the front end of the NF must capture the pions, allow them to decay into muons, bunch the muons and then reduce the muon bunch energy spread. At our present level of understanding of the Neutrino Factory and the Muon Collider, we believe that a single design of the capture, bunching and phase rotation systems can accommodate the requirements of both facilities. For the NF-RDR, we will deliver an engineering design for the front end that will include magnet designs, a discrete (stepped-frequency) RF system, and a realistic representation of all absorbers and windows utilized in the system.

4.4 Ionization Cooling Channel

The baseline muon ionization cooling system for the NF is the Study 2a cooling channel. Compared with the earlier Study 2 design (to be tested in MICE), the baseline channel takes advantage of design improvements in the downstream acceleration systems that permit a larger emittance beam to be transported. The main difference between the present baseline and the Study 2 version is that we now employ a simpler LiH absorber design instead of a LH₂ absorber.

⁸ At present, we believe that the NF and MC target station designs are identical.

As noted, MICE is testing the Study 2 cooling channel, which uses LH₂ absorbers and provides more cooling, but at higher cost. Plans for the MICE experiment call for also investigating LiH absorbers, which will be of great value to the IDS-NF effort. Indeed, results from the MICE experiment will play a seminal role in defining the engineering specification for the cooling channel in the NF RDR.

In addition to our baseline configuration, we intend to study two alternatives:

- hydrogen gas absorbers in place of LiH
- the helical cooler concept

If, in the early stages of our design study, either of these concepts shows promise of giving advantages in either performance or cost over the baseline, we will investigate it more thoroughly for the NF RDF and would switch our technology choice if appropriate. Any such decision must be finalized by 2011 at the latest.

4.5 Accelerator Systems

The design of the NF acceleration systems is already at a relatively advanced stage. A detail of the acceleration scenario is given in Fig. 4 and consists of:

- a pre-accelerator linac (0.14 to 0.9 GeV)
- a 4.5-pass, 0.6 GeV per pass RLA (0.9 to 3.6 GeV)
- a 4.5-pass, 2 GeV per pass RLA (3.6 to 12.6 GeV)
- a non-scaling FFAG (12.6 to 25 GeV)

Within the IDS-NF, the main U.S. contribution will be to prepare an engineering design foundation including the following aspects:

- Definition and design of beam lines or lattices for
 - Linac
 - RLAs
 - FFAG
- Development of full component lists and detailed specifications for each system
- Studies of beam loading in FFAGs

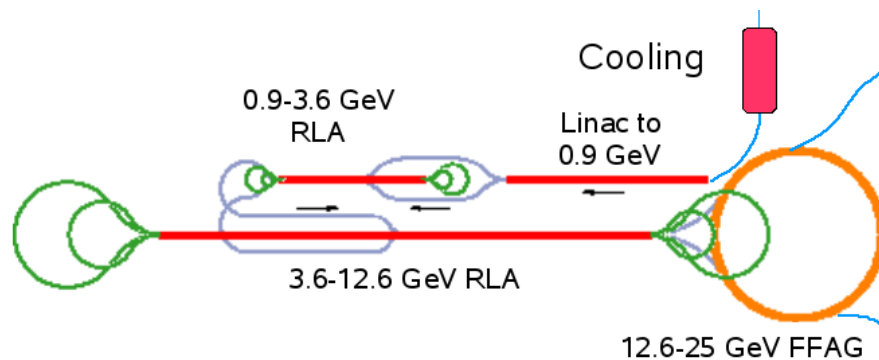


Fig. 4. IDS-NF Baseline acceleration scenario.

- Resolution of physical interferences, e.g., beam line crossings, by developing floor coordinates for major components

4.5.1 201 MHz rf cryomodules

The acceleration system makes use of 201-MHz superconducting cavities. Studies of suitable manufacturing and processing techniques will be carried out, initially using 500 MHz model cavities, which can easily be tested at Cornell or Jlab. Initial tests of atomic layer deposition (ALD) techniques⁹ to reduce dark current emission have been encouraging and these will be pursued. Because of their large size, fabricating 201-MHz superconducting cavities from bulk Nb is very unattractive. Explosion-bonded Nb on copper looks like an attractive possibility and is already under study at Cornell.

R&D on cryomodule design will also be pursued as resources permit. Quantifying the impact of fringe fields on cavity operation is an area where we would like to make progress, as it has a big impact on component spacing, and hence acceleration system costs.

4.6 Site-Specific Underground Engineering for the Decay Ring

Due the size (755 m) of the muon decay ring and the steep angle ($\sim 30^\circ$) at which it must point to aim at the long-baseline (7000–8000 km) detector, the underground engineering aspects of such a design are formidable. One component of the U.S. contribution to the IDS-NF will be to study the siting of such a facility at Fermilab.

4.6.1 Construction scope and definition of underground engineering

Assumptions to be used for defining the construction project scope include:

- All underground structures (tunnels, caverns, and intersections) will be of “modest span” (between 2 and 4 m in width).
- At least some of these underground facilities will be aligned on steep gradients, at depths up to 0.5 km below grade
- A design brief can be generated in-house at Fermilab, with support from the collaboration and laboratory ES&H, and accomplished in a six-month period. The brief will be relatively simple, consisting of an initial set of single-line drawings showing the underground space envelopes and a list of key as-built requirements consistent with the technical needs and conventional infrastructure.
- In-house supervision will be utilized for the duration of field work.¹⁰

To fully develop the underground engineering R&D plan, we will convene an expert panel comprising a senior representative with a design contractor background, a senior

⁹ Developed at ANL and tested at Jlab.

¹⁰ 1 FTE for one year.

representative with a construction contractor background, and an independent technical consultant.

Although the Fermilab site has some very positive attributes, there are also some significant issues that will need to be addressed in the NF RDR. These include:

- isolating the facilities from the regional aquifers
- limitations due to rock fall occurrence
- enhancing the tunnel floor stability
- identification of “best existing” or development of improved methods to mine rock on steep slopes

Carrying out the engineering effort outlined here during the early years of concept development of the project will not only help reduce the construction cost, duration and contingency, but will also help limit the number of design iterations.

The twelve tasks identified in Table 5 will accomplish the following:

- define the *in situ* ground conditions to the full project depth (Tasks 1–6)
- identify adverse ground behaviors, and provide a rationale for selecting design and construction options (Tasks 7–8)
- support the development of a basis-of-estimate and perform a first-order cost, schedule, and risk analysis (Tasks 9–11)
- Provide expert recommendations for further study and design work (Task 12)

4.7 Magnetization Concepts for Neutrino Detectors

All detector concepts for the Neutrino Factory require a magnetic field in order to determine the sign of muon (or possibly the electron) produced in a neutrino interaction. For the baseline detector, this is done with magnetized iron. Technically, this is very straightforward, although for the 50 kton baseline detectors it does present challenges

Table 5. Tasks for underground engineering effort.

Task	Description
1	Preparation of design brief
2	Best value procurement of geo-engineer and expert contractors
3	Geological desk studies
4	External review to support scoping of follow-up work
5	Best value procurement of a geotechnical engineering and drilling contractor
6	Geotechnical field and laboratory studies
7	Ground characterization
8	Constructability/optimization review
9	Basis-of-estimate review
10	Best value procurement of an underground estimating contractor
11	Independent cost and schedule development
12	Summary of findings and recommendations

because of their size. The cost of this magnetic solution is believed to be manageable.

Magnetic solutions for other NF detectors will be much more challenging. We have considered magnetizing volumes as large as $60,000 \text{ m}^3$ for a liquid-argon detector or a totally-active scintillator detector (TASD). For the cases of the TASD and the LAr approach currently being studied by U.S. and Canadian groups, providing the required magnetic volume with 10 solenoids of roughly 15 m diameter \times 15 m length has been considered, with the solenoids configured into a magnetic cavern as shown in Fig. 5. We considered a number of field strengths, and chose the baseline to be 0.5 T.

The problem with building very large conventional superconducting solenoids is that 90% of the cost goes into the cryostat, which must withstand enormous vacuum loading forces. We avoid this problem in our design by using the superconducting transmission line (STL) concept that was developed for the Very Large Hadron Collider superferric magnets [20]. The solenoid windings thus consist of a superconducting cable that is confined in its own cryostat. Each solenoid comprises 150 turns and requires about 7500 m of cable. There is no large vacuum vessel and, since the STL does not need to be close-packed in order to reach an acceptable field level, access to the detectors can be made through the winding support cylinder. As part of the IDS-NF RDR we will include work on this magnet concept. The scope will include:

- redesign of a superconducting transmission line for this application
- conceptual design of a full-scale (15 m diameter) 3-turn prototype
- engineering design and procurement for a prototype STL device
- assembly and commissioning of the prototype
- prototype test and evaluation

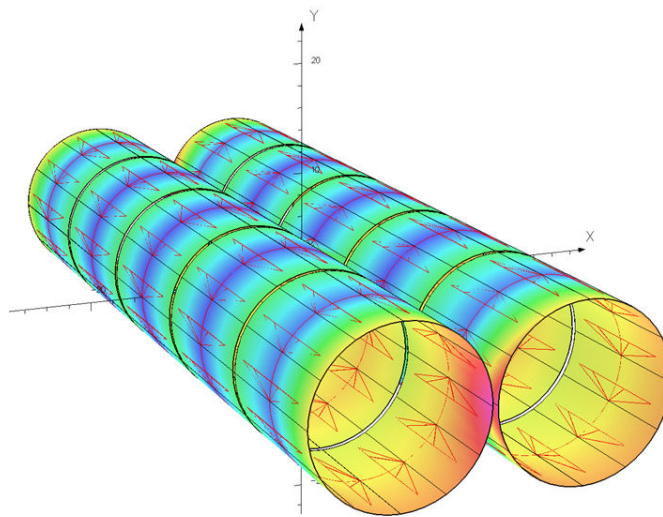


Fig. 5. Magnetic cavern configuration.

5. COMPONENT DEVELOPMENT AND EXPERIMENTS

The goal of our proposed component development and experimental R&D program is to:

- establish the viability of the concepts and components used for the MC-DFSR and NF-RDR designs,
- establish the engineering performance parameters that can be assumed in the design studies, and
- provide a good basis for cost estimates.

The component R&D will also provide a basis for the post-DFSR R&D tests and experiments (not part of this proposal) that will be needed before a MC can be built.

With the successful completion of the MERIT target experiment, the main outstanding technical challenge that is common to both NF and MC front-ends is to demonstrate the viability and performance of the technologies needed for a transverse ionization cooling channel. The MICE experiment at RAL will provide the key demonstration of the operation of a short cooling channel section, and we consider it a high priority to complete this experiment in time to inform both the NF-RDR and the MC-DFSR.

The main additional challenge that must be met for a successful MC-DFSR is to arrive at a design of an appropriate 6D cooling channel that is based on technologies and parameters in which we have confidence. At present, there are several candidate cooling channel designs that are being studied. All these designs rely on rf cavities operating in strong magnetic fields that confine the muons within the channel and provide radial focusing. Our MuCool R&D program has demonstrated that the maximum gradients achievable in normal conducting vacuum rf cavities made of copper are reduced when the cavity is operated in axial magnetic fields of a few tesla. Hence, before a cooling channel technology can be selected for the MC-DFSR design (or for the NF-RDR design) it is important to provide a proof-of-principle demonstration of the operation of the rf cavity in the particular magnetic field configuration for the assumed cooling channel, and to establish its maximum achievable rf gradient. Once we have demonstrated one or more rf solutions, the next step will be to build and bench-test short cooling sections. This will inform the DFRS cooling channel simulations by ensuring that the practical engineering constraints that affect performance are understood, by establishing viable cooling channel parameters, and by providing a good basis for cooling channel cost estimates. The bench-test experiments will also prepare the way for an eventual (post-DFSR) 6D cooling channel demonstration experiment.

5.1 MICE

The Muon Ionization Cooling Experiment (MICE), which is hosted at Rutherford Appleton Laboratory in the UK, has been designed and is being constructed, commissioned, and operated by an international collaboration in which NFMCC institutions play a crucial role, contributing to every aspect of the experiment.

5.1.1 The MICE Program

The goals of MICE are to:

- engineer and build a section of cooling channel (of a design that can give the desired performance for a Neutrino Factory) that is long enough to provide a measurable ($\approx 10\%$) cooling effect, but short enough to be moderate in cost;
- use particle detectors to measure the cooling effect with an absolute accuracy of 0.1% or better;
- perform measurements in a muon beam having momentum in the range 140–240 MeV/c, in which particles can be tracked individually, one particle every 100 ns or more.

The MICE apparatus is shown schematically in Fig. 6. It consists of an upstream instrumentation section to precisely measure incoming muons, a short cooling channel section consisting of absorbers and rf cavities in a solenoid lattice, and a downstream instrumentation section to precisely measure the outgoing muons. The MICE apparatus can be viewed as a quite general test-bed for ionization cooling ideas. The ionization-cooling lattice cell comprises eight superconducting coils that can be variously powered to create “super-FOFO” [9] (field direction alternating each half-cell) or solenoid-type (field direction constant) optics, and the currents can be tuned to characterize cooling performance with a variety of beta functions. The MICE goals require that this be done in order to validate the Monte Carlo simulations that are used to design such cooling channels.

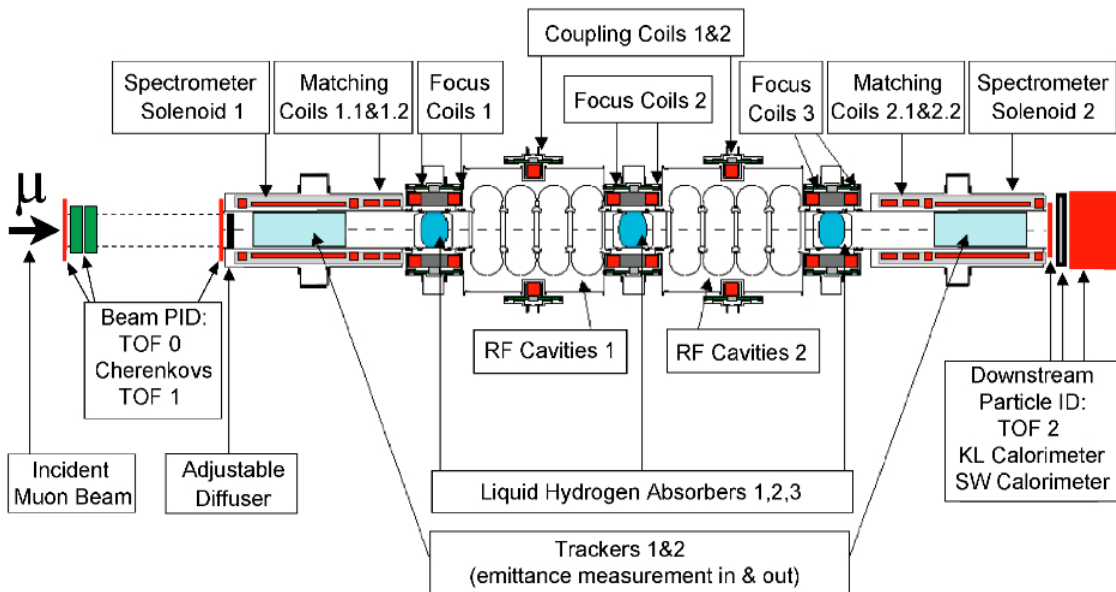


Fig. 6: Schematic drawing of MICE apparatus, comprising a muon beam line at left (not shown), particle-identification systems, and input and output spectrometers surrounding a single ionization-cooling lattice cell.

MICE is located in a new purpose-built muon beam at the ISIS synchrotron. Preparing for MICE has required the development and installation of a tunable pion/muon beam line as well as a target that can be dipped into the ISIS beam as needed. These are now in place, and the process of installing and commissioning the beam and particle-identification instrumentation is under way. The MICE cooling channel will be gradually built up and commissioned over the next several years as indicated schematically in Fig. 7. This stepwise approach has the virtue of allowing the measurement systematics to be thoroughly evaluated and optimized. We anticipate that MICE will be completed by the end of 2011. At this time, a transverse cooling channel suitable for a NF would have been demonstrated, and MICE results will be used to inform the NF-RDR. Beyond this initial MICE program, there is the possibility of using the MICE apparatus to begin to explore some aspects of 6D cooling that are relevant to the design of MC cooling channels, and that can inform the MC-DFSR studies.

A simple test of the six-dimensional ionization-cooling concept can be made by inserting a wedge absorber (composed, e.g., of LiH) into a beam having suitable dispersion, and measuring the effect on the beam. This may be possible in MICE either by tuning the incoming beam so as to produce the desired dispersion or by selecting out of the distribution of incoming muons an ensemble that has dispersion matched to the

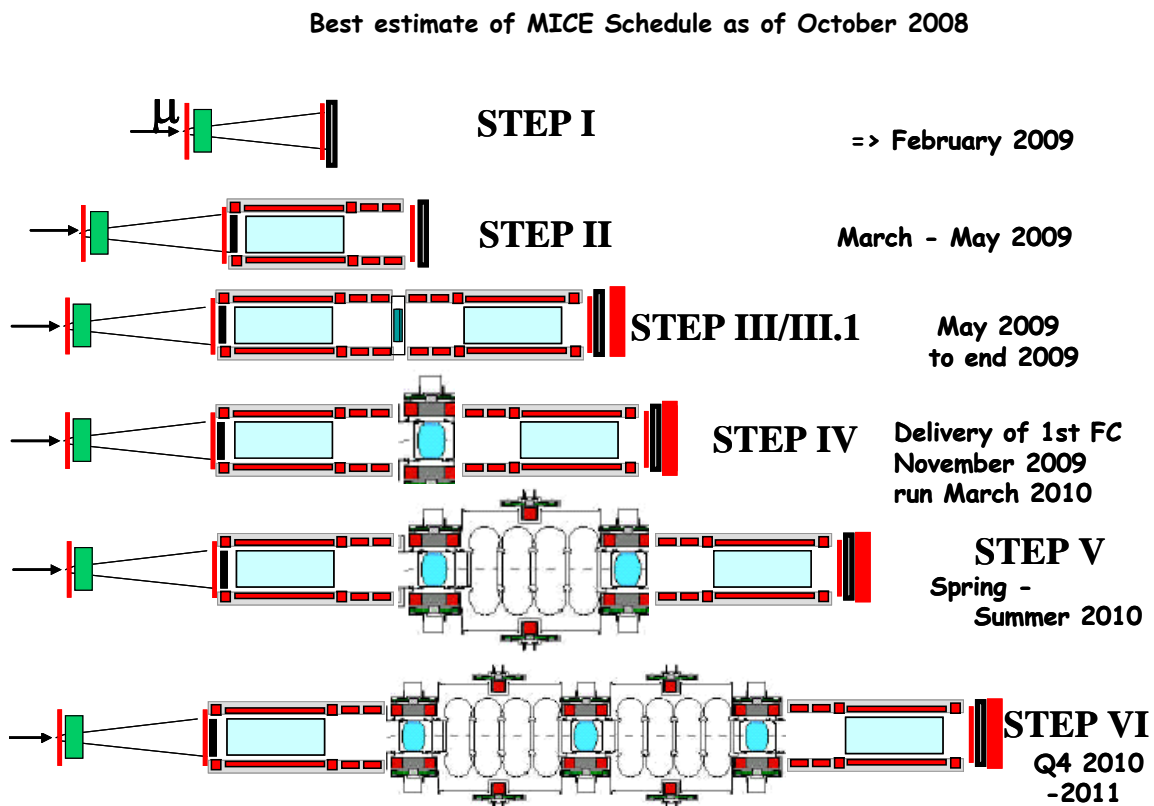


Fig. 7. Projected schedule of MICE experiment at RAL, showing stepwise execution of the experiment.

configuration of the wedge absorber. This concept needs further study to evaluate both its feasibility and the degree to which it could constitute an incisive demonstration of six-dimensional cooling.

The official MICE US deliverables are:

- Spectrometer solenoids (2), including engineering, fabrication, testing, and field-mapping
- Assembly of scintillating-fiber planes (15) for fiber-tracking spectrometers
- AFE-III readout boards, VLPCs, and VLDS interface modules for fiber-tracking readout
- Design, fabrication, and commissioning of VLPC cryostats (4) for fiber-tracking spectrometers
- Fiber-tracking readout system integration and commissioning
- Fabrication, installation, and commissioning of two Cherenkov counters
- RFCC modules (2), each comprising 4 rf cavities and 1 coupling coil
- Scintillating-fiber beam position/profile monitors (4 planes)
- Design and fabrication of LiH absorbers
- Beam line optimization
- Participation in MICE operations and analysis

5.2 RF Systems

5.2.1 *Cooling channel rf*

As already mentioned, cooling channels typically rely on rf cavities operating in high magnetic fields, so it is crucial to demonstrate that the technology is feasible and reliable. There are currently four potential paths to achieving the required high gradients in multi-tesla magnetic fields for normal conducting rf cavities:

- Treating cavities with superconducting rf cleaning techniques has shown positive results. A 201 MHz MuCool cavity was processed with electro-polishing and high pressure rinsing and tested in the MuCool Test Area (MTA) at Fermilab. The cavity reached its design gradient with essentially no conditioning. Tests are expected in the coming year to establish whether this cavity can be operated with sufficiently high gradient while immersed in a multi-tesla magnetic field. If the results prove promising, further testing on an 805-MHz model of the 201-MHz cavity is planned, as well as testing of a 201-MHz prototype cavity for a 6D-cooling channel.
- Treating cavities with atomic layer deposition (ALD) consisting of monolayer chemical deposition of various materials on cavity surfaces. Initial tests of a superconducting cavity coated with 5 nm of ZrO₂ plus 30 nm of Pt were performed at Jlab. The ALD treatment greatly reduced the dark current while

maintaining the achievable cavity gradient. The next step will be to test a similarly treated normal conducting cavity in a magnetic field to evaluate its performance. To this end, we anticipate building an 805-MHz cavity for ALD coating and testing in the 5-T solenoid at the MTA. If the results are positive, a prototype 201-MHz cavity for a 6D-cooling channel will be ALD processed and retested. The durability of ALD must also be determined.

- “Magnetic insulation” is a recently considered approach for reducing cavity breakdown. By arranging the magnetic field to be parallel to the high-gradient surfaces, it is expected that the emitted electrons can either be inhibited from leaving the surface or be guided to surfaces in regions of low gradient, thereby suppressing breakdown. A study of cavity breakdown in a magnetic field as a function of field direction using a rotatable cavity is needed to provide a test of this concept. If successful, this initial test would be followed by the design, construction and testing of an 805 MHz cavity incorporating magnetic insulation.
- It has been demonstrated that a cavity pressurized with ~100 bar of hydrogen gas (High Pressure rf, HPRF) has suppressed breakdown up to gradients approaching 60 MV/m, and that this performance is not affected by magnetic fields. However, such a cavity has never been tested with beam. In pure hydrogen, ionization electrons will remain in the gas for a significant portion of the rf pulse, being accelerated back and forth by the rf fields, and transferring the electromagnetic energy stored in the cavity to the gas through collisions. Depending on the intensity of the incident beam, the Q of the cavity could be reduced by several orders of magnitude. It is likely that introducing another gas species may capture these free electrons. However, a good candidate gas has not yet been found. (SF_6 is frozen at LN_2 temperature, and also may form hydrofluoric acid.) In addition, it must be demonstrated that the large numbers of ions created do not present a problem. A beam test of a HPRF test cavity is presently being prepared at the MTA. If successful, this initial test would be followed by the design, construction and testing of a prototype 805-MHz HPRF cavity having entrance and exit windows more suitable for beam passage.

In addition to investigating these specific paths, which will be done in the first two years of the proposed program, the exploration of alternative cavity materials and surface coatings using replaceable buttons in a dedicated test cavity will continue. Striking qualitative differences in materials have already been observed, although initial attempts to quantify the resistance of alternative materials to breakdown damage in the presence of high magnetic fields have been compromised by continued breakdown elsewhere in the copper test cavity. In particular, the beryllium components in the cavities are remarkably undamaged even after heavy arcing, and other high-strength, high-melting point materials appear to be similarly resistant. New test cavities capable of exploring the conditioning limit with higher surface fields and more stored energy may provide quantitative differences and reveal which physical properties best correlate with breakdown resistance in vacuum cavities.

5.2.2 Superconducting rf

Once the muon beams are cooled sufficiently to fit into the acceptance of a “conventional” accelerator, SRF technology is an attractive choice for rapid acceleration at high gradients. These acceleration stages are a significant cost driver in a Neutrino Factory or Muon Collider. Studies to date have assumed gradients and Q values demonstrated using sputtered coatings of niobium on copper, as was used successfully at LEP and elsewhere. Recent promising results using ALD and energetic condensation indicate the possibility of producing high quality “bulk-like” niobium thin films, and, more tantalizingly, the possibility of creating superconducting compounds that are hard to form by traditional methods. These developments should lead to higher available gradients with better efficiency (higher Q_0), improving overall muon yield and reducing rf power and structure costs. To realize these gains the five-year plan will include tasks to evaluate and optimize these promising coating technologies on small samples, test cavities and, finally, full-featured low frequency cavities with realistically large surface area.

In the final stages of acceleration for a Muon Collider, the beams may fit inside conventional high-frequency accelerating structures. However, the high bunch intensity, especially if bunches are merged, will place extreme demands on the superconducting rf technology. Structures optimized for this application will be needed, including such features as increased stored energy, low wakes, and high power handling capability. Given the long gestation time of new superconducting rf structures and ancillary systems, the development of these optimized structures must begin now.

5.3 Magnets

Neutrino Factory and Muon Collider accelerator complexes require magnets with quite challenging parameters. In particular, the cooling channel cost and performance will be determined in part by magnet costs and by the fields that can be reasonably delivered in the high-field solenoids at the end of the cooling channel. The magnet R&D that we propose carrying out to inform the MC-DFSR consists of

- (i) HTS solenoid R&D to assess the parameters that are likely to be achieved
- (ii) HCC magnet R&D to assess the feasibility of this type of cooling channel and eventually build a demonstration magnet for an HCC test section (see Section 5.4.2)
- (iii) open mid-plane dipole magnet R&D to assess the viability of this magnet type for the collider ring
- (iv) other magnet studies to inform choices, parameters and cost estimates for the target-station solenoid and accelerator magnets.

5.3.1 High-field cooling channel solenoids

Very high field solenoids with on-axis fields in excess of 30 T and apertures on the order of 50 mm may be part of the baseline design for the MC final cooling channel. HTS

technology for such magnets has been demonstrated in the 20 T regime, but it needs to be extended to higher fields with good field quality, and with reliable construction at a reasonable cost.

Thus, the goals for our proposed HTS magnet R&D are:

- (i) based on initial HTS conductor and magnet R&D, establish the R&D issues that must be addressed before high-field ($B > 30$ T) HTS solenoids can be built that are suitable for the low-emittance sections of a muon cooling channel, and hence
- (ii) assess the likelihood that suitable high-field HTS solenoids will be available within a few years and, if so, their likely cost and performance.

More explicitly, we would

1. Develop with accelerator designers a set of functional specifications for a high-field solenoid, including aperture, length, body and end field quality, alignment, field strength range, power requirements (conventional and hybrid), and cost.
2. Summarize the ongoing status of conductor properties (HTS, A15, Nb-Ti, normal strands, and cables), including maximum current density vs. field (and field direction for tapes) and temperature; longitudinal, bending, and transverse stress/strain tolerances; quench protection and cooling requirements; cabling capabilities and performance; and conductor insulation materials. Also, as needed and not otherwise supported by existing data or the proposed national HTS program, evaluate new conductors and insulation materials.
3. Develop conceptual designs for magnets that meet our specifications from task 1 and conductor properties from task 2. Investigate magnetic, mechanical, magnet cooling, power and quench protection issues of HTS and hybrid designs.
4. Build and test representative HTS and hybrid-insert models to develop and demonstrate HTS coil technology and performance, and to study magnetic, mechanical, thermal and quench properties.
5. Based on the results of tasks 1–4 present a plan (conceptual design, time, effort, cost) to build a 1-m-long >30 T solenoid in 2013–2015.

5.3.2 Helical cooling channel magnets

The helical cooling channel requires a solenoid with superimposed helical dipole, quadrupole, and sextupole fields. A novel approach is to use a helical solenoid (HS) to generate the required field components. The basic concept (see Fig. 8) is to use short circular coils, equally spaced along the z axis, with the center of each coil shifted in the transverse plane so as to follow the helical beam orbit. Because the orbit is tilted relative to the coils, they simultaneously generate longitudinal and transverse field components.

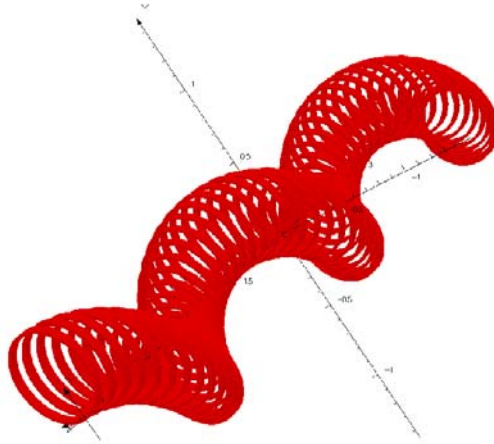


Fig. 8. Geometry of displaced solenoids that form a helical cooling channel.

In contrast to an earlier concept using a large bore magnet, where the longitudinal and transverse field components were controlled by independent windings, this small bore system has a fixed relation among all components for a given geometry. Thus, to obtain the necessary cooling effect, the coil must be optimized together with the beam parameters.

In order to produce a practical helical cooling channel, several technical issues need to be addressed, including:

- magnetic matching sections for downstream and upstream of the HCC
- a complete set of functional and interface specifications covering field quality and tunability, the interface with rf structures, and heat load limits (requiring knowledge of the power lead requirements)

To prepare the way for an HCC test section we would:

- Develop, with accelerator designers, functional specifications for the magnet systems of a helical cooling channel, including magnet apertures to accommodate the required rf systems, section lengths, helical periods, field components, field quality, alignment tolerances, and cryogenic and power requirements. The specification will also consider the needs of any required matching sections.
- Perform conceptual design studies of helical solenoids that meet our specifications, including a joint rf and magnet study to decide how to incorporate rf into the helical solenoid bore, corrector coils, matching sections, etc.
- Fabricate and test a series of four-coil helical solenoid models to develop and demonstrate the coil winding technology, pre-load and stress management, cooling, and quench protection for low-field sections based on Nb-Ti and/or Nb₃Sn cable. The proposed timeline for these studies is:
 - Nb-Ti model based on SSC cable and hard-bend winding in 2009

- Nb-Ti models using easy-bend winding and indirect coil cooling in late 2009

In addition, a set of hybrid Nb₃Sn-HTS superconductor coils may be developed for the high-field sections. This work would be supported by SBIR funding.

- Develop and test a “short” (one-quarter to one period) demonstration helical solenoid section capable of housing rf cavities in a cryostat (i.e., a helical cooling cryomodule). The associated timeline for this would be:
 - Conceptual design in 2010
 - Engineering design and construction and test in 2011–2012
 - Results of magnet test to be in time for MC-DFSR in late 2013

5.3.3 Collider ring magnets

The collider ring will consist of arc dipoles, quadrupoles, correctors, and interaction region dipoles and quadrupoles. The arc dipoles should operate at high field in order to keep the ring circumference small, providing a larger number of crossings for a given number of stored muons. These magnets must also operate in a high radiation and high heat load environment resulting from the muon decay electrons, which are preferentially swept into the magnet mid-plane. In order to avoid quenches, limit the cooling-power requirements, and maintain an acceptable magnet lifetime, the superconducting coils must be protected from excessive energy deposition due to these decay electrons. Similar considerations apply to the arc and IR quadrupoles.

Despite the unique operating conditions of the MC, many of the basic magnet R&D issues are similar to those presented by other high-energy accelerators. In particular, high operating field and large energy deposition are required for the LHC energy and luminosity upgrades. Therefore, the muon collider R&D effort in this area will be coordinated with ongoing development of high-field dipoles and quadrupoles for the LHC. In addition, some of the fundamental materials issues (high-field superconductors, radiation hardness, thermal margins, structural materials, electrical insulation, etc.) are common to different types of magnets, such as dipoles for the collider and solenoids for muon cooling. Therefore, materials R&D can and should be effectively organized through an integrated effort supporting various magnet R&D areas for the MC as well as other accelerator projects.

Two approaches have been considered in previous dipole designs:

- use of a thick absorber surrounding or internal to the vacuum chamber and protecting the coils
- a magnet design that moves the superconducting coils away from the mid-plane

The former approach requires a large magnet aperture, while the latter presents considerable challenges in terms of efficiency of field generation, mechanical support, and field quality.

The R&D effort for the collider magnets will include design analysis, technology development, and prototype fabrication. Its main sub-tasks will be to:

1. Compare design options for the arc dipoles, and identify a baseline magnetic, mechanical, and thermal design. This activity will benefit from previous studies of conventional and open mid-plane designs carried out for the NF as well as the LHC “dipole-first” IR upgrade scheme.
2. Compare design options for arc and interaction region quadrupoles to select a baseline design. Similar to the dipole case, options previously considered include large bore designs with thick liners and designs where the conductor is removed in the mid plane. Conventional quadrupoles have also been considered, as most of the decay energy can be absorbed by a cooled absorber outside the quadrupole.
3. Provide consistent sets of magnet parameters (aperture, length, integrated strength, tolerances on field errors) taking into account the radiation deposition issues; these will be used as input for machine optimization.
4. Define and implement technology tests in support of magnet design and prototyping. These may include mechanical models, sub-scale coil tests, experiments to determine thermal margin and radiation lifetime, materials characterization, etc. This effort will also take advantage of collaborations with other ongoing R&D efforts (such as LHC upgrades) to carry out larger scale tests.
5. Design the main magnetic elements (arc dipoles and quadrupoles, and IR quadrupoles) to a level sufficient to support preliminary cost estimates.
6. Provide cost estimates for further R&D and prototyping, and preliminary cost envelopes for magnet production.¹¹

5.3.4 *Cost models*

Magnets will be one of the significant cost drivers for the MC. We have identified above those magnets that will require R&D in order to demonstrate that they will be ready in the MC time frame. Many of the other magnet designs can be borrowed or extrapolated from existing designs or from general magnet experience.

Our plan is to develop a cost model algorithm to apply to those magnets whose designs can be based on previous or ongoing accelerator design studies, and then use it for the MC. In addition, we will develop a catalog for all magnet elements, including categorizing magnets of like function to facilitate cost studies.

¹¹ More accurate estimates of production costs will be provided after prototype fabrication and testing.

5.4 Cooling Section Tests and Experiments

Approximately one year before the completion of the MC-DFSR, we anticipate making a choice of which cooling channel scheme to adopt for the baseline design, end-to-end simulation, and costing. The various candidate cooling schemes will become more or less attractive as viable options depending on the results of the rf tests described in Section 5.2. We anticipate critical results from the rf tests in the first two years of our R&D program, at which time we will proceed with building a short cooling section for one cooling scheme. The cooling section would be tested in the MTA to determine its viability and operating parameters. In the following, we assume that one 6D cooling section will be built and tested—either a Guggenheim channel using magnetic insulation, SC treatment and/or ALD, or a Helical Cooling Channel using HPRF. For completeness, we describe the two most likely candidates in Sections 5.4.1 and 5.4.2, respectively.

5.4.1 *Guggenheim test section*

The R&D path that would lead to a test of a Guggenheim section with magnetically insulated normal conducting rf cavities using superconducting cavity treatment techniques plus ALD is as follows:

Year 1–2: Successful 805-MHz cavity tests separately demonstrating the effects of superconducting cavity treatment, ALD, and/or the effect on maximum achievable gradient from magnetic field direction. Also, successful end-to-end simulation of a Guggenheim cooling channel based on the established rf parameters and technologies.

Year 3: Designing the test section. The outcome of the design work will inform the MC-DFSR baseline decision.

Year 4–5: Build and test a Guggenheim test section in the MTA. Test results would validate the engineering performance at the end of the MC-DFSR study.

5.4.2 *Helical cooling channel test section*

The R&D path that would lead to a test of a HCC section with HPRF would be:

Year 1: Successful beam test of the existing 805-MHz HPRF test cavity in the MTA, and successful HCC few-coil model tests to validate the winding technology and magnet concept.

Year 2: Successful beam test of a realistic 805-MHz HPRF cavity in the MTA and successful end-to-end simulation of a MC HCC cooling channel section. Thereafter, begin HCC test section design.

Year 3: Complete design of test section. The outcome of the design work would inform the MC-DFSR baseline decision.

Year 4–5: Build and test the HPRF test section in the MTA. Test results would validate the engineering performance prior to the completion of the MC-DFSR.

5.4.3 Preparations for a 6D cooling demonstration experiment

The basic physics of transverse cooling will be demonstrated by MICE, and the basic physics of 6D cooling can most likely be demonstrated by using a wedge-shaped absorber in the MICE channel, selecting tracks to create a “virtual” beam with dispersion at that wedge, and measuring the 6D emittances before and after using the MICE detectors. A more ambitious six-dimensional ionization-cooling test could be considered in which the MICE beam and detectors were used to evaluate and study an actual prototype of a six-dimensional cooling channel. Thus, the MICE hall has been discussed as a possible site for the proposed MANX experiment [39], as well as for testing other six-dimensional cooling lattices that might be considered. For example, a section of an RFOFO ring or “Guggenheim” cooler could be built and inserted into MICE, or such a lattice could perhaps be approximated using components already being built for MICE.

A full 6D demonstration experiment would clearly be a major undertaking, and could not be finished in the next five years. We therefore do not plan to commit to one until after the basic technology choices have been made, i.e., towards the end of the DFRS process. Nevertheless, conceptual studies of the options will be undertaken.

It is obviously impractical to demonstrate all stages of the cooling without building the complete system. The following list of possible experiments aims to cover examples of cooling at three different stages—the initial 6D cooling, the final 6D cooling, and the final 4D cooling. In the first case, there are three technology options: a Helical Cooling Channel, periodic lattices with alternating bending (snake), or periodic lattices with continuous bending (Guggenheim). In addition, there is the choice of gas- or vacuum-filled rf. In the later stages, the options are more limited. The following list will serve to illustrate the range of possible demonstrations.

- a) A high pressure hydrogen-gas-filled HCC for early 6D cooling to reach a transverse emittance on the order of 2000π mm mrad.
- b) A high pressure hydrogen-gas-filled periodic lattice (snake or Guggenheim) for early 6D cooling to reach a transverse emittance on the order of 2000π mm mrad.
- c) A vacuum rf periodic lattice (snake or Guggenheim) for early 6D cooling to reach a transverse emittance on the order of 2000π mm mrad
- d) A vacuum rf periodic lattice (snake or Guggenheim) for late 6D cooling to reach a transverse emittance on the order of 400π mm mrad
- e) A high-field solenoid 4D lattice for cooling to reach a transverse emittance on the order of 25π mm mrad

Item c) would be the least expensive, since it involves equipment similar to that being built for MICE. Items a) and b) might be able to use the MICE detector equipment, but would be more expensive because of the use of high-pressure hydrogen and, in item a),

the construction of a helical magnet system with integrated rf. Item d) may have a high priority as it demonstrates 6D cooling to lower emittances than those explored at MICE, but it will require development of detectors capable of measuring these smaller emittances. It is possible that such measurements could be made with a gas TPC in the MICE detector solenoids. Item e) would be an even greater measurement challenge that has not yet been studied. It will also require at least one solenoid with a strength on the order of 50 T. A device using HTS to reduce the power consumption appears to be the most attractive option.

To prepare for such an experiment, which we anticipate being performed after the DFSR is completed, conceptual designs and cost estimates are required for:

- beam and detector technologies that will measure the cooling at the different stages
- integration of the cooling channel components for each potential experiment.

5.5 Summary of Component R&D Goals

Recognizing that there is a considerable amount of material covered in the descriptions of the component R&D program presented in Section 5, we provide in Table 6 a brief—and hopefully easily digestible—summary of the goals of this effort. As can be seen, we expect to develop specifications and conceptual designs for all of the components studied, but will only carry out an engineering design of the items deemed most critical to developing the feasibility and cost assessments. In some cases, we plan to prototype sub-assemblies to ensure a full understanding of the technical issues. Full prototypes are beyond the scope of the present 5-year plan, and are envisioned to be part of the 6D cooling experiment that, with support from the community, will come later.

Table 6. Goals of component R&D effort at the end of the 5-year plan. Carrying any of the designs to the full prototype stage is not anticipated until the next phase of the R&D program. The RF program is not included here as its goal is not component R&D but a full proof-of-principle system.

	Specifications	Conceptual Design	Engineering Design	Sub-assembly prototype	Full-assembly prototype
High field HTS solenoid	●	●	●		
HCC magnets	●	●	●	●	
Collider ring magnets	●	●			
Target design	●	●	●	●	
10–15T solenoid	●	●	●	●	
Guggenheim channel ^{a)}	●	●	●	●	
Helical cooling channel ^{a)}	●	●	●	●	
6D cooling experiment	●	●			

^{a)} We anticipate that only one channel will be studied in detail, with the choice determined during year 2.

6. UNIVERSITY, INTERNATIONAL, AND SBIR COMPANY PARTICIPATION

Accelerator R&D projects provide an excellent training ground for accelerator physics students and post-doctoral research associates. Both the NFMCC and MCTF activities are built around close and productive collaborations between laboratory and university groups. In recent years, the muon accelerator R&D program has provided three Ph.D. projects, all brought successfully to completion on topics ranging from rf studies to beam dynamics. The proposed R&D program for the coming 5 years provides an opportunity for many more thesis topics, and a continued and enhanced opportunity for university group involvement. Based on our experience to date, a university group consisting of one faculty member, one post-doctoral research associate, and one or more graduate students, can make a valuable and valued contribution to the overall R&D program. Although the majority of the resources we are requesting for muon accelerator R&D would be utilized by the national laboratories, the proposed program would also support significant university involvement. The present U.S. university groups that are playing an integral role in the muon accelerator R&D program are Cornell, IIT, University of Mississippi, Princeton, UCLA, and UC-Riverside. Other groups have been more active in the past, but lack resources for active involvement at present. We anticipate that with increased muon accelerator R&D support the university involvement would grow, with about eight groups making significant contributions.

Several Small Business Innovative Research (SBIR) and Small Business Technology Transfer (STTR) companies already contribute very actively to muon accelerator R&D projects. The most notable examples are Muons, Inc., Tech-X Corporation, and Particle Beam Lasers, Inc., all of which have initiated and carried out a number of very important studies on the physics and technologies of the MC and NF. The proposed R&D plan will provide guidance and permit closer coordination between the SBIR/STTR companies and the research at the national laboratories and universities. It is anticipated that the companies will continue to contribute to the R&D on HTS magnets, high pressure gas-filled rf cavities, 6-dimensional cooling channel design, prototyping, and experiments, and in the design and end-to-end simulations of the MC and NF.

At present, activities of both the NFMCC and MCTF involve significant international participation. This plan calls for strengthened international cooperation. The most important international activities will be MICE and the Neutrino Factory RDR work. As we carry out the 5-year plan, we will seek additional international participation in developing the advanced muon accelerator physics and technology concepts.

7. SUMMARY

By ~2013 we expect that new physics results from the LHC and from the next generation of neutrino experiments (Double Chooz, Daya Bay, T2K, and Nova) will be available. These will provide the worldwide HEP community with the knowledge it needs to identify which types of facilities are best suited to fully exploit the exciting new physics opportunities that will undoubtedly arise. In particular, we expect that the physics cases

for both a multi-TeV lepton collider and a Neutrino Factory will be more fully understood at this time.

The R&D program that we have outlined in this proposal will provide the HEP community with detailed information on future facilities based on intense beams of muons—the Muon Collider and the Neutrino Factory. We believe that these facilities, which could be considered separately or as part of a staged approach to a world-class scientific program, offer the promise of extraordinary physics capabilities. The Muon Collider presents a powerful option to explore the energy frontier and the Neutrino Factory gives the opportunity to perform the most sensitive neutrino oscillation experiments possible, while also opening expanded avenues for study of new physics in the neutrino sector. The synergy between the two facilities presents the opportunity for an extremely broad physics program and a unique pathway in accelerator facilities.

Facilities based on short-lived muons present many challenges, both for the accelerator builder and for the detector builder. It is addressing these challenges in a timely way that motivates this proposal, which covers all three aspects of muon facilities that are of importance to the HEP community—the physics reach, the accelerator design, and the detector design. Specifically, the program presented here, if funded at the requested level, would deliver both a DFSR for a Muon Collider and (with our international partners) an RDR for the Neutrino Factory by the end of 2013.

Our work will give clear answers to the questions of expected capabilities and performance of these muon-based facilities, and will provide defensible estimates for their cost. This information, together with the physics insights gained from the next-generation neutrino and LHC experiments, will allow the HEP community to make well-informed decisions regarding the optimal choice of new facilities. We believe that this work is an absolutely critical part of any broad strategic program in accelerator R&D and, as the P5 panel has recently indicated, is essential for the long-term health of high-energy physics.

REFERENCES

- [1] E.A. Perevedentsev and A.N. Skrinsky, Proc. 12th Int. Conf. on High Energy Accelerators, F.T. Cole and R. Donaldson, Eds., (1983) p. 485; A.N. Skrinsky and V.V. Parkhomchuk, Sov. J. of Nucl. Physics 12, (1981) 3.
- [2] D. Neuffer, "Colliding Muon Beams at 90 GeV," Fermilab Physics Note FN-319 (1979); D. Neuffer, Part. Accel. 14 (1983) 75.
- [3] R. Palmer, A. Tollestrup and A. Sessler (Eds.), "Muon Muon Collider: Feasibility Study," BNL-52503, FERMILAB-CONF-96/092, LBNL-38946.
- [4] C. Ankenbrandt *et al.* (Muon Collider Collaboration), "Status of muon collider research and development and future plans," Phys. Rev. ST Accel. Beams 2 081001 (1999); M. Alsharo'a *et al.* (Muon Collider Collaboration), "Recent progress in neutrino factory and muon collider research within the Muon Collaboration," Phys. Rev. ST Accel. Beams, 6 081001 (2003).
- [5] S. Geer, "Neutrino beams from muon storage rings: Characteristics and physics potential," Phys. Rev. D 57 (1998) 6989.
- [6] N. Holtkamp and D. Finley (Eds.), "A Feasibility Study of a Neutrino Source Based on a Muon Storage Ring," Fermilab-Pub-00/108-E.
- [7] S. Geer and H. Schellman (Eds.), "Physics at a Neutrino Factory," FERMILAB-FN-692, hep-ex/0008064.
- [8] A. DeRujula, M.B. Gavela, P. Hernandez, Nucl. Phys. B 547 (1999) 21.
- [9] S. Osaki, R. Palmer, M. Zisman, and J. Gallardo (Eds.), "Feasibility Study II of a Muon-Based Neutrino Source," BNL-52623.
- [10] S. Geer and M. Zisman (Eds.), "The neutrino factory and beta beam experiments and development," APS Neutrino Study, BNL-72369-2004, FERMILAB-TM-2259, Nov 2004. 115pp. , e-Print: physics/0411123
- [11] S. Geer and M. S. Zisman, "Neutrino Factories: Realization and physics potential," Prog. in Part. and Nucl. Physics 59 (2007) 631.
- [12] NFMCC web page: <http://www.cap.bnl.gov/mumu/>
- [13] MCTF web page: <http://apc.fnal.gov/groups2/muon.shtml>
- [14] Muons, Inc. web page: <http://www.muonsinc.com/>

- [15] Muon Collider advanced accelerator R&D proposal:
https://mctf.fnal.gov/muoncollider_aard_proposal_v3.doc
- [16] Muon Collider Task Force Report, FERMILAB-TM-2399-APC, December 2007,
https://mctf.fnal.gov/annual-reports/mctf-report-2007_v9.doc/view
- [17] MUTAC reports: <http://www.cap.bnl.gov/mumu/MUTAC/>
- [18] J. S. Berg *et al.* (ISS Accelerator Working Group), “International scoping study of a future Neutrino Factory and super-beam facility: Summary of the Accelerator Working Group”, (ed. M. Zisman), RAL-TR-2007-23, December 2007; arXiv:0802.4023v1 [physics.acc-ph], 27 February 2008. Submitted to J. Inst.
- [19] S. F. King, K. Long, Y. Nagashima, B.L. Roberts, O. Yasuda (Eds.), “Physics at a future Neutrino Factory and super-beam facility: Summary of the Physics Working Group,” RAL-TR-2007-019, December 2007., arXiv:0712.4129v2 [hep-ph] 23 Nov 2007.
- [20] T. Abe *et al.* (ISS Detector Working Group), “International scoping study of a future Neutrino Factory and super-beam facility: Summary of the Detector Working Group,” RAL-TR-024, December 2007., arXiv:0710.4947v1 [physics.ins-det] 26 Dec 2007.
- [21] IDS Web page: <https://www.ids-nf.org/wiki/FrontPage>
- [22] H. G. Kirk *et al.*, “A high-power target experiment at the CERN PS,” in Proc. 2007 Particle Accelerator Conf., Albuquerque, June 25–29, 2007, pp. 646–648.
- [23] P. Drumm (ed.), “MICE: an international muon ionization cooling experiment, Technical design report,” see: http://www.isis.rl.ac.uk/accelerator/MICE/TR/MICE_Tech_ref.html.
- [24] J. Norem, *et al.*, “Recent Results from the MuCool Test Area,” in Proc. 2007 Particle Accelerator Conf., Albuquerque, June 25–29, 2007, pp. 2239–2241.
- [25] The early history of the idea for muon colliders can be found in D. Cline (ed.), Physics Potential and Development of $\mu^+\mu^-$ Colliders, AIP Conf. Proc. 352, 1994, pp. 3–15.
- [26] C. Ankenbrandt *et al.*, “Muon collider task force report,” Fermilab-TM-2399-APC, 2007.
- [27] See <http://projectx.fnal.gov>
- [28] H. G. Kirk *et al.*, “The MERIT high power target experiment at CERN,” in Proc. EPAC 2008, p. 2886.

- [29] R. B. Palmer *et al.*, “A complete scheme of ionization cooling for a muon collider,” in Proc. PAC 2007, p. 3193, see also <http://www.cap.bnl.gov/mumu/polit/palmer-p5.pdf>; R. P. Johnson and Y. Derbenev, “Low Emittance Muon Colliders,” in Proc. PAC 2007, p. 706.
- [30] S. A. Kahn *et al.*, “Incorporating RF into a muon helical cooling channel,” Proc. EPAC 2008, p. 760.
- [31] Y. Alexahin *et al.*, “6D ionization cooling channel with resonant dispersion generation,” in Proc. PAC 2007, p. 3477.
- [32] S. A. Kahn *et al.*, “A high field HTS solenoid for muon cooling,” in Proc. PAC 2007, p. 446.
- [33] D. Newsham *et al.*, “Simulations of parametric resonance ionization cooling,” in Proc. PAC 2007, p. 2927.
- [34] Y. Derbenev and R. P. Johnson, “Parameters for absorber-based reverse emittance exchange of muon beams,” in Proc. EPAC 2006, p. 2433.
- [35] R. P. Johnson *et al.*, “Muon bunch coalescing,” in Proc. PAC 2007, p. 2930.
- [36] D. Summers *et al.*, “Muon acceleration to 750 GeV in the Tevatron tunnel for a 1.5 TeV $\mu^+\mu^-$ collider,” in Proc. PAC 2007, p. 3178-3180.
- [37] S. Bogacz *et al.*, “Recirculating linac muon accelerator with ramped quadrupoles,” in Proc. EPAC 2008, p. 2629.
- [38] P. Snopok *et al.*, “A new lattice design for a 1.5 TeV CoM muon collider consistent with the Tevatron tunnel,” in Proc. PAC 2007, p. 3483.
- [39] MANX Collaboration, see e.g., “MANX: A 6D Ionization-Cooling Experiment,” D. M. Kaplan for the MANX Collaboration, in Proc. Ninth Int’l Workshop on Neutrino Factories, Superbeams, and Betabeams (NuFact07), AIP Conf. Proc. 981, 296 (2008).

APPENDIX 1: FUNDING REQUEST

Here we summarize the funding and effort requirements for the activities proposed for our Muon Accelerator R&D program. Table A-1 indicates the present effort levels and the required levels for FY2009–2013, along with the associated costs. The values shown in Table A-1 are “burdened” with appropriate overhead rates both for effort and for M&S, and the labor costs are escalated by 4% annually to represent “then-year” dollars. As can be seen, mounting the proposed program requires approximately a factor of three increase in annual funding for muon-related R&D. Figure A-1 shows the same information in graphical form. The total funding required for the 5-year plan is \$89M.

In order to complete the tasks outlined here by 2013, the peak of the activity occurs in the mid-years, FY2010–2012. As shown in Fig. A-2, the roll-off implied by Table A is an artifact of the limited scope of our 5-year plan. Assuming we are successful—and have the support of the high-energy physics community—we anticipate in the later stages of this program that there would be an initial ramp-up for a follow-on program that would include, for example, mounting a full 6D cooling experiment based on the technologies we have developed, the development of a Conceptual Design Report for a proposed facility, and possibly the start of pre-construction R&D.

Table A-1. Previous-year (FY08) support for the NF and MC R&D, and the requested level of support (then-year dollars) for the unified national 5-year plan of the Muon Accelerator R&D program.

	FY08	FY09	FY10	FY11	FY12	FY13
Effort (FTE)	37	48	79	81	79	43
SWF (\$M)	5.5	9	14	15	15	8
M&S (\$M)	1.6	4	7	7	6	4
Total (\$M)	7.1	13	21	22	21	12

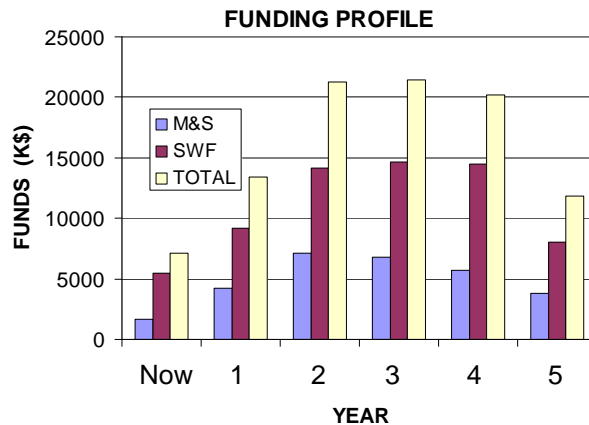


Fig. A-1. Graphical representation of the cost profile from Table A-1.

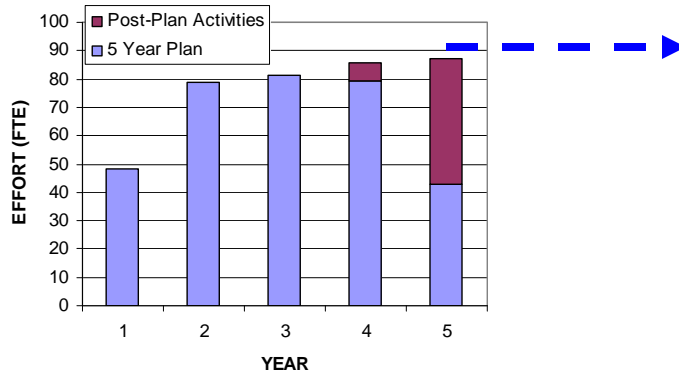


Fig. A-2. Effort profile of the initial 5-year muon R&D program showing the subsequent ramp-up of the next phase of the R&D.

Table A-2 shows the projected split of effort among the three sponsoring laboratories (BNL, FNAL, and LBNL) and that projected for other institutions, SBIR companies, and the like. As can be seen, the present laboratory commitments only partially fulfill the program requirements. We anticipate that additional engineering effort will come from the sponsoring laboratories and/or external contracts that would, in effect, convert some of the effort requirements to M&S requirements.

Table A-2. Effort profile by institution.

	Now (FTE)	Year 1 (FTE)	Year 2 (FTE)	Year 3 (FTE)	Year 4 (FTE)	Year 5 (FTE)
BNL	6.5	7	8	10	10	10
FNAL	20.8	23	28	30	33	33
LBNL	2.5	5	8	9	11	13
Other	7.0 ^{a)}	13 ^{b)}	35 ^{b)}	32 ^{b)}	32 ^{b)}	32 ^{b)}
TOTAL	36.8	48	79	81	86 ^{c)}	88 ^{c)}

^{a)} Universities ~5 FTE, other laboratories ~ 2 FTE; there are also ~10 FTE contributed by SBIR companies.

^{b)} Includes SBIR companies, universities, other laboratories, additional engineering from the sponsoring laboratories and/or external vendor contracts.

^{c)} Includes additional effort for assumed “post-plan” activities, as indicated in Fig. A-2.