From: "Breck Hitz" <breck@leoma.com>
To: WARVIN@bis.doc.gov; PublicComments@bis.doc.gov
Date: Tue, Feb 8, 2011 7:55 AM
Subject: LEOMA comment of STA

Dear Mr. Arvin:

Attached to this message are LEOMA's comments on the STA exception, as requested in Federal Register, vol. 75, number 236, page 76653, December 9, 2010.

Please note that there are several enclosures that accompany this letter. Due to their size, I have broken them into nine different files, which I will send separately:

a.. LEOMA comments re Tiers.pdf
b.. Appendix 1.zip
c.. App2_6A005a (i) (cw).zip
d.. App2_6A005a (ii) (cw).zip
e.. App2_6A005a (iii) (cw).zip
f.. App2_6A005b (i) (pulsed).zip
g.. App2_6A005b (ii) (pulsed).zip
h.. App2_6a0005c (tunable).zip
i.. App2_6A005d (other).zip

Shortly after all the files have been sent, I will telephone you to confirm that you have received them

Thank you,
- Breck Hitz

The Laser and Electro-Optics Manufacturers' Association

LEOMA

123 Kent Road
Pacifica CA 94044
650 359-3905
Mail@LEOMA.com

February 7, 2011

VIA E-MAIL
William Arvin
Regulatory Policy Division
Bureau of Industry and Security
Department of Commerce
1401 Constitution Avenue, NW
Room 2705
Washington DC 20230

RE: RIN 0694-AF03

Dear Mr. Arvin:

On behalf of a consortium of U.S. laser manufacturers, LEOMA is pleased to present this letter in response to the Bureau of Industry and Security's request for public comment in Federal Register, vol. 75, number 236, page 76653, December 9, 2010. This consortium includes some of the largest manufacturers of lasers, including Coherent Inc. IPG Photonics Corporation, JDS Uniphase Corporation and Newport Corporation, representing combined sales of over $1 billion.

The goal of this letter is to comment on the proposed eligibility of section 6A005 of Category 6 of Commerce Control List (CCL) for proposed License Exception STA.

LEOMA supports that 6A005 be eligible in full for License Exception Strategic Trade Authorization (STA) for the reasons set forth below:

1. 6A005 Items Are Properly Classified as Tier 2 or Tier 3. In our letter today to Mr. Mooney of the Bureau of Industry and Security (BIS) regarding the Notice of Inquiry – CCL (attached to this letter), we set forth several arguments why it would not be appropriate to classify 6A005 as Tier 1, as well as numerous data sheets and other evidence in the Appendices to that letter showing the foreign availability of items listed in 6A005. Please see the attached supporting the classification of 6A005 as Tier 2 or Tier 3. LEOMA strongly believes that the items controlled under 6A005 do not meet any of the criteria for Tier 1, principally because they are not WMDs, used with WMDs, or to produce WMDs, and do not provide a critical military or intelligence advantage to the United States and are available outside of the United States.

2. <u>6A005 Items Are Not on the Sensitive List or Very Sensitive List of the Wassenaar Treaty:</u> The items controlled by 6A005 are on the Basic List of dual use items under the Wassenaar Treaty. These items have been determined to not be critically needed by the military. Not one item in 6A005 is on the Sensitive List or Very Sensitive List. This supports that 6A005 should be eligible for STA. We note that many of the ECCNs in Category 6 which are STA eligible are on the Sensitive List or Very Sensitive List. These include ECCNS 6A001, 6A002, 6A003, 6A004, 6A008 and 6B008. It is not clear why ECCN 6A005 which has not item on the Sensitive List or Very Sensitive List should not be STA eligible, but the other ECCNs from Category 6 which are on the Sensitive List or Very Sensitive List are STA eligible. While we do acknowledge certain items in ECCNS 6A001, 6A002, 6A003, 6A004, 6A008 and 6B008 are subject to STA exclusions, it is incongruous that all items controlled by 6A005 would not be eligible for STA at all especially when 6A005 has been determined objectively by the Wassenaar countries to not be Sensitive or Very Sensitive items or technologies.

We thank you for your attention to our comments, and remain at your disposal to answer any questions you may have.

Sincerely,

Breck Hitz
Executive Director

Enclosures: LEOMA Letter regarding Notice of Comment - CCL
Appendix 1-Foreign Availability Non-Wassenaar Countries
Appendix 2-Foreign Availability Wassenaar Countries



PRODUCT INFO

SGR-Extra Series Q-switched Nd: YAG Solid State Laser

Products

The SGR-Extra series laser is one of Beamtech' s standard models with high energy output ranging from 6J to 25J at maximum rep rate of 10Hz. Since 2005, Beamtech has focused on Nd: YAG large energy, high peak power, solid state laser systems for science and industrial applications such as pumping Ti:sapphire ultrafast lasers and laser peening. To date, more than 10 units have been delivered to customers. The SGR-Extra series laser has been engineered and standardized to provide reliab

SGR-Extra Series Q-switched Nd: YAG Solid State Laser

Specifications:

	SGR-60	SGR-Extra-10	SGR-Extra-15	SGR-Extra-25
Energy(at 1Hz):	6J@1064nm 3J@532nm	10J@1064nm 5J@532nm	15J@1064nm 7J@532nm	25J@1064nm 12.5J@532nm
Energy(at 10Hz): (SGR-Extra-15,25at 5Hz)	5J@1064nm 2J@532nm	8J@1064nm 3J@532nm	10J@1064nm 7J@532nm	20J@1064nm 10J@532nm
Duration: (ns)	～10	～10	～10	～10
Divergence: (mrad)	≤2.5	≤2.5	≤2	≤2
Beam Profile: (mm)	Φ20	Φ22	Φ30	Φ35
Beam uniformity:	≥0.7	≥0.75	≥0.8	≥0.8

Applications

- Laser Ranging
- Ultrafast fs Pumping Source
- Laser driving Flyer
- Laser Peening
- Laser Excitation Plasma Source
- Laser and Material Interaction
- Nonlinear Optics
- Laser Cleaning
- Photocatalysis
- Plasma Diagnostics
- Material modified and peel

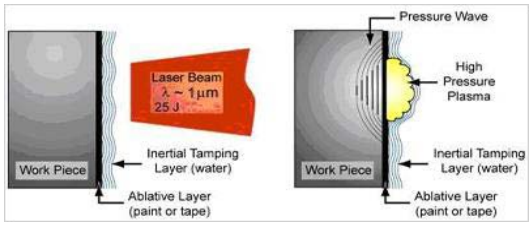

Laser peening schematic

Lasers for laser peening application

High efficiency pump cavity

Customer site of SGR-Extra-10

Features

- High beam quality, Super Gaussian uniform distribution
- 10ns pulse width, high peak power
- Larger output energy up to 25J@1064nm, 10J@532nm
- Engineering design, high reliability and stability
- High optical and mechanical stability, shakeproof
- Programmable software or remote control, easy system integrated automation work

Download Product Description

Copyright @ 2010 Beamtech Optronics Co.,Ltd. All rights reserved 京 ICP 备 0000123456 号

Beamtech Optronics Co., Ltd., based in Beijing, PRC, specializes in solid-state laser design, development, manufacturing, sales and service. The company was founded in 1997, and in 2002 obtained ISO9001 certification by TÜV Rheinland (Certificate No. 01 100 064529).

Beamtech provides flashlamp-pumped Nd:YAG lasers for scientific research, medical and industrial OEM lasers and custom-built laser systems tailored to customer requirements. Beamtech lasers feature stable and reliable performance, good beam quality, ease of operation, and have been purchased by customers in China, the USA, Germany, Korea, Japan and India.

Beamtech utilizes the world most advanced technologies on laser design, development and engineering, and holds dozens of patents, including with respect to laser optical design, resonator design, laser mechanics and electrical design.

From developing its first 300J Nd:Glass high energy nanosecond laser system for Chinese Academy of Sciences in 2005 until now, Beamtech has successfully delivered more than 10 sets of high energy laser systems, which including its Melar and SGR-Extra series to customers worldwide. BeamTech recently announced its SGR-Extra-25 Q-switched Nd:YAG laser offering pulse energy of 25J at 1 Hz, with a 10ns pulse width, for laser peening, Ti:sapphire pumping and laser flyer research applications. BeamTech has delivered one of these systems to a US customer for laser peening.

BeamTech was an exhibitor at the 2011 Photonics West trade show in San Francisco.

808nm High Brightness Diode Laser

K81DA4C-20.00W-FS K81DA4C-30.00W-FS

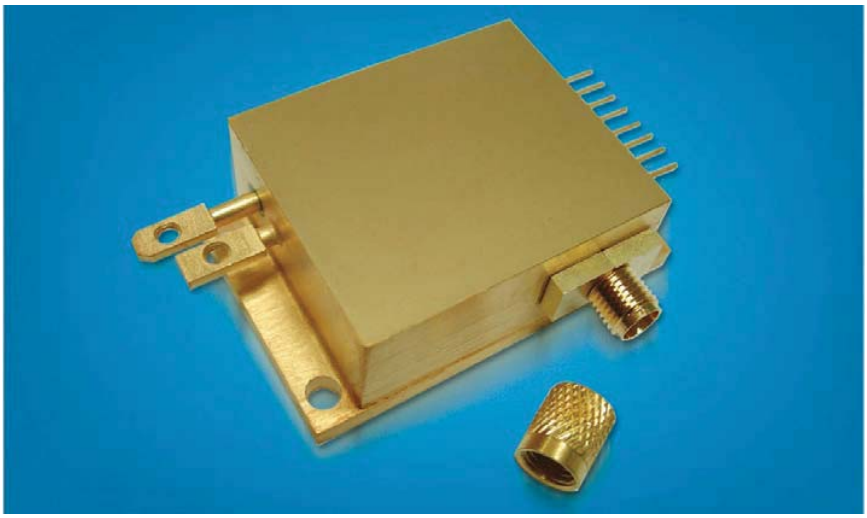

Key Features:

- 20W, 30W output power
- 200μm,400μm detechable fiber
- 0.22NA
- 808nm wavelength
- Compact package

Options:

- Integrated 650nm aiming beam
- Monitor photo diode
- Fiber detection sensor

BWT Beijing's High Power Diode Laser Modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

At BWT Beijing, to provide high quality products with reasonable price is our always goal.

808nm High Brightness Diode Laser

K81DA4C-20.00W-FS K81DA4C-30.00W-FS

Specifications（25℃）		Symbol	Unit	K81DA4C-20.00W-FS	K81DA4C-30.00W-FS
Optical data	CW-output power	P_o	W	20	30
	Center wavelength	λ_c	nm	808	
	Tolerance of λ	-	nm	±3,±10	
	Spectral width (FWHM)	△λ	nm	<3	
	Temperature drift of λ	-	nm/℃	~0.3	
Connector data	Designed for fiber core diameter	W_c	μm	200/400	
	Designed for fiber numerical aperture	NA	-	0.22	
	Fiber connector	-	-	SMA-905	
Electrical data	Operation current	I_{op}	A	10	
	Threshold current	I_{th}	A	1.5	1.2
	Conversion efficiency	η	%	40	40
	Slope efficiency	η_D	W/A	2.8	3.8
	Operation voltage	V_{op}	V	5.8	7.8
	Reverse voltage	V_{re}	V	6	8
PD data	Current	I_{mo}	mA	<0.6	<0.8
Aiming beam data	Output power	P_a	mW	>2	
	Wavelength	λ_a	nm	650±10	
	Voltage	V_a	V	2.2	
	Current	I_a	mA	<30	
Others	Operation temperature	T_{op}	℃	10~30	
	Storage temperature	T_{st}	℃	-20~+80	
	Expected lifetime	MTBF	h	>10,000	
	Dimensions (fiber and connector not included)	-	mm	52.0×35.0×20.0	
	Lead soldering temperature	T_{is}	℃	260(10 sec.)	

808nm High Brightness Diode Laser

K81DA4C-20.00W-FS K81DA4C-30.00W-FS

Characteristics

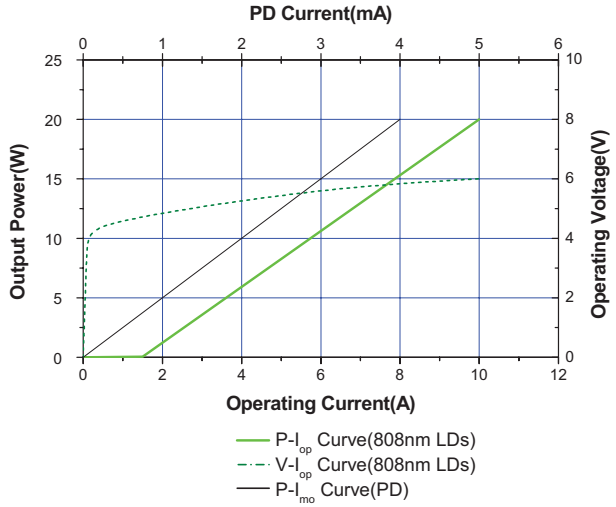

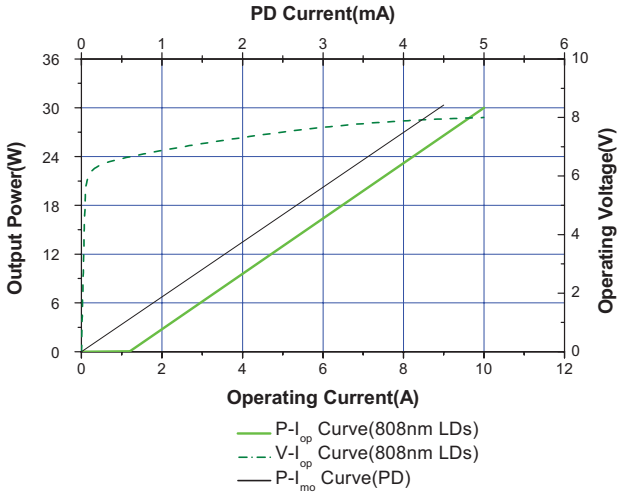

Typ. spectrum (T=25℃)

808nm diode laser modules

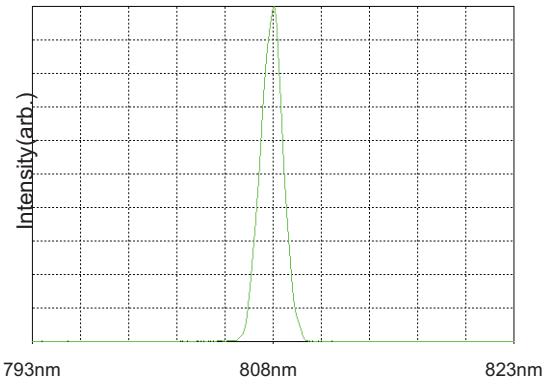

650nm Aiming Beam Characteristics

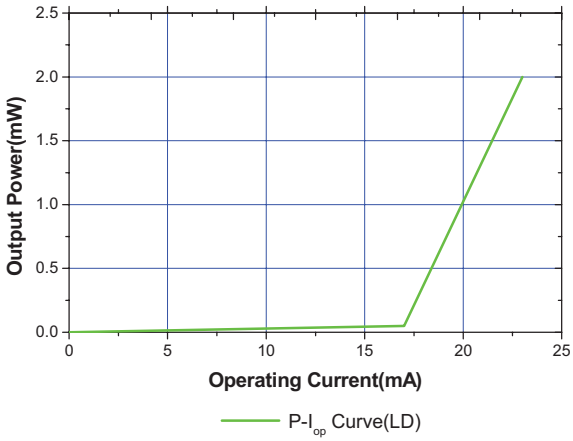

808nm High Brightness Diode Laser

K81DA4C-20.00W-FS K81DA4C-30.00W-FS

Package Dimensions (mm)

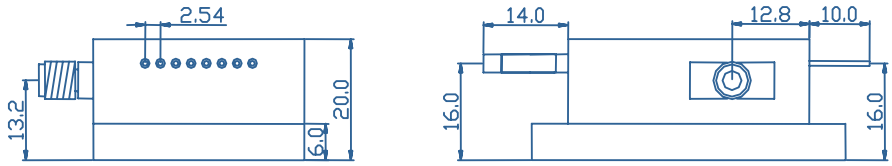

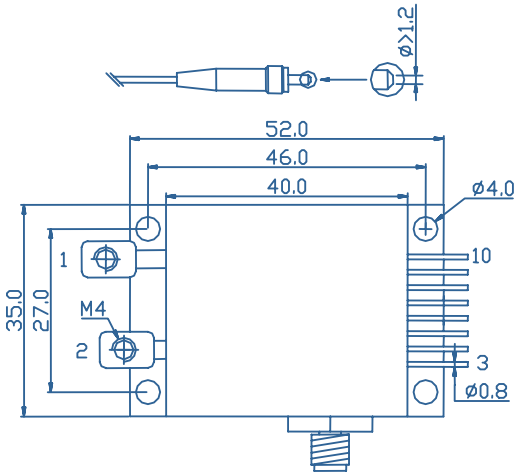

Pin	Function	Pin	Function
1	LD (-)	6	Aiming Beam LD (+2.2V) PD (N)
2	LD (+), Case	7	Aiming Beam LD (0V)
3	FCD LED (+)	8	PD (P)
4	FCD LED (-) FCD PD (P)	9	Thermistor
5	FCD PD (N)	10	Thermistor

※FCD: Fiber Connector Detector

OPERATING NOTES

- Avoid eye exposure to direct or scattered radiation.
- ESD precautions must be taken.
- Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260℃ and time shorter than 10 second.
- Use constant current power supply. Avoid surge current.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- Operation temperature is 10℃~ 30℃.
- Storage: -20℃~ +80℃, all pins short-circuit.

Information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time without notice.

Tel: +86 10 8368 1053 | Fax: +86 10 8368 1077 | Email: sales@bwt-bj.com | Website: www.bwt-bj.com

976nm High Brightness Diode Laser

K98DA4C-20.00W-FS K98DA4C-30.00W-FS

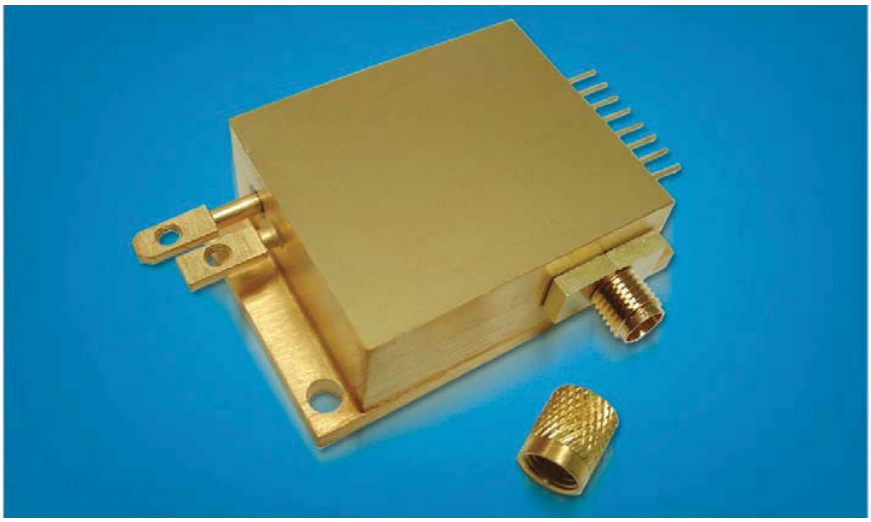

Key Features:

- 20W, 30W output power
- 200μm/400um detechable fiber
- 0.22NA
- 976nm wavelength
- Compact package

Options:

- Integrated 650nm aiming beam
- Monitor photo diode
- Fiber detection sensor

BWT Beijing's High Power Diode Laser Modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

At BWT Beijing, to provide high quality products with reasonable price is our always goal.

976nm High Brightness Diode Laser

K98DA4C-20.00W-FS K98DA4C-30.00W-FS

Specifications（25℃）		Symbol	Unit	K98DA4C-20.00W-FS	K98DA4C-30.00W-FS
Optical data	CW-output power	P_o	W	20	30
	Center wavelength	λ_c	nm	976	
	Tolerance of λ	-	nm	±3,±10	
	Spectral width (FWHM)	△λ	nm	<3	
	Temperature drift of λ	-	nm/℃	~0.3	
Connector data	Designed for fiber core diameter	W_c	μm	200/400	
	Designed for fiber numerical aperture	NA	-	0.22	
	Fiber connector	-	-	SMA-905	
Electrical data	Operation current	I_{op}	A	13	9.5
	Threshold current	I_{th}	A	0.5	0.5
	Conversion efficiency	η	%	38	48
	Slope efficiency	η_D	W/A	1.6	3.5
	Operation voltage	V_{op}	V	4	7
PD data	Current	I_{mo}	mA	<6.0	<8.0
Aiming beam data	Output power	P_a	mW	>2	
	Wavelength	λ_a	nm	650±10	
	Voltage	V_a	V	2.2	
	Current	I_a	mA	<30	
Others	Operation temperature	T_{op}	℃	10~30	
	Storage temperature	T_{st}	℃	-20~+80	
	Expected lifetime	MTBF	h	>10,000	
	Dimensions (fiber and connector not included)	-	mm	52.0×35.0×20.0	
	Lead soldering temperature	T_{is}	℃	260(10 sec.)	

976nm High Brightness Diode Laser

K98DA4C-20.00W-FS K98DA4C-30.00W-FS

Characteristics

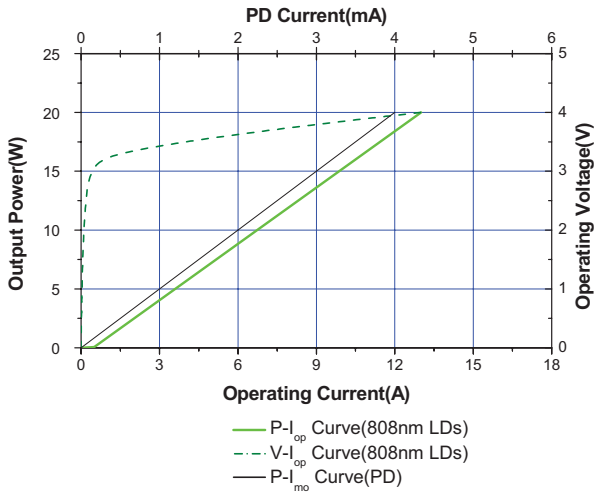

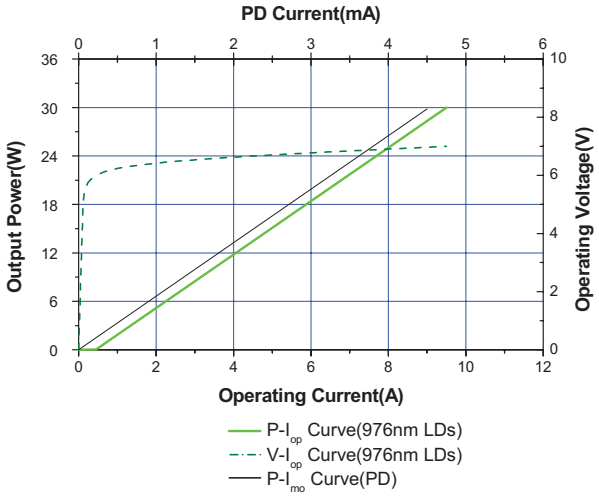

Typ. spectrum (T=25℃)

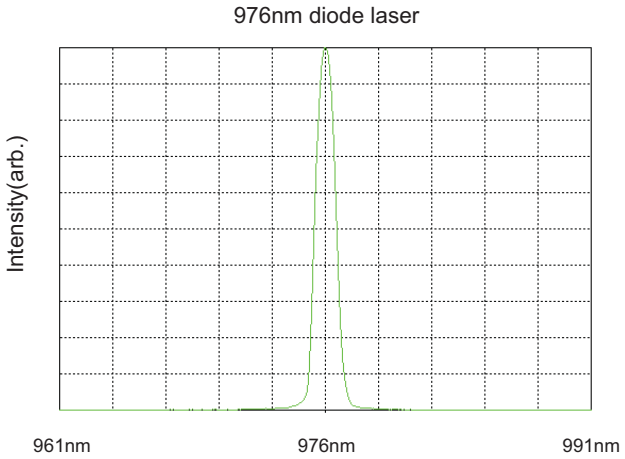

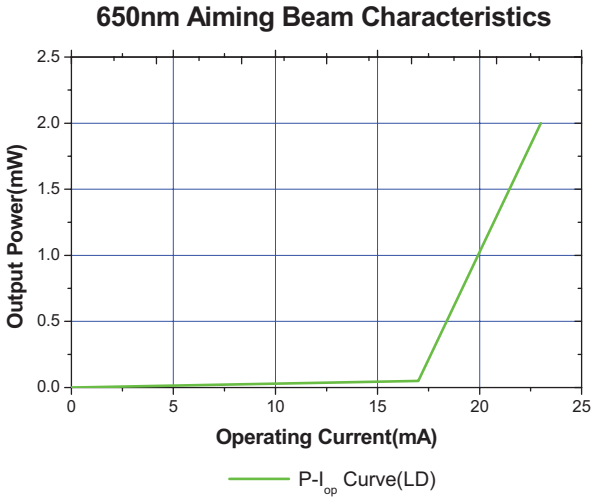

976nm High Brightness Diode Laser

K98DA4C-20.00W-FS K98DA4C-30.00W-FS

Package Dimensions (mm)

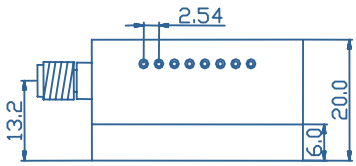

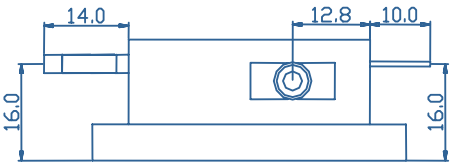

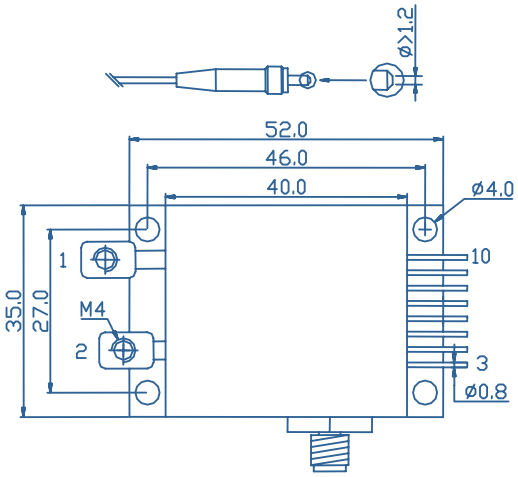

Pin	Function	Pin	Function
1	LD (-)	6	Aiming Beam LD (+2.2V) PD (N)
2	LD (+), Case	7	Aiming Beam LD (0V)
3	FCD LED (+)	8	PD (P)
4	FCD LED (-) FCD PD (P)	9	Thermistor
5	FCD PD (N)	10	Thermistor

OPERATING NOTES

- Avoid eye exposure to direct or scattered radiation.
- ESD precautions must be taken.
- Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260℃ and time shorter than 10 second.
- Use constant current power supply. Avoid surge current.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- Operation temperature is 10℃~ 30℃.
- Storage: -20℃~ +80℃, all pins short-circuit.

Information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time without notice.

Ant Series- 9××nm High Brightness Diode Laser

K91SA3F-25.00W-R K94SA3F-25.00W-R K98SA3F-25.00W-R

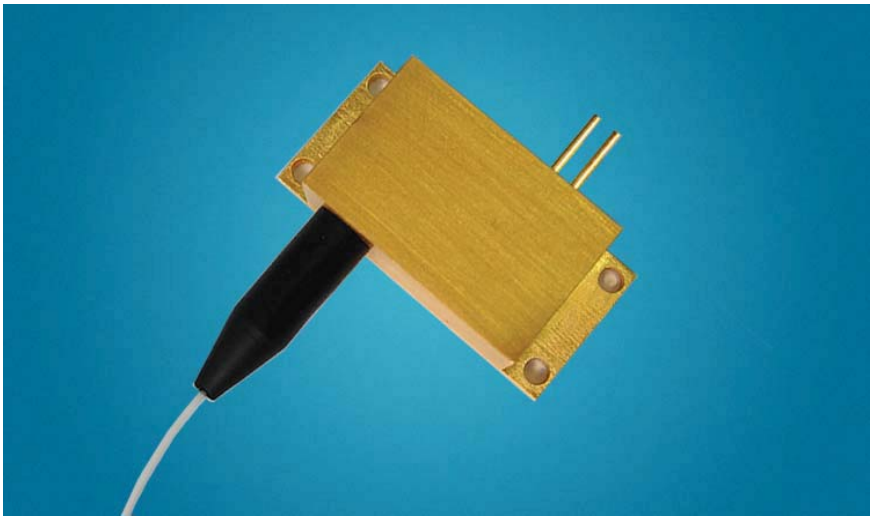

Key Features:

- 25W output power
- 105μm fiber core diameter
- 0.15NA/0.22NA
- 915nm, 940nm, 976nm Wavelength
- 1040nm-1100nm feedback protection

Applications:

- Pumping fiber laser
- Medical use
- Material processing

BWT Beijing's High Power Diode Laser Modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

At BWT Beijing, to provide high quality products with reasonable price is our always goal.

Ant Series- 9××nm High Brightness Diode Laser

K91SA3F-25.00W-R K94SA3F-25.00W-R K98SA3F-25.00W-R

Specifications（25℃）		Symbol	Unit	K91SA3F-25.00W-R K94SA3F-25.00W-R K98SA3F-25.00W-R
Optical data	CW-output power	P_o	W	25
	Center wavelength	λ_c	nm	915/940/976
	Tolerance of λ	-	nm	±3,±10
	Spectral width (FWHM)	△λ	nm	<5
	Temperature drift of λ	-	nm/℃	~0.3
Fiber data (1)	Fiber core diameter	W_c	μm	105
	Numerical aperture	NA	-	0.15/0.22
	Fiber connector	-	-	FC, ST, SMA-905
Electrical data	Operation current	I_{op}	A	10
	Threshold current	I_{th}	A	0.5
	Conversion efficiency	η	%	48
	Slope efficiency	η_D	W/A	2.8
	Operation voltage	V_{op}	V	5.4
	Reverse voltage	V_{re}	V	7.5
Feedback Isolation	Wavelength range	λ	nm	1040-1100
	Isolation	-	dB	>45
Others	Operation temperature	T_{op}	℃	10~30
	Storage temperature	T_{st}	℃	-20~+80
	Expected lifetime	MTBF	h	>100,000
	Dimensions (fiber and connector not included)	-	mm	42.0 x 25.0 x 17.0
	Lead soldering temperature	T_{ls}	℃	260(10 sec.)

(1) Other fibers available.

Ant Series- 9××nm High Brightness Diode Laser

K91SA3F-25.00W-R K94SA3F-25.00W-R K98SA3F-25.00W-R

Characteristics

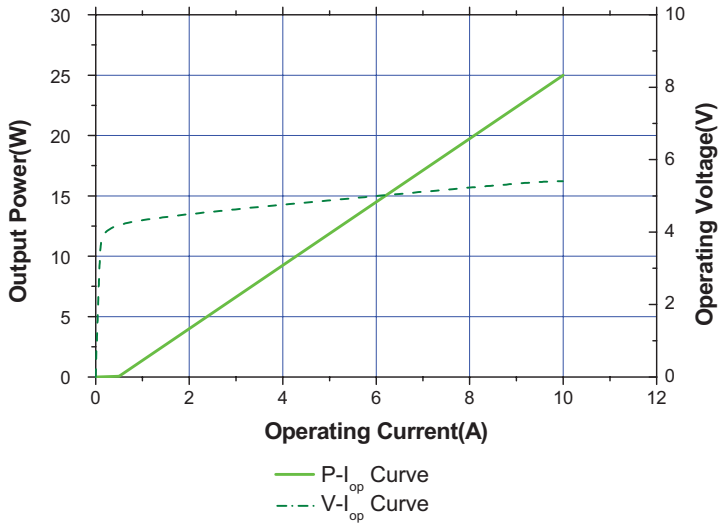

Typ. spectrum (T=25℃)

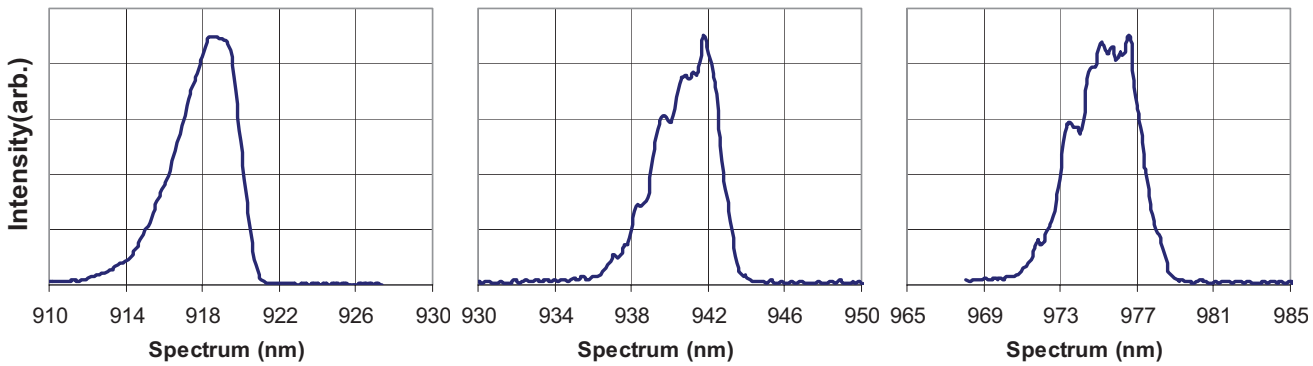

Ant Series- 9××nm High Brightness Diode Laser

K91SA3F-25.00W-R K94SA3F-25.00W-R K98SA3F-25.00W-R

Package Dimensions (mm)

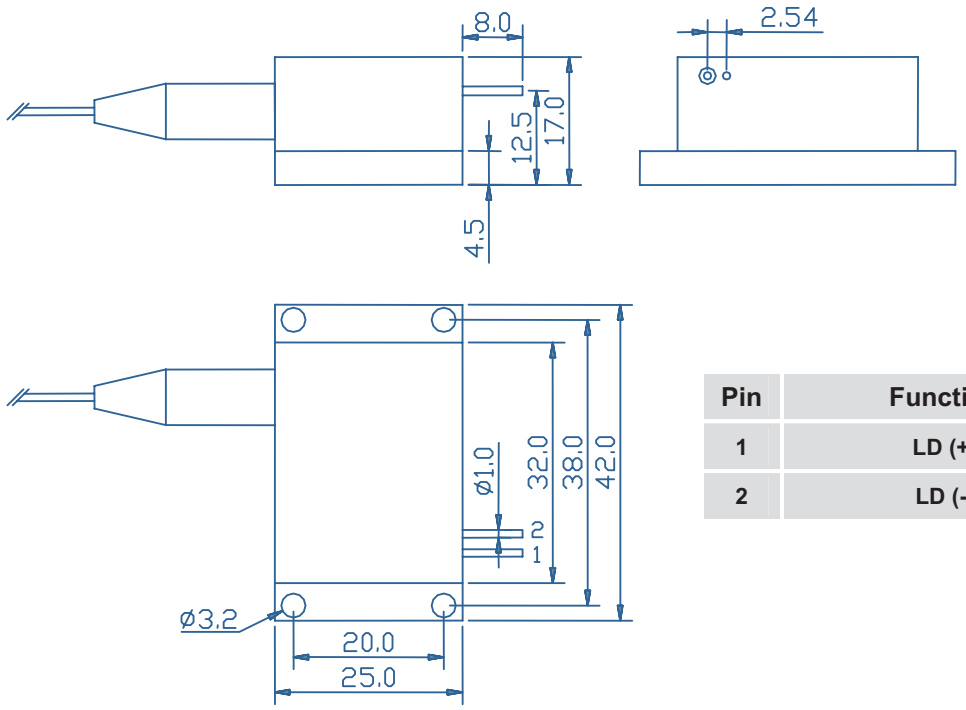

Pin	Function
1	LD (+)
2	LD (-)

OPERATING NOTES

- Avoid eye exposure to direct or scattered radiation.
- ESD precautions must be taken.
- Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260℃ and time shorter than 10 second.
- Use constant current power supply. Avoid surge current.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- A minimum bend diameter should be 300 times greater than the fiber diameter.
- Operation temperature is 10℃~ 30℃.
- Storage: -20℃~ +80℃, all pins short-circuit.

Information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time without notice.

BWT Beijing LTD is a high-tech enterprise located in Zhongguancun Science and Technology Fengtai Park, Beijing, China. BWT is a manufacturer that focuses on the packaging of pigtailed semiconductor lasers and detectors. BWT also provides customizing products and OEM services.

The company's products include fiber-coupled diode lasers, laser systems and the associated electronics, and diode laser arrays. It has between 50 and 100 employees including a research staff of two dozen, and approximately 2,000 square meters of manufacturing space.

200W Continuous Wave Fiber Laser

Product descriptions

200W Continuous Wave fiber laser for marking metallic and nonmetallic materials with high beam quality and power stability. It can be used in operation environments of high-pressure and high-humidity.

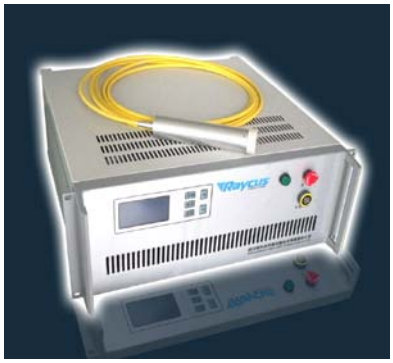

Applications

*Micromachining
*3-D deformation
*Thermal printing
*Drilling
*Cutting

Dimensions

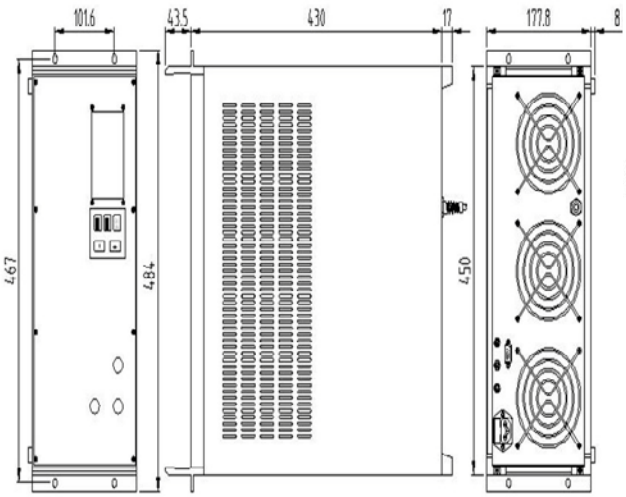

Laser module dimension

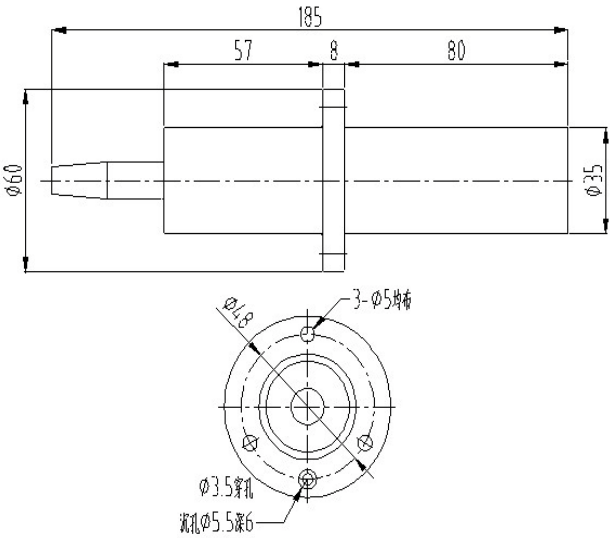

Fiber collimator dimension

Technical parameters

Continuous wave fiber laser	200W CW
Wavelength（nm）	1064±1
Polarization	Random
Rated Output Power (W)	200
Power Adjustment Range（%）	5-100
Instability of Long-term nominal average output power (Over 5 hours)(%)	<3
Beam quality（M2）	<1.2
Output fiber length（m）	3
Working voltage（VAC）	220±10%, 50Hz
Power consumption（20℃）（W）	850
Cooling	Forced air cooled
Operating Temperature Range（℃）	0-45
Operating Humidity Range（%）	10-95
Dimension of optical module, W×D×H (mm)	484×185.8×490.5
Weight（kg）	15

ADD: HUST Industry District Innovation Base 10th Building,East Lake Hi-Tech Development Zone,China
TEL: +86-27-81338818 FAX: +86-27-81338810 P.C: 430223
HTTP://www.raycuslaser.com

Xi'an Focuslight Technologies Co.,Ltd.
www.focuslight.com.cn

Vertical Stack Micro-channel Water Cooled Laser Diode (CW)

FEATURES

- High power
- Long lifetime
- Low Smile
- Narrow spectrum

APPLICATIONS

- Laser pumping
- Military and defense
- Industry applications
- Scientific research

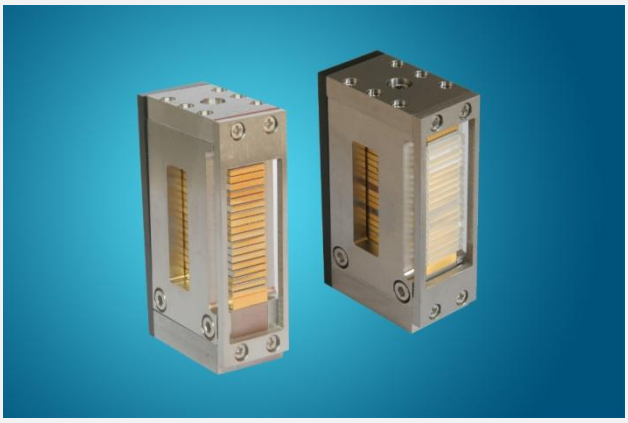

Device Dimension (mm)

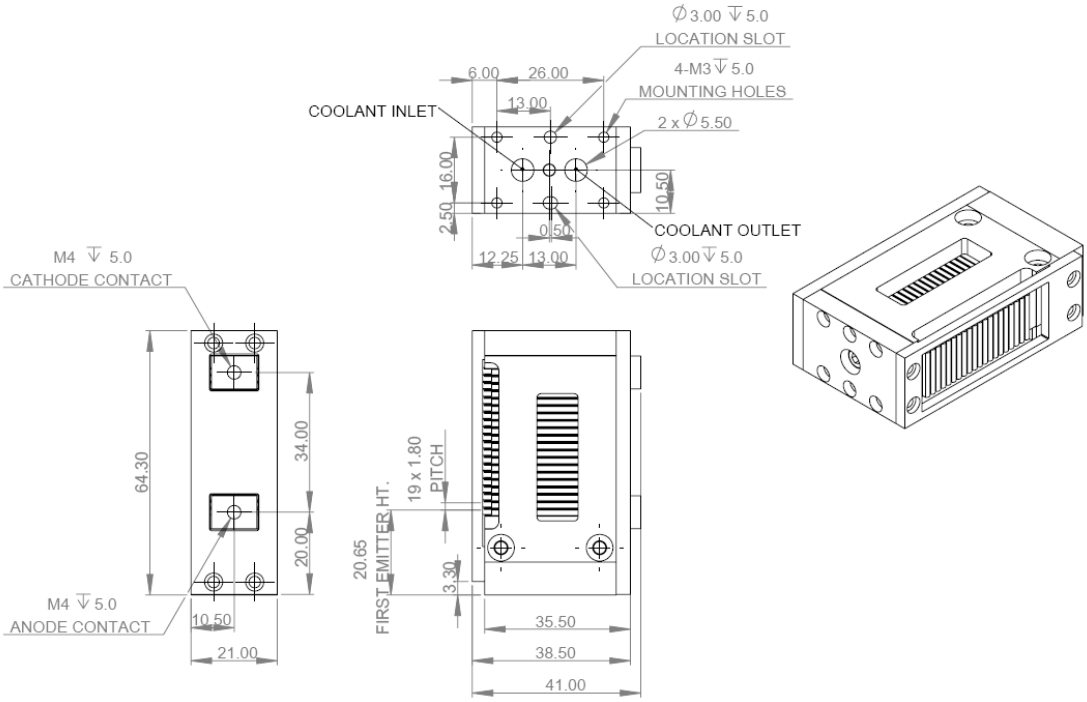

Remark: 5 to 20 bars are available, the above drawing is for 20 bars. Please contact FocusLight for details.

Specification

Products	FL-VS-2000-***-3	FL-VS-1000-***-3	FL-VS-500-***-3
Operating Power P_o(W)	2000	1000	500
Number of Bars	20	10	5
Center Wavelength λ(nm)	780～830	780～830	780～830
Wavelength Tolerance (nm）	±3	±3	±3
Operating Current I_o (A)	≤115	≤115	≤115
Threshold Current I_{th} (A)	≤25	≤25	≤25
Operating Voltage(V)	≤40	≤20	≤10
Slope Efficiency (W/A)	≥22.0	≥11.0	≥5.5
Power Conversion Efficiency (%)	≥50	≥50	≥50
Spectral Width FWHM (nm)	≤4	≤3.5	≤3.5
Spectral Width FW90%E(nm)	≤8	≤7	≤6
Fast Axis Divergence（90%,degree）	70	70	70
Slow Axis Divergence（90%,degree)	10	10	10
Wavelength Temp. Coefficient (nm/℃)	0.28	0.28	0.28
Operating Temperature (℃)	15～35	15～35	15～35
Storage Temperature (℃)	-40～60	-40～60	-40～60
Coolant	Deionized water		
Flow Rate（L/min/bar）	0.25-0.30		
Filter（μm）	<10		
Resistivity（MΩ/cm）	0.15-0.30		

Remarks:

- For fast axis collimation using FAC lens: Divergence <0.5°
- Data at 25℃ water temperature, unless otherwise stated.
- Reduced lifetime if used above nominal operating conditions.
- A non-condensing environment is required for storage and operation below ambient dew point.

Xi'an Focuslight Technologies Co., Ltd.
No.17 Xinxi Road,New Industrial Park
Xi'an, Shaanxi 710119,P.R.China
Tel: +86-29 8888 0786 Fax: +86-29 8888 7075
Email: sales@focuslight.com.cn
www.focuslight.com.cn

Hi-Tech Optoelectronics Co.,Ltd.

808nm Laser Module Series

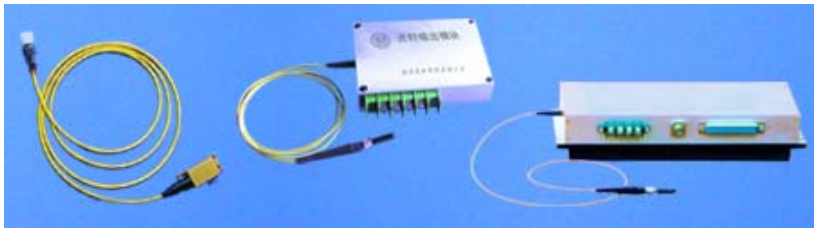

Description

808nm laser module is the quantum well laser with no cooler .It can be multimode fiber coupled output at the high power and N.A. 0.12 / 0.22.The products can be used in the fields which need high power and long lifetime, like laser pumping , medical usage, printing , heat treatment of material ,marking and so on.

Features

* Kinds of output power: 600mW、750mW、 1.5W、5W、10W、14W、25W;
* Spectral Width <4nm
* 50μm、100μm、400μm、700μm Fiber Output
* High Reliability
* High Efficiency

Applications

* Laser pumping
* Medical Usage
* Printing
* Heating
* Material dealing
* Marking

Specifications（25℃）

Type	FLMM-0808-7*1-600m	FLMM-0808-7*1-750m	FLMM-0808-7*1-1.5W	FLMM-0808-8*1-005W	FLMM-0808-8*1-010W	FLMM-0808-9*1-012W	FLMM-0808-9*1-014W	FLMM-0808-9*1-025W	Unit
Optical Specification									
CW Output Power from Fiber P_f	600	750	1500	5000	10000	12000	14000	25000	mW
Center Wavelength λ_c	808	808	808	808	808	808	808	808	nm
Wavelength Tolerance	±5	±5	±5	±5	±5	±5	±5	±5	nm
Spectral Width Δλ	< 4	< 4	< 4	< 5	< 5	< 7(4)	< 7(4)	< 7(4)	nm
Wavelength Temperature Coefficient	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	nm/℃
Fiber Characteristics									
Fiber Core Size	50	100	100	400	400	700	700	700	μm
N.A.	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	
Fiber Length	1	1	1	1	1	1	1	1	m
Connecter	FC/ST/SMA-905								
Electrical Specification									
Slope Efficiency E_s	> 0.60	> 0.75	> 0.75	> 5	> 5	> 10	> 13	> 13	W/A
Threshold Current I_{th}	≤0.26	≤0.26	≤0.50	≤0.26	≤0.50	≤0.26	≤0.26	≤0.50	A
Operating Current I_o	≤1.24	≤1.24	≤2.55	≤1.24	≤2.55	≤1.24	≤1.24	≤2.55	A

Operating Voltage V_f	≤2	≤2	≤2.20	≤14	≤15.40	≤36	≤36	≤39.60	V
Series Resistance R_d	≤0.30	≤0.30	≤0.25	≤2.10	≤1.75	≤5.40	≤5.40	≤4.50	Ω
Package Style	P1-Package,HHL			P2-Package			P3- Package		
Absolute Maximum Ratings									
Reverse Voltage V_r	2	2	2.2	14	15	36	36	39	V
Operating Temperature T_o	≤25								℃
Storage Temperature T_{stg}	-10～60								℃

Ordering Information

FLMS—□□□□—□□□—□□□□

- Output Power Unit:
  "m" "W" "K" means
  "mW" "W" "KW"
- Rated Output Power
  Fill with 0 if less than three numerals
- Cooling:
  1: Without cooler
- Connector:
  0: No connector
  1: FC/PC Output
  2: ST/PC Output
  6: SMA-905 Output
- Package:
  7: High power package 1
  8: High power package 2
  9: High power package 3
  A: HHL package
- Center Wavelength:
  Fill with 0 if Less than four numerals
- Multi-Mode Laser Diode Module Series Products

Package Dimensions

P1 Package（Clicking to magnify）



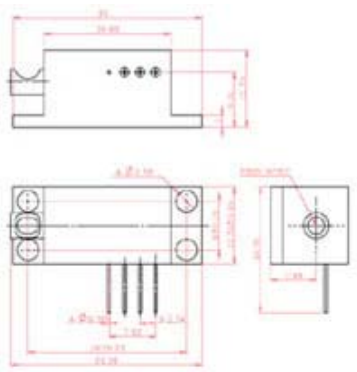

P2 Package（Clicking to magnify）

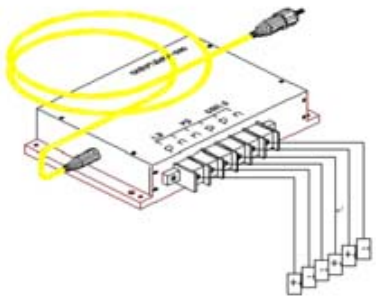

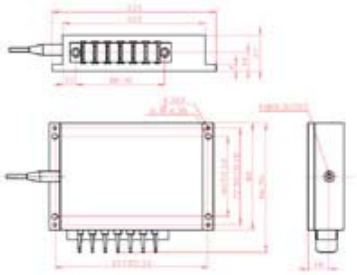

P3 Package（Clicking to magnify）

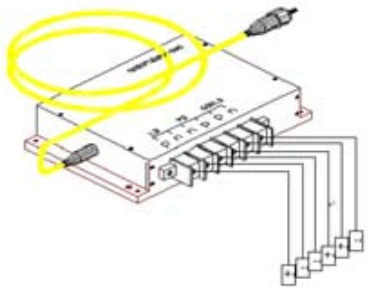

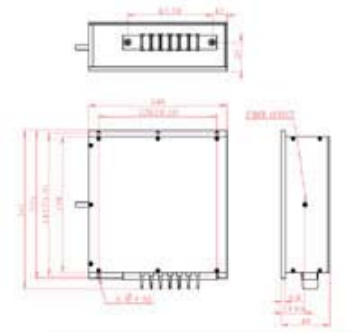

HHL Package

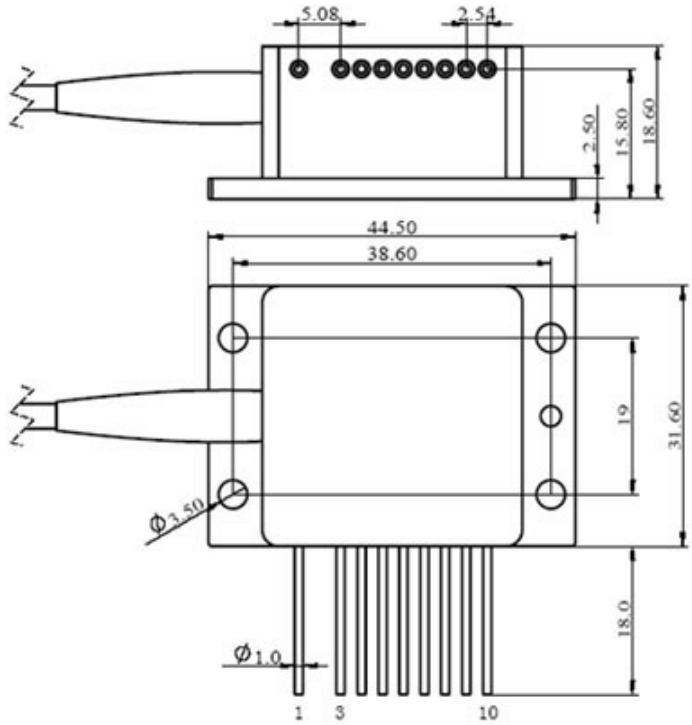

Pin Function

1 TEC(-)
2 -
3 case
4 LD(+)
5 Thermistor
6 Thermistor
7 LD(-)
8 PD (P)
9 PD (N)
10 TEC(+)

Typical Performance Curves

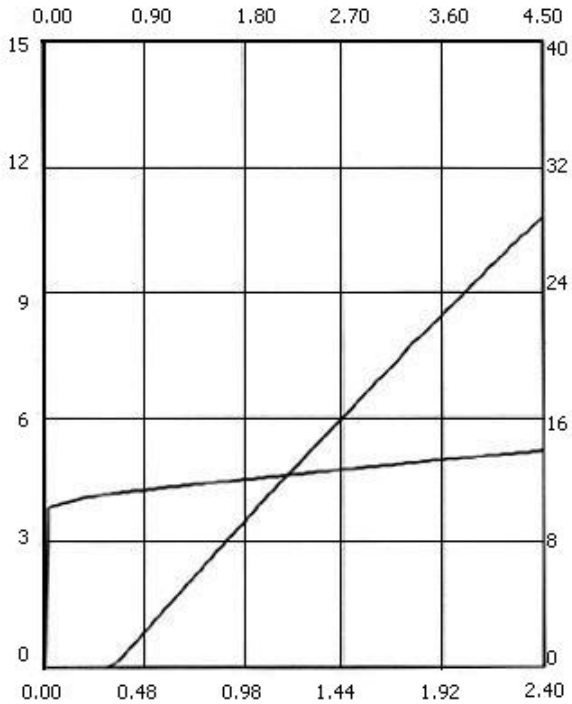

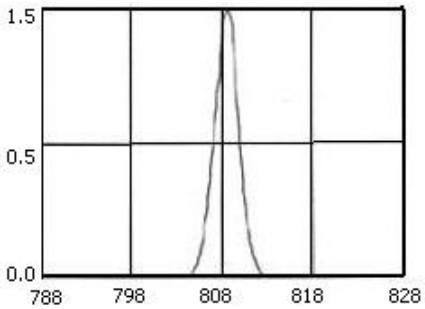

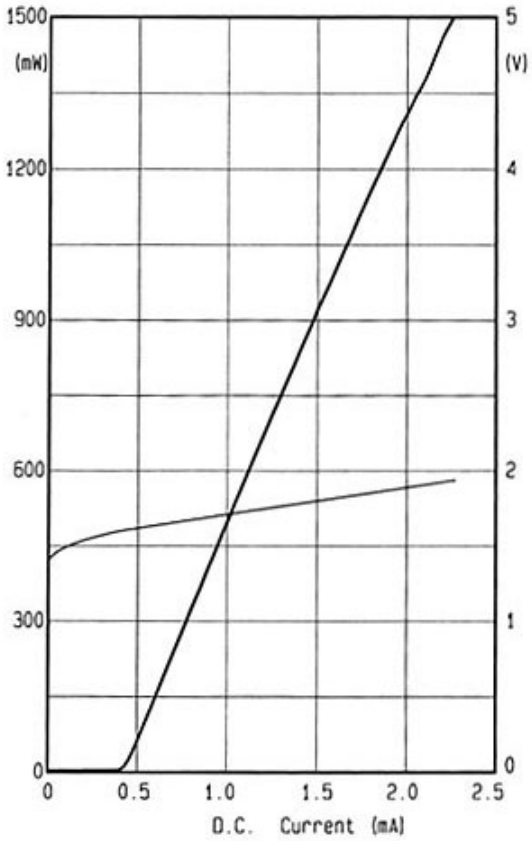

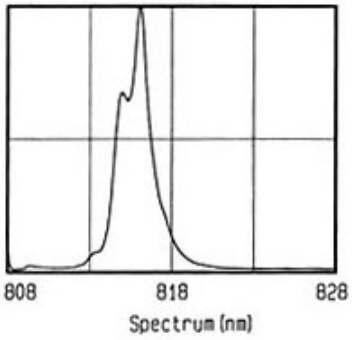

Notes

1. Laser beam is harmful especially for your eyes. Don't look at the laser beam directly.
2. Lifetime of the diode laser variated with the operating temperature inversely. We advise that the TEC cooler should be used to keep the temperature suitable.
3. For turning on the diode laser, please increase the current gradually to the specified operating value. For shutting down the diode laser, please decrease the current to zero gradually, and then turn off the power.
4. Please wear staticproof bracelet when operating.
5. Please connect the pins of the diode laser correctly as the picture showen in the manual.
6. The operating current must less than the rated current. Otherelse the diode laser should be damaged.
7. The fiber facet should be keep clean befor the diode laser is operating.
8. Please use the constant-current source to avoid the surge.
9. Diode laser should be short circuit when stop using.
10. Bend diameter of the fiber must be larger than 4cm temporarily and 8cm permanently.

Copyright© Hi-Tech Optoelectronics Co., Ltd.
Address：Jia 35 Qinghuadong Road,Haidian District ,Beijing 100083 China
Tel：86-10-6253-7788 Fax：86-10-8233-5727 E-mail：info@htoe.com.cn

Hi-Tech Optoelectronics Co.,Ltd.

980nm Laser Module Series

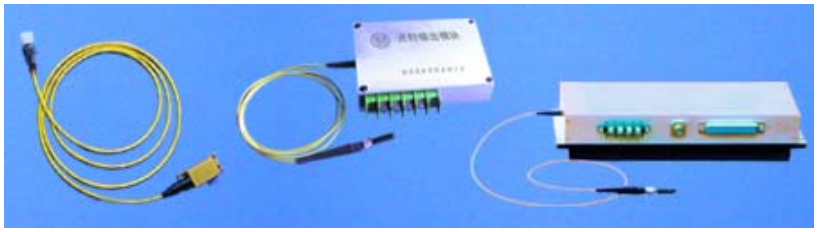

Description

980 Laser Module Series are uncooled MQW Fiber-coupled Module ,operating with maximum output power CW: 25w and NA: 0.12 or 0.22 fiber-coupled output. It is mainly applied for high-luminance, long life area such as laser pumping source, medical usage, printing, heating, material processing, marking ect.

Features

* Output Power：600mW、750mW、 1.2W、5W、10W、12W、22W
* Spectral Width <4nm
* 50μm、100μm、400μm、700μm Fiber Output
* High Reliability
* High Efficiency

Applications

* Medical Usage
* Heating
* Material Processing
* Marking

Specifications（25℃）

Type	FLMM-0980-7*1-600m	FLMM-0980-7*1-750m	FLMM-0980-7*1-1.3W	FLMM-0980-8*1-005W	FLMM-0980-8*1-010W	FLMM-0980-9*1-012W	FLMM-0980-9*1-022W	Unit
Optical Specification								
Fiber Output Power P_f	600	750	1300	5000	10000	12000	22000	mW
Center Wavelength λ_c	975	975	975	975	975	975	975	nm
Wavelength Tolerance	±15	±15	±15	±15	±15	±15	±15	nm
Spectral Width Δλ	< 4	< 4	< 4	< 5	< 5	< 7	< 7	nm
Wavelength Temperature Coefficient	0.4	0.4	0.4	0.4	0.4	0.4	0.4	nm/℃
Fiber Characteristics								
Fiber Core Size	50	100	100	400	400	700	700	μm
N.A.	0.22	0.22	0.22	0.22	0.22	0.22	0.22	
Fiber Length	1	1	1	1	1	1	1	m
Connecter	FC/ST/SMA-905							
Electrical Specification								
Slope Efficiency E_s	> 0.6	> 0.75	> 0.65	> 5	> 4.5	> 13	> 11	W/A
Threshold Current I_{th}	≤0.25	≤0.25	≤0.45	≤0.25	≤0.45	≤0.25	≤0.45	A
Operating Current I_o	≤1.25	≤1.25	≤2.45	≤1.25	≤2.45	≤1.25	≤2.45	A
Operating Voltage V_f	< 2	< 2	< 2	< 14	< 14	< 36	< 36	V
Series Resistance R_d	< 0.50	< 0.50	< 0.25	< 3.50	< 1.75	< 9	< 4.50	Ω
Package Style	P1-Package,HHL			P2-Package		P3-Package		
Absolute Maximum Ratings								
Reverse Voltage V_r	2	2	2	14	14	36	36	V
Operating Temperature								

T_o	≤25	℃
Storage Temperature T_{stg}	-10～60	℃

Ordering Information

FLMM-□□□□-□□□-□□□□

- Output Power Unit: "m" "W" "K" means "mW" "W" "KW"
- Rated Output Power: Fill with 0 if less than three numerals
- Cooling: 1: Without cooler
- Connector: 0: No connector; 1: FC/PC Output; 2: ST/PC Output; 6: SMA-905 Output
- Package: 7: High power package 1; 8: High power package 2; 9: High power package 3
- Center Wavelength: Fill with 0 if Less than four numerals
- Multi-Mode Laser Diode Module Series Products

Package Dimensions

P1 Package（Clicking to magnify）



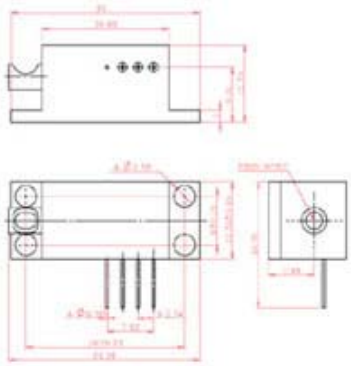

P2 Package（Clicking to magnify）

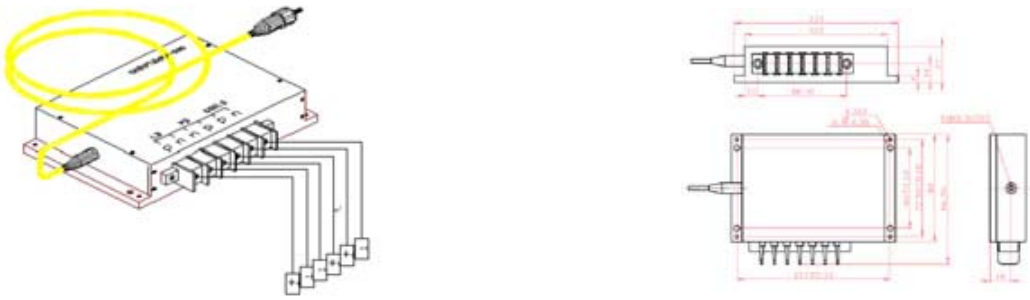

P3 Package（Clicking to magnify）

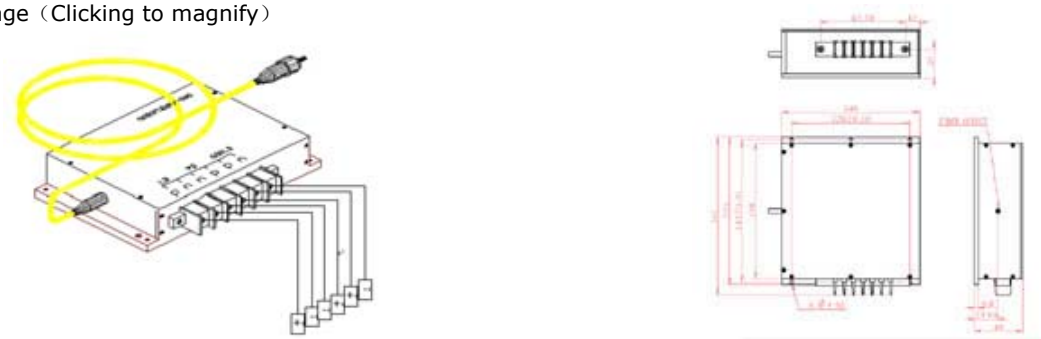

HHL Package

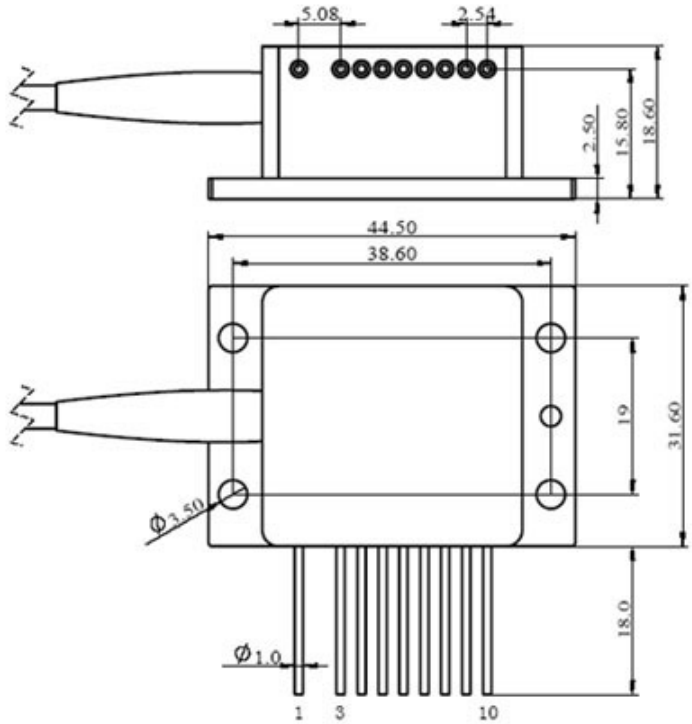

Pin Function
1 TEC(-)
2 -
3 case
4 LD(+)
5 Thermistor
6 Thermistor
7 LD(-)
8 PD (P)
9 PD (N)
10 TEC(+)

Typical Performance Curves

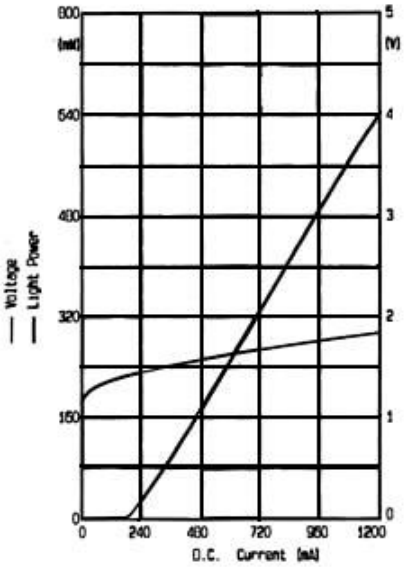
800
(mW)
640
480
320
160
0
5
(V)
4
3
2
1
0
— Voltage
— Light Power
0
240
480
720
960
1200
D.C. Current (mA)


970
980
990
Spectrum (nm)

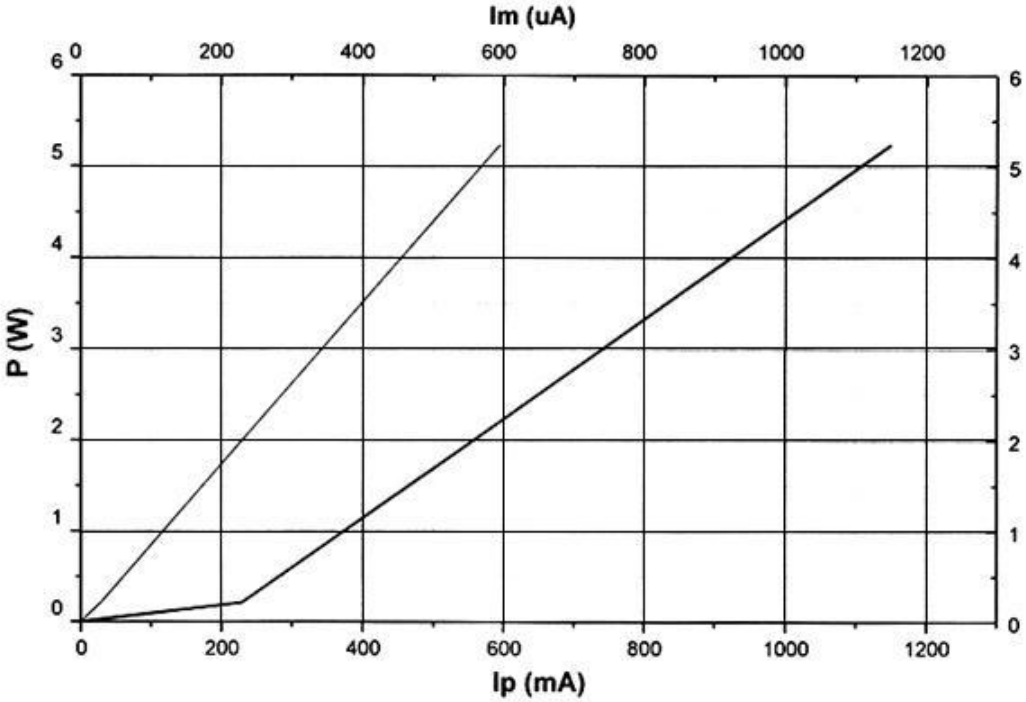
Im (uA)
0
200
400
600
800
1000
1200
6
5
4
3
2
1
0
P (W)
Ip (mA)

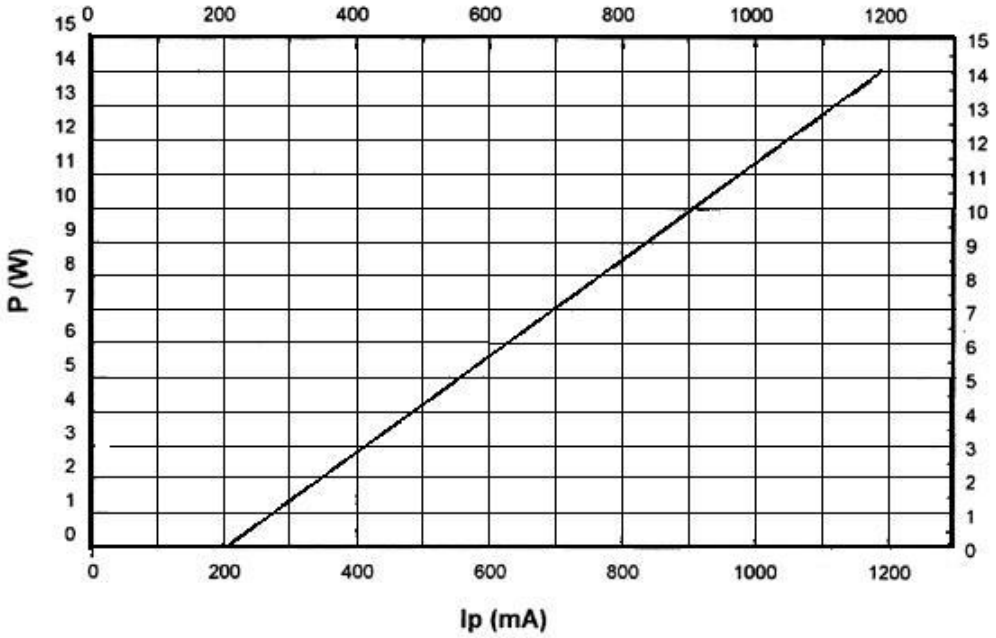

Notes

1. Laser beam is harmful especially for your eyes. Don't look at the laser beam directly.
2. Lifetime of the diode laser variated with the operating temperature inversely. We advise that the TEC cooler should be used to keep the temperature suitable.
3. For turning on the diode laser, please increase the current gradually to the specified operating value. For shutting down the diode laser, please decrease the current to zero gradually, and then turn off the power.
4. Please wear staticproof bracelet when operating.
5. Please connect the pins of the diode laser correctly as the picture showen in the manual.
6. The operating current must less than the rated current. Otherelse the diode laser should be damaged.
7. The fiber facet should be keep clean befor the diode laser is operating.
8. Please use the constant-current source to avoid the surge.
9. Diode laser should be short circuit when stop using.
10. Bend diameter of the fiber must be larger than 4cm temporarily and 8cm permanently.

Copyright© Hi-Tech Optoelectronics Co., Ltd.
Address：Jia 35 Qinghuadong Road,Haidian District ,Beijing 100083 China
Tel：86-10-6253-7788 Fax：86-10-8233-5727 E-mail：info@htoe.com.cn

Hi-Tech Optoelectronics Co.,Ltd.

Stacked Laser Diode Arrays

Description

HTOE Laser diode array series has been designed to provide the high output power, long lifetime and high reliability required for solid laser pumping ,medical usage and other high power laser diode applications.

Features

* Output peak power 15000W
* Spectral Width ≤4nm
* High Reliability
* High Efficiency
* CW stack arrays adopt micro-channel package
* QCW stack can be designed according to the customer of non-standard products heat sink package

Applications

* Laser Pumping
* Medical Usage
* High power laser diode applications

Specifications（20℃）

780-830nm CW Bars

Type	LDAC2-0808-040W	LDAC2-0808-060W	LDAC2-0808-100W	LDAC2-0808-200W	LDAC2-0808-320W	LDAC2-0808-480W	Unit
Optical Specification							
CW Output Power P_o	40	60	100	200	320	480	W
Output Power/bar Ps	20	20	20	40	40	40	W
Array Length L	10	10	10	10	10	10	mm
Center Wavelength λ_c	780-830	780-830	780-830	780-830	780-830	780-830	nm
Wavelength Tolerance	±5	±5	±5	±5	±5	±5	
Spectral Width Δλ	≤4	≤4	≤4	≤4	≤4	≤4	nm
Package Style	Micro Channel						
Bar length	1.6	1.6	1.6	2.4	2.4	2.4	mm
Number of Bars	2	3	5	5	8	12	
Wavelength Temperature Coefficient	0.3	0.3	0.3	0.3	0.3	0.3	nm/℃
Beam Divergence $\theta_{\parallel} \times \theta_{\perp}$	8×40	8×40	8×40	8×40	8×40	8×40	deg
Electrical Specification							
Slope Efficiency E_s(/bar)	≥1	≥1	≥1	≥1	≥1	≥1	W/A
Conversion Efficiency N_s	≥40%	≥40%	≥40%	≥40%	≥40%	≥40%	
Threshold Current I_{th}	≤5	≤5	≤5	≤12	≤12	≤12	A
Operating Current I_o	≤25	≤25	≤25	≤52	≤52	≤52	A
Operating Voltage V_f	≤4	≤6	≤10	≤10	≤16	≤24	V
Series Resistance R_d							Ω

Absolute Maximum Ratings							
Reverse Voltage V_r	2.5	2.5	2.5	2.5	2.5	2.5	V
Operating Temperature T_o	20	20	20	20	20	20	℃
Storage Temperature T_{stg}	-10～60	-10～60	-10～60	-10～60	-10～60	-10～60	℃

920-980nm CW Bars

Type	LDAC2-0980-040W	LDAC2-0980-060W	LDAC2-0980-100W	Unit
Optical Specification				
CW Output Power P_o	40	60	100	W
Output power/bar Ps	20	20	20	W
Array Length L	10	10	10	mm
Center Wavelength λ_c	920-980	920-980	920-980	nm
Wavelength Tolerance	±5	±5	±5	nm
Spectral Width Δλ	≤4	≤4	≤4	
Package Style		Micro Channel		
Bar Length	1.6	1.6	1.6	mm
Number of Bars	2	3	5	
Wavelength Temperature Coefficient	0.3	0.3	0.3	nm/℃
Beam Divergence $\theta_{\parallel} \times \theta_{\perp}$	8×40	8×40	8×40	
Electrical Specification				
Slope Efficiency E_s(/bar)	≥0.8	≥0.8	≥0.8	W/A
Conversion Efficiency N_s	≥30%	≥30%	≥30%	
Threshold Current I_{th}	≤10	≤10	≤10	A
Operating Current I_o	≤30	≤30	≤30	A
Operating Voltage V_f	≤4	≤6	≤10	V
Series Resistance R_d				Ω
Absolute Maximum Ratings				
Reverse Voltage V_r	2.5	2.5	2.5	V
Operating Temperature T_o	20	20	20	℃
Storage Temperature T_{stg}	-10～60	-10～60	-10～60	℃

780-830nm QCW Bars

Type	LDAQ2-0808-300W	LDAQ2-0808-600W	LDAQ2-0808-1.2K	LDAQ2-0808-003K	LDAQ2-0808-005K	LDAQ2-0808-015K	Unit
Optical Specification							
QCW Output Power P_o	300	600	1200	3000	5000	15000	W
Output power/bar Ps	60	60	60	100	100	100	W/bar
Array Length L	10	10	10	10	10	10	mm
Center Wavelength λ_c	780-830	780-830	780-830	780-830	780-830	780-830	nm
Wavelength Tolerance	±5	±5	±5	±5	±5	±5	nm
Spectral Width Δλ	≤4	≤4	≤4	≤4	≤4	≤4	nm
Bar Length	0.5	0.5	0.5	0.5	0.5	0.5	mm
Number of Bars	5	10	20	30	50	150	
Wavelength Temperature Coefficient	0.3	0.3	0.3	0.3	0.3	0.3	nm/℃

Beam Divergence $\theta_{\parallel} \times \theta_{\perp}$	8×40	8×40	8×40	8×40	8×40	8×40	
Electrical Specification							
Slope Efficiency E_s(/bar)	≥1	≥1	≥1	≥1	≥1	≥1	W/A
Conversion Efficiency N_s	≥40%	≥40%	≥40%	≥40%	≥40%	≥40%	
Threshold Current I_{th}	≤25	≤25	≤25	≤25	≤25	≤25	A
Operating Current I_o	≤90	≤90	≤90	≤120	≤120	≤120	A
Operating Voltage V_f	≤10	≤20	≤40	≤60	≤100	≤300	V
Series Resistance R_d							Ω
Absolute Maximum Ratings							
Reverse Voltage V_r	2.5	2.5	2.5	2.5	2.5	2.5	V
Operating Temperature T_o	20	20	20	20	20	20	℃
Storage Temperature T_{stg}	-10～60	-10～60	-10～60	-10～60	-10～60	-10～60	℃

920-980nm QCW Bars

Type	LDAQ2-0980-300W	LDAQ2-0980-600W	LDAQ2-0980-1.2K	Unit
Optical Specification				
QCW Output Power P_o	300	600	1200	W
Output power/bar Ps	60	60	60	W
Array Length L	10	10	10	mm
Center Wavelength λ_c	920-980	920-980	920-980	nm
Wavelength Tolerance	±5	±5	±5	nm
Spectral Width Δλ	≤4	≤4	≤4	nm
Bar Length	0.4	0.4	0.4	mm
Number of Bars	5	10	20	
Wavelength Temperature Coefficient	0.3	0.3	0.3	nm/℃
Beam Divergence $\theta_{\parallel} \times \theta_{\perp}$	8×40	8×40	8×40	
Electrical Specification				
Slope Efficiency E_s(/bar)	≥0.8	≥0.8	≥0.8	W/A
Conversion Efficiency N_s	≥30%	≥30%	≥30%	
Threshold Current I_{th}	≤15	≤15	≤15	A
Operating Current I_o	≤75	≤75	≤75	A
Operating Voltage V_f	≤10	≤20	≤40	V
Series Resistance R_d				Ω
Absolute Maximum Ratings				
Reverse Voltage V_r	2.5	2.5	2.5	V
Operating Temperature T_o	20	20	20	℃
Storage Temperature T_{stg}	-10～60	-10～60	-10～60	℃

Ordering Information

LDAC□—□□□□—□□□□

- Unit of Power:
  W: output power in W; K: output power in kW
- Output Rating:
  Actual output power in W, fill with 0 if less than three numerals
- Wavelength:
  Center Wavelength, fill with 0 if less than four numerals
- Structures:
  1: Single Bar 2: Stack Arrays 3: Linear Arrays
- Laser Diode CW Arrays Series

LDAQ□—□□□□—□□□□

- Unit of Power:
  W: output power in W; K: output power in kW
- Output Rating:
  Actual output power in W, fill with 0 if less than three numerals
- Wavelength:
  Center Wavelength, fill with 0 if less than four numerals
- Structures:
  1: Single Bar 2: Stack Arrays 3: Linear Arrays
- Laser Diode Quansi-CW Arrays Series

Package Dimensions

Package Dimensions（Clicking to magnify）

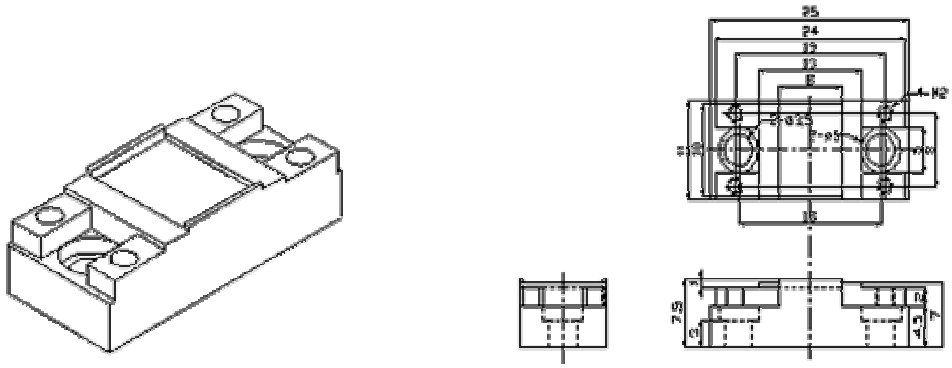

Typical Performance Curves

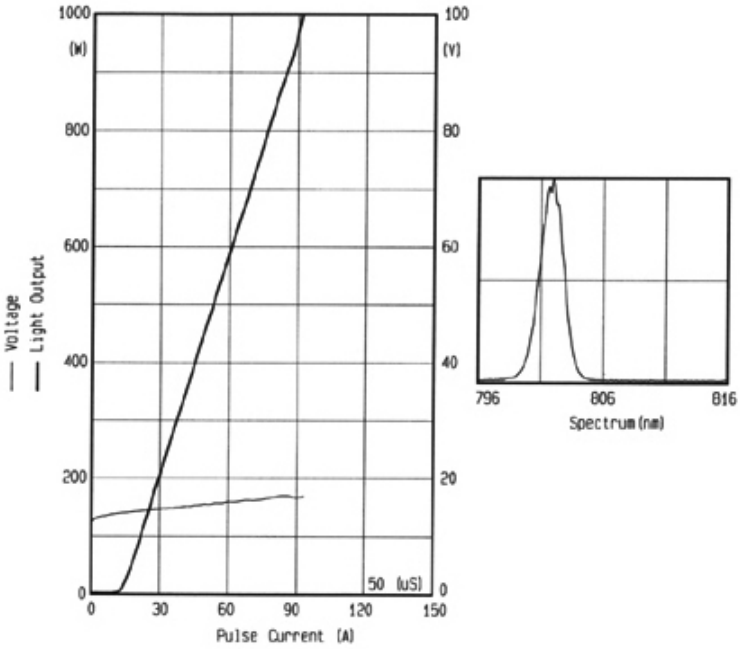

Notes

1. Caution! Don't look at the laser beam directly, because it's harmful to eyes.
2. The storage temperature is between -10 and 60 ℃.
3. Under normal circumstances, the higher the temperature is, the shorter the life of semiconductor laser will be. It is recommended to use lasers under TEC cooling or in air-conditioned room.
4. To use a laser diode in following sequences: Turn on the power supply; connect to the laser diode; and then increase the current gradually to the specified operating value. To shut down the laser diode, please decrease the current to zero gradually, and then turn off the power. Please make sure that the power supply has no current overshoot at any time. The current overshoot can damage the laser diodes permanently.
5. The high power laser diode arrays are very sensitive to electrostatic. Please wear anti-static bracelet during operating with the laser diodes (arrays).
6. Be sure that the operating current does not exceed the specified operating current. Otherwise, it will accelerate laser aging, shorten lifetime or even damage devices permanently.
7. A clean, dry and ventilated environment should be available when storing and operating laser diodes (arrays). Dust may degrade the laser diodes (arrays).
8. Constant-current power supply with voltage regulator should be used to avoid surge.

Copyright© Hi-Tech Optoelectronics Co., Ltd.
Address：Jia 35 Qinghuadong Road,Haidian District ,Beijing 100083 China
Tel：86-10-6253-7788 Fax：86-10-8233-5727 E-mail：info@htoe.com.cn

Hi-Tech Optoelectronics Co.,Ltd.

1450nm Laser Module Series



Description

1450nm diode laser module can output high power laser beam from optical fiber which NA is 0.22. This series product can used in the fields that need high brightness and long lifetime such as printing, space communication and medical.

Features

* Output Power: 400mW、3W、8W
* Spectral Width <10nm
* 100μm、430μm、600μm Fiber Output
* High Reliability
* High Efficiency

Applications

* Laser pumping
* Medical Usage
* Printing

Specifications (25℃)

Type	Symbol	Min.	Typ.	Max.	Unit
Center Wavelength	λ_c	1420	1450	1480	nm
Power	P_o	400	-	8000	mW
Threshold Current	I_{th}	500	600	700	mA
Operating Current	I_o	-	2800	3000	mA
Operating Temperature	T_o	-10	-	30	℃
Storage Temperature	T_{stg}	-40	-	70	℃

Type	FLMM-1450-7（0、1、2、6）1-400m	FLMM-1450-8（0、2、6）1-3W	FLMM-1450-9（0、6）1-3W
Optical Specification			
Fiber Output Power	400mW	3W	8W
Center Wavelength	1420~1480nm	1420~1480nm	1420~1480nm
Spectral Width	< 10nm	< 10nm	< 10nm
Wavelength Temperature Coefficient	0.4nm/℃	0.4nm/℃	0.4nm/℃
Fiber Specification			
Fiber Core Size	100μm	400μm	600μm
N.A.	0.22	0.22	0.22
Fiber Length	1m	1m	1m
Connecter	FC/ST/SMA-905	ST/SMA-905	SMA-905
Electrical Specification			
Slope Efficiency	>0.17W/A	>1.25W/A	>3.3W/A
Threshold Current	600mA	600mA	600mA
Operating Current	3A	3A	3A

Operating Voltage	< 2 V	< 15V	< 35V
Series Resistance	< 0.2Ω	< 1.2Ω	< 3Ω
Package Style	P1-Package	P2-Package	P3-Package

Ordering Information

FLMS—□□□□—□□□—□□□□

- Output Power Unit:
  "m" "W" "K" means
  "mW" "W" "KW"
- Rated Output Power
  Fill with 0 if less than three numerals
- Cooling:
  1: Without cooler
- Connector:
  0: No connector
  1: FC/PC Output
  2: ST/PC Output
  6: SMA-905 Output
- Package:
  6: High power package 1
  7: High power package 2
  8: High power package 3
- Center Wavelength:
  Fill with 0 if Less than four numerals
- Multi-Mode Laser Diode Module Series Products

Package Dimensions

P1 Package Dimensions（Clicking to magnify）



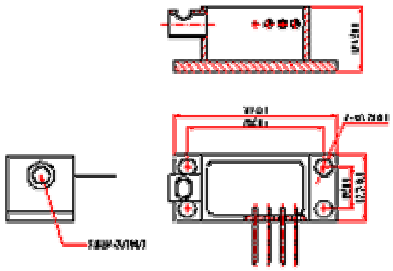

P2 Package Dimensions（Clicking to magnify）

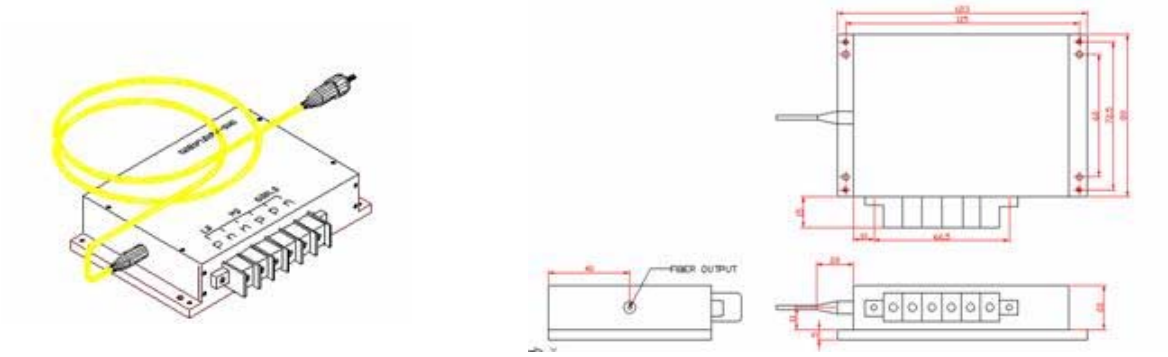

P3 Package Dimensions（Clicking to magnify）

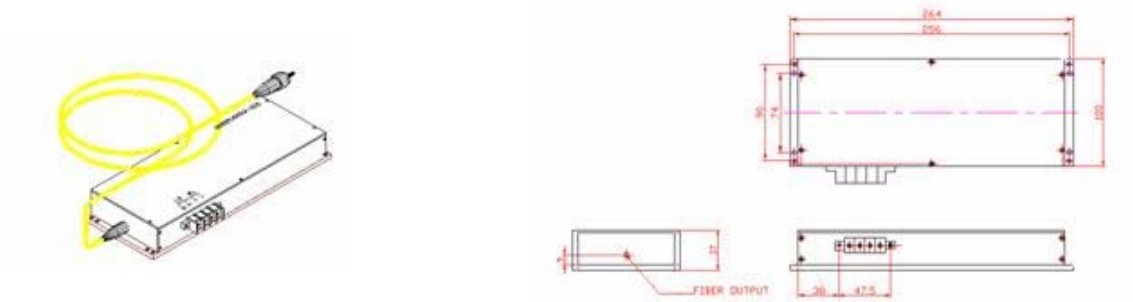

Typical Performance Curves

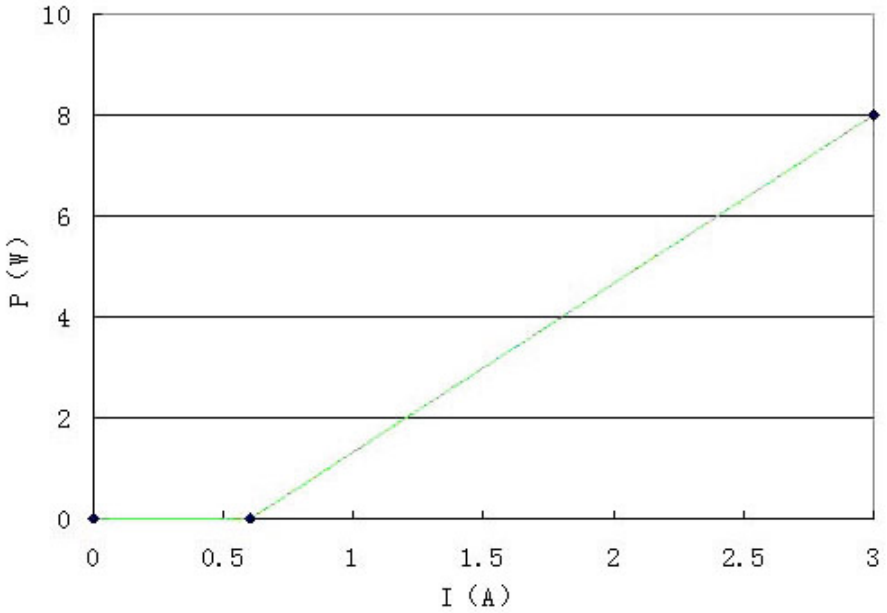

Notes

1. Laser beam is harmful especially for your eyes. Don't look at the laser beam directly.
2. Lifetime of the diode laser variated with the operating temperature inversely. We advise that the TEC cooler should be used to keep the temperature suitable.
3. For turning on the diode laser, please increase the current gradually to the specified operating value. For shutting down the diode laser, please decrease the current to zero gradually, and then turn off the power.
4. Please wear staticproof bracelet when operating.
5. Please connect the pins of the diode laser correctly as the picture showen in the manual.

6. The operating current must less than the rated current. Otherelse the diode laser should be damaged.
7. The fiber facet should be keep clean befor the diode laser is operating.
8. Please use the constant-current source to avoid the surge.
9. Diode laser should be short circuit when stop using.
10. Bend diameter of the fiber must be larger than 4cm temporarily and 8cm permanently.

Copyright© Hi-Tech Optoelectronics Co., Ltd.
Address：Jia 35 Qinghuadong Road,Haidian District ,Beijing 100083 China
Tel：86-10-6253-7788 Fax：86-10-8233-5727 E-mail：info@htoe.com.cn

Optisiv Ltd. is a small, privately held manufacturer of pulsed fiber laser systems. Located in Kibbutz Einat, Israel, it was founded in 2007 by Dr. Kobi Lasri. Dr. Lasri holds a PhD in electrical engineering from Technion-Machon Technologi Le' Israel. After graduating, he worked for three years as the Technical Manager at Elbit Systems Electro-Optics Elop Ltd. in Rehovot, Israel. He subsequently served as Production Manager at Precision Photonics in Boulder, Colorado, for two-and-a-half years. He left Precision in 2007 to found Optisiv.

(a) Raycus Fiber Laser Laser Technologies Co., Ltd. designs, manufactures and sells 200W single mode (M2 < 1.2), 1064nm, CW fiber lasers from their operations in Wuhan, China. Raycus Fiber Laser Technologies Co. Ltd. founded in 2007, is the leading high power fiber laser manufacturer in China. According to its website: “with a deep understanding of laser technologies and specialty fibers, Raycus Fiber laser is the first in China to successfully produce and industrialize the high power fiber laser.” According to the website, Raycus plans to introduce fiber lasers up to 1,000W soon. Home page: http://raycuslaser.com/eng/Index.aspx. History: Raycus was founded by US fiber laser industry veteran Dr. Yan Dapeng in 2007. Dr. Yan and Huagong Laser, a subsidiary of Wuhan public company Huagong Tech, each owned 50% share of the company but Dr. Yan has the key power to control the company. From Raycus's website, Yan and Huagong laser invested 30million RMB in the company each in 2007. Huagong laser was reported to sell its 32% share in Raycus for 63.36 million RMB. From 1996 to 2007, Dr. Yan worked in several US universities and companies, including University of Illinois at Chicago, Wright State University, Zybron Company, Lasersharp Company and Nufern Company. He has 3 US patents. Before 1996, he worked at Nanjing Polytech University.

SOLAR Laser Systems is one of the oldest private high-tech companies in the former Soviet Union. Located in Minsk, Belarus, they have been working in the international photonics market for 21 years. They specialize in scientific research, development and manufacturing of solid-state lasers, laser systems and spectral equipment for industrial, medical and scientific applications.

Company website: http://www.solarlaser.com

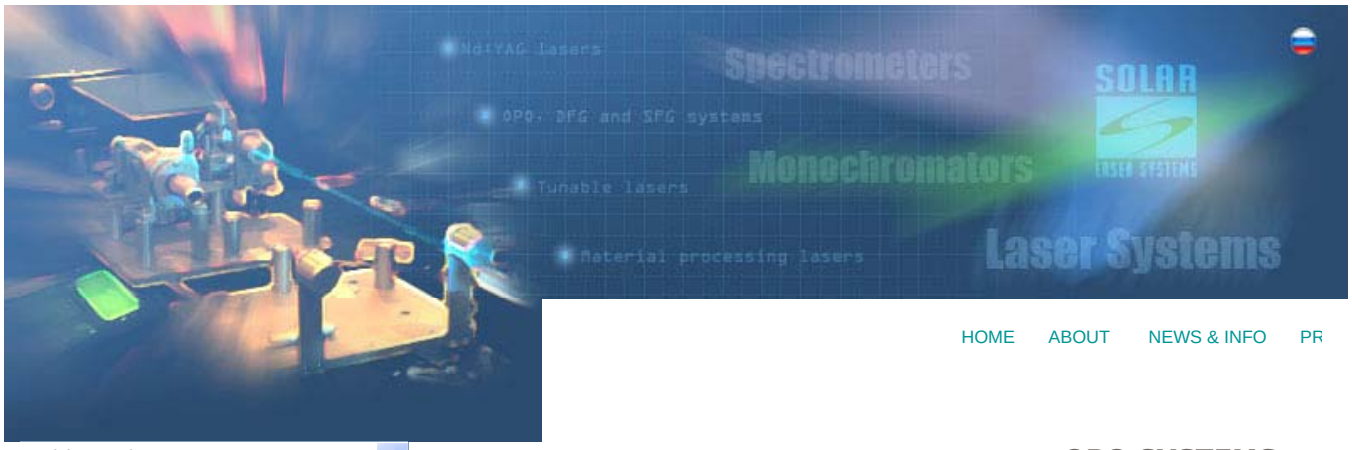

OPO SYSTEMS

- **High efficiency**
- **UV SHG options**
- **Compatibility with MM pump lasers**
- **210...2500 nm operation range**
- **Custom solutions up to 20 µm**
- **PC control option**
- **Wavelength display option**
- **Easy to use and low maintenance**

New SOLAR LS OPO systems combine high energy output, extremely wide tuning range with exceptionally easy maintenance and increased reliability.

These OPO systems are developed taking into consideration the end user's demands. They are highly reliable and easy to operate unlike the similar devices already existing in the market . The main advantage of the OPO LP series is extremely low operating pump power densities. Thanks to the original optical scheme the specified parameters are obtained even at low pump intensities and as a result neither crystals nor other optics can be damaged. This feature combined with precise optics mounts and dust protective housing insures perfect reliability and long-term output stability.

The OPO LP series optical design provides high-efficiency output even if it is pumped by standard multimode Nd:YAG lasers. The customer does not have to buy or use complex and expensive TEMoo or single-frequency pump lasers. The maintenance expenses are therefore reduced and the OPO LP series is attractive for every user. Besides the OPO supercompactness saves space at your optical table and allows to integrate it easily into any available laser system.

SPECIFICATION

MODEL	LP601	LP603	LP604
Non-linear crystal	BBO Type I	BBO Type II	BBO Type II
Tuning range, nm signal + idler second harmonic	 410…2500 —	 410…2500 210…420	 680…2500 340...680
Max total conversion efficiency [1]	40% [2]	35% [2]	40% [3]
Linewidth [1], cm^{-1}	10…100	4…6	6…8
Dimensions, mm	255 x 220 x 70		
Pump laser requirements			
Laser type	Nd:YAG		
Wavelength, nm	355	355	532
Max pump energy, mJ	350	350	500
Operating pump intensity, MW/cm^2	60	60	80
Pulse width, ns	4…12		
Beam quality	multimode homogeneous spatial beam profile		
Beam divergence, mrad	<1.5		

* Specifications are subject to change without notice
1) Depends on output wavelength; specified for 10 ns pump pulse
2) At 500 nm
3) At 850 nm

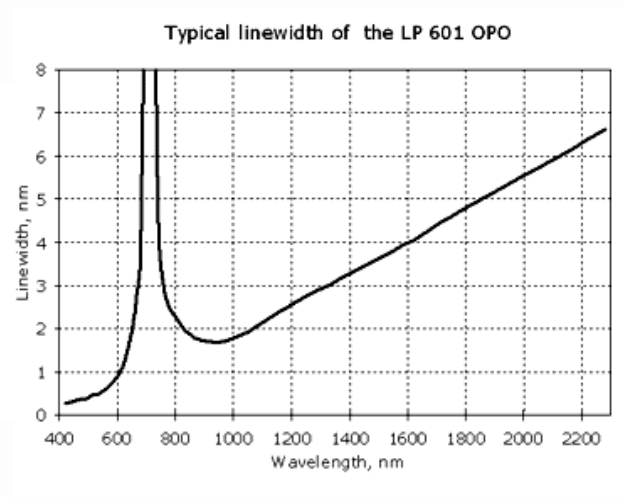

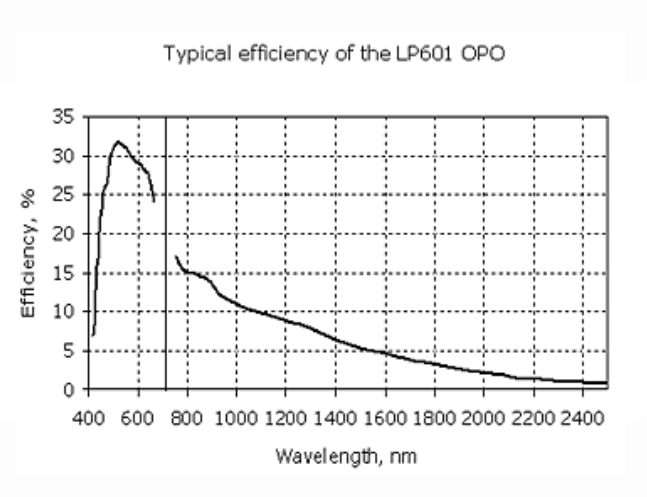

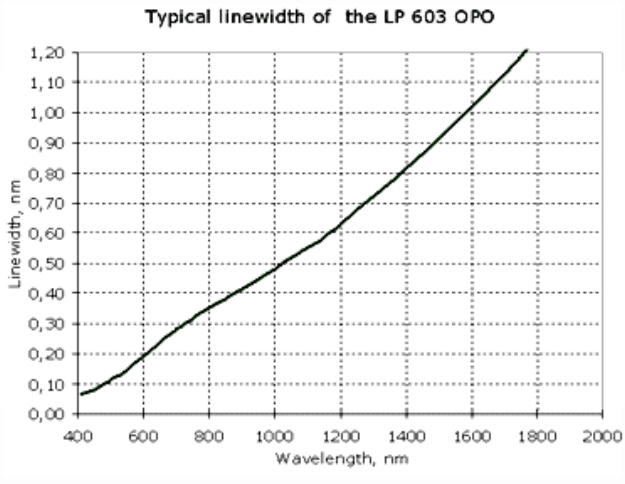

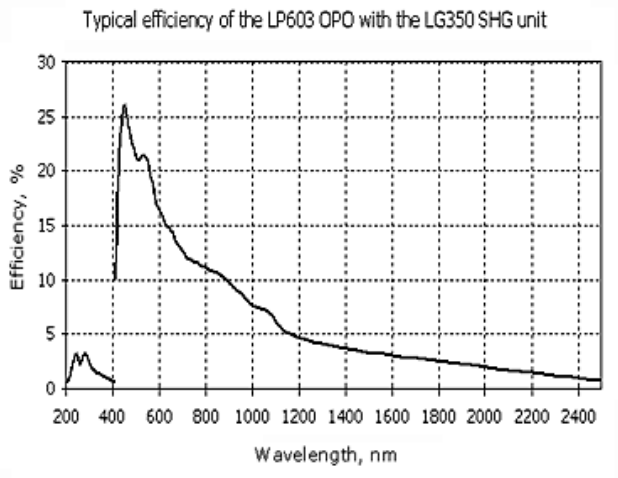

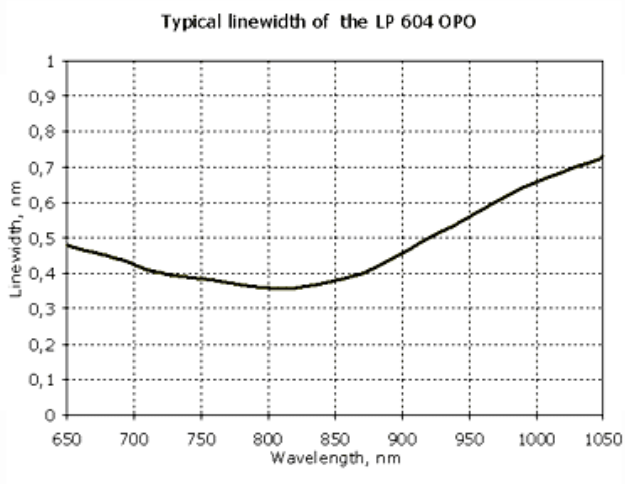

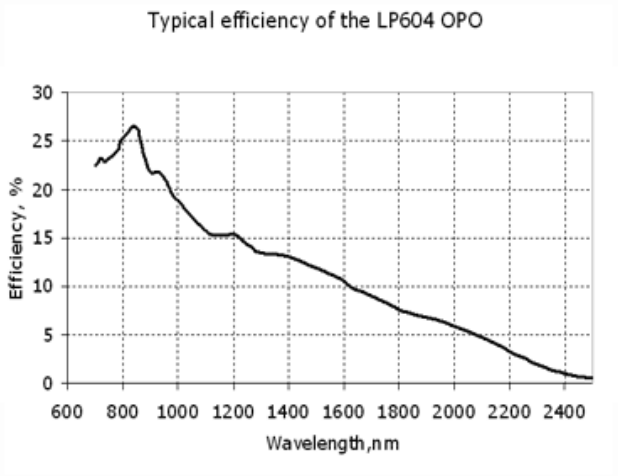

CUSTOM OPO SYSTEMS



SOLAR Laser Systems has a great experience in development, manufacturing and supply of specialized custom tunable OPO systems based on OPO, SFG and DFG technologies.
While developing custom systems, SOLAR LS's specialists take into consideration specific customers requirements and provide users with optimal cost and time effective solutions of the challenges they face.

The widest choice of non-linear crystals used in SOLAR LS's devises – BBO, LBO, c-LBO, KTP, KTA, $LiNbO_3$, $KNbO_3$, $AgGaSe_2$, CdSe – ensure high laser performance within the wavelength range of 190nm…20µm.

2005 (c) Copyright SOLAR Laser Systems. All rights reserved.

Aurora

The new Broadband OPO from Litron

Aurora OPO

Litron Total Laser Capability

Litron Lasers

Broadband OPO Systems Tuneable sources designed for Litron's lasers

The Aurora OPO

Based around BBO, the Aurora is a broadband device pumped at 355nm. It is continuously tunable from 410nm to 680nm and the corresponding idler output to 2400nm is also available. Designed to be fully integrated with either the Nano series or the larger LPY series of systems the OPO is a modular attachment designed specifically for use with Litron's lasers. Precise stepper motor control of the crystal and accurate optical encoding of its position ensure accurate and repeatable wavelength tuning and output.

Conversion efficiencies of up to 30% are achieved allowing outputs of >50mJ in the visible from a compact laser and OPO combination making it ideal for either laboratory based or portable applications requiring a tunable source.

SPECIFICATIONS

Model	Aurora 20	Aurora 35	Aurora 50
Pump energy (mJ @355nm)	75	110	180
Max. signal output (mJ)	**20**	**35**	**50**
Linewidth (cm^{-1})	5 - 250	5 - 250	5 - 250
Repetition rate (Hz) (1)	0 - 200	0 - 200	0 - 200
Signal tuning range (nm)	410 - 680	410 - 680	410 - 680
Laser type	**Nano LG** **Nano TRL**	**Nano TRL**	**LPY700**

(1) Maximum repetition rate depends upon pump laser specification.

Aurora

Litron Lasers

Broadband OPO Systems Tuneable sources designed for Litron's lasers

MECHANICAL DATA

Laser Head Unit & OPO

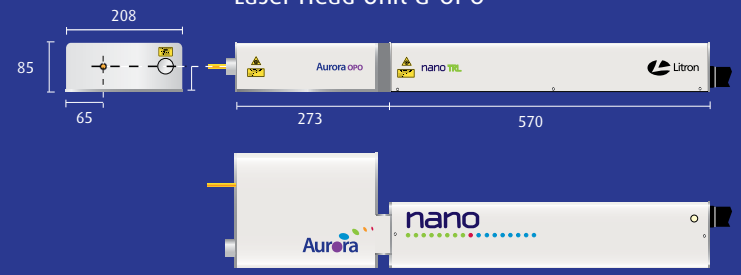

LPU1000 PSU

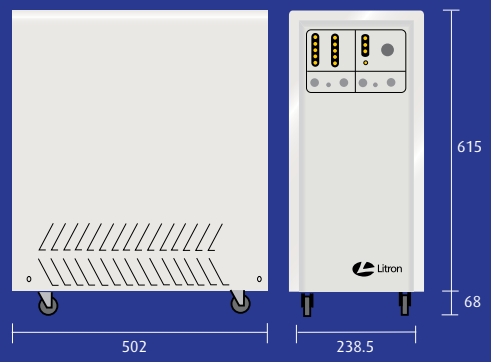

Remote Control Box



Rack-mount PSU

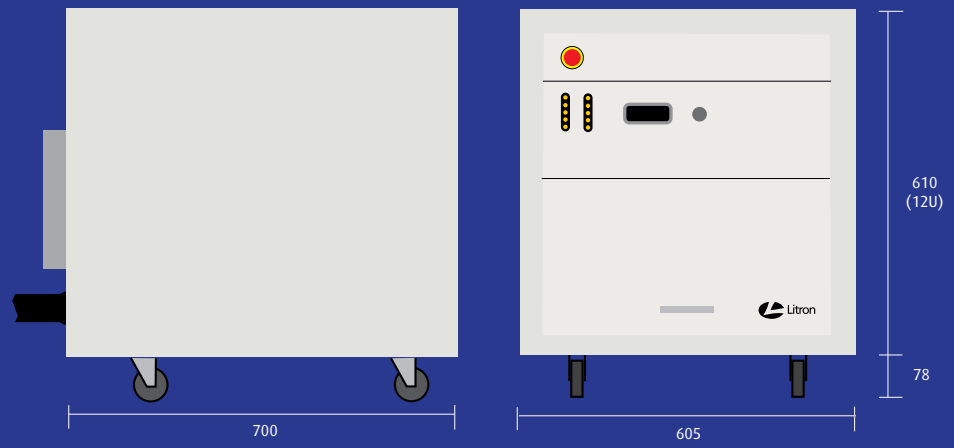

All dimensions shown in mm

Our policy is to improve the design and specification of our products. The details given in this document are not to be regarded as binding.

HEAD OFFICE
Litron Lasers Ltd
8 Consul Road
Rugby
Warwickshire CV21 1PB
England

T +44 (0)1788 574444
F +44 (0)1788 574888
E sales@litron.co.uk

NORTH AMERICAN OFFICE
Litron Lasers North America
2449 Arnica Drive
Bozeman
MT 59715
USA

T +1 (406) 522 7566
F +1 (406) 522 7567
E sales@litronlasers.com

www.litronlasers.com

Aurora

Litron Lasers

PB 0138:1

IPG PHOTONICS®

THE POWER TO TRANSFORM®

HIGH POWER FIBER LASERS

FOR INDUSTRIAL APPLICATIONS

LEADER IN INNOVATION

IPG Photonics World Headquarters, Oxford MA, USA

IPG Photonics Corporation is the world leader in high power fiber lasers and amplifiers. Founded in 1990, IPG pioneered the development and commercialization of optical fiber-based lasers for use in a wide range of venues such as materials processing, telecommunications, medical, scientific and other advanced applications. Fiber lasers have revolutionized the industry by delivering superior performance, reliability and usability at a lower total cost of ownership compared with conventional lasers, allowing end users to increase productivity and decrease operating costs. IPG is headquartered in Oxford, Massachusetts with additional manufacturing plants, sales and service offices throughout the world.

We are the only company that controls the performance, cost and yield of both active fibers and semiconductor pump diodes - the core technology of our fiber laser and amplifier products. Additionally, we developed and manufacture our own process fibers, beam couplers & switches, collimators and chillers. This innovation coupled with our extensive manufacturing capabilities place IPG in the rare position of being in full control of every step needed to achieve this mission: *to deliver innovative, reliable, high quality and high performance fiber lasers at a cost-effective price.*

HIGH POWER FIBER LASERS

A Unique Combination of the Most Advanced Technologies

High power fiber lasers are created from active optical fibers and semiconductor diodes, a merger between two of the most innovative and advanced laser technologies. Fiber lasers use single emitter semiconductor diodes as the light source to pump the active fibers. The laser beam emitted is contained within optical fibers and delivered through an armored flexible cable. Active fibers, special optical fibers doped with rare earth ions, allow for an extremely bright light from a very small core, thus making possible the production of kilowatt class output with excellent beam quality. IPG uses many proprietary technologies to create the undisputed best beam quality kilowatt class lasers available in the market today.

The combination of technologies results in a unique, highly reliable and superior performing laser system with parameters exceeding any traditional laser technology, including disc, rod, YAG or CO_2 lasers. Our robust fiber lasers share common attributes of compact size, long diode life, low maintenance operation, high wall plug efficiency and completely consistent beam divergence and beam profile at all power levels.

IPG's own high-power semiconductor Diodes

Diode burn-in

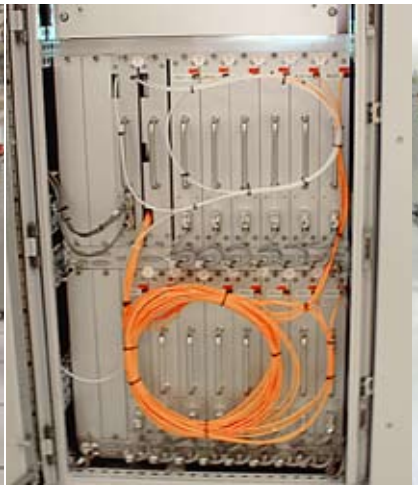

Open laser chassis displaying the modular design of high power fiber lasers

Post-production fiber lasers

FIBER LASER ADVANTAGES

What You Can Expect from an IPG Laser

Our low-order-mode kilowatt class fiber lasers range in power from 500 W to 50 kW, operating in CW or modulated modes up to 20 kHz with wall-plug efficiencies greater than 30%. The dynamic operating range of these devices is available from 10% to full power with no change in beam divergence or beam profile throughout the entire range. This allows a single laser to be utilized for both high and low-power applications such as welding, drilling and precision cutting, a previously unheard of capability.

IPG lasers' divergence specifications are far superior than other lasers and allow the use of long focal length processing lenses for vastly improved depth of field, less damage to optical components and are ideal for remote welding applications. The units can be supplied with fiber lengths to 100 meters, different fiber diameters and variety of multi-port beam switches, beam couplers, termination optics and scanners.

MAIN FEATURES

- Excellent Beam Parameter Product (BPP)
- Constant BPP Over Entire Power Range
- Small Focus over Large Working Distance
- Over 30% Wall-Plug Efficiency
- Maintenance Free Operation
- Modular 'Plug & Play' Design
- Compact, Rugged & Easy to Install
- Estimated Diode Lifetime > 100,000 hours
- Integrated Coupler or Beam Switch

Fiber lasers deliver their energy through an integrated flexible optical fiber. Fiber lasers have a monolithic, entirely solid state, fiber-to-fiber design that does not require mirrors or optics to align or adjust. These features make fiber lasers easier to integrate and operate in production, medical and other laser-based systems.

Fiber lasers are typically smaller and lighter in weight than traditional lasers, saving valuable floor space. While conventional lasers can be delicate due to the precise alignment of mirrors, fiber lasers are more rugged and able to perform in variable working environments. These qualities permit fiber laser systems to be transported easily.

The fiber laser is modular, built from multiple laser units, each one generating hundreds of watts of output power. This also allows the laser system to incorporate reserve modules and power margins. Available in the YLS series of high power laser is the redundant module feature. If something should happen with a regular fiber laser module it will shut off and allow the redundant module to start automatically, leaving the laser with no output power loss. An alarm would then be activated notifying the user that a modular requires service but still allowing the laser to operate under normal circumstances.

Each classification of high power fiber laser serves a targeted application demographic. With the most compact design, the YLR laser is offered as a cost-effective, adaptable solution for a clean room system or for integration into a production line. Directly terminated to a QBH-type connector with numerous feed fiber lengths and diameters available, the rackmount configuration is ideal for a multitude of applications from cutting, welding and drilling to medical device manufacturing.

With a larger feed fiber core and simple design, the cladding laser (CL) is aptly named. Also utilized for micro and macro welding, brazing, annealing and heat treating applications, the YLS-CL is considered a direct competitor to direct diode systems. With its maintenance-free, robust package the YLS-CL allows for plug and play fiber delivery with interchangeable process fibers available in either square or round diameters up to 1mm.

YLR Series



YLS-CL Series

Product Designation*	YLR-XXXX	YLS-XXXX-CL
Description	Rackmount Ytterbium Fiber Laser Module	Cladding Ytterbium Fiber Laser System
Available Operating Modes	CW, QCW, SM	CW, QCW
Polarization	Random	Random
Available Output Power	10 Watts - 1 kW	500 Watts - 2 kW
Emission Wavelength	1070-1080 nm	1070-1080 nm
Feed Fiber Diameter*	Available in single mode, 50,100,200 or 300 µm diameter	300 µm diameter
Wall Plug Efficiency	>30%	>30%
Output Termination Options	QBH-Type (HLC-8). LCA, QD compatible	QBH-Type (HLC-8). LCA, QD compatible
Ancillary Options	Direct feed to termination only	Internal coupler standard, option to upgrade to 1x2 switch
Air Conditioner	Not Available	Available Option
Interface	RS-232, Digital I/O, Analog Control	LaserNet, Analog & Digital I/O interfaces
Cabinet Style/ Dimensions	6U Rackmount Enclosure[1] (HxWxD, mm) 266x448x650	25U Standalone NEMA 12 Enclosure (HxWxD, mm) 1106x856x806
Upgradable	No	No
Redundant Module	Not Available	Not Available

[1] 6U rackmount chassis based on 500 - 1 kW power. <500 Watts housed in either 3U or 4U rackmount design.

The most versatile and customizable option within the product line is the YLS series fiber laser. Developed as a complete system, this design features the widest range of fiber diameters, the option to terminate to up to 6 ports from one power source, and the ability to upgrade. Housed in a NEMA 12, air conditioned sealed cabinet, these systems are designed to operate in industrial manufacturing environments. They have garnered wide acceptance in the very demanding automotive, aerospace and oil and gas industries, many requiring multiple shifts operating.

YLS Series

YLS-XXXX	YLS-XXXX	YLS-XXXX
Basic kW Ytterbium Fiber Laser System	kW Class Ytterbium Fiber Laser System	kW Class Ytterbium Fiber Laser System
CW, QCW, SM	CW, QCW, SM	CW, QCW, SM
Random	Random	Random
500 Watts - 2 kW	500 Watts - 4 kW	3kW - 10kW
1070-1080 nm	1070-1080 nm	1070-1080 nm
Available in single mode, 50, 100, 200 or 300 µm diameter	Available in single mode, 50, 100, 200 or 300 µm diameter	Available in 100, 200 or 300 µm diameter
>30%	>30%	>30%
QBH-Type (HLC-8). LCA, QD compatible	QBH-Type (HLC-8). LCA, QD compatible	QBH-Type (HLC-8). LCA, QD compatible
Options Available: External coupler, External 1x2, 1x4 or 1x6 beam switch, or External 50:50 beam splitter.	Options Available: Internal coupler, Internal 1x2 beam switch, Internal 50:50 beam splitter, External 1x4 or 1x6 beam switch.	Options Available: Internal coupler, Internal 1x2 beam switch, Internal 50:50 beam splitter, External 1x4 or 1x6 beam switch.
Standard	Standard	Standard
Standard: LaserNet, Digital I/O, Analog Control Additional Options: DeviceNet or Profibus	Standard: LaserNet, Digital I/O, Analog Control Additional Options: DeviceNet or Profibus	Standard: LaserNet, Digital I/O, Analog Control Additional Options: DeviceNet or Profibus
12U Standalone NEMA 12 Enclosure (HxWxD, mm) 558x790x815	25U Standalone NEMA 12 Enclosure (HxWxD, mm) 1106x856x806	31U Standalone NEMA 12 Enclosure (HxWxD, mm) 1400x856x806
Yes, Maximum 2 kW Upgrade	Yes, Maximum 4 kW Upgrade	Yes, Maximum 10 kW Upgrade
Not Available	Available option <3 kW, Standard on 3 kW+	Standard

*Product designation is relative based on desired wattage and configuration. If a 3 kW system with an internal coupler is desired, the part # designation will be "YLS-3000-CT". Likewise the addition of an internal 1x2 switch will have the "-S2T" or "-S2" notation depending on the location of the switch on the cabinet.
- Please consult IPG Sales for information regarding >10 kW lasers.

Optical Coupling, Switching & Sharing

Maximizing Your Fiber Laser's Capabilities

IPG Photonics' 2 way beam switch

The ability to couple light from one fiber to another greatly expands upon IPG's fiber laser functionality. A single laser can be used as a power source for multiple work cells thus reducing the total cost of capital equipment. A multi-port unit offers the option of attaching varied process fibers where each work cell could be operating on a different application; for instance one port could weld with a 300 µm diameter fiber in one cell while another port operates with a 100 µm fiber thus providing power to two workstations from a single laser. In addition to greater functionality, optical coupling also provides for ease of replacement of the process fiber, be it for altering the parameters for an application or in an instance of accidental damage to the fiber. If damage does occur, the main power source stays intact and operational for other channels, thus providing greater protection to the power source.

A row of IPG Photonics' optical couplers on display

Available options include either a single port coupler, a multi port beam switch offered in either 2, 3, 4, 5 or 6 channels, or a 2 port beam sharing function with the additional option of 100% full power in one port. Each component is available in a multitude of configurations depending on the chosen power source, series and the size of the component. Up to 2 ports can be integrated internally in the YLS series with either top or side mount depending on the desired end use. External optical ports have the added option of a long stand-off distance for remote installation on the work floor for greater flexibility and convenience. Though the beam sharing function is only available as a 2 port system it can also be combined with the multi-port beam switch for even greater capabilities.

Depending on the power level, feeding fibers are available in either a 50, 100, 200 or 300 µm diameter featuring unbeatable beam quality in comparison with solid-state lasers. The beam can be switched to any channel from any position within 50ms. A state of the art safety system constantly monitors the position of mirrors, fiber interlocks, scattered light inside beam switch cavities, water flow for optical connectors and other important parameters. We manufacture all of our optical couplers, beam switches and beam splitters as well as process fibers. Process fibers are available in 100, 150, 200, 300, 400, 600, 800 or 1,000 µm diameter with lengths up to 100 meters.

IPG HP Collimators

IPG's line of collimators are available in both D25 and D50 from 60 to 200mm in focal length. The collimators feature water cooled optics, an adjustable focus and are QBH-type HLC-8 adapted for easy connection to any of our feed or process fibers. Available collimators: D25-F60, D25-F85, D50-F100, D50-F120, D50-F160 & D50-F200.

IPG Photonics' D25-F60 & D-50-F160 Collimators

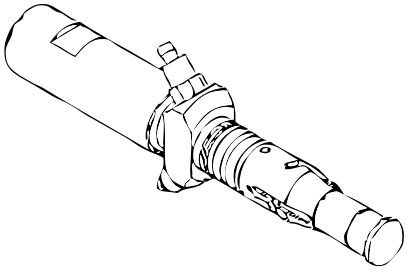

IPG Photonics' HLC-8 Connector

Laser Control Software

Interface Options and Abilities

IPG fiber lasers feature the most up to date control functions requested by the industry. Interfaces such as Profibus, DeviceNet, Industrial Ethernet or simple digital I/O make integration with complex equipment straightforward and easy to use. All laser parameters and available peripherals such as a multi-channel beam switch, chiller, guide laser, power supply, etc. are constantly monitored and controlled by an internal computer and can be remotely accessed at any time. A convenient graphical user interface can be installed on any customer PC. In addition, IPG's fiber lasers have conventional interfaces such as analog control and direct modulation. Response time to these signals is less than 50 microseconds which is crucial for applications with on-the-fly adjustments. Moreover, the laser can store up to 50 different programs with 100 commands each which can be called out with the simple push of a button or via external digital signal.

Customer Care

Fast and Professional

Unlike conventional laser technologies, IPG fiber lasers require no preventive maintenance. As long as output optics and coolant are properly maintained by the customer, the laser will perform consistently without adjustment or intervention by the customer or IPG. This greatly reduces downtime and maintenance cost to the customer. We have a team of dedicated service professionals and technical support specialists worldwide to provide personal and effective customer support.

Applications Processing Centers

Developing Your Laser Solution

IPG Photonics offers free applications development through any of our six Materials Processing Centers worldwide. With three US locations: Santa Clara CA, Novi MI, and Oxford MA, as well as 3 international locals: Burbach Germany, Moscow Russia and Beijing China, our applications developers are there to provide customers with an opportunity to evaluate fiber laser technology for materials processing. We offer prototyping and feasibility studies to our prospective customers to evaluate fiber lasers for their unique applications. Our knowledge of fiber laser applications can accelerate and improve your application development, from macro machining to micro machining and marking of various materials. Each of our applications labs offers our customers proof of concept, process development, recommendations, consultations, optical metrology, metallurgy, sample processing and an accompanying full results report.

IPGP
NASDAQ
LISTED

IPG Photonics Corporation
World Headquarters
50 Old Webster Road
Oxford, MA USA
T +1 508 373 1100
F +1 508 373 1103
sales.us@ipgphotonics.com

IPG Laser GmbH
European Headquarters
Siemenstrasse 7
D-57299, Burbach Germany
T +49 2736 4420 100
F +49 2736 4420160
sales.europe@ipgphotonics.com

www.ipgphotonics.com

USA • GERMANY • RUSSIA • CHINA • FRANCE • INDIA • ITALY • JAPAN • SINGAPORE • SOUTH KOREA • UK

© 2010 IPG Photonics Corporation

Contact

CO2 lasers Solid-state lasers
Disk lasers
Fiber lasers
TruFiber
Diode lasers
Rod lasers
Pulsed lasers
Short pulsed lasers
Beam guidance
Software ThJControi
Marking lasers
Laser systems

TruFiber lasers

TruFiber 400.

Zoom LJPictures

The TruFiber is attractive due to its high process speed, narrow weld seams and small cutting kerFs.

Its 200, 300 or 400 watts of laser power make it ideal for precision processing.

With proven TRUMPF quality, the TruFiber performs reliably. The fact that it is maintenance -free, with long diode Life time, means its total cost of ownership is very low_

- Best beam duality $M^2 < 1.1$
- Comfortable operation with the integrated PC and touchscreen panel
- Buift-in frequency generator
- Power measurement and control in real-time
- Robust laser light cable
- High safety standard
- Two product versions available: Version Stand-alone with integrated water-air chiller and version 19" for integration

Optics

We offer you a broad portfolio of optics for your needs. III

Applications

Deep penetration welding

Narrow seams with high strength i

Powder deposition welding

The answer to wear and modification requirements.

IN

a

Heat conduction welding

Easy and fast welding of thin-walled parts and v

Overview Technical Data **System Solutions** Applications

.10] http://weather.comf
?,1 raycus fiber laser
Fle Edit View Favorites Tools Help
Favorites 14 hkroscifLOtrliook Web Access .O Suggested saes -.. Gel More Add-ons -..
8 O Raycus lEoer Laser Tedinolo... 10 What's up with communimtio... 10 GPI Lasers Company listory TruEber -TRUMPF Laser ... ×
6 – pa,.e: safet,. 6- 2 ki a

	TruFiber 200/300 / **400, Version 19"**
Laser power	20013001400 W
Operation mode	cw / modulated
Max. Modulation frequency	50 kHz
Performance range	3 % - 100 %
Wavelength	1070 +/- 10 nm
Polarization	Random
Connection and Consumption	
■ Electrical connection (votage)	230 V
■ Electrical connection (frequency)	50-60 **Hz**
■ Nominal power consumption	1 111 311 95 kW
Ambient temperature	5 °C -40 °C
Dimensions and weight supply unit	
■ Width	483 mm
■ Height	495 mm
■ Depth	513 mm

visible edges. i

Brochures

=

Lasers for medical technology

Quality in Focus.

p PDF, 855 k8

Laser precision cutting

Sr: ,

New shapes faster

IN PDF, 714 k8

TruFiber

Excellence in fine dimensions.

PDF, 94 k8

Industry solutiCi 4

Laser cutting in medical technology

Quality far every cut. 101

V

GI Internet
=fi 125%
:firlrsiart e 1r1 a] 4 Microsoft 0... Inbos Micros... ME WE: Alternativ... TruFiber -TRLL 9k IPGB 1007237_ The pm Adobe Acrobat...)116 12:24 PM

CO2 lasers Solid-state lasers Disk lasers
TruDisk
Fiber lasers
Diode lasers
Rod lasers
Pulsed lasers
Short pulsed lasers
Beam guidance
Software TruControl
Marking lasers
Laser systems

TruDisk lasers

TruDisk 4002

rk Zoom Pictures

The TruDisk disk laser combines the advantages of a solid-state laser with those of a diode laser. The diode laser, as the pump source, provides the excitation energy and ensures high efficiency. The disk, as a solid-state laser, ensures high beam quality.

- High, power-independent beam quality
- Highest availability possible
- Powers from 1 to 1€ kilowatts
- Compact design
- Simpler, quicker replacement of individual components
- Plug and play with all fiber diameters
- Beam quality from 2 to 8 mmemrad

Overvew **Technical Data** System Solutions Applications

1 2 3 4

	TruDisk 3302	TruDisk 4002	TruDisk 5302	TruDisk 6602
Laser power			5300 W	

USA

Optics

We offer you a broad portfolio of optics for your needs. IN

Lasers for medical technology
Quality in Focus.
IN PDF, 855 kB

Laser precision cutting
New shapes faster
IN PDF, 714 kB

Lasers
Solve every task perfectly.
IN PDF, 1735 kB

TrulDisk - TRUTT Laser Technology - Windows Internet Explorer

•.trumpf-laser.oarweniproductsisolid-stam4asersidisk-lasers/trudisk.htrn1

File Edit View Favorites Tools Help

Overview | **Technical Data** | System Solutions | Applications

1 2 3 4

	TruDisk 3302	TruDisk 4002	TruDisk 5302	TruDisk 6602
Laser power	3300 W	4000 W	5300 W	6600 W
Laser power (with upgrade)	4000 W	4000 W	8000 W	8000 W
Beam quality	8 mm•mrad	8 mm•mrad	8 mm•mrad	8 mm•mrad
Min. diamter laser light cable	200 pm	200 pm	200 pm	200 pm
Nominal power consumption	**16 kW**	19 **kW**	**26 kW**	**33 kW**
Max. cooling water consumption at 15 degrees	1.6 m³th	2.2 m³fh	2.8 OM	3,3 eih
Coaling water temperature range	5 °C -20 °C	5 °C - 20 °C	5 °C - 20 °C	5 °C -20 °C
Dimensions				
■ Width	1600 mm	1600 mm	1990 mm	1990 mm
■ Height	1550 mm	1550 mm	1550 mm	1620 mm 1550 mm
■ Depth	950 mm	950 mm	1200 mm	1200 mm

Lasers
Solve every task perfectly.
IN RIDE, 1735 kB

TruDisk applications

Deposition welding
Modify and repair tools and molds

Heat conduction welding
Easy and fast welding of thin-wailed parts and visible edges. IN

Scanner welding
Processing without downtime. IN

TruDisk industry solutions

Laser cutting in medical technology
Quality for every cut. IN

TrulDisk - TRLIMPF Laser Technology - Windows Internet Explorer

•.trumpf-laser.oarweniproductsisolid-stam4asersidisk-lasers/trudisk.htrn1

File Edit View Favorites Tools Help

Overview **Technical Data** System Solutions Applications

1 2 3 4

TruDisk 8002		TruDisk 10002	TruDisk 12002	TruDisk 12003
Laser power	8000 W	10000 W	12000 W	12000 W
Laser power (with upgrade)		12000 W		
Beam quality	8 mm•mrad	8 mm•mrad	8 mm•mrad	12 mm•mrad
Min. diamter laser light cable	200 pm	200 pm	200 pm	300 pm
Nominal power consumption	39 kW	49 kW	60 kW	60 kW
Cooling water temperature range	5 °C -20 °C	5 °C -20 °C	5 °C - 20 °C	5 °G -20 °C
Dimensions				
■ Width	1990 mm	2880 mm	2800 mm	2800 mm
■ Height	1550 mm	1600 mm	1600 mm	1600 mm
■ Depth	1200 mm	1400 mm	1400 mm	1400 mm

1 1 2 3 4 P

Lasers
Solve every task perfectly. **a PDF,** 1735

TruDisk applications

Deposition welding
Modify and repair tools and molds_ a

111111 Heat conduction welding
Easy and fast welding of thin-wailed pans and visible edges. IN

Scanner welding
Processing without downtime. **a**

TruDisk industry solutio:

Laser cutting in medical technology
Quality for every cut. **a**

javascriptdonothing0;

Internet 25%

Microsoft 0... Inbar -Micros... WG: o\.1ternativ... rruDisk -TRLim... 7r IPGB].007297... Ifgr Tax Adobe Acrobat... 12:31 PM

HL cw - TRUMPF Laser Technology - Windows Internet Explorer

File Edit View Favorites Tools Help

Favorites Fr crosoft Outlook Web Access Suggested Sites GetMoreAdd-ons

Raycus 19ber Laser Ted-tido-. What's up- with communicatio... SPI Lasers Company History HI_ cw -TRUMPF Lase, Te... X Page • Safety • Tools'

CO2 lasers

Solid-state lasers

Disk lasers

Fiber lasers

Diode lasers

Rod lasers

HL cw

Pulsed lasers Short pulsed lasers Beam guidance

Software TruControl

Marking lasers

Laser systems

HL cw lasers

HL 3306

qk Zoom ZI Pictures

Lamp-pumped HL high-power lasers are continuous emission cw solid-state lasers. Laser powers are graded so that the right laser is available for every application. Laser power regulation provides constant, regulated power at the workpiece over the entire range from 380 watts to **4.4** kilowatts.

- Highest availability possible
- Regulated laser power
- Power-independent beam quality
- Design proven a thousand times over

Overview **Technical** Data System Solutions Applications

	HL 383 D	HL 556 D	HL 703 D
Laser power	380 W	550 W	700 W
Beam quality	12 mm•mrad	25 mm•mrad	12 mm•mrad
Min. diameter laser light cable	300 pm	600 pm	300 pm
Nominal power consumption	14 kW	14 kW	32 kW

USA

- Argentina

Australia

Austria

Belgium

Brazil

Bulgaria

Canada I

China

TRUMPF
111 Hyde Road
Farmington
CT 06032
Phone: +1 (860) 255-6000
Fax: +1 (860)255-6680
E-mail

1111 We offer you a broad portfolio of optics for your needs. IN

javascripbdonothingo;

Internet 4 { 125%

IANadaligie

Rofin

Fiberlaser - www.rofin.com - Industry leader for laser cutting, laser welding and laser marking - Windows Internet Explorer
http://www.rofin.com/index.php?id=8608L=1
raycus fiber laser
File Edit View Favorites Tools Help
Favorites
Microsoft Outlook Web Access
Suggested Sites
Get More Add-ons
My Yahoo!
rofin Fiberlaser - www.rofin.co...
Page Safety Tools
CO2 Lasers
Solid-State Lasers
Fiber Lasers
FL Series
StarFiber
PowerLine F
Diode Lasers
Ultrashort Pulse Laser
Lasers for Marking
Manual Welding Lasers
Systems & Solutions
ROFIN FL Series
High Brightness Fiber Lasers for Every Application
rofin
FL 020
The high brightness fiber lasers of the ROFIN FL Series are the ideal addition to compliment the range of lasers currently offered by ROFIN. With their high performance, they are suitable for classical laser cutting and laser welding applications as well as for new applications such as the Remote Cutting. The emitted wavelength in the range of 1 µm achieves high absorption in many materials. All common solid-state laser applications can be performed using the FL Series laser. With the multi-mode version of the FL laser, fiber optics of 50 to 600 µm can be used. The single-mode version produces exceptionally good beam quality, typically in the range of ≤ 0.4 mm x mrad. The excellent beam quality also allows the
Contact
Please select a country
Please select a category
Please select a product
Worldwide
ROFIN Worldwide
>> World map
Messe
21.01. - 25.01.2011
FABTEC
Internet
125%
start
1:02 PM

Fiberlaser - www.rofin.con - Industry leader for laser cutting, laser welding and laser marking - Windows Internet Explorer
rofin ran.cortifindex.phrOld=360.31=1 R11411x1 raw:us fiber laser
File Edit View Favorites Tools F1ie17
Favorites liarosoft artloolr'Ylieb Access Suggested Sites - Get More Add-ons -..
Ofmy Yahoo! form Fbarlasier - viixxxx.rofin.im,.. 1
Page - Safety - Tools -

emitted wavelength in the range of 1 pm achieves high absorption in many materials. All common solid-state laser applications can be performed using the FL Series laser. With the multi-mode version of the FL laser, fiber optics of 50 to 600 pm can be used. The single-mode version produces exceptionally good beam quality, typically in the range of s 0.4 mm x mrad The excellent beam quality also allows the efficient use of 'dynamic beam° scanner systems for high-speed positioning as well as the fast and precise application of small geometries at workplaces. This reduces cycle times and increases productivity.

For easy integration into existing machining concepts, the compact version of the fiber laser is available as an alternative system solution. The compact Version is provided as single-mode laser with fiber optics of 20 pm or as multi-mode laser with fiber optics of SO pm.

Beam switches and energy sharing modules are available as an option allowing up to four work cells to be operated with only one laser. Non-productive times are reduced and the utilization of the laser is increased.

21 01 - 25 01 2011
FABTEC
Coimbatore. India
Hall A. Booth 45
- 28.01 21311
SEMICON Korea
Seoul'. Korea
Booth 2602
>>Trado fair calendar

Technical Data

	ROFIN FL OM	ROFINFL11311	ROFIN FL 040
Excitation	Laser diodes	Laser diodes	Laser diodes
Output power	2000 W	3000 W	4000 W
Beam parameter product using a 50 pm fiber)	**s2.5** mmx mrad	s 2.5 mm x mrad	s 2.5 mm x mrad
Fiber optic	50 to 600 pm	50 to 600 pm	50 to 600 pm

125%
5 Microso... - Ahem-, rt, Fiberlaser Facts and F... 2L1 IP GB 10072... ik Tax Trumpf Bro... 1:03 PM

	ROFIN FL x50	ROFIN FL x75	ROFIN FL 010
Excitation	Laser diodes	Laser diodes	Laser diodes
Output power	500 W	750 W	1000 W
Beam parameter product (using a 50 pm fiber(	s 2,5 mm xmrad	s2,5mm x mrad	s 2,5mm x mrad
Fiber optic	50 to 600 pm	50 to 600 pm	50 to 600 pm

	ROFIN FL x50 S	ROFIN FL x75 S	ROFIN FL 010 S
Excitation	Laser diodes	Laser diodes	Laser diodes
Output power	500 W	750 W	1000 W
Beam parameter product (using a 20 pm fiber)	s 0,4 mm x mrad (single-mode)	s 0,4mm x mrad (single-mode)	s0,4 mm mrad (single-mode)
Fiber optic	20 pm	20 pm	20 pm

Compact Versions:

	ROFIN FL x50 C	ROFIN FL x75 C	ROFIN FL 010 C
Excitation	Laser diodes	Laser diodes	Laser diodes
Output power	550 W	750 W	1000 W
Beam parameter product	0.4 mm xmrad	0.4 mm x mrad	0.4mm x mrad

or : Fiberlaser - www.rofin.com - Industry leader for laser cutting, laser welding and laser marking - Windows Internet Explorer
rofin.com
raycus fiber laser
Ede Edit View Favorites Tools Help
;0 Favorites g Microsoft Outlook Web Access O Suggested Sites - Get More Add-ons -

Output power	500 W	750 W	1000 W
Beam parameter product fusing a 50 pm fiber)	s2,5 mmx mrad	s2,5 mm xmrad	s 2,5 mm xmrad
Fiber optic	50 to 600 pm	50 to 600 pm	50 to 600 pm

	ROFIN FL x50 5	ROFIN FL x75 S	ROFIN FL 010
Excitation	Laser diodes	Laser diodes	Laser diodes
Output power	500W	750 W	1000 W
Beam parameter product lusing a 20 pm fiber)	s 0,4 mm xmrad (single mode)	s 0,4 mm x mrad (single mode)	s 0,4 mm x mrad (single-mode)
Fiber optic	20 pm	20 pm	20 pm

Compact Versions:

	ROFIN FL x50 C	ROFIN FL x75 C	ROAN FL 010 C
Excitation	Laser diodes	Laser diodes	Laser diodes
Output power	500 W	750 W	1000 W
Beam parameter product (using a 20 pm fiber)	0.4 mm x mrad	0.4 mm xmrad	0 4mm x mrad
Fiber optic	20 or 50 pm	20 or50 pm	20 or 50 pm

Waiting for fittp://mmsofin.comfindex.php?id=8GO&L=1...
start Mi 5 Microso... Inbox - Fiberlaser - Facts and F... Ur IPGB 10072... ik Tax Trumpt Bro... 4 4.; 1,01PM

DS Series - www.rofin.com - Industry leader for laser cutting, laser welding and laser marking - Windows Internet Explorer

roan http://raycuslaser.comf

raycus fiber laser

File Edit View Favorites Tools Help

Favorites Microsoft Outlook Web Access Suggested Sites Get More Add-ons

My Yahoo! 1 for DS Series - www.rofin.co... X

Page - Safety - Tools

Products Applications Markets Service Info-Center

ROFIN.COM a Products a Solid-State La... a Disc Lasers a DS Series

CO2 Lasers Solid-State Lasers

CW and Q-switched Lasers

Pulsed Rod Lasers

Disc Lasers

> DS Series

StarDisc

Fiber Lasers

Diode Lasers

Ultra short Pulse Laser

Lasers for Marking

Manual Welding Lasers

ROHN DS Series

High Reliability Thanks to Modern Stack Management

Newsletter

Toolbox Zoom Doohmadt print

Contact

Please selects country

Please select a category

Please select a product

Worldwide

ROFIN Worldwide

>> World map

http://www.rofin.comfinfo_cebierfnewsletter/

Internet 125%

DS Series - www.rofin.com - Industry leader for laser cutting, laser welding and laser marking - Windows Internet Explorer

roan http:filraycuslaser.comj

Elliraycit fiber laser

File Edit View Favorites Tools Help

Favorites | Microsoft aitlook Web Access | Suggested Sites | GetMore Add-ons

my Yahoo! | rain OS Series - rvirm. rofin.co... X

Page - Safety - Tools

- Ultrashort Pulse Laser
- Lasers for Marking
- Manual Welding Lasers
- Systems & Solutions

The DS Series is the new generation of diode-pumped disc lasers offered by ROFIN.With a beam quality of 7 or 8 mrn'rnrad, the DS laser can produce very small spot sizes with long focal lengths_ These features, combined with output powers ranging from 750 to 1,500 Watts, allow for an extensive range of industrial application processing like cutting of glass or welding of automotive parts. Flexibility in system integration is enhanced with the availability of optional beam switching, energy sharing, and fiber lengths of up to 100 meters and diameters of 150. 200. and 300 pm. The diode stack management increases laser uptime and minimizes laser diode replacement cost resulting in long

	ROFIN DS 015 HQ
Excitation	Laser diodes
Output power	1500W
Beam parameter product	s mm x mrad
Number of discs	1
Fiber optic	150 pm

Other lasers of the Rofin DS Series: ROFIN DS x75 HQ: ROFIN OS 010 HQ: ROFIN DS 010

http: f/www. rofin.comfinfo_centerfnewsletter/

Internet | 125%

start | Microsoft - Inbox - | WO: Alternativ... | DS Series - we- | Fact and Fgu... | Windows E... - Trurncif Brochu... | 1:24 PM

Xi’an Institute of Optics and Fine Mechanics

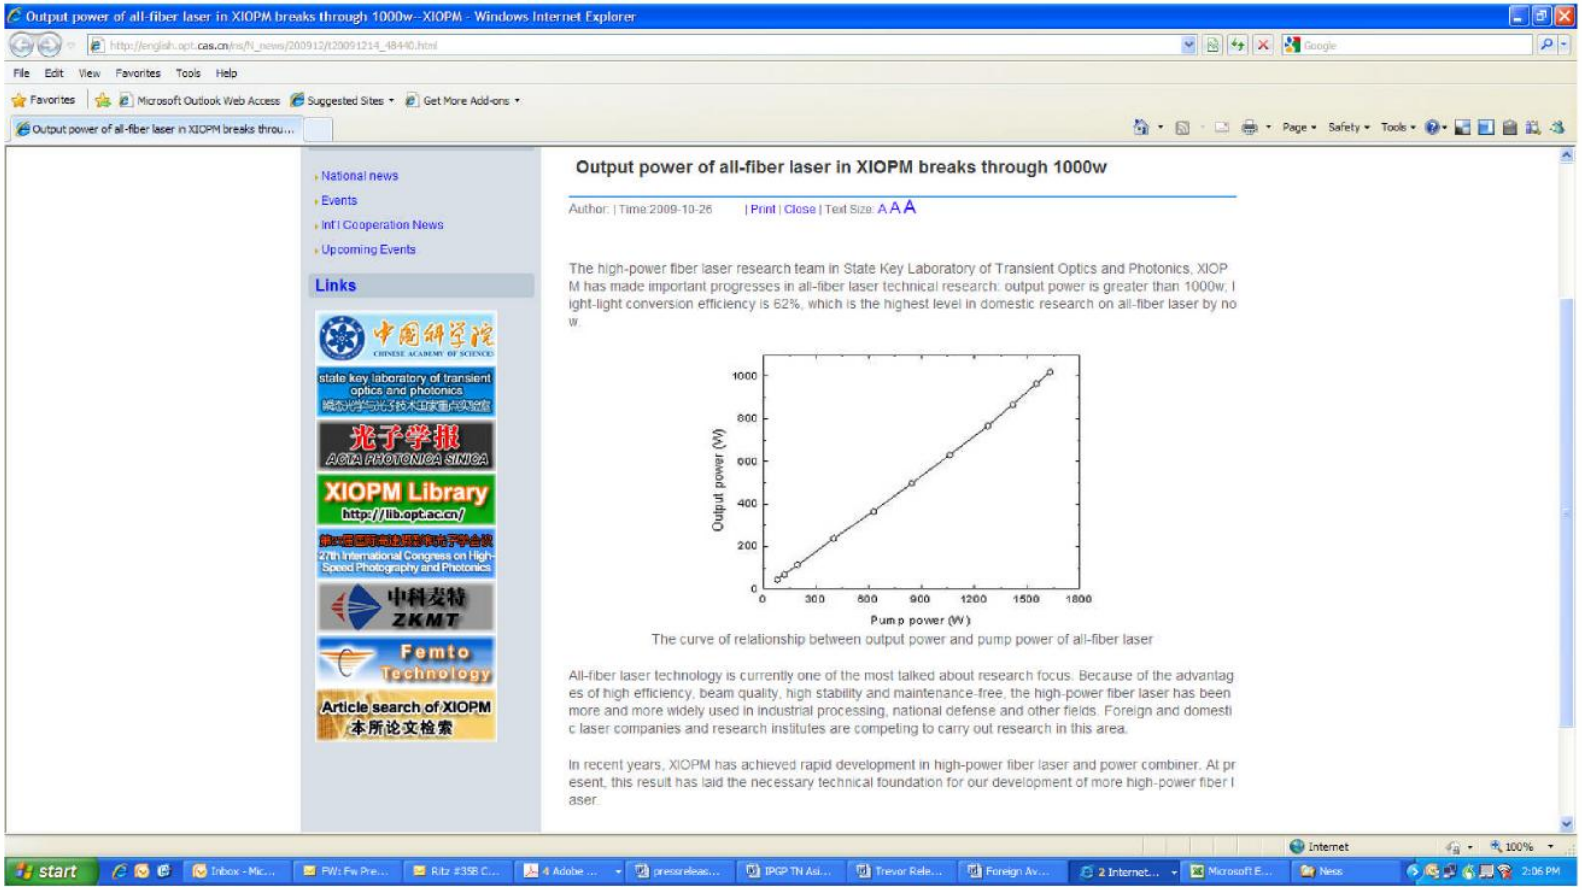

Output power of all-fiber laser in XIOPM breaks through 1000w

Author: | Time:2009-10-26 | Print | Close | Text Size: A A A

The high-power fiber laser research team in State Key Laboratory of Transient Optics and Photonics, XIOPM has made important progresses in all-fiber laser technical research: output power is greater than 1000w; light-light conversion efficiency is 62%, which is the highest level in domestic research on all-fiber laser by now.

The curve of relationship between output power and pump power of all-fiber laser

All-fiber laser technology is currently one of the most talked about research focus. Because of the advantages of high efficiency, beam quality, high stability and maintenance-free, the high-power fiber laser has been more and more widely used in industrial processing, national defense and other fields. Foreign and domestic laser companies and research institutes are competing to carry out research in this area.

In recent years, XIOPM has achieved rapid development in high-power fiber laser and power combiner. At present, this result has laid the necessary technical foundation for our development of more high-power fiber laser.

XIOPM Launched 402W Industrial Fiber Laser Successfully—XIOPM - Windows Internet Explorer
cas.rn
Me Edit Vino Favorites Tools Help
Favorites | Milcrosoft Outlook Web Access Suggested Sites - Get More Add-ons -
XIOPM Launched 400W Industrial Frber Laser

Links
中国科学院 CHINESE ACADEMY OF SCIENCES
state key laboratory of transient optics and photonics
光子学报 ACTA PHOTONICA SINICA
XIOPM Library http://lib.opt.ac.cn/
27th International Congress on High-Speed Photography and Photonics
中科芙特 ZKMT
Femto Technology
Article search of XIOPM 本所论文检索

XIOPM Launched 400W Industrial Fiber Laser Successfully

Author, | Time:2010-11-19 | Print | Close | Teal Size: A A A

High-power fiber laser research team at State Key Laboratory of Transient Optics and Photonits struggled 11 and and solved a series of key technologies in All-fiber Laser System Integration at the Institute's strong sup port. In 2999, the output power of All-fiber Laser broke 1999W. Recently significant progress has been mad e, and 400W Industrial Fiber Laser is launched successfully_

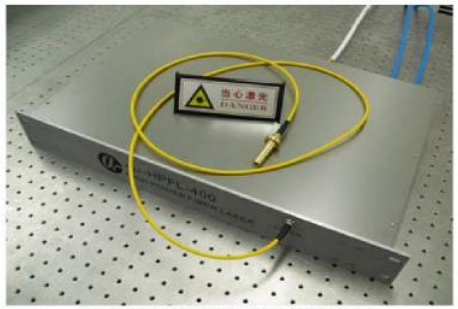

The prototype of 400W Industrial All-fiber Laser

Fiber laser is widely used in scientific research. medical engineered. industrial processed and otherteLds b ecause of high quality beam. high efficient lightning. long life. small size, flexible output laser, easy to use an d many other advantages.

The successful development of 490VV Industrial Fiber Laser marks XIOPM has the based industrial lechholo gy in high-power all-fiber laser, which will play a positive role in the development of Chinese high-power fib& r laser and related industries_

Done
Internet
100%

JK Fiber Lasers

A range of ytterbium industrial fiber lasers for rack mounting

The JK Fiber Laser Range provides the ultimate laser solution for industrial applications. Offering absolute power and control, they combine ease of integration, a powerful user interface, patented processing technology and an integrated range of processing tools.

- 50W - 400W CW output powers
- TEM_{00} M^2<1.1, single mode fiber beam delivery
- Range of Cutting and Welding Heads
- FiberView™ software Graphical User Interface
- Patented Back reflection protection
- Easy integration and interfacing
- High reliability, zero maintenance system
- FiberPierce™ peak power enhancement option
- Fast modulation and Pulse Shaping
- Applications and sample support

GSI™ JK™ Fiber Lasers

Fiber Lasers for Industrial Applications

In the JK range of Fiber Lasers, GSI Group offers the advantages of fiber lasers including single-mode beam quality, high efficiency, compactness and simplicity. Furthermore, drawing on the experience of our lamp-pumped JK laser range we can deliver these as a truly industrial package, with applications support, sample processing and a range of beam delivery options.

Performance Data

Model	JK50FL	JK100FL	JK200FL	JK300FL	JK400FL
Average Output Power (W)	50	100	200	300	400
Operatiing Modes	CW, Modulated and Peak power enhancement		CW and Modulated		
Output power range	20 - 100%	10 - 100%			
Long term Output power stability	+/- 1.5% typical (+/- 3% specified)				
Wavelength (nm)	1080 +/- 10				
Linewidth (nm)	<2				
Polarisation	Un-Polarised				
Modulation Capability	Unlimited Pulse Shapes, Ramping, Process Cycle				
Min. Rise / Fall Time (µs)	5				
Max. Modulation Frequency (kHz)	50				
Max. Peak Power (W)	100	200	200	300	400
Fiber Optic Beam Delivery					
Ouput Fiber Type	Single Mode				
Beam Quality	$TEM_{00}M^2<1.1$				
General					
Electrical					
Electrical Supply (Hz)	100 - 264 VAC / 47 - 63				
Power consumption*(W)	250	400	800	1200	1600
Physical					
Height - Air cooled	6U	6U	6U	7U	-
Height - Water Cooled	4U	4U	4U	5U	5U
Environment / Cooling					
Ambient Temperature - Air Cooled (°C)	5 - 35		5 - 25		-
Max. Water Temperature / Pressure (°C/Bar)	25 / 6				
Max. Humidity	85% RH @ 20°C, 50% RH @ 40°C, non-condensing				
Interface					
Standard Interfaces	Serial - RS232, Parallel - Machine Interface				

*Water cooled. Add 30W for air cooled version

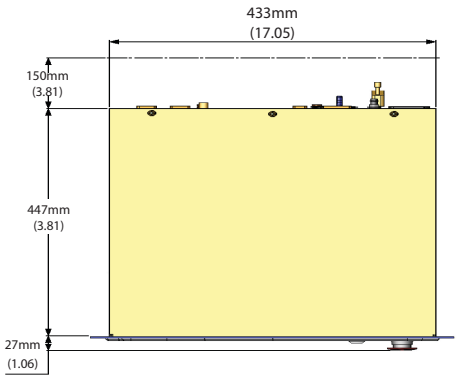

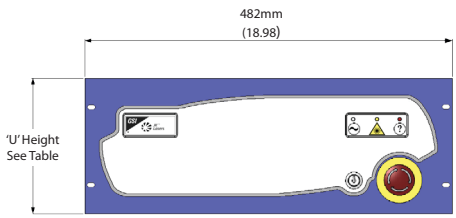

Dimensions in mm (inches)
1U = 44.5mm (1.75")

Product Code Selection Guide

Model		1 a, b, c		2 a, b, c
JK200FL	-	EVW		5RWE

1 a) Package :	O	Basic (indicators only)
	B	Extended (E-stop and Keyswitch)
	E	Local Manual Control
b) Options :	P	FiberPierce™ (only available for JK50FL and JK100FL)
	V	**Visible Pointing Diode**
	T	**Flat-Top Beam Profile**
c) Cooling :	A	Air
	W	Water
2 a) Fiber length :	2	2 meters
	5	5 meters (Standard)
	10	10 meters
b) Conduit type :	R	Rugged
	F	Flexible
	W	Window or Collimation lens focal length
c) O/P Optic :	25	25mm for 3.5mm $1/e^2$ beam diameter
	35	35mm for 5mm diameter

Specifications are subject to change.

Please Consult Product Centre for complete details.

www.gsiglasers.com

GSI JK™ Fiber Lasers ™

Product Centre
GSI Group Laser Division
Cosford Lane
Swift Valley
Rugby CV21 1QN
United Kingdom

Tel: +44 (0) 1788 570 321
Fax: +44 (0) 1788 541 904
Email: sales.laserdivision@gsig.com

Americas
GSI Group
125 Middlesex Turnpike
Bedford
MA 01730-1409
USA

Tel: +1 248 937 1064
Fax: +1 248937 1581
Email: na.sales.laserdivision@gsig.com

China
GSI Precision Technologies (Suzhou)
Building 8 Gantian Industrial Square
Gantian Road South, Suzhou Industrial Park
Jiangsu, 215024
China

Tel: +86 512 6283 7080
Fax: +86 512 6283 7087
Email: cn.sales.laserdivision@gsig.com

Single Mode Fiber Lasers

for Industrial and Scientific Applications

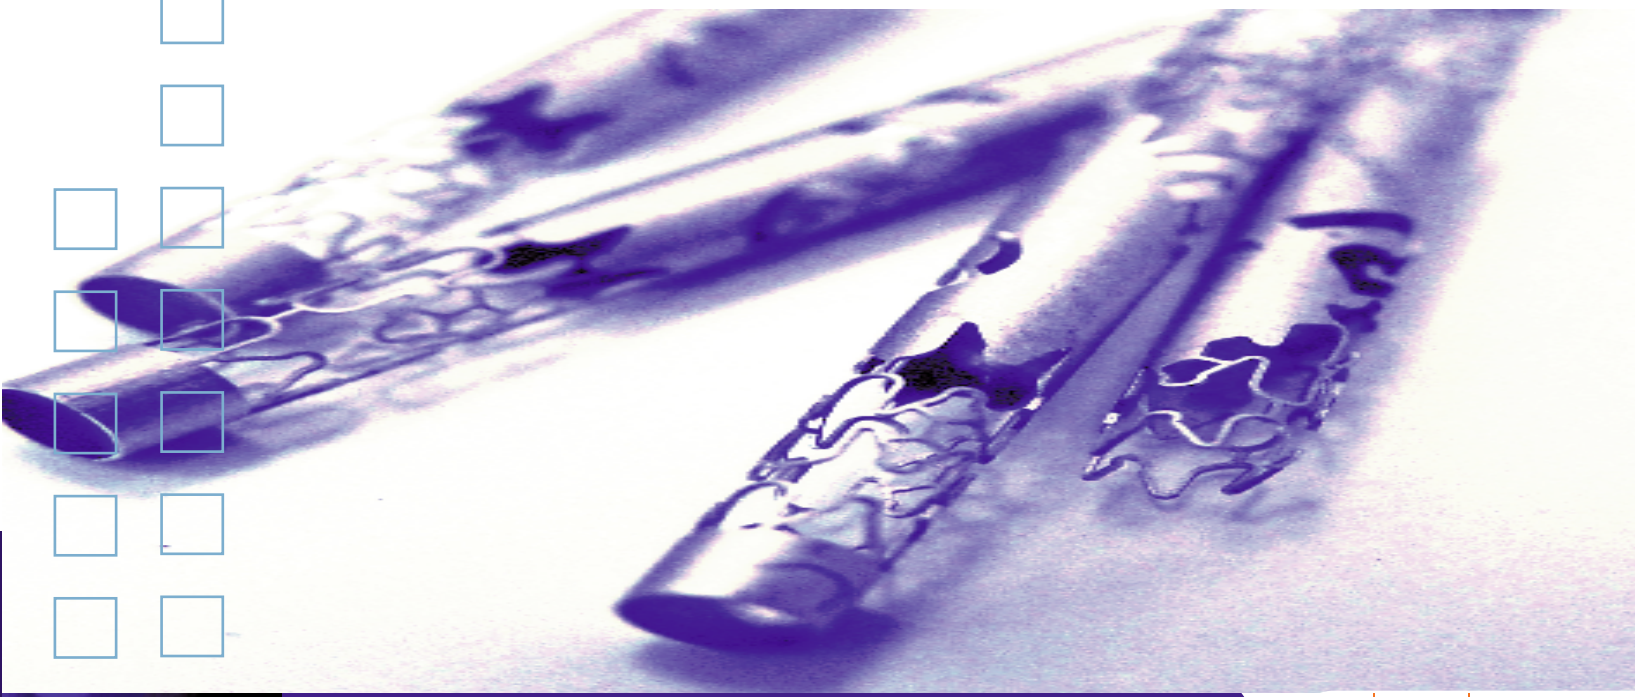

IPG PHOTONICS

The Power to Transform™

IPG's Single Mode Fiber Lasers Advantages

IPG's YLR-SM Series represents a break-through generation of diode pumped single mode CW Ytterbium fiber lasers of near infrared spectral range (~1070nm) with a unique combination of high power, ideal beam quality, fiber delivery, high wall-plug efficiency, compactness and reliability.

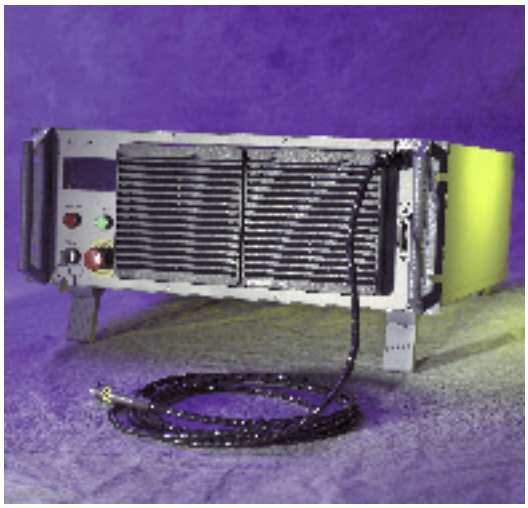

YLR-200-SM 200W CW Fiber Laser

These lasers possess a reliability that is unmatched by conventional solid state or gas laser. Selectivity of operating wavelengths, ultra-low amplitude noise, high stability and ultra-long pump diode lifetime completes an impressive list of advantages of this modern fiber laser system. The YLR-SM Series was developed to meet fast growing demand of industrial, R&D and medical markets for a compact, robust, turnkey and maintenance-free solution that can be easily integrated into an industrial manufacturing system, scientific experiment, OEM machine or an automated production line.

Main Features:

- ✓ **10W to 2kW Output Optical Power**
- ✓ **TEM_{00} (M^2<1.1) Beam Quality**
- ✓ **Over 25% Wall-Plug Efficiency**
- ✓ **Maintenance Free Operation**
- ✓ **Compact 'Plug & Play' Design**
- ✓ **Air or Water Cooled Versions**
- ✓ **Estimated Diode Lifetime > 100,000 hrs**
- ✓ **Single Mode Fiber Delivery**
- ✓ **CW or Modulated Operation**
- ✓ **Extended Warranty Program**

Practical and convenient front panel interface and RS232 or parallel and analog interfaces easily allow you to integrate this fiber laser to your setup. Each laser is provided with an integrated single-mode fiber delivery cable, of customer selected length, terminated by state-of-the-art output collimator or by industrial QBH-connector.

Users can customize the YLR-SM Series to meet their requirements by selecting output power, wavelength, polarization, delivery fiber length, cooling method and computer interface. All YLR Series laser systems are factory sealed so there is no need for alignment or maintenance. The laser system plugs into a standard power line, and can operate immediately. An another attractive features are no warm up time (laser could operate from "cold" start immediately) and ability to directly modulate laser up to 50kHz.

Typical Specifications

Optical Parameters

	Unit	YLR-50	YLR-100	YLR-200	YLR-500-SM	YLR-1000-SM
Nominal Output Power	W	50	100	200	500	1000*
Mode of Operation			CW or directly modulated			
Beam Quality	M^2	<1.05	<1.05	<1.1	<1.1	<1.15
Linewidth	nm	<2	<3	<3	<4	<5
Polarization		random**	random**	random**	random**	random
Output Power Stability	%	+/-2	+/-2	+/-2	+/-2	+/-2

Electrical Parameters

	Unit	YLR-50	YLR-100	YLR-200	YLR-500-SM	YLR-1000-SM
Electrical Requirements	V AC	110-230	110-230	110-230	190-250	360-520
Typical Power Consumption	W	200	400	800	2000	4000
Standard Interfaces			Digital I/O, Analog			
Direct Modulation	kHz	0-50	0-50	0-50	0-5	0-5

General Parameters

	Unit	YLR-50	YLR-100	YLR-200	YLR-500-SM	YLR-1000-SM
Cooling Method ***	V AC	air or water	air or water	air or water	water	water
Cooling Water Temperature Range	°C	20-30	20-30	20-30	20-30	20-30
Dimensions (W x H x D)	cm	3RU 19"	3RU 19"	4RU 19"	6RU 19"	60x80x80
Weight	kg	25	30	40	50	150

* Output power up to 2kW available on request with single mode (TEM_{00}) output. Please contact IPG Photonics with your requirements.

** Linear polarization is available on request for up to 500W output power.

*** Customer can select cooling method.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics and IPG Photonics logo are trademarks of IPG Photonics Corporation. Other trademarks are property of their respective holders. © IPG Photonics Corporation. All rights reserved.

IPG YLR Lasers Offer Versatility and Ease of Integration

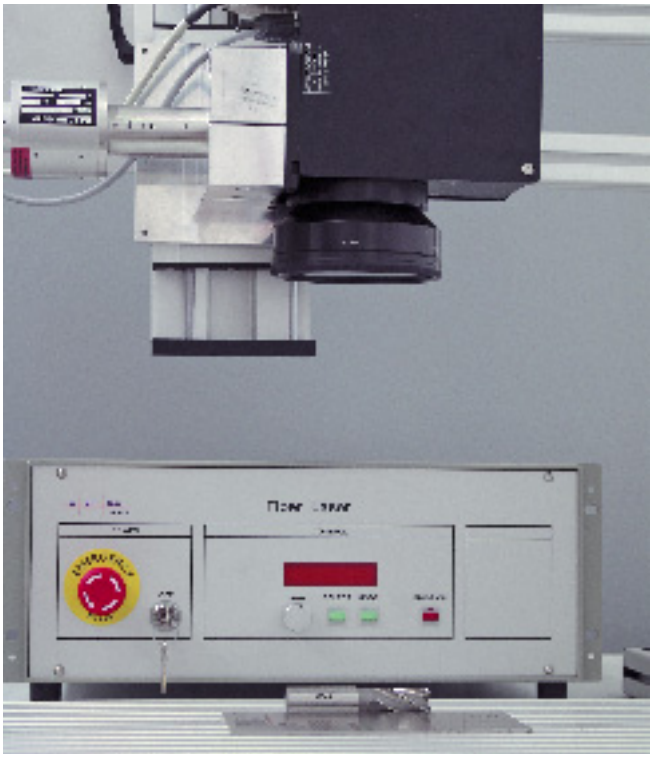

YLR-200-SM laser integrated with a scanner in an engraving machine

Compact in size, user-friendly, highly reliable, and broadly versatile, IPG's diode-pumped fiber lasers bring revolutionary solutions to multiple applications. Depending on output optics used, spot sizes of less than 10 µm can be achieved by keeping focal lengths of more than 200 mm. This leads to large working areas for galvo scanning systems and user-friendly long working distances. Already 50-100 W output powers at 10-20 µm spot size is enough for fine cutting applications such as cutting of coronal stents or hole drilling.

IPG single mode fiber lasers can be quickly integrated into a variety of different work stations including robots, cartesian co-ordinate systems and high speed scanners. These units can be provide with integrated collimators or plug and play connectors that plug into available standard beam delivery systems. In many cases the lasers can replace conventional YAG and gas lasers on existing work stations to allow the user to take advantage of the tremendous reliability and cost savings that this technology offers. For new systems, IPG can recommend an integrator from a long list of qualified system integrators familiar with our technology.

Due to small spot sizes of down to 10 µm, the heat affected zone stays small and fine contours are able to be cut. Precision spot and seam welding applications for all metals are done with either direct optics or galvo scanning heads.

Depending on needed spot diameters, working distances and material properties, IPG's single mode YLR-SM lasers cover all applications of precision spot and seam welding applications in fine mechanics, electronics and medical device industries.

YLR-1000-SM 1kW fiber laser integrated in a cutting cell

Flexibility for a Variety of Applications

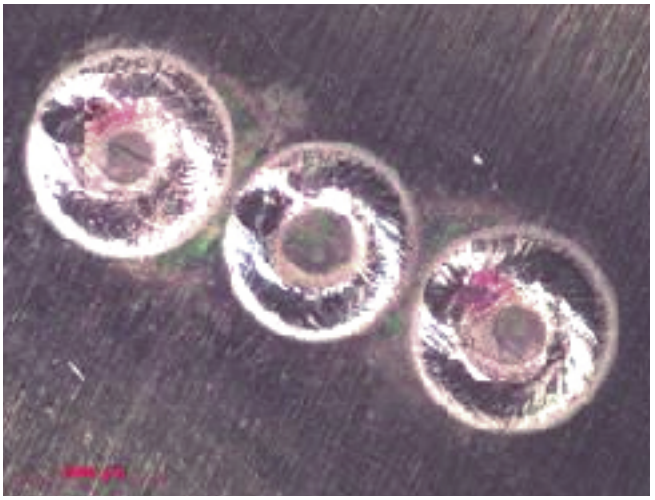

Copper contacts welding sample

Single mode fiber lasers have gained rapid acceptance on a large variety of welding applications including batteries, medical assemblies, fuel cells, wire welding, flexures for hard disc drives, and thicker assemblies such as transmission components where deep narrow welds are required. The optimization is very rapid as these lasers can operate in a continuous mode or a modulated mode, with no spot size change over the 10%-105% dynamic operating range. The low divergence allows for long working distances that makes focus control very forgiving and repeatable. On single spot welds, the pulse duration can be set from a few microseconds to continuous operation and operate up to 50 kHertz. The control of both spot size and heat control cannot be matched by any other industrial material processing laser.

On cutting applications, single mode fiber lasers are utilized for precise cutting of very delicate structures such as stents, silicon wafers, surgical knifes as well as thicker materials at the higher power levels. Because of the high fluence, only possible with single mode fiber lasers, combined with long standoff distance fiber lasers are achieving speeds and heat profiles never before achieved with laser processing. When operating in the modulated mode, these lasers are ideal for producing small holes at a rapid rate. For example, 50 micron holes in .012" Titanium at a rate of 300 holes per second with a 600 Watt single mode fiber laser. In drilling holes required by the printing and engraving industries, single mode fiber lasers have become the dominant technology achieving precise holes at rates above 100 kHertz.

Precise stent cutting by YLR-200-SM

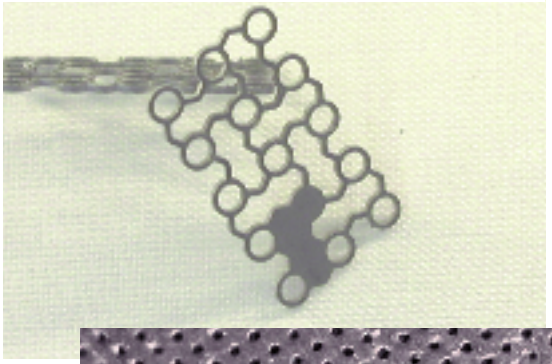

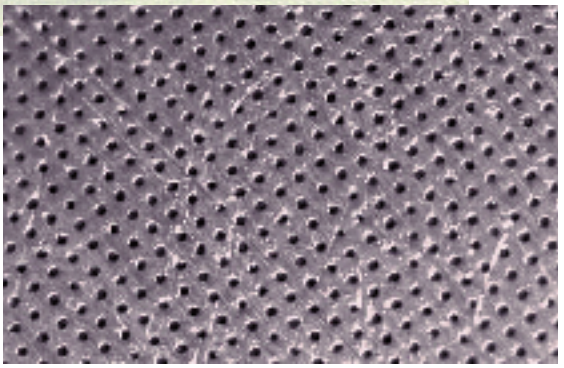

50um holes drilled at speed of 300 holes per second

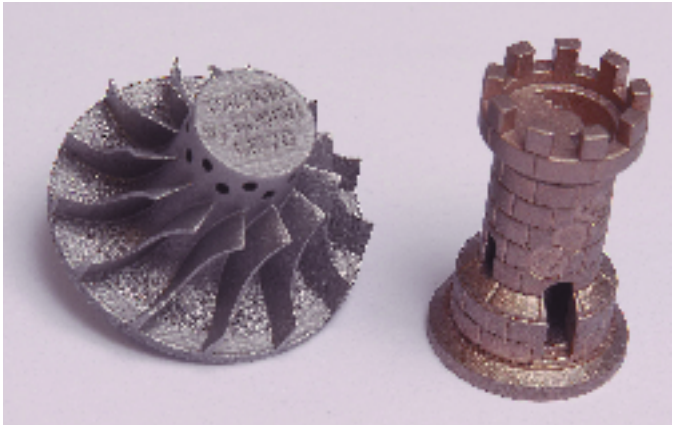

3D stereo-lithography samples

Fiber lasers are also used extensively by OEMs offering sintering machines to produce three-dimensional parts from metal powders. On this application the consistent CW power that can be focused to a very precise spot size (in case of single mode laser down to ~10 micron) is ideal for manufacturing very precise parts while minimizing the powder consumption. IPG`s YLR series has been widely deployed for this unique application over last few years.

The Power to Transform™

IPG Photonics Corporation

World Headquarters

50 Old Webster Road

Oxford, MA 01540 USA

+1 508 373 1100 ■ +1 508 373 1103 (fax)

sales.us@ipgphotonics.com

www.ipgphotonics.com

IPG Laser GmbH

European Headquarters

Siemenstrasse 7

D-57299, Burbach, Germany

+49 2736 4420 100 ■ +49 2736 4420 160 (fax)

sales.europe@ipgphotonics.com

USA ■ Germany ■ Russia ■ Italy ■ Japan ■ India ■ UK ■ China ■ Korea

Distributors worldwide

IPGP NASDAQ LISTED

HELIUM

HELIUM - FIBER COUPLED SINGLE EMITTER

Description

- Up to 9W at 9xx wavelengths
- 105 µm fiber core; 0.15=NA
- Typical 50% optical to electrical efficiency
- Designed for operation in rugged environment

Applications

- Fiber Laser Pumping
- Direct, Medical, Telecom, Space and Defense

scd SemiConductor Devices

Helium - Fiber Coupled Single Emitter: Generic Specifications

Parameter	Typical	Typical	Typical
Laser Characteristics			
Central wavelength	915 +/-5 nm	940 +/-5 nm	975 +/-5 nm
CW output power	Up to 8 W	Up to 8 W	Up to 9 W
Spectral width (FWHM)	4 +/-1 nm	4 +/-1 nm	4 +/-1 nm
Conversion efficiency	>=45%	>=45%	>=45%
Operating Current	< 11 A	< 11 A	< 12 A
Forward Voltage	1.7 V	1.7 V	1.65 V
Characterization temperature	25C	25C	25C
Wavelength tuning vs. temperature	<0.35 nm/°C	<0.35 nm/°C	<0.35 nm/°C
Fiber Characteristics			
Fiber core dimension	105 µm	105 µm	105 µm
Fiber Numerical aperture	0.15	0.15	0.15
Fiber Cladding	125 µm	125 µm	125 µm

DANGER

INVISIBLE LASER RADIATION--- AVOID EYE OR SKIN EXPOSURE TO DIRECT OR SCATTERED RADIATION

EYE PROTECTION REQUIRED CLASS 4 LASER PRODUCT

Devices are highly sensitive to ESD. Terminals must be short-cricuited unless required for operation

SCD reserves the right to change product design and specification at any time without notice.
No responsibility is assumed for the use of these products, nor for any infringement on the right of others, resulting from the use of these products.
Laser diode product components are intended for use in a user devised end system.
However, these products are capable of emitting Class IV radiation.
Extreme care must be exercised during their operation.
Only persons familiar with the appropriate safety precaution should operate a laser product.
Direct viewing of the laser beam exposure to specular reflections, must be avoided.
Serious injury may result, if any part of the body is exposed to the beam.
The eye is extremely sensitive to the infrared radiation and therefore, proper eyewear must be worn at all times.
Use of optical instruments with these products, may increase eye hazard.
Always wear proper eye protection when operating.

www.studio3.co.il

SCD/UNC-33168-1210

SemiConductor Devices
• P.O. Box 2250, Haifa 31021 Israel • Tel: (+972)-4-9902535 9902500
• Fax: (+972)-4-9902627 • e-mail: marketing@scd.co.il • Web: www.scd.co.il

LD pumped Nd: YAG LASER
SL188 series

To Customers

SL188 series has a very wide range of line-up. Adding standard model (SL188A/ SL188A2/ SL188AS/ SL188AS2) optimized for high average power, we can optimize them to variety of laser applications, like high beam quality model for and high pulse energy model etc...

Specification

LD pumped Nd: YAG laser
SL188A / SL188A2

Equipment type	SL188A	SL188A2
Laser crystal	Nd:YAG	
Laser wavelength	1.064μm	
Oscillator type	Continuous wave pumping and Q switching laser	
Output energy	>20mJ@10kHz	>20mJ@20kHz
Maximum average power	>200W@10kHz	>400W@20kHz
Cooling type Utility	Water-cooled 3phase200V 50 / 60Hz 30A	Water-cooled 3phase200V 50 / 60Hz 60A

LD pumped Nd: YAG SHG laser
SL188AS / SL188AS2

Equipment type	SL188AS	SL188AS2
Laser crystal	Nd:YAG	
Laser wavelength	0.532μm	
Oscillator type	Continuous wave pumping and Q switching laser	
Output energy	>10mJ@10kHz	>20mJ@10kHz

Maximum average power	>100W@10kHz	>200W@10kHz
Cooling type	Water-cooled	Water-cooled
Utility	3phase200V 50 / 60Hz 30A	3phase200V 50 / 60Hz 60A

New Series !!
LD pumped Nd: YAG THG laser
SL188AT

Equipment type	**SL188AT**	**SL188AT2 ***
Laser crystal	Nd:YAG	
Laser wavelength	0.355μm	
Oscillator type	Continuous wave pumping and Q switching laser	
Output energy	>6mJ@8kHz	>10mJ@10kHz
Maximum average power	>50W@8kHz	>100W@10kHz
Cooling type	Water-cooled	Water-cooled
Utility	3phase200V 50 / 60Hz 30A	3phase200V 50 / 60Hz 60A

* : In development.

▲ Top of this page

© Copyright OMRON LASERFRONT INC. 2007-2008. All Rights Reserved.

Product Information

- Laser Processing Systems
- Lineup by Application

Pulse IR YAG Laser

Continuous Wave IR YAG Laser
Q Switched IR YAG Laser

Q Switched Green YAG Laser
Q Switched UV YAG Laser

Q Switched IR YVO_4 Laser
Q Switched Green YVO_4 Laser
Q Switched UV YVO_4 Laser

Fiber Laser

- LCD Manufacturing Equipment
- Rechargeable Battery Inspection Equipment

Continuous Wave IR YAG Laser / Q Switched IR YAG Laser

KLY-C300a

Continuous output type "KLY-C300a" achieves 15% or more electricity-optical conversion efficiency under the condition of beam quality where transmission to optical fiber with core diameter 300μmf is possible by the optimization of YAG crystal configuration corresponding to LD pumping and development of high steady high-luminance and highly stable oscillator.

KLY-Q200a

Q-switched pulse type "KLY-Q200a" succeeds in obtaining 30nsec Q-switched pulse at the shortest by enhancing the efficiency as well as development of the super-highspeed gain switch control system of AO-Q switch elements that generate Q-switched pulse. The average output class of "KLY-Q200a" makes it possible to gain 200kW Q-switched pulse at the maximum.

KLY-SQ350a

"LD pumping technology" and "Q-switched control technology" that we cultivated thorough the development of KLY-series were gathered for the development of KLY-SQ350a laser osccillator boasting of domestic top level average output and peak output in LD pumping high output Q-switched type IR lasers. In addition, new technology was adopted, as a result, we succeeded in the development of KLY-SQ350a. Both quality of beam and high output are achieved. High performance was achieved in all aspects such as "average output: 300W" and "Maximum peak output:250kW", "M2<15". In addition, due to LD pumping, high output as well as small size are also realized. The design is system consturciton friendly, therefore, for laser osccilator and power source, either separated type or integrated type can be selected in order to correpond to all applications.

Applications

Deep Engraving Marking、High-Speed Cutting、Large Area Removal Processing

Processed Example

Aluminum Deep Engraving Processing

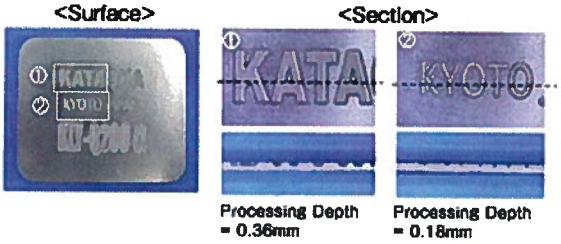

Oscillator Model : KLY-Q200 α
Processing Details : Deep Engraving
Material : A5000 Series
Processing Optics : Galvano Scanner

SUS Doughnut-Shape Peripheral Welding

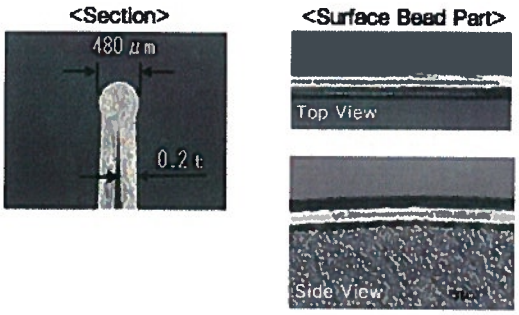

Oscillator Model : KL Y-C300 α
Processing Details : Overlapping Outer Welding
Material : SUS304
Sheet Thickness : 0.2t
Processing Nozzle : KLP-HF80/C-T

Basic Specifications

Item	Details		
Model	KLY-C300α	KLY-Q200α	KLY-SQ350α
Wavelength	1064nm		
Pumping Source	808nm Semiconductor Laser (LD)		
Active Medium	Nd:YAG Crystal		
Configuration	Integrated Oscillator and Power Operating Voltage Part Type (Chiller Unit separate) SI Type/GI Type Type Fiber	Integrated Oscillator and Power Operating Voltage Part Type (Chiller Unit separate) Direct Ray Optics	Separate Oscillator and Power Operating Voltage Part Type Or Integrated Type (Chiller Unit separate)
Maximum Average Output Power	300W	200W@20kHz	300W10kHz
Maximum Peak Output Power	-	200kW@5kHz	250kW@10kHz
Maximum Frequency	CW,1Hz～500Hz	100Hz～50kHz	5kHz～15kHz
Pulse Width	-	<300nsec@10kHz	<150nsec@10kHz
Output Power Stability	Less than 2%rms (Cooling water stability: ±1℃.)		
Operating Voltage	AC220V±0%、50／60Hｚ±1Hz		

Input power Consumption	3.5kVA	6kVA
Weight	170kg	175kg
External Dimensions W×H×Dmm3	398×940×1060mm3 (Not including protrusions)	456×940×1064mm3 (Not including protrusions)

page top

Copyright c KATAOKA CORP. All rights reserved.

laser welding

Fiber Laser Welder

LF1000A

- 1kW laser power
- Real time power feedback
- Energy and time share options
- Touch screen interface
- Optical feedback protection
- Flexible beam delivery options

Features

1kW laser power – enables both high speed and penetration welding of steels and aluminum.

Real time power feedback – laser power output is verified and maintained to ensure high weld repeatability and quality

Energy and time share options – increase efficiency by supporting more than one workstation or multiple weld heads with energy and time beam sharing options

Laser tuned for weld performance – laser beam characteristics are specifically designed for both excellent weld quality and performance. Pulse shaping and modulation provide ultimate weld control

Touchscreen interface – enables quick and easy parameter programming

Optical feedback protection – the unique internal design of the laser provides *guaranteed protection* from optical reflection from the workpiece

Flexible Beam Delivery Options – a range of delivery fibers and focus heads are available to provide an optimized solution for process spot size and equipment integration

TYPICAL APPLICATIONS

Welding 0.06" thick aluminum

High speed welding of tube components

Welding battery tabs

Seam welding automotive sub assemblies

Spirit Of Innovation™

MIYACHI UNITEK™

SPECIFICATIONS

MODEL NUMBER LF1000A			
Oscillator:	*Maximum rated power*		1000W
	Maximum peak power		1000W
	Waveform	*REPEAT mode*	0.1~500.0ms (0.1ms step) / 0.05~50.00ms (0.05ms step)
	Control	*CW Mode*	0.1~100.0ms (0.1ms step) / 0.01~10.00ms (0.01ms step)
	Repetition speed		1~5000pps
	Modulation		1~5000Hz (Single, triangle, and square wave)
	Wavelength		1070~1100nm
	Safety shutter		Open-close sensor
	Guide laser		Red-colored visible laser
	Output power stability		±2% or below @ over 10W
	Optics		Optical fiber , three energy share at max.
Controller:	*Schedule set*		256
	Measuring and monitoring		Laser energy (J) and average power (W)
	Counter:		Total outputs (9 digits), good results (9 digits) LD-on time (7 digits), processing time (7 digits)
	Cable length		0.5m
Power Supply:	*AC power requirements*		Three phase, 200~400VAC +10%/-15%, 50/60Hz
	Power consumption		10.3kW max. (1.0kW @ hold time)
	External datacom		RS-485, LAN (100BASE-TX/10BASE-T)
	Cooling method		Water cooling (Temp. 5~26°C)
	Ambient operation temperature:		41-122°F (5-50°C)
	Weight lbs (kg)		838 (380)
	Dimensions H x W x D in (mm)		43.7 x 22.4 x 42.0 (1110.4 x 569.5 x 1068.8)

Specifications subject to change without notice

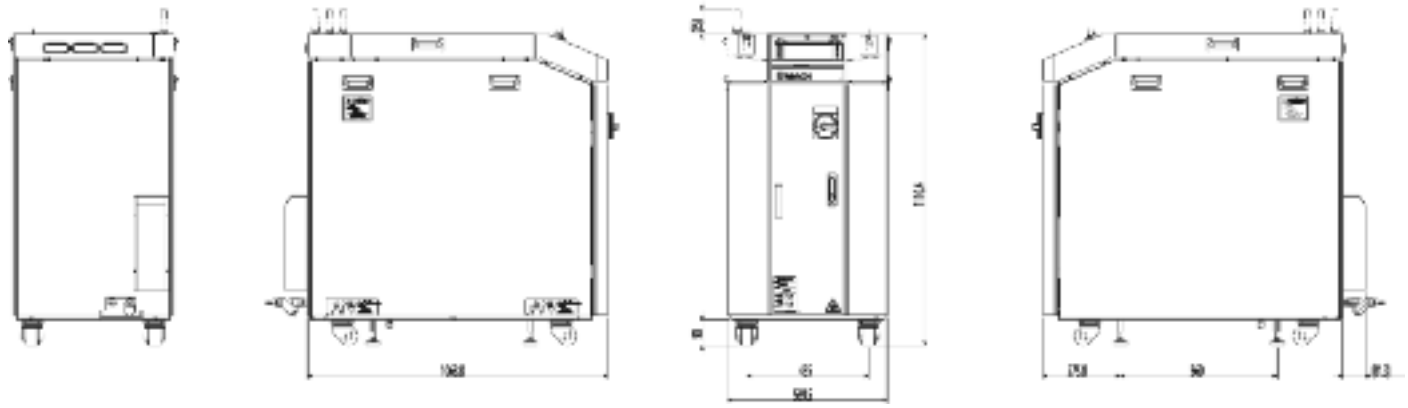

Your Local Representative

Spirit Of Innovation™

MIYACHI UNITEK™

Corporate Office: 1820 S. Myrtle Ave. • P.O. Box 5033 • Monrovia, CA 91017-7133 USA
Tel: (626) 303-5676 • FAX: (626) 358-8048 • info@muc.miyachi.com
www.muc.miyachi.com • ISO 9001 Certified Company
24/7 Repair Service: 1-866-751-7378

MIDWEST Sales/
Applications Lab:
50384 Dennis Ct.
Wixom, MI 48393
Tel: 248 313 3078
FAX: 248 313 3031
midwestsales@
muc.miyachi.com

MEXICO Sales Office:
Pedro Rosales de Leon 7946-200
Fraccionamiento Las Misiones
Ciudad, Juarez, Chihuahua Mexico
Tel: +52.656.623.2719
FAX: +52.656.617.6058
mxsales@muc.miyachi.com

SOUTH AMERICA Sales Office:
Tel: +55 (11) 3712-2389
Fax: +55 (11) 3712-2389
sasales@muc.miyachi.com

ASIA Sales Office:
Unit D, 20/F, Infotech Centre
21 Hung To Road
Kwun Tong, Hong Kong
Tel: +852 2833-6998
FAX: +852 2833-6672
asiapacific@muc.miyachi.com

EUROPE Sales Office:
Miyachi Europe Corporation B.V.
Schootense Dreef 21
NL-5708 HZ Helmond
The Netherlands
Tel: +31 492-54-22-25
FAX: +31 492-53-62-22
www.miyachieurope.com
info@mec.miyachi.com

Specifications subject to change without notice.
Copyright© 2010 Miyachi Unitek Corporation. The material contained herein cannot be reproduced or used in any other way without the express written permission of Miyachi Unitek Corporation. All rights reserved.

991-099 4/10

SPI Lasers | inspiring your products & manufacturing

redPOWER®

High Power Fiber Lasers R4 200-400W CW/M –"LM"

With GTWave® Technology

PRELIMINARY DATASHEET

Features

- CW or Modulated to 100 kHz (modulated pulses <10µs to CW)
- Efficiency up to 10x equivalent Nd YAG lasers
- High output power stability
- Full comms / analog I-O control options
- Application optimized beam profile
- Improved process control for welding
- 2-year standard warranty (additional warranty options available)

Applications

Made For..... Materials processing

Precision welding
Cutting
Bending
Bonding
Plastics Cutting/welding
Sintering
Annealing
Surface texturing





Application Optimised Beam Profile

PRELIMINARY DATASHEET

redPOWER®

The redPOWER® series of fiber lasers from SPI has been designed to meet the highest standards of reliability, repeatability and user safety.

The commercial advantages of fiber lasers over alternative technologies are far reaching: improved line speeds, finer machining capabilities, reduced downtime and lower cost of ownership, giving users a leading edge advantage. With the Low Moded (LM) M^2~4 beam parameters, the laser has been optimised as a highly flexible process tool for a wide range of cutting and welding applications. SPI's R4 LM lasers are designed for applications in markets such as medical, electronics, plastics and printing.

Significant design features of the SPI unit include thermal management, low noise, output stability and system-to-system repeatability. Every care has been taken at the design stage to ensure our products offer a long and maintenance-free life.

Designed in accordance with: IEC/EN 60825 Laser safety, IEC/EN 61010 Electrical safety, IEC/EN 61000 EMC, RoHS Directive.

Fiber Laser Cutting

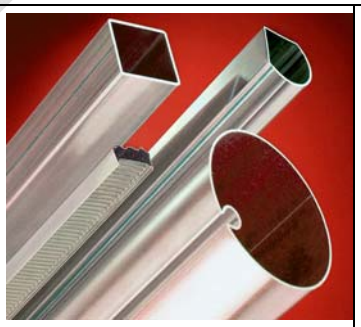

Tube Cutting

Remote Welding- Fraunhofer IWS



Seam Welding

www.spilasers.com
©2010 SPI Lasers UK Ltd

SM-S00167 Issue C
PRELIMINARY

SPI Lasers UK Ltd, 3 Wellington Park, Tollbar Way, Hedge End, Southampton SO30 2QU, UK
UK office: +44 (0)1489 779 696

SPI Lasers LLC, 4000 Burton Drive, Suite 1, Santa Clara, CA 95054

US office: +1 408 454 1169

nqa. ISO 9001 Registered | UKAS QUALITY MANAGEMENT 015

Optical

Rated output power	200W "LM"	400W "LM"
Central emission wavelength	1070 ± 10nm	
Mode of operation	CW and Modulated	
Output power variation	<± 3 % (1)	
Red pilot laser	Standard	

Pulse Characteristics

Maximum modulation rate	100kHz
Minimum pulse width	<10 µS

Output Beam Characteristics

Beam diameter	3.2 ± 0.5
Full angle divergence	<3.0
M^2 / Beam Parameter Product (BPP)	3-5 / 1 – 1.7 mm.mrad
Polarization	Random
Beam delivery cable length	6m (standard) / options available

Control

Control interface	Analog/RS232 (standard) / options available
Control options	Open Loop

Electrical

Power supply requirements	Single Phase
Operating Voltage(Vac 50 - 60 Hz)	240
Safety Interlock Performance Level	PL'e' (2)

Mechanical

Dimensions	5U (19") rack unit 507 x 483 x 221 mm
Weight	<45kg
Cooling	Water

Environmental

Operating temperature	5-40˚C
Humidity	5-85% RH (non-condensing)

Configuration Options

10m Beam delivery optic cable	•	•
PSE (Pulse Shape Equalization)	•	•
XPR (Extended Processing Range)	•	•

(1) 8 hrs constant temperature

(2) ISO 13849-1 - Safety of Machinery

Accessories

Visit www.spilasers.com for more information on accessories and accessory datasheets.

- Extended warranty options
- Longer beam delivery optic lengths

Terms and Conditions

Some specific combinations of product specifications and optional accessory may not be available. These lasers are designed as products for incorporation or integration into other equipment. All product information is believed to be accurate and subject to change without notice. A complete product specification will be issued on request at time of order acknowledgement. The user assumes all risks and liability whatsoever in connection with the use of the product or its application.

Customer Services
CustomerServices@spilasers.com

Australia, Malaysia, Singapore, Taiwan, Thailand, Vietnam
Nicholas Monteiro: + 65 971 18229
Nicholas.Monteiro@spilasers.com

Austria, Germany, Switzerland and South Eastern Europe
Michael Duka: +49 8171 911167
Michael.Duka@spilasers.com

Europe (excluding; Austria, Germany, Switzerland & South Eastern Europe)
Louise Partridge: +44 1788 832020
Louise.Partridge@spilasers.com

Product Support
Tel: +44 1489 779 696
ProductSupport@spilasers.com

Asia Pacific
Audrey Bourriez: +44 7787 570 995
Audrey.Bourriez@spilasers.com

China
Lu Ming: +86 755 3395 5767
Lu.Ming@spilasers.com

USA & Canada
Ken Dzurko: +1 408 454-1171
Ken.Dzurko@spilasers.com

PRELIMINARY

SPI Lasers | inspiring your products & manufacturing

redPOWER®

High Power Fiber Lasers R4 25-400W CW/M -"HS"
With GTWave® Technology

Features

- CW or Modulated to 100 kHz (modulated pulses <10µs to CW)
- Single mode (M^2 <1.1)
- Efficiency up to 10x equivalent Nd YAG lasers
- High stability laser (typically <±0.5% output power variation)
- Spot size to sub 10µm
- Open Loop/ Closed Loop Control Options
- XPR, PSE Extended performance control options
- Full comms/analog I-O control options
- High reliability optics, diode MTTF > 400,000 hours
- 2-year standard warranty (additional warranty options available)

Applications

- Materials processing
  - Precision welding
  - Cutting
  - Bending
  - Bonding
  - Drilling
  - Rapid prototyping
  - Sintering
  - Annealing
  - Surface texturing
- Marking and engraving
  - Graphic image processing
  - Flexo
  - Anilox
  - Gravure



Image Courtesy of Inno-Shape and Bessy

redPOWER®

The redPOWER® series of fiber lasers from SPI has been designed to meet the highest standards of reliability, repeatability and user safety.

The commercial advantages of fiber lasers over alternative technologies are far reaching: improved line speeds, finer machining capabilities, reduced downtime and lower cost of ownership, giving users a leading edge advantage. SPI's R4 "HS" series lasers can be employed in a wide range of process requirements and have been optimized for maximum performance and operating flexibility. Extended Performance Range (XPR) and Pulse Shape Equalization (PSE) control features are available options for the most demanding applications.

Significant design features of the SPI unit include thermal management, low noise, output stability and system-to-system repeatability. Every care has been taken at the design stage to ensure our products offer a long and maintenance-free life.

Designed in accordance with: IEC/EN 60825 Laser safety, IEC/EN 61010 Electrical safety, IEC/EN 61000 EMC, RoHS Directive.

www.spilasers.com
©2010 SPI Lasers UK Ltd

SM-S00087 Issue F

SPI Lasers UK Ltd, 3 Wellington Park, Tollbar Way, Hedge End, Southampton SO30 2QU, UK
UK office: +44 (0)1489 779 696

SPI Lasers LLC, 4000 Burton Drive, Suite 1, Santa Clara, CA 95054

US office: +1 408 454 1169

nqa. ISO 9001 Registered | UKAS QUALITY MANAGEMENT 015

SPI Lasers | inspiring your products & manufacturing

redPOWER®

Optical

Rated output power	25W "HS"	50W "HS"	75W "HS"	100W "HS"	200W "HS"	300W "HS"	400W "HS"
Central emission wavelength	1070 ± 10nm						
Mode of operation	CW and Modulated						
Output power variation	<± 0.5% (typical) [1]						
Red pilot laser	Standard						

Pulse Characteristics

Maximum modulation rate	100kHz						
Minimum pulse width	<10 µS						

Output Beam Characteristics

Beam diameter	5.0 ± 0.5mm				5.0 ± 0.7mm		
Full angle divergence	<0.4mrad				<0.45mrad		
M^2 / Beam parameter product (BPP)	<1.1 (nominal) <0.37 mm.mrad						
Polarization	Random						
Beam delivery cable length	6m (standard) / options available						

Control

Control Interface	Analog/RS232 (standard) / options available						
Control Options	Closed Loop / Open Loop						
Operating Voltage(Vac 50 - 60 Hz)	100-240				240		

Electrical

Power supply requirements	Single Phase						
Operating Voltage(Vac 50 - 60 Hz)	100-240				240		
Safety Interlock Performance Level	PL'e' [2]						

Mechanical

Dimensions	5U (19") rack unit 507 x 483 x 221 mm						
Weight	<45kg						
Cooling	Air	Air	Air	Air	Air		
					Water	Water	Water

Environmental

Operating temperature	5-40˚C						
Humidity	5-85% RH (non-condensing)						

Configuration Options

10m Beam delivery optic cable	•	•	•	•	•	•	• [2]
PSE (Pulse Shape Equalization)	•	•	•	•	•	•	•
XPR (Extended Processing Range)					• [3]	•	•

[1] **Measured under closed loop control** [2] **ISO 13849-1 Safety of Machines** [3] **Water cooled variant only**

Accessories

Visit www.spilasers.com for more information on accessories and accessory datasheets.

- Extended warranty options
- Longer beam delivery optic lengths

Terms and Conditions

Some specific combinations of product specifications and optional accessory may not be available. These lasers are designed as products for incorporation or integration into other equipment. All product information is believed to be accurate and subject to change without notice. A complete product specification will be issued on request and also at time of order acknowledgement. The user assumes all risks and liability whatsoever in connection with the use of the product or its application.

Customer Services
CustomerServices@spilasers.com

Australia, Malaysia, Singapore, Taiwan, Thailand, Vietnam
Nicholas Monteiro: + 65 971 18229
Nicholas.Monteiro@spilasers.com

Austria, Germany, Switzerland and South Eastern Europe
Michael Duka: +49 8171 911167
Michael.Duka@spilasers.com

Europe (excluding; Austria, Germany, Switzerland & South Eastern Europe)
Louise Partridge: +44 1788 832020
Louise.Partridge@spilasers.com

Product Support
Tel: +44 1489 779 696
ProductSupport@spilasers.com

Asia Pacific
Audrey Bourriez: +44 7787 570 995
Audrey.Bourriez@spilasers.com

China
Lu Ming: +86 755 3395 5767
Lu.Ming@spilasers.com

USA & Canada
Ken Dzurko: +1 408 454-1171
Ken.Dzurko@spilasers.com

SPI Lasers | inspiring your products & manufacturing

redPOWER®

High Power Fiber Lasers R4 100-400W CW/M –"RS"
With GTWave® Technology

Features

- CW or Modulated to 10 kHz (modulated pulses <10µs to CW)
- Single mode (M^2 <1.1)
- Efficiency up to 10x equivalent Nd YAG lasers
- Spot size to sub 10µm
- High stability laser
- Dynamic pulse shape control
- Full comms/analog I-O control options
- High reliability optics, diode MTTF > 400,000 hours
- 2-year standard warranty (additional warranty options available)

Applications

- Materials processing
  - Precision welding
  - Cutting
  - Bending
  - Bonding
  - Drilling
  - Sintering
  - Annealing



Image courtesy of Micrometric

redPOWER®

The redPOWER® series of fiber lasers from SPI has been designed to meet the highest standards of reliability, repeatability and user safety.

The commercial advantages of fiber lasers over alternative technologies are far reaching: improved line speeds, finer machining capabilities, reduced downtime and lower cost of ownership, giving users a leading edge advantage. SPI's R4 "RS" product variants can be employed in a wide range of material processing applications and have been optimized to enable maximum performance to be achieved at competitive cost.

Significant design features of the SPI unit include thermal management, low noise, output stability and system-to-system repeatability. Every care has been taken at the design stage to ensure our products offer a long and maintenance-free life.

Designed in accordance with: IEC/EN 60825 Laser safety, IEC/EN 61010 Electrical safety, IEC/EN 61000 EMC, RoHS Directive.

www.spilasers.com

©2010 SPI Lasers UK Ltd

SM-S00184 Issue C

SPI Lasers UK Ltd, 3 Wellington Park, Tollbar Way, Hedge End, Southampton SO30 2QU, UK
UK office: +44 (0)1489 779 696

SPI Lasers LLC, 4000 Burton Drive, Suite 1, Santa Clara, CA 95054
US office: +1 408 454 1169

nqa. ISO 9001 Registered | UKAS QUALITY MANAGEMENT 015

Rated output power	50W "RS"	100W "RS"	200W "RS"	300W "RS"	400W "RS"
Central emission wavelength	1070 ± 10nm				
Mode of operation	CW and Modulated				
Output power variation	<± 3% [1]				
Red pilot laser	Standard				
Pulse Characteristics					
Maximum modulation rate	10 kHz				
Minimum pulse width	<10 µS				
Output Beam Characteristics					
Beam diameter	5.0 ± 0.5mm		5.0 ± 0.7mm		
Full angle divergence	<0.4mrad		<0.45mrad		
M^2 / Beam Parameter Product (BPP)	<1.1 (nominal) / <0.37 mm.mrad				
Polarization	Random				
Beam delivery cable length	6m (standard) / options available				
Control					
Control interface	Analog / RS232 (standard) / options available				
Control options	Open Loop				
Electrical					
Power supply requirements	Single Phase				
Operating Voltage(Vac 50 - 60 Hz)	100-240		240		
Safety Interlock Performance Level	PL'd'[2]				
Mechanical					
Dimensions	5U (19") rack unit 507 x 483 x 221 mm				
Weight	<45kg				
Cooling	Air			Water	
Environmental					
Operating temperature	5-40˚C				
Humidity	5-85% RH (non-condensing)				
Configuration Options					
10m Beam delivery optic cable	•	•	•	•	•
PSE (Pulse Shape Equalization)	N/A	N/A	N/A	N/A	N/A
XPR (Extended Processing Range)	N/A	N/A	N/A	N/A	N/A

[1] **8 hours at constant temperature** [2] **ISO 13849-1 Safety of Machinery**

Accessories

Visit www.spilasers.com for more information on accessories and accessory datasheets.

- Extended warranty options
- Longer beam delivery optic lengths

Terms and Conditions

Some specific combinations of product specifications and optional accessory may not be available. These lasers are designed as products for incorporation or integration into other equipment. All product information is believed to be accurate and subject to change without notice. A complete product specification will be issued on request at time of order acknowledgement. The user assumes all risks and liability whatsoever in connection with the use of the product or its application.

Customer Services
CustomerServices@spilasers.com

Australia, Malaysia, Singapore, Taiwan, Thailand, Vietnam
Nicholas Monteiro: + 65 971 18229
Nicholas.Monteiro@spilasers.com

Austria, Germany, Switzerland and South Eastern Europe
Michael Duka: +49 8171 911167
Michael.Duka@spilasers.com

Europe (excluding; Austria, Germany, Switzerland & South Eastern Europe)
Louise Partridge: +44 1788 832020
Louise.Partridge@spilasers.com

Product Support
Tel: +44 1489 779 696
ProductSupport@spilasers.com

Asia Pacific
Audrey Bourriez: +44 7787 570 995
Audrey.Bourriez@spilasers.com

China
Lu Ming: +86 755 3395 5767
Lu.Ming@spilasers.com

USA & Canada
Ken Dzurko: +1 408 454-1171
Ken.Dzurko@spilasers.com

YG 980 Series

Modular Q-Switched Nd:YAG laser series with superb beam quality, excellent stability and high brightness.

- Ø 6 mm or Ø 9.5 mm.
- 1 or 2 amplifiers.
- Birefringence compensation.
- Line narrowing options (injection seeder or etalon).
- Full control of the laser through the remote control terminal or the software.
- Temperature stabilized optical bench.

Beam profile in near field @ 1064 nm

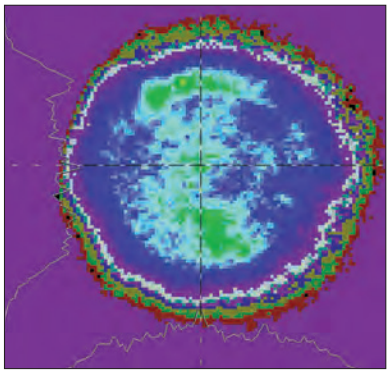

Beam profile in far field @ 1064 nm

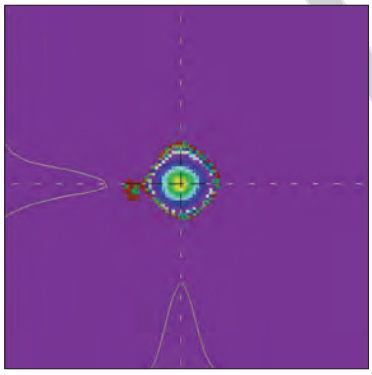

Beam profile in far field @ 532 nm

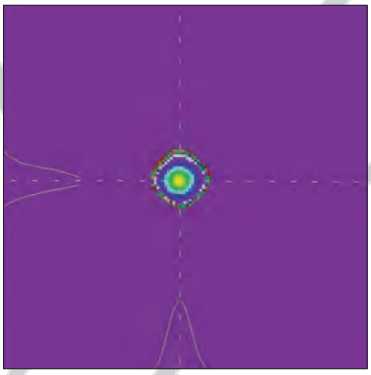

Temporal profile @ 1064 nm



YG981E-10 (1,6J @ 1064 nm, 10 Hz)

External synchronization flexibility:

INPUT/OUTPUT:

1- Turn-on key with stand-by position
2- AC power indicator
3- Laser ON warning
4- Output Q-Switch synchronization TTL signal, adjustable from the remote control terminal by ± 500 ns
5- Input Q-Switch synchronization TTL signal
6- Output flashlamp synchronization TTL signal
7- Input flashlamp synchronization TTL signal
8- Remote control terminal connector
9- Computer serial port interface (RS232)

Flashlamps and Q-Switch can be fully controlled through TTL signal, RS232 interface or remote terminal (3 meter long cable).
A fast photodiode located after the oscillator gives an output signal displaying the optical pulse shape.
User-friendly software is also available for control by computer (see the control panel on the main brochure).

SLM (Single Longitudinal Mode) option:

The complete option consists of a SLM CW fiber laser with Faraday isolator, power supply, a set of mirrors and an electronic feedback loop with piezoelectric ceramic mounted mirror.
The temporal beam profile is free of modulation with a very high reproducibility.

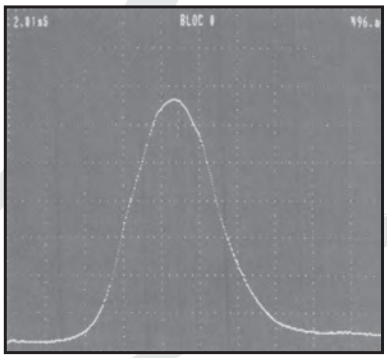

Temporal profile of a YG980 SLM pulse obtained with a 6 GHz scope and a 50 ps risetime phototube.

Remote control terminal:

This user-friendly terminal can be connected either to the laser housing or to the front of panel of the electronic cabinet by a 3 meter long flexible cable. It provides the following functions:

• flashlamps:
- flashlamp firing in single shot or automatic
- choice between internal or external synchronization
- readout and adjustment of voltages
- oscillator/amplifier flashlamp delay readout and adjustment
- shot counter

• Q-Switch:
- choice between internal or external synchronization
- setting of the Q-Switch in single shot, automatic or burst mode
- adjustable delay of the output synchronization signal with respect to opening of the Q-Switch
- readout and adjustment of delay between flashlamp and Q-Switch firing for energy adjustment

• others:
- emergency stop
- opening/closing intra-cavity shutter
- control of harmonic generators phase-matching
- wavelength separation platform rotation
- report of security defaults

Optical layout:

Configuration/Model	YG980	YG980E	YG981	YG981C	YG981E	YG982C	YG982E
Oscillator	ø 6 mm	ø 9.5 mm	ø 6 mm	ø 6 mm	ø 9.5 mm	ø 6 mm	ø 9.5 mm
Amplifier 1			ø 6 mm	ø 9.5 mm	ø 9.5 mm	ø 9.5 mm	ø 9.5 mm
Amplifier 2						ø 9.5 mm	ø 12 mm

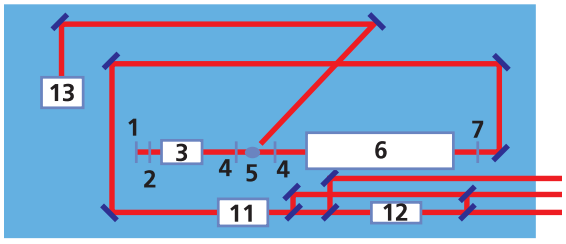

YG980 & YG980E models

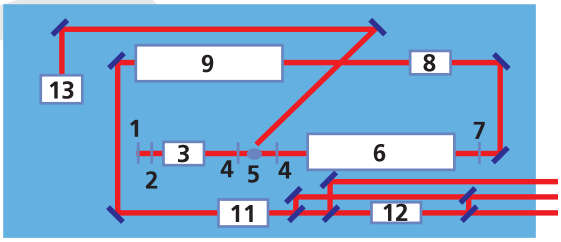

YG981, YG981C & YG981E models

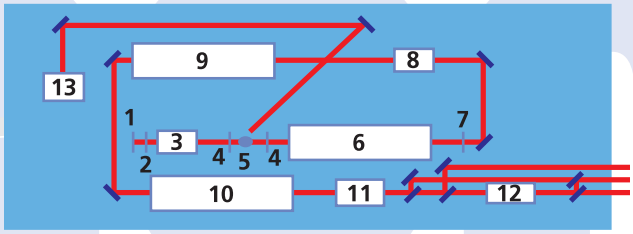

YG982 models

1- Back mirror
2- Shutter
3- Pockels cell
4- Quarter-wave plate
5- Glan polarizer
6- Oscillator laser head
7- Gaussian output coupler
8- Birefringence compensation (depends on the model)
9- First amplifier laser head
10- Second amplifier laser head
11- Second harmonic generator
12- Third or fourth harmonic generator
13- Injection seeder

Service requirements:

240 V - 16 to 20 A - 50/60 Hz
Water: 12.5 l/mn, 5°C-20°C
Pressure IN ≤ 6 bars (88PSI)
Pressure OUT ≤ 3 bars (44PSI)
Differential pressure IN-OUT ≥ 3 bars (44PSI)

** YG982*

Model		YG980	YG980E		YG981			YG981C			YG981E			YG982C	YG982E
Repetition rate (Hz)		10	10	20	10	20	50	10	20	30	10	20	30	30	10
Energy (mJ)															
	1064 nm	420	850	700	650	630	500	1200	1050	900	1600	1600	1200	1500	2500
	532 nm	190	400	300	320	290	170	600	520	350	820	780	550	700	1250
	355 nm	85	165/200*	140/160*	140	125	85	280	240	200	490	420	280/340*	350/420*	850
	266 nm	40	90	60	60	45	30	130	90	60	150	120	85	105	230
Pulse duration (ns)	1064 nm	6-8	6-8		6-8		8-11	6-8			8-11			8-11	9-12
Beam diameter (mm)	1064 nm	≤6	≤10		≤6			≤10			≤10			≤10	≤13
Divergence (mrad)	1064 nm	≤0.5	≤0.5		≤0.5			≤0.45		≤0.5	≤0.5			≤0.5	≤0.5
Polarization ratio (%)	1064 nm	≥90	≥80	≥70	≥90			≥80	≥75	≥70	≥95	≥90	≥90	≥90	≥90
Spatial profile															
Near field (fit to Gaussian)		≥0.7	≥0.7		≥0.7			≥0.7			≥0.7			≥0.7	≥0.7
Far field (fit to Gaussian)		≥0.95	≥0.9		≥0.9			≥0.9			≥0.95		≥0.9	≥0.9	≥0.9

Repetition rate (Hz): other values available on request
* **HE355:** High Energy U.V. option
Pulse duration: at FWHM measured with fast photodiode and 1 GHz scope - **Divergence:** full angle at $1/e^2$ of the peak
Polarization: horizontal @ 1064 nm - vertical @ 532 nm - horizontal @ 355 nm and @ 266 nm - **Near field spatial profile:** at 1 m from laser output
Far field spatial profile: at focal plane of a 2 m focus lens, least square fit to Gaussian (perfect fit = 1).

Power drift (%)	1064 nm	± 2
	532 nm	± 4
	355 nm	± 5
	266 nm	± 10
Energy stability (%)	1064 nm	± 2
	532 nm	± 4
	355 nm	± 6
	266 nm	± 8
Pointing stability (µrad)	1064 nm	< 50
	532 nm	< 50
	355 nm	< 50
	266 nm	< 50

Power drift: over 8 hours for $\Delta T° \leq \pm 3°C$.
Energy stability: peak-to-peak, 100% of the shots.
Pointing stability: measured by Spiricon LBA-100, rms, on 200 pulses at the focal plane of a 1 m focus lens.

Jitter (ns)	Standard		± 0.5
	SLM option		± 1
Focusability (times diffraction limit), M^2			
	10-20 Hz		≤ 2
	30-50 Hz		≤ 3
Linewidth (cm^{-1})	Standard		≤ 0.7
	LNE intracavity etalon		≤ 0.1
	SLM injection seeding	11 ns	≤ 0.003
		6 ns	≤ 0.005

Jitter: with respect to Q-Switch trigger, at half-width of 500 accumulated shots.
Linewidth:
Standard: FWHM, measured by a grating spectrometer with 0.045 cm^{-1} resolution.
LNE: FWHM, measured by a grating spectrometer with 0.045 cm^{-1} resolution, ≤ 15% energy reduction @ 1064 nm.
SLM: measured with a slow scan Fabry-Perot Etalon, ≤ 10% energy reduction @ 1064 nm and @ 532 nm, higher energy @ 355 nm.

2 bis, avenue du Pacifique - Z.A. de Courtabœuf - BP 23
91941 Les Ulis Cedex - France
Ph.: + 33 (0)1 69 29 17 00 - Fax: + 33 (0)1 69 29 17 29

601 Haggerty Lane, Bozeman, MT 59715-2001, USA
Ph.: +1 406 586 0131 - +1 811 QUANTEL - Fax: +1 406 586 2924

e.mail: quantel@quantel.fr - www.quantel-laser.com

VISIBLE AND INVISIBLE LASER RADIATION
AVOID EYE OR SKIN TO DIRECT
OR SCATTERED RADIATION.

CLASS 4 LASER RADIATION PRODUCT

Max Average Power	:	30 W
Max Energy/pulse	:	2,5J
Pulse duration	:	<20ns
Emitted Wavelength	:	190/4000nm

Class 4 laser product complies with FDA performance standards for laser products except for deviations pursuant to laser notice NO.50 dated june 24, 2007/IEC 60825-1

July 2010 QUANTEL reserves the right to change specifications without prior notice. Printed on PEFC™ certified paper (Programme for the endorsement of Forest Certification schemes).

JK802SM and JK1002SM

CW Nd:YAG lasers with SuperModulation ™

The JK802SM and JK1002SM are the latest addition to the already successful range of CW Nd:YAG lasers, providing a significantly higher level of performance, enabling deeper weld penetration, faster cleaner material cutting, with high reliability, flexibililty and lower process costs.

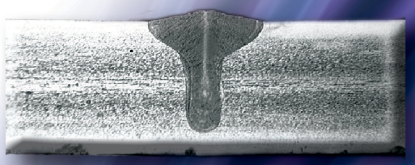

Without SuperModulation

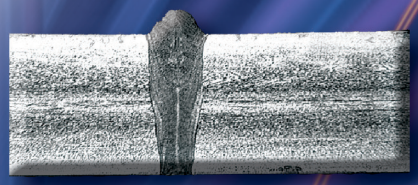

With SuperModulation

- Laser SuperModulation™ as a standard patented process
- SuperModulation™ increases the laser's maximum peak power to twice it's normal average power rating
- Supermodulation™ provides:
  - Welds to more than 5mm
  - Greater depth of focus
  - Reduced porosity
  - Longer Lamp life
  - Up to 40% speed increase
  - Less distortion
- Patented Luminator™ fiber beam delivery system with built in back reflection protection. "The most robust fiber delivery system in the world"
- LaserView SE™ control software provides full access to all laser funtions and diagnostics and with process cycles offers the funtionality of a "PLC within the laser"

GSI JK™ Lasers ™

Deeper Welds and Cleaner Cuts

The JK802 and JK1002 from GSI Group feature our successful SuperModulation™ technique. With SuperModulation, some energy is stored in the laser's power supply during the laser's off-time or during a low average power cycle, and is delivered to the lasing medium during a later on-time or high average power cycle to produce a momentary 2X power output. This extra output provides processing capability not typically found in lasers with similar power ratings.

Laser Specifications

Model	JK802SM	JK1002SM
Average Power (W)	800	1000
Max. Modulated Peak Power (W)	1600	2000
Number of Lamps	4	4
Beam Quality	16	24
Laser Response Time	2	
Modulation Frequency (Hz)	100 - 1000	
Output Mode	CW, Sine or Square	

Fiber-Optic Beam Delivery

Fiber Core Diameter (µm)	400	600
Standard Spot Size (nominal) (mm)	0.16 - 0.60	0.30 - 0.90
Standard Fiber Lengths (m)	5, 10, 15, 30, 50	
Max. Fiber Length (m)	50	
Beam Delivery Options	Up to 4T or 2Tx2E combination	
Timeshare Switching Time (ms)	<50	
Focus Head Options	Straight or Right Angle	
Process Tool Options	CCTV viewing, welding nozzles, autofocus cutting modules	

Facility Requirements

Cooling Water Requirements	60 l/min, 15.8 US gal/min @15°C
Max. Pressure Drop at 18°C (bar)	2.5
Max. Inlet Pressure (bar)	7.5
Cooling Capacity (kW)	40
Electrical Requirements	380 - 415V ± 10% @ 50Hz, 440 - 480± 10% @ 60Hz
Supply Rating (kVA)	43
Max. Power Consumption (kW)	40
Ambient Temperature (°C)	5 - 40
Max. Humidity	95% RH @20°C, 50 RH @ 40°C
W x H x D	2100 x 1243 x 756 (82 x 49 x 29)
Weight (kg)	500

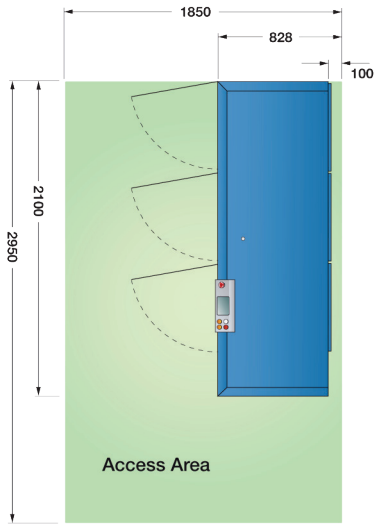



Dimensions in mm

Product Code Selection Guide

JK	802SM	5	N/A	E	3WES	D	P	A	20	15
		1	2	3	4	5	6	7	8	9

1	Laser Power Frequency	5	50 Hz
		6	60 Hz
2	Laser Fiber Output Launch Type	N/A	
3	Language	E	English
		F	French
		G	German
		C	Chinese
4	Fiber Launch Options	2WTS	2 way time share
		3WTS	3 way time share
		4WTS	4 way time share
		2WES	2 way energy share
		3WES	3 way energy share
		4WES	4 way energy share
		2T1F	2 way time share between one 2 way energy share and one fiber
		2T2F	2 way time share between one 2 way energy share and 2 fibers
		2T2E	2 way time share between two 2 Way Energy Shares
5	Pointing Diode Option	D	Pointing Diode
6	Interface Options	P	PC interface
7	Interface Options	A	Advanced Interface
8	Cable	10	10 m interface cable
		20	20 m interface cable
		30	30 m interface cable
		50	50 m interface cable
		LV	LaserView SE
9	Luminator Fiber Selection	5	5m x 150µm
		10	10m x 150µm
		15	15m x 150µm

www.gsiglasers.com

Product Centre
GSI Group Laser Division
Cosford Lane
Swift Valley
Rugby CV21 1QN
United Kingdom

Tel: +44 (0) 1788 570 321
Fax: +44 (0) 1788 541 904
Email: sales.laserdivision@gsig.com

Americas
GSI Group
125 Middlesex Turnpike
Bedford
MA 01730-1409
USA

Tel: +1 248 937 1064
Fax: +1 248937 1581
Email: na.sales.laserdivision@gsig.com

China
GSI Precision Technologies (Suzhou)
Building 8 Gantian Industrial Square
Gantian Road South, Suzhou Industrial Park
Jiangsu, 215024
China

Tel: +86 512 6283 7080
Fax: +86 512 6283 7087
Email: cn.sales.laserdivision@gsig.com

GSI JK™ Lasers ™

JK2003SM

The next generation CW Nd:YAG laser with SuperModulation ™

The JK2003SM provides a significantly higher level of performance, enabling deeper weld penetration, faster cleaner material cutting, with high reliability, flexibility and lower process costs.

- The only laser with SuperModulation as a standard patented process
- SuperModulation provides an enhanced process capability enablling welds in >10mm material, up to 40% faster and or deeper welds, greater depth of focus, less heat input, less distortion, minimum to zero weld porosity, SuperModulated welding performance greater than an equivalent 3kW CW laser.
- SuperModulation increases the laser's maximum peak power to at least twice it's normal average power rating.
- Redefining the price performance of high power CW lasers with Dual Cavity technology.
- Patented Luminator ™ fiber beam delivery system with built in back reflection protection. "The most robust fiber delivery system in the world"
- LaserView SE ™ control software provides full access to all laser functions and diagnostics and with profile cycles offers the functionality of a "PLC within the laser"

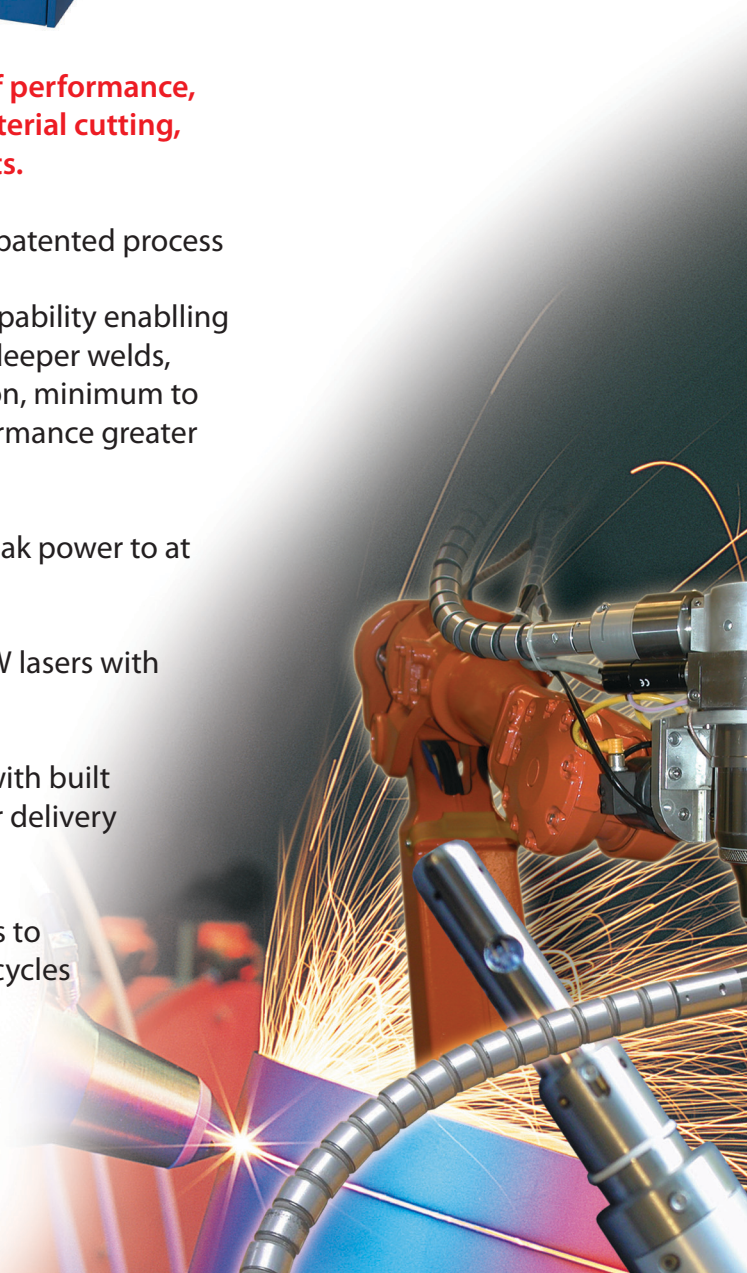

GSI ™ JK ™ Lasers

High Reliabilty and Flexibility

JK2003SM marks the introduction of the JK flagship CW product, featuring our patented SuperModulation ™ process capability giving this laser the widest operating range in it's class.

With SuperModulation ™, some energy is stored in the laser's power supply during the laser's off-time or during a low average power cycle and is delivered to the lasing medium during a later on-time or high average power cycle to produce a momentary x2 power output. This extra output provides processing capability not typically found in lasers with similar power ratings.

Laser Specifications

Model	JK2003SM
Max. Average Power [1] (W)	2000
Max. Modulated Peak Power (W)	4000
Beam Quality [2] (mm.mrad)	24
Fiber Diameter (µm)	600
Output Modes	CW, Sine, Square wave
Modulation Frequency (Hz)	100 - 1000
Fibre Beam Delivery Options	
Delivery Options	Up to 4 way time share
Timeshare Switching Time (ms)	<50
Standard Fiber lengths - Optional Bendlock for dynamic applications (m)	5, 10, 15, 30 and 50
Process Tools Options	Straight or right angle process tools. Right angle heads available with co-axial CCTV
Standard Range of Spot Sizes (mm)	0.3 - 0.9 plus others on request

Facility Requirements

Cooling Water Requirments	107 l/min, 28.2 US gal/min at 13°C
Max. Inlet Pressure (bar)	7.5
Max. Pressure Drop (bar)	3
Cooling Requirements (kW)	70
Supply Voltage and Frequencies	380 - 415V ± 10% @ 50Hz 440 - 480V ± 10% @ 60Hz
Supply Rating (kVA)	76
Ambient Temperature (°C)	5 - 40
Max. Humidity	95% RH @ 20°C, 50% RH @ 40°C
W x H x D (mm/inches)	2700 x 1233 x 931 / 106 x 48.5 x 36.6
Weight (kg)	800

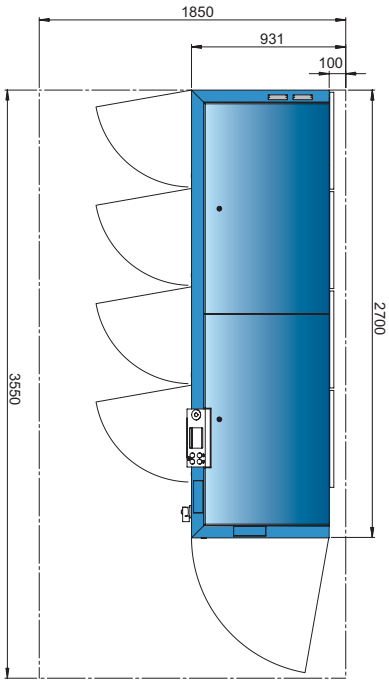

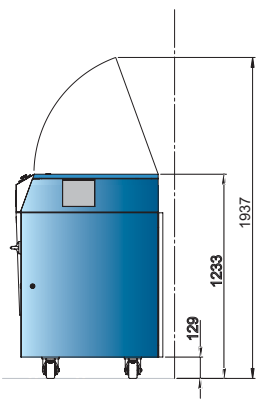

Product Code Selection Guide

		1	2	3	4	5	6	7	8	9
JK	2003SM	5	N/A	E	3WES	D	P	A	20	15

1	Laser Power Frequency	5	50 Hz
		6	60 Hz
2	Laser Fiber Output Launch Type	N/A	
3	Language	E	English
		F	French
		G	German
		C	Chinese
4	Fiber Launch Options	2WTS	2 way time share
		3WTS	3 way time share
		4WTS	4 way time share
		2WES	2 way energy share
		3WES	3 way energy share
		4WES	4 way energy share
		2T1F	2 way time share between one 2 way energy share and one fiber
		2T2F	2 way time share between one 2 way energy share and 2 fibers
		2T2E	2 way time share between two 2 Way Energy Shares
5	Pointing Diode Option	D	Pointing Diode
6	Interface Options	P	PC interface
7	Interface Options	A	Advanced Interface
8	Cable	10	10 m interface cable
		20	20 m interface cable
		30	30 m interface cable
		50	50 m interface cable
		LV	LaserView SE
9	Luminator Fiber Selection	5	5m x 150µm
		10	10m x 150µm
		15	15m x 150µm

GSI JK™ Lasers TM

www.gsiglasers.com

Product Centre
GSI Group Laser Division
Cosford Lane
Swift Valley
Rugby CV21 1QN
United Kingdom

Tel: +44 (0) 1788 570 321
Fax: +44 (0) 1788 541 904
Email: sales.laserdivision@gsig.com

Americas
GSI Group
125 Middlesex Turnpike
Bedford
MA 01730-1409
USA

Tel: +1 248 937 1064
Fax: +1 248937 1581
Email: na.sales.laserdivision@gsig.com

China
GSI Precision Technologies (Suzhou)
Building 8 Gantian Industrial Square
Gantian Road South, Suzhou Industrial Park
Jiangsu, 215024
China

Tel: +86 512 6283 7080
Fax: +86 512 6283 7087
Email: cn.sales.laserdivision@gsig.com

Saga

FLASHLAMP-PUMPED YAG SERIES





FEATURES

- UP TO 2.5 J @ 532 NM
- ULTRASTABLE ENERGY OUTPUT
- PASSIVE BEAM POINTING STABILIZATION
- EXCELLENT BEAM PROFILE
- COMPUTER CONTROL

APPLICATIONS

- MATERIAL PROCESSING
- INSTRUMENTATION
- SCIENTIFIC
- COMPANION PUMP LASER FOR ULTRAFAST TW SYSTEMS
- IDEAL PUMP FOR OPO AND DYE LASERS

High Energy Solid-State Pulsed Laser

Saga is the most efficient and compact flashlamp pumped solid-state laser on the market, producing up to 2.5 J per pulse @ 532 nm.

Its original optical cavity design based on an unstable resonator and a gaussian end cavity mirror enhances energy extraction. The beam exhibits a Super-Gaussian profile in the near field.

Saga is the limited footprint solution for matching high energy requirements and for pumping ultrafast TW lasers.

Saga operates at 1064, 532, 355 or 266 nm and offers various options to ease day-to-day operations such as :

- Easy optical set up alignment thanks to the diode laser pointing in the direction of the Saga output.
- Thermoregulated structure to offer outstanding beam-pointing stability and cut down harmonic generation warming-up time.
- Through RS232 interface, Saga supervision offers remote control of the laser emission, repetition rate and output energy variation, while ensuring safe and optimum operation.

THALES LASER

Output Specifications

Model	220/10	230/10	HP	330/10
Repetition rate (Hz)	10	10	10	10
Energy per pulse (mJ)				
at 1,064 nm	1,500	2,300	-	[3]
at 532 nm	800	1,250	1,600	2,500
at 355 nm	420	600	-	-
at 266 nm	150	170	-	-
Pulse to pulse energy stability (% rms)	1.2	1.2	1.2	1.2
Pulse duration (ns)	4 - 8	4 - 8	4 - 8	4 - 8
Time jitter rms (ns)	0.5	0.5	0.5	0.5
Spectral width (cm-1)	1	1	1	1
Beam diameter (mm)	9.0	12	14	18
Divergence (mrad)	0.5	0.5	0.5	0.5
Beam pointing stability (µrad)	± 50	± 50	± 50	± 50
Beam spatial profile				
Near field	Top Hat [1]	Top Hat [1]	Top Hat [1]	Top Hat [1]
Far field	Gaussian [2]	Gaussian [2]	Gaussian[2]	Gaussian [2]

(1) Fit to supergaussian order 10 > 90 % - (2) Fit to Gaussian > 95 % - (3) IR version available on request

Utilities

Power requirements	Voltage	208 VAC ± 5 %	230 VAC ± 5 %
	Current	25 A	20 A
	Frequency	60 Hz	50 Hz
Water requirements*	Flow	2,7 gal/mn	10 l/mn
	Static pressure	30 - 90 psi	2 - 6 bars
	Temperature	10 - 25°C	
Software	Windows 95, 98, 2000, NT, XP		

** Water to air cooling unit available on request*

Physical characteristics

Power supply	Size (H x W x L)	20.9 x 22 x 31.1 in	53 x 56 x 79 cm
Cooling Unit	Size (H x W x L)	19.1 x 8.3 x 30.3 in	48.5 x 21 x 77 cm

Dimensions are given in mm (in)

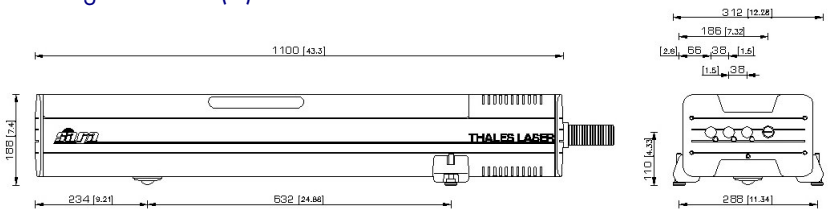

Due to Thales Laser continuous product improvement policy, specifications are subject to change without notice - Last Update: December 2007

FRANCE & EUROPE

THALES LASER
Route départementale 128
BP 46 - 91401 ORSAY CEDEX
FRANCE
Tél : +33 (0)1 69 33 06 94
Fax : +33 (0)1 69 33 02 71
www.thales-laser.com

JAPAN

THALES LASER KK
Sunrise Bldg, 2-16-4
Omori-kita, Ohta-ku, TOKYO
JAPAN 143-0016
Tel : +81 (0)3 5753 4541
Fax : +81 (0)3 5753 4554
www.thales-laser.com

USA

THALES Components Corporation Inc.
40G Commerce Way,
PO Box 540,
Totowa, New Jersey 07511-0540 USA
Tel : +1 (973) 812-9000
Fax : +1 (973) 812-9050
www.thales-laser.com

THALES LASER

Atlas+

FLASHLAMP-PUMPED GLASS SERIES



FEATURES
- 25 J ENERGY PER PULSE @ 527 NM
- 0.1Hz REPETITION RATE
- UNMATCHED BEAM PROFILE
- PULSE DURATION ~13NS (+/-3NS) or 2x 13NS (+/-3NS)
- 1 or 2 BEAMS
- SUPERVISION SOFTWARE
- INTEGRATED ISEO TIMING GENERATOR
- SINGLE BOX COMPACT DESIGN 1 X 2.5 M^2 FOOTPRINT

APPLICATIONS
- IDEAL PUMP FOR PETAWATT Ti:Sa LASERS
- LASER SHOT PEENING

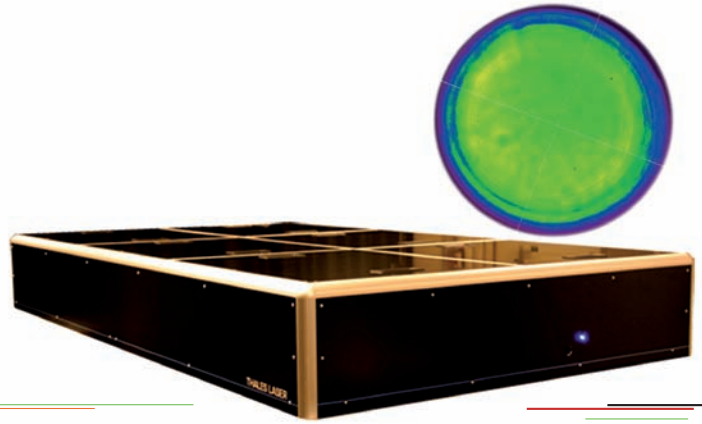

25J @ 0.1 Hz @ 527 nm
Top Hat smooth profile !

Atlas+ breaks through the beam profile issue of conventional glass phosphate lasers to stand out as the reference pump laser for the emergent PW Ti:Sa femtosecond lasers.

Indeed, Atlas+ concentrates the solutions to offer the best spatial beam profile: long pulse duration for a limited B-integral, birefringence compensation and top-hat beam profile multimode oscillator which also improves the energy extraction efficiency.

With only 2 oscillators and 4 amplifiers to reach 25 J @ 0.1 Hz in the green, Atlas+ is the most efficient and compact pump laser for PW systems.

This optimized number of amplifiers design has many advantages: besides being compact and extremely reliable, Atlas+ demonstrates very limited beam distortion and reduced maintenance.

Full supervision by software offers remote control of the laser emission, output energy.

ISEO technology is also accessible through the supervision software for synchronization and laser safety controls.

THALES

Output Specifications

	1 beam	2 beams
Wavelength (nm)	527	527
Repetition rate (Hz)	0.1	0.1
Energy per pulse (J)	25	2 x 12.5
Pulse duration (ns)	double pulse 13 ns ±3ns	single pulse 13 ns ±3ns
Pulse to pulse ernergy stability (% rms)	< 1.5	< 1.5
Polarization	Vertical	Vertical
Beam diameter (mm)	≤ 40	≤ 30 for 2 beams
Beam profile	Supergaussian (smooth profile)	Supergaussian (smooth profile)
Divergence (mrad)	< 2	< 2
Pointing stability (µrad)	< 100	< 100
Jitter (ns)	< ±1	< ±1

Utilities

Power requirements	Voltage	230 VAC ± 5%	208 VAC ± 5%
	Current	4 x 16 A plugs single phase	4 x 16 A plugs single phase
	Frequency	50 Hz	60 Hz
Water requirements	Flow	4 gal/min	15 l/min
	Static pressure	43.5 - 72 psi	3 - 5 barss
	Temperature	10 - 17 °C	
Software	Windows 95, 98, 2000, NT, XP		

Physical Characteristics

Power Supply (2 units)	Size (H x W x L)	64.6 x 22.0 x 30.7 in	164 x 56 x 78 cm
Cooling unit	Size (H x W x L)	14.6 x 17.5 x 28.7 in	37 x 44,5 x 73 cm

Dimensions are given in mm (in)

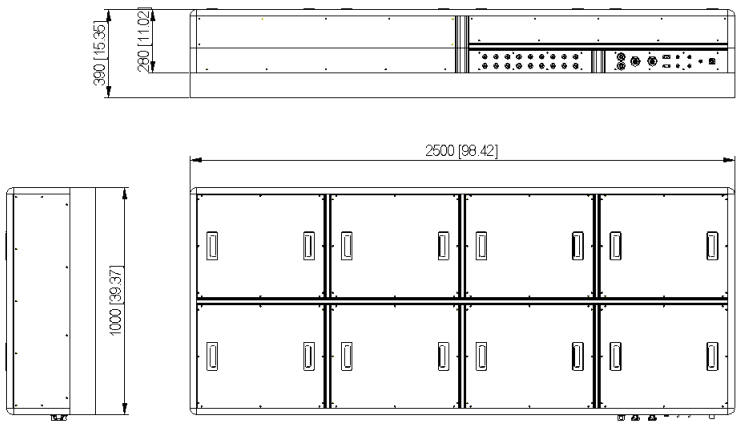

Specifications are subject to change without notice - Last Update: August 2009

FRANCE & EUROPE

THALES OPTRONIQUE S.A.
Unité Solutions Laser
2 avenue Gay-Lussac - CS 90502
78995 Elancourt Cedex - FRANCE
Tel : +33 (0)1 30 96 70 00
Fax : +33 (0)1 30 96 75 50
www.thales-laser.com

JAPAN

THALES LASER KK
Sunrise Bldg, 2-16-4
Omori-kita, Ohta-ku, TOKYO
JAPAN 143-0016
Tel : +81 (0)3 5753 4541
Fax : +81 (0)3 5753 4554
www.thales-laser.com

USA

THALES Components Corporation Inc.
40G Commerce Way,
PO Box 540,
Totowa, New Jersey 07511-0540 USA
Tel : +1 (973) 812-9000
Fax : +1 (973) 812-9050
www.thales-laser.com

THALES

NL310
SERIES

High Energy Nanosecond Q-switched Nd:YAG Lasers

FEATURES

- Up to **1.6 J** output energy
- **Excellent** pulse energy **stability**
- **10** or **20 Hz** repetition rate
- Thermo stabilized **harmonics generator** as standard option
- **Remote** control via keypad
- **PC control** via RS232 port and LabView™ drivers
- **Low jitter** internal/external synchronization
- **Robust** and **stable** laser head

High energy nanosecond pulses, excellent beam quality and 1% pulse energy stability makes these nanosecond q-switched Nd:YAG lasers an excellent choice for pumping dye, Ti:Sapphire lasers and OPOs. In addition, extremely low jitter of the optical pulse with respect to the sync pulse allows reliable synchronization of the laser with external equipment.

For customer convenience the NL310 series nanosecond Q-switched laser is controlled either through its RS232 type PC interface with LabView™ drivers (included) or through a user-friendly remote control pad. Both options allow easy control of laser settings.

Compact size enables the system to fit into tight spaces freeing the experiment area for other instruments. The power supply and cooling unit easily fits under optical tables. The optional second (SH) (for 532 nm), third (TH) (for 355 nm) and fourth (FH) (for 266 nm) harmonic generator modules are designed for easy insertion and removal.

Simple and proven design ensures easy maintenance and long-term stability of laser operation.

APPLICATIONS

- OPO, Ti:Sapphire, dye laser pumping
- Material processing
- Plasma studies
- Laser spectroscopy
- Remote sensing
- Your application is welcome...

EKSPLA

SPECIFICATIONS [1]

MODEL	NL311	NL313
Max. pulse energy:		
at 1064 nm	1300/1000 mJ [2]	1600 mJ
at 532 nm	600/440 mJ [2]	800 mJ
at 355 nm	350/290 mJ [2]	450 mJ
at 266 nm	130/90 mJ [2]	150 mJ
Pulse energy stability [3]	1.0 %	
Power drift [4]	3 %	
Pulse duration [5]	4–6 ns	
Max. repetition rate	10/20 Hz	10 Hz
Polarization at 1064 nm	linear, >85/80 % [2]	linear, >85 %
Optical pulse jitter [6]	0.5 ns	
Linewidth at 1064 nm	< 1 cm^{-1}	
Beam profile		
Near field	"Hat-Top"	
Far field	near Gaussian	
Beam diameter	10 mm	12 mm
Beam divergence [7]	< 0.5 mrad	
Beam pointing stability at 1064 nm	± 50 µrad	
Beam height	165–195 mm	
PHYSICAL CHARACTERISTICS		
Laser head size (W×H×L)	310×230×800 mm	
Powering/cooling cabinet size (W×H×L)	550×550×600 mm	
Umbilical length	2.5 m	
OPERATING REQUIREMENTS		
Water consumption (max 20 °C)	< 10 l/min	
Room temperature	15–30 °C	
Relative humidity (noncondensing)	20–80 %	
Mains voltage [8]	208 or 240 VAC, single phase 50/60 Hz	
Power consumption	< 3.5 kVA	

[1] All specifications subject to change without notice. The parameters marked typical are not specifications. They are indications of typical performance and will vary with each unit we manufacture. Unless stated otherwise all specifications are measured at 1064 nm.
[2] 20 Hz versions.
[3] Averaged from 300 shots, Std. Dev, after 5 minutes of warm-up.
[4] Within 8 hours after 20 minutes of warm-up.
[5] FWHM.
[6] In respect to Q-switch triggering pulse, Std. Dev.
[7] Full angle at $1/e^2$.
[8] 20 Hz version of NL311 requires 3 phase mains.

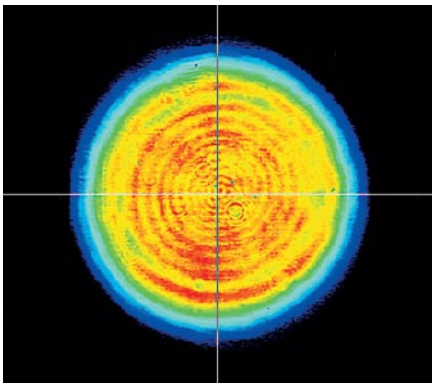

Near field

Typical beam profile
of the NL310 series lasers

RELATED PRODUCTS

NL300 SERIES Q-SWITCHED NANOSECOND Nd:YAG LASERS

- Up to 800 mJ pulse energy
- 10 or 20 Hz repetition rate
- Compact size

HIGH ENERGY CUSTOM SYSTEMS

- Pulse energy up to 160 J

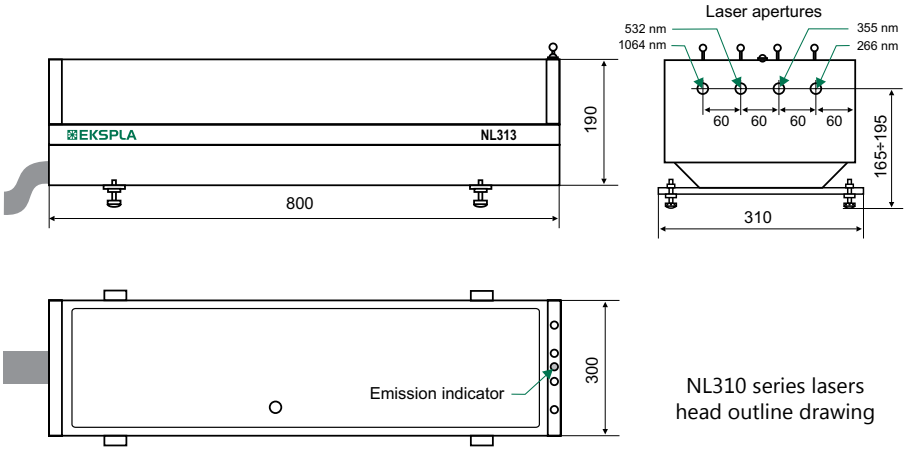

NL310 series lasers
head outline drawing

NL313-10-SH/TH/FH-AW

Model

Pulse repetition rate in Hz

Harmonics generator options:
SH – Second Harmonic
TH – Third Harmonic
FH – Fourth Harmonic
FiH – Fifth Harmonic

Other options:
AW – water-air heat exchanger option

Requests for custom made products are welcome !

EKSPLA

EKSPLA
Savanoriu av. 231
02300 Vilnius
LITHUANIA

Ph.: +370 5 2649629
Fax: +370 5 2641809
sales@ekspla.com
www.ekspla.com

Find local distributor at
www.ekspla.com

DANGER
VISIBLE AND/OR INVISIBLE LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO DIRECT
REFLECTED OR SCATTERED RADIATION
Nd:YAG 1064 nm, 532 nm, 266 nm
Max. 1.6 J, pulse 3–6 ns
CLASS IV LASER PRODUCT

ISO 9001
CERTIFIED

Gaïa-R

FLASHLAMP-PUMPED ND:YAG SERIES



FEATURES

- 14 J @ 532 NM (HP VERSION)
- 24 J @ 1064 NM (HP VERSION)
- UP TO 5 Hz REPETITION RATE
- UNMATCHED BEAM PROFILE
- PULSE DURATION 8 NS - 1 or 2 BEAMS
- SUPERVISION SOFTWARE
- INTEGRATED ISEO TIMING GENERATOR
- SINGLE BOX COMPACT DESIGN
  1 X 2.5 M^2 FOOTPRINT

APPLICATIONS

- IDEAL PUMP FOR HIGH REPETITION RATE PETAWATT Ti:Sa LASERS
- LASER SHOT PEENING



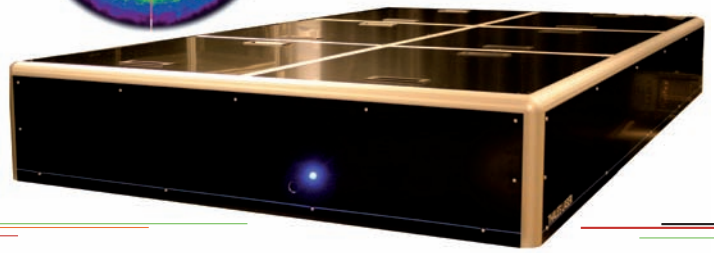

14J @ 1 Hz @ 532 nm
Top Hat smooth profile !

GAÏA-R is the new laser from THALES which pushes forward the limits of output energy reachable at high repetition rates. This Nd:YAG laser delivers indeed more than 24 J at 1064 nm and 14 J at 532 nm with repetition rate up to 5 Hz.

GAÏA-R combines the best characteristics for laser shot peening: short pulse duration and high energy to offer high intensity pulses, very low modulations to have an uniform stress and a high repetition rate for a faster process. As an option, an isolator can be implemented in the 1064 nm version in order to protect the oscillator from damage risks.

GAÏA-R was also specially designed for high energy Ti:Sa amplifiers pumping and offers a unique solution for high repetition rate Petawatt systems.

It demonstrates a top-hat beam profile with very low peak-to-valley spatial modulations, reproducible beam profile, a very limited beam distortion along propagation and a short pulse duration to avoid prelasing in the Ti:Sa amplifiers and to limit ASE.

GAÏA-R can also be used for other applications like high power LIDAR or large area ablation.

Full supervision by software offers remote control of the laser emission, output energy. ISEO technology is also accessible through the supervision software for synchronization and laser safety controls.

THALES

Output Specifications

	Gaïa-R			Gaïa-R HP	
Wavelength (nm)	1064	532	355	1064	532
Repetition rate (Hz)	1Hz / 5Hz	1Hz / 5Hz	1Hz	1Hz / 5Hz	1Hz / 5Hz
Energy per pulse (J) (1)	12J / 11J	7J / 6J	3J	24J / 22J	14J / 12J
Pulse duration (ns)	8-10	8	6	1 pulse @ 8-10ns 2 pulses of 8-10ns each with adjustable delay	2 pulses of 8-10ns each with adjustable delay (delay min ~12ns)
Pulse to pulse ernergy stability (% rms)	< 1.0	< 1.2	< 2.5	<0.7	< 0.9
Polarization	Horizontal	Vertical	Vertical	50% Vertical and 50% Horizontal	Vertical
Typical Beam diameter (mm)	23	23	23	23	23
Beam profile	Top Hat	Top Hat	Top Hat	Top Hat	Top Hat
Divergence Low M²/High M²	<150µrad / <3.5mrad	<150µrad / <3.5mrad	<150µrad / <3.5mrad	<150µrad / <3.5mrad	<150µrad / <3.5mrad
Peak to peak Pointing stability (µrad)	< 60	< 60	< 60	< 60	< 60
Jitter (ns)	< ±1	< ±1	< ±1	< ±1	< ±1

(1) Seeded option available on request

Physical Characteristics

Power Supply (2 units)	Size (H x W x L)	64.6 x 22.0 x 30.7 in	164 x 56 x 78 cm
Cooling unit	Size (H x W x L)	14.6 x 17.5 x 28.7 in	37 x 44,5 x 73 cm

Dimensions are given in mm (in)

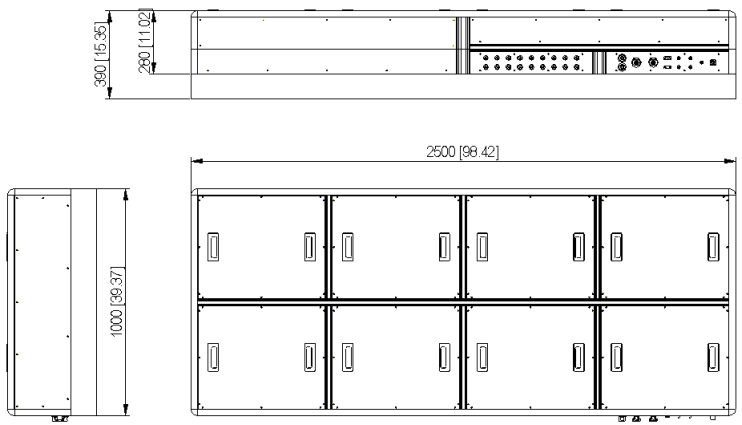

Utilities

Power requirements	Voltage	230 VAC ± 5%	208 VAC ± 5%
	Current	single phase	single phase
	Gaïa-R 1Hz	5 x 16A plugs	5 x 16A plugs
	Gaïa-R 5Hz	7 x 16A plugs	7 x 16A plugs
	Gaïa-R HP 1Hz	7 x 16A plugs	5 x 16A plugs
	Gaïa-R HP 5Hz	11 x 16A plugs	5 x 16A plugs
	Frequency	50 Hz	60 Hz
Water requirements	Flow	4 gal/min	15 l/min
	Static pressure	43.5 - 72 psi	3 - 5 bars
	Temperature	10 - 17 °C	
Software	Windows 95, 98, 2000, NT, XP		

Specifications are subject to change without notice - Last Update: August 2009

FRANCE & EUROPE

THALES OPTRONIQUE S.A.
Unité Solutions Laser
2 avenue Gay-Lussac - CS 90502
78995 Elancourt Cedex - FRANCE
Tel : +33 (0)1 30 96 70 00
Fax : +33 (0)1 30 96 75 50
www.thales-laser.com

JAPAN

THALES LASER KK
Sunrise Bldg, 2-16-4
Omori-kita, Ohta-ku, TOKYO
JAPAN 143-0016
Tel : +81 (0)3 5753 4541
Fax : +81 (0)3 5753 4554
www.thales-laser.com

USA

THALES Components Corporation Inc.
40G Commerce Way,
PO Box 540,
Totowa, New Jersey 07511-0540 USA
Tel : +1 (973) 812-9000
Fax : +1 (973) 812-9050
www.thales-laser.com

THALES

JK401SM and JK501SM

CW Nd:YAG lasers with Supermodulation ™

Better than just CW: SuperModulation enables deeper welds and cleaner cuts with high reliability, flexibility, and low process cost.

- Unique SuperModulation provides greater flexibility for a broader range of processing, enabling you to more easily optimize your production process
- SuperModulation increases the laser's maximum peak power to at least twice its normal average power rating
- Patented Luminator™ fiber-optic beam delivery system with built-in back reflection damage protection
- LaserView™ control technology allows complete process cycle programming with a single command
- Precise control of all parameters enabled by patented power supply technology
- Fully-integrated time and energy shares for faster switching

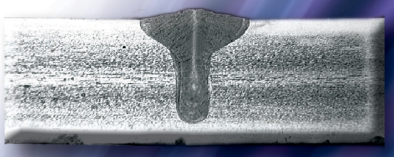

Without SuperModulation

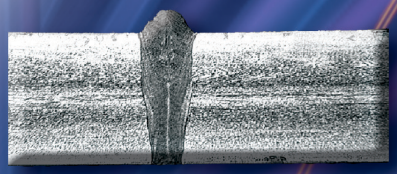

With SuperModulation

GSI JK™ Lasers ™

Deeper Welds and Cleaner Cuts

With the JK401SM and JK501SM, GSI Group introduces a new line of JK™ Lasers featuring our successful SuperModulation™ technique. With SuperModulation, some energy is stored in the laser's power supply during the laser's off-time or during a low average power cycle, and is delivered to the lasing medium during a later on-time or high average power cycle to produce a momentary 2X power output. This extra output provides processing capability not typically found in lasers with similar power ratings.

Laser Specifications

Model	JK401SM	JK501SM
Average Power (W)	400	500
Max. Modulated Peak Power (W)	800	1000
Number of Lamps	2	2
Beam Quality 1/2 Angle radium (mm. mrad)	16	24
Laser Response Time (ms)	1.5	
Modulation Frequency (Hz)	100 - 100	
Output Mode	CW, Sine or Square	

Fiber-Optic Beam Delivery

Fiber Core Diameter (µm)	400	600
Standard Spot Size (nominal) (mm)	0.16 - 0.60	0.30 - 0.90
Standard Fiber Lengths (m)	5, 10, 15, 30, 50	
Max. Fiber Length (m)	50	
Beam Delivery Options	Up to 4T or 3E or 2Tx2E combination	
Timeshare Switching Time (ms)	<50	
Focus Head Options	Straight or Right Angle	
Process Tool Options	CCTV viewing, welding nozzles, autofocus cutting modules	

Facility Requirements

Cooling Water Temperature and Flowrate	25 l/min @15°C, 5.3 US gal/min feed input
Max. Pressure Drop at 18°C	2.5 bar
Max. Inlet Pressure	7.5 bar
Cooling Capacity (kW)	19
Electrical Requirements	380 - 415V +/- 10% @ 50/60Hz
Supply Rating (kVA)	20
Max. Power Consumption (kW)	19
Ambient Temperature (°C)	5 - 40
Max. Humidity	95% RH @ 20°C, 50 RH @ 40°C
W x H x D (mm / inches)	1495 x 1216 x 770 / 58.8 x 47.9 x 30
Weight (kg)	444

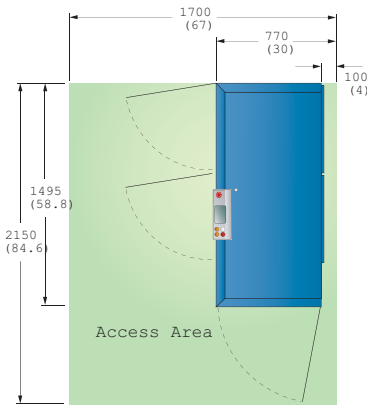



Dimensions in mm (inches)

Product Code Selection Guide

JK	125PS	1: 5	2: S	3: E	4: 3WES	5: D	6: P	7: A	8: 20	9: 15

1	Laser Power Frequency	5	50 Hz
		6	60 Hz
2	Laser Fiber Output Launch Type	S	Single fiber output
		T	Twin fiber output
		M	More than two fiber outputs
3	Language	E	English
		F	French
		G	German
		C	Chinese
4	Fiber Launch Options	2WTS	2 way time share
		3WTS	3 way time share
		4WTS	4 way time share
		2WES	2 way energy share
		3WES	3 way energy share
		4WES	4 way energy share
		2T1F	2 way time share between one 2 way energy share and one fiber
		2T2F	2 way time share between one 2 way energy share and 2 fibers
		2T2E	2 way time share between two 2 Way Energy Shares
5	Pointing Diode Option	D	Pointing Diode
6	Interface Options	P	PC interface
7	Interface Options	A	Advanced Interface
8	Cable	10	10 m interface cable
		20	20 m interface cable
		30	30 m interface cable
		50	50 m interface cable
		LV	LaserView SE
9	Luminator Fiber Selection	5	5m x 150µm
		10	10m x 150µm
		15	15m x 150µm

GSI JK™ Lasers

www.gsiglasers.com

Product Centre
GSI Group Laser Division
Cosford Lane
Swift Valley
Rugby CV21 1QN
United Kingdom

Tel: +44 (0) 1788 570 321
Fax: +44 (0) 1788 541 904
Email: sales.laserdivision@gsig.com

Americas
GSI Group
125 Middlesex Turnpike
Bedford
MA 01730-1409
USA

Tel: +1 248 937 1064
Fax: +1 248937 1581
Email: na.sales.laserdivision@gsig.com

China
GSI Precision Technologies (Suzhou)
Building 8 Gantian Industrial Square
Gantian Road South, Suzhou Industrial Park
Jiangsu, 215024
China

Tel: +86 512 6283 7080
Fax: +86 512 6283 7087
Email: cn.sales.laserdivision@gsig.com

LD pumped Nd: YAG LASER
SL188 series

To Customers

SL188 series has a very wide range of line-up. Adding standard model (SL188A/ SL188A2/ SL188AS/ SL188AS2) optimized for high average power, we can optimize them to variety of laser applications, like high beam quality model for and high pulse energy model etc...

Specification

LD pumped Nd: YAG laser
SL188A / SL188A2

Equipment type	SL188A	SL188A2
Laser crystal	Nd:YAG	
Laser wavelength	1.064μm	
Oscillator type	Continuous wave pumping and Q switching laser	
Output energy	>20mJ@10kHz	>20mJ@20kHz
Maximum average power	>200W@10kHz	>400W@20kHz
Cooling type Utility	Water-cooled 3phase200V 50 / 60Hz 30A	Water-cooled 3phase200V 50 / 60Hz 60A

LD pumped Nd: YAG SHG laser
SL188AS / SL188AS2

Equipment type	SL188AS	SL188AS2
Laser crystal	Nd:YAG	
Laser wavelength	0.532μm	
Oscillator type	Continuous wave pumping and Q switching laser	
Output energy	>10mJ@10kHz	>20mJ@10kHz

Maximum average power	>100W@10kHz	>200W@10kHz
Cooling type	Water-cooled	Water-cooled
Utility	3phase200V 50 / 60Hz 30A	3phase200V 50 / 60Hz 60A

New Series !!
LD pumped Nd: YAG THG laser
SL188AT

Equipment type	**SL188AT**	**SL188AT2 ***
Laser crystal	Nd:YAG	
Laser wavelength	0.355μm	
Oscillator type	Continuous wave pumping and Q switching laser	
Output energy	>6mJ@8kHz	>10mJ@10kHz
Maximum average power	>50W@8kHz	>100W@10kHz
Cooling type	Water-cooled	Water-cooled
Utility	3phase200V 50 / 60Hz 30A	3phase200V 50 / 60Hz 60A

* : In development.

▲ Top of this page

© Copyright OMRON LASERFRONT INC. 2007-2008. All Rights Reserved.

Product Information

- Laser Processing Systems
- Lineup by Application

Pulse IR YAG Laser

Continuous Wave IR YAG Laser
Q Switched IR YAG Laser

Q Switched Green YAG Laser
Q Switched UV YAG Laser

Q Switched IR YVO_4 Laser
Q Switched Green YVO_4 Laser
Q Switched UV YVO_4 Laser

Fiber Laser

- LCD Manufacturing Equipment
- Rechargeable Battery Inspection Equipment

Continuous Wave IR YAG Laser / Q Switched IR YAG Laser

KLY-C300a

Continuous output type "KLY-C300a" achieves 15% or more electricity-optical conversion efficiency under the condition of beam quality where transmission to optical fiber with core diameter 300μmf is possible by the optimization of YAG crystal configuration corresponding to LD pumping and development of high steady high-luminance and highly stable oscillator.

KLY-Q200a

Q-switched pulse type "KLY-Q200a" succeeds in obtaining 30nsec Q-switched pulse at the shortest by enhancing the efficiency as well as development of the super-highspeed gain switch control system of AO-Q switch elements that generate Q-switched pulse. The average output class of "KLY-Q200a" makes it possible to gain 200kW Q-switched pulse at the maximum.

KLY-SQ350a

"LD pumping technology" and "Q-switched control technology" that we cultivated thorough the development of KLY-series were gathered for the development of KLY-SQ350a laser osccillator boasting of domestic top level average output and peak output in LD pumping high output Q-switched type IR lasers. In addition, new technology was adopted, as a result, we succeeded in the development of KLY-SQ350a. Both quality of beam and high output are achieved. High performance was achieved in all aspects such as "average output: 300W" and "Maximum peak output:250kW", "M2<15". In addition, due to LD pumping, high output as well as small size are also realized. The design is system consturciton friendly, therefore, for laser osccilator and power source, either separated type or integrated type can be selected in order to correpond to all applications.

Applications

Deep Engraving Marking、High-Speed Cutting、Large Area Removal Processing

Processed Example

Aluminum Deep Engraving Processing

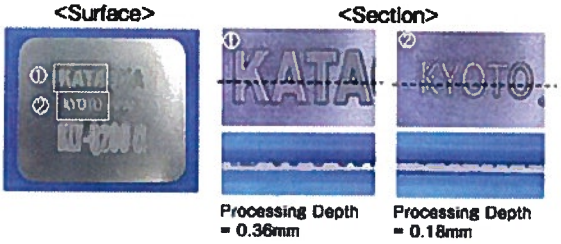

Oscillator Model : KLY-Q200 α
Processing Details : Deep Engraving
Material : A5000 Series
Processing Optics : Galvano Scanner

SUS Doughnut-Shape Peripheral Welding

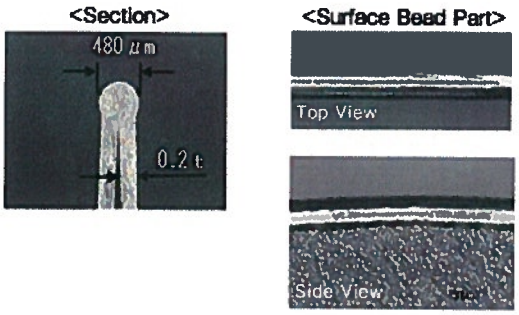

Oscillator Model : KL Y-C300 α
Processing Details : Overlapping Outer Welding
Material : SUS304
Sheet Thickness : 0.2t
Processing Nozzle : KLP-HF80/C-T

Basic Specifications

Item	Details		
Model	KLY-C300α	KLY-Q200α	KLY-SQ350α
Wavelength	1064nm		
Pumping Source	808nm Semiconductor Laser (LD)		
Active Medium	Nd:YAG Crystal		
Configuration	Integrated Oscillator and Power Operating Voltage Part Type (Chiller Unit separate) SI Type/GI Type Type Fiber	Integrated Oscillator and Power Operating Voltage Part Type (Chiller Unit separate) Direct Ray Optics	Separate Oscillator and Power Operating Voltage Part Type Or Integrated Type (Chiller Unit separate)
Maximum Average Output Power	300W	200W@20kHz	300W10kHz
Maximum Peak Output Power	-	200kW@5kHz	250kW@10kHz
Maximum Frequency	CW,1Hz～500Hz	100Hz～50kHz	5kHz～15kHz
Pulse Width	-	<300nsec@10kHz	<150nsec@10kHz
Output Power Stability	Less than 2%rms (Cooling water stability: ±1℃.)		
Operating Voltage	AC220V±0%、50／60Hｚ±1Hz		

Input power Consumption	3.5kVA	6kVA
Weight	170kg	175kg
External Dimensions W×H×Dmm3	398×940×1060mm3 (Not including protrusions)	456×940×1064mm3 (Not including protrusions)

page top

Copyright c KATAOKA CORP. All rights reserved.

Product Information

- Laser Processing Systems
- Lineup by Application

Pulse IR YAG Laser

Continuous Wave IR YAG Laser
Q Switched IR YAG Laser

Q Switched Green YAG Laser
Q Switched UV YAG Laser

Q Switched IR YVO_4 Laser
Q Switched Green YVO_4 Laser
Q Switched UV YVO_4 Laser

Fiber Laser

- LCD Manufacturing Equipment
- Rechargeable Battery Inspection Equipment

Product Information

Q Switched Green YAG Laser / Q Switched UV YAG Laser

Beam quality improvement and increase in life of excitation light source were endeavored by adopting semiconductor laser for the excitation light source instead of conventional lamp. Moreover, adoption of a highly durable optical wavelength conversion device and a wavelength conversion module with a highly accurate temperature control function were developed.

KLY-QG10α/QG30α/KLY-QG70α

Domestically largest output "QG30α/QG70α" installed acousto-optic method switch element that generates the short pulse of least 50nsec width, and enabled the oscillation of a high peak and the short pulse.

KLY-QV5α/QV10α

High output type "QV10α" installed Acousto-optic method switch element that generates the short pulse of the least 20nsec width, as a result, the oscillation of a high peak and the short pulse became possible.Although the output is over 10W, the life of elements which is two times as long as conventional elements and stablization of the conversion efficiency were achieved.

Applications

Ultrafine scribing, cutting, and drilling of difficult processing materials such as metal, semiconductors, and ceramic

Processed Examples

Processed Examples:2 Processed Examples:3 Processed Examples:4

Minute Hole Processing

<IN Side>



<OUT Side>



Oscillator Model : KLY-QV10α
Processing Details : Minute Hole Processing (Straight)
Material : Alumina Ceramics
Sheet Thickness : 0.4t
Processing Time : 6 sec/Hole
Processing Related Unit : Beam Rotator

Hole Processing (Alumina Ceramics)

<φ100μm>



(10sec/Hole)

<φ300μm>

(50sec/Hole)

<φ500μm>

(100sec/Hole)

Oscillator Model : KLY-QV10α
Processing Details : Hole Processing (Straight)
Material : Alumina Ceramics
Sheet Thickness : 0.4t
Processing Related Unit : Beam Rotator

Alumina Scribing

<Surface>



<Cross-section>



<Torn Section>



Oscillator Model : KLY-QG30α
Processing Details : Scribing
Material : Alumina Ceramics
Sheet Thickness : 0.18t, 0.64t
Processing Speed : 50mm/sec
Processing Nozzle : Direct 33mm

Hole Processing (Alumina Ceramics)

Process No.1 Depth = 350μm Entry Diameter = 13μm

Process No.2 Depth = 270μm Entry Diameter = 9μm

Oscillator Model : KLY-QV10α
Processing Details : Drilling
Material : Diamond
Sheet Thickness : 0.5t
Processing Related Unit : Direct
Processing Time : 1sec/Hole

Basic Specifications

Item	Details				
Model	KLY-QG10α	KLY-QG30α	KLY-QG70α	KLY-QV5α	KLY-QV10α
Wavelength	532nm			355nm	
Pumping Source	808nm Semiconductor Laser (LD)				
Active Medium	Nd:YAG Crystal				
Configuration	Separate Oscillator and Power Supply Part Type(Chiller Unit separate) Direct Ray Optics				
Maximum Average Output Power	10W@10kHz	30W@10kHz	70W@10kHz	5W@10kHz	10W@10kHz

Maximum Peak Output Power	10kW@ 10kHz	30kW@ 10kHz	40kW@ 10kHz	5kW@ 10kHz	12kW@ 10kHz
Beam Quality(M2)	<4	<8	<20	<1.5	<2
Frequency	1kHz～50kHz				
Pulse Width	<100nsec@10kHz		<200nsec@10kHz	<50nsec@10kHz	
Output Power Stability	Less than 2%rms (Cooling water stability: ±1℃)				
Polarization	Circular Polarization or Linear Polarization				
Operating Voltage	AC220V±10%、50／60H z ±1Hz				
Input power Consumption	1.0kVA	2.0kVA	4.0kVA	2.0kVA	
Weight	Laser Head : Approximately 40kg Operating Voltage : Approximately 90kg		Laser Head : Approximately 50kg Operating Voltage : Approximately 100kg	Laser Head : Approximately 40kg Operating Voltage : Approximately 90kg	
External Dimensions W×H×Dmm3	Laser Head/358×182×660mm3 Operating Voltage/572×951×668mm3		Laser Head/408×175×770mm3 Operating Voltage/572×951×668mm3		

page top

Copyright c KATAOKA CORP. All rights reserved.

SpitLight
Scientific Lasers

SpitLight High Power

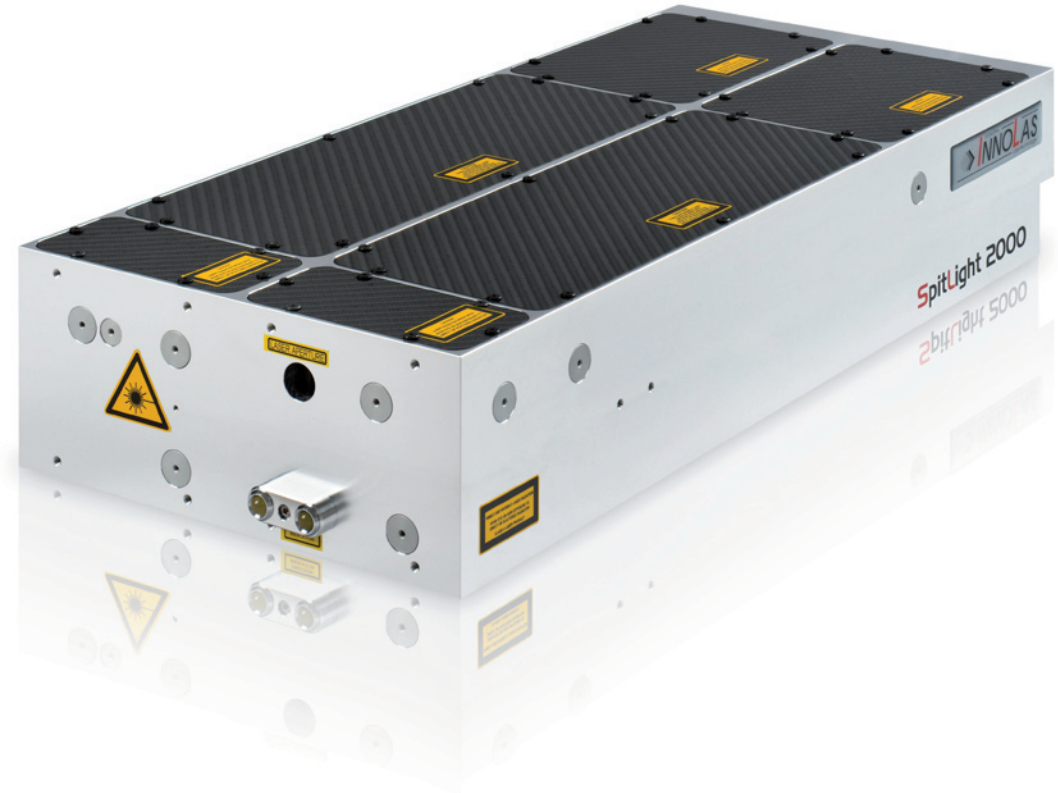

Features

- Compact laser head and power supply with small footprint
- Robust and stable resonator structure
- Quick and easy change of flashlamps
- Maintenance-free pumping chamber with ceramic reflector
- Excellent beam quality and pointing stability
- Long flashlamp lifetime
- Double pulse option available
- System can be injection seeded (SLM-Option)

SpitLight
Scientific Lasers

SpitLight High Power

Model		SpitLight 1200	SpitLight 1500	SpitLight 2000
Laser Parameters	Repetition Rate	Product available from 1 to 100 Hz (Following specifications are for **10 Hz)**		
Energy	Pulse Energy at 1,064 nm	> 1,250 mJ	> 1,500 mJ	> 2,000 mJ
	Pulse Energy at 532 nm	> 600 mJ	> 700 mJ	> 1,000 mJ
	Pulse Energy at 355 nm	> 320 mJ	> 420 mJ	> 540 mJ
	Pulse Energy at 266 nm	> 100 mJ	> 130 mJ	> 130 mJ
	Pulse Energy at 213 nm	> 18 mJ	> 23 mJ	> 40 mJ
	Energy Stability at 1,064 nm (RMS)	< 0.8 %	< 1.0 %	< 1.0 %
	Energy Stability at 532 nm (RMS)	< 1.3 %	< 1.5 %	< 1.5 %
	Energy Stability at 355 nm (RMS)	< 2.0 %	< 2.2 %	< 2.2 %
Beam Parameters	Pulse Width at 1,064 nm	6-7 ns	6-7 ns	6-8 ns
	Divergence	< 0.5 mrad	< 0.5 mrad	< 0.5 mrad
	Pointing Stability	< ± 50 µrad	< ± 50 µrad	< ± 50 µrad
	Beam Diameter	8 mm	8 mm	10 mm
	Temporal Jitter	< ± 1 ns	< ± 1 ns	< ± 1 ns
Operating Parameters	Lamp Life Time	> 20,000,000 shots	> 20,000,000 shots	> 20,000,000 shots
	Electrical Supply	230 VAC, 50 Hz, 2.5 Kw	230 VAC, 50 Hz, 2.5 Kw	380 VAC, 50 Hz, 5.0 Kw
	Cooling Water	8 l/min, 2-6 bar, < 15 °C	8 l/min, 2-6 bar, < 15 °C	8 l/min, 2-6 bar, < 15 °C
Weights	Laser Head	30 kg	30 kg	30 kg
	Power Supply	50 kg	50 kg	50 kg
Dimensions	Laser Head (in infrared) (L x W x H)	665 x 294 x 125 mm	665 x 294 x 125 mm	665 x 294 x 125 mm
	Power Supply (L x W x H)	560 x 400 x 425 mm	560 x 400 x 425 mm	560 x 400 x 425 mm

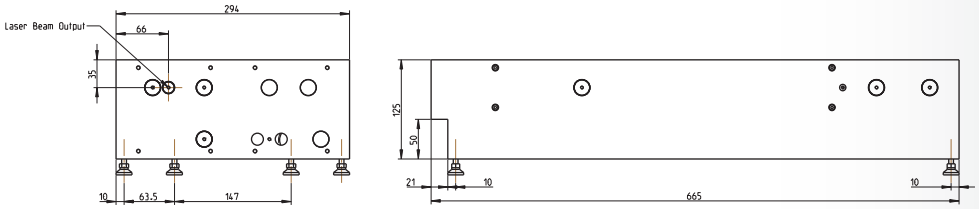

InnoLas follows a policy of continuous product improvement. All specifications are subject to change without notice. All specifications at 1,064 nm unless otherwise noted.

InnoLas Laser GmbH is DIN EN ISO 9001 certified.

VISIBLE AND INVISIBLE LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO DIRECT OR SCATTERED RADIATION
CLASS 4 LASER PRODUCT
DIN EN 60825-1:2003-10

InnoLas Laser GmbH | Justus-von-Liebig-Ring 8 | 82152 Krailling | Germany
Phone: +49 (89) 899 360 - 0 | Fax: +49 (89) 899 360 - 16
E-mail: info@innolas-laser.com | Homepage: www.innolas-laser.com

© InnoLas Laser GmbH 2010

Amplitude TECHNOLOGIES

Pro-Pulse

High Energy Nd:YAG Laser

Amplitude Technologies is very well known for developing high energy femtosecond laser chains and high repetition rate ones.

Compact design. We design and build our own pump laser at 532 nm dedicated to high energy Terra-watts lasers. This laser is called Pro-Pulse. It comprises two parts: the laser head and the electronic cabinet. All optical components are included in the laser head. The electronic cabinet is composed of the power supply and the cooling unit. Pro-Pulse and Pro-Pulse+ have also built-in safety interlocks to protect users as well as the laser system itself. This laser can be totally controlled by computer (by RS232 and CAN Bus control).



Excellence in quality. These lasers have excellent performances at 532 nm. We can provide a 1.2 J pulse energy (Pro-Pulse) and a 2 J pulse energy (Pro-Pulse+) at a repetition rate of 10 Hz. We also offer repetition rates going from 1 Hz to 20 Hz. The profile of this laser is top-hat which provides a uniform Ti:Sa pumping.

Pro-Pulse key features >

- Pulse energy: ***up to 2 J*** *(@ 532 nm)*
  up to 4 J *(@ 1064 nm)*
- Repetition rate: ***10 Hz***
- High beam quality: ***Top-hat***
- ***User friendly operation***
- ***Small footprint***

Pro-Pulse applications >

- Pump laser for ultrafast Ti:Sa lasers
- OPO pumping

www.amplitude-technologies.com

AMPLITUDE TECHNOLOGIES
2 - 4 rue du Bois Chaland - CE 2926
91029 EVRY - France
Tel. +33 (0)1 69 11 27 90
Fax +33 (0)1 64 97 58 17

Pro-Pulse High Energy Nd:YAG Laser

Pro-Pulse performances

	Pro-Pulse	Pro-Pulse+
Repetition rate	10 Hz	10 Hz
Energy @ 532 nm	1.2 J	2 J
Energy @ 1064 nm	2.2 J	4 J
Flashlamp lifetime	25-30 million shots	25-30 million shots
Polarisation @ 532 nm	Vertical (S polarisation)	Vertical (S polarisation)
Pulse duration @ 532 nm	6.8 ns	6.8 ns
Divergence	< 0.3 mrad	< 0.3 mrad
Warm up time	about 20 mn	about 20 mn
Shot to shot stability	< 1%	< 1%
RMS stability @ 532 nm	< 1.2%	< 1.2%

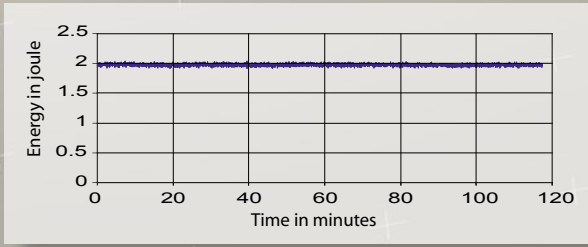

2J beam profile

Pro-Pulse mechanical set-up

200 TW main amplifier

Electronic cabinet >

- power supply and cooling unit

> Pro-Pulse

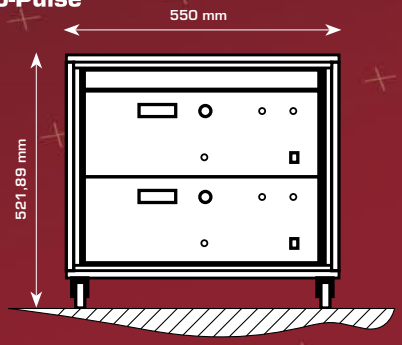

> Pro-Pulse+

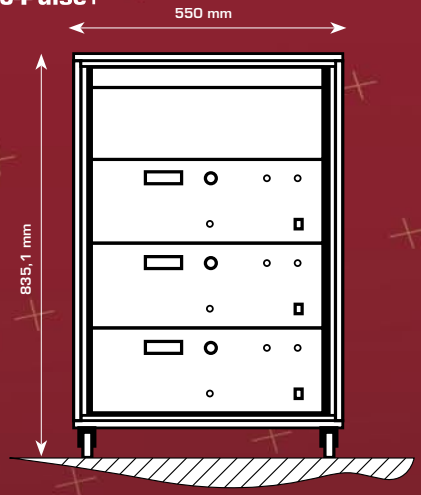

Pro-Pulse

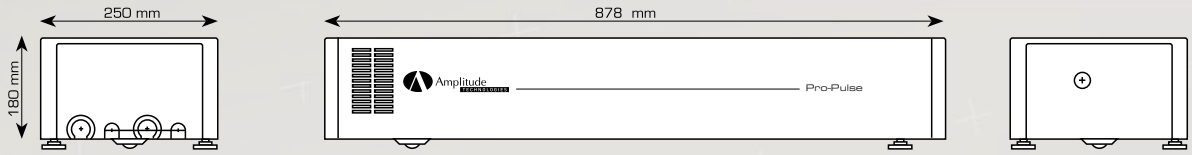

Pro-Pulse+

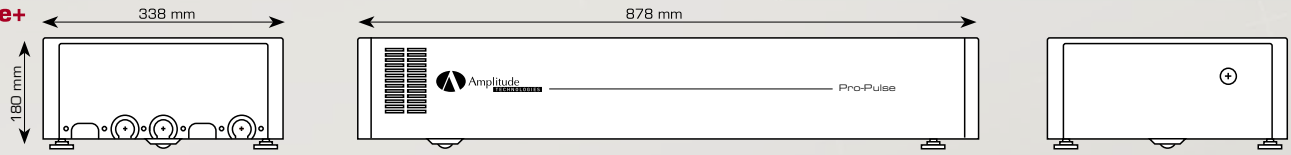

AMPLITUDE TECHNOLOGIES

2-4 rue du Bois Chaland, CE 2926 - 91029 EVRY - FRANCE
Tel. +33 (0)1 69 11 27 90 - Fax +33 (0)1 64 97 58 17

Amplitude TECHNOLOGIES

www.amplitude-technologies.com

Specifications subject to change without notice - Réalisation : www.quadrige.fr - Crédit photos : Amplitude Technologies

NT340
SERIES

Tunable Wavelength Lasers

NT340 series tunable laser seamlessly integrates in a compact housing the nanosecond optical parametric oscillator and Nd:YAG Q-switched laser.

The system features high conversion efficiency, hands-free wavelength tuning from UV to IR, easy maintenance and separate output for pump laser beam.

The laser is controlled from the remote keypad or from PC through RS232 interface using LabView drivers that are supplied with the system. The remote pad features a backlit display that is easy to read even while wearing laser safety glasses.

Narrow band models features less than 5 cm^{-1} linewidth that is ideal for many spectroscopic applications.

System is designed for easy and cost-effective maintenance. Replacement of flashlamps can be done without misalignment of the laser cavity and deterioration of the laser performance. OPO pump energy monitoring system helps to increase lifetime of the optical components.

NT340 SERIES AVAILABLE MODELS

- Broad bandwidth models based on type 1 BBO OPO.
- Narrow bandwidth models based on type 2 BBO OPO. Narrow bandwidth model can be configured with SH or/and SF tuning range extension for 193-419 nm output.

To configure laser for any application, broad selection of optional items are available:

- Tuning range extension in UV range (210-419 nm);
- Tuning range extension in 300-400 nm range with high pulse energy;
- Tuning range extension in DUV range (193-210 nm);
- Fiber coupled output in 350-680 nm range;
- Pulse energy attenuator;
- Separate Nd:YAG laser harmonics output ports (1064, 532, 355 and 266 nm wavelengths) from build-in harmonics generator;
- Water-air cooled power suply.

FEATURES

- Hands-free no gap wavelength tuning from **400** to **2600 nm**
- No gap tuning from **210** to **2600 nm** with optional UV extension
- Up to **40 mJ** pulse energy in visible spectral range
- Up to **4 mJ** pulse energy in UV spectral range
- Optional sum-frequency generator extension for improved output in **300-400 nm** spectral range
- Less than **5 cm^{-1}** linewidth
- **3–5 ns** pulse duration
- **10** or **20 Hz** repetition rate
- **Remote** control pad
- PC control via RS232 and **LabView™** drivers
- Separate output port **355 nm** beam. Outputs for **1064** and **532 nm** are optional
- OPO pump energy monitoring
- Replacement of flashlamps can be done without misalignment of the laser cavity

APPLICATIONS

- Laser-induced fluorescence
- Flash Photolysis
- Photobiology
- Remote sensing
- Time-resolved spectroscopy
- Non-linear spectroscopy
- Other laser spectroscopy applications

EKSPLA

SPECIFICATIONS [1]

MODEL	NT341A	NT341B	NT342A	NT342B
OPO				
Wavelength range [2]				
Signal	420–680 nm	420–680 nm	420–709 nm [3]	420–709 nm [3]
Idler	740–2300 nm	740–2300 nm	710–2300 nm [3]	710–2300 nm [3]
SH generator (optional)	—	—	210-419 nm	210-419 nm
SH/SF generator (optional)	—	—	225-419 nm	225-419 nm
DUV generator (optional)	—	—	—	193–210 nm
Output pulse energy				
OPO [4]	20 mJ	40 mJ	15 mJ	30 mJ
SH generator (optional) [5]	—	—	2 mJ	4 mJ
SH/SF generator (optional) [6]	—	—	3 mJ	6 mJ
DUV generator (optional) [7]	—	—	—	0.2 mJ
Linewidth [8]	10–350 cm^{-1}	10–350 cm^{-1}	< 5 cm^{-1}	< 5 cm^{-1}
Scanning step				
Signal (420-709 nm)	0.1 nm			
Idler (710-2300 nm)	1 nm			
SH range (210-419 nm)	—	—	0.05 nm	0.05 nm
Pulse duration [9]	3-5 ns			
Typical beam diameter [10]	4 mm	5 mm	4 mm	5 mm
Typical beam divergence [11]	< 6 mrad		< 2 mrad	
Polarization				
Signal beam	horizontal			
Idler beam	horizontal		vertical	
SH/SF beam	—	—	vertical	
PUMP LASER [12]				
Pump wavelength	355 nm			
Max pump pulse energy	70 mJ	135 mJ	70 mJ	135 mJ
Pulse duration	4–6 ns			
Beam quality	"Hat-top" in near field, without hot spots			
Beam divergence	< 0.5 mrad			
Pulse energy stability (StDev)	< 3.5 %			
Pulse repetition rate	10 or 20 Hz			
PHYSICAL CHARACTERISTICS				
Unit size (W×H×L) [13]	446×260×820 mm			
Power supply size (W×H×L)	330×670×520 mm			
Umbilical length, m	2.5 m			
OPERATING REQUIREMENTS				
Water consumption (max 20 °C) [14]	10 l/min			
Room temperature	15–30 °C			
Relative humidity (noncondensing)	20–80 %			
Mains voltage	208 or 240 VAC, single phase 50/60 Hz			
Power consumption	2.5 kVA			

1) All specifications are subject to change without notice. The parameters marked typical are not specifications. They are indications of typical performance and will vary with each unit we manufacture. Unless stated otherwise all specifications are measured at 450 nm.

2) Hands-free tuning range 210-2300 nm.

3) Tuning range extension to 400-2600 nm is optional.

4) Measured at 450 nm. See tuning curves for typical outputs at other wavelengths.

5) Measured at 260 nm. See tuning curves for typical outputs at other wavelengths.

6) Measured at 340 nm. SF generator is optimized for maximum output in 300-400 nm range. See tuning curves for typical outputs at other wavelengths.

7) Measured at 200 nm.

8) Linewidth is <8 cm^{-1} for 210-419 nm range.

9) FWHM measured with photodiode featuring 500 ps rise time and 300 MHz bandwidth oscilloscope.

10) Beam diameter is measured @ 450 nm at the $1/e^2$ point and can vary depending on the pump pulse energy.

11) Full angle measured at the $1/e^2$ point@ 450 nm.

12) Separate output port for the 355 nm beam is standard. Outputs for 1064 nm and 532 nm beams are optional. Laser output will be optimised for OPO operation and specification may vary with each unit we manufacture.

13) Version with DUV generator has dimensions of 446×260×1020 mm (W×H×L).

14) Air cooled power supply is optional.

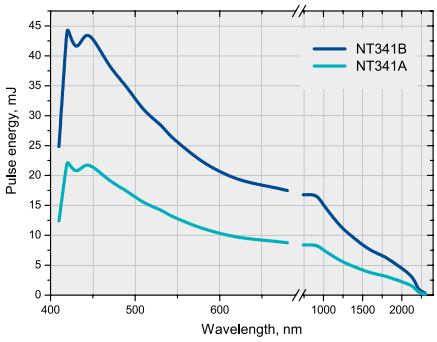

Fig 1. Typical output energy of the NT341 series tunable wavelength systems

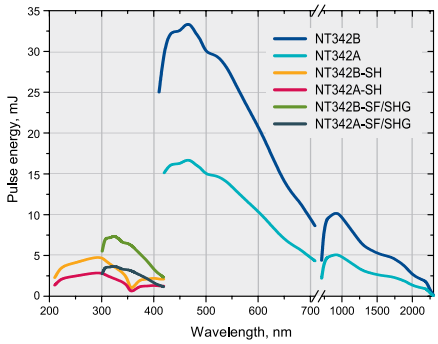

Fig 2. Typical output energy of the NT342 series tunable wavelength systems

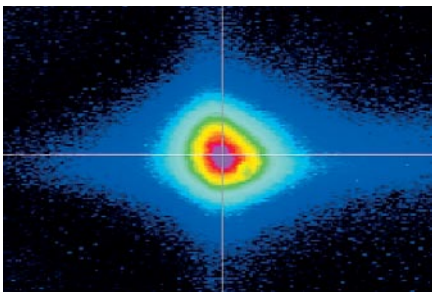

Fig 3. Typical far field beam profile of NT342 laser

EKSPLA

EKSPLA
Savanoriu av. 231
02300 Vilnius
LITHUANIA

Ph.: +370 5 2649629
Fax: +370 5 2641809
sales@ekspla.com
www.ekspla.com

Find local distributor at
www.ekspla.com

DANGER
VISIBLE AND/OR INVISIBLE LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO DIRECT
REFLECTED OR SCATTERED RADIATION
210–2300 nm, tunable
Max. 135 mJ, pulse 4–6 ns
CLASS IV LASER PRODUCT

ISO 9001
CERTIFIED

Revision number – 110110

FINE ADJUSTMENT
a product of
ERÜ Kunststofftechnik GmbH
Dahlienstraße 21
D-42477 Radevormwald
Telefon: +49(0)2195-9111-15 / 18
Telefax: +49(0)2195-9111-34
E-Mail: info@fine-adjustment.com
Internet: www.fine-adjustment.com

Pulsare Pulsare-S

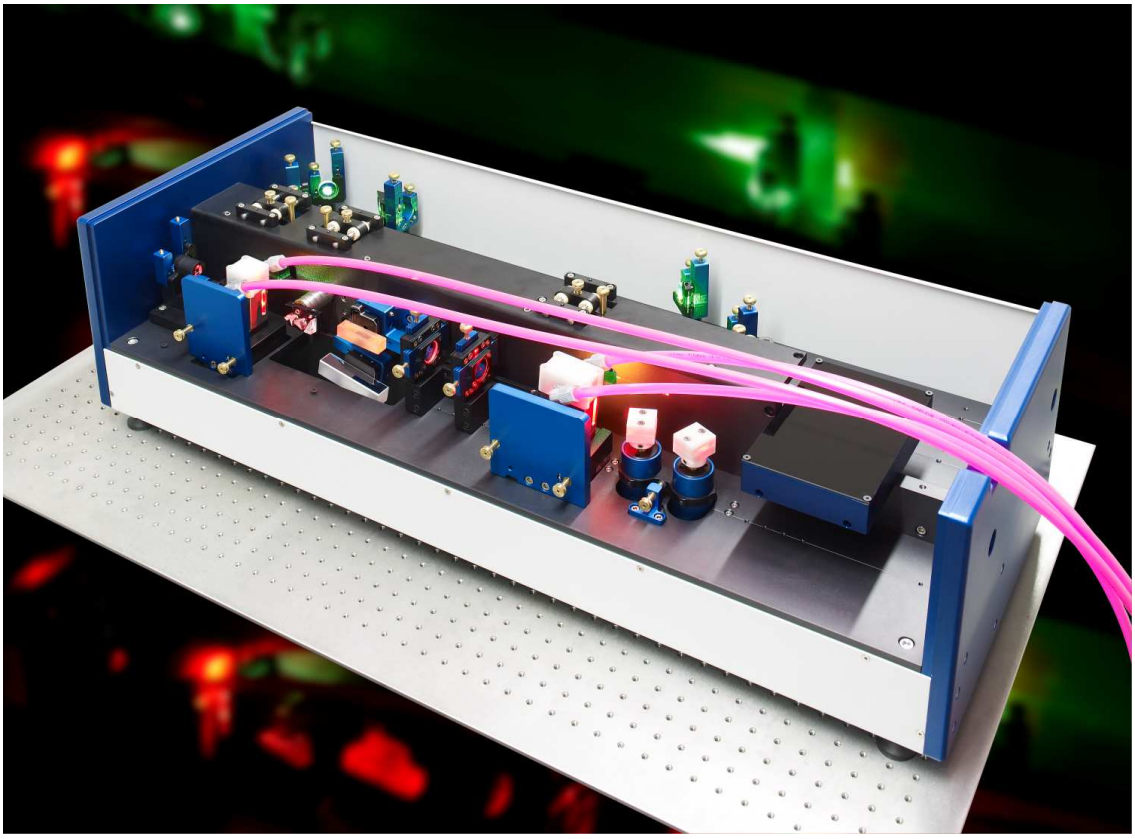

a new generation of pulsed dye laser

- high-quality ball-bearing for angular and linear adjustments of the cuvette holder
- eroded stainless-steel case for oscillator and amplifier cuvettes
- cuvettes and Bethune cells are made exclusively with Herasil or Suprasil
- uncritical amplifier coupling through paraxially mounted prisms and increased pump beam interval
- parallel displacement of oscillator beam
- double coated optics for 355 nm & 532 nm
- mirror retainers with 0.15 mm fine-tuning screws and protected **Helix2** lubrication for long-term operation
- high-stability mirror holders operable with linear transfer of movement from the top
- self-locking cylinder lens adjustment
- simultaneous control and movement of step motors with high repeat accuracy
- state-of-the art integrated electronics and user-friendly LabView software
- intelligent PI control for FCU autotracking unit
- temperature stabilized crystals
- internal / external triggering, TTL output for “position ready”
- USB port

Optical Layout

Pulsare / Pulsare-S

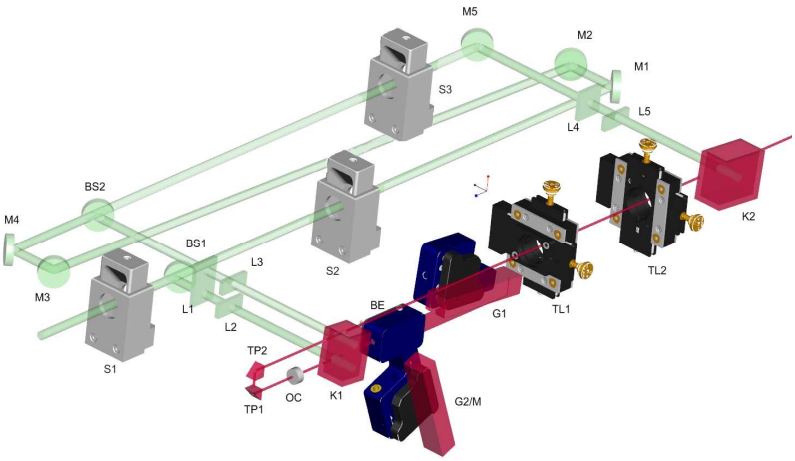

M1-M5:	HR-mirror 355nm & 532 nm	OC:	output coupler
BS1-2:	beam splitter 355nm & 532 nm	TP2/2:	90°turning prism
L1, L4:	expanding lenses	TL1, TL2:	telescope lenses
L2, L3, L5:	focusing lenses	K1:	oscillator and pre-amplifier dye cell
BE:	beam expander	K2/B:	main amplifier dye cell
G1:	gracing incidence grating	S1-S3:	beam shutter
G2/M:	Littrow grating / tuning mirror		

dye circulator with 40 mm cell

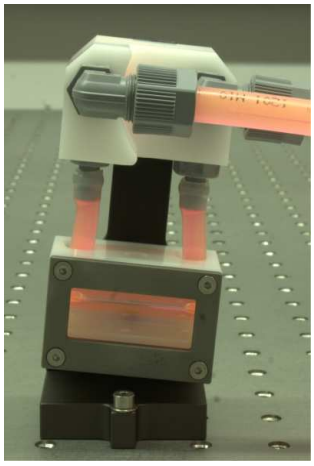

Ø 4 mm Bethune cell
for improved beam profile

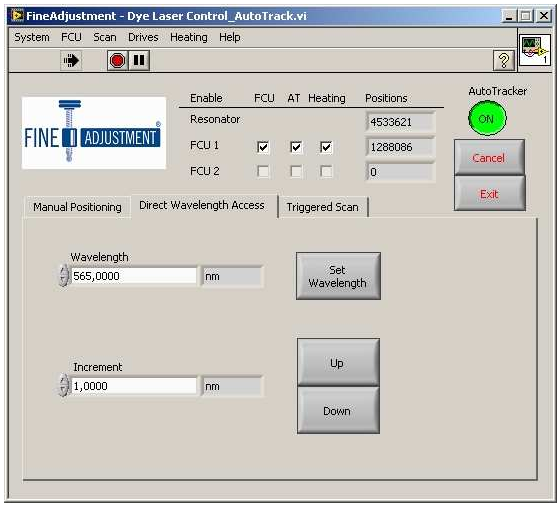

user-friendly LabView software

Options

frequency conversion units

- internal open loop frequency doubling – look-up-table
- internal open loop frequency tripling and mixing – look-up-table[1]
- autotracking[2] FCU usable for second-harmonic generation (SHG), third-harmonic generation (THG)[1], sum- and difference frequency mixing (SFM, DFM)[1]
  intelligent PI-control corrects phase matching deviation of
  the look-up-table algorithm during wavelength scans and temperature changes
- high scan speed, up to 10 nm/min
- usable for repetition rates from < 1 Hz up to 10 kHz

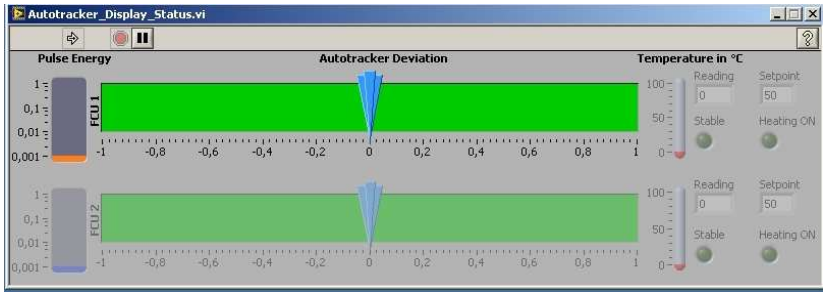

- temperature control for doubling crystal
  internal BBO temperature control can be set up to 100℃

dye	UV/IR wavelength	pump energy	dye laser	output energy
SHG 206 nm – 450 nm				
Coumarin 120	220 nm	280 mJ @ 355 nm	Pulsare Excellent	> 5 mJ
Coumarin 307	250 nm	280 mJ @ 355 nm	Pulsare Excellent	> 5 mJ
Rhodamine 6G	280 nm	400 mJ @ 532 nm	Pulsare Excellent	> 25 mJ
DCM	320 nm	400 mJ @ 532 nm	Pulsare Excellent	> 25 mJ
THG[1] 197 nm – 212 nm				
Rhodamine B	200 nm	400 mJ @ 532 nm	Pulsare Excellent	2 mJ
Rhodamine 101	205 nm	400 mJ @ 532 nm	Pulsare Excellent	4 mJ
DCM	210 nm	400 mJ @ 532 nm	Pulsare Excellent	4 mJ
DFM[1,3] 1.4 µm – 5.0 µm				
DCM	1.6 µm	400 mJ @ 532 nm	Pulsare Excellent	5 mJ
Pyridine1	2.0 µm	400 mJ @ 532 nm	Pulsare Excellent	5 mJ
Styryl 9	3.4 µm	400 mJ @ 532 nm	Pulsare Excellent	800 µJ
LDS 867	4.7 µm	400 mJ @ 532 nm	Pulsare Excellent	100 µJ

[1] THG, SFM and DFM operation requires a Pulsare-S with DTMS extension
[2] wavelength separation is required for autotracking operation
[3] for narrowband operation a seeder for the Nd:YAG pump laser is recommend

FINE ADJUSTMENT
a product of
ERÜ Kunststofftechnik GmbH
Dahlienstraße 21
D-42477 Radevormwald
Telefon: +49(0)2195-9111-15 / 18
Telefax: +49(0)2195-9111-34
E-Mail: info@fine-adjustment.com
Internet: www.fine-adjustment.com

Linewidth Specifications — Pulsare / Pulsare-S

	grating	tuning range	linewidth
Pulsare	1800 l/mm, 60 mm	400 nm – 900 nm	< 0.1 cm^{-1} @ 620 nm
Pulsare	2400 l/mm, 60 mm	350 nm – 740 nm	< 0.08 cm^{-1} @ 570 nm
Pulsare Pro	1800 l/mm, 90 mm	400 nm – 900 nm	< 0.06 cm^{-1} @ 620 nm
Pulsare Pro	2400 l/mm, 90 mm	350 nm – 740 nm	< 0.06 cm^{-1} @ 570 nm
Pulsare Pro	3000 l/mm, 90 mm	350 nm – 610 nm	< 0.05 cm^{-1} @ 560 nm
Pulsare Excellent	double 1800 l/mm, 90 mm	400 nm – 900 nm	< 0.05 cm^{-1} @ 620 nm
Pulsare Excellent	double 2400 l/mm, 90 mm	350 nm – 710 nm	< 0.04 cm^{-1} @ 570 nm
Pulsare Excellent	double 3000 l/mm, 90 mm	350 nm – 580 nm	< 0.03 cm^{-1} @ 570 nm

Beam Specifications — Pulsare / Pulsare-S

conversion efficiency: Nd:YAG pumped 355 nm	20% @ 405 nm 14% @ 460 nm	Exalite 404 Coumarin 47
conversion efficiency: Nd:YAG pumped 532 nm	25% @ 630 nm 28% @ 565 nm	DCM Rhodamine 6G
wavelength reproducibility	< 0.005 nm	
absolute accuracy	< 0.01 nm	
scan linearity	< 0.002 nm	
wavelength stability	< 0.001 nm/℃	
divergence	0.5 mrad	
polarisation	> 98 %	vertical
ASE-background	< 0.5 %	

Dimensions — Pulsare / Pulsare-S

Pulsare	1060 mm x 400 mm x 300 mm ± 10 mm, 70 kg
Pulsare-S	760 mm x 400 mm x 300 mm ± 10 mm, 50 kg
DTMS	750 mm x 400 mm x 300 mm ± 10 mm, 30 kg
beam input height	180 mm ± 10 mm
beam output height	200 mm ± 10 mm

Requirements — Pulsare / Pulsare-S

pump laser pulse power	10 mJ … 1000 mJ, s-pol
voltage	110 V 6A / 220 V 3 A, 50/60 Hz, single phase
computer	Windows, one free USB port

specifications are subject to change without notice

TDL+

User-friendly Tunable Dye Laser

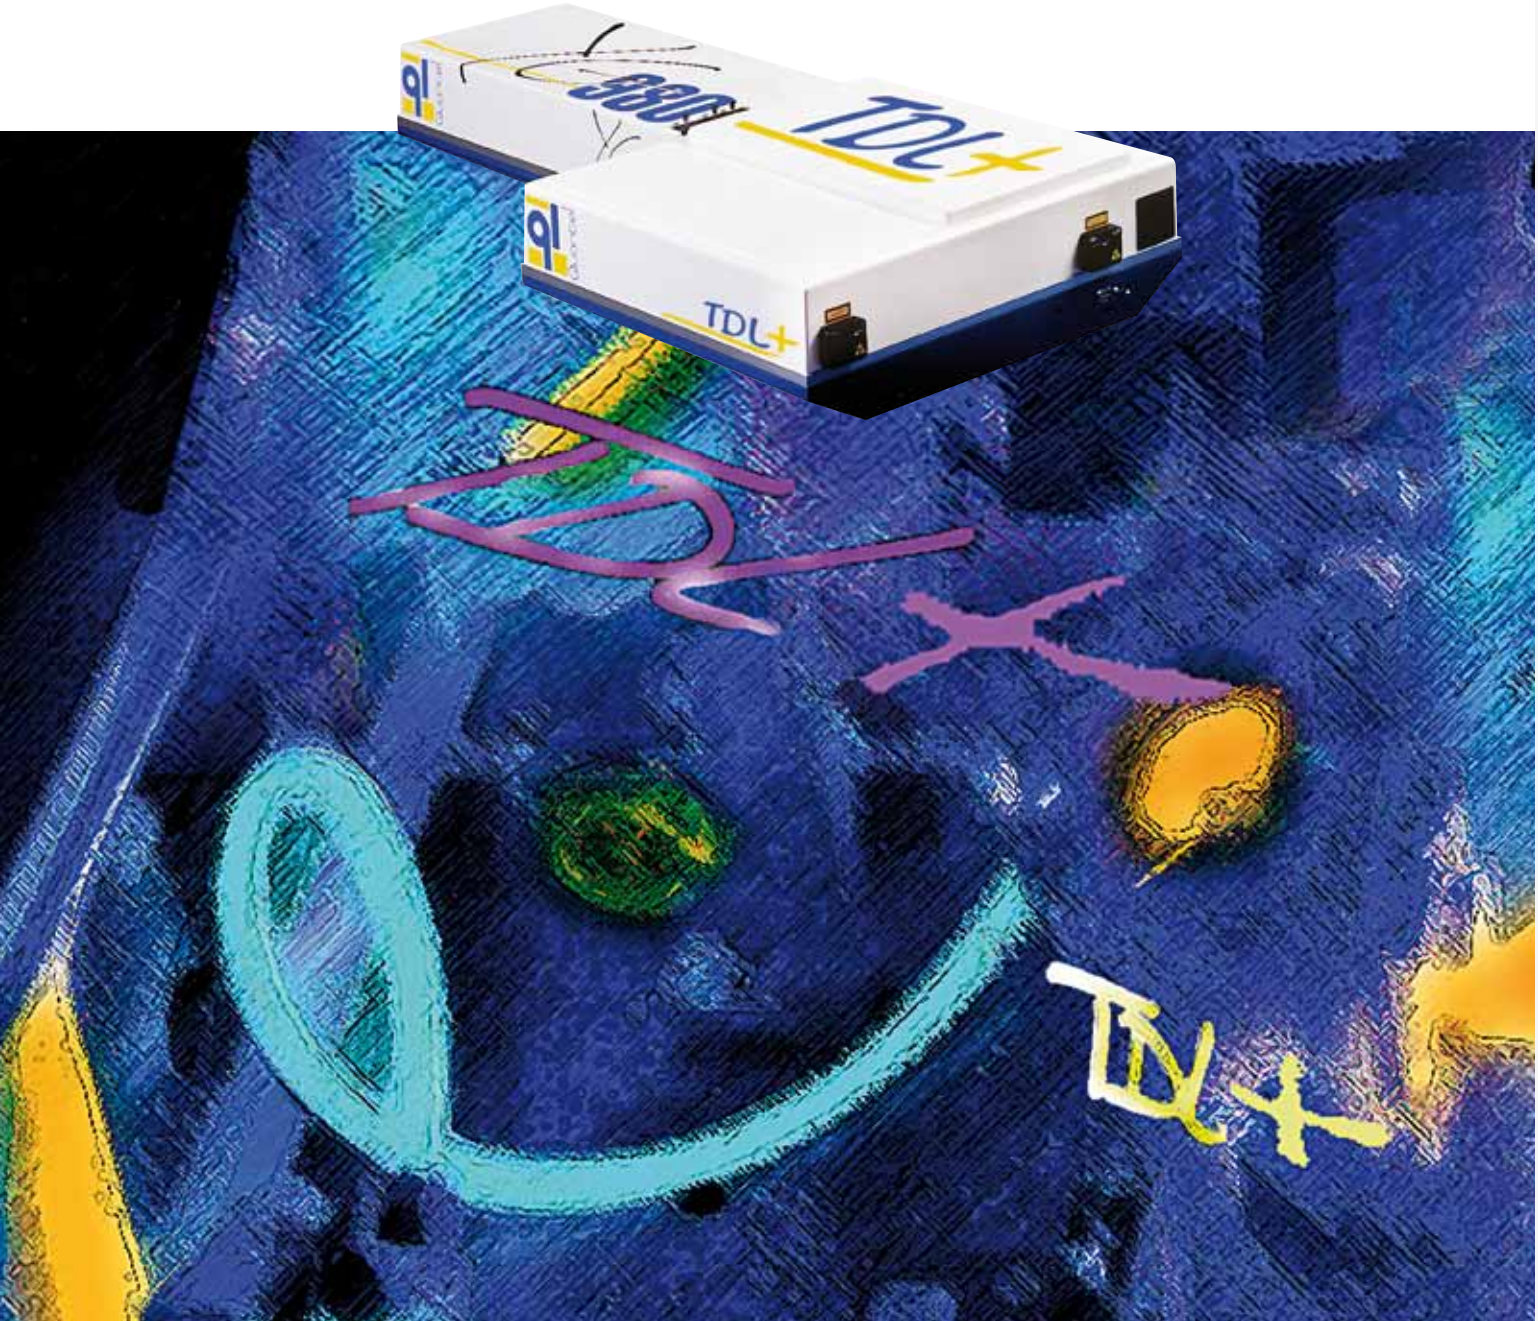

TDL+ ADVANTAGES

Wide tunability:

Two gratings allow for coverage of the 200- 4500nm range without realignment of the cavity. Unique dual grating option enables configuration without direct handling of the grating assemblies.

Spectral access - UV and IR generations:

Nonlinear crystals provide options for motorized or automatic phase-matching and beam compensation.

Excellent passive and active stability:

Passive stability is achieved through integrated design on option benches - Active stability is achieved by closed loop temperature control of both the oscillator spectral cavity and nonlinear crystals.

Easy dye exchange:

Dye exchange without removing dye cells prevents misalignment.

Quantel support and service:

Quantel's long history in design and manufacture of TDL tunable solutions means your productivity is backed by industry experts in installation, integration, support, and field service.

Simplicity and user safety:

- Automatic recognition of the frequency conversion crystals in IR and UV.
- Phase-matching tracking easy to use
- Dedicated software controls both pumping and dye lasers.
- Optimization and dye exchange in user operation configuration without opening the housing.

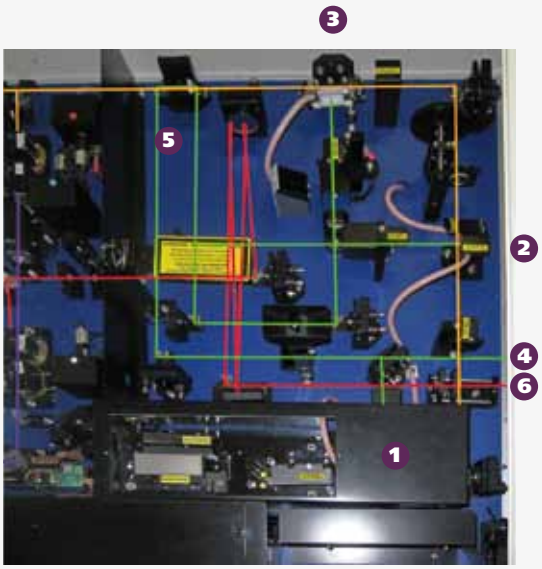

1. Oscillator
2. Pre amplifier
3. Amplifier
4. Pumping beam
5. Fundamental beam
6. 1064nm beam for UV mixing

TDL+ remote module

Courtesy : CLUPS (Orsay – France)

Crystals and IR/UV options accessories

TDL+: PERFORMANCE, RELIABILITY, FLEXIBILITY AND USER-FRIENDLY PULSED, TUNABLE DYE LASER SOLUTION

Tunable YAG/DYE system:

Compact, with new options, the TDL+ provides all the advantages of a tunable dye laser system. High optical efficiency, narrow spectral bandwidth, large tunability range, extremely low amplified spontaneous emission: TDL+ is the perfect tool for any application such as spectroscopy, Laser Induced Fluorescence, LIDAR, CARS, LIBS, ablation, and many more. Quantel Brilliant or YG980 lasers are mechanically and optically optimized to pump TDL+ for excellent overall stability.
The TDL+ can be purchased with a variety of Quantel pump lasers or qualified with an existing pump laser.

The TDL+ is the latest development in Quantel's long history in tunable dye lasers, with a continued focus on performances, safety, and ease of use.

Wide tunability: 200nm to 4,5µm

Wavelength tuning is achieved with a mirror rotating in front of a grazing incidence grating. The use of a 2400l/mm grating provides tunability from 420nm to 750nm, particularly adapted to UV conversion (200nm to 420nm) through non linear crystals. An 1800 l/mm grating covers the 500-900nm range providing IR tunability from 1200nm to 4500nm by frequency subtraction. A typical laser dye supports lasing over 40nm in the fundamental wavelength.

Low ASE oscillator, temperature stabilized:

The spectral quality of Quantel systems is the result of its patented oscillator configuration. Its geometry creates an angle between the parasitic emission axis (ASE: Amplified Spontaneous Emission) and the axis of propagation of the beam. This prevents ASE from being amplified. The output ASE is reduced to the lowest level possible (<0,2% in the center of the peak of Rh 590 dye).

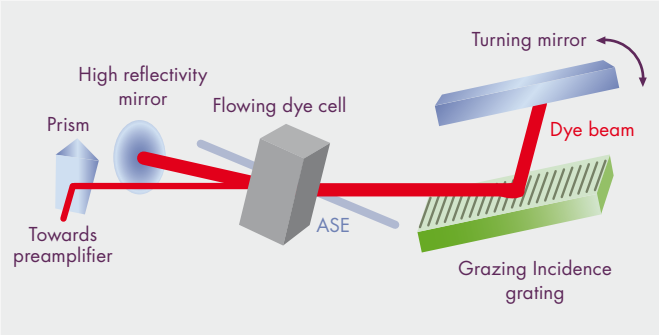

TDL+ oscillator

In standard, all mechanical and optical components of the oscillator are temperature stabilized, which leads to a high quality long term spectral stability for the system (0,05cm^{-1}/5°C/hour). This thermal regulation is particularly adapted for experiments in highly unstable temperature environments (e.g. combustion).

Narrow bandwidth

The TDL+ platform can be configured with a number of linewidth options suitable for a full range of spectroscopic applications from broadband zero-order output for multiplex CARS, moderate linewidth for survey spectroscopic scanning, and, with the Narrow Bandwidth Package, linewidth performance of <0,05cm^{-1}. The NBP package consists of 4 prisms, mounted in a convenient modular assembly, that expand the beam size in the oscillator cavity and enhance the selectivity of the grating.



Spectral measurement @560nm with HighFinesse wavemeter

Amplification and optimized beam quality:

Amplification results from the passage of the laser beam through 2 amplifier stages, both optimized for high gain and low ASE.

The saturation of the gain insures a perfect circular output beam profile and excellent spatial uniformity. These beam characteristics allow for high nonlinear frequency conversion efficiencies. Both amplifier cells are fed by independent dye circuits in order to optimize concentration for each stage.

Modularity and flexibility:

All optical components are treated with non reflective coatings @532nm and @355nm allowing change in the pump wavelength without realignment.

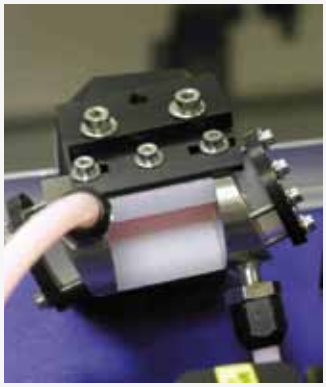

Capillary cell for excellent circular output beam profile

The 2 wavelengths' axes of propagation are collinear for any Quantel Nd: YAG pumping laser. Depending on the output energy required, TDL+ can be pumped with Quantel Brilliant or YG980 systems. Quantel lasers are designed for adaptability and stability, making this combination ideal. The TDL+ can be pumped by other pulsed Nd:YAG laser, although specifications are dependant on the pumping beam quality.

Simple and quick dye exchange without any realignment:

In order to prevent any unlikely misalignment or pollution of the optical components during the dye exchange process, the TDL+ uses an external dye flowing system.

Every pump/tank assembly is connected to the system by use of quick connectors: one is dedicated to the oscillator and preamplifier and the other one to the amplifier. The design allows for efficient rinsing of the flowing circuit.

Ultraviolet and Infrared: extension of the tunability range

To generate UV or IR wavelengths, a system of nonlinear crystals configured for doubling, tripling, mixing or subtracting frequencies is used.

Performances, user safety and simplicity are all design priorities, so all optimizations of energy output within UV and IR range are carried out with the housing closed.

The generation of UV typically requires a 2400l/mm grating and generation of IR is generally more efficient with an 1800l/mm grating.

EWT option: unique combination of 2 gratings

With the EWT option (Enhanced Wavelength Tunability), the TDL+ provides the fundamental range of wavelengths from 420nm to 900nm without realignment or manipulation of gratings. Two 1800l/mm and 2400l/mm gratings are set in the oscillator side-by-side.

An assembly of mirrors allows the user to switch from the 420-750nm range (2400l/mm) to the 500-900nm range (1800l/mm) and to combine UV and IR experiments easily.

Double grating

Ultraviolet generation

The UV range (200-420nm) is obtained by using nonlinear crystals; a first stage provides doubling, a second provides mixing after frequency doubling and tripling, depending on the chosen crystals.

The wavelength ranges in conjunction with the type of nonlinear crystal used (KDP/BBO) have been optimized in regard to conversion efficiency, simplicity and lifetime of the dye. Each stage includes positioning mounts, beam steering compensators, delay line and nonlinear crystal. The mechanical mounts allow for precise and quick crystal exchange. Crystals are thermally regulated within a sealed oven, providing excellent power stability. Phase matching occurs through angle tuning, and the compensator is automatically rotated to preserve the propagation axis.

Temperature stabilized crystal

This option is integrated on the TDL+ bench to obtain better mechanical stability and compactness.
A Pellin-Broca prism installed after the UV output allows for wavelength separation. To compensate the deviation generated by the wavelength shift, the prism is mounted on a motorized assembly.

UVT option: automatic phase-matching

To optimize wavelength tuning, the phase matching of the nonlinear crystals is computer-controlled.

The controlling system uses two methods which can be combined, using a lookup table and/or real time closed-loop control.

These two methods provide a quick scan of the wavelengths and an optimization of the conversion efficiency for any level of output energy.

Automatic recognition of the type of crystal installed allows for look up of its settings and positioning quickly.

The furnished software gives access to different parameters: user mode (look-up tables, closed-loop and combination of both), type, temperature and position of the recognized crystal.

The compensation of the angle generated during the scanning of UV wavelength is automatic: the position of the Pellin-Broca prism is directly associated to the output wavelengths.

UV option: motorized phase-matching

For a defined UV wavelength, Quantel also provides a more simple system than the UVT.
Phase matching of the nonlinear crystals is still motorized, but the commands of the motor and the positioning of the crystal are controlled by the user through a dedicated module installed under the TDL+ bench; this option does not require a computer.
To compensate the deviation of the UV beam, the user can optimize the orientation of the Pellin-Broca prism.

UV SOC option: UV drift compensation and residual beams dumping

UV SOC option (Separated Output Compensator) corrects both the angular deviation and the translation of the beam axis during the wavelength scanning.
4 Pellin-Broca prisms are installed on an additional bench attached to the main TDL+ bench. The distance between these 4 prisms allows for dumping of the residual beams.

Infrared generation:

The IR extension principle relies on frequency subtraction between the fundamental wavelength of the dye and the residual 1064nm wavelength of the pumping laser. This option is installed on a separated bench attached to the TDL+. An 1800l/mm grating is typically used in the oscillator.

IR option: motorized phase-matching

Four crystals (KTP/KTA) are used to generate the wavelength range from 1,2µm to 4,5µm. They are installed in a sealed oven and temperature stabilized. Using a KTA type crystal allows operation around 2800nm which is the spectral range of water vapour absorption. The output energy slightly decreases in the area of this absorption peak. The angle phase-matching of the crystals is computer-controlled just as for the UVT option. The software can use the memorized lookup tables or close-loop control.

IR SOC option: IR drift compensation and residual beams dumping

To compensate for the deviation of the IR beams during a wavelength scanning, high IR reflectivity motorized coated mirrors are used. The residual wavelengths are dumped.

Versatility of the control software

In addition to the adaptability and stability of the assembly, software is provided to control the entire system, pumping laser and dye laser. Users have access to all parameters of the different lasers: frequency, wavelength, type of crystals, temperature and user mode (auto, table, auto/table), etc.

Control software

Quantel

Manufacturing facilities

Quantel USA

Quantel
2 bis, avenue du Pacifique - ZA de Courtaboeuf - B.P.23
91941 Les Ulis Cedex - France
Ph: + 33 (0)1 69 29 17 00 - Fax : + 33 (0)1 69 29 17 29

Quantel-USA
601 Haggerty Lane
Bozeman, MT 59715 - 2001 - USA
Ph: + 1 406 586 0131
Ph: 877-QUANTEL
Fax: + 1 406 586 2924

quantel@quantel.fr - www.quantel-laser.com

Quantel reserves the right to change specifications without prior notice. Printed on PEFC™ certified paper (Programme for the endorsement of Forest Certification schemes) 05/10

Radiant Dyes Laser Accessories GmbH

Dye Laser

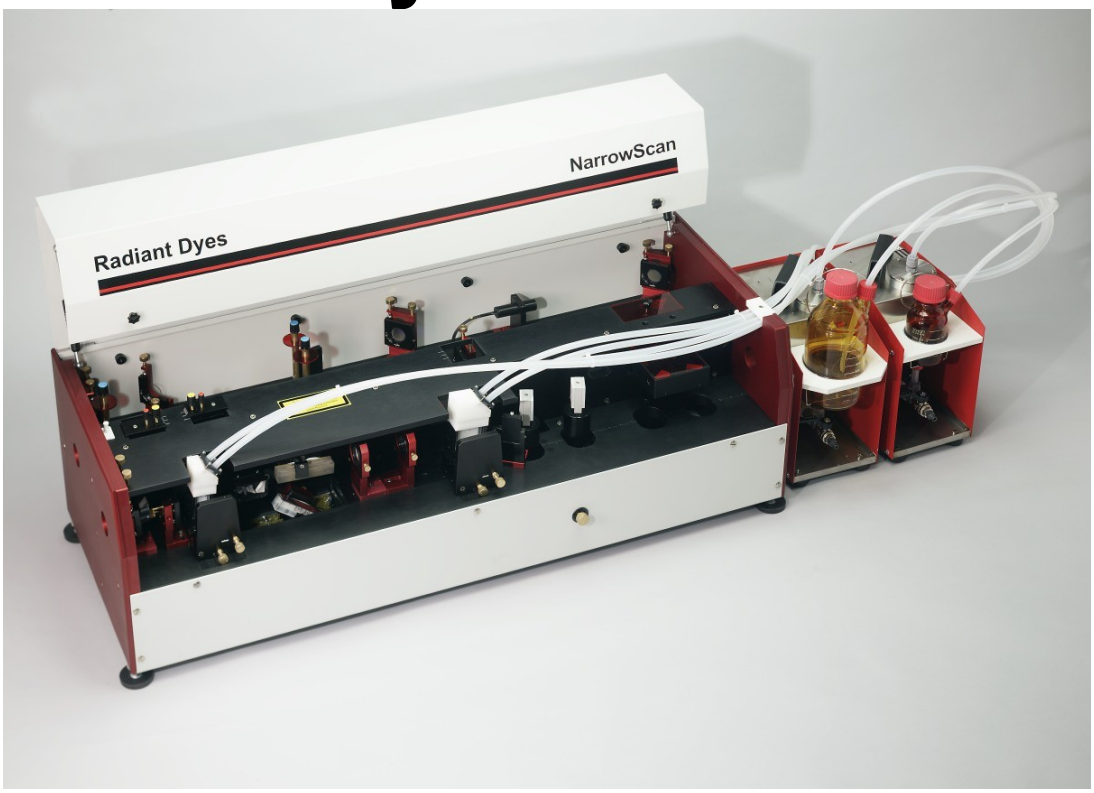

New NarrowScan

New Resonator Design
4 analog / 4 digital inputs
Autotracking Frequency doubling, tripling and mixing
Wavelength Separation Unit
Frequency Stabilization
Temperature Stabilization
Wavelength Calibration
Online Bandwidth Control
Bethune Cell (up to 1 Joule pump energy)
Optional: Integrated Nd:YAG Laser

Radiant Dyes Laser Acc. GmbH, Friedrichstr. 58, Germany-42929 Wermelskirchen
☎ ++49 (0)2196-81061 + 92685, Fax ++49 (0)2196-3422
http://www.radiant-dyes.com / E-mail: info@radiant-dyes.com

NarrowScan

The NarrowScan pulsed dye laser series is based on a new resonator-design with a very narrow linewidth (<0.04 cm^{-1}) that has been optimized in design and specifications by laser experts over many years and can now be used with pump laser pulses as short as 4 ns. The laser has very rigid and massive middle and side plates, ensuring a very high stability in the oscillator and pre-amplifier. The dimensions of the laser housing are much smaller than before, making the laser as compact as possible, while still allowing space for two frequency conversion units inside the laser.

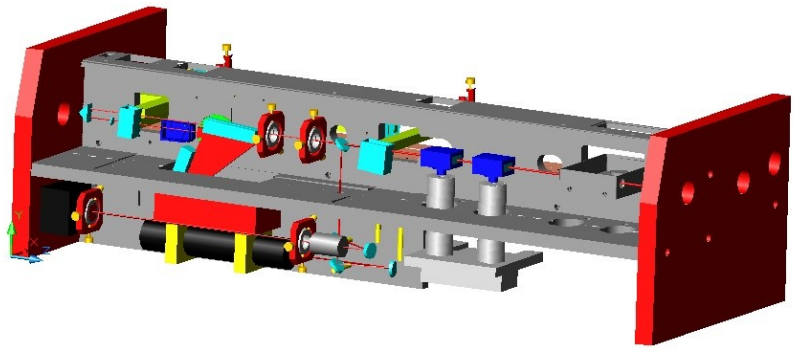

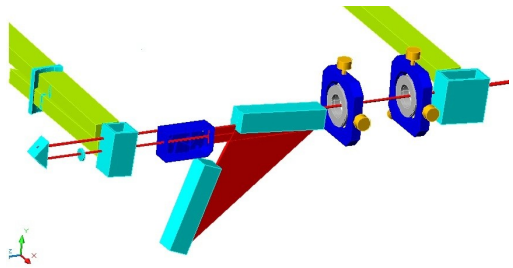

Improved Resonator Design

- **vertical grazing incidence resonator**
- **larger tuning range**
- **lower bandwidth**
- **improved pulse to pulse energy stability**

New NarrowScan laser with the following options:

- Gratings: 1800, 2400, 3000, 3600 lines / mm
- Double-grating (bandwidth < 0.04 cm^{-1})
- Prismatic cell for high power output
- Frequency conversion units for doubling, trippling or mixing from 190nm up to 4.5µm
- "Look up" table and/or autotracking for both conversion units
- Wavelength separation with two or four Pellin-Broka-Prism
- Temperature stabilization of the crystal-housing
- Frequency stabilization
- Optogalvanic cell for laser calibration
- C++ or LabView software
- 4 digital and 4 analog inputs
- Online power monitoring of fundamental, doubled and tripled laser light
- Online bandwidth monitoring with CCD-camera
- Reversed laser design
- Integrated pump laser (dye and pump laser in a single housing)

Optical feedback

The new active feedback allows moreover a fully automatic wavelength calibration and an almost linear scanning. Active temperature contro, online energy control and wavelength stabilisation, as well as linewidth control are further advantages of the new optical feedback. Together with the new motor drive and a new software, we achieved a precision with reproducibility of the laser-line, linear scan and wavelength control, which is, to our knowledge, not reached by any other laser worldwide.

Additional options

When designing the new series of NarrowScan dye lasers we paid utmost attention to a flexible layout, meeting a variety of applications with a single dye laser. The following options can be easily integrated into the housing of the NarrowScan laser to guarantee a rigid and compact structure.

a) Frequency conversion

The excellent spectral and spatial quality of the NarrowScan-series predestinate this laser for the use in nonlinear processes. By means of our very precise positioning devices, all common crystals for frequency doubling, tripling and difference frequency mixing or mixing after doubling can be installed in the housing of the NarrowScan-laser. By installing the positioning stage directly inside the laser housing, a high stability and reproducibility is achieved. For difference frequency mixing (up to 4.5 µm) the dye laser wavelength is mixed with the fundamental of the Nd:YAG-laser. The necessary opto-mechanical components for the pump laser beam are also located inside the laser housing. All frequency units can be used independend, in LookUpTable or in autotracker mode.

Frequency doubling

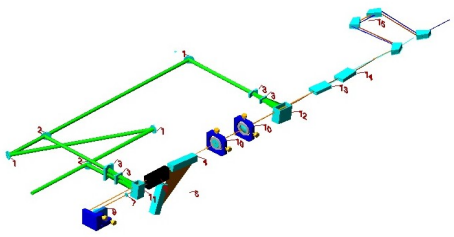

Doubling Unit & Pellin Broka Separation Box



Difference frequency mixing

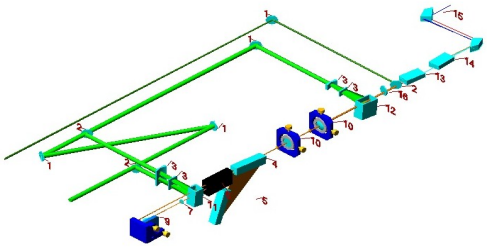

Frequency tripling

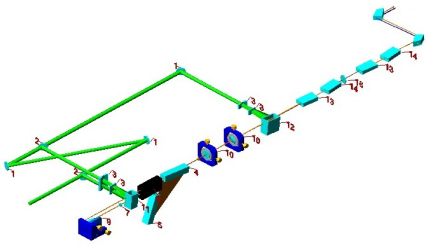

(13) compensators; (14) mixing-crystal; (15) separator (Pellin-Broka prism); (16) λ/2-plate

b) Temperature Stabilization

Our new NarrowScans are provided with an active temperature stabilization to prevent instabilities of the cavity because of changing environmental temperatures.

c) Opto-Galvanic Wavelength Calibration

A software controlled opto-galvanic (2) calibration device measures the absolute wavelength of atomic transitions, which are compared the actual grating position. The user can use the data to recalibrate his laser.

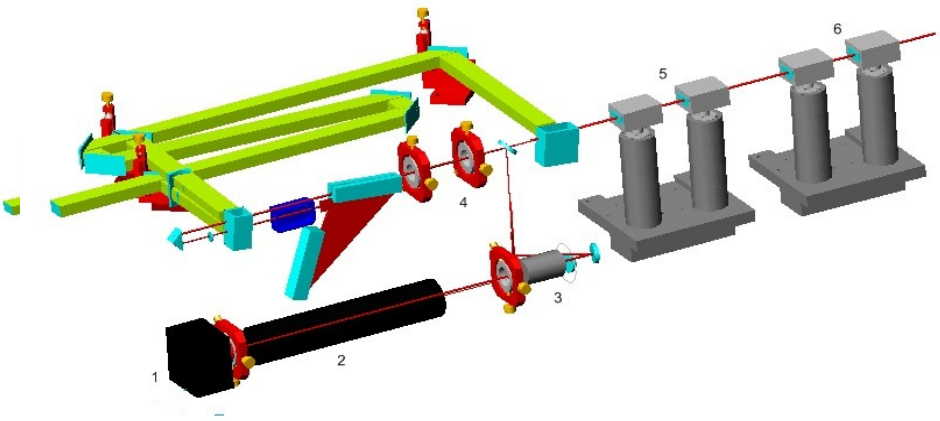

d) Bandwidth Monitor

An Etalon (3) is used to generate interference rings, which are monitored by a CCD-camera (1) and displayed on the PC. The software calculates the laser bandwidth by fitting the interference maxima, allowing an online control of the laser bandwidth during the measurements.

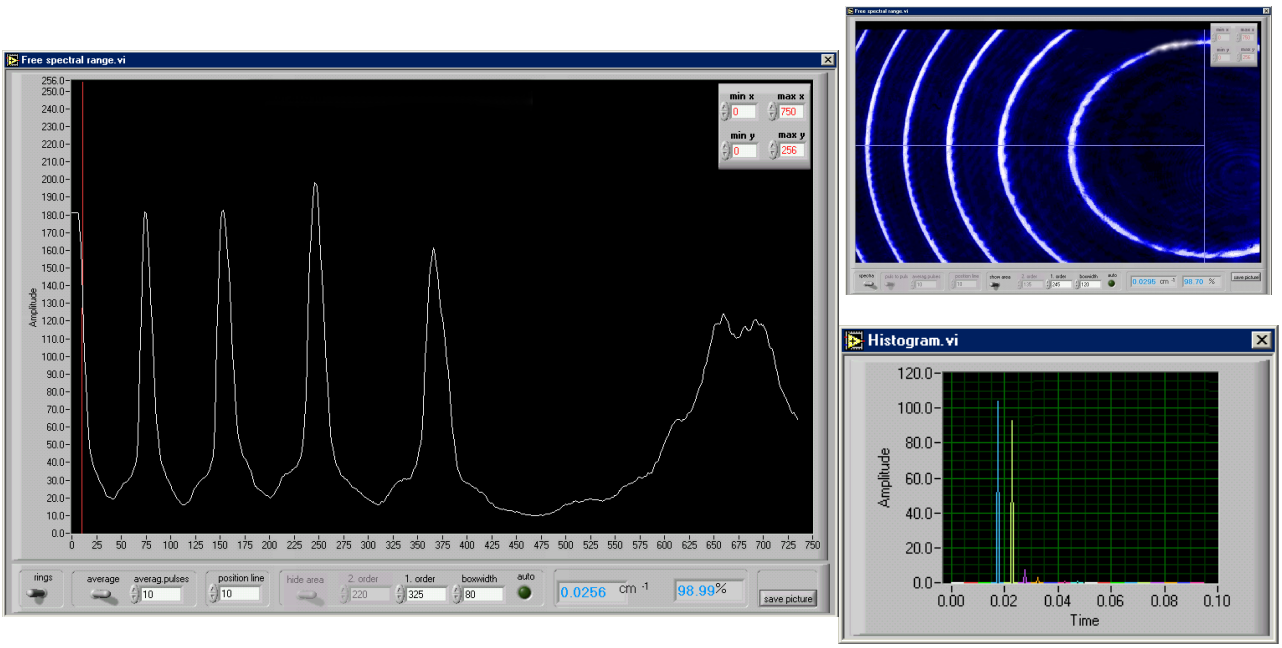

e) Wavelength / Frequency Stabilization

The active frequency stabilization uses the same Etalon as for the bandwidth measurement. In order to stabilize the laser frequency, one of the interference maxima is observed and kept at the same spatial position. Any frequency drift of the dye laser results in a spatial drift of the interference rings, which is compensated for slightly adjusting the resonator.

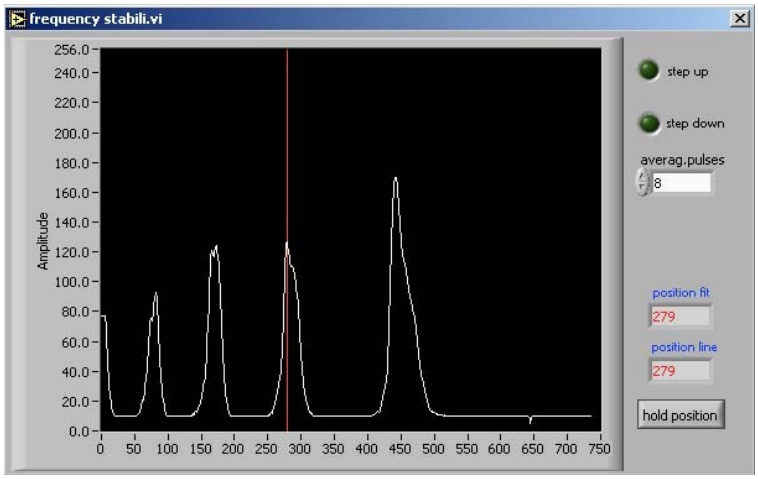

f) Prismatic cell for high power output and improved beam profile

Our new prismatic cell can be used with pump powers up to 1Joule and garantees a high power output with an excellent beam profile. The inner tube can be ordered from 1.6 up to 6mm diameter, depending on the power of the pumplaser.

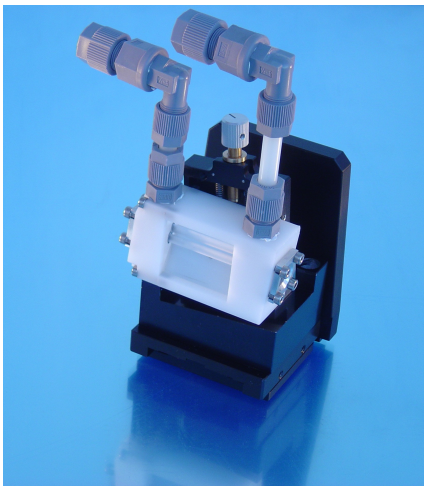

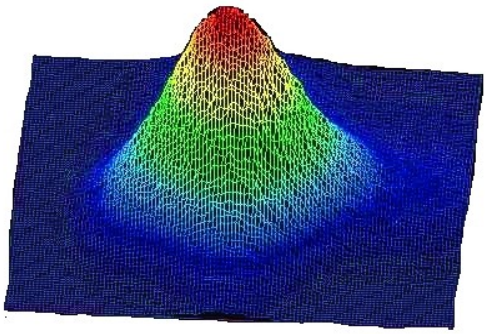

Specifications for all NarrowScan Models:

Conversion efficiency: Nd:YAG pumped 532 nm	25 % DCM 28 % Rhodamine 6G
Conversion efficiency: Excimer pumped 308 nm	12 % Rhodamine 6G 15 % Coumarin 102
Wavelength reproducibility (580 nm)	< 0,0025 nm (typically < 0,0009 nm), temperature stabilized
Absolute accuracy of the wavelength (580 nm)	< 0,02 nm (typically < 0,01 nm), temperature stabilized
Wavelength stability	< 0,001 nm/°C
Divergence	0,5 mrad
Polarization	> 98 %
ASE-background	< 0.5 %
Dimensions	660 mm x 420 mm x 360 mm

Configurations:

Laser	Grazing Grating	Tuning Element	Tuning Range	Bandwidth [cm^{-1}]
NarrowScan Double Grating	3600 l/mm (90 mm)	3600 l/mm	330 nm – 480 nm	≤ 0,04 @ 460 nm
NarrowScan Double Grating	3000 l/mm (90 mm)	3000 l/mm	330 nm – 580 nm	≤ 0,03 @ 570 nm
NarrowScan Double Grating	2400 l/mm (90 mm)	2400 l/mm	330 nm – 710 nm	≤ 0,04 @ 580 nm
NarrowScan Double Grating	1800 l/mm (90 mm)	1800 l/mm	350 nm – 850 nm	≤ 0,05 @ 625 nm
NarrowScan Single Grating	3000 l/mm (90 mm)	Mirror	330 nm – 610 nm	≤ 0,05 @ 580 nm
NarrowScan Single Grating	2400 l/mm (90 mm)	Mirror	330 nm – 740 nm	≤ 0,06 @ 580 nm
NarrowScan Single Grating	1800 l/mm (90 mm)	Mirror	350 nm – 900 nm	≤ 0,07 @ 580 nm
NarrowScan Small Grating	2400 l/mm (60 mm)	Mirror	330 nm – 740 nm	≤ 0,08 @ 625 nm
NarrowScan Small Grating	1800 l/mm (60 mm)	Mirror	350 nm – 900 nm	≤ 0,1 @ 625 nm

Requirements:

Pump Laser Power	20mJ – 1000mJ (one main Amplifier)
Voltage	110V 6A/ 220V 3A, 50/60Hz, single phase
Computer (not included)	Windows, Linux or Mac, one free serial or USB Port for communication

All NarrowScan dye lasers are equipped with ready-to-use Radiant Dyes dye circulators (standard models for up to 50 Hz repetition rate of the pump laser). The pump optics can be chosen by the customer, according to the wavelength and the beam profile of the pump laser. The laser can either be controlled by a PC via the RS232 interface or an independend control box with a fully functional keyboard.

JENOPTIK

High Power Diode Laser Bars

940 nm, 120 W cw

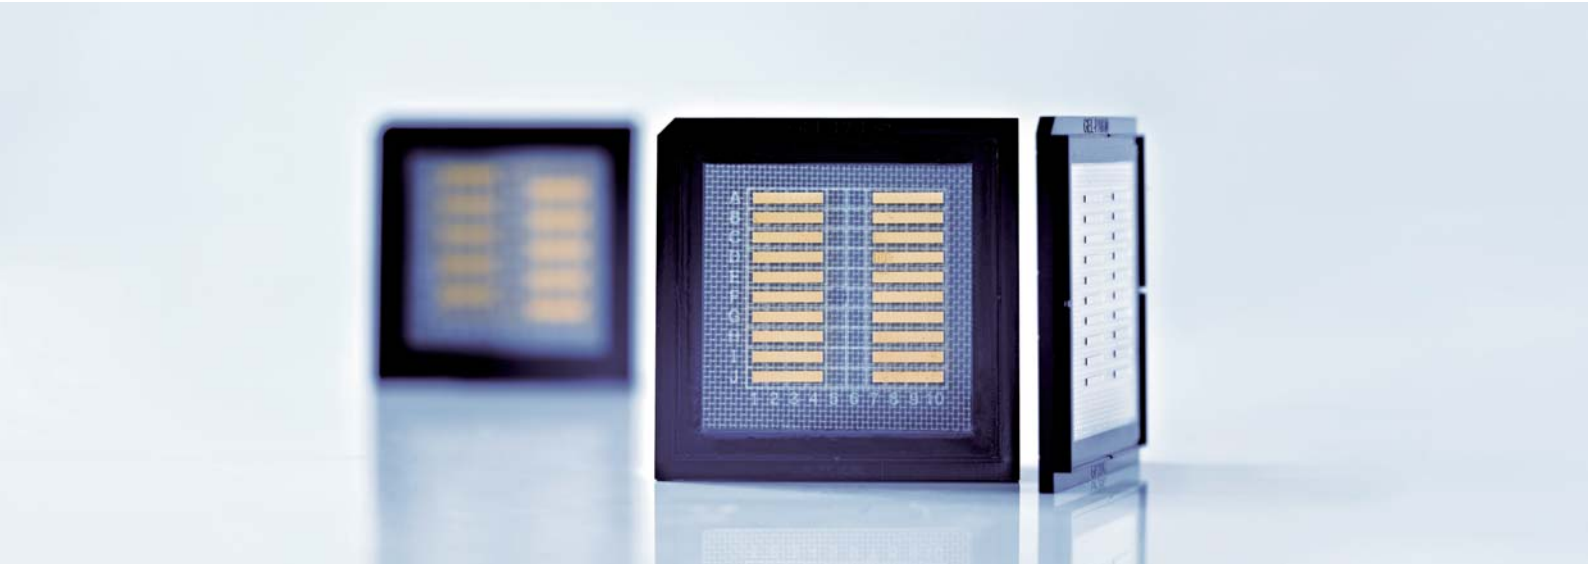

JDL-BAB-50-47-940-TE-120-2.0

Features:

- High laser power
- High efficiency
- Long lifetime, high reliability
- Excellent beam characteristics

Applications:

- Pumping of solid-state lasers and fiber lasers
- Industrial, scientific and medical systems
- Applications in the printing industry
- Defense and security

High Power Diode Laser Bars

940 nm, 120 W cw

Specifications

Product	JDL-BAB-50-47-940-TE-120-2.0				
	Symbol	Min	**Nom**	Max	Unit
Operation*					
Wavelength (cw)	λ	935	**938**	941	nm
Optical Output Power	P_{opt}		**120**		W
Operation Mode			**cw, switched**		
Power Modulation			**100**		%
Geometrical					
Number of Emitters			**47**		
Emitter Width	W	95	**100**	105	µm
Emitter Pitch	P		**200**		µm
Filling Factor	F		**50**		%
Bar Width	B	9600	**9800**	10000	µm
Cavity Length	L	1980	**2000**	2020	µm
Thickness	D	115	**120**	125	µm
Electro Optical Data*					
Fast Axis Divergence (FWHM)	$\theta_{\parallel}$		**27**	30	°
Fast Axis Divergence**	$\theta_{\parallel}$		**47**	51	°
Slow Axis Divergence at 120 W (FWHM)	$\theta_{\perp}$		**5**	7	°
Slow Axis Divergence at 120 W**	$\theta_{\perp}$		**7**	9	°
Pulse Wavelength	λ	929	**932**	935	nm
Spectral Bandwidth (FWHM)	$\Delta\lambda$		**3**	4	nm
Slope Efficiency***	η	1.0	**1.1**		W/A
Threshold Current	I_{th}		**14**	17	A
Operating Current	I_{op}		**123**	136	A
Operating Voltage	V_{op}		**1.7**	1.9	V
Series Resistance	R_s		**2**	4	mΩ
Degree of TE Polarization	α	98			%
EO Conversion Efficiency***	η_{tot}	57	**62**		%

* Mounted on a heat sink with Rth = 0.5 K/W, coolant temperature 25 °C, operating at nominal power
** Full width at 95 % power content
*** Item may change upon notice and acceptance by JENOPTIK Diode Lab GmbH, due to future improvements of technology or processing

Note: Nominal data represents typical values.

Safety Advices: Laser bars are the active components in high-power diode lasers in accordance to IEC standard class 4 laser products. As delivered, laser bars cannot emit any laser beam. The laser beam can only be released if the bars are connected to a source of electrical energy. In this case, IEC-Standard 60825-1 describes the safety regulations to be taken to avoid personal injury.

Specifications may change in compliance with our quality management system.

10/2010

Power - Current - Voltage - Characteristics*

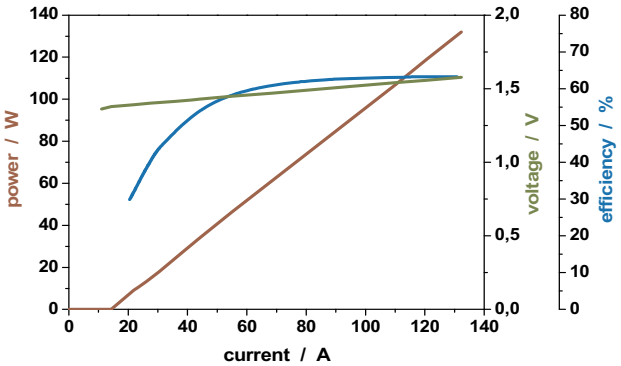

Spectral Characteristic*

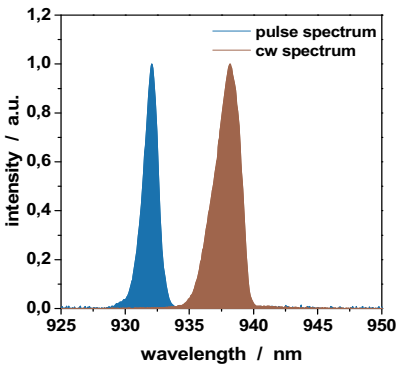

JENOPTIK I Lasers & Material Processing
JENOPTIK Diode Lab GmbH
Max-Planck-Strasse 2 I 12489 Berlin I Germany
Sales contact: JENOPTIK Laser GmbH I Phone: +49 3641 65-3053 I Fax: -4011
E-mail: sales-laser.lm@jenoptik.com I www.jenoptik.com/diodelasers



LU09xxFyyy

9xxnm Laser Diode on F-Mount

Up to 16W c.w. and 30W in pulsed mode



Description:

The LU09xxFyyy series laser diodes contains a highly optimized GaInAs/GaAs quantum well laser structure on GaAs substrate. Long lifetime is achieved through the Lumics proprietary laser diode facet passivation technology. The process inludes careful design, precisely defined manufacturing and extensive burn-in testing of each individual emitter. The device qualification includes life time testing and a set of thermal and mechanical tests.
Each laser diode chip is individulally serialized for traceability, and is shipped with a specified set of test data. Applications are mainly in solid state laser pumping, illumination, printing or medical treatment.

Features & Functions:

- Wavelength 915, 940 or 975nm
- Up to 16W c.w. operation
- Up to 30W pulsed peak power
- 94µm or 190µm emitter width
- Burn-in tested single emitter
- 2.2mm mounting holes
- Copper base
- Electrically isolated
- Option: FAC lense

Benefits:

- Small footprint
- Efficient heat sink
- High reliability
- OEM quantities

Applications:

- Pumping (SSL)
- Plastic welding
- Marking
- Illumination
- Medical treatment

Drawing (dimensions in mm)

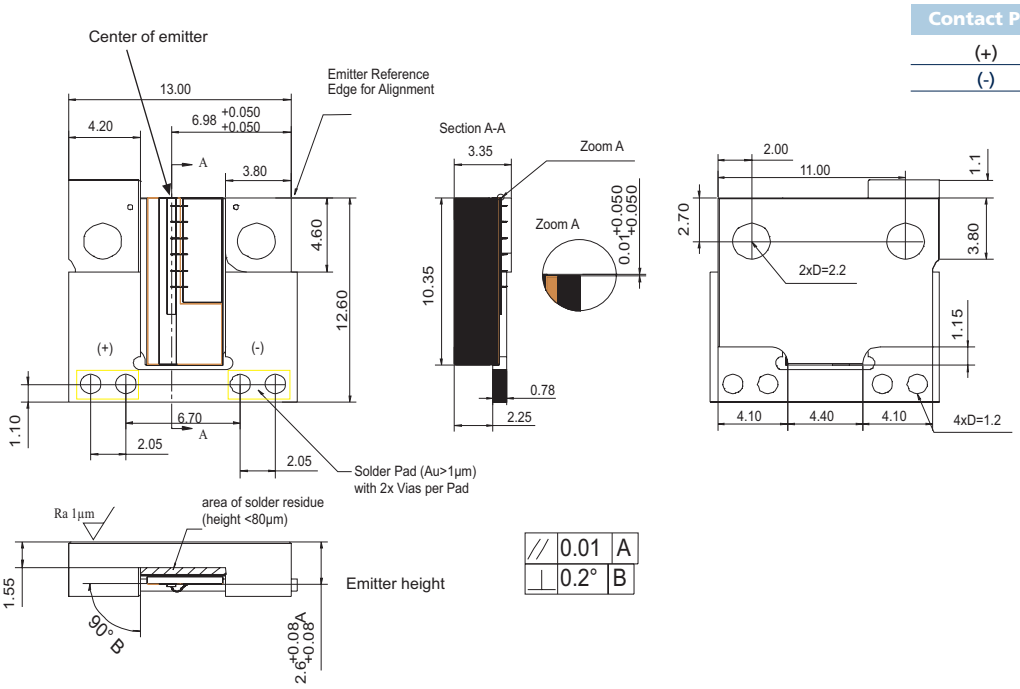

Connections

Contact Pad	Function
(+)	LD Anode (+)
(-)	LD Cathode (-)

Your ideas are welcome.

Data Sheet LU09xxFyyy Copyright Lumics GmbH - All rights reserved

Typical Electrical and Optical Characteristics

Parameter	Symbol	LU09xxF120	LU09xxF160	Unit
Emitter Width	W	94	190	µm
c.w. Operating Power	$P_{op\ (c.w.)}$	12	16	W
c.w. Operating Current	$I_{op\ (c.w.)}$	13	17.7	A
Pulsed (1) Operating Power	P_{op} (< 30µsec pulse / < 30% d.c.)	15	30	W
Pulsed (1) Operating Current	I_{op} (< 30µsec pulse / < 30% d.c.)	16.8	32.5	A
Threshold Current	I_{th}	500	980	mA
Forward Voltage	V_{op}	2	2	V
Slope Efficiency	λ_{diff}	0.95	0.95	W / A
Peak Wavelength	LU0915Fyyy: λ_{peak}	915+/-10	915+/-10	nm
	LU0940Fyyy: λ_{peak}	940+/-10	940+/-10	nm
	LU0975Fyyy: λ_{peak}	975+/-10	975+/-10	nm
Spectral Width (FWHM)	λ_{rms}	4	4	nm
Beam Divergence (horizontal)(2)	slow axis	7	7	deg
Beam Divergence (vertical)(2)	fast axis	27	27	deg
AR Reflectivity(3)	r_f	2	2	%
HR Reflectivity	r_r	95	95	%
Spectral Shift with Temp.	λ_{T_Shift}	0.3	0.3	nm / K
Spectral Shift with Current	λ_{P_Shift}	0.5	0.5	nm / A
Operating Temp.	T_{op}	20 - 30	20-30	°C
Option: FAC lense				
Fast axis (vertical) divergence	NA	< 3	< 3	mrad
Vertical width of the beam		< 0.8	< 0.8	mm

Important Notes:
(1) Typical pulse condition: pulse <10µsec / d.c. 1%
(2) FWHM at Pop
(3) Other coatings are offered on request

Absolute Maximum Ratings

Parameter	Symbol	LU09xxF120	LU09xxF160	Unit
LD c.w. Forward Current	$I_{op,\ (c.w.)\ max}$	15	20	A
LD pulsed (<30µsec) Forward Current	$I_{op,\ (pulsed)\ max}$	18	34	A
LD Reverse Voltage	$V_{R,\ max}$	2	2	V
Maximum Processing Temperatures:				
Solder pads for LD contacts / max 5sec.	$T_{Op\ max,\ solder\ pad}$	250	250	°C
Soldering of Cu base block / max 5sec.	$T_{Op\ max,\ Cu\ base}$	150	150	°C

Notes:
Absolute Maximum Ratings may be applied to the laser module for short periode of time only. Exposure to maximum ratings for extended period of time or exposure above one or more max ratings may cause damage or affect the reliability of the device.

Operating Temperature and Rel. Humidity must be choosen such that the dewpoint of humid air around the laser diode is below the operating heat sink temperature to avoid condensing of water on the laser diode facet.

User Safety

Complies with 21 CFR1040.10

Your ideas are welcome.

Preliminary
200W 9xxnm High Power Laser Diode Bar on Microchannel Cooler

BAC200C-9xx-05/06 & BAC200C-10xx-05/06

Features:

- Mounted 10mm laser diode bar
- Active microchannel cooler (water-cooled)
- 200W operating power
- Highly reliable single quantum well MBE structure
- Telecom grade AuSN mounting technology
- Assembly option with Cu base and cover
- Standard wavelength at 915nm, 950nm, 980nm and 1030nm (others available on request)
- RoHS compliant

Applications:

- Solid state disk and fiber laser pumping
- Direct applications such as material processing
- Printing
- Medical

The Oclaro BAC200C-9xx-05/06 & BAC200C-10xx-05/06 laser diode bar on microchannel cooler series has been designed to provide the increased brightness and reliability required for pumping next generation solid state disk and fiber lasers, and for direct applications. The proprietary E2 front mirror passivation process, developed at our Zurich site, prevents Catastrophic Optical Damage (COD) to the laser diode facet even at extremely high output powers. The laser diode bars are mounted on a water cooled microchannel package using hard solder; providing very high reliability in CW and pulsed (1-Hz type) applications.

Characteristics

Parameter	Symbol	Typ	Unit
CW output power	P_{op}	200	W
Central wavelength [1] BAC200C-915-05/06 BAC200C-940-05/06 BAC200C-980-05/06 BAC200C-1030-05/06	 λ_{c915} λ_{c940} λ_{c980} λ_{c1030}	 915 ± 10 940 ± 10 980 ± 10 1030 ± 10	nm
Spectral width (FWHM)	$\Delta\lambda$	3.5	nm
Wavelength shift with temperature	$d\lambda_c/dT_{op}$	0.3	nm/°C
Beam divergence Parallel to Junction (90% of Power) Perpendicular to Junction (FWHM)	 $\theta_{//}$ $\theta\perp$	 8 30	deg
Polarization	–	TE	–
Threshold current	I_{th}	22	A
Slope efficiency	$\eta_D = P_{op}/(I_{op}-I_{th})$	1	W/A
Conversion efficiency	$H= P_{op}/(V_{op}xI_{op})$	65	%
Operating current	I_{op}	220	A
Operating voltage	V_{op}	1.5	V
Operating temperature	T_{op}	25 ± 5	°C
Water cooler flow	Q_w	18 ± 2	l/hrs
Microchannel Cooler differential pressure	P_w	0.1 - 0.2	MPa
Water conductivity	σ	<10	µS/cm
pH value		~8	
Particle filter (inlet)		<20	µm
Bar width	b	10	mm

[1] Reduced wavelength window / extended range available on request (910-1070nm)

Microchannel cooler dimensions (mm)

Microchannel cooler with base and cover dimensions (mm)

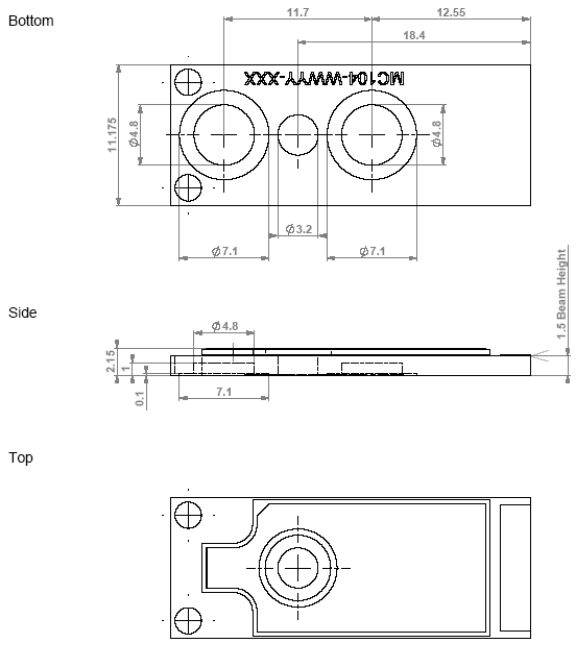

BAC200C-9xx-05 & BAC200C-10xx-05

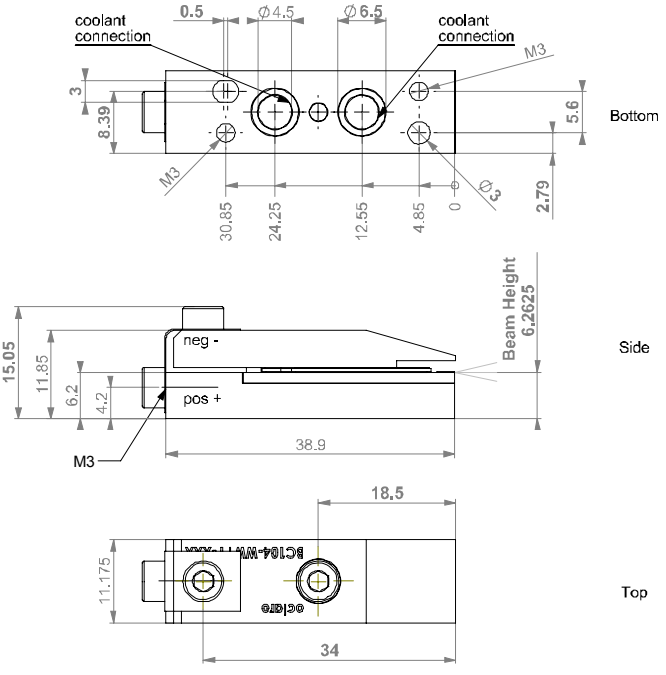

BAC200C-9xx-06 & BAC200C-10xx-06

RoHS Compliance

Oclaro is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

Ordering Information

BAC200C-915-05	200W 915nm Laser Diode Bar on Microchannel cooler
BAC200C-940-05	200W 940nm Laser Diode Bar on Microchannel cooler
BAC200C-980-05	200W 980nm Laser Diode Bar on Microchannel cooler
BAC200C-1030-05	200W 1030nm Laser Diode Bar on Microchannel cooler
BAC200C-915-06	200W 915nm Laser Diode Bar on Microchannel cooler with base and cover
BAC200C-940-06	200W 940nm Laser Diode Bar on Microchannel cooler with base and cover
BAC200C-980-06	200W 980nm Laser Diode Bar on Microchannel cooler with base and cover
BAC200C-1030-06	200W 1030nm Laser Diode Bar on Microchannel cooler with base and cover

Contact Information

Oclaro Inc.
Worldwide Headquarters
2584 Junction Avenue
San Jose
CA 95134
USA

Tel: +1 408 383 1400
Fax: +1 408 919 1501

www.oclaro.com
APSEurope@oclaro.com

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Oclaro before they become applicable to any particular order or contract. In accordance with the Oclaro policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of Oclaro or others. Further details are available from any Oclaro sales representative.

BAC200C-9xx_10xx Rev 1.1 July 2009
©Oclaro 2009. Oclaro the Oclaro, Inc. logo, and all other Oclaro, Inc product names and slogans are trademarks or registered trademarks of Oclaro, Inc. in the U.S.A. or other countries. Products described in this datasheet may be covered by one or more patents in the U.S.A. and abroad. Information in this datasheet is subject to change without notice.

Unmontierte Laserbarren, 82.5% Füllfaktor, 940 nm
Un-mounted Laser Bars, 82.5% Fill-factor, 940 nm

Lead (Pb) Free Product - RoHS Compliant

SPL BS94-2S

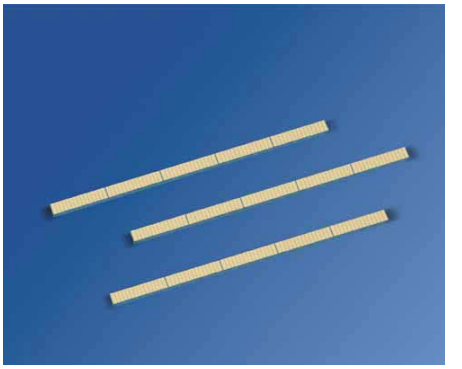

Besondere Merkmale

- Unmontierter Laserbarren
- Design mit 75 Emittern (82.5% Füllfaktor)
- Empfohlene optische Spitzenleistung 200 W
- Typischer Konversionswirkungsgrad 54 %
- Hocheffiziente und zuverlässige MOVPE Quantenfilmstruktur
- Standard-Wellenlängenselektion von ±3 nm
- Andere zentrale Pulswellenlängen auf Anfrage
- Lötbare p- und n-seitige Metallisierung
- Al-freie aktive Zone

Features

- Un-mounted monolithic linear array
- 75 emitter (82.5% fill-factor) design
- Recommended optical peak power 200 W
- Typical conversion efficiency 54 %
- High efficiency and reliable MOVPE-grown quantum-well structure
- Standard wavelength selection is ±3 nm
- Other pulse peak wavelengths are available upon request
- Solderable p- and n-side metallization
- Al-free active region

Anwendungen

- Empfohlen für quasi-kontinuierliche (QCW)-Anwendungen
- Pumpen von Festkörperlasern
- Direkte Materialbearbeitung
- Erwärmen, Beleuchten
- Medizinische Anwendungen
- Druckanwendungen

Applications

- Recommended for quasi continuous wave (qcw)- applications
- Pumping of solid state lasers
- Direct material processing
- Heating, illumination
- Medical applications
- Printing applications

Sicherheitshinweise

Je nach Betriebsart emittieren diese Bauteile hochkonzentrierte, nicht sichtbare Infrarot-Strahlung, die gefährlich für das menschliche Auge sein kann. Produkte, die diese Bauteile enthalten, müssen gemäß den Sicherheits-richtlinien der IEC-Norm 60825-1 behandelt werden.

Safety Advices

Depending on the mode of operation, these devices emit highly concentrated non-visible infrared light which can be hazardous to the human eye. Products which incorporate these devices have to follow the safety precautions found in IEC 60825-1 “Safety of laser products”.

Typ Type	Spitzenleistung[1)] Peak Power[1)]	Wellenlänge[2)] Wavelength[2)]	Bestellnummer Ordering Code
SPL BS94-2S	200 W	932 nm	Q65110A6958

1) Empfohlene Spitzenleistung setzt einen geringen thermischen Widerstand von R_{th} < 0.5 K/W voraus.
Recommended optical peak power implies a low thermal resistanceof R_{th} < 0.5 K/W.

2) Mittlere Wellenlänge bei 1 µs Pulsbreite und 4 kHz Wiederholfrequenz eines unmontierten Barren. Andere Wellenlängen oder Toleranzen auf Anfrage erhältlich.
Pulsed peak wavelength at 1 µs pulse width and at 4 kHz repetition rate refer to measurement on an un-mounted laser bar. Other peak wavelengths or tolerances are available upon request.

Kennwerte (T_A = 25 °C)[1)]
Characteristics[1)]

Bezeichnung Parameter	Symbol Symbol	Wert Values			Einheit Unit
		min.	typ.	max.	
Empfohlene Spitzenausgangsleistung Recommended peak output power	P_{op}	-	200 QCW	-	W
Empfohlenes Tastverhätnis[2)] Recommended duty cycle[2)]	$d.c.$	-	-	20	%
Zerstörgrenze Catastrophic optical damage limit	P_{COD}	350	500	-	W
Schwellstrom Threshold current	I_{th}	-	15	18	A
Betriebsstrom[3)] Operatiing current [3)]	I_{op}	-	198	218	A
Differentielle Quanten-Effizienz[3)] Differential quantum efficiency[3)]	η	1.0	1.1	-	W / A
Gesamter Konversionswirkungsgrad[3)] Total conversion efficiency[3)]	η_{tot}	51	54	-	%
Strahldivergenz schnelle Achse Vollwinkel (1/e²)[3)] Beam divergence fast-axis full width (1/e²)[3)]	$\theta_{\perp}$	-	65	70	Grad deg.
Strahldivergenz langsame Achse Vollwinkel (1/e²) [3)] Beam divergence slow-axis full width (1/e²) [3)]	$\theta_{\parallel}$	-	9	12	Grad deg.
Zentrale Impulswellenlänge[3)] Standard pulse center wavelength[3)]	λ_{pulse}	927	932	937	nm

Kennwerte (T_A = 25 °C)[1)]
Characteristics[1)]

Bezeichnung Parameter	Symbol Symbol	Wert Values			Einheit Unit
		min.	typ.	max.	
Spektrale Breite (Halbwertsbreite)[3)] Spectral width (FWHM)[3)]	$\Delta\lambda$	-	3	5	nm
TE Polarisation [3)] TE Polarization [3)]	P_{TE}	-	90	-	%

1) Alle Kenn- und Grenzwerte beziehen sich auf Impulsmessungen (1 µs Pulsbreite bei 4 kHz Wiederholfrequenz) an unmontierten Barren. Die Erzielung der spezifizierten Werte im QCW – Modus (Quasi Continuous Wave) setzt eine geeignete Montagetechnik mit einem thermischen Widerstand von R_{th}< 0.5 K/W voraus. Die zentrale Emissionswellenlänge im Betrieb ist abhängig vom Betriebsmodus, Betriebstemperatur, thermischer Widerstand R_{th} und ist in aller Regel höher als die spezifizierte Impulswellenlänge λ_{pulse} (1 µs Pulsbreite bei 4 kHz Wiederholfrequenz). Alle Parameter können im jeweiligen Betriebsmodus von den spezifizierten Kennwerten abweichen.

All characteristics and limitations refer to pulsed measurements (1 µs pulse width at 4 kHz repetition Wave) implies a suitable mounting technology with a thermal resistance of R_{th}< 0.5 K/W. The operating peak emission wavelength depends on the operating mode, ambient temperature and thermal resistance R_{th}. The operating peak emission wavelength in general is higher than the specified pulsed peak wavelength λ_{pulse} (1 µs pulse width at 4 kHz repetition rate). All characteristics obtained in the operating mode may differ from the characteristics specified herein.

2) Das maximale Tastverhältnis hängt von der Pulsbreite und dem thermischen Widerstand ab.

The maximal duty cycle depends on pulse width and thermal impedance of the package.

3) Spezifiziert bei der typischen optischen Spitzenausgangsleistung Pop, typ

Specified at the typical optical output peak power Pop, typ

Dimensionen
Dimensions

Bezeichnung Parameter	Symbol Symbol	Werte Values			Einheit Unit
		min.	typ.	max.	
Emitteranzahl Number of emitters	n	-	75	-	
Kontaktbreite je Emitter Single emitter contact width	w	-	110	-	µm
Emitterabstand Emitter pitch	p	-	130	-	µm
Packungsdichte Fill-factor	F	-	82.5	-	%
Barrenbreite Bar width	W	9.9	10	10.1	mm
Barrenhöhe Bar height	H	105	115	125	µm
Resonatorlänge Resonator length	L	1190	1200	1210	µm

Published by
OSRAM Opto Semiconductors GmbH
Leibnizstrasse 4, D-93055 Regensburg
www.osram-os.com
© All Rights Reserved.

EU RoHS and China RoHS compliant product

此产品符合欧盟 RoHS 指令的要求；
按照中国的相关法规和标准，不含有毒有害物质或元素。

The information describes the type of component and shall not be considered as assured characteristics.
Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances. For information on the types in question please contact our Sales Organization.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose! Critical components [1] , may only be used in life-support devices or systems [2] with the express written approval of OSRAM OS.

[1] A critical component is a component usedin a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

[2] Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered.