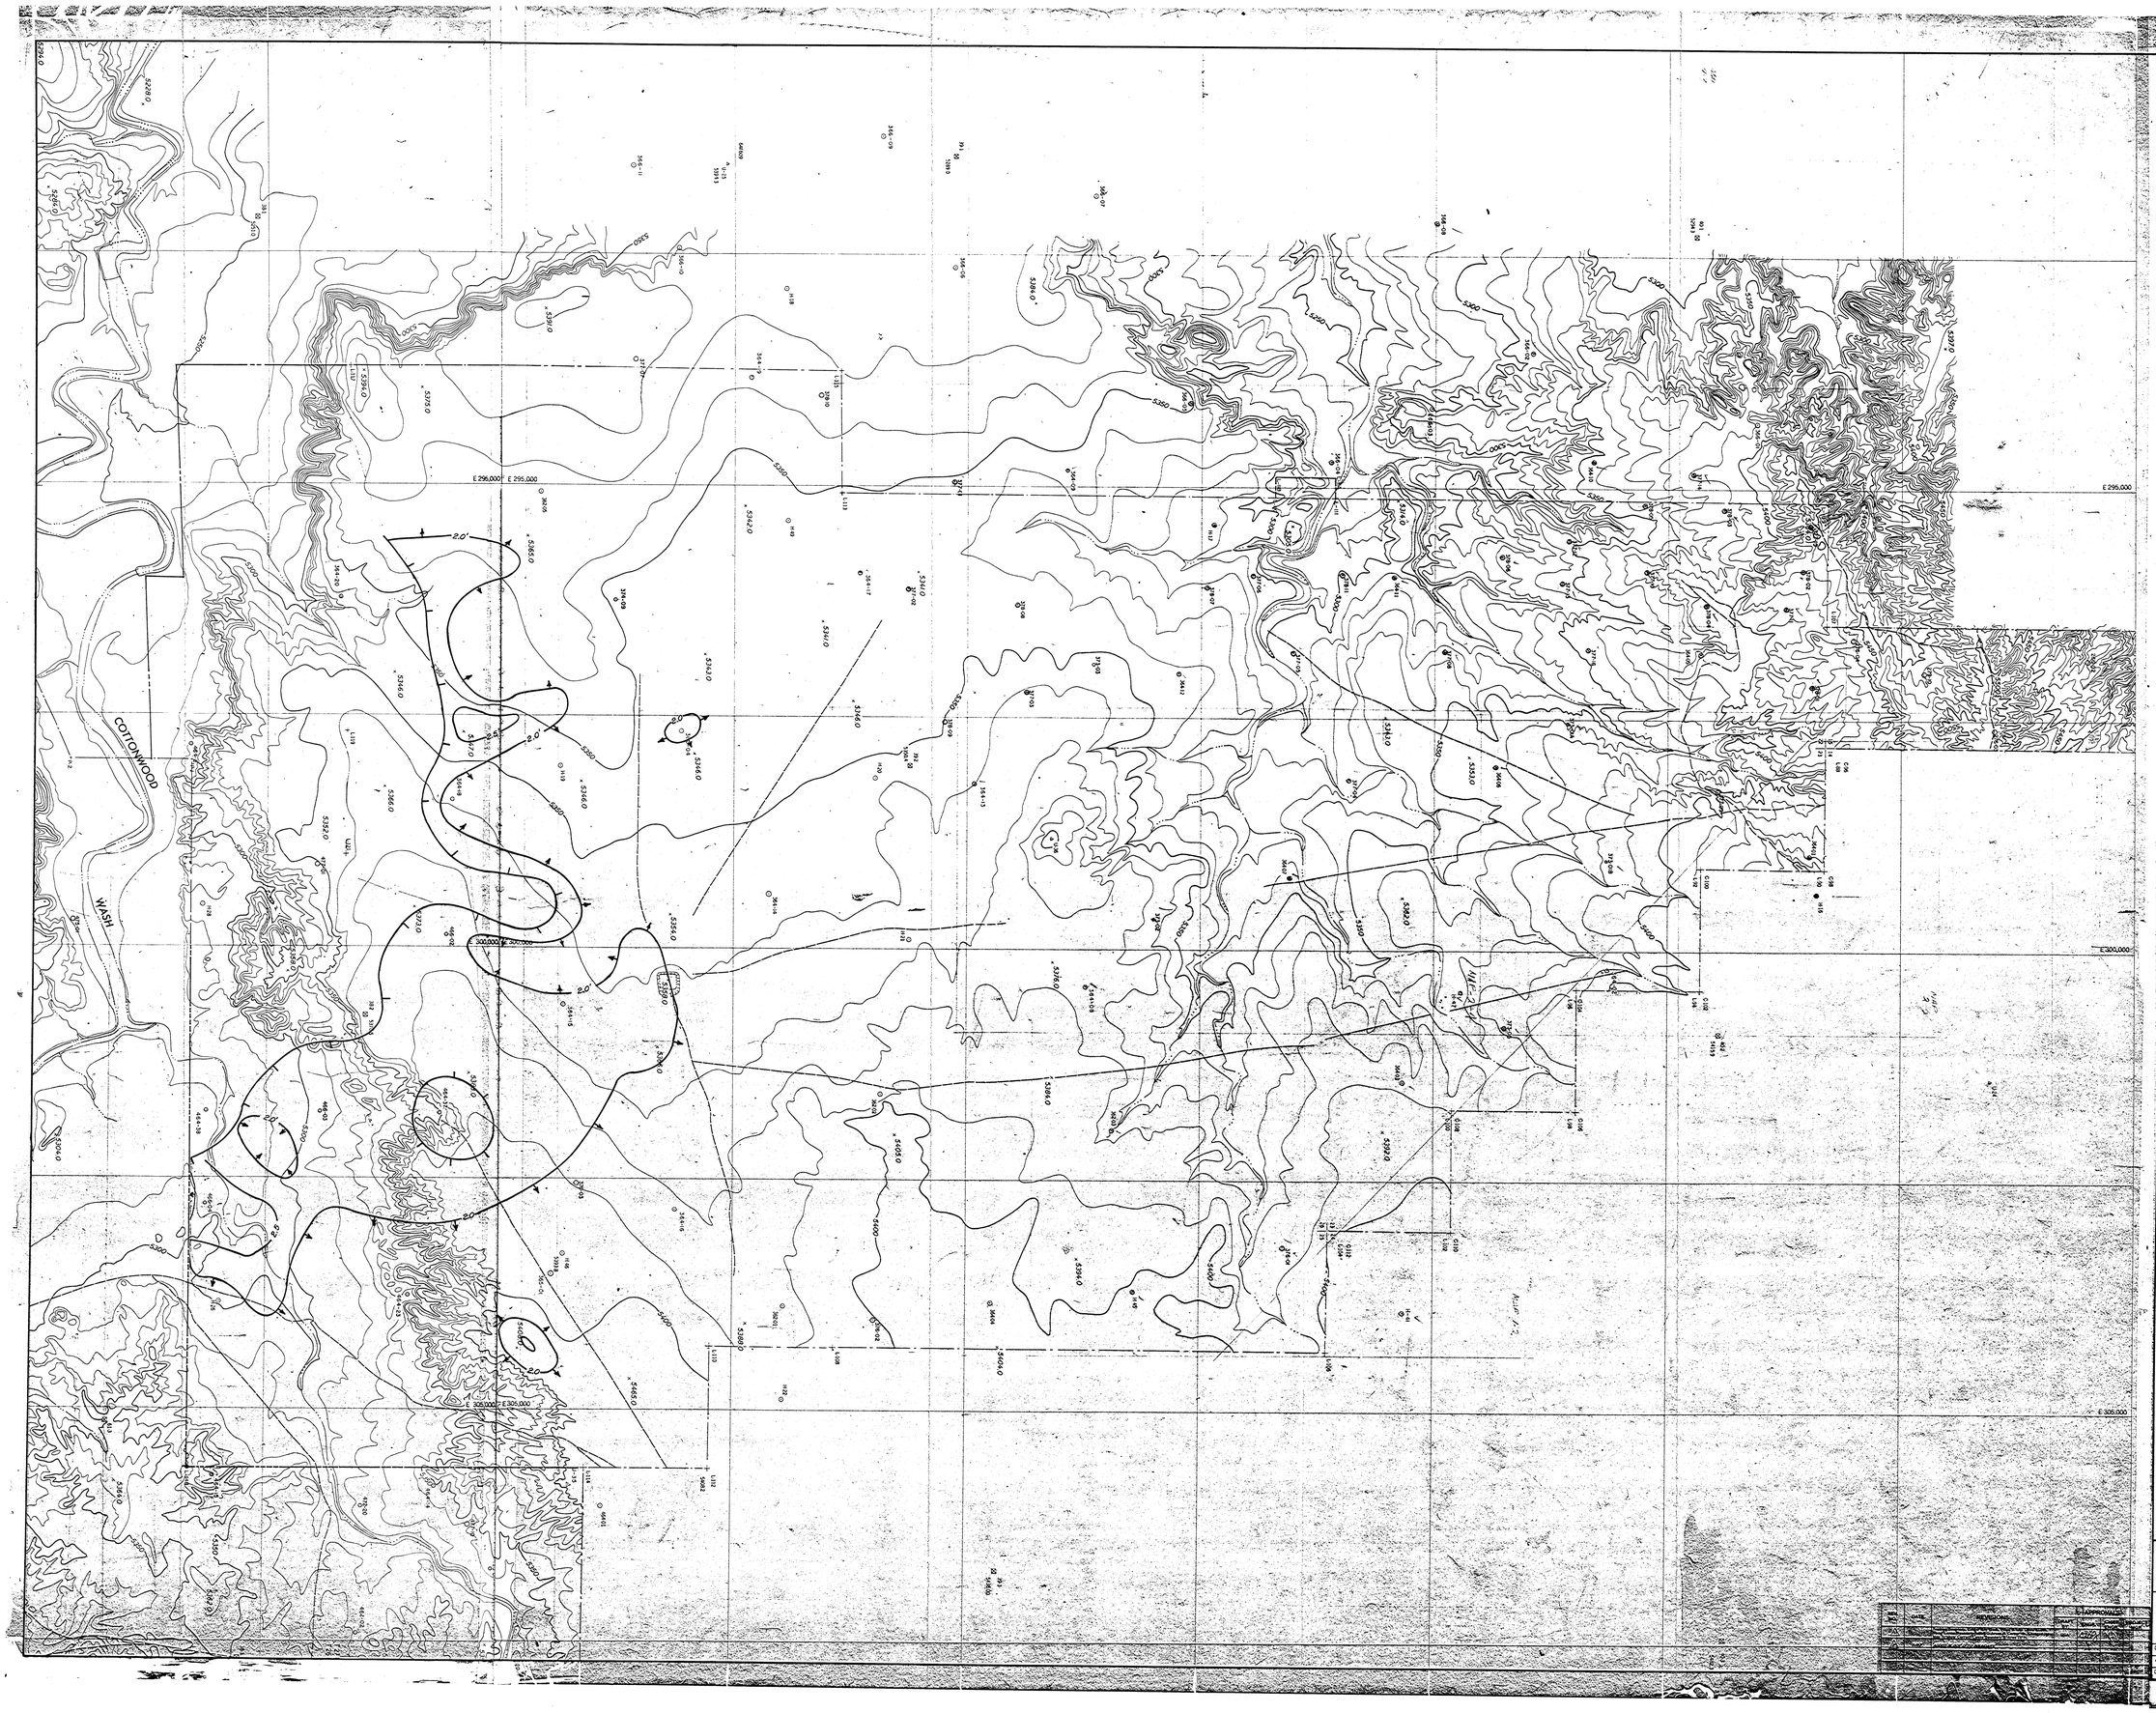

N

EXPLANATION

- DRILL HOLE LOCATION
- 6.0 COAL SEAM ISOPACH LINE (ISOPACH INTERVAL: 0.5 FEET)
- MINIMUM MINEABLE COAL QUALITY LINE (6,000 BTU)
- COAL SEAM BURN LINE
- COAL SEAM SPLIT LINE (BARBS POINT TOWARD SPLIT AREA WHERE ROCK PARTING IS GREATER THAN 1 FOOT THICK)
- COAL SEAM PINCH-OUT LINE (ARROWS POINT TOWARD AREA WHERE COAL SEAM IS LESS THAN 2 FEET THICK)
- COAL MINED OUT AS OF DECEMBER 16, 1977.
- COAL LEASE BOUNDARY
- AREA 3 AND AREA 4 MINING BOUNDARY.

I, Ron Van Valkenburg, certify changes on this drawing since the previous revision (01) are correct to the best of my knowledge.

INDEX MAP



EXHIBIT 5

BHP-MINERALS INTERNATIONAL

MAULDIN MINE

FRUITLAND, NEW MEXICO

SEAM 6a

THICKNESS MAP

DRAWN BY L. DAN	SCALE 1" = 500'	EXHIBIT:	
APPROVED BY	DATE MAY - 1987		
DRAWING NO.	LOCATION NO.		