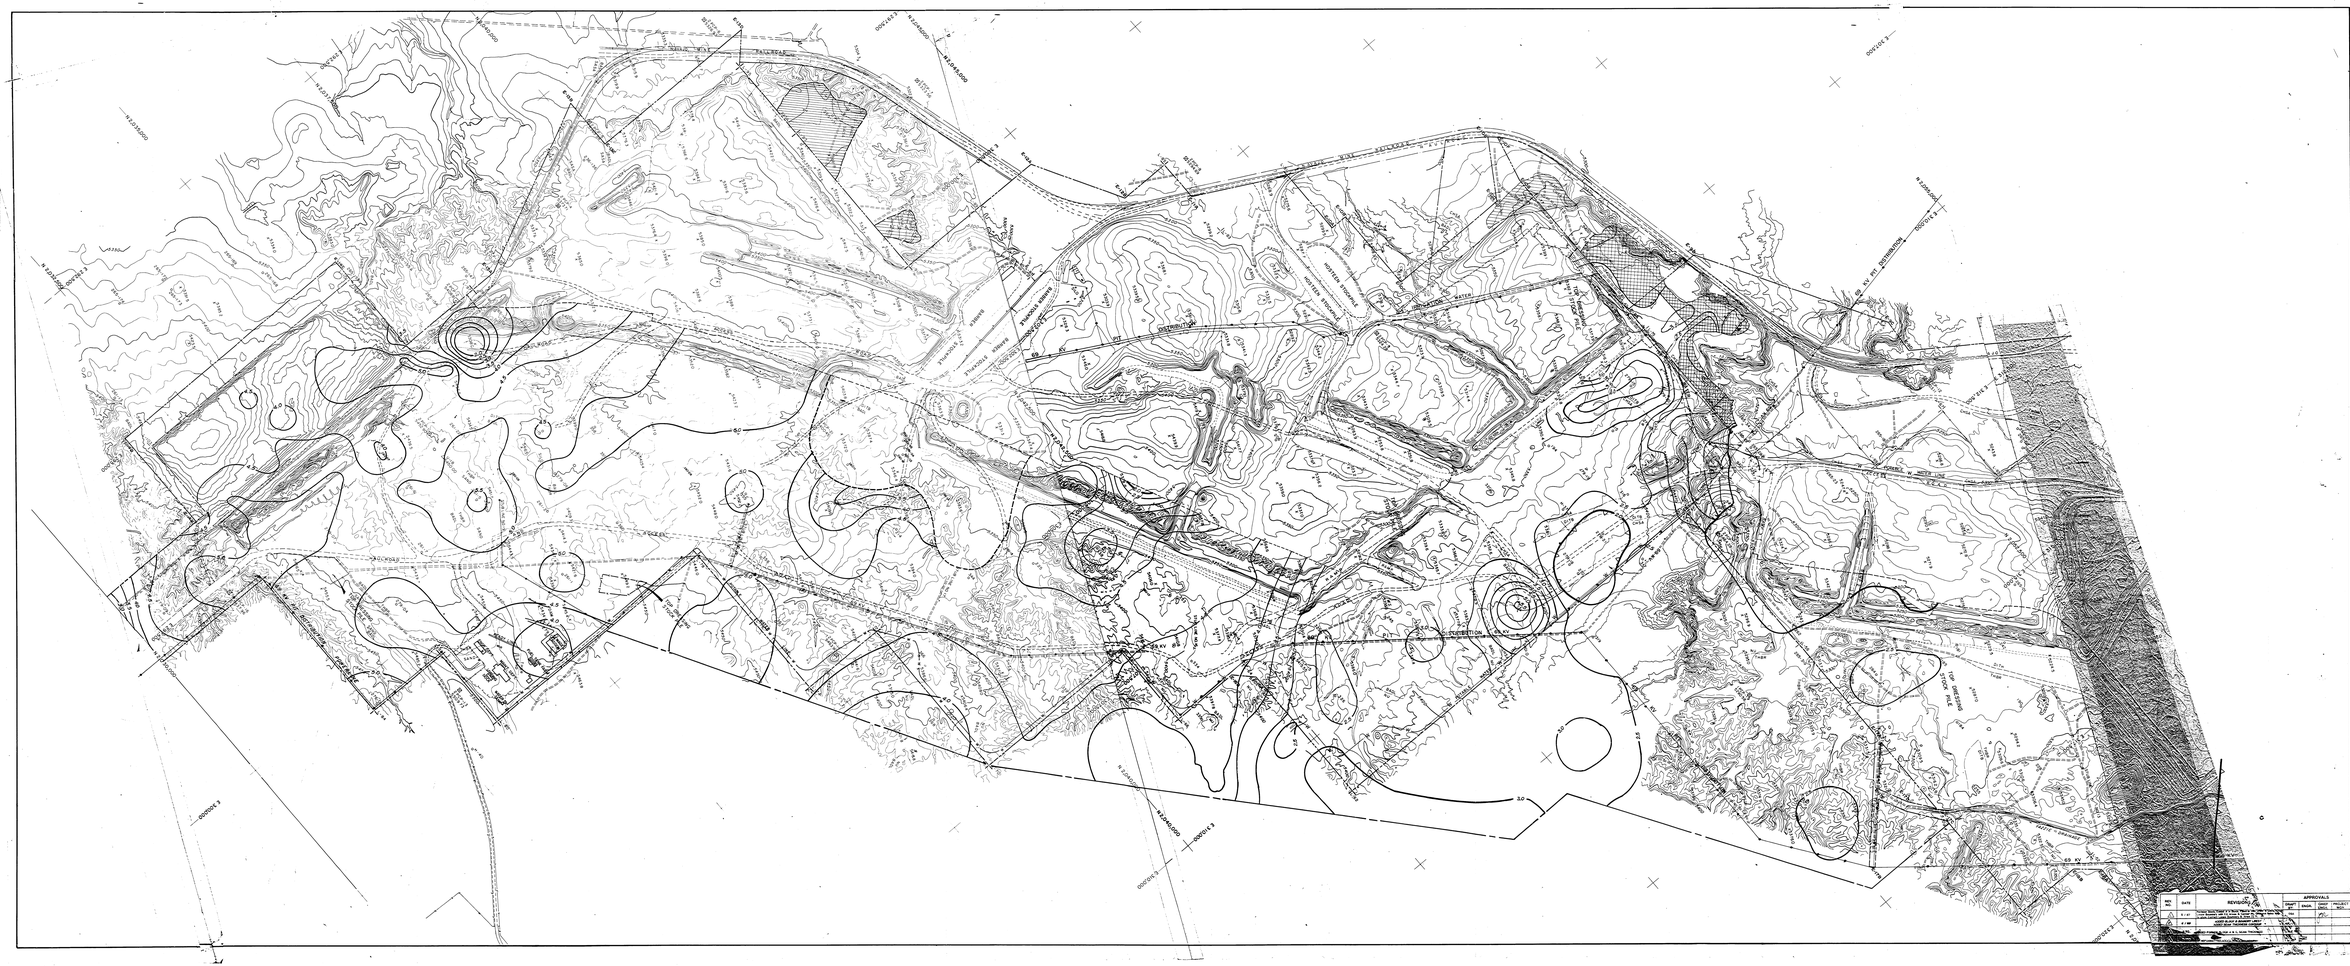
N
500 0 FEET 500 1000 1500
CONTOUR INTERVAL-10 FEET
DAS JOB NO. 46-9
EXPLANATION
DRILL HOLE LOCATION
8.0 COAL SEAM ISOPACH LINE (ISOPACH INTERVAL: 0.5 FEET)
MINIMUM MINEABLE COAL QUALITY LINE (6,000 BTU)
COAL SEAM BURN LINE
COAL SEAM SPLIT LINE (BARBS POINT TOWARD SPLIT AREA WHERE ROCK PARTING IS GREATER THAN 1 FOOT THICK)
COAL SEAM PINCH-OUT LINE (ARROWS POINT TOWARD AREA WHERE COAL SEAM IS LESS THAN 2 FEET THICK)
COAL MINED OUT AS OF DECEMBER 16, 1977.
COAL LEASE BOUNDARY
UNMINEABLE
BURN
1. ALL TOPOGRAPHICAL FEATURES, INFRASTRUCTURE, OR ROCK OUTCROPS SHOWN THIS SHEET ARE TAKEN FROM OR ARE GENERALIZED FROM THE MAP OF THE ROOM PILLARS.
INDEX MAP
AREA I
AREA II
AREA III
AREA IV N
EXHIBIT 5-27a
BHP MINERALS INTERNATIONAL
FRUITLAND, NEW MEXICO
SEAM 7
THICKNESS MAP
SAN JUAN COUNTY, NEW MEXICO
DRAWN BY: DAN
SCALE: 1" = 500'
EXHIBIT
CHECKED BY:
DRAWING NO.
REVISIONS
APPROVALS