

## CHAPTER 5

### GEOLOGY

#### 5.1 GENERAL DESCRIPTION

The permit area is located on the west flank of the San Juan Basin. This basin is an asymmetric, structural basin with a northwest trending axis parallel to the Hogback monocline in northwest New Mexico. The basin is bounded on the northwest by the Hogback monocline and on the north by the San Juan Uplift. The eastern rim is formed by the Brazos Uplift and the Nacimiento Uplift. The Zuni Uplift and the Chaco Slope form the southern margin of the basin while the Defiance Uplift and Four Corners Platform complete the northwestern basin rim (Fasset and Hinds, 1971) (FIGURE 5-1).

The rock strata in the southern part of the permit area strike north-south while the strata in the northern part strike northeast-southwest. The average dip in the area is 2° to the east. No major faults cut the permit area, although minor low angle compaction faults and slumps up to eight feet in displacement are common. Seismically, the area is very stable with no historically recorded earthquakes of sufficient magnitude to damage structures (U.S.D.I Bureau of Reclamation, 1975).

The stratigraphic section in the permit area reflects the Late Cretaceous transition of shallow marine depositional environment to a terrestrial fluvial depositional environment. The four formations encompassing this depositional environment change are (in ascending order): the Lewis Shale, the Pictured Cliffs Sandstone, the Fruitland Formation, and the Kirtland Shale.

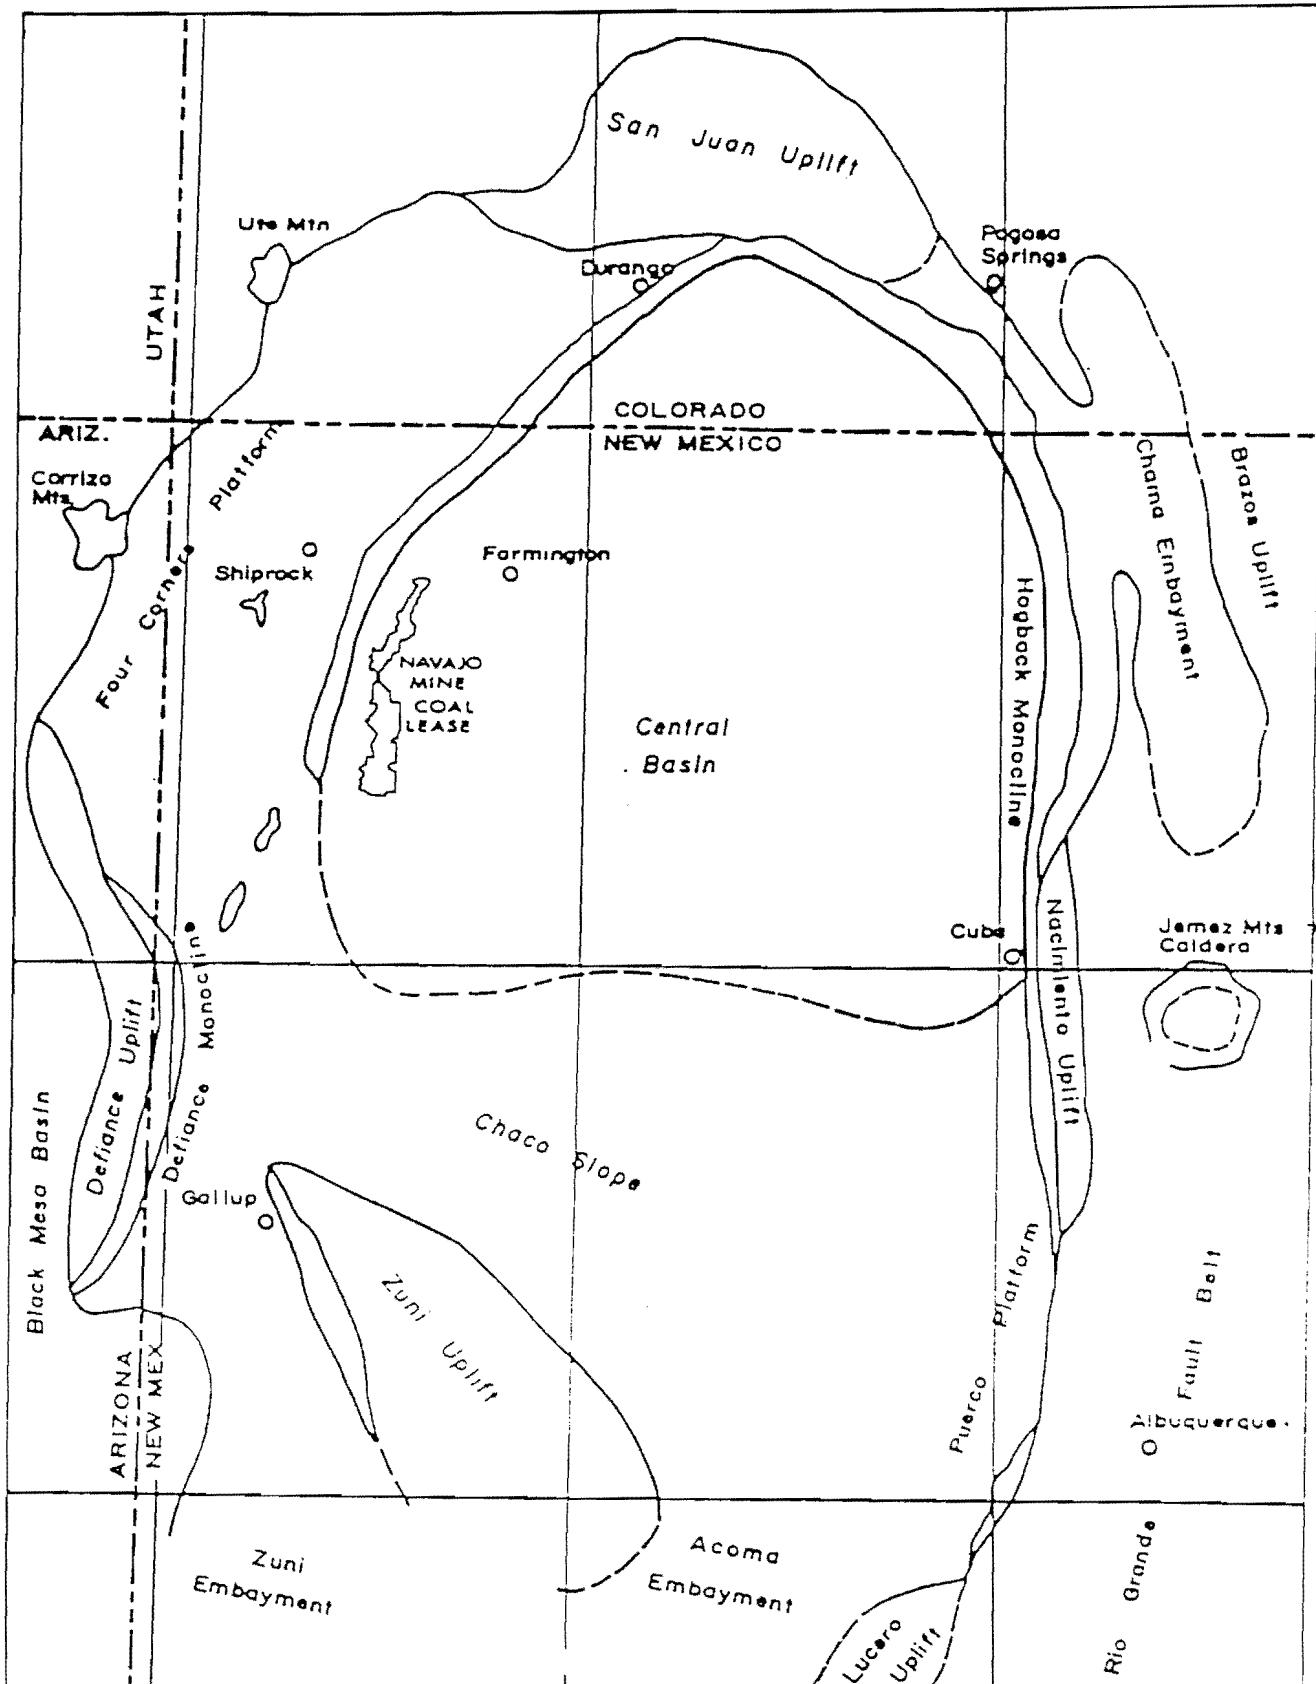


FIGURE 5-1. General structural features of the San Juan Basin of northwestern New Mexico

A generalized stratigraphic section and geologic map of the permit area are presented in FIGURES 5-2 and 5-3.

The Lewis Shale contains the last purely marine shales deposited in the Upper Cretaceous epeiric seaway. It consists of gray to black shale with some interbeds of sandy limestone, brown sandstone, and bentonite.

The Pictured Cliffs Sandstone conformably overlies and intertongues with the Lewis Shale. This formation consists of both delta-front and barrier-beach sediments and marks the change to a littoral (near-shore) depositional environment (Flores and Erpenbeck, 1981). The upper two-thirds of the Pictured Cliffs sandstone consists of a generally coarsening upward sequence of light gray, fine to medium grained sandstone while the lower one-third of the formation consists of interbedded shale and sandstone. The upper 20 meters of this sandstone is consistently massive, light gray to light brown, fine to medium grained with predominately rounded quartz grains, and has a salt-and-pepper texture. The total thickness of the Pictured Cliffs Sandstone is approximately 110 feet in the permit area.

The Fruitland Formation, which conformably overlies the Pictured Cliffs Sandstone, contains sediments deposited in fluvially influenced delta plain and adjoining back beach-bar depositional environments (Flores and Erpenbeck, 1981). The lithologies of the rock units encountered in the Fruitland Formation include fine to medium grained sandstones, siltstones, sandy and silty claystones, carbonaceous claystones, bentonitic claystones, and coal.

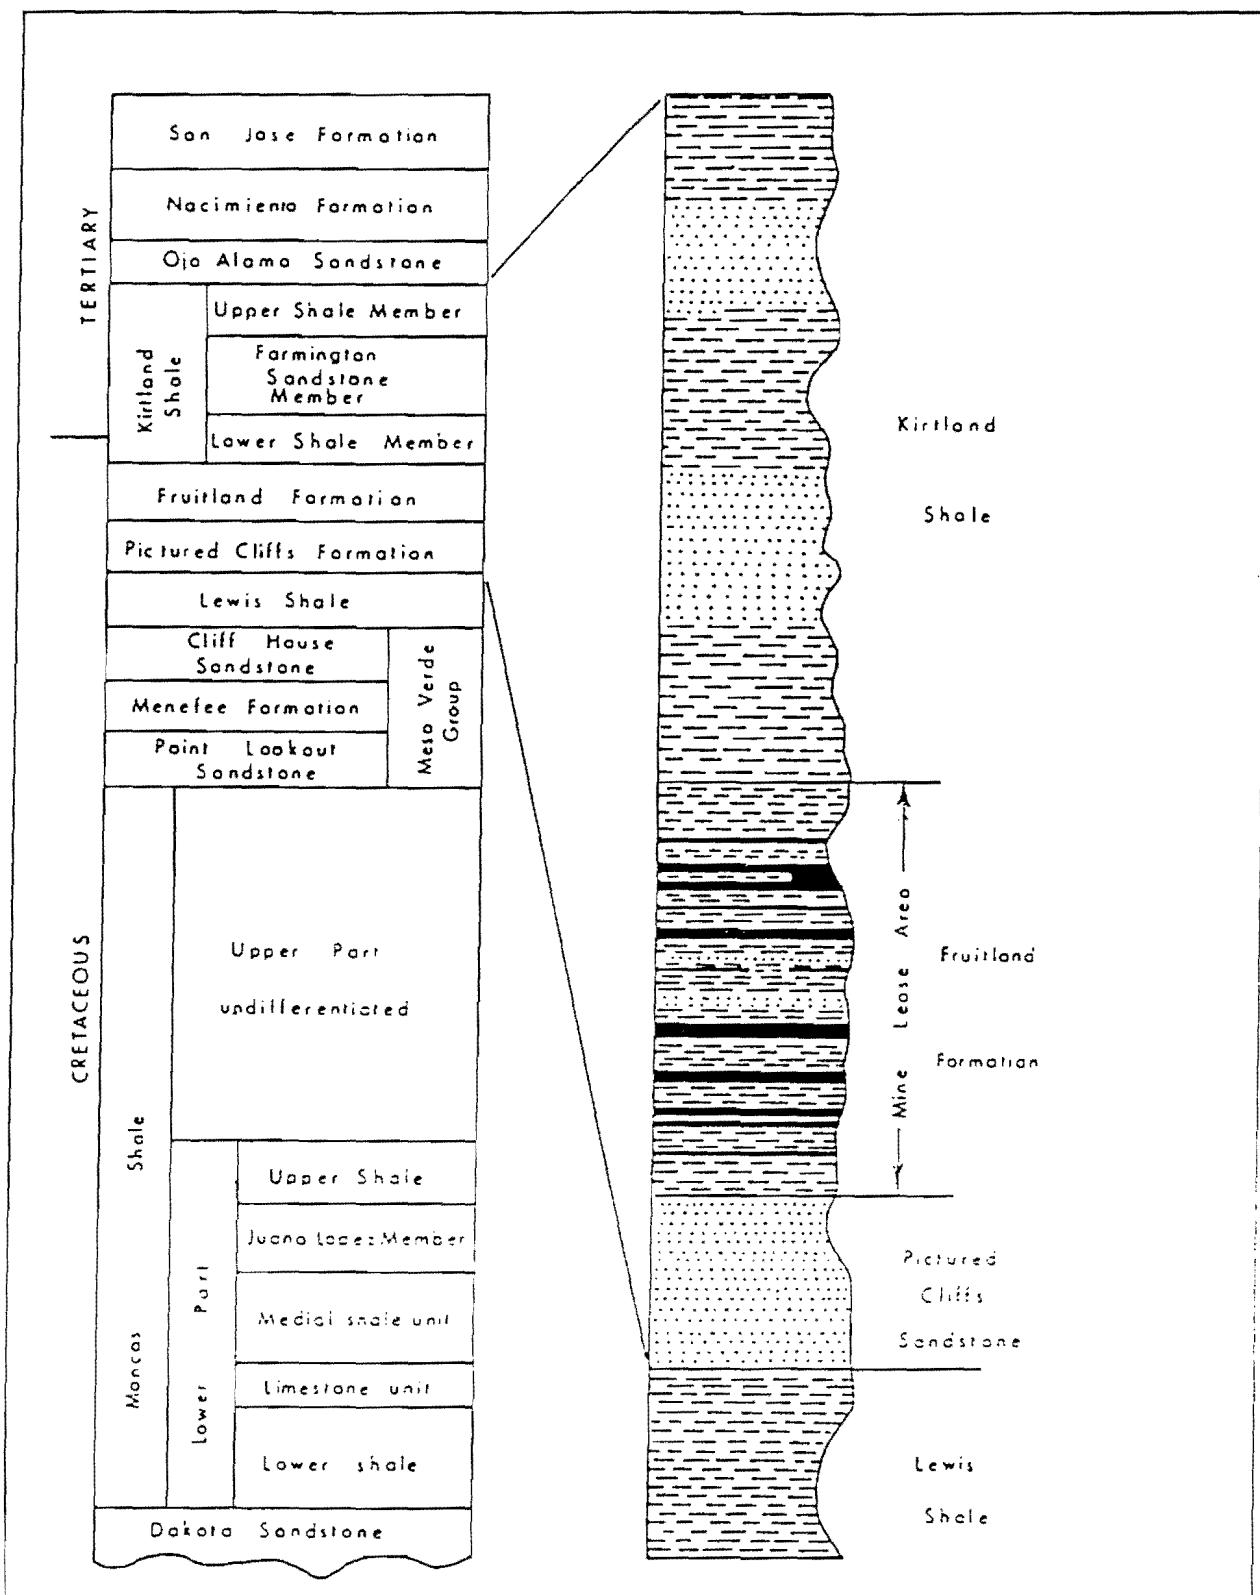


FIGURE 5-2. Stratigraphic nomenclature and generalized stratigraphy of the Upper Cretaceous and Tertiary sediments found on the Navajo Mine coal lease

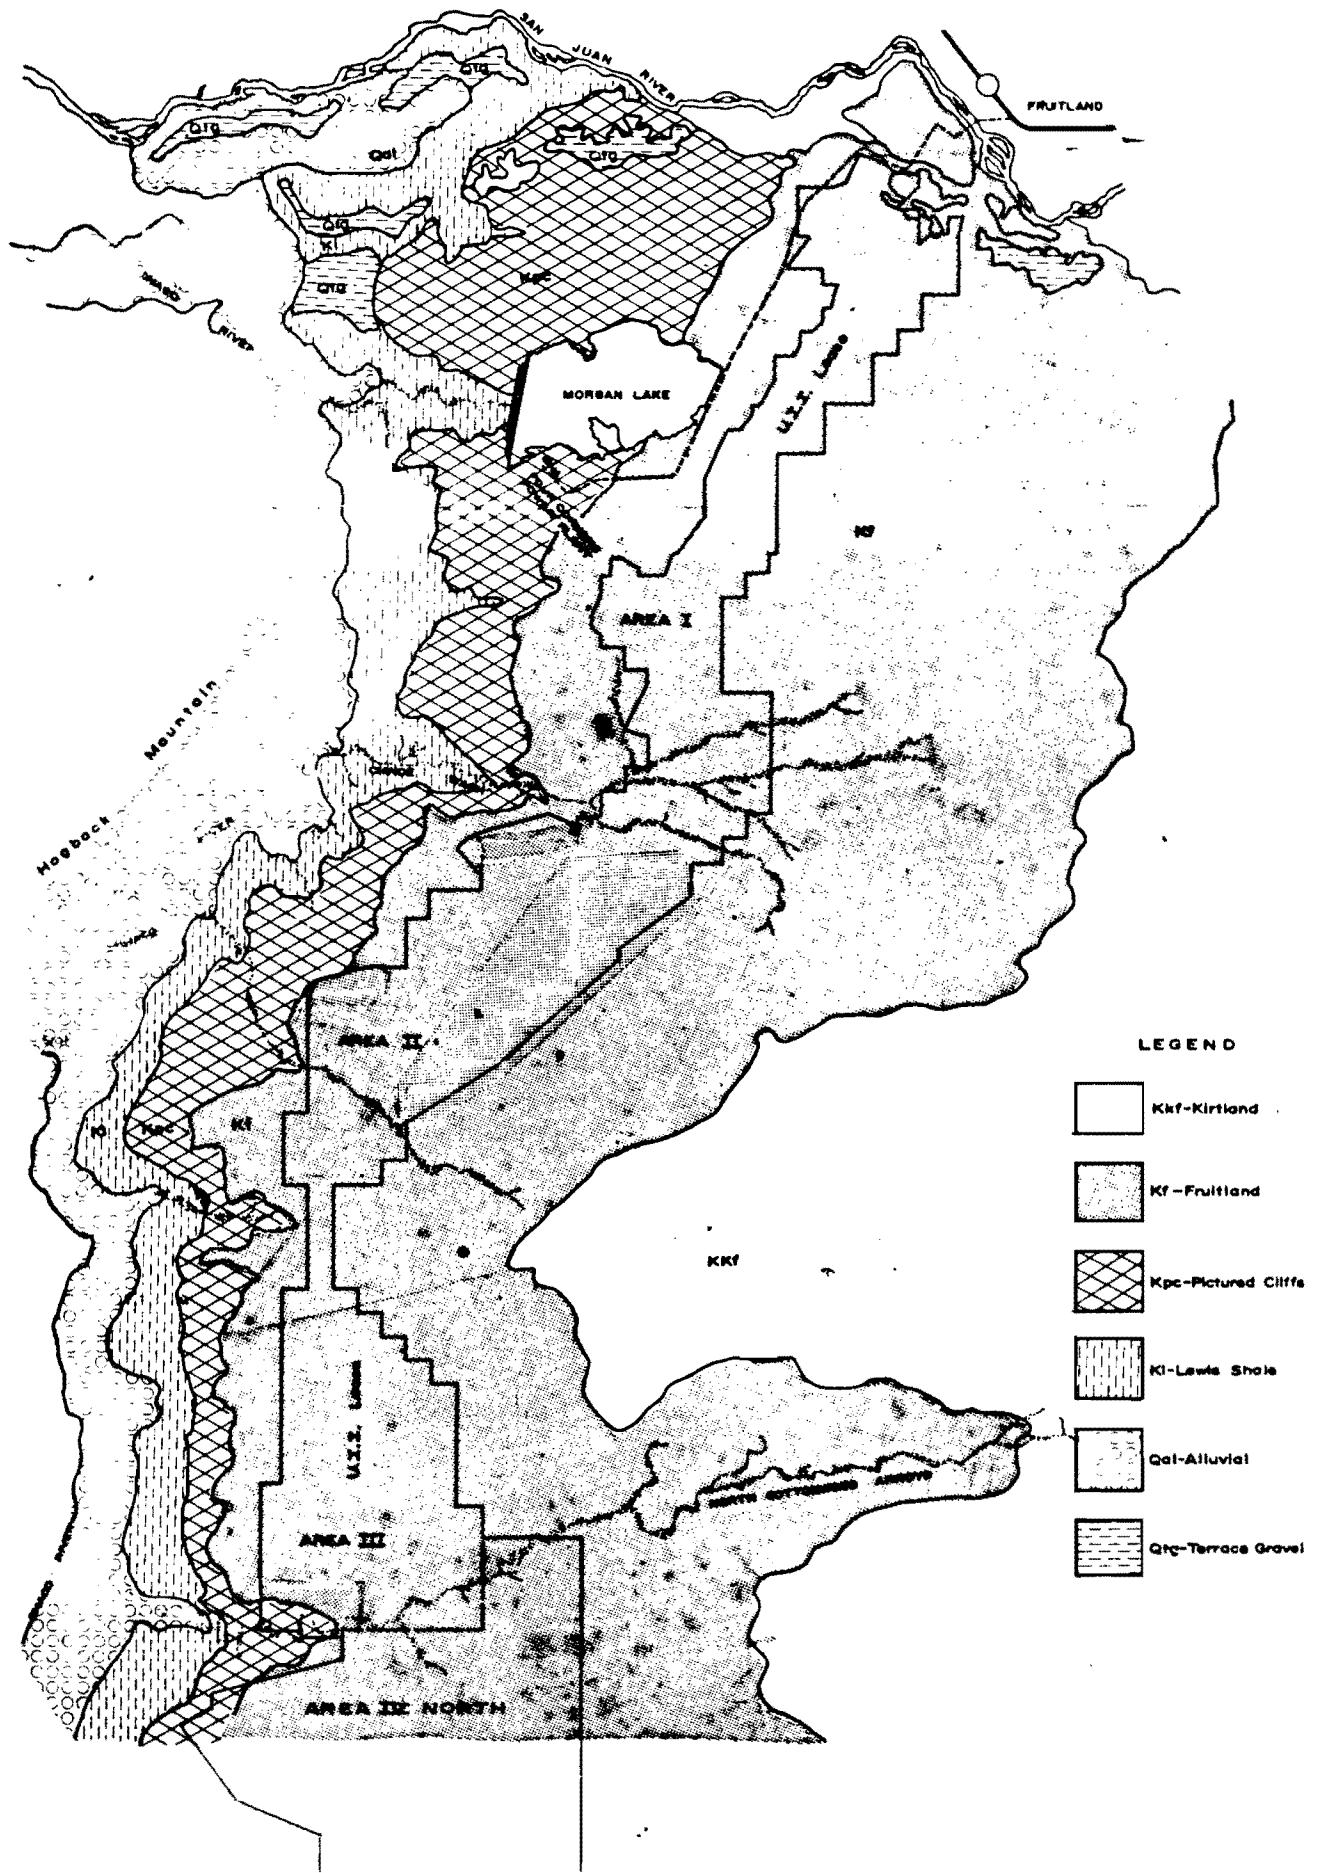


FIG. 5-3 Surface expression of Geologic units on and surrounding the BHP Minerals International Inc., Navajo Mine coal lease.

The Kirtland Shale conformably overlies the Fruitland Formation. This formation is divided into two units, the upper shale member which includes Farmington Sandstone Member, and the lower shale member. Sediments in the Kirtland Shale were deposited in an upland flood-plain environment where aggrading stream channels were separated by narrow, parallel flood plains. The lower shale member is composed of gray claystone shales that contain a few thin interbeds of siltstone and sandstone. The upper shale member is composed of a series of interbedded sandstone lenses and claystone shales. The shale beds in the upper shale member of the Kirtland Shale are much more colorful than those in the lower shale member and are purple, green, white, and gray. No coal beds exist in the Kirtland Shale (Fasset and Hinds, 1971).

Several deposits of Quaternary alluvial and eolian sands occur within the permit area. These are important sources of topdressing material for reclamation.

The economically important stratigraphic interval in the permit area is the lower 250 feet of the Fruitland Formation where 11 different minable Coal Seams occur. Up to seven different minable seams occur in any one location in the permit area. A minable Coal Seam is defined as a seam with a minimum thickness of two feet, a minimum heating value of 6,000 Btu/lb. and an aerial extent and stratigraphic position that makes the seam economically viable to mine. Fruitland Coal Seams are very lenticular in nature and most are minable in very localized areas only.

Geologic information on the minable Coal Seams are presented in:

- a. EXHIBITS 5-1 through 5-4 showing drill hole locations and Coal Seam data,

- b. EXHIBITS 5-5 through 5-12 showing cross-sectional views of the local seams and overburden in both east-west and north-south directions,
- c. EXHIBITS 5-13 through 5-37a showing top of seam structure, overburden isopachs, and seam thickness for each seam, and
- d. The following written section dealing with Coal Seam characteristics.

Supplemental explanation is provided below for map details of EXHIBITS 5-1 through 5-37.

- Two different lines showing the extent of mining exist on the maps for CHAPTER 5. The drill hole locations and seam data maps (EXHIBITS 5-1 through 5-4) have a line showing where mining had progressed to as of April 1985. This line shows the current mine pit limits. All other CHAPTER 5 maps have a line showing where the mine pit boundaries were in December 1977 when Indian lands became subject to Surface Mining Control Reclamation Act (SMCRA) regulations. CHAPTER 5 maps do not show Coal Seam geology for these areas mined before December 1977. The areas mined between December 1977 and April 1985 can be defined by overlaying any of the CHAPTER 5 maps with the appropriate drill hole location and seam data map. See CHAPTER 12, EXHIBITS 12-4 through 12-6 for current permit term disturbance limits.

- Several different kinds of lines showing the minable boundaries of the Coal Seams are used on CHAPTER 5 maps. This was done to show the different reasons for limiting the minable area of each seam. The factors that limit the minable area of a seam include the coal crop line, a seam thickness of less than two feet, a heating value of less than 6,000 Btu/lb, and burned areas. Each of these factors responsible for limiting the minable area of each seam have a distinctive line type on Chapter 5 maps.
- The overburden isopach lines on the seam structure and overburden maps (EXHIBITS 5-13 through 5-37) include the thickness of all existing material above that seam, including the thickness of the upper Coal Seams.
- No Coal Seam geology is shown for portions of the Navajo lease that are designated as surface land use areas because BHP Minerals does not yet have the right to mine the coal underlying these areas.

## 5.2 SEAM CHARACTERISTICS

The analytic information for the coal seams is contained in Appendix 5A while that for the overburden is in Appendix 5B

### 5.2.1 Coal Seam No. 2A (EXHIBITS 5-13 through 5-14b)

Stratigraphic Position - directly overlies the Pictured Cliffs Sandstone Formation.

Seam Characteristics - This seam is a split of Seam 2B. The seam becomes thin and completely pinches out in a northeasterly direction. The seam is located in the southern one-eighth portion of the permit area.

Average Minable Coal thickness - 3.2 feet.

Average Minable Coal Grade - 9545 Btu/lb.

Average total sulfur content – 1.10%

Parting Characteristics - No significant rock partings occur in this seam.

Cropline and Burn Areas - The seam crops out off the permit area to the west. No Burn Area exists in this seam within the permit area.

5.2.2            Coal Seam No. 2B

(EXHIBITS 5-15 through 5-16b)

Stratigraphic Position - Except where 2A splits from this seam, the seam overlies the Pictured Cliffs Sandstone. This seam is known as the bottom most minable Coal Seam.

Seam Characteristics - The seam is located in mine property Areas III and IV North. Minable thickness varies from 2.0 feet up to 11.0 feet. The seam becomes thicker to the southwest. The Coal Seam pinches out at the north end of Area III and along the east property boundary of Area IV North.

Average Minable Coal Thickness - 6.4 feet.

Average Minable Coal Grade - 9531 Btu/lb.

Average Total Sulfur – 1.10% Area III.

0.79% Area IV North

Parting Characteristics - No significant rock partings occur in this seam. Thin bone coal and thin tonstein lenses occur throughout the seam.

Cropline and Burn Areas - The only significant burn area is located in the extreme southwest corner of Area IV North. The cropline is located on the west side of the mine property outside of the coal lease.

5.2.3        Coal Seam No. 3

(EXHIBITS 5-17 through 5-18b)

Stratigraphic Position - Varies from 8 feet to 27 feet above the No. 2 Coal Seam.

Seam Characteristics - This seam is one of the dirtier seams in the Navajo Mine area. The coal bed lies within mine Areas III and IV North. In the southwest section of Area IV North the seam merges with the upper Seam No. 4 forming a single seam.

Average Minable Coal Thickness - 4.5 feet.

Average Minable Coal Grade - 8988 Btu/lb.

Average Total Sulfur – 1.06%

Parting Characteristics - No significant rock partings occur in the seam. Thin bone coals, carbonaceous shales, and tonsteins are fairly abundant within the seam.

Cropline and Burn Areas - The only significant burn area is located in the extreme southwest corner of the permit area. The cropline is located well beyond the coal lease on the west side of the property.

5.2.4

Coal Seam No. 4

(EXHIBITS 5-19 through 5-20b)

Stratigraphic Position - Varies from 0 feet to 19 feet above the No. 3 Coal Seam.

Seam Characteristics - The seam is located in Areas IV North, III and II. The seam pinches out abruptly at the north end of Area II. The seam becomes thicker than average towards the northern section of Area III and into Area II. The seam pinches out in the southwest section of Area III and merges with Seam No. 3 along the western edge of Area IV North within the permit boundary.

The seam has a name change at the Area II and III mining boundaries, where Seam No. 4 becomes Seam No 6B. The reason for this name change is that seam numbers were assigned to each coal bed before it was known that they were actually the same seam. Recent extensive exploration drilling programs brought this error to light. To avoid confusion in this permit application, all the accompanying maps and reserve figures for Seam No. 4 include only that part of the seam located in Areas III and IV North.

Average Minable Coal Thickness - 6.0 feet.

Average Minable Coal Grade - 9409 Btu/lb.

Average Total Sulfur – 0.73%

Parting Characteristics - The seam has no significant rock partings. Partings are rare except for very minor tonsteins, bone coal, and carbonaceous shale lenses which occur throughout the seam.

Cropline and Burn Areas - The seam cropline is beyond the permit boundary west of the mine property. The only significant burn area known in this seam is in the extreme southwest corner of Area IV North.

5.2.5        Coal Seam No. 5

(EXHIBITS 5-21 through 5-21b)

Stratigraphic Position - Varies from 13 feet to 23 feet above the No. 4 seam.

Seam Characteristics - The seam exists in only a small area in the western half of Area IV North.

Average Minable Coal Thickness - 2.7 feet.

Average Minable Coal Grade - 8527 Btu/lb.

Average Total Sulfur – 0.73%

Parting Characteristics - This seam has no rock partings except for thin tonsteins, bone coals, and carbonaceous shale lenses within the seam.

Cropline and Burn Areas - A small burn area exists in the southwest corner of Area IV North. The seam crops out in one small area on the northwest edge of the minable area.

5.2.6        Coal Seam No. 6A

(EXHIBITS 5-22 through 5-23a)

Stratigraphic Position - Seam No. 6A occurs in two separate areas in the permit area. In the southern section of Area III the seam varies 9 feet to 54 feet above Coal Seam No. 4, and in the southern section of Area II the seam varies from 30 feet to 40 feet above the Pictured Cliffs Sandstone.

Seam Characteristics - In the southern section of Area III, the seam splits from Coal Seam No. 6B. In Area II, the seam is limited to a very small area. The seam thins to the northwest.

Average Minable Coal Thickness - Area III - 2.3 feet  
Area II - 3.9 feet

Average Total Sulfur - 0.72%.

Parting Characteristics - No significant rock partings occur in the seam. Thin tonsteins, bone coals and carbonaceous shale lenses occur in Area III. The Area II seam has nodules of bone coal occurring throughout the seam.

Cropline and Burn Areas - No croplines or burn areas exist in Area III. The seam extends in a fanlike fashion over a small area. In Area II the seam has no burn areas within the permit boundary. The seam crops out well beyond the permit boundary to the west.

### 5.2.7 Coal Seam No. 6B

(EXHIBITS 5-24 through 5-26b)

**Stratigraphic Position -** In Area III and Area IV North, Seam No. 6B varies from 5 feet to 37 feet above Seam No. 4 and 6 feet above Seam No. 5, where No. 5 exists. In Area II, the seam varies from 15 feet to 45 feet above the Pictured Cliffs Sandstone.

Seam Characteristics - This seam is considered to be one of the better quality Coal Seams in terms of thickness and coal grade in existence in Area IV North and the southern part of Area III. In most of Area II, Seam No. 6B is the lowest minable Coal Seam. The seam is consistent in thickness and quality in this area. also. As explained in the section discussing Seam No. 4, Seam No. 6B in Area II correlates to Seam No. 4 in Area III. The maps and coal reserve figures for Seam No. 6B given in this permit application include those parts of Seam No. 6B in Area II that are actually Seam No. 4. Any confusion generated by this miscorrelation can be relieved by studying the enclosed maps and cross sections. With the addition of Block B to the permit area, Seam 6B varies from 2 feet to 45 feet above the Pictured Cliffs Sandstone.

Average Minable Coal thickness - Area IV North, Area III - 4.5 feet.  
Area II - 8.2 feet.

Average Minable Coal Grade - Area IV North, Area III - 9704 Btu/lb.  
Area II - 9522 Btu/lb.

Average Total Sulfur - 0.72%.

**Parting Characteristics** - There are no significant rock partings within the seam. Very thin tonsteins and bone coal lenses are abundant throughout this seam.

Cropline and Burn Areas - In mine Area IV North the seam cropline is visible in the bluff line along the coal permit area. In the southern portion of Area III the cropline is outside of the permit area.

The seam cropline no longer exists in Area II and has been mined through prior to December 16, 1977. The cropline not affected by the mining activity extends well beyond the permit area in the southern portion, and a fairly extensive burn exists in the central portion of Area II.

5.2.8            Coal Seam No. 7

(EXHIBITS 5-27 through 5-29b)

Stratigraphic Position - Varies from 4 feet to 128 feet above Seam No. 6.

Seam Characteristics - This seam is one of the most consistent seams in the permit area. The seam extends from Area IV North, through Area III, and up to the north end of Area II. One pinchout occurs along the northeast coal lease line, and a second pinchout occurs at the Area II and III mine area boundary. The seam splits to 7A and 7B throughout much of the permit area.

Average Minable Coal Thickness - 4.9 feet.

Average Minable Coal Grade - 9900 Btu/lb.

Average Total Sulfur – 1.37%.

Parting Characteristics - No significant rock partings occur in the seam.

Cropline and Burn Areas - The cropline extends along the bluffs and into the valley floor in Area IV North, then trends northward crossing the Cottonwood Arroyo and extending to the west of Area III. In the southwest portion of Area II the cropline runs outside of the permit area. The cropline for the rest of Area III has been disturbed by mining operations. The only significant burn areas known to exist in this seam are located in the central section and a very small portion of the northwest section of Area II.

5.2.9      Coal Seam No. 8A

(EXHIBITS 5-30 through 5-32b)

Stratigraphic Position - Varies from 4 feet to 25 feet above Seam No. 7.

Seam Characteristics - the seam is fairly extensive and widespread. The seam is located within the permit boundary of Area IV North, Area III, and the Southern section of Area II. Due to the numerous irregular erosional patterns, the Coal Seam pinches out before the coal actually crops. A pinchout also occurs along the eastern boundary of Area IV North. This seam splits from Seam No. 8B in the south part of Area II and along the northeastern portion of Area III.

Average Minable Coal Thickness - 6.0 feet.

Average Minable Coal Grade - 9310 Btu/lb.

Average Total Sulfur – 0.74%.

Parting Characteristics - No significant rock partings occur in the seam.

Cropline and Burn Areas - Where irregular erosional patterns occur near the seam cropline, coal quality and minable thickness cutoff lines have been established. The seam has no known burn areas.

5.2.10      Coal Seam No. 8B

(EXHIBITS 5-33 through 5-36b)

Stratigraphic Position - Varies from 16 feet above Seam No. 8A in Area IV North, Area III, and the southern section of Area II, and varies from 2 feet to 23 feet above Seam No. 7 in Area II. In Area I the seam overlies the Pictured Cliff Sandstone.

Seam Characteristics - This seam consists of a fairly clean coal that exists the entire length of the permit area along the eastern boundary. A major portion of the coal has been mined out in the northern half of the permit area. Seam No. 8A splits from this seam in the south section of Area II.

Average Minable Coal Thickness - 11.5 feet.

Average Minable Coal Grade - 9143 Btu/lb.

Average Total Sulfur – 0.72%.

Parting Characteristics - No major rock partings exist in the seam. However, minor partings of bone coal and carbonaceous shale are common.

Cropline and Burn Areas - Due to irregular erosional patterns around the cropline, average minable thickness and average minable coal grade cutoff lines have been established for Area III and Area IV North. A large portion of the seam has been mined out in the northern half of the permit area. Some scattered burn areas exist along the cropline in Area IV North.

5.2.11        Coal Rider Seam Above Seam No. 8B  
                (EXHIBITS 5-37, 5-37a)

Stratigraphic Position - Varies from 2 feet to 60 feet above Seam No. 8B.

Seam Characteristics - The seam occurs in a small area in the northern section of Area I where extensive mining has taken place. This seam is not consistent and several "window" pinchout areas exist in the Coal Seam.

Average Minable Coal Thickness - 3.4 feet.

Average Minable Coal Grade - 10,202 Btu/lb.

Average Total Sulfur – 0.72%.

Parting Characteristics - No significant rock partings exist in the seam.

Cropline and Burn Areas - No burn area is known to exist in the seam. The cropline has been disturbed and mined through prior to December 16, 1977.

5.2.12        Other Coal Seams

Several other thin, shaley, bone Coal Seams exist in the Fruitland formation. At present, there are no plans to mine these seams.

#### 5.2.13 Aquifers

Some of the Fruitland Formation Coal Seams in the permit area are water-bearing. However, CHAPTER 6, GROUNDWATER concludes that classifying these strata as aquifers is questionable because their low permeability and production rates, and the naturally poor quality of their water preclude their use as a water source in the region. See CHAPTER 6 for a detailed description of the Groundwater hydrology.

#### 5.3 **GEOLOGIC HAZARDS**

The permit area is located in a stable seismic area. Historical records indicate no earthquakes of sufficient magnitude to damage structures within hundreds of miles of the permit area. The area is classified Zone 1 (minimum risk) by ESSA/Coast and Geodetic Survey (U.S.D.I. Bureau of Reclamation, 1975).

Previous mining in the permit area was limited to a small underground operation at the north edge of Area I and a small surface pit in the northern part of Area II. These small mines were later mined through by BHP Minerals, which has mined the permit area continuously since 1963.

The only geologic hazards existing in the permit area are those hazards associated with exposed highwalls and spoil piles. Possible hazards include rock falls and mass failures. To date, only one mass highwall failure has been documented in the permit area. Spoil failures, although relatively common, occur in a slow, controlled manner which minimizes any risk of injury or property damage. Rock falls are a fairly common occurrence in active pits but are rare in older pits. All geologic hazards associated with mining are minimized in the permit area by strict enforcement of the Mine

Safety Health Administration (MSHA) regulations requiring restricted access to mining areas.

Occasionally, small faults in the highwall will fail. These areas are known, and are watched for telltale cracks. The dragline bucket is used to scale small areas of loose rock that are hung up on the highwall.

## 5.4 OVERBURDEN CHARACTERISTICS

### 5.4.1 Introduction

The overburden material at Navajo Mine has been sampled and characterized in the North Area and Areas II, III and IV North. A total of 33 drill holes were drilled and sampled in the years 1973, 1979, 1982, 1984, 1987, and 1989. In the special condition response (2F) of November 22, 1989, Navajo Mine had planned to report the overburden data from each of the drill holes for this permit application. However, In accordance with the conversations of March 23, 1990, between Navajo Mine Environmental Quality Department personnel and Office of Surface Mining Reclamation and Enforcement (OSMRE) personnel, it was agreed to report sampling for only 1987 and 1989. FIGURE 5-4 shows the locations of the drill holes. TABLE 5-1 identifies the location, elevation and depth of each drill hole used in this report. APPENDIX 5-A contains the lithologic drill logs for 1987 and 1989. The overburden chemical and physical analyses are presented in APPENDIX 5-B.

Overburden is defined here as consolidated geologic strata from the Fruitland Formation that lies above, between, and immediately below the lowest minable Coal Seam. Overburden samples are represented by undisturbed cores which are crushed and subsampled for chemical and physical analysis. The methods of analysis are included in APPENDICES 5-C and 5-D.

#### 5.4.2 Overburden Sampling

Five drill holes were sampled in 1987, all in Area IV North (Holes 487-01 through 487-05).

Locations for each drill hole at Navajo Mine are shown in FIGURE 5-4 and TABLE 5-1. The distance between drill holes averages 6500 feet (1 hole/1000 acres) and ranges from 5100 to 8600 feet.

Nine drill holes were sampled in 1989: five in Area II (289-01 through 289-05) and four in Area III (389-48 through 389-51). Locations of the drill holes are shown in FIGURE 5-4 and TABLE 5-1. The average distance between drill holes in Area II is 5450 ft. The distance between drill hole 389-48 and 389-49 located in the Lowe Pit mining area is approximately 5400 feet (1 hole/670 acres). The distance between drill hole 389-50 and 389-51 located in the Dixon Pit mining area is approximately 3400 feet (1 hole/265 acre). The core logs are reproduced in APPENDIX 5-A.

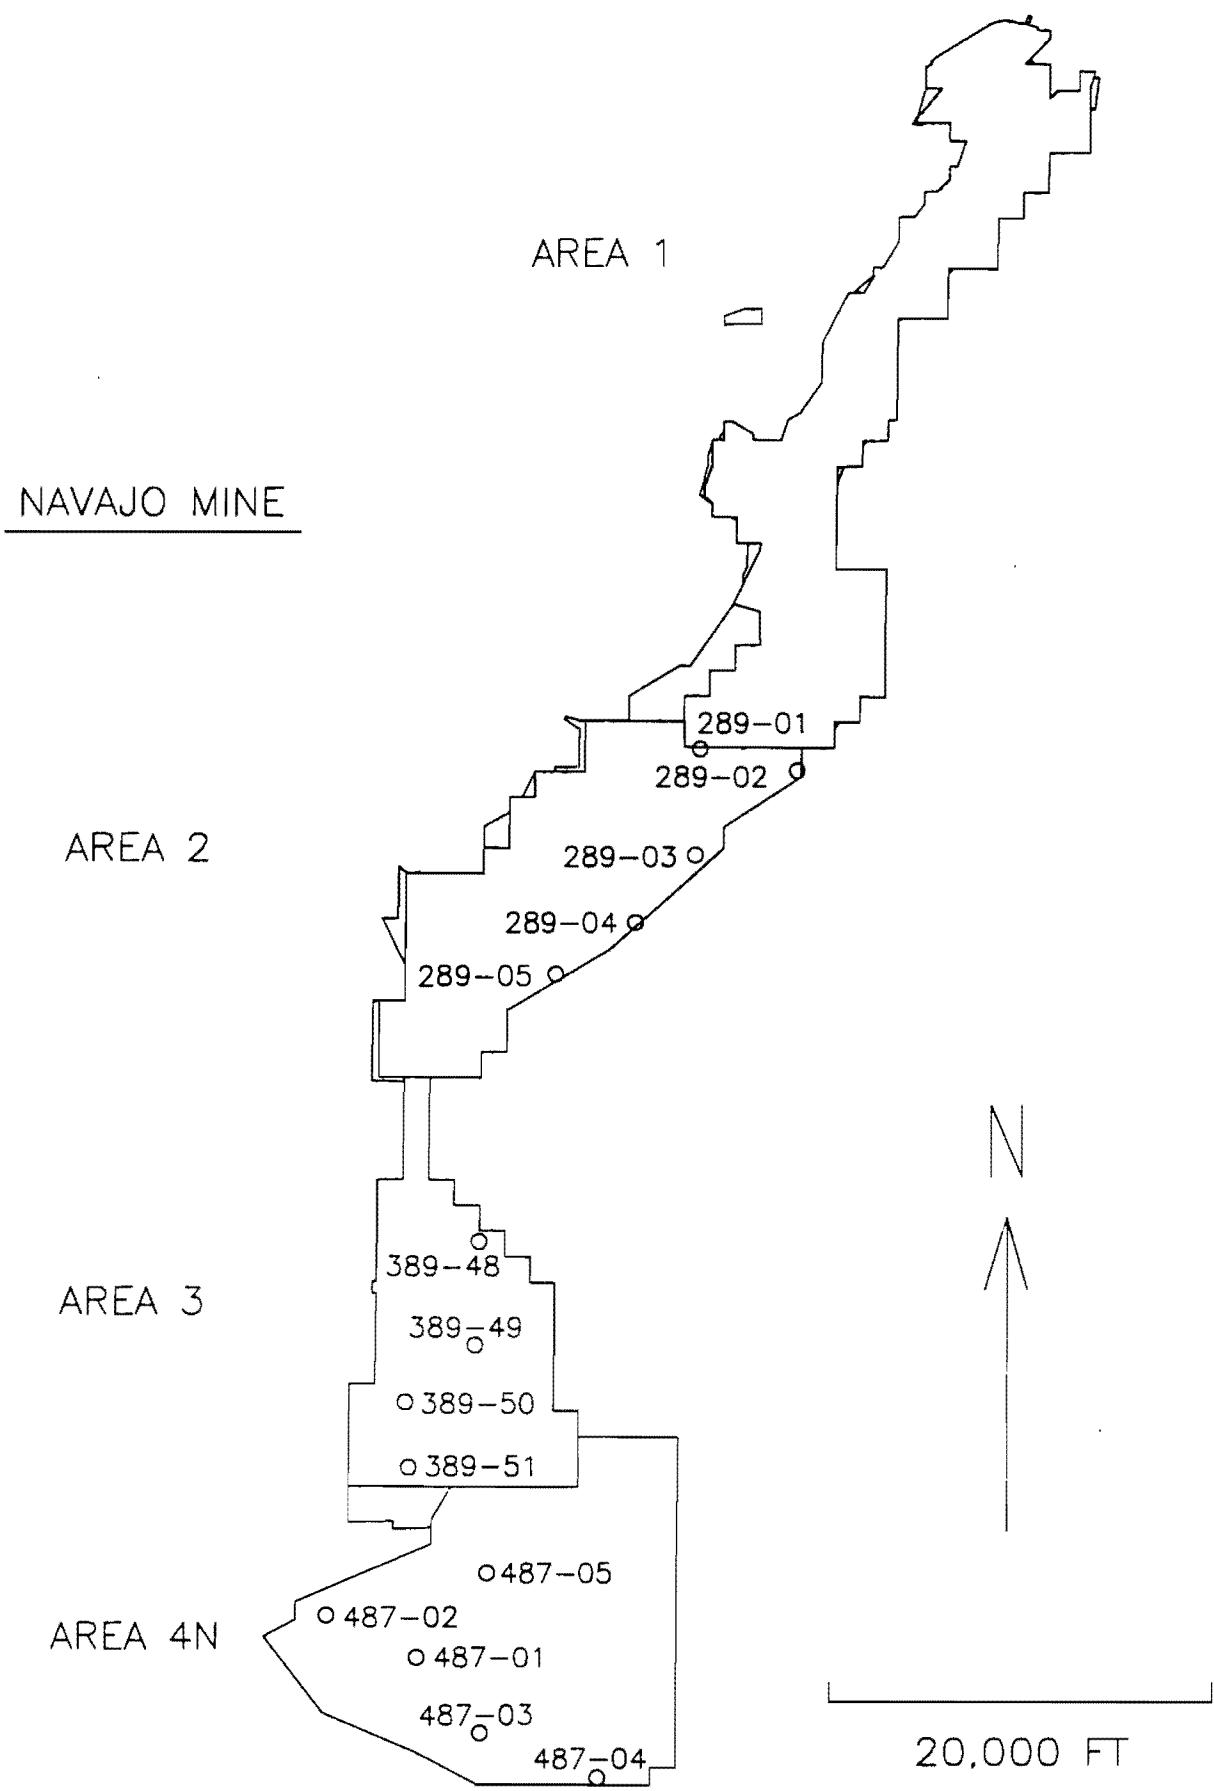


FIGURE 5-4. Overburden Drill Hole Locations.

**TABLE 5-1**  
**OVERBURDEN DRILL SITE LOCATIONS.**

YEAR	SITE NO.	EASTING (ft)	NORTHING (ft)	ELEVATION (ft)	HOLE DEPTH (ft)
1987	487-01	297228	2001943	5405.0	171.0
	487-02	292615	2004150	5427.0	150.0
	487-03	300508	1998023	5392.0	205.0
	487-04	306666	1995716	5409.0	240.0
	487-05	300869	2006336	5372.0	199.0
1989	289-01	311850	2048950	5456.0	266.0
	289-02	315995	2047825	5381.0	256.0
	289-03	311610	2043470	5446.0	276.0
	289-04	308516	2039963	5453.0	260.0
	289-05	304350	2037300	5419.0	212.0
	389-48	300393	2023481	5378.0	217.0
	389-49	300206	2018130	5373.0	205.0
	389-50	296626	2015229	5337.0	164.0
	389-51	296785	2011839	5350.0	165.0

Drill holes were cored from ground surface to 10 feet below the bottom minable Coal Seam and continuous core samples were collected. The undisturbed cores were logged by a geologist, sealed, boxed, and stored for analysis. Each geologic stratum was sampled for analysis per OSM - Western Field Office (WFO) instructions, i.e. major strata were sampled in five foot increments. Strata less than one foot thick were combined with adjacent layers. A four foot stratum of shale containing several two to three inch sandstone lenses will be represented by a single sample with documentation identifying lithologic change. Once the samples were selected the cores were crushed to pass a two mm sieve.

The 1987 cores were analyzed by ACZ Inc., Laboratory Division of Steamboat Springs, Colorado for the parameters below:

pH	(1:2 soil to water extract)
Electrical Conductivity (EC)	(1:2 soil to water extract)
ESP (Exchangeable Sodium Percentage)	
Sodium Adsorption Ratio (SAR)	(1:2 soil to water extract)
Ca, Mg, Na (water soluble)	(1:2 soil to water extract)
Boron (hot water soluble)	
Selenium (water soluble)	
Organic Carbon	
Calcium Carbonate	
Organic, Pyritic, Sulfate, and Total Sulfur	
Acid-Base Potential	
Texture	
Saturation	(1:2 soil to water extract)

The 1989 cores were analyzed by Inter-Mountain Laboratories (IML) of Farmington, NM for the following parameters.

pH	(saturated paste)
Electrical Conductivity (EC)	(saturated paste)
Sodium Adsorption Ratio (SAR)	(saturated paste)
Ca, Mg, Na (water soluble)	(saturated paste)
Boron (hot water soluble)	
Selenium (water soluble)	
Organic Carbon	(loss on ignition)
Neutralization Potential	
Organic, Pyritic, Sulfate, and Total Sulfur	
Acid-Base Potential	
Texture	(hydrometer)
Saturation	(saturated paste)

The overburden chemical and physical analytical results are contained in APPENDIX 5-B.

The methods of analysis for the physical and chemical properties of the samples are identified in APPENDICES 5-C and 5-D. pH, EC, Ca, Mg, Na, and % saturation were all determined using 1:2 (soil:water) extracts for the 1987 samples in contrast to saturated paste extracts for the 1989 samples. A common result of using a 1:2 extract rather than using a saturated paste extract in a system high in sodium is to increase the pH value and reduce the SAR and EC values. The OSMRE Root Zone Suitability Criteria for Navajo Mine are based on saturated paste extracts.

Total Selenium was determined by one sample that best represented the middle of a lithologic layer (geologic stratum) per OSM-WFO instruction. Since total selenium values are not available for all samples analyzed it has not been used as a parameter to determine root zone suitability. The purpose of determining total selenium was to identify a direct relationship between soluble selenium and total selenium. Data from this study does not support a correlation between these two parameters.

Fourteen samples sites (TABLE 5-1) were cored to provide the information for this survey. A total of 2370 feet of core were sampled (APPENDIX 5-B). The average depth of the holes was 209 feet and the average thickness of mined overburden was 169 feet per hole. A total of 680 samples were analyzed as overburden and the data are presented in APPENDIX 5-B. Average values for the analyses are presented in TABLE 5-2. These averages are weighted by the lengths of the individual samples.

#### 5.4.3 Summary

The general nature of the overburden is a geologic formation composed of sandstone, siltstone, claystone, mudstone and shale. The variation in the lithology of the overburden is a result of the environment in which the Fruitland Formation was deposited. The cretaceous aged land forms were comparable to modern deltas and shorelines receiving successive deposits of sand, silts and clays. The ancient swamps (coal deposits) were buried by meandering stream deposits that contained high amounts of salts.

**TABLE 5-2**  
**WEIGHTED AVERAGE OF OVERTBURDEN ANALYSES**

Drill Hole	Total Sample (ft)	pH	EC (mmhos/cm @25 c)	SAR	Boron (ppm)	H <sub>2</sub> O Sol. Selenium (ppm)	Pyritic ABP (t/1000T)	Clay %	Sat %
487-01	121.0	9.1	1.55	20.9	1.89	0.10		37.71	124.9
487-02	122.6	9.0	1.16	32.4	0.94	0.08		28.69	103.0
487-03	152.2	9.1	1.25	34.7	0.89	0.07		34.80	96.3
487-04	190.1	9.2	1.64	38.7	1.04	0.13		44.49	102.1
487-05	159.8	8.8	1.62	34.4	1.25	0.06		36.23	94.1
289-01	229.5	8.5	2.81	30.9	0.46	0.02	52.97	20.53	83.2
289-02	228.8	8.5	2.87	27.5	0.65	0.04	47.53	24.50	108.6
289-03	244.8	8.4	2.13	26.7	0.79	0.08	41.09	27.31	96.1
289-04	227.4	8.3	2.98	29.8	0.95	0.08	43.35	31.70	97.5
289-05	165.1	8.4	3.39	28.1	0.65	0.04	61.23	34.58	96.4
489-48	163.8	8.5	4.44	33.1	0.29	0.03	53.79	27.64	95.5
489-49	145.4	8.5	3.80	25.9	0.35	0.04	43.54	28.46	88.2
489-50	107.6	7.7	5.77	32.4	0.40	0.02	37.28	23.68	82.6
489-51	111.8	8.5	3.44	32.9	0.38	0.03	70.15	23.19	74.8
Total	2,369.9								
WTD AVG	169.3	8.6	2.72	30.5	0.77	0.06	49.29	30.11	96.2

The strata are mostly tan or gray and gray shale dominates. pH values are highly alkaline ( $\text{pH} > 8.0$ ) with few examples of strongly acid material. It is most frequently nonsaline ( $\text{EC} < 4 \text{ mmhos/cm}$ ) but the dominant soluble cation is sodium (SAR values frequently above 18). The fine earth textures of crushed samples are most frequently clay loams and silty clay loams. The clays are commonly highly expansive and believed to be smectites because the saturation percentages are high, frequently exceeding 85%. The potential to form acidic material from the oxidation of sulfur exists but is not common. It is expected that these acid-forming materials will not be a concern but will help reduce the dominantly high pH of the material.

Two trace elements of interest are boron and selenium. Elevated levels of the soluble forms are not common and when averaged throughout the mined spoil are expected to present only a minor problem. Total selenium frequently exists at levels higher than the established suitability criteria. In light of the limited information about selenium, total selenium may require additional information before it can be used as a criterion for rooting zone material.

Geostatistical models to predict the overburden characteristics have not been used and are not expected to be successful for two reasons. First, the strata are not continuous or uniform over large areas. Modeling would require an extremely large number of closely spaced samples. Second, there does not appear to be a unique property or characteristic of the strata that can be used to predict the suitability of the overburden. Strata meeting the suitability criteria seems to result from being near the surface rather than having identifiable characteristics (e.g. rock type, color or hardness).

There is an uncertainty of extrapolating the overburden characteristics and subsequently extrapolating its suitability for revegetation success. The present emphasis is to develop spoil management programs and reduce the emphasis on extensive drilling and sampling of the overburden.

The Coal Seams are more uniform and continuous than the overburden strata and therefore are more easily modeled by geostatistics than the overburden. The Coal Seams have been successfully modeled for general planning (location and thickness) by using drill holes located on approximately 1000 foot centers.

## 5.5 REFERENCES

ASTM Method 513-82, Acid Neutralization-Calorimetric Detection of CO<sub>2</sub>.

ASTM Method 4129-82, Hi-Temp Combustion-Calorimetric Detection of CO<sub>2</sub>.

EPA 600/4-79-054, 1983.

Fasset, J.E., and J.S. Hinds. 1971. Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado. U.S. Geological Survey Professional Paper 676.

Flores, R.M., and M.F. Erpenbeck. 1981. Differentiation of delta front and barrier lithofacies of the Upper Cretaceous Pictured Cliffs Sandstone, southwestern San Juan Basin, New Mexico. The Mountain Geologist, v. 18, no. 2, p. 23-34.

Page, A.L., R. H. Miller, and D.R. Keeney. 1982. Methods of Soil Analysis. Number 9 Part 2. American Society of Agronomy, Inc., Soil Science of America, Inc. Madison, WI

Richards, L.A. 1954. Diagnosis and improvement of saline soils. USDA Agricultural Handbook No. 60.

Sobek, A.A., W.A. Schuller, J.R. Freeman and R.M. Smith. 1978. Field and laboratory methods applicable to overburden and minesoils. US Environmental Protection Agency 600/2-78-054. Cincinnati, OH

U.S.D.I., Bureau of Reclamation. 1975,

**APPENDIX 5-A**

**DRILL HOLE CORE LOGS**

(9/93)

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 487-01, AREA 4N, OVERBURDEN DRILLING PROJECT  
 COLLAR ELEVATION 5405.3, TOTAL DEPTH 200', DRILLER JACK LEDBETTER  
 COORDINATES: N= 2,001,943 CONTRACTOR MOTE DRILLING CO.  
 E= 297,228 DATE COLLARED December 7, 1987  
 SECTION       , T        N, R        W DATE BOTTOMED December 8, 1987

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		
* See Remarks									
TOTALS & AVERAGES									

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						B.O.S. ELEV. A.F. TEMP.
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	% SUL.	
8 A	31.0 - 33.7	2.6	1-0.1	2.7	21.06	16.85	31.91	30.18	6772	.61	----- 2210
7	47.0 - 53.4	6.1	1-0.2	6.3	14.74	11.90	33.14	40.22	9970	1.23	----- 2230
6 B	60.7 - 64.9	4.2	0-0.0	4.2	14.87	14.30	34.19	36.64	9729	.55	----- 2340
3 B	132.4-136.1	3.4	1-0.1	3.5	11.33	24.60	30.75	33.32	8687	.76	----- 2480
3 A	140.4-143.2	2.8	0-0.0	2.8	13.27	24.80	27.90	34.03	8416	2.48	----- 2140
2 B	156.0-158.5	2.5	0-0.0	2.5	15.36	13.04	32.60	39.00	9763	.79	----- 2250
	158.5-159.9	--	Carbon. Shale	1.4	10.63	48.87	20.35	20.15	5164	2.15	----- 2420
2 A	159.9-162.4	2.5	0-0.0	2.5	13.70	10.66	33.74	41.90	10564	.84	----- 2500

REMARKS - \* 0.0' to 5.0' Collected rotary chip cuttings.

5.0' to 171' Continuous core

171' to 200' Rotary/ream for geophysical log.

December 22, 1987  
DATE

Andy C. Erickson  
GEOLOGIST

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	6.0	6.0	Siltstone	Alluvial weathred (plug drilled).	
6.0	6.8	0.8	Sandstone	Weathered	
6.8	7.0	0.2	Shale	Soft, carbonaceous, W/S.S. bands	
7.0	8.2	1.2	Coal	Oxidized	
8.2	8.4	0.2	Shale	Carbonaceous, weathered	
8.4	16.0	7.6	Mudstone	Weathered, w/ gypsum veinlets	
16.0	17.2	1.2	Claystone	Rust colored, baked	
17.2	17.5	0.3	Siltstone	White, hard	
17.5	30.5	13.0	Mudstone	Weathered, hard	
30.5	31.0	0.5	Shale	Carbonaceous, soft	
31.0	31.7	0.7	Coal	Oxidized	
31.7	31.8	0.1	Bony	Parting, hard	
31.8	33.7	1.9	Coal	Hard, slightly oxidized	
33.7	34.0	0.3	Shale	Carbonaceous	
34.0	35.0	1.0	Shale	Organic	
35.0	36.3	1.3	Shale	Gray	
36.3	36.8	0.5	Shale	Grading to sandstone	
36.8	39.1	2.3	Sandstone	Gray, white, silty, organic laminae	
39.1	40.6	1.5	Siltstone	Sandy, organic lamination	
40.6	41.5	0.9	Siltstone	Sandy	
41.5	43.5	2.0	Mudstone	Gray	
43.5	46.8	3.3	Mudstone	Gray, hard	
46.8	47.0	0.2	Shale	Carbonaceous, dark gray, soft	
47.0	53.2	6.1	Coal	Hard, lustre	
53.2	53.4	0.2	Shale	Carbonaceous, dark gray	
53.4	57.3	3.9	Mudstone	Gray, soft	
57.3	57.4	0.1	Shale	Carbonaceous	
57.4	58.2	0.8	Mudstone	Gray, soft	
58.2	58.4	0.2	Coal	Thin seam, hard	
58.4	60.7	2.3	Mudstone	Gray, soft	
60.7	64.9	4.2	Coal	Broken, friable, resinous, FeS2	
64.9	65.3	0.4	Shale	Carbonaceous, hard, dull black	

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
65.3	74.6	9.3	Shale	Light gray, soft to hard, sandy	
74.6	77.9	3.3	Sandstone	Light gray, hard, with soft shale interbedding.	
77.9	84.8	7.8	Shale	Gray, soft	
84.8	93.5	8.7	Shale	Light gray, hard, sandy, calcerous	
93.5	113.5	20.0	Sandstone	Light gray, very hard, fine grained.	
113.5	118.5	5.0	Shale	Gray, soft, broken	
118.5	132.4	13.9	Shale	Gray, soft, friable, intact.	
132.4	133.1	0.7	Coal	Thin lense, hard, lustrous.	
133.1	133.4	0.3	Shale	Tan, hard, parting	
133.4	136.1	2.7	Coal	Resinous, FeS <sub>2</sub> , calcite, hard, lustre	
136.1	136.2	0.2	Shale	Dark brown, soft	
136.2	140.4	4.2	Shale	Gray, soft	
140.4	143.2	2.8	Coal	Resinous, FeS <sub>2</sub> , gypsum-calcite flakes	
143.2	149.0	5.8	Shale	Gray, soft, broken, lost 4' in coring.	
149.0	156.0	7.0	Shale	Gray, soft, intact.	
156.0	158.5	2.5	Coal	Lustre, hard, FeS <sub>2</sub> , resinous	
158.5	159.9	1.4	Shale	Carbonaceous, dark gray, soft, parting	
159.9	162.4	2.5	Coal	Hard, lustre, resinous, FeS <sub>2</sub>	
162.4	168.0	5.6	Shale	Gray, soft	
168.0	168.0	0.8	Coal	Thin seam, hard, calcite	
168.8	171.0	2.2	Sandstone	Pictured cliffs formation.	
171.0	200.0	29.0	Sandstone	Pictured cliffs formation - "Rotary drilled for geophysical logging."	

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 487-02, AREA 4N, Overburden Drilling PROJECT  
 COLLAR ELEVATION 5426.7, TOTAL DEPTH 160', DRILLER Jack Ledbetter  
 COORDINATES: N= 2,004, 150 CONTRACTOR MOTE Drilling Co.  
 E= 292, 615 DATE COLLARED December 8, 1987  
 SECTION       , T        N, R        W DATE BOTTOMED December 8, 1987

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		
* See remarks.									
TOTALS & AVERAGES									

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						B.O.S. ELEV. A.F. TEMP.
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	% SUL.	
7	37.2- 42.9	5.7	0-0.0	5.7	15.78	10.22	34.87	39.13	10096	1.38	----- 2240
6B	76.4- 82.1	5.7	0-0.0	5.7	16.46	10.32	33.54	39.68	10277	.62	----- 2290
	82.1- 84.1	0.6	Carbon. Shale	2.0	14.66	35.64	25.60	24.10	6490	1.76	----- 2290
4	88.5- 91.5	3.0	0-0.0'	3.0	15.40	19.94	31.66	33.00	8759	.96	----- 2300
3B	110.8-119.5	8.0	2-0.7'	8.7	14.11	21.10	31.25	33.54	8810	1.37	----- 2280
2B	135.7-138.8	3.1	0-0.0'	3.1	16.58	23.86	28.89	30.57	8034	1.36	----- 2040
2A	144.8-146.0	0.9	1-0.3	1.2	13.59	28.22	31.59	26.60	7971	1.74	----- 2430
											-----

REMARKS - 0.0' to 5.0' collected rotary chip cuttings.

5.0' to 150.0' continuous core.

150.0' to 160.0' Rotary drilled for geophysical logging.

December 22, 1987

Leonard Dan

DATE

GEOLOGIST

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	2.0	2.0	Alluv.	Brown sand, tan, fine grained.	
2.0	4.0	2.0	Sandstone	Tan, oxidized, weathered, hard	
4.0	5.0	1.0	Shale	Gray-brown, soft, Fe stained	
5.0	6.4	1.4	Shale	Gray, soft, Fe stained.	
6.4	13.1	6.7	Sandstone	Cap rock, tan, hard, oxidized, organic laminae.	
13.1	13.9	0.8	Shale	Gray, soft, oxidized.	
13.9	15.0	1.1	Sandstone	Tan, hard, fine grained	
15.0	15.7	0.7	Shale	Tan, soft, stained	
15.7	16.0	0.3	Sandstone	Hard, Fe stained	
16.0	16.3	0.3	Shale	Tan, soft, Fe stained.	
16.3	16.5	0.2	Sandstone	Hard, light gray, shale interbedded.	
16.5	18.5	2.0	Shale	Tan, soft, oxidized	
18.5	23.9	5.4	Shale	Hard, gray, oxidized, S.S. interbedded.	
23.9	24.7	0.8	Sandstone	Tan, hard, calcareous, fine grained.	
24.7	26.0	1.3	Shale	Gray, soft, Fe stained.	
26.0	27.3	1.3	Sandstone	Light gray, very hard, fine grained.	
27.3	29.4	2.1	Shale	Gray, soft, slightly stained.	
29.4	32.0	2.6	Sandstone	Light gray, hard, to very hard.	
32.0	35.0	3.6	Shale	Gray, soft, with hard s.s. interbedding.	
35.0	37.2	1.6	Shale	Gray, soft	
37.2	42.9	5.7	Coal	Hard, FeS <sub>2</sub> , calcite, lustre, 2 shale lenses.	
42.9	45.0	2.1	Shale	Gray, soft	
45.0	47.7	2.7	Shale	Gray, soft, with minor sandstone streaks.	
47.7	60.0	12.3	Shale	Hard, fine grained, silty streaks.	
60.0	74.8	14.8	Siltstone	Fine grained, hard, calcareous.	
74.8	76.4	1.6	Shale	Gray, soft.	
76.4	82.1	5.7	Coal	Resinous, FeS <sub>2</sub> , calcite, hard, glossy black.	
82.1	83.5	1.4	Shale	Carbonaceous, coal streaks, hard, mostly shaly.	
83.5	84.1	0.6	Coal	Thin lens, hard, FeS <sub>2</sub>	
84.1	88.5	4.4	Shale	Gray, soft	
88.5	91.5	3.0	Coal	Hard, brittle, broken, FeS <sub>2</sub> , lustre	
91.5	98.9	7.4	Shale	Gray, soft, slight silty streaks.	

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
98.9	99.3	0.4	Shale	White, clayey, greasy, volcanic ash.	
99.3	110.8	11.5	Shale	Gray, soft	
110.8	112.0	1.2	Coal	Hard, lustre, resinous, FeS2.	
112.0	112.5	0.5	Shale	Tan, hard, coal streaks.	
112.5	118.8	6.3	Coal	Hard, lustre, FeS2, calcite, resinous.	
118.8	119.0	0.2	Shale	Soft, gray, parting.	
119.0	119.5	0.5	Coal	Hard, FeS2, lustre.	
119.5	126.2	6.7	Shale	Gray, soft.	
126.2	127.8	1.6	Shale	Light gray, clayish, soft.	
127.8	132.2	4.4	Shale	Gray, soft, dark gray shale bands.	
132.2	132.7	0.5	Coal	Bony, dull black, hard.	
132.7	133.7	1.0	Sh.	Gray, soft.	
133.7	133.9	0.2	Coal	Bony, dark gray, hard, dull texture.	
133.9	135.0	1.1	Shale	Gray, soft.	
135.0	135.7	0.7	Shale	Dark Gray, soft, non-carbonaceous.	
135.7	138.8	3.1	Coal	Hard, lustre, FeS2, resinous.	
138.8	144.8	6.0	Shale	Gray, soft, with s.s. streaks.	
144.8	145.7	0.9	Coal	FeS2, calcite, hard, lustre.	
145.7	146.0	0.3	Shale	Carbonaceous, dark gray, soft.	
146.0	147.0	1.0	Sandstone	Dark gray, hard, fine grained.	
147.0	150.0	3.0	Sandstone	Pictured cliffs formation.	
150.0	160.0	10.0	Sandstone	Pictured cliffs formation - Rotary plug for	
				electric logging.	

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 487-03, AREA 4N, Overburden Drilling PROJECT  
 COLLAR ELEVATION 5392.1, TOTAL DEPTH 205', DRILLER Jack Ledbetter  
 COORDINATES: N= 1,998,023 CONTRACTOR Mote Drilling Co.  
 E= 300,508 DATE COLLARED December 09, 1987  
 SECTION , T , N, R , W DATE BOTTOMED December 10, 1987

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		
*See remarks on page 2.									
TOTALS & AVERAGES									

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						B.O.S. A.F. TEMP.
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	% SUL.	
8 A	31.9- 33.9	2.0	--	2.0	16.74	8.03	34.92	40.31	10486	.61	2520
7	57.3- 61.0	3.5	1-0.2'	3.7	15.70	22.97	30.69	30.64	8300	.79	2380
	72.2- 73.3	1.1	0-0.0	1.1	14.00	22.92	29.97	33.11	8376	2.21	+ 2700
6 B	106.4-113.2	6.8	--	6.8	15.58	12.96	32.45	39.01	9889	.51	2470
4	134.6-138.0	2.4	1-1.0'	3.4	15.09	28.72	27.14	29.05	7627	1.13	2300
3 B	154.2-159.0	4.3	1-0.5'	4.8	12.99	28.42	28.89	29.70	7886	.64	2500
	159.0-161.2	--	Carbon. Shale	1.2	13.62	66.06	12.03	8.29	2135	.14	2270
3 A	161.2-165.4	4.0	1-0.2	4.2	15.31	23.35	28.18	33.16	8385	2.32	- 2130

REMARKS - → CONTINUED ON PAGE 2.

December 23, 1987  
DATE

Andy Erickson  
GEOLOGIST

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 487-03, AREA \_\_\_\_\_, PROJECT \_\_\_\_\_

COLLAR ELEVATION \_\_\_\_\_, TOTAL DEPTH \_\_\_\_\_, DRILLER \_\_\_\_\_

COORDINATES: N= \_\_\_\_\_ CONTRACTOR \_\_\_\_\_

E= \_\_\_\_\_ DATE COLLARED \_\_\_\_\_

SECTION \_\_\_\_\_, T \_\_\_\_\_ N, R \_\_\_\_\_ W DATE BOTTOMED \_\_\_\_\_

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		
TOTALS & AVERAGES									

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						B.O.S. ELEV. A.F. TEMP.
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	% SUL.	
2 B	175.6-177.7	1.9	1-0.2	2.1	15.78	9.72	33.89	40.61	10369	.76	2310
	177.7-178.4	--	Shale Parting	0.7	10.90	51.52	21.67	15.91	4873	4.48	2100
2 A	178.4-181.1	2.3	1-0.4	2.7	15.60	16.70	31.03	36.67	9384	.73	2340
1	187.4-188.5	1.1	0-0.0'	1.1	16.66	21.92	30.03	31.39	8411	1.69	2110

REMARKS - 0.0' to 5.0' - Collected rotary chips cuttings.

5.0' to 205.0 - Continuous core.

DATE

GEOLOGIST

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	5.0	5.0	Sandstone	Fine-medium grained, brown-tan, (rotary drilled).	
5.0	5.6	0.6	Sandstone	Tan, fine-medium grained.	
5.6	5.7	0.1	Sandstone	Fe stained, hard.	
5.7	6.0	0.3	Sandstone	Fine grained, tan, soft.	
6.0	6.1	0.1	Mudstone	Brown, very hard.	
6.1	7.2	1.1	Sandstone	Very fine grained, tan/brown.	
7.2	7.7	0.5	Mudstone	Gray, laminated, soft	
7.7	8.3	0.6	Sandstone	Very fine grained, gray, soft.	
8.3	8.9	0.6	Sandstone	Fine/medium grained, hard.	
8.9	9.0	0.1	Mudstone	Fe stained, hard.	
9.0	10.0	1.0	Shale	Gray, soft, S.S. interbedded.	
10.0	11.7	1.7	Sandstone	Fine grained, shale laminated, minor staining.	
11.7	12.2	0.5	Shale	Gray, soft.	
12.2	12.4	0.2	Sandstone	Medium Grained.	
12.4	14.0	1.6	Sandstone	Very fine grained.	
14.0	15.0	1.0	Shale	Gray, soft, S.S. interbedded.	
15.0	17.7	2.7	Sandstone	<del>Fine/very fine grained, hard, gray.</del>	
17.7	18.1	0.4	Shale	Light gray.	
18.1	21.0	2.9	Shale	Light gray, soft.	
21.0	21.2	0.2	Sandstone	Light gray, hard, calcareous.	
21.2	21.4	0.2	Shale	Gray, soft.	
21.4	23.1	1.7	Limestone	Very fine grained, very hard.	
23.1	23.9	0.8	Shale	Sandstone streaks, light gray, hard.	
23.9	24.8	0.9	Shale	Light to dark gray.	
24.8	27.0	2.2	Shale	Dark gray.	
27.0	29.8	2.8	Shale	Gray, sofo (not recovered).	
29.8	30.0	0.2	Limestone	Very hard, medium gray.	
30.0	30.6	0.6	Shale	Light gray, hard, calcareous.	
30.6	31.4	0.8	Shale	Gray, soft.	
31.4	31.6	0.2	Sandstone	Fine grained, light gray.	
31.6	31.9	0.3	Shale	Gray, soft.	
31.9	33.9	2.0	Coal	Hard, lusterous, FeS <sub>2</sub> , calcite.	

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
33.9	34.2	0.3	Shale	Carbonaceous, dark gray, soft.	
34.2	37.0	2.8	Shale	Dark gray, soft.	
37.0	39.0	2.0	Shale	Dark gray, very soft.	
39.0	45.0	6.0	Shale	Gray, soft, (not recovered).	
45.0	48.3	2.7	Shale	Gray, soft	
48.3	52.9	4.6	Shale	Gray, soft.	
52.9	56.9	4.0	Shale	Graditional gray - dark gray.	
56.9	57.3	0.4	Shale	Carbonaceous, minor coal lenses.	
57.3	58.4	1.1	Coal	Calcite, FeS <sub>2</sub> , hard, lustre.	
58.4	58.6	0.2	Shale	Gray, soft.	
58.6	61.0	2.4	Coal	Hard, FeS <sub>2</sub> , lustre, calcite, resinous.	
61.0	61.6	0.6	Shale	Carbonaceous, dark gray, soft.	
61.6	63.3	1.7	Shale	Soft, dark gray, organic.	
63.3	65.9	2.6	Sandstone	Hard, fine grained, shale interbedded.	
65.9	66.3	0.4	Sandstone	Fine grained, light gray, hard, calcite.	
66.3	68.5	2.2	Sandstone	Extra hard, calcareous, fine grained.	
68.5	69.3	0.8	Limestone	Calcareous, hard, very fine grained.	
69.3	71.7	2.4	Shale	Dark gray, soft.	
71.7	72.2	0.5	Shale	Carbonaceous, soft.	
72.2	73.3	1.1	Coal	Hard, lustreous, calcite.	
73.3	73.5	0.2	Shale	Carbonaceous, soft.	
73.5	79.8	6.3	Shale	Gray, soft.	
79.8	80.0	0.2	Shale	Carbonaceous.	
80.0	80.7	0.7	Shale	Dark gray, soft.	
80.7	82.3	1.6	Shale	Gray, soft.	
82.3	82.5	0.2	Shale	Carbonaceous.	
82.5	82.9	0.4	Coal	Thin seam, hard, with carbonaceous bands.	
82.9	83.1	0.2	Shale	Carbonaceous.	
83.1	84.9	1.8	Shale	Gray, soft, grading to dark gray.	
84.9	85.3	0.4	Shale	Carbonaceous.	
85.3	86.0	0.7	Shale	Dark gray, soft	
86.0	86.9	0.9	Coal	Thin seam, hard.	

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
86.9	87.1	0.2	Shale	Carbonaceous.	
87.1	92.0	4.9	Shale	Gray, soft, dark gray streaks.	
92.0	94.5	2.5	Shale	Dark gray, very soft, clayey.	
94.5	94.7	0.2	Sandstone	Light gray.	
94.7	96.8	2.1	Shale	Dark gray, very soft.	
96.8	97.0	0.2	Sandstone	Medium grained, hard.	
97.0	97.1	0.1	Shale	Gray.	
97.1	97.5	0.4	Sandstone	Light gray, medium grained, very hard, fossil shells.	
97.5	97.7	0.2	Limestone	Tan, very hard.	
97.7	98.1	0.4	Sandstone	Light gray, medium grained, very hard, fossil shells.	
98.1	106.4	8.3	Shale	Dark gray, soft, fossil shells.	
106.4	113.2	6.8	Coal	Hard, FeS <sub>2</sub> , calcite, lustre.	
113.2	114.3	1.1	Shale	Carbonaceous.	
114.3	118.3	4.0	Shale	Dark gray, soft with coal stringers - Carbonaceous shale.	
118.3	119.5	1.2	Shale	Dark gray, soft.	
119.5	124.2	4.7	Shale	Dark gray, soft, fossil shells, (0.5' lost).	
124.2	125.5	1.3	Shale	Sandstone interbedding, hard.	
125.5	127.5	2.0	Sandstone	Light gray, very hard, flaser bedding, fossil shells.	
127.5	127.7	0.2	Sandstone	Tan, shells, very hard, calcareous.	
127.7	129.4	1.7	Sandstone	Light gray, hard, shale interbedded.	
129.4	130.5	1.1	Sandstone	Hard, grading into shale.	
130.5	132.3	1.8	Shale	Dark gray, soft.	
132.3	132.7	0.4	Shale	Carbonaceous, dark gray.	
132.7	132.8	0.1	Coal	Bone, dull black, hard.	
132.8	132.9	0.1	Shale	Carbonaceous.	
132.9	133.9	1.0	Shale	Carbonaceous, soft.	
133.9	134.6	0.7	Shale	Gray, soft, some carbonaceous.	
134.6	137.0	2.4	Coal	FeS <sub>2</sub> , lustre, hard.	
137.0	137.4	0.4	Shale	Carbonaceous.	
137.4	138.0	0.6	Coal	Hard, with carbonaceous shale interbedding.	
138.0	139.7	1.7	Shale	Gray, soft.	
139.7	141.6	1.9	Shale	Dark gray, fossil shells, soft, minor carbonation.	

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
141.6	142.2	0.6	Sandstone	Light gray, with shale interbedding.	
142.2	145.1	2.9	Shale	Dark gray, soft, fossil shells.	
145.1	145.5	0.4	Claystone	Light gray, plastic, soft.	
145.5	153.6	8.1	Shale	Darker gray, soft.	
153.6	154.2	0.6	Shale	Carbonaceous.	
154.2	155.7	1.5	Coal	Hard, FeS <sub>2</sub> , calcite, lustre.	
155.7	156.2	0.5	Sandstone	Gray, with coal interbedding.	
156.2	159.0	2.8	Coal	Hard, FeS <sub>2</sub> , lustre.	
159.0	159.4	0.4	Shale	Carbonaceous.	
159.4	161.0	0.6	Shale	Dark gray, soft.	
161.0	161.2	0.2	Shale	Carbonaceous.	
161.2	165.4	4.2	Coal	FeS <sub>2</sub> , hard, lustre with carbonaceous shale streaks.	
165.4	167.0	1.6	Shale	Dark gray, soft.	
167.0	167.4	0.4	Shale	Carbonaceous.	
167.4	168.3	0.9	Shale	Dark gray, soft.	
168.3	168.6	0.3	Shale	Carbonaceous.	
168.6	169.0	0.4	Coal	Hard, lustre, thin seam.	
169.0	169.8	0.8	Shale	Carbonaceous.	
169.8	171.5	1.7	Shale	Gray, soft.	
171.5	172.1	0.6	Limestone	Tan, very hard	
172.1	173.8	1.7	Sandstone	Shale interbedding.	
173.8	175.6	1.8	Shale	Gray, soft, non carbonation.	
175.6	175.8	0.2	Shale	Carbonaceous, hard, dull black.	
175.8	177.7	1.9	Coal	Resinous, calcite, FeS <sub>2</sub> , hard, lustre.	
177.7	178.4	0.7	Shale	Dark gray, soft.	
178.4	179.3	0.9	Coal	FeS <sub>2</sub> , calcite, hard, lustre.	
179.3	179.7	0.4	Shale	Dark gray, soft, clayey.	
179.7	181.1	1.4	Coal	Resinous, FeS <sub>2</sub> , hard.	
181.1	181.2	0.1	Shale	Dark gray, soft, carbonaceous.	
181.2	182.0	0.8	Shale	Gray, soft.	
182.0	184.0	2.0	Sandstone	Light gray, soft, hard, silty, fine grained.	
184.0	187.4	3.4	Shale	Gray, soft.	

## **APPENDIX 5-A**

## **FORMATION RECORD**

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 487-04, AREA IV N, OVERBURDEN SAMPLING PROJECT  
 COLLAR ELEVATION 5408.6, TOTAL DEPTH 240', DRILLER JACK LEDBETTER  
 COORDINATES: N= 1,995,716 CONTRACTOR MO-TE DRILLING CO.  
 E= 306,666 DATE COLLARED DECEMBER 10, 1987  
 SECTION , T , N, R , W DATE BOTTOMED DECEMBER 11, 1987

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						B.O.S. ELEV. A.F. TEMP.
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F. C.	BTU	% S.	
8A	66.7- 73.8	6.8	1- 0.3	7.1'	14.56	15.21	32.54	37.69	9697	1.08	----- 2450
	75.0- 76.1	1.1	0 - 0.0	1.1	15.36	30.60	26.92	27.12	7256	3.05	----- 2100
	76.1 -77.6	---	CARBN.	1.5	15.04	49.39	19.32	16.25	4128	1.38	----- + 2700
7 RIDER	94.0- 96.1	1.2	3- 0.9	2.1	13.28	31.50	29.25	25.97	7272	1.32	----- + 2700
	96.1-97.2	----	SHALE PARTING	1.1'	12.96	65.90	13.82	7.32	1891	.92	----- + 2700
7	97.2- 101.1	3.2	2- 0.7'	3.9	14.28	19.65	31.47	34.60	9121	1.10	----- + 2700
7R	105.4- 110.6	5.1	1.01	5.2	15.22	13.95	33.74	37.09	9806	.67	----- + 2700
6B	127.6- 130.8	3.0	1.02	3.2	14.47	19.10	32.53	33.90	9074	1.68	----- 2550

REMARKS - 0.0'- 4.0' COLLECTED CHIP CUTTINGS.

4.0'-240.0' CONTINOUS CORE SAMPLES

\* FUSION TEMPERATURE OF ASH = INITIAL DEFORMATION @ REDUCING

DECEMBER 28, 1987

DATE

LEONARD DAN

GEOLOGIST

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 487- 04, AREA \_\_\_\_\_, PROJECT \_\_\_\_\_

COLLAR ELEVATION \_\_\_\_\_, TOTAL DEPTH \_\_\_\_\_, DRILLER \_\_\_\_\_

COORDINATES: N= \_\_\_\_\_ CONTRACTOR \_\_\_\_\_

E= \_\_\_\_\_ DATE COLLARED \_\_\_\_\_

SECTION \_\_\_\_\_, T \_\_\_\_\_ N, R \_\_\_\_\_ W DATE BOTTOMED \_\_\_\_\_

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						B.O.S. ELEV. A.F. TEMP.
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	% S.	
6A	134.1- 141.7	7.6	0-0.0'	7.6'	15.11'	11.60	33.35	39.94	10059	.46	- - - - - +2700
4	189.4- 193.1	3.6'	1.01'	3.7'	13.70	26.27	28.13	31.90	8189	.58	- - - - - 2550
3	209.5- 216.5	6.5	1-0.5	7.0'	14.37	24.81	27.71	33.11	8421	.44	- - - - - 2270
	216.5- 217.6	----	SHALE PARTING	1.1	12.29	76.11	7.86	3.74	924	.13	- - - - - 2350
2	217.6- 223.3	5.7	0 0.0	5.7	14.52	17.85	30.85	36.78	9347	.47	- - - - - +2700

REMARKS - \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

DATE \_\_\_\_\_

GEOLOGIST \_\_\_\_\_

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	4.0	4.0	Alluvial	Blown sand, with hard sandstone capping (rotary drilling).	
4.0	8.0	4.0	Sandstone	Light tan, hard, oxidized.	
8.0	10.2	2.2	Shale	Gray, soft, oxidized.	
10.2	11.1	0.9	Claystone	Very hard, calcareous, gypsum flakes.	
11.1	15.0	3.9	Shale	Gray, soft, slightly oxidized.	
15.0	21.4	6.4	Shale	Gray, soft, gypsum, calcite, oxidized.	
21.4	23.9	2.5	Shale	Gray, hard, calcite, alkali flakes.	
23.9	25.9	2.0	Shale	Gray, soft, oxidized.	
25.9	28.3	2.4	Claystone	Gray, hard, calcareous.	
28.3	34.9	6.6	Shale	Gray, soft.	
34.9	36.0	1.1	Claystone	Light gray, very hard, calcareous.	
36.0	42.9	6.9	Shale	Gray, soft.	
42.9	44.2	1.3	Shale	Carbonaceous, dark gray, soft.	
44.2	46.5	2.3	Shale	Gray, soft.	
46.5	46.7	0.2	Siltstone	Light gray, very hard.	
46.7	56.0	9.3	Shale	Gray, soft, numerous slickensides.	
56.0	56.5	0.5	Claystone	Light gray, hard.	
56.5	66.6	10.1	Shale	Gray, soft, slicken side at top.	
66.6	66.7	0.1	Shale	Carbonaceous, dark gray, soft.	
66.7	69.7	3.0	Coal	Calcite, resinous, hard, lustre, calcareous.	
69.7	70.0	0.3	Shale	Clayey, soft, white, volcanic ash.	
70.0	73.8	3.8	Coal	Calcite, resinous, hard, lustre, calcareous.	
73.8	74.0	0.2	Shale	Non-carbonaceous, dark gray, soft.	
74.0	75.0	1.0	Shale	Gray, soft.	
75.0	76.1	1.1	Coal	Hard, FeS2, calcite, lustre.	
76.1	77.6	1.5	Shale	Dark gray, carbonaceous, hard.	
77.6	78.9	1.3	Shale	Dark gray, non-carbonaceous, soft.	
78.9	90.0	11.1	Claystone	Light gray, hard.	
90.0	94.0	4.0	Shale	Gray, soft with carbonaceous bands.	
94.0	94.3	0.3	Shale	Carbonaceous, dark gray, hard.	
94.3	95.1	0.8	Coal	Resinous, calcite, hard, FeS2.	
95.1	95.3	0.2	Shale	Parting, gray, soft.	

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
95.3	95.7	0.4	Coal	FeS <sub>2</sub> , calcite, lustre, hard.	
95.7	96.1	0.4	Shale	Slightly carbonaceous, dark gray.	
96.1	97.2	1.1	Shale	Gray, soft, parting.	
97.2	98.2	1.0	Coal	Hard, calcite, FeS <sub>2</sub> , lustre, resinous.	
98.2	98.5	0.3	Shale	Parting, soft, gray.	
98.5	100.7	2.2	Coal	Hard, lustre, calcite, FeS <sub>2</sub> .	
100.7	101.1	0.4	Shale	Carbonaceous, dark gray.	
101.1	102.1	1.0	Shale	Gray, soft.	
102.1	103.5	1.4	Siltstone	Light gray, very hard, very fine grained.	
103.5	105.4	1.9	Shale	Gray, soft.	
105.4	108.0	2.6	Coal	Resinous, FeS <sub>2</sub> , hard, lustre.	
108.0	108.1	0.1	Shale	Parting, white, volcanic ash.	
108.1	110.6	2.5	Coal	Resinous, FeS <sub>2</sub> , hard, calcite, lustre.	
110.6	111.0	0.4	Shale	Gray, soft.	
111.0	112.6	1.6	Sandstone	Light gray, very hard, fine grained.	
112.6	114.3	1.7	Claystone	Light gray, very hard, silty interbedding.	
114.3	117.8	3.5	Siltstone	Light gray, very hard, fine grained.	
117.8	123.8	6.0	Sandstone	Light gray, very hard.	
123.8	127.0	3.2	Shale	Gray, soft, silty.	
127.0	127.6	0.6	Shale	Slightly carbonaceous, soft, gray.	
127.6	130.6	3.0	Coal	Resinous, FeS <sub>2</sub> , calcite, lustre.	
130.6	130.8	0.2	Shale	Carbonaceous, dark gray, soft.	
130.8	134.1	3.3	Claystone	Light gray, hard, very fine grained.	
134.1	141.7	7.6	Coal	Resinous, FeS <sub>2</sub> , lustre, hard.	
141.7	150.9	9.2	Shale	Gray, soft, slicken sides.	
150.9	151.5	0.6	Sandstone	Light gray, hard, calcareous.	
151.5	159.2	7.7	Siltstone	Light gray, very hard.	
159.2	165.0	5.8	Sandstone	Light gray, hard, very fine grained.	
165.0	169.3	4.3	Shale	Gray, soft.	
169.3	170.3	1.0	Siltstone	Light gray, hard.	
170.3	174.4	4.1	Claystone	Light gray, hard.	
174.4	175.1	0.7	Sandstone	Gray, very hard.	

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
175.1	175.9	0.8	Shale	Gray, soft.	
175.9	177.0	1.1	Claystone	Light gray, very hard.	
177.0	178.0	1.0	Sandstone	Light gray, very hard.	
178.0	179.1	1.1	Claystone	Gray, hard.	
179.1	179.4	0.3	Shale	Gray, hard.	
179.4	183.0	3.6	Claystone	Light gray, hard.	
183.0	187.5	4.5	Shale	Gray, soft, fossil shells.	
187.5	189.4	1.9	Shale	Gray, soft.	
189.4	193.0	3.6	Coal	Resinous, FeS <sub>2</sub> , calcite, hard, lustre.	
193.0	193.1	0.1	Shale	Carbonaceous, dark gray, hard.	
193.1	196.5	3.4	Claystone	Light gray, hard, very fine grained.	
196.5	198.1	1.6	Siltstone	Light gray, hard, fine grained.	
198.1	201.9	3.8	Shale	Gray, soft.	
201.9	202.5	0.6	Claystone	Light gray, hard.	
202.5	206.3	3.8	Shale	Gray, soft, fossil shells.	
206.3	209.5	3.2	Shale	Dark gray, soft, non-carbonaceous.	
209.5	210.2	0.7	Coal	Hard, lustre, nonchoidal fracture.	
210.2	210.7	0.5	Shale	Dark gray, soft, carbonaceous, bony streaks.	
210.7	216.5	5.8	Coal	Resinous, FeS <sub>2</sub> , hard lustre	
216.5	217.6	1.1	Shale	Gray, soft, parting	
217.6	223.3	5.7	Coal	Resinous, FeS <sub>2</sub> , hard lustre	
223.3	225.0	1.7	Shale	Gray, soft.	
225.0	225.2	0.2	Coal	Thin seam, hard, lustre.	
225.2	229.3	4.1	Shale	Gray, hard, silty	
229.3	237.7	8.4	Sandstone	Pictured cliffs formation with siltstone streaks	
237.7	238.8	1.1	Claystone	Light gray, very hard.	
238.8	240.0	1.2	Sandstone	Pictured cliffs formation	

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 487-05, AREA 4N, OVERBURDEN DRILLING PROJECT  
 COLLAR ELEVATION 5,372.1, TOTAL DEPTH 200', DRILLER JACK LEDBETTER  
 COORDINATES: N= 2,006,336 CONTRACTOR MOTE DRILLING CO  
 E= 300,869 DATE COLLARED DECEMBER 11, 1987  
 SECTION , T , N, R , W DATE BOTTOMED DECEMBER 14, 1987

**SUMMARY**

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		
*See Remarks.									

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						B.O.S. ELEV.	A.F. TEMP.
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	% S.		
8B	36.9-39.1	2.2	0=0.0'	2.2	23.11	12.53	30.35	34.01	7183	.71	2140	
8A	67.5-70.4	2.8	1-0.1	2.9	15.64	12.15	33.12	39.09	9975	.62	2250	
7	86.3-92.5	6.1	1-0.1	6.2	14.39	10.79	35.01	39.81	10417	1.00	2340	
6B	105.8-110.9	5.1	0-0.0	5.1	15.04	10.27	35.11	39.58	10432	.57	2380	
4	134.3-136.5	2.2	0-0.0	2.2	15.35	18.17	31.59	34.89	9107	.61	2500	
3B	153.5-157.6	4.0	1-0.1	4.1	14.33	19.25	31.22	35.20	9160	.76	2510	
2B	169.2-177.5	8.1	1-0.2	8.3	15.92	12.80	32.35	38.93	9872	.55	2410	
	190.7-191.6	0.9	0-0.0	0.9	13.49	17.25	33.41	35.85	9787	.79	2300	

REMARKS - 0.0' to 4.0' - Collected rotary chip cuttings.

4.0' to 200' - Continuous core.

December 23, 1987  
DATE

Leonard Dan  
GEOLOGIST

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	4.0	4.0	Sandstone	Cap rock, tan, extra hard.	
4.0	7.8	3.8	Sandstone	Tan, hard, stained.	
7.8	8.1	0.3	Siltstone	Pink, oxidized, very hard.	
8.1	12.0	3.9	Sandstone	Tan, hard, stained.	
12.0	19.6	7.6	Shale	Gray, soft, Fe stained.	
19.6	20.2	0.6	Coal	Badly weathered, soft, friable.	
20.2	21.8	1.6	Shale	Light brown, soft, clayey.	
21.8	22.1	0.3	Coal	Thin seam, soft, friable.	
22.1	29.0	6.9	Shale	Light brown, soft, weathered, (Lost 6.4')	
29.0	36.9	7.9	Shale	Light brown, soft, calcite, gypsum.	
36.9	39.1	2.2	Coal	Intact, soft, oxidized.	
39.1	39.4	0.3	Shale	Carbonaceous, dark gray, soft.	
39.4	44.0	4.6	Shale	Gray, soft.	
44.0	50.0	6.0	Claystone	Light gray, hard, angular fractures.	
50.0	52.6	2.6	Sandstone	Light gray, hard, shale interbedded.	
52.6	53.9	1.3	Shale	Gray, soft.	
53.9	54.2	.3	Sandstone	Light gray, hard.	
54.2	57.6	3.4	Sandstone	Light gray, hard, shale interbedded.	
57.6	58.6	1.0	Shale	Gray, soft, angular fractures.	
58.6	65.8	7.2	Shale	Gray, soft, with sandstone interbedding.	
65.8	66.3	0.5	Sandstone	Silty, hard, fine grained.	
66.3	67.0	0.7	Shale	Gray, soft.	
67.0	67.5	0.5	Sandstone	Gray, hard.	
67.5	67.6	0.1	Coal	Hard, FeS <sub>2</sub> , calcite, lustre.	
67.6	67.7	0.1	Shale	Grey, Soft, calcite, alkalai.	
67.7	70.4	2.7	Coal	Resinous, FeS <sub>2</sub> , Hard, lustre.	
70.4	76.0	5.6	Shale	Grey, Soft	
76.0	78.1	1.5	Shale	Gray, soft.	
78.1	81.3	3.2	Sandstone	Light gray, hard	
81.3	86.3	5.0	Shale	Grey, Soft	
86.9	92.4	6.1	Coal	Resinous, FeS <sub>2</sub> , Calcite, Hard, Lustre	
92.4	92.5	0.1	Shale	Carbonaceous, Dark Grey, Soft	

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
92.5	95.3	2.8	Shale	Grey, Soft	
95.3	95.9	0.6	Claystone	Light gray, very hard.	
95.9	105.8	9.9	Shale	Grey, Soft	
105.8	110.9	5.1	Coal	Resinous, FeS <sub>2</sub> , calcite, hard, lustre.	
110.9	112.9	2.0	Shale	Dark gray, soft.	
112.9	118.1	5.2	Shale	Gray, soft.	
118.1	119.1	1.0	Sandstone	Light gray, hard.	
119.1	122.8	3.7	Shale	Gray, soft.	
122.8	124.0	2.2	Sandstone	Light gray, hard.	
124.0	125.7	1.7	Shale	Gray, soft.	
125.7	134.3	8.6	Sandstone	Silty, hard, light gray, shale streak.	
134.3	136.5	2.2	Coal	Resinous, FeS <sub>2</sub> , hard, lustre.	
136.5	139.3	2.8	Shale	Grey, Soft	
139.3	140.3	1.0	Sandstone	Light gray, very hard.	
140.3	145.7	5.4	Shale	Grey, Soft	
145.7	146.0	0.3	Shale	White, clayey, volcanic ash.	
146.0	153.4	7.4	Shale	Grey, Soft	
153.4	153.5	0.1	Shale	Carbonaceous, dark gray.	
153.5	154.0	0.5	Coal	FeS <sub>2</sub> , hard, calcite, lustre.	
154.0	154.1	0.1	Sandstone	Thin parting, hard, light gray.	
154.1	157.6	3.5	Coal	Resinous, FeS <sub>2</sub> , calcite, hard, lustre.	
157.6	159.2	1.6	Shale	Grey, Soft	
159.2	160.0	0.8	Sandstone	Light gray, hard	
160.0	164.7	4.7	Shale	Grey, Soft	
164.7	165.3	0.6	Claystone	Light gray, very hard.	
165.3	165.9	0.6	Shale	Gray, soft, sandstone streaks.	
165.9	166.4	0.5	Siltstone	Light gray, very hard, calcareous.	
166.4	167.1	0.7	Shale	Grey, Soft	
167.1	167.9	0.8	Sandstone	Light gray, hard.	
167.9	169.2	1.3	Shale	Grey, Soft	
169.2	169.4	0.2	Coal	Bony, hard, dull black.	
169.4	177.5	8.1	Coal	Resinous, FeS <sub>2</sub> , Calcite, Hard, Lustre	

## APPENDIX 5-A

## **FORMATION RECORD**

## **APPENDIX 5-A**

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 289-01, AREA Block B Overburden PROJECT  
COLLAR ELEVATION 5456, TOTAL DEPTH 266, DRILLER Jack Ledbetter  
COORDINATES: N= 2048940 CONTRACTOR M0-TE  
E= 311850 DATE COLLARED 7/18/89  
SECTION T N, R W DATE BOTTOMED 7/19/89

## SUMMARY

**REMARKS -** No water table encountered.

07/19/89

DATE

---

Dave Hoag

## GEOLOGIST

PAGE 1 OF 3

DRILL HOLE NO. 289-01

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	5.0		SS	QTZ SS, HARD, MESA CAPROCK, CUTTINGS	
5.0	5.4		"	QTZ SS, HARD, MESA CAPROCK, CORE	
5.40	34.0		SS	BROWN, MD GR., MD. HARD, LAMINATED	
34	35.6		CLAYSTONE	BROWN	
35.6	38.2		CLAYSTONE	DARK BROWN, CARBONACEOUS	
38.2	46.0		SILTSTONE	GRAY W/BROWN STAINS, SOME VFG SS	
46.0	72.2		SS	GARY, LAMINATED	
72.2	73.7		SH	D. GY.	
73.7	75.2		SH	CARBONACEOUS	
75.2	81.2		CLAYSTONE	D-MD GY, SILTY	
81.2	81.8		SHALE	CARBONACEOUS	
81.8	83.0		CLAYSTONE	DK.-MD GY, SILTY	
83.0	86.0		LOST		
86.0	93.2		CLAYSTON	DK. MD GY, SILTY	
93.2	113.0		SS	LT GY. MD HARD LAMINATED, F-M. GRAIN	
113.0	114.8		SH	M. GY, SOFT	
114.8	119.2		SS	LT. GY. F-M GR, CARB. LAMINAE	
119.2	120.4		SH	CARBONACEOUS, SOFT	
120.4	135.3		CLAYSTONE	LT.-M. GY, SILTY, MED HARD	
135.3	177.0		SANDSTONE	LIGHT GRAY, MEDIUM HARD, FAIR-MEDIUM GRAY, CARB LAMS	
177.0	178.0		COAL	BONY	
178.0	178.3		PARTING	TAN SHALE & BONY COAL	
178.3	178.8		COAL	BONY	
178.8	178.9		SANDSTONE	TAN, FAIR GRAY, SOFT	
178.9	180.6		COAL	LUSTROUS	
180.6	180.9		COAL	BONY	
180.9	181.0		SHALE	TAN, SOFT	
181.0	181.5		COAL	LUSTROUS	
181.5	181.7		PARTING	TAN, SHALE	
181.7	183.5		COAL	HARD, LUSTROUS	
183.5	183.6		PARTING	TAN, SANDY SHALE	
183.7	187.6		COAL	HARD, LUSTROUS	

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
187.6	187.7		SH	TAN, SOFT	
187.7	189.4		COAL	HARD, LUSTROUS, RESINOUS	
189.4	189.5		SH	TAN, SOFT	
189.5	191.7		COAL	HARD, LUSTROUS RESINOUS	
191.7	191.9		SH	CARBONACEOUS	
191.9	200.8		CLAYSTONE	DK-MD GY, SILTY, MED HARD	
200.8	201.1		SH	CARBONACEOUS	
201.1	203.4		COAL	HARD, LUSTROUS, RESIN	
203.4	203.6		SH	CARB	
203.6	209.1		CLAYSTONE	GRAY, SILTY, MED HARD	
209.1	209.2		SH	CARB	
209.2	209.9		COAL	HARD, LUSTROUS	
209.9	211.1		SH	CARB	
211.1	214.2		CLAYSTONE	M GRAY, SILTY, MED HARD	
214.2	215.9		SS	LT GRAY, FGR, SOME CARB LAMS	
215.9	216.4		CLAYSTONE	M GRY, MED HARD	
216.4	217.0		COAL	HARD, BONY	
217.0	218.0		SH	CARB	
218.0	221.8		CLAYSTONE	M-DK GY, MED HARD	
221.8	229.6		SS	LAMINATED LT AND DK GRAY, F. GR.	
229.6	238.3		SH	DK GRY, SOME SS LAMS	
238.3	239.0		COAL	BONY	
239.0	244.9		COAL	HARD, LUSTROUS, DISSEMINATED FeS <sub>2</sub> , GYPSUM	
244.9	245.0		SH	TAN PARTING	
245.0	245.9		COAL	HARD, LUSTROUS, FeS <sub>2</sub> , GYPSUM	
245.9	246.2		SH	CARB	
246.2	256.0		SANDSTONE	LIGHT-DARK GRAY, LAMINATED, FAIR GRAY	
256.0	266.0		SHALE	MEDIUM GRAY, 70% OYSTERS, SOME SAND	

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 289-02, AREA Block B, Overburden PROJECT  
 COLLAR ELEVATION 5381, TOTAL DEPTH 256, DRILLER Jack Ledbetter  
 COORDINATES: N= 2047826 CONTRACTOR MO-TE  
 E= 316995 DATE COLLARED 08/01/89  
 SECTION       , T        N, R        W DATE BOTTOMED 08/02/89

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS					INIT SOFT
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	
8	172.3 - 186.1				11.62	32.33			7440	0.64 2700
7B	207.3 - 210.1				11.45	33.07			7516	1.80 2590 2700
6	234.6 - 243.0				11.37	27.09			8487	1.05 2377 2449

REMARKS - Water Table encounter at 180.0 ft.

08/02/89  
DATE

Dave Hoag

GEOLOGIST

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	5.0		CLAY	BROWN, SOFT DRILL CUTINGS	
5.0	6.8		CLAYSTONE	TAN, SILTY, SOFT	
6.8	14.2		CLAYSTONE	BROWN, SOFT, SILTY	
14.2	19.8		CLAYSTONE	TAN, BROWN STAINS, SANDY, MED HARD	
19.8	23.2		SHALE	CARBONACEOUS, SOFT	
23.2	26.7		SHALE	MED GRAY, SLIGHTLY CARBONACEOUS	
26.7	32.8		CLAYSTONE	TAN TO GRAY, SILTY TO SANDY, SOFT	
32.8	35.5		SANDSTONE	LT GRAY, MOTTLED, FG, HARD	
35.5	36.0		SHALE	CARBONACEOUS	
36.0	42.2		CLAYSTONE	MED GRAY, SILTY, SOFT	
42.2	44.2		SHALE	CARBONACEOUS	
44.2	68.2		SANDSTONE	LT-MED GRAY, FG, MED HARD	
68.2	73.3		CLAYSTONE	MED GRAY, SANDY, HARD	
73.3	76.8		SANDSTONE	LT GRAY, FG, HARD	
76.8	96.0		CLAYSTONE	MED GRAY, SILTY, HARD	
96.0	136.5		SANDSTONE	LT GRAY, FG, HARD, LAMINATED	
136.5	162.8		CLAYSTONE	MED-DK GRAY, SILTY, HARD	
162.8	170.0		SANDSTONE	LT GRAY, FG, LAMINATED, HARD	
170.0	172.3		CLAYSTONE	MED-DK GRAY, SILTY, HARD	
172.3	172.5		SHALE	CARBONACEOUS	
172.5	175.8		COAL	HARD, FRESH	
175.8	176.1		SHALE	CARBONACEOUS, SANDY	
176.1	176.3		COAL	HARD, FRESH	
176.3	176.5		SHALE	CARBONACEOUS, SANDY	
176.5	177.2		COAL	HARD, FRESH	
177.2	177.7		SHALE	CARBONACEOUS, SANDY	
177.7	179.6		COAL	HARD, FRESH	
179.6	180.5		SHALE	CARBONACEOUS, SANDY	
180.5	186.0		COAL	HARD, FRESH	
186.0	186.1		SHALE	CARBONACEOUS	
186.1	190.7		CLAYSTONE	MED GRAY, SILTY	
190.7	191.0		COAL	HARD, FRESH	

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
191.0	191.1		SHALE	CARBONACEOUS	
191.1	199.4		CLAYSTONE	MED-LT GRAY, SANDY, HARD	
199.4	203.7		SANDSTONE	LT GRAY, LAMINATED, HARD	
203.7	207.3		CLAYSTONE	MED-LT GRAY, SANDY, HARD	
207.3	208.0		SHALE	CARBONACEOUS	
208.0	210.1		COAL	HARD, FRESH	
210.1	215.5		SANDSTONE	LT-MED GRAY, CONVOLUTED LAMINAEE	
215.5	216.0		COAL	HARD, FRESH	
216.0	217.6		SANDSTONE	LT GRAY, FG, LAMINATED, HARD	
217.6	218.3		CLAYSTONE	MED GRAY, SANDY, HARD	
218.3	219.2		COAL	HARD, FRESH	
219.2	219.3		SHALE	CARBONACEOUS	
219.3	221.5		CLAYSTONE	MED-DK GRAY, SANDY, HARD	
221.5	225.7		SANDSTONE	LT GRAY, FG, LAMINATED, HARD	
225.7	234.6		CLAYSTONE	MED-DK GRAY, SANDY, HARD	
234.6	234.7		SHALE	CARBONACEOUS	
234.7	235.4		COAL	HARD, FRESH	
235.4	235.7		SHALE	CARBONACEOUS	
235.7	239.7		COAL	HARD, FRESH	
239.7	239.8		SHALE	TAN, SANDY	
239.8	242.6		COAL	HARD, FRESH	
242.6	243.0		SHALE	CARBONACEOUS	
243.0	250.2		CLAYSTONE	MED-DK GRAY, SANDY	
250.2	256.0		SANDSTONE	LT GRAY, LAMINATED, HARD	

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 289-03, AREA Block B Overburden PROJECT   
 COLLAR ELEVATION 5446, TOTAL DEPTH 276, DRILLER Jack Ledbetter  
 COORDINATES: N= 2043470 CONTRACTOR MO-TE  
 E= 311610 DATE COLLARED 07/19/89  
 SECTION , T , N , R , W DATE BOTTOMED

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS					INIT SOFT
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	
8	196.1 - 216.0				11.72	25.71			8539	0.69 2700
7B	223.8 - 227.0				12.64	40.38			6243	1.73 2490
6	255.6 - 263.7				12.91	19.43			9316	0.56 2705
										2640
										2700
										-----
										-----
										-----
										-----
										-----
										-----
										-----
										-----

REMARKS - Water Table encountered at 196 feet depth.

07/18/89

DATE

Dave Hoag

GEOLOGIST

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	5.0			CUTTING	
5.0	9.4		SS	LT BRN, VFG - FG, SILTY, FRIABLE	
9.4	17.8		CLAY	DARK BRN, SOFT	
17.8	19.6		SS	BROWN, FG-VFG, SOFT, FRIABLE	
19.6	37.0		CLAYSTONE	BROWN, SILTY, SOFT, CARBONACEOUS, LAMINAE	
37.0	39.4		SS	BROWN, LAMINATED, FRIABLE	
39.4	43.0		CLAYSTONE	BROWN, SILTY, CARBONACEOUS LAM SOFT	
43.0	55.0		CLAYSTONE	GRAY, SILTY, SOFT	
55.0	56.4		CLAYSTONE	CARBONACEOUS	
56.4	66.3		CLAYSTONE	M. GRAY, SILTY, MED HARD	
66.3	79.0		SS	LT GRAY, FG, MED HARD	
79.0	80.6		CLAYSTONE	CARBONACEOUS	
80.6	84.0		CLAYSTONE	M-D GY, SILTY	
84.0	97.2		CLAYSTONE	CARBONACEOUS	
97.2	98.5		SLTST	LT GRY, MD HARD	
98.5	105.9		CLAYSTONE	DARK GRAY, SOFT	
105.9	109.8		SLTST	LT GRY, HARD	
109.8	112.1		CLAYSTONE	DARK GRAY, SOFT	
112.1	113.6		CLAYSTONE	CARBONACEOUS	
113.6	114.1		COAL	SHALEY, HARD LUSTROUS	
114.1	118.0		CLAYSTONE	DARK GRAY, MED HARD	
118.0	118.3		SH	CARBONACEOUS	
118.3	126.1		CLAYSTONE	DARK-MED GRAY, HARD	
126.1	126.2		COAL	HARD, CALCITE VEINS	
126.2	128.6		CLAYSTONE	DARK-MED GRAY HARD	
128.6	129.2		SILTSTONE	LT GRAY, HARD	
129.2	136.7		CLAYSTONE	DARK-MED GRAY, MED HARD	
136.7	137.7		SS	LT. GRAY, FGR, HARD	
137.7	138.4		CLAYSTONE	DARK-MED GRAY, MED HARD	
138.4	139.8		SS	LT GRAY, FGR, HARD	
139.8	171.2		SILTSTONE	DARK-MED GRAY, SOME CARB LAMS	
				MED HARD	

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
171.2	176.9		CLAYSTONE	LT GY, SLIGHTLY SILTY, HARD	
176.9	180.9		CLAYSTONE	M. GY, HARD	
180.9	184.6		SILTSTONE	LT GY, HARD	
184.6	196.1		CLAYSTONE	LT MED GRAY, HARD, SILTY	
196.1	197.0		SHALE	CARBONACEOUS	
197.0	197.6		COAL	HARD, LUSTROUS	
197.6	197.7		CLAYSTONE	LT GRAY, SILTY	
197.7	200.0		COAL	HARD LUSTROUS	
200.0	200.1		CLAYSTONE	LT GRAY, SILTY	
200.1	200.6		COAL	HARD, LUSTROUS	
200.6	200.7		CLAYTONE	LT GRAY, SILTY	
200.7	206.6		COAL	HARD, LUSTROUS	
206.6	206.8		SH	CARBONACEOUS	
206.8	207.3		SILTSTONE	LT GRAY, HARD	
207.3	210.9		COAL	HARD, LUSTROUS	
210.9	211.0		SHALE	TAN, HARD	
211.0	213.0		COAL	HARD, LUSTROUS	
213.0	213.2		SHALE	TAN, HARD	
213.2	214.9		COAL	HARD, LUSTROUS	
214.9	215.6		COAL	BONY	
215.6	216.0		SHALE	CARBONACEOUS	
216.0	219.6		SANDSTONE	LT GRAY, FG, HARD	
219.6	223.8		CLAYSTONE	M GRAY, SILTY, HARD	
223.8	224.2		SHALE	CARBONACEOUS	
224.2	226.8		COAL	HARD LUSTROUS (7B SEAM)	
226.8	227.0		SHALE	CARBONACEOUS	
227.0	230.5		SILTSTONE	M GRAY, HARD	
230.5	231.3		COAL	HARD, LUSTROUS (7A SEAM)	
231.3	231.7		SHALE	CARBONACEOUS	
231.7	232.4		CLAYSTONE	MED GRAY, HARD	
232.4	232.9		SHALE	CARBONACEOUS	
232.9	235.3		CLAYSTONE	MED GRAY, SILTY, HARD	

## **APPENDIX 5-A**

**FORMATION RECORD**

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 289-04, AREA BLOCK B, OVERBURDEN PROJECT  
 COLLAR ELEVATION 5453, TOTAL DEPTH 260, DRILLER Jack Ledbetter  
 COORDINATES: N= 2039963 CONTRACTOR M0-TE  
 E= 308515 DATE COLLARED 08/02/89  
 SECTION , T , N, R , W DATE BOTTOMED 08/03/89

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS					INIT SOFT
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	
8	181.7 201.8				12.15	23.37			8817	0.49 2700
7	210.4 - 215.0				12.90	25.52			8444	1.17 2462 2600
6	242.4 - 250.0				13.14	21.06			9054	0.54 2636 2700
										-----
										-----
										-----
										-----
										-----
										-----
										-----

REMARKS - No water table encountered.

08/03/89

David Hoag

DATE

GEOLOGIST

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	5.0		SANDSTONE	LT GRAY, VFG-FG MED HARD/DRILL CUTTINGS	
5.0	13.8		SANDSTONE	LT GRAY, VFG-FG MED HARD	
13.8	15.0		SHALE	CARBONACEOUS	
15.0	43.0		CLAYSTONE	LT DK GRAY, SAND, STAINED BROWN	
43.0	44.2		SHALE	CARBONACEOUS	
44.2	48.0		CLAYSTONE	MED-DK GRAY, SILTY.	
48.0	48.2		SHALE	CARBONACEOUS, SOFT	
48.2	48.9		COAL	SHALEY, SOFT	
48.9	60.0		CLAYSTONE	LT-DK GRAY, SILTY, MED HARD	
60.0	61.8		SHALE	CARBONACEOUS	
61.8	78.2		CLAYSTONE	MED-DK GRAY, SILTY, MED HARD	
78.2	83.0		SANDSTONE	LT GRY, VFG, HARD	
83.0	95.0		CLAYSTONE	MED-DARK GRAY, SILTY, MED HARD	
95.0	95.4		COAL	SHALEY	
95.4	105.8		CLAYSTONE	MED-DARK GRAY, SILTY, MED HARD	
105.8	106.2		SHALE	CARBONACEOUS	
106.2	113.8		CLAYSTONE	MED-DARK GRAY, SILTY, MED HARD	
113.8	115.4		SHALE	CARBONACEOUS	
115.4	119.6		CLAYSTONE	MED-DARK GRAY, SILTY, MED HARD	
119.6	119.8		SHALE	CARBONACEOUS	
119.8	119.9		COAL	SHALEY	
119.9	120.0		SHALE	CARBONACEOUS	
120.0	128.6		CLAYSTONE	MED-DARK GRAY, SILTY, MED HARD	
128.6	181.7		CLAYSTONE	MED-LT GRAY, SANDY HARD	
181.7	181.9		SHALE	CARBONACEOUS	
181.9	182.0		SHALE	TAN, SOFT	
182.0	182.1		SHALE	CARBONACEOUS	
182.1	182.2		SHALE	TAN, SOFT	
182.2	192.4		COAL	HARD, FRESH	
192.4	192.6		SHALE	TAN, SANDY	
192.6	198.6		COAL	HARD, FRESH	
198.6	198.8		SHALE	TAN, SANDY	

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
198.8	201.8		COAL	HARD, FRESH, MINOR PARTINGS	
201.8	207.2		SANDSTONE	LT-MED GRAY, FG, LAMINATED, HARD	
207.2	210.4		CLAYSTONE	MED GRAY, SANDY, HARD	
210.4	210.8		SHALE	CARBONACEOUS	
210.8	214.7		COAL	HARD, FRESH	
214.7	215.0		SHALE	CARBONACEOUS	
215.0	217.6		SHALE	CARBONACEOUS	
217.6	220.3		CLAYSTONE	MED-DARK GRAY, SANDY, HARD	
220.3	223.6		SHALE	CARBONACEOUS	
223.6	233.7		SANDSTONE	LT-MED GRAY, LAMINATED, FG, HARD.	
233.7	242.4		CLAYSTONE	MED-DARK GRAY, SANDY, HARD	
242.4	242.7		SHALE	CARBONACEOUS	
242.7	246.6		COAL	HARD, FRESH	
246.6	246.7		SHALE	TAN, SANDY	
246.7	244.8		COAL	HARD, FRESH	
244.8	250.3		SHALE	CARBONACEOUS	
250.3	256.4		CLAYSTONE	MED-LT GRAY, SANDY, HARD	
256.4	260.0		SANDSTONE	LT GRAY, FG, HARD	

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 289-05, AREA Block B, Overburden PROJECT  
 COLLAR ELEVATION 5419, TOTAL DEPTH 212, DRILLER Jack Ledbetter  
 COORDINATES: N= 2037300 CONTRACTOR MO-TE  
 E= 304350 DATE COLLARED 08/04/89  
 SECTION  , T  , N, R  , W   DATE BOTTOMED  

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS					INIT SOFT
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	
8	120.0 - 140.2				12.36	26.84			8227	0.76 - 2505 2599
7B	148.5 - 153.6				13.63	23.35			8565	1.28 - 2640 2700
6	179.6 - 187.4				12.91	20.61			9106	0.49 - 2700 2700
3	204.6 - 206.4				12.90	35.75			6712	1.12 - 2700 2700

REMARKS - No water table encountered.

David Hoag

DATE

GEOLOGIST

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS		STRIP LOG
FROM	TO					
0.0	5.0		SAND, CLAY	TAN, SOFT	DRILL CUTTINGS.	
5.0	15.3		CLAYSTONE	GRAY, BROWN STAINS, SOFT		
15.3	16.8		SILTSTONE	LT GRAY, VERY HARD		
16.8	32.2		CLAYSTONE	MED GRAY, SILTY TO SANDY, SOFT		
32.2	33.5		SHALE	CARBONACEOUS		
33.5	35.7		CLAYSTONE	MED-LT GRAY, SANDY, GYPSUM		
35.7	36.7		SILTSTONE	LT GRAY, VERY HARD		
36.7	40.3		CLAYSTONE	MED GRAY, SILTY, SOFT		
40.3	40.8		SHALE	CARBONACEOUS		
40.8	55.2		CLAYSTONE	MED-DARK GRAY, SILTY, SOFT		
55.2	68.0		SHALE	CARBONACEOUS		
68.0	76.0		CLAYSTONE	MED-DARK GRAY, SILTY, SOFT		
76.0	91.0		CLAYSTONE	MED-LT GRAY, SANDY, HARD		
91.0	93.8		SANDSTONE	LT GRAY, FG, SHELLS, HARD		
93.8	119.2		CLAYSTONE	LT-DARK GRAY, SILTY, MED HARD		
119.2	120.0		CLAYSTONE	DARK GRAY, SLIGHTLY CARBONACEOUS		
120.01	120.7		SHALE	CARBONACEOUS		
120.7	125.2		COAL	HARD, FRESH		
125.2	125.4		SHALE	TAN, SANDY		
125.4	131.2		COAL	HARD, FRESH		
131.2	131.4		SHALE	TAN, SANDY		
131.4	139.7		COAL	HARD, FRESH		
139.7	140.2		SHALE	CARBONACEOUS		
140.2	144.6		SANDSTONE	LT GRAY, FG, LAMINATED HARD		
144.6	148.5		CLAYSTONE	MED-DARK GRAY, SILTY, MED HARD		
148.5	148.8		SHALE	CARBONACEOUS		
148.8	153.6		COAL	HARD, FRESH		
153.6	155.3		SHALE	SLIGHTLY CARBONACEOUS		
155.3	158.9		CLAYSTONE	LT-MED GRAY, SANDY, HARD		
158.9	161.6		SHALE	CARBONACEOUS		
161.6	168.2		CLAYSTONE	LT-MED GRAY, SANDY, HARD		
168.2	179.6		CLAYSTONE	DARK-MED GRAY, SILTY, HARD		

## **APPENDIX 5-A**

**FORMATION RECORD**

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 389-48, AREA LOWE, ASH FUSION

PROJECT

COLLAR ELEVATION 5378, TOTAL DEPTH 217, DRILLER JACK LEDBETTERCOORDINATES: N= 2023481 CONTRACTOR MO-TEE= 300393 DATE COLLARED 7/28/89SECTION   , T    N, R    W DATE BOTTOMED 7/31/89

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		
0.0 - 217.0		217.0							
TOTALS & AVERAGES									

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						-----
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	% SUL.	
8	96.0 - 105.3				13.09	32.62	26.56	27.73	7283	0.70	2484 2700
7B	128.3 - 131.4				11.68	49.13	20.90	18.29	5187	1.76	2234 2495
6	154.5 - 163.3				13.58	23.06	29.90	33.46	8757	0.91	2447 2700
3	178.3 - 181.7				10.92	37.26	27.09	24.73	6970	1.24	2523 2700
2	198.9 - 202.4				13.76	14.48	33.23	38.53	10017	0.74	2215 2298
											-----
											-----
											-----

REMARKS -

DATE

DAVID HOAG

GEOLOGIST

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	5.0		CLAY & SAND	BROWN, DRILL CUTTINGS	
5.0	9.0		CLAYSTONE	BROWN, SOFT, SANDY	
9.0	22.0		CLAYSTONE	GRAY, BROWN STAINED, SILTY, SOFT	
22.0	24.2		SHALE	CARBONACEOUS	
24.2	36.9		CLAYSTONE	GRAY, BROWN STAINED, GYPSUM VEINS, SOFT	
36.9	37.4		SANDSTONE	LT. GRAY, FG, HARD	
37.4	55.8		CLAYSTONE	GRAY, BROWN STAINED, GYPSUM VEINS, MED HARD	
55.8	79.2		SILTSTONE	LT. GRAY, SANDY, HARD	
79.2	86.0		CLAYSTONE	MED. GRAY, SANDY, HARD	
86.0	88.8		COAL	HARD, FRESH	
88.8	88.9		CLAYSTONE	TAN, SANDY	
88.9	89.6		COAL	HARD, FRESH	
89.6	89.7		CLAYSTONE	TAN, SANDY	
89.7	97.2		COAL	HARD FRESH	
97.2	97.5		CLAYSTONE	TAN, SANDY	
97.5	102.5		COAL	HARD, FRESH	
102.5	102.6		CLAYSTONE	TAN, SANDY	
102.6	105.1		COAL	HARD, FRESH	
105.1	105.3		SHALE	CARBONACEOUS	
105.3	107.4		SANDSTONE	LT. GRAY, FG, HARD, LAMINATED	
107.4	109.2		SHALE	LT. GRAY, FG, HARD	
109.2	118.1		SANDSTONE	LT. GRAY, FG, HARD	
118.1	121.4		CLAYSTONE	MED GRAD, SILTY, HARD	
121.4	122.6		SHALE	CARBONACEOUS	
122.6	124.5		CLAYSTONE	MED GRAY, SILTY, MED. HARD	
124.5	128.3		SHALE	CARBONACEOUS, TO SHALEY COAL	
128.3	130.4		COAL	FRESH, HARD, RESIN	
130.4	131.4		SHALE	CARBONACEOUS	
131.4	138.8		SANDSTONE	LT. GRAY, LAMINATED, HARD	
138.8	140.8		SHALE	CARBONACEOUS, SANDY	
140.8	147.2		SANDSTONE	LT. GRAY, FG, HARD, LAMINATED	
147.2	154.5		CLAYSTONE	MED. GRAY, SANDY, HARD	

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIPE LOG
FROM	TO				
154.5	162.5		COAL	HARD, FRESH	
162.5	163.3		SHALE	CARBONACEOUS	
163.3	172.0		SANDSTONE	LT. GRAY, FG, CONVOLUTED LAMS, HARD	
172.0	175.0			MISSING	
175.0	178.3		CLAYSTONE	MED.-DARK GRAY, SILTY, HARD	
178.3	178.5		SHALE	CARBONACEOUS	
178.5	180.1		COAL	HARD, FRESH	
180.1	180.6		SHALE	SANDY, CARBONACEOUS	
180.6	181.4		COAL	HARD, FRESH	
181.4	181.7		SHALE	CARBONACEOUS	
181.7	189.7		SANDSTONE	LT. GRAY, FG, CONVOLUTED LAMS, HARD	
189.7	194.2		CLAYSTONE	MED. GRAY, HARD, SANDY	
194.2	196.9		SANDSTONE	LT. GRAY, FG, HARD	
196.9	198.9		CLAYSTONE	MED. GRAY, SILTY, HARD	
198.9	199.0		SHALE	CARBONACEOUS	
199.0	202.3		COAL	HARD, FRESH	
202.3	202.4		SHALE	CARBONACEOUS	
202.4	203.0		SANDSTONE	CARBONACEOUS	
203.0	217.0		SANDSTONE	LT. GRAY, SALT & PEPPER, HARD	
				PICTURED CLIFFS	

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 389-49, AREA LOWE, ASH FUSION PROJECTCOLLAR ELEVATION 5373, TOTAL DEPTH 205, DRILLER JACK LEDBETTERCOORDINATES: N= 2018130 CONTRACTOR M0-TEE= 300206 DATE COLLARED 7/27/89SECTION   , T    N, R    W DATE BOTTOMED 7/28/89

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		
0.0 - 205.0		205.0							
TOTALS & AVERAGES									

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						TYPIC AL SUL
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	% SUL.	
8B	53.3 - 63.3				13.61	28.53	28.21	29.65	7785	1.13	2224 2535
8A	96.0 - 101.0				14.76	28.32	27.52	29.40	7775	0.84	2297 2514
7B	114.9 - 120.2				13.31	22.21	30.90	33.58	8874	1.44	2315 2432
6	138.7 - 148.0				13.96	22.14	30.45	33.45	8786	0.69	2504 2700
3	162.2 - 166.6				10.83	44.16	23.94	21.07	6074	0.82	2401 2557
2	181.7 - 186.2				13.36	20.19	30.64	35.81	9109	0.75	2632 2700
											-----
											-----

REMARKS - Water table encountered at 90 feet.

DATE \_\_\_\_\_

David Hoag

GEOLOGIST

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	5.0		SAND	BROWN, ALLUVIUM, SOME CLAY	
5.0	10.0		CLAYSTONE	TAN, SOFT, SOME GYPSUM, FOSSIL LEAFS	
10.0	17.0		CLAYSTONE	GRAY, BROWN STAIN, LIVE ROOTS	
17.0	18.0		SHALE	CARBONACEOUS	
18.0	20.9		CLAYSTONE	GRAY, BROWN STAIN, SILTY, GYPSUM	
20.9	21.4		SHALE	CARBONACEOUS	
21.4	23.3		CLAYSTONE	MED.-DARK GRAY, SANDY	
23.3	30.0		SANDSTONE	TAN, FG, SOFT	
30.0	41.0		CLAYSTONE	BROWN GRAY, SOFT, WET, WON'T CORE WELL	
41.0	42.1		CLAYSTONE	MED. GRAY, SILTY, HARD	
42.1	52.4		SANDSTONE	LT. GRAY, FG, HARD, PELECYPODS	
52.4	53.2		CLAYSTONE	MED. GRAY, HARD, GASTROPODS	
53.2	57.5		COAL	HARD, FRESH	
57.5	57.6		CLAYSTONE	TAN, SANDY	
57.6	62.1		COAL	HARD, FRESH	
62.1	62.2		CLAYSTONE	TAN, SANDY	
62.2	62.3		COAL	HARD, FRESH	
62.3	62.4		CLAYSTONE	TAN, SANDY	
62.4	62.9		COAL	HARD, FRESH	
62.9	63.3		SHALE	CARBONACEOUS	
63.3	76.5		CLAYSTONE	MED.-LT. GRAY, SANDY	
76.5	78.9		SANDSTONE	LT. GRAY, FG, LAMINATED, HARD	
78.9	82.2		SHALE	CARBONACEOUS	
82.2	92.6		CLAYSTONE	MED.-DARK GRAY, SILTY	
92.6	94.3		SHALE	CARBONACEOUS	
94.3	94.6		COAL		
94.6	94.8		SHALE	CARBONACEOUS	
94.8	95.0		COAL		
95.0	95.1		SHALE	CARBONACEOUS	
95.1	96.0		COAL		
96.0	97.0		SHALE	CARBONACEOUS	
97.0	101.0		COAL		

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
101.0	102.1		CLAYSTONE	MED.-DARK GRAY, SILTY	
102.1	113.1		SANDSTONE	MED.-LT. GRAY, VFG.-FG., HARD	
113.1	114.9		CLAYSTONE	MED. GRAY, SILTY, HARD	
114.9	115.4		SHALE	CARBONACEOUS	
115.4	120.1		COAL	HARD, FRESH	
120.1	120.2		SHALE	CARBONACEOUS	
120.2	123.8		SANDSTONE	MED. LT. GRAY, HARD, FG.-VFG.	
123.8	124.9		COAL	HARD, FRESH	
124.9	125.5		SHALE	CARBONACEOUS	
125.5	130.8		SANDSTONE	LT. GRAY, FG, HARD	
130.8	138.7		CLAYSTONE	MED.- DARK GRAY, SANDY, HARD	
138.7	147.0		COAL	HARD, FRESH	
147.0	148.0		SHALE	CARBONACEOUS	
148.0	151.4		CLAYSTONF	MFD. GRAY, SANDY, HARD	
151.4	153.0		SANDSTONE	LT. GRAY, FG, HARD	
153.0	155.0			MISSING	
155.0	157.6		SANDSTONE	LT.- MED. GRAY, FG.-VFG., HARD	
157.6	162.2		CLAYSTONE	DARK-MED. GRAY, SILTY, HARD	
162.2	162.4		SHALE	CARBONACEOUS	
162.4	163.6		COAL	HARD, FRESH	
163.6	163.9		CLAYSTONE	TAN, SANDY	
163.9	165.7		COAL	HARD, FRESH	
165.7	166.6		SHALE	CARBONACEOUS	
166.6	177.2		SANDSTONE	LT. GRAY, FG, CONVOLUTED LAMINATIONS	
177.2	177.3		COAL	HARD, FRESH	
177.3	177.5		SHALE	CARBONACEOUS	
177.5	181.7		SANDSTONE	LT. GRAY, FG, HARD	
181.7	181.9		SHALE	CARBONACEOUS	
181.9	186.2		COAL		
186.2	205.0		SANDSTONE	LT. GRAY, FG, HARD	

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 389-50, AREA DIXON, ASH FUSION PROJECT  
 COLLAR ELEVATION 5337, TOTAL DEPTH 164, DRILLER JACK LEDBETTER  
 COORDINATES: N= 2015229 CONTRACTOR MO-TE  
 E= 296626 DATE COLLARED 7/26/89  
 SECTION   , T   , N, R   , W DATE BOTTOMED 7/27/89

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		
0.0 - 164.0		164.0							
TOTALS & AVERAGES									

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						I-MT. Soft
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	% SUL.	
8A	26.4 - 28.4				17.83	5.07	33.34	43.76	10492	0.72	2054 2170
7B	42.0 - 47.0				14.58	22.17	28.36	34.89	8737	1.14	2404 2572
7A	49.4 - 51.3				16.01	6.45	34.55	42.99	10748	0.70	2128 2366
6B	64.7 - 67.0				14.24	8.11	35.73	41.92	10824	0.61	2239 2351
6A	69.5 - 76.4				13.23	23.11	30.60	33.06	8762	0.73	2700 2700
3	93.9 - 97.6				12.73	30.70	28.98	28.22	7715	1.06	2508 2700
2B	122.6 - 123.3				14.83	24.47	27.40 24.40	33.30	8267	1.46	2199 2414
2A	142.3 - 144.8				11.86	9.10	37.56	41.48	11196	0.91	2277 2412

REMARKS - Water Table at 85'.

David Hoag

GEOLOGIST

DATE

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	5.0		SAND & CLAY	BROWN, ALLUVIUM, CUTTINGS	
5.0	16.9		SAND & CLAY	BROWN, ALLUVIUM	
16.9	26.2		SHALE	CARBONACEOUS, WEATHERED, SOME GYPSUM, SOME GREEN	
				STAINS	
26.2	26.4		CLAYSTONE	TAN, SANDY, MED HARD	
26.4	28.2		COAL		
28.2	28.4		SHALE	CARBONACEOUS	
28.4	33.4		CLAYSTONE	MED. GRAY, SILTY	
33.4	37.7		SANDSTONE	LT. GRAY, FG, HARD	
37.7	42.0		CLAYSTONE	MED. - DARK GRAY, SILTY	
42.0	42.5		SHALE	CARBONACEOUS	
42.5	47.0		COAL	HARD, FRESH	
47.0	49.4		CLAYSTONE	LT.- MED. GRAY, SANDY	
49.4	51.0		COAL	HARD, FRESH	
51.0	51.3		SHALE	CARBONACEOUS	
51.3	52.8		CLAYSTONE	MED. GRAY, SILTY	
52.8	55.3		SANDSTONE	LT. GRAY, FG, LAMINATED HARD	
55.3	64.7		CLAYSTONE	MED.-DARK GRAY, SILTY	
64.7	64.9		SHALE	CARBONACEOUS	
64.9	67.0		COAL	HARD, FRESH	
67.0	69.5		CLAYSTONE	DARK GRAY	
69.5	69.7		SHALE	CARBONACEOUS	
69.7	76.0		COAL	HARD, FRESH	
76.0	76.4		SHALE	CARBONACEOUS	
76.4	83.7		CLAYSTONE	MED.- DARK GRAY, SILTY	
83.7	87.5		SANDSTONE	LT. GRAY, FG, LAMINATED	
87.5	93.9		CLAYSTONE	MED. - DARK GRAY, SILTY	
93.9	94.2		SHALE	CARBONACEOUS	
94.2	97.6		COAL	FRESH, HARD	
97.6	120.0		SANDSTONE	LT. GRAY, SANDY, HARD, CONVOLUTED LAMINATIONS	
120.0	120.3		COAL	HARD, FRESH, CALCITE VEINS, DIS. PY.	
120.3	122.6		CLAYSTONE	MED. GRAY, SANDY	

## **APPENDIX 5-A**

**FORMATION RECORD**

## APPENDIX 5-A

## BHP-UTAH INTERNATIONAL INC.

DRILL HOLE NO. 389-51, AREA DIXON, ASH FUSION PROJECTCOLLAR ELEVATION 5350, TOTAL DEPTH 165, DRILLER JACK LEDBETTERCOORDINATES: N= 2011839 CONTRACTOR MO-TEE= 296785 DATE COLLARED 7/25/89SECTION   , T    N, R    W DATE BOTTOMED 7/26/89

## SUMMARY

INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.	INTERVAL	FOOTAGE		AMT. REC'D.	% REC'D.
	PLUG	CORE				PLUG	CORE		
0.0 - 165.0		165.0							
TOTALS & AVERAGES									

SEAM NAME	MINABLE COAL HORIZON	THICKNESS			PROXIMATE ANALYSIS						Init Soft
		COAL	PARTINGS	SEAM	MOIST.	ASH	VOL.	F.C.	BTU	% SUL.	
7	47.3 - 54.0				13.55	16.74	31.77	37.94	9599	1.12	2269 2365
6	63.9 - 70.6				13.85	33.34	25.19	27.62	7118	0.72	2230 2482
3	114.6 - 120.0				13.06	22.47	31.32	33.15	8770	1.10	2385 2528
2B	130.0 - 136.0				14.30	18.04	30.90	36.76	9285	1.46	2429 2565
2A	140.6 - 143.5				13.76	13.64	34.44	38.16	10120	1.42	2122 2270

REMARKS - \_\_\_\_\_

\_\_\_\_\_  
David Hoag

GEOLOGIST

DATE

## APPENDIX 5-A

## FORMATION RECORD

DEPTH		THICK. OF STRATUM	FORMATION (KIND ROCK)	DESCRIPTION AND REMARKS	STRIP LOG
FROM	TO				
0.0	5.5		SAND	TAN, ALLUVIUM	
5.5	6.3		SANDSTONE	TAN, VFG. - FG, FRIABLE	
6.3	8.8		SANDSTONE	TAN, FG, SOFT	
8.8	14.8		SANDSTONE	GRAY-TAN, FG, HARD	
14.8	27.7		CLAYSTONE	GRAY BROWN, VERY SOFT	
27.7	28.5		SANDSTONE	LT. GRAY, FG, HARD	
28.5	29.7		CLAYSTONE	MED. GRAY, SILTY, HARD	
29.7	30.6		SANDSTONE	LT. GRAY, FG, HARD	
30.6	31.2		CLAYSTONE	MED. GRAY, SILTY HARD	
31.2	31.6		SANDSTONE		
31.6	31.7		CLAYSTONE		
31.7	32.1		SANDSTONE		
32.1	32.6		CLAYSTONE		
32.6	40.3		SANDSTONE	LT. GRAY, FG., HARD	
40.3	41.1		CLAYSTONE	MED. GRAY, SANDY	
41.1	43.4		SANDSTONE	LT. GRAY; FG.	
43.4	47.3		CLAYSTONE	MED. GRAY, SANDY	
47.3	47.6		SHALE	CARBONACEOUS	
47.6	53.8		COAL	HARD, FRESH	
53.8	54.0		SHALE	CARBONACEOUS	
54.0	63.9		CLAYSTONE	MED. GRAY, HARD, SANDY	
63.9	64.1		SHALE	CARBONACEOUS	
64.1	66.6		COAL	HARD, FRESH	
66.6	67.8		CLAYSTONE	DARK GRAY - BLACK	
67.8	68.3		SHALE	CARBONACEOUS	
68.3	70.1		COAL	HARD, FRESH	
70.1	70.6		SHALE	CARBONACEOUS	
70.6	72.4		CLAYSTONE		
72.4	73.0		SHALE	CARBONACEOUS	
73.0	76.8		CLAYSTONE	MED. GRAY, SOFT	
76.8	94.2		CLAYSTONE	LT.-MED GRAY, SANDY HARD	
94.2	94.7		COAL	HARD, FRESH	

## **APPENDIX 5-A**

**FORMATION RECORD**

**APPENDIX 5-B**

**OVERBURDEN CHEMICAL AND PHYSICAL ANALYSES**

### APPENDIX 5-B. Drill Hole 289-01 Overburden Analysis

Interval (ft)	pH	EC (mmhos/cm @ 25°C)	SAR	Ca (meq/l)	Mg (meq/l)	Na (meq/l)	Boron (ppm)	Total Selenium (ppm)	H2O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Neut. Pol. (l/10000)	Sulfate Sulfur (%)	Pyritic Sulfur (%)	Organic Sulfur (%)	Pyr S AB (l/10000)	Pyr S ABP (l/10000)	Sand (%)	Silt (%)	Clay (%)	Texture	Sat. (%)
Top- Bot.																						
0.0 - 5.0	6.5	1.12	15.4	0.65	0.39	11.10	0.21	0.02	0.01	1.8	0.07	184.00	0.01	0.06	0.01	-1.87	162.00	74	18	8	SL	29.2
5.0 - 10.0	6.6	2.00	27.5	0.86	0.76	24.90	0.35		0.01	1.7	0.11	92.50	0.10	0.01	0.01	-0.01	92.50	80	13	7	LS	34.9
10.0 - 15.0	6.1	1.96	17.3	1.25	0.95	18.10	0.20		0.01	2.0	0.06	74.40	0.07	0.01	0.01	-0.01	74.40	80	12	6	LB	36.2
15.0 - 20.0	8.0	1.61	15.5	1.27	0.83	15.00	0.26	0.05	0.03	2.6	0.11	25.90	0.10	0.01	0.01	-0.01	26.90	72	18	12	SL	51.4
20.0 - 25.0	8.0	2.09	15.3	1.88	1.21	19.00	0.20		0.03	3.1	0.06	35.10	0.07	0.01	0.01	-0.01	35.10	72	17	12	SL	49.4
25.0 - 30.0	8.0	2.05	15.7	1.67	1.11	18.50	0.14		0.01	2.7	0.06	75.20	0.01	0.07	0.01	-2.19	73.00	72	16	12	SL	43.6
30.0 - 34.0	7.9	2.12	23.1	1.07	0.61	21.20	0.12		0.02	2.4	0.09	49.70	0.01	0.06	0.01	-2.50	47.20	72	14	14	SL	47.6
34.0 - 35.6	5.1	4.19	28.6	1.90	1.97	41.20	0.40		1.20	0.04	5.1	0.11	4.12	0.01	0.06	0.31	3.81	33	19	46	C	79.2
35.6 - 38.2	4.3	9.66	29.9	20.70	18.30	92.10	0.43	0.95	0.02	6.2	0.53	-0.43	0.42	0.01	0.11	-0.01	-0.43	53	14	33	BCL	89.0
38.2 - 43.2	5.3	9.51	29.9	20.60	17.10	90.70	0.31	0.50	0.02	8.7	0.33	5.21	0.23	0.01	0.00	-0.31	4.90	53	47	21	L	95.8
43.2 - 46.0	7.0	8.26	20.2	17.80	11.90	77.70	0.39		0.03	3.6	0.26	7.24	0.18	0.01	0.10	-0.01	7.24	43	39	18	L	93.7
46.0 - 51.0	9.0	1.45	24.6	0.83	0.21	18.10	0.36		0.03	2.1	0.10	22.50	0.01	0.01	0.00	-0.31	22.20	60	24	16	SL	125.0
51.0 - 56.0	9.1	1.27	32.3	0.20	0.12	12.90	0.57		0.03	1.9	0.06	72.70	0.01	0.01	0.06	-0.01	72.70	60	17	14	BL	140.0
56.0 - 61.0	9.1	1.15	24.6	0.39	0.15	12.80	0.79	0.05	0.07	2.6	0.10	32.80	0.01	0.01	0.00	0.31	32.80	65	22	14	BL	124.0
61.0 - 66.0	9.2	1.39	32.6	0.27	0.11	14.30	0.36		0.01	2.9	0.10	20.70	0.01	0.01	0.00	-0.31	20.40	48	35	18	L	148.0
66.0 - 71.0	9.1	1.32	30.1	0.26	0.10	13.10	0.40		0.04	2.8	0.13	75.80	0.02	0.03	0.06	-0.94	74.80	51	30	19	L	123.0
71.0 - 72.2	9.0	1.50	27.1	0.44	0.15	14.70	0.40		0.04	2.9	0.12	26.50	0.01	0.06	0.07	-1.96	24.90	46	34	16	L	114.0
72.2 - 73.7	7.9	6.39	34.5	5.14	1.59	63.20	0.52	0.50	0.05	3.7	0.45	9.81	0.05	0.27	0.13	8.43	1.98	35	25	38	CL	93.8
73.7 - 75.2	6.0	10.90	32.7	17.30	6.15	112.00	1.04	2.15	0.15	16.6	1.30	7.06	0.18	0.67	0.47	20.90	-13.80	56	12	30	BCL	81.9
75.2 - 80.2	7.9	8.24	42.1	3.49	0.96	62.60	0.62	0.85	0.05	5.4	0.53	12.60	0.02	0.33	0.18	10.30	2.27	31	26	43	C	98.8
80.2 - 81.2	8.0	7.98	43.7	5.80	1.40	82.90	0.40		0.04	4.0	0.63	6.62	0.06	0.44	0.13	13.70	-5.12	37	22	41	C	94.5
81.2 - 81.8	5.6	11.80	35.2	18.30	6.55	124.00	0.90	1.25	0.06	8.6	1.38	3.62	0.15	0.90	0.33	26.10	-24.50	53	18	29	BCL	62.0
81.8 - 83.0	6.5	4.39	51.8	1.59	0.16	48.50	0.52	0.15	0.02	3.3	0.49	8.18	0.01	0.35	0.13	10.90	-2.75	28	43	28	CL	83.1
83.0 - 91.0	8.9	2.04	42.1	0.54	0.10	23.80	0.55	0.35	0.04	3.2	0.19	9.91	0.03	0.06	0.10	1.87	8.04	31	41	26	CL	82.5
91.0 - 93.2	9.1	1.25	33.1	0.33	0.06	14.80	1.46		0.04	3.6	0.12	13.60	0.01	0.03	0.00	-0.94	12.70	25	55	20	SL	142.0
93.2 - 96.2	9.3	1.27	28.0	0.32	0.09	12.70	0.36		0.01	2.0	0.06	42.60	0.01	0.02	0.07	-0.62	42.00	58	25	18	SL	142.0
96.2 - 103.2	9.1	1.41	35.3	0.34	0.03	15.20	0.30	0.15	0.01	2.1	0.06	114.00	0.01	0.08	0.01	-2.50	111.00	72	18	12	SL	82.1
103.2 - 108.2	8.3	3.83	40.0	1.26	0.19	34.30	0.26		0.01	3.6	0.11	14.70	0.01	0.01	0.00	0.31	14.40	60	11	9	LB	35.7
108.2 - 113.0	6.6	2.21	48.4	0.43	0.03	23.20	0.24		0.01	2.2	0.06	125.00	0.01	0.01	0.08	0.31	125.00	70	12	9	SL	40.5
113.0 - 114.8	6.7	1.74	27.3	0.53	0.30	17.80	0.37	0.02	0.02	3.4	0.11	72.30	0.01	0.01	0.10	0.31	72.00	55	21	24	BCL	56.2
114.8 - 119.2	8.3	5.70	51.0	1.98	0.49	56.70	0.35	0.60	0.03	3.8	0.51	76.70	0.01	0.35	0.15	10.90	66.80	43	22	36	CL	76.2
119.2 - 120.4	7.4	11.40	30.7	13.50	2.69	113.00	0.62	1.20	0.05	9.3	1.12	11.00	0.12	0.70	0.30	21.90	-10.80	52	14	35	BCL	77.7
120.4 - 125.4	8.3	5.99	44.9	2.37	0.55	54.20	0.36		0.01	3.7	0.57	25.00	0.01	0.43	0.14	13.40	11.80	30	27	43	C	84.7
125.4 - 130.4	8.6	4.13	50.1	0.96	0.33	40.20	0.36	0.25	0.01	3.2	0.45	36.50	0.01	0.37	0.12	11.60	26.90	24	45	30	CL	86.0
130.4 - 135.3	9.0	1.50	24.7	0.73	0.23	17.10	0.60		0.02	2.0	0.18	44.90	0.01	0.05	0.11	1.98	43.30	31	45	26	L	91.9
135.3 - 140.3	9.1	1.33	20.7	0.72	0.23	14.30	0.40		0.01	2.1	0.06	100.00	0.01	0.01	0.06	-0.01	100.00	87	19	15	SL	78.6
140.5 - 145.3	9.0	2.03	31.4	0.62	0.23	20.50	0.37		0.01	2.4	0.08	117.00	0.01	0.01	0.07	0.31	117.00	72	15	14	SL	87.5
145.3 - 150.3	8.9	1.93	28.5	0.55	0.22	18.30	0.36		0.01	2.4	0.06	107.00	0.01	0.01	0.07	0.31	107.00	72	15	13	SL	86.2
150.3 - 155.3	9.0	1.50	23.5	0.56	0.17	14.20	0.43		0.01	2.1	0.14	165.00	0.05	0.01	0.06	0.31	166.00	68	18	15	SL	80.4
155.3 - 160.3	9.1	1.58	26.2	0.49	0.15	14.80	0.42		0.01	2.5	0.06	81.90	0.01	0.01	0.06	-0.01	81.80	65	19	16	SL	93.6
160.3 - 165.3	9.2	1.23	25.9	0.33	0.12	12.30	0.28		0.01	2.8	0.06	78.90	0.01	0.01	0.06	0.31	78.80	67	15	18	SL	128.0
165.3 - 170.3	8.6	1.49	20.0	0.59	0.17	16.00	0.27		0.01	2.8	0.10	80.20	0.01	0.01	0.06	0.31	79.80	70	15	15	SL	60.8
170.3 - 175.3	9.1	1.35	25.5	0.36	0.13	12.80	0.39		0.01	3.1	0.18	92.30	0.03	0.04	0.11	1.25	91.10	65	15	20	BCL	119.0
175.3 - 177.0	9.0	1.16	22.2	0.61	0.15	13.70	0.30	0.20	0.03	4.5	0.18	74.80	0.03	0.04	0.11	1.26	73.80	47	31	22	L	126.0
177.0 - 196.9	8.6	1.54	30.7	0.51	0.25	18.90	0.98	0.35	0.04	4.9	0.44	56.80	0.01	0.32	0.18	10.00	48.80	18	58	24	BIL	70.7
196.9 - 201.1	8.9	1.37	25.1	0.57	0.22	15.80	0.68		0.03	5.5	0.44	145.00	0.01	0.29	0.15	9.06	136.00	28	32	43	C	87.2
203.6 - 209.1	8.2	3.27	41.4	1.19	0.25	35.10	0.36	0.10	0.03	4.2	0.31	10.60	0.02	0.17	0.12	5.31	8.84	42	42	16	L	34.0
209.1 - 209.9	8.4	8.33	24.9	14.30	3.73	74.90	3.14	1.40	0.04	61.7	1.98	8.06	0.23	1.07	0.68	33.40	-25.40	82	14	5	LB	40.8
209.9 - 211.1	8.1	4.25	52.3	0.91	0.29	40.50	0.75	0.04	0.04	12.5	0.44	8.75	0.03	0.18	0.25	5.00	3.78	30	32	34	CL	106.0
211.1 - 214.2	9.2	1.87	30.2	0.52	0.10	16.80	0.32	0.25	0.03	4.4	0.18											

## APPENDIX 5-B. Drill Hole 289-02 Overburden Analysis

Interval (m) Top - Bot	pH	EC (mmhos/cm @ 25°C)	SAR	Ca (meq/l)	Mg (meq/l)	Na (meq/l)	Boron (ppm)	Total Selenium (ppm)	H2O Sol. Carbon (%)	Tot. Org. Carbon (%)	Total Sulfur (%)	Neut. Pot. (V/1000)	Sulfate Sulfur (%)	Pyrilic Sulfur (%)	Organic Sulfur (%)	Pyr S AB (V/1000)	Pyr S ABP (V/1000)	Sand (%)	Silt (%)	Clay (%)	Texture	Sat. (%)
0 - 5.0	5.6	9.15	33.5	9.82	5.43	92.60	0.72	0.65	0.15	5.8	0.24	7.17	0.10	0.01	0.13	0.31	6.86	57	16	27	SCL	89.5
5.0 - 8.8	7.2	10.10	33.1	15.90	5.77	106.00	0.34	0.35	0.05	3.4	0.23	10.10	0.08	0.01	0.14	0.31	6.78	52	34	15	L	79.9
8.8 - 11.6	6.5	12.90	37.6	23.40	9.24	152.00	0.48	0.45	0.08	4.8	0.26	8.81	0.15	0.01	0.13	-0.01	6.81	55	23	22	SCL	74.9
11.6 - 14.2	6.9	8.39	29.1	11.90	3.81	81.60	0.58	0.05	3.7	0.22	8.05	0.10	0.01	0.12	-0.01	6.05	36	44	20	L	86.4	
14.2 - 19.8	6.8	2.18	26.7	1.04	0.20	21.00	0.26	0.20	0.05	3.1	0.14	23.20	0.01	0.12	0.01	3.75	19.50	40	37	23	L	173.0
19.8 - 23.2	5.9	14.10	41.8	21.20	8.54	181.00	0.56	1.10	0.21	8.1	0.33	11.30	0.18	0.01	0.14	0.31	11.00	64	12	24	SCL	88.9
23.2 - 26.7	7.8	7.72	45.1	5.31	1.55	93.50	0.30	0.65	0.10	5.8	0.18	12.80	0.05	0.01	0.12	0.31	12.30	61	15	25	SCL	85.0
26.7 - 31.7	7.8	7.85	37.9	6.65	2.36	81.40	0.40	0.15	0.02	4.0	0.17	9.24	0.04	0.12	0.01	3.75	5.49	46	34	19	L	82.2
31.7 - 32.8	7.8	5.66	36.1	3.52	1.00	54.30	0.32	0.02	4.9	0.20	10.50	0.07	0.01	0.13	-0.01	10.50	35	41	25	L	102.0	
32.8 - 35.5	6.6	1.70	24.5	0.78	0.17	16.90	0.18	0.20	0.04	3.5	0.15	35.30	0.01	0.03	0.11	0.94	34.40	50	28	22	L	213.0
35.5 - 36.0	6.2	3.11	31.3	1.20	0.27	26.80	0.62	0.60	0.08	12.6	0.21	9.24	0.05	0.01	0.16	-0.01	9.24	48	23	28	SCL	91.9
36.0 - 41.0	8.0	4.99	40.8	2.38	0.63	50.10	0.32	0.15	0.03	4.8	0.18	13.10	0.01	0.02	0.13	0.82	12.50	53	15	32	SCL	105.0
41.0 - 42.2	5.9	9.09	33.4	9.97	4.28	89.20	0.68	0.09	0.09	4.6	0.26	8.10	0.11	0.04	0.11	1.25	8.86	44	15	41	C	105.0
42.2 - 44.2	3.7	15.40	34.9	21.10	24.20	186.00	1.52	1.10	0.12	9.0	0.65	-3.05	0.66	0.01	0.19	-0.01	-3.05	52	26	23	SCL	86.7
44.2 - 49.2	8.6	2.88	34.2	0.89	0.26	25.90	0.30	0.03	3.2	0.16	12.20	0.01	0.03	0.13	0.94	11.30	42	36	20	L	104.0	
49.2 - 54.2	9.4	0.89	17.5	0.38	0.11	8.73	0.46	0.01	2.3	0.13	47.30	0.01	0.01	0.12	0.31	47.00	56	23	18	SL	187.0	
54.2 - 59.2	9.3	1.03	19.5	0.42	0.14	10.30	0.66	0.10	0.01	2.2	0.13	41.10	0.01	0.01	0.12	0.31	40.80	58	23	18	SL	181.0
59.2 - 64.2	9.2	1.10	23.7	0.36	0.13	11.60	0.28	0.01	2.7	0.12	105.00	0.01	0.01	0.11	0.31	104.00	70	17	13	SL	102.0	
64.2 - 68.2	9.1	1.16	23.5	0.43	0.12	12.30	0.24	0.01	2.3	0.14	21.60	0.02	0.01	0.12	-0.01	21.80	68	18	14	SL	128.0	
68.2 - 73.3	9.0	1.26	23.7	0.47	0.17	13.40	0.42	0.30	0.03	3.5	0.35	38.20	0.04	0.16	0.15	5.00	33.20	36	26	20	CL	120.0
73.3 - 76.8	8.7	1.16	20.8	0.47	0.10	11.00	0.44	0.05	0.01	3.4	0.14	173.00	0.01	0.01	0.14	-0.01	173.00	66	21	13	SL	81.8
76.8 - 81.6	9.0	1.74	36.5	0.37	0.15	18.60	0.82	0.06	4.4	0.36	20.50	0.15	0.09	0.15	2.61	17.80	30	28	42	C	96.3	
81.6 - 86.8	8.4	3.79	41.0	1.24	0.22	35.00	1.02	1.00	0.16	7.2	0.60	12.10	0.01	0.35	0.25	10.90	1.19	32	25	43	C	66.1
86.8 - 91.8	8.7	2.74	35.8	0.73	0.16	23.90	0.82	0.07	4.3	0.44	30.80	0.01	0.27	0.17	8.43	31.10	22	42	36	CL	91.0	
91.8 - 96.0	9.0	1.92	34.4	0.51	0.14	19.60	0.50	0.04	3.9	0.26	13.40	0.01	0.11	0.15	3.44	8.86	39	33	26	CL	102.0	
96.0 - 101.0	9.1	1.02	25.0	0.33	0.07	11.20	0.52	0.02	2.7	0.12	28.40	0.01	0.01	0.12	-0.01	28.40	39	42	18	L	129.0	
101.0 - 106.0	9.3	1.02	20.5	0.34	0.08	9.40	0.62	0.01	2.4	0.14	70.10	0.03	0.01	0.11	-0.01	70.10	38	47	15	L	145.0	
106.0 - 111.0	9.2	1.07	22.2	0.37	0.06	10.30	0.42	0.01	2.8	0.11	86.40	0.01	0.01	0.11	-0.01	86.40	90	26	15	BL	128.0	
111.0 - 116.0	9.1	0.99	19.4	0.39	0.06	9.39	0.34	0.10	0.01	2.8	0.11	110.00	0.01	0.01	0.11	-0.01	110.00	64	22	14	BL	131.0
116.0 - 121.0	9.1	1.00	22.0	0.34	0.06	9.82	1.24	0.01	2.8	0.13	34.80	0.02	0.01	0.11	-0.01	34.80	43	36	19	L	170.0	
121.0 - 126.0	9.3	1.00	19.6	0.41	0.06	9.72	1.02	0.01	2.2	0.11	47.50	0.01	0.01	0.11	-0.01	47.50	52	31	17	SL	185.0	
126.0 - 131.0	8.8	1.46	25.0	0.52	0.08	13.70	0.30	0.01	2.7	0.12	65.50	0.01	0.01	0.12	-0.01	65.50	64	23	13	SL	92.0	
131.0 - 136.5	8.6	2.01	36.7	0.46	0.06	18.70	0.22	0.01	2.2	0.11	175.00	0.01	0.01	0.11	-0.01	175.00	71	20	9	BL	51.6	
136.5 - 141.5	8.7	1.70	30.8	0.61	0.16	19.00	0.64	0.05	4.0	0.46	48.00	0.01	0.26	0.16	8.75	39.40	30	31	39	CL	97.0	
141.5 - 146.5	8.8	1.27	24.2	0.53	0.13	13.90	0.58	0.02	4.5	0.25	98.70	0.01	0.08	0.17	2.50	98.20	14	35	35	SICL	94.2	
146.5 - 151.5	8.7	1.17	24.0	0.43	0.15	12.90	0.68	0.25	0.02	4.0	0.20	160.00	0.02	0.05	0.13	1.56	159.00	12	57	31	SICL	87.3
151.5 - 156.5	8.5	1.27	22.8	0.64	0.18	14.60	0.50	0.03	6.0	0.18	69.80	0.01	0.03	0.15	0.84	68.80	18	50	34	SICL	96.5	
156.5 - 161.5	8.3	1.25	20.4	0.60	0.16	14.10	0.76	0.02	5.5	0.15	102.00	0.01	0.01	0.14	0.31	101.00	17	47	37	SICL	95.2	
161.5 - 162.8	8.5	0.99	10.7	0.68	1.26	11.10	0.58	0.02	4.9	0.15	118.00	0.01	0.01	0.15	-0.01	118.00	13	56	22	BL	101.0	
162.8 - 167.8	9.2	0.74	12.8	0.47	0.11	8.91	0.68	0.02	3.0	0.12	150.00	0.01	0.01	0.12	-0.01	150.00	42	36	23	L	213.0	
167.8 - 170.0	9.0	0.74	12.0	0.48	0.22	7.02	0.68	0.10	0.01	3.5	0.14	148.00	0.01	0.01	0.13	-0.01	148.00	66	9	23	SCL	183.0
170.0 - 172.3	8.8	1.40	23.9	0.44	0.20	13.50	0.92	1.05	0.18	5.4	0.58	11.00	0.01	0.20	0.18	6.25	4.76	55	28	17	SL	107.0
186.1 - 190.7	9.2	0.94	21.8	0.45	0.25	12.80	0.78	0.85	0.08	5.1	0.48	11.30	0.01	0.31	0.17	8.86	1.80	15	34	51	C	107.0
190.7 - 191.1	8.3	2.48	30.1	0.93	0.20	22.60	1.10	0.70	0.04	22.7	1.53	12.80	0.01	1.09	0.44	34.10	-21.20	45	29	26	L	80.4
191.1 - 196.1	8.8	1.57	25.8	0.68	0.22	17.30	0.96	0.50	0.04	5.8	0.65	82.80	0.01	0.42	0.23	13.10	69.50	24	49	27	CL	88.1
196.1 - 199.4	9.0	1.49	21.5	0.65	0.40	15.60	0.98	0.04	5.7	0.80	81.10	0.01	0.40	0.20	12.50	66.60	31	43	25	L	68.1	
199.4 - 203.7	8.7	1.66	26.1	0.79	0.13	17.70	0.58	0.20	0.02	3.8	0.16	130.00	0.01	0.01	0.18	-0.01	130.00	59	27	14	SL	30.4
203.7 - 207.3	8.6	1.24	21.8	0.56	0.17	13.20	0.68	0.60	0.04	3.7	0.72	60.70	0.01	0.51	0.21	15.90	64.80	23	32	45	C	93.3
210.1 - 215.5	8.4	1.68	25.8	0.76	0.21	17.80	0.62	0.45	0.05	4.7	0.62	9.67	0.01	0.45	0.17	14.10	-4.08	38	44	19	L	48.0
215.5 - 218.0	7.0	4.27	18.7	5.30	1.00	33.50	4.04	0.35	0.03	78.6	1.03	25.30	0.01	0.32	0.71	10.00	15.30	90	9	28	65.2	
218.0 - 218.3	8.3	1.21	23.7	0.45	0.21	13.60	0.84	0.45	0.07	5.2	0.35	24.20	0.04	0.18	0.15	5.00	19.20</td					

## APPENDIX 5-B. Drill Hole 289-03 Overburden Analysis

Interval (ft) Top-Bot	pH	EC (mmhos/cm @ 25°C)	SAR	Ca (meq/l)	Mg (meq/l)	Na (meq/l)	Boron (ppm)	Total Selenium (ppm)	H2O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Neut. Pot. (1/10000)	Bisulfate Sulfur (%)	Pyritic Sulfur (%)	Organic Sulfur (%)	Pyr S AB (V1000)	Pyr S ABP (V1000)	Sand (%)	Silt (%)	Clay (%)	Texture	Sal. (%)	
0.0 - 5.0	6.1	2.96	12.4	8.49	2.39	28.90	0.46	0.35	0.01	2.6	0.14	131.00	0.02	0.01	0.12	-0.01	131.00	44	36	19	L	37.8	
5.0 - 9.4	6.3	1.53	15.3	0.73	0.14	10.10	0.32	0.50	0.04	2.6	0.17	36.70	0.04	0.12	0.01	3.76	38.00	82	32	16	L	82.4	
9.4 - 14.4	7.5	1.53	17.8	1.42	0.41	17.00	0.42	0.50	0.11	3.7	0.22	9.96	0.08	0.01	0.13	-0.01	9.96	32	47	22	L	77.4	
14.4 - 17.6	7.6	1.06	16.7	0.85	0.22	12.20	0.28	0.11	3.1	0.17	6.13	0.03	0.01	0.14	-0.01	8.13	29	52	19	BL	95.2		
17.6 - 19.6	8.5	0.82	16.4	0.70	0.07	10.20	0.20	0.40	0.09	2.7	0.14	45.90	0.01	0.13	0.01	4.06	41.80	36	44	21	L	96.0	
19.6 - 24.6	7.7	3.75	16.1	8.52	3.27	43.90	0.28	0.11	3.8	0.22	10.20	0.07	0.14	0.01	4.37	5.85	46	26	26	SCL	96.3		
24.6 - 29.6	7.1	6.32	20.4	16.80	7.59	71.10	0.44	0.60	0.08	3.4	0.33	9.16	0.19	0.13	0.01	4.06	5.11	52	27	22	SCL	66.9	
29.6 - 34.6	7.5	6.16	21.4	15.50	7.18	72.00	0.38	0.06	3.2	0.26	11.50	0.25	0.01	0.01	-0.01	11.50	50	32	18	L	67.0		
34.6 - 37.0	7.2	1.93	22.9	1.25	0.64	22.30	0.30	0.02	2.8	0.18	6.50	0.17	0.01	0.01	-0.01	6.50	47	34	19	L	102.0		
37.0 - 39.4	8.3	2.46	22.4	2.35	1.10	29.40	0.26	0.15	0.01	2.4	0.21	34.20	0.09	0.11	0.01	3.44	30.80	80	24	16	BL	124.0	
39.4 - 43.0	8.7	1.94	26.6	0.99	0.53	23.20	0.42	0.55	0.06	3.3	0.28	15.00	0.09	0.04	0.15	1.25	13.70	26	48	24	L	152.0	
43.0 - 48.0	9.0	1.95	31.7	0.74	0.35	23.40	0.54	0.08	3.1	0.23	14.10	0.01	0.05	0.18	1.56	12.50	40	32	28	CL	93.8		
48.0 - 53.0	9.0	1.49	26.7	0.69	0.31	18.90	0.70	0.55	0.13	3.1	0.22	13.60	0.01	0.04	0.17	1.25	12.60	42	27	32	CL	90.7	
53.0 - 55.0	8.8	1.95	29.2	0.89	0.38	23.30	0.58	0.17	4.1	0.30	11.10	0.01	0.11	0.19	3.44	7.87	37	29	34	CL	91.2		
55.0 - 56.4	7.9	5.98	49.5	3.70	0.89	73.30	0.60	1.25	0.39	14.3	0.50	14.50	0.01	0.20	0.30	8.25	6.21	87	14	20	BL	87.4	
56.4 - 61.4	9.1	0.87	17.6	0.51	0.26	10.90	0.94	0.50	0.11	2.8	0.19	18.20	0.02	0.02	0.15	0.62	18.50	35	42	22	L	137.0	
61.4 - 66.3	9.2	0.78	18.1	0.43	0.23	10.40	1.02	0.07	2.9	0.20	18.40	0.01	0.05	0.15	1.58	14.80	24	54	22	BL	154.0		
66.3 - 71.3	9.7	0.55	11.8	0.37	0.25	8.56	0.54	0.01	2.0	0.17	80.10	0.01	0.18	0.01	5.00	55.10	52	28	20	BL	246.0		
71.3 - 76.3	9.5	0.54	12.5	0.35	0.24	8.77	0.54	0.10	0.01	1.7	0.17	56.40	0.05	0.11	0.01	3.44	53.00	67	16	17	BL	231.0	
76.3 - 79.0	9.4	0.68	15.3	0.27	0.27	7.94	0.66	0.03	3.4	0.21	44.80	0.04	0.02	0.15	0.62	44.20	66	14	19	L	210.0		
79.0 - 80.6	8.4	3.03	37.9	1.90	0.52	41.70	1.04	1.25	0.34	7.7	0.58	14.80	0.01	0.34	0.24	10.80	4.16	54	16	31	SCL	80.7	
80.6 - 84.0	8.8	2.19	34.9	0.85	0.16	24.80	0.78	0.85	0.15	4.3	0.81	12.00	0.11	0.34	0.18	10.00	1.36	30	48	23	L	90.1	
84.0 - 89.0	8.3	3.08	42.2	1.50	0.45	41.70	0.94	0.26	13.0	0.59	15.60	0.05	0.24	0.30	7.50	8.12	80	17	22	SCL	75.2		
89.0 - 94.0	8.9	1.32	21.4	0.74	0.35	15.80	0.94	0.95	0.26	6.3	0.25	13.70	0.01	0.07	0.18	2.19	11.50	47	19	34	SCL	90.0	
94.0 - 97.2	8.2	2.47	34.8	1.08	0.41	29.90	0.74	0.09	4.9	0.55	10.80	0.12	0.22	0.21	8.87	3.75	26	34	41	C	79.5		
97.2 - 98.5	9.1	0.82	17.8	0.58	0.09	10.30	0.64	0.20	0.06	3.5	0.22	29.90	0.04	0.03	0.15	0.94	29.00	29	47	24	L	101.0	
98.5 - 103.5	6.5	2.01	38.0	0.94	0.14	27.90	0.74	0.70	0.12	4.0	0.35	24.60	0.02	0.18	0.17	5.00	19.80	24	34	42	C	84.2	
103.5 - 105.9	8.8	1.64	30.1	0.88	0.19	22.00	0.64	0.07	3.9	0.40	18.60	0.03	0.21	0.18	8.56	12.40	27	24	49	C	93.8		
105.9 - 109.8	8.5	1.61	23.0	0.98	0.38	18.80	0.40	0.35	0.03	5.0	0.24	158.00	0.07	0.01	0.18	0.31	158.00	52	24	24	SCL	43.4	
109.8 - 112.1	8.3	2.58	33.9	1.57	0.47	34.20	0.82	1.00	0.18	5.7	0.43	47.90	0.03	0.20	0.20	6.25	41.80	29	23	48	C	83.3	
112.1 - 113.6	7.0	5.72	30.0	0.78	1.48	71.30	1.16	1.60	0.31	12.0	0.83	12.30	0.09	0.38	0.36	11.90	0.43	43	19	39	CL	80.5	
113.6 - 114.1	5.9	6.35	27.8	13.40	2.24	77.70	2.24	1.20	0.15	24.1	1.38	6.96	0.04	0.72	0.62	22.50	-15.50	36	32	30	CL	75.5	
114.1 - 116.3	8.3	3.22	42.9	1.63	0.27	41.80	0.90	0.85	0.06	5.0	0.48	8.81	0.01	0.30	0.18	9.37	0.43	33	25	43	C	84.4	
116.3 - 123.3	8.6	2.29	36.1	1.10	0.20	29.10	0.94	0.50	0.08	4.5	0.43	23.90	0.01	0.29	0.18	9.06	14.90	33	30	26	CL	84.1	
123.3 - 126.1	9.0	1.30	21.1	0.89	0.16	15.30	0.94	0.04	3.6	0.34	18.30	0.01	0.18	0.18	5.00	13.30	35	33	33	CL	96.9		
126.1 - 128.6	8.8	1.12	23.2	0.62	0.12	14.10	1.06	0.45	0.03	4.8	0.57	62.80	0.04	0.35	0.16	10.90	51.80	26	47	27	CL	178.0	
126.6 - 133.8	8.6	1.63	29.9	0.75	0.11	19.80	1.02	0.55	0.11	6.8	0.52	24.80	0.01	0.30	0.22	9.37	15.80	35	40	25	L	103.0	
133.8 - 138.7	6.7	1.46	25.7	0.64	0.13	17.90	0.94	0.07	4.2	0.27	26.10	0.02	0.07	0.18	2.19	23.90	29	47	24	L	84.1		
136.7 - 137.7	8.8	1.31	28.9	0.55	0.11	18.60	0.52	0.15	0.04	3.4	0.16	250.00	0.01	0.01	0.16	-0.01	250.00	58	27	15	BL	42.1	
137.7 - 139.8	8.7	1.48	30.9	0.59	0.09	18.00	0.72	0.20	0.04	4.0	0.21	96.00	0.02	0.04	0.15	1.25	84.80	44	36	21	L	85.5	
139.8 - 144.6	7.9	3.77	45.5	2.23	0.39	52.10	0.74	0.10	7.7	0.49	15.60	0.03	0.21	0.25	6.56	9.01	33	34	34	CL	72.1		
144.6 - 149.8	7.1	4.33	35.2	4.16	0.74	55.10	1.06	0.17	6.6	0.85	9.40	0.01	0.56	0.31	17.80	-8.08	38	24	36	CL	75.1		
149.8 - 153.8	8.0	3.10	33.6	2.09	0.36	37.20	0.96	0.12	6.2	0.58	11.50	0.01	0.35	0.23	10.90	0.86	33	26	42	C	82.0		
153.8 - 158.8	8.0	4.42	48.7	1.79	0.37	51.60	0.88	0.45	0.06	4.7	0.41	71.20	0.01	0.22	0.18	6.87	6.87	33	15	46	40	SCL	80.5
158.8 - 166.8	7.8	3.44	37.4	2.10	0.38	41.80	1.10	0.08	5.4	0.49	70.40	0.01	0.28	0.21	8.75	81.80	16	44	40	SCL	77.4		
163.8 - 168.8	6.0	2.09	35.5	1.87	0.29	35.10	0.78	0.04	6.4	0.76	118.00	0.03	0.50	0.23	15.80	101.00	15	46	40	SCL	85.1		
166.6 - 171.2	8.6	1.29	21.6	0.84	0.12	15.10	0.72	0.04	4.8	0.23	125.00	0.01	0.03	0.20	9.94	124.00	10	55	35	SCL	91.7		
171.2 - 176.9	8.6	0.66	22.0	0.25	0.04	8.38	0.58	0.20	0.01	3.9	0.17	155.00	0.01	0.02	0.15	0.62	158.00	35	46	18	L	122.0	
176.9 - 180.9	8.6	0.63	19.8	0.42	0.07	9.85	0.74	0.35	0.02	4.6	0.21	117.00	0.01	0.04	0.17	1.25	118.00	20	53	27	CL	116.0	
180.9 - 184.6	8.7	0.59	20.8	0.43	0.05	10.10	0.38	0.01	3.9	0.19	76.80	0.01	0.05	0.14	7.56	77.00	52	28	20	BL	88.2		
184.6 - 188.6	8.1	0.97	24.4	0.54	0.07	13.50	0.62	0.01	5.0	0.22	154.00	0.03	0.03	0.18	0.94	153.00							

## APPENDIX 5-B. Drill Hole 289-04 Overburden Analysis

Interval (ft) Top - Bot.	pH	EC (mmhos/cm @ 25°C)	SAR	Ca (meg/l)	Mg (meg/l)	Na (meg/l)	Boron (ppm)	Total Selenium (ppm)	H2O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Neut. Pot. (V/10000)	Sulfate Sulfur (%)	Pyrilic Sulfur (%)	Organic Sulfur (%)	Pyr S AB (V/10000)	Pyr S ABP (V/10000)	Sand (%)	Silt (%)	Clay (%)	Texture	Sat. (%)
0.0 - 5.0	7.6	16.50	34.4	23.10	22.40	164.00	0.44	0.40	0.25	2.6	0.30	32.80	0.15	0.14	0.01	4.37	29.50	42	37	20	L	80.5
5.0 - 10.0	9.3	0.92	16.4	0.50	0.13	9.20	0.32	0.05	0.02	1.9	0.17	46.00	0.06	0.06	0.01	2.50	43.50	47	31	22	L	341.0
10.0 - 13.8	9.0	1.19	20.4	0.66	0.16	13.20	0.26		0.03	2.3	0.15	19.30	0.07	0.07	0.01	2.10	17.10	58	22	20	SCL	276.0
13.8 - 15.0	4.5	10.70	36.2	17.80	0.95	135.00	1.20	1.00	0.12	6.5	0.61	1.46	0.45	0.01	0.16	-0.01	1.48	62	18	21	SCL	61.5
15.0 - 20.0	6.4	6.44	39.7	5.21	2.14	76.20	0.80		0.11	5.3	0.23	9.09	0.06	0.02	0.13	0.62	8.47	56	22	23	SCL	88.3
20.0 - 25.0	5.2	12.40	34.3	13.00	7.15	106.00	0.74		0.12	5.5	0.38	6.94	0.22	0.01	0.15	0.31	8.85	59	17	24	SCL	76.7
25.0 - 30.0	7.0	9.29	30.7	14.30	4.56	94.20	0.46	0.30	0.05	3.6	0.29	10.30	0.19	0.09	0.01	2.81	7.48	37	42	22	L	91.4
30.0 - 35.0	7.4	5.06	36.1	3.43	1.03	53.90	0.46		0.05	4.3	0.19	25.00	0.06	0.01	0.13	-0.01	25.00	43	32	25	L	100.0
35.0 - 40.0	8.9	1.35	30.1	0.26	0.11	13.30	0.26		0.06	2.8	0.17	27.10	0.08	0.06	0.01	2.50	24.80	25	48	27	CL	226.0
40.0 - 43.0	7.8	6.02	34.7	4.11	1.71	59.20	0.36		0.06	6.0	0.28	34.40	0.11	0.04	0.11	1.25	33.10	44	28	29	CL	107.0
43.0 - 44.2	4.4	11.90	32.9	17.90	7.39	117.00	0.80	1.20	0.09	20.8	0.81	1.46	0.51	0.01	0.30	-0.01	1.48	66	7	24	SCL	75.6
44.2 - 48.0	7.7	5.38	34.5	4.02	1.22	55.90	0.48	0.50	0.05	5.6	0.25	10.00	0.11	0.01	0.14	-0.01	10.00	50	17	34	SCL	101.0
46.0 - 48.9	4.9	9.87	26.0	19.10	4.54	96.30	8.00	0.80	0.07	50.6	0.77	6.19	0.19	0.08	0.52	1.67	6.32	79	7	14	SL	61.4
48.0 - 53.9	6.6	2.01	36.8	0.63	0.14	24.10	0.98		0.11	6.6	0.18	11.80	0.01	0.03	0.15	0.94	10.60	42	24	34	CL	107.0
53.9 - 58.9	8.5	2.52	36.0	1.07	0.18	28.50	1.00	0.65	0.12	4.6	0.42	26.00	0.01	0.26	0.16	8.12	17.80	27	31	42	C	94.0
58.9 - 60.0	8.6	3.20	46.4	0.99	0.16	35.20	0.86		0.24	5.8	0.32	10.80	0.01	0.19	0.13	5.94	4.84	49	22	29	SCL	82.5
60.0 - 61.8	7.8	3.97	41.6	1.63	0.27	40.50	2.42	1.10	0.30	19.7	0.54	12.30	0.02	0.22	0.30	8.87	5.45	68	13	19	BL	70.1
61.8 - 66.8	8.7	1.61	20.6	0.66	0.10	18.40	1.20		0.44	6.1	0.21	15.60	0.01	0.08	0.13	2.50	13.30	47	23	31	SCL	95.0
66.8 - 71.8	8.7	1.50	32.7	0.36	0.09	15.50	0.96	0.40	0.09	3.6	0.25	10.70	0.01	0.13	0.12	4.06	8.89	31	31	31	CL	91.4
71.8 - 78.8	9.1	0.93	19.3	0.46	0.11	10.30	0.52		0.05	3.3	0.16	10.50	0.01	0.08	0.10	1.87	8.80	29	37	34	CL	94.6
78.8 - 79.2	6.9	1.10	21.7	0.52	0.10	12.10	0.52		0.04	3.5	0.16	9.92	0.01	0.14	0.01	4.37	5.55	31	35	34	CL	82.2
78.2 - 83.0	9.0	0.67	16.7	0.42	0.08	9.33	0.80	0.20	0.02	3.5	0.15	142.00	0.01	0.13	0.01	4.06	136.00	34	44	22	L	73.4
63.0 - 68.0	8.7	1.10	19.3	0.60	0.12	11.80	1.44		0.04	4.4	0.22	83.80	0.01	0.10	0.12	3.12	80.00	18	46	35	SCL	77.5
68.0 - 93.0	8.4	2.70	43.4	1.21	0.21	36.60	1.42	0.70	0.09	5.6	0.32	55.60	0.01	0.18	0.14	5.62	50.00	26	30	44	C	65.1
93.0 - 95.4	6.4	7.96	27.1	15.30	2.89	81.80	1.98		0.24	13.5	1.07	8.52	0.06	0.84	0.35	20.00	-11.50	47	35	19	L	73.5
95.4 - 100.4	8.3	2.22	32.6	1.21	0.21	27.80	0.90		0.06	4.7	0.36	42.00	0.04	0.17	0.15	5.31	36.70	22	37	41	C	77.6
100.4 - 105.4	8.7	1.64	31.2	0.67	0.12	19.80	1.24	0.45	0.10	4.2	0.35	23.20	0.01	0.21	0.14	6.56	16.60	31	24	45	C	68.5
105.4 - 106.2	8.6	2.16	44.3	0.57	0.12	26.00	1.04		0.06	3.9	0.41	18.30	0.01	0.27	0.14	6.43	9.84	35	20	46	C	66.8
106.2 - 111.2	8.4	2.67	38.1	1.15	0.19	31.20	1.00	0.95	0.11	5.8	0.50	29.80	0.01	0.42	0.17	13.10	18.40	37	23	40	C	81.3
111.2 - 113.8	8.5	2.19	34.6	1.03	0.17	26.80	0.88		0.10	4.9	0.63	14.00	0.03	0.46	0.14	14.40	-0.34	32	29	36	CL	85.6
113.8 - 115.4	8.6	1.44	23.5	0.59	0.14	14.20	1.46		0.06	11.1	0.62	10.20	0.01	0.39	0.22	12.20	-1.94	48	26	24	L	69.8
115.4 - 119.6	8.7	1.06	20.3	0.49	0.13	11.30	0.78	0.35	0.04	3.9	0.20	10.70	0.01	0.06	0.12	2.50	8.17	29	42	29	CL	75.7
119.6 - 120.0	8.1	2.23	33.0	1.12	0.21	26.90	1.32	1.45	0.27	16.5	0.55	12.20	0.01	0.23	0.31	7.19	5.02	55	15	30	SCL	77.7
120.0 - 125.1	8.6	1.75	26.8	0.73	0.15	17.80	0.96	0.45	0.06	4.1	0.34	31.10	0.01	0.20	0.14	8.25	24.60	27	32	42	C	93.2
125.1 - 126.6	8.5	1.63	24.4	0.60	0.16	15.90	1.04		0.04	4.0	0.35	76.80	0.01	0.23	0.12	7.19	80.80	14	50	38	SCL	79.7
126.6 - 133.6	8.5	1.97	38.8	0.47	0.12	21.10	0.72		0.03	5.2	0.27	170.00	0.05	0.10	0.12	9.12	167.00	33	30	28	CL	50.2
133.6 - 138.6	8.4	2.07	34.6	0.85	0.13	21.80	0.42		0.03	5.7	0.17	143.00	0.01	0.05	0.12	1.50	141.00	38	32	33	CL	59.3
138.6 - 143.8	8.3	2.10	33.2	0.67	0.16	21.40	1.06		0.05	4.6	0.31	39.50	0.01	0.17	0.14	5.31	34.20	36	42	C	84.9	
143.8 - 148.6	8.6	1.56	26.2	0.51	0.12	15.80	0.96		0.04	3.8	0.30	84.10	0.07	0.20	0.12	8.25	77.90	17	47	36	SCL	76.6
148.6 - 153.6	8.6	1.03	20.3	0.49	0.14	11.40	0.90		0.03	4.0	0.18	83.00	0.01	0.07	0.10	2.19	80.80	14	53	33	SCL	79.3
153.6 - 158.6	8.8	1.11	19.3	0.42	0.36	12.20	0.72		0.03	4.0	0.12	81.80	0.01	0.02	0.10	0.62	81.90	18	50	32	SCL	76.5
158.6 - 163.6	8.7	1.10	23.6	0.36	0.13	11.70	0.72		0.04	4.4	0.19	60.10	0.02	0.02	0.15	1.56	78.50	22	41	36	CL	61.0
163.6 - 168.6	8.4	1.68	23.0	0.94	0.16	17.20	1.16		0.07	4.4	0.37	74.40	0.02	0.20	0.15	6.25	68.10	13	33	54	C	96.7
168.6 - 173.6	8.4	2.17	20.7	0.70	0.15	13.50	1.32		0.03	5.0	0.36	128.00	0.01	0.24	0.14	7.50	119.00	10	46	44	SL	83.3
173.6 - 178.6	8.5	1.12	17.9	0.72	0.16	12.00	0.88		0.02	4.7	0.26	163.00	0.07	0.06	0.13	2.50	161.00	22	46	33	CL	64.2
178.6 - 181.7	8.6	1.24	23.8	0.57	0.14	14.20	0.92	0.30	0.06	4.8	0.16	94.30	0.01	0.04	0.12	1.25	93.00	15	49	36	SCL	81.6
201.8 - 207.2	8.5	1.49	22.9	0.76	0.19	18.80	0.84	0.40	0.04	4.7	0.15	134.00	0.01	0.03	0.11	0.84	133.00	56	26	19	SL	31.1
207.2 - 210.4	8.8	1.33	21.1	0.73	0.15	14.00	1.32	0.45	0.04	4.8	0.82	56.80	0.01	0.46	0.16	14.40	42.40	20	31	50	C	107.0
215.0 - 217.6	7.6	3.74	41.6	1.59	0.46	42.10	1.88	0.85	0.21	16.2	0.73	8.72	0.02	0.38	0.33	11.90	-3.15	41	26	33	CL	67.6
217.6 - 220.3	9.0	1.14	23.2	0.49	0.12	12.80	1.10	0.40	0.09	5.2	0.21	9.07	0.01	0.06	0.13	2.50	6.57	17	56	27	SL	97.6
220.3 - 223.6	7.3	6.19	44.1	4.55	1.17	74.50	1.60	0.50	0.14	16.4	1.38	9.54	0.01	1.04	0.34	32.50	-					

## APPENDIX 5-B. Drill Hole 289-05 Overburden Analysis

Interval (ft)		pH	EC (mmhos/cm @ 25°C)	SAR	Ca	Mg	Na	Boron	Total Selenium (ppm)	H2O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Neut. Pol. (V1000)	Sulfate Sulfur (%)	Pyrilic Sulfur (%)	Organic Sulfur (%)	Pyr S AB (V1000)	Pyr S ABP (V1000)	Sand	Silt	Clay	Texture	Sat.
Top	Bot				(meq/l)	(meq/l)	(meq/l)	(ppm)				(%)	(V1000)	(%)	(%)	(%)	(%)	(%)	(%)	(%)	(%)	(%)	(%)
0.0 - 5.0		7.9	6.54	19.0	17.50	3.21	61.30	0.40	0.65	0.06	4.1	0.27	29.20	0.14	0.01	0.13	-0.01	29.20	28	22	50	C	61.
5.0 - 10.0		7.5	5.07	23.1	6.67	3.69	53.10	0.24	0.07	4.2	0.17	12.90	0.02	0.01	0.14	0.31	12.80	28	22	50	C	98.	
10.0 - 15.3		7.4	7.20	19.6	15.10	9.04	68.90	0.16	0.05	5.2	0.28	38.50	0.14	0.01	0.13	0.31	38.20	27	33	41	C	94.	
15.3 - 16.8		8.0	5.25	29.1	3.74	4.09	57.50	0.16	0.05	9.7	0.13	8.75	0.07	0.05	0.01	1.56	7.10	66	19	15	BL	29.	
16.8 - 21.8		7.8	5.65	24.7	7.58	4.34	60.20	0.26	0.05	4.7	0.22	25.00	0.00	0.01	0.13	-0.01	25.00	25	26	50	C	87.	
21.8 - 26.8		7.5	6.55	23.4	10.80	6.47	68.40	0.32	0.35	4.5	0.15	105.00	0.01	0.01	0.13	0.31	105.00	24	36	41	C	69.	
26.8 - 32.2		7.8	6.21	23.9	9.38	5.35	64.80	0.30	0.03	4.5	0.17	93.80	0.18	0.01	0.01	-0.01	93.80	21	41	39	CL	88.	
32.2 - 33.5		4.6	6.04	23.2	16.50	12.50	91.50	0.68	1.10	0.09	11.9	0.27	1.98	0.05	0.01	0.22	-0.01	1.98	54	13	33	SL	58.
33.5 - 35.7		6.6	8.12	22.6	18.10	10.10	84.00	0.46	0.25	0.03	5.3	0.46	30.20	0.25	0.03	0.16	0.94	36.30	29	35	37	CL	71.
35.7 - 36.7		7.8	6.15	30.8	4.12	4.56	54.10	0.38	0.30	0.01	19.6	0.49	189.00	0.06	0.22	0.19	6.87	183.00	76	9	15	BL	28.
36.7 - 40.3		7.9	5.84	31.3	6.18	2.16	63.90	0.60	0.65	0.07	5.6	0.49	62.80	0.30	0.02	0.17	0.62	62.10	22	32	46	C	90.
40.3 - 40.8		6.3	9.00	29.0	16.90	5.92	97.80	2.04	2.70	0.34	15.3	1.30	13.60	0.01	0.91	0.39	28.40	-14.80	50	17	33	SL	69.
40.8 - 45.8		8.1	4.03	37.7	2.75	0.86	50.70	0.42	0.07	5.1	0.68	12.70	0.07	0.43	0.18	13.40	-0.77	37	23	40	CL	95.	
45.8 - 50.8		8.9	1.36	23.1	0.49	0.32	14.70	0.40	0.30	0.02	3.8	0.43	29.40	0.01	0.18	0.24	5.62	23.80	25	30	30	CL	152.
50.8 - 55.2		8.8	1.51	20.7	0.83	0.38	16.10	0.56	0.04	3.9	0.16	23.20	0.01	0.04	0.12	1.25	21.90	27	30	33	CL	100.	
55.2 - 60.2		8.2	4.14	42.4	1.92	0.85	46.10	0.56	0.06	8.5	0.62	13.00	0.01	0.41	0.21	12.80	0.16	35	37	29	CL	123.	
60.2 - 65.8		7.3	5.57	34.4	6.53	1.63	69.50	0.98	1.25	0.16	16.6	0.85	15.30	0.01	0.45	0.39	14.10	1.21	53	16	30	SL	83.
65.8 - 68.0		7.1	6.04	29.8	14.70	3.37	89.50	1.20	0.24	14.7	1.21	22.80	0.01	0.76	0.45	23.70	-0.96	45	20	36	CL	75.	
68.0 - 73.0		7.8	5.31	35.2	4.91	0.84	59.70	0.70	0.85	0.06	5.6	0.66	26.00	0.02	0.44	0.20	13.70	12.30	24	30	48	C	83.
73.0 - 78.0		8.4	2.28	23.4	1.24	0.47	21.60	0.72	0.05	4.6	0.39	53.30	0.01	0.21	0.17	6.56	46.70	17	41	42	SIC	84.	
78.0 - 81.0		8.7	0.96	18.9	0.42	0.31	10.20	0.30	0.01	3.9	0.25	115.00	0.06	0.03	0.14	0.94	114.00	26	47	28	CL	134.	
81.0 - 86.0		9.1	0.84	17.5	0.36	0.18	8.09	0.40	0.15	0.01	3.6	0.12	103.00	0.01	0.01	0.12	-0.01	103.00	35	37	28	CL	168.
86.0 - 91.0		0.2	0.63	8.8	0.77	0.28	6.37	0.32	0.01	4.1	0.13	157.00	0.01	0.01	0.12	0.31	158.00	50	28	24	SICL	126.	
91.0 - 93.8		9.3	0.88	10.3	0.38	0.12	9.44	0.36	0.10	0.01	3.4	0.12	151.00	0.01	0.01	0.12	-0.01	151.00	58	21	21	SICL	155.
93.8 - 98.8		8.6	1.52	23.4	0.82	0.29	15.80	0.28	0.01	5.7	0.32	86.40	0.05	0.12	0.15	3.75	84.70	14	45	42	SIC	93.	
98.8 - 103.8		8.6	1.46	22.3	0.83	0.35	15.80	0.50	0.01	5.9	0.30	86.00	0.01	0.15	0.14	4.00	83.30	8	49	43	SIC	92.	
103.8 - 106.8		8.5	1.27	24.3	0.80	0.13	14.70	0.36	0.01	5.5	0.29	167.00	0.01	0.15	0.13	4.00	162.00	18	50	35	SICL	78.	
106.8 - 113.8		0.5	1.15	18.6	0.72	0.27	13.10	0.98	0.03	5.4	0.27	170.00	0.05	0.10	0.12	3.12	166.00	20	46	34	CL	71.	
113.8 - 118.8		8.4	1.92	28.1	0.68	0.27	19.40	0.60	0.01	6.0	0.28	156.00	0.01	0.12	0.15	3.75	152.00	17	50	33	SICL	70.	
118.8 - 120.0		8.3	2.42	29.1	0.66	0.29	22.10	0.90	0.85	0.06	7.2	0.47	86.40	0.01	0.27	0.20	8.43	80.00	14	45	42	SIC	88.
140.2 - 144.6		8.5	2.62	39.7	0.95	0.35	32.00	0.54	0.40	0.02	5.8	0.32	214.00	0.06	0.10	0.14	3.12	211.00	56	25	19	SL	33.
144.6 - 148.5		8.8	2.36	33.3	0.72	0.21	22.70	0.76	0.85	0.02	4.6	0.64	94.30	0.01	0.47	0.17	14.70	78.60	17	35	48	C	31.
153.6 - 155.3		7.9	5.76	55.0	2.29	0.71	87.40	0.92	0.75	0.07	12.4	0.75	11.00	0.04	0.44	0.27	13.70	-2.73	30	33	37	CL	99.
155.3 - 158.9		9.2	1.53	29.8	0.50	0.10	16.30	0.60	0.40	0.02	4.6	0.19	24.80	0.01	0.06	0.13	1.87	22.90	26	46	26	CL	96.
158.9 - 161.6		6.9	3.31	53.3	0.85	0.21	38.80	0.84	0.80	0.06	9.5	1.00	13.30	0.01	0.78	0.22	24.40	-11.00	38	31	31	CL	95.
161.6 - 166.0		9.1	2.14	32.6	0.67	0.15	20.90	0.60	0.35	0.03	4.6	0.60	18.60	0.01	0.43	0.17	13.40	5.20	34	43	24	L	88.
166.6 - 168.2		9.0	2.07	31.8	0.69	0.18	21.00	0.42	0.02	8.1	0.33	155.00	0.01	0.18	0.14	5.94	149.00	52	30	18	L	45.	
168.2 - 173.2		9.1	2.15	30.0	0.79	0.18	20.90	0.72	0.04	5.2	0.78	49.00	0.01	0.58	0.18	18.10	30.80	23	49	26	CL	90.	
173.2 - 178.2		8.9	2.74	39.9	1.26	0.27	34.90	0.82	0.03	5.9	1.34	38.00	0.01	1.06	0.25	34.10	3.82	26	45	28	CL	87.	
178.2 - 179.6		8.8	2.35	38.6	0.65	0.13	24.10	0.64	1.05	0.04	8.2	1.35	17.10	0.01	1.14	0.21	35.80	-18.80	29	36	33	CL	80.
187.4 - 192.4		9.5	1.68	33.3	0.39	0.09	16.30	4.32	0.40	0.02	3.7	0.49	28.10	0.05	0.27	0.17	8.43	19.70	27	41	32	CL	180.
192.4 - 195.0		9.9	1.20	26.1	0.43	0.12	13.70	0.60	0.01	4.0	0.48	45.30	0.01	0.30	0.16	8.37	36.00	36	28	38	CL	204.	
195.0 - 196.2		9.2	3.19	54.0	0.80	0.21	38.40	0.40	0.30	0.01	2.7	0.39	39.80	0.01	0.21	0.16	8.56	33.30	70	15	15	BL	63.

**APPENDIX 5-B. Drill Hole 389-48 Overburden Analysis**

Interval (ft)	pH	EC (mmhos/cm @ 25°C)	SAR	Ca	Mg	Na	Boron	Total Selenium (ppm)	H2O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Neut. Pot. (V/1000)	Sulfate Sulfur (%)	Pyritic Sulfur (%)	Organic Sulfur (%)	Pyr S AB (V/1000)	Pyr S ABP (V/1000)	Sand	Silt	Clay	Texture	Sat.		
Top- Bot				(meq/l)	(meq/l)	(meq/l)	(ppm)													(%)	(%)	(%)	(%)	(%)
0.0 - 5.0	7.9	8.56	25.2	17.20	4.45	83.00	0.68	0.75	0.04	3.7	0.28	95.10	0.18	0.08	0.01	2.61	92.30	41	22	37	CL	57.6		
5.0 - 9.0	7.7	4.80	28.9	3.53	1.37	45.20	0.45	0.20	0.02	3.5	0.28	15.10	0.27	0.01	-0.01	15.10	38	29	33	CL	52.0			
9.0 - 14.0	7.7	8.37	23.3	15.90	7.31	79.50	0.46	0.03	3.6	0.55	14.90	0.34	0.01	0.01	-0.01	14.80	32	27	42	C	74.2			
14.0 - 19.0	7.9	8.85	24.0	18.40	7.08	82.20	0.30	0.55	0.05	3.1	0.51	144.00	0.50	0.01	0.01	-0.01	144.00	31	36	32	CL	78.4		
18.0 - 22.0	7.8	0.48	23.7	18.50	6.85	80.80	0.24	0.05	3.6	0.77	59.70	0.60	0.18	0.01	5.00	54.70	25	40	35	CL	86.8			
22.0 - 24.2	7.4	11.10	31.1	16.10	8.43	109.00	0.33	0.85	0.11	8.1	0.75	9.37	0.55	0.01	0.20	-0.01	9.37	40	20	41	C	102.0		
24.2 - 29.2	7.0	8.68	25.3	15.20	6.45	83.20	0.33	0.04	4.3	0.82	4.12	0.82	0.05	0.15	1.56	2.58	18	29	53	C	111.0			
29.2 - 34.2	7.4	9.20	27.0	16.40	7.80	93.60	0.36	0.30	0.04	4.0	1.15	5.83	0.98	0.05	0.14	1.56	4.26	18	28	57	C	94.3		
34.2 - 37.4	8.0	10.60	28.2	17.50	8.21	101.00	0.18	0.03	3.5	0.83	106.00	0.80	0.05	0.08	1.56	104.00	35	32	33	CL	86.6			
37.4 - 42.4	8.1	8.88	27.6	7.09	3.23	82.70	0.12	0.04	3.8	0.59	110.00	0.39	0.17	0.04	109.00	24	38	40	CL	87.0				
42.4 - 47.4	6.5	3.96	38.9	1.47	0.80	39.30	0.09	0.10	0.02	3.5	0.27	139.00	0.08	0.04	0.15	1.25	138.00	22	46	32	CL	101.0		
47.4 - 52.4	8.1	8.21	26.4	6.55	3.15	82.60	0.12	0.01	4.2	0.38	66.10	0.18	0.04	0.18	1.25	86.60	19	42	39	SICL	97.5			
52.4 - 55.8	8.0	8.07	27.8	11.80	5.72	81.60	0.15	0.01	4.0	0.43	78.40	0.24	0.04	0.15	1.25	77.20	31	38	32	CL	77.3			
55.8 - 60.8	8.9	1.67	37.4	0.25	0.09	15.40	0.06	0.01	3.0	0.31	119.00	0.06	0.06	0.11	0.14	3.44	116.00	39	41	21	L	155.0		
60.8 - 65.8	9.4	1.06	35.0	0.12	0.05	10.20	0.12	0.01	2.8	0.26	131.00	0.06	0.19	0.01	5.84	125.00	32	46	22	L	220.0			
65.8 - 70.8	9.5	0.97	22.8	0.31	0.09	10.20	0.15	0.05	0.01	2.7	0.25	117.00	0.07	0.05	0.13	1.56	115.00	36	43	22	L	237.0		
70.8 - 75.8	9.4	0.88	17.3	0.36	0.09	8.20	0.18	0.01	2.9	0.01	93.20	0.01	0.01	0.01	-0.01	93.20	36	40	24	L	203.0			
75.8 - 79.2	9.3	0.90	20.2	0.35	0.09	9.50	0.06	0.01	3.4	0.23	119.00	0.02	0.07	0.14	2.19	117.00	45	33	22	L	153.0			
79.2 - 84.2	8.6	1.76	38.1	0.26	0.09	16.40	0.24	0.01	4.0	0.27	101.00	0.02	0.07	0.18	2.19	99.20	25	42	33	CL	120.0			
84.2 - 85.0	8.9	2.19	41.0	0.50	0.12	22.80	0.21	0.40	0.01	4.7	0.30	72.20	0.03	0.11	0.16	3.44	68.70	24	43	33	CL	121.0		
106.0 - 107.4	7.8	7.04	43.1	3.63	1.14	68.00	0.30	0.50	0.04	4.7	0.54	4.83	0.03	0.30	0.21	9.37	-4.54	42	31	27	CL	49.4		
107.4 - 109.2	7.5	8.41	55.3	2.02	0.67	84.10	0.48	0.80	0.04	8.6	1.55	5.30	0.01	1.19	0.36	37.20	-31.80	20	48	35	SICL	54.7		
109.2 - 114.2	8.5	3.54	33.8	1.59	0.55	35.00	0.09	0.15	0.01	3.7	0.30	72.20	0.01	0.13	0.16	4.06	88.20	66	20	11	BL	24.0		
114.2 - 118.1	9.0	2.60	47.2	0.59	0.12	28.10	0.12	0.01	2.9	0.01	122.00	0.01	0.01	0.01	-0.01	122.00	67	22	11	BL	21.5			
118.1 - 121.4	9.0	2.59	36.6	0.47	0.56	26.30	0.36	0.60	0.01	6.0	1.00	71.00	0.01	0.75	0.25	23.40	47.60	22	35	44	C	90.5		
121.4 - 122.6	7.2	9.95	32.3	12.80	3.52	92.30	0.61	1.80	0.07	38.9	1.98	10.90	0.05	1.31	0.62	40.90	-30.00	56	18	24	SCL	50.2		
122.6 - 124.5	8.9	1.88	30.7	0.52	0.24	18.90	0.27	0.55	0.04	5.9	0.84	6.72	0.09	0.48	0.27	15.00	-8.28	16	38	46	C	101.0		
124.5 - 127.3	7.0	7.83	45.6	5.85	1.85	88.30	0.61	1.05	0.15	18.3	1.74	5.13	0.01	1.09	0.65	34.10	-26.90	41	21	37	CL	74.2		
132.0 - 137.0	8.8	2.38	34.3	0.91	0.16	25.10	0.27	0.65	0.03	7.0	1.32	8.26	0.01	1.01	0.31	31.80	-23.30	37	39	24	L	69.4		
137.0 - 138.8	8.2	3.33	26.1	1.72	0.71	28.80	0.39	0.03	8.4	1.77	5.36	0.04	1.41	0.32	44.00	-38.70	56	43	21	L	64.7			
138.8 - 140.8	7.4	4.54	39.0	2.01	0.67	45.10	0.72	0.10	0.04	14.7	1.78	6.21	0.10	1.17	0.51	36.80	-30.30	36	37	27	CL	78.4		
140.8 - 145.8	9.0	1.95	20.7	0.88	0.38	18.30	0.30	0.15	0.01	5.0	0.44	114.00	0.18	0.11	0.17	3.44	110.00	51	30	19	L	46.0		
145.8 - 147.2	8.8	1.34	15.2	0.76	0.51	12.10	0.42	0.03	5.0	1.95	5.18	0.97	0.66	0.32	20.80	-15.40	22	50	26	CL	88.5			
147.2 - 152.2	9.0	2.56	28.6	0.58	0.46	20.80	0.42	0.02	5.9	2.45	15.00	0.01	2.06	0.36	65.00	-60.00	28	43	31	CL	97.7			
152.2 - 153.5	8.9	1.93	27.1	0.89	0.29	20.80	0.42	0.75	0.04	5.6	1.50	8.30	0.01	1.25	0.25	39.00	-30.80	25	46	30	CL	84.3		
164.3 - 168.3	9.5	2.56	9.9	0.92	0.14	7.20	0.36	0.45	0.03	4.1	0.38	6.85	0.21	0.01	0.17	-0.01	8.55	21	41	36	CL	147.0		
168.3 - 172.0	9.2	1.31	19.4	0.57	0.29	12.70	0.30	0.02	4.0	0.78	69.30	0.01	0.54	0.24	16.90	52.40	29	45	26	L	179.0			
175.0 - 177.3	9.2	1.99	23.8	0.98	0.18	18.10	0.39	0.60	0.01	4.9	1.38	95.80	0.01	0.93	0.43	29.10	66.60	60	25	15	BL	107.0		
182.7 - 185.7	8.1	4.76	40.8	1.97	0.61	48.30	0.24	0.55	0.02	3.2	0.58	5.44	0.08	0.30	0.20	8.37	-3.83	49	42	9	L	49.6		
186.7 - 189.7	7.7	7.42	43.9	3.88	1.33	70.80	0.27	0.01	2.8	1.84	5.80	0.10	1.20	0.24	37.50	-31.70	51	42	8	L	49.1			
189.7 - 194.2	9.4	2.36	42.5	0.42	0.24	24.40	0.45	0.35	0.01	4.6	2.49	4.98	0.52	1.60	0.37	50.00	-45.00	41	48	13	L	108.0		
194.2 - 196.9	9.5	1.88	32.1	0.83	0.18	20.40	0.36	0.15	0.01	3.9	0.33	121.00	0.01	0.16	0.17	5.00	116.00	60	29	11	BL	79.1		
196.9 - 197.9	9.4	1.82	24.3	0.54	0.22	15.00	0.36	0.10	0.01	4.0	0.20	121.00	0.01	0.04	0.18	1.25	120.00	62	26	10	BL	75.7		
203.0 - 206.0	8.4	4.23	78.4	0.46	0.12	42.20	0.21	0.02	0.01	1.7	0.26	128.00	0.03	0.11	0.12	3.44	125.00	65	8	7	LB	34.1		
208.0 - 213.8	8.4	5.04	74.6	0.65	0.14	47.00	0.21	0.01	1.3	0.24	6.26	0.03	0.08	0.13	2.50	3.76	66	6	6	LS	34.9			

**APPENDIX 5-B. Drill Hole 389-49 Overburden Analysis**

Interval (ft)	pH	EC (mmhos/cm @ 25°C)	SAR	Ca (meq/l)	Mg (meq/l)	Na (meq/l)	Boron (ppm)	Total Selenium (ppm)	H2O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Neut. Pot. (V/1000)	Sulfate Sulfur (%)	Sulfide Sulfur (%)	Pyr. S AB (V/1000)	Pyr. S ABP (V/1000)	Sand (%)	SM (%)	Clay (%)	Texture	Sal. (%)	
Top - Bot.																						
0.0 - 5.0	7.4	7.06	26.2	14.40	3.17	77.80	0.51	0.50	0.07	4.7	0.56	10.80	0.21	0.04	0.11	1.25	0.52	36	28	31	CL	81.4
5.0 - 10.0	7.7	9.92	25.8	15.40	6.82	85.90	0.24	0.40	0.14	3.9	0.45	20.90	0.27	0.06	0.12	1.87	19.00	30	41	30	CL	87.7
10.0 - 15.0	7.5	9.86	24.7	15.30	6.10	84.50	0.15	0.85	0.10	4.3	0.48	8.53	0.31	0.16	0.01	5.00	1.83	29	29	42	C	164.0
15.0 - 17.0	7.1	3.88	28.1	2.37	1.34	38.30	0.30	0.12	4.0	0.29	5.82	0.28	0.01	0.01	-0.01	5.82	16	35	50	C	111.0	
17.0 - 18.0	7.1	7.20	22.0	12.60	6.90	69.20	0.15	1.00	0.06	5.3	0.71	4.22	0.53	0.03	0.15	0.94	3.28	14	37	46	C	106.0
18.0 - 20.9	7.6	8.70	23.4	15.30	6.21	80.20	0.30	1.30	0.13	4.8	0.67	35.60	0.70	0.12	0.05	3.75	31.90	22	30	48	C	104.0
20.9 - 21.4	7.3	9.70	26.0	15.90	12.20	87.30	0.33	1.35	0.25	10.1	2.03	8.47	1.75	0.07	0.21	2.19	6.28	24	28	49	C	99.1
21.4 - 23.3	7.3	7.02	22.9	12.20	6.29	66.70	0.33	0.50	0.11	4.8	0.57	4.01	0.56	0.01	0.01	-0.01	4.01	19	34	48	C	103.0
23.3 - 26.3	8.9	4.82	23.4	5.00	2.68	45.90	0.24	0.50	0.10	3.8	0.26	8.45	0.11	0.16	0.01	5.00	1.45	23	38	40	CL	85.9
26.3 - 30.0	8.0	8.07	24.6	13.80	7.14	79.50	0.12	0.02	3.4	0.30	57.70	0.18	0.13	0.01	4.06	53.60	25	42	33	CL	77.0	
30.0 - 35.0	8.4	3.14	27.5	1.96	0.86	32.70	0.18	0.07	3.7	0.22	66.50	0.21	0.01	0.01	-0.01	66.50	21	42	37	CL	80.0	
35.0 - 40.0	8.3	4.94	24.7	5.71	2.74	50.70	0.21	0.35	0.06	4.1	0.23	116.00	0.11	0.01	0.12	-0.01	116.00	22	36	40	C	77.7
40.0 - 41.0	8.0	8.70	24.5	13.90	6.94	79.00	0.15	0.06	3.6	0.35	122.00	0.17	0.05	0.13	1.56	121.00	22	41	38	CL	65.9	
41.0 - 42.1	8.2	5.41	29.8	4.43	2.51	55.50	0.09	0.30	0.04	4.2	0.30	60.40	0.14	0.14	0.62	59.80	13	36	51	C	112.0	
42.1 - 47.1	8.7	2.63	24.9	1.30	0.55	23.90	0.06	0.01	3.1	0.24	142.00	0.06	0.04	0.12	1.25	141.00	51	23	26	SCL	98.6	
47.1 - 52.4	8.3	1.20	16.1	1.00	0.13	12.10	0.12	0.40	0.01	3.2	0.15	160.00	0.01	0.01	0.15	-0.01	160.00	52	25	23	SCL	140.0
52.4 - 69.3	8.6	3.49	29.3	2.35	0.52	35.10	0.24	0.20	0.03	4.1	0.58	25.00	0.05	0.33	0.20	10.30	14.70	28	51	22	SIL	99.4
69.3 - 74.3	9.0	1.48	17.0	1.19	0.16	14.00	0.30	0.02	5.8	0.29	109.00	0.01	0.12	0.17	3.75	108.00	22	41	36	CL	99.4	
74.3 - 76.5	8.8	1.36	10.4	2.30	0.86	12.70	0.30	0.04	22.9	0.75	13.30	0.01	0.36	0.30	11.20	2.04	38	33	CL	91.1		
76.5 - 78.0	9.8	7.86	10.6	0.80	0.10	6.60	0.18	0.70	0.02	6.3	0.36	14.80	0.09	0.11	0.16	3.44	11.30	50	31	20	L	145.0
78.0 - 82.2	8.3	3.45	33.7	1.47	0.43	32.80	0.80	0.65	0.17	3.5	0.27	101.00	0.06	0.05	0.16	1.56	90.30	81	15	24	SCL	66.7
82.2 - 87.2	9.0	1.42	16.8	0.98	0.26	14.80	0.45	0.20	0.03	8.1	0.30	9.80	0.04	0.08	0.17	2.81	7.08	28	35	37	CL	87.3
87.2 - 92.6	6.6	1.00	15.7	0.97	0.16	11.80	0.45	0.04	8.0	0.25	10.10	0.05	0.03	0.17	0.94	9.21	25	37	39	CL	66.2	
92.6 - 94.3	7.8	4.04	34.5	2.27	0.46	40.30	0.78	1.85	0.09	30.1	0.79	10.80	0.10	0.11	0.58	3.44	7.15	74	9	17	BL	52.3
94.3 - 95.0	6.9	5.74	27.7	6.54	1.30	54.80	0.87	1.95	0.05	65.3	1.49	11.20	0.17	0.44	0.86	13.70	-2.58	88	8	5	S	58.6
95.0 - 96.0	8.7	4.31	18.7	7.21	1.11	38.20	2.07	0.95	0.02	86.0	1.16	11.60	0.06	0.23	0.87	7.19	4.80	90	6	4	S	66.7
102.1 - 107.1	8.6	0.79	10.6	0.89	0.13	7.70	0.39	0.50	0.01	5.6	0.43	68.20	0.01	0.21	0.22	6.58	61.70	24	45	31	CL	58.8
107.1 - 112.1	8.8	0.87	8.8	1.46	0.62	9.00	0.21	0.01	3.8	0.28	100.00	0.01	0.05	0.23	1.56	96.90	54	28	21	SCL	32.2	
112.1 - 113.1	8.7	1.52	23.4	0.48	0.31	14.70	0.21	0.01	3.9	0.27	122.00	0.01	0.04	0.22	1.25	121.00	14	44	42	SCL	84.0	
113.1 - 113.9	8.9	1.74	25.3	0.49	0.20	15.70	0.36	0.80	0.01	4.5	1.28	67.20	0.01	0.99	0.29	30.90	36.30	15	36	49	C	96.5
121.1 - 123.6	8.8	1.66	23.3	0.65	0.22	15.40	0.42	0.65	0.03	7.8	0.45	8.03	0.04	0.28	0.13	8.75	-0.72	38	38	24	L	58.2
123.6 - 124.9	7.1	2.37	24.4	0.86	0.31	16.70	2.76	0.65	0.01	90.5	1.11	9.79	0.10	0.31	0.70	9.88	0.10	93	6	18	SIL	63.8
124.9 - 125.5	6.6	7.09	38.4	4.58	1.50	66.90	0.51	0.70	0.03	13.4	1.32	4.30	0.06	1.03	0.23	32.20	-27.90	42	38	20	L	58.5
125.5 - 130.8	9.0	1.84	26.5	0.55	0.11	15.20	0.36	0.40	0.02	4.6	0.80	57.70	0.01	0.42	0.18	13.10	44.50	41	35	24	L	58.0
130.8 - 135.6	8.8	2.55	26.3	0.94	0.24	20.20	0.48	0.02	8.1	1.57	14.70	0.04	1.25	0.26	30.00	-24.30	29	44	27	CL	65.5	
135.6 - 137.7	9.0	1.83	17.8	1.36	0.33	16.50	0.33	0.55	0.02	5.1	1.31	13.20	0.01	1.07	0.24	33.40	-20.20	23	52	25	SIL	74.0
140.0 - 151.4	9.5	1.31	26.4	0.39	0.08	12.60	0.39	0.20	0.01	4.0	0.48	107.00	0.01	0.25	0.23	7.81	90.50	16	52	30	SCL	128.0
151.4 - 153.0	9.3	1.79	27.0	0.59	0.13	18.20	0.33	0.20	0.01	5.3	0.71	160.00	0.01	0.48	0.23	15.00	145.00	37	38	25	L	133.0
155.0 - 157.6	9.7	1.43	26.4	0.32	0.10	12.10	0.36	0.35	0.01	3.7	0.34	114.00	0.01	0.18	0.18	5.82	108.00	33	36	28	CL	245.0
157.6 - 161.2	9.2	2.59	38.0	0.46	0.11	20.30	0.42	0.75	0.01	5.4	1.63	28.50	0.01	1.31	0.32	40.80	-14.40	43	27	31	C	96.4
167.0 - 172.0	8.4	5.37	45.7	1.86	0.60	50.70	0.30	0.15	0.01	2.6	0.48	11.20	0.06	0.25	0.15	7.81	3.38	48	41	11	L	44.4
172.0 - 177.2	9.4	2.40	32.6	0.43	0.14	17.40	0.30	0.15	0.01	3.4	0.69	8.29	0.16	0.32	0.21	10.00	-3.70	27	57	16	SIL	85.3
177.2 - 180.7	9.6	1.36	23.0	0.47	0.12	12.50	0.51	0.40	0.01	8.1	0.37	128.00	0.01	0.17	0.20	5.31	120.00	44	32	24	L	125.0
187.2 - 192.2	8.7	5.08	54.4	0.97	0.37	44.50	0.21	0.02	0.01	1.3	0.27	3.55	0.08	0.07	0.12	2.19	1.36	84	8	8	LS	33.8
192.2 - 198.2	8.5	5.78	50.2	1.46	0.57	50.60	0.24	0.01	1.4	0.27	2.77	0.05	0.07	0.15	2.19	0.58	66	8	6	LS	33.8	

**APPENDIX 5-B. Drill Hole 389-50 Overburden Analysis**

Interval (m) Top - Bot	pH	EC (mmhos/cm @ 25°C)	SAR	Ca	Mg	Na	Boron	Total Selenium (ppm)	H2O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Neut. Pot.	Sulfate Sulfur (%)	Pyritic Sulfur (%)	Organic Sulfur (%)	Pyr S AB (/10000)	Pyr S ABP (/10000)	Sand	SIL	Clay	Texture	Sat.
0.0 - 5.0	8.0	8.53	28.5	19.10	2.32	93.20	0.75	0.85	0.01	4.1	0.51	36.00	0.32	0.16	0.01	5.62	32.30	17	15	68	C	151.0
5.0 - 10.0	8.6	2.88	28.5	2.46	0.33	33.70	0.45		0.01	2.9	0.22	36.80	0.06	0.15	0.01	4.98	34.10	34	21	45	C	157.0
10.0 - 15.0	8.4	3.28	29.8	2.26	0.82	36.70	0.51	0.10	0.01	1.6	0.18	23.90	0.17	0.01	0.01	-0.01	23.30	80	12	29	BCL	86.3
15.0 - 16.9	8.6	8.57	24.2	16.90	7.91	85.30	0.51		0.02	3.9	0.25	16.10	0.07	0.03	0.15	0.84	15.20	56	15	26	BCL	46.9
16.9 - 21.6	3.8	13.90	22.2	26.90	31.50	120.00	0.39		0.01	15.1	2.30	-8.11	1.93	0.07	0.30	2.19	-10.30	83	17	20	SL	52.0
21.6 - 25.4	3.3	16.90	15.6	25.10	96.50	123.00	0.18		0.01	19.7	1.17	-11.10	0.86	0.02	0.29	0.62	-11.70	73	13	14	BL	48.9
20.4 - 33.4	7.7	4.81	32.1	5.06	1.72	59.10	0.39	0.80	0.02	5.8	0.54	54.50	0.01	0.33	0.21	10.30	44.20	24	42	34	CL	64.7
33.4 - 37.7	8.6	3.78	41.5	1.93	0.84	48.80	0.30	0.15	0.02	5.9	0.24	224.00	0.01	0.05	0.18	1.58	223.00	66	17	18	BL	24.8
37.7 - 41.0	8.7	3.18	48.5	1.04	0.41	41.30	0.30	0.60	0.02	5.8	0.38	116.00	0.01	0.18	0.19	5.62	112.00	18	44	36	BICL	77.5
52.3 - 55.3	8.9	2.20	38.0	0.74	0.12	23.80	0.24	0.55	0.03	6.7	0.20	92.20	0.01	0.06	0.14	1.67	90.40	47	32	22	L	52.0
55.3 - 60.3	8.0	7.31	45.4	5.28	1.83	64.30	0.54		0.04	8.5	1.20	26.30	0.01	0.94	0.26	29.40	-3.05	30	41	29	CL	79.1
60.3 - 63.7	8.9	3.67	51.3	1.17	0.35	44.70	0.38	0.80	0.04	5.3	1.25	14.40	0.01	1.02	0.23	31.90	-17.50	21	54	25	SIL	81.0
77.4 - 82.4	9.3	1.94	23.8	1.13	0.19	19.30	0.33	0.25	0.03	5.3	0.63	94.20	0.01	0.43	0.20	13.40	80.80	22	46	33	CL	126.0
82.4 - 83.7	9.6	1.32	26.4	0.39	0.15	13.70	0.30		0.01	4.3	0.24	124.00	0.14	0.01	0.10	-0.01	124.00	15	56	29	BICL	220.0
83.7 - 87.5	10.1	1.12	24.6	0.37	0.06	11.40	0.30	0.55	0.01	2.9	0.26	144.00	0.06	0.07	0.13	2.19	142.00	31	47	22	L	312.0
87.5 - 92.9	8.3	3.27	54.4	0.69	0.18	35.90	0.48	0.90	0.01	5.8	1.38	25.80	0.02	1.04	0.32	32.50	-6.57	40	25	35	CL	125.0
90.6 - 103.6	8.4	4.26	38.4	1.96	1.01	44.40	0.30	0.45	0.02	2.4	0.41	4.23	0.06	0.19	0.18	5.94	-1.71	47	43	10	L	43.2
103.6 - 108.6	7.6	5.11	29.7	5.01	1.49	53.50	0.24		0.01	2.5	0.45	15.20	0.06	0.24	0.15	7.50	7.68	46	42	13	L	42.5
106.6 - 113.6	7.4	7.93	19.3	23.20	5.59	73.70	0.18		0.01	2.8	0.82	17.30	0.10	0.35	0.17	10.90	8.38	55	35	11	SL	30.2
113.6 - 118.6	9.1	2.71	25.1	1.88	0.41	26.90	0.45		0.03	3.4	0.27	174.00	0.01	0.10	0.17	3.12	171.00	40	29	22	L	68.5
118.6 - 120.3	7.7	8.75	44.9	3.88	1.47	73.40	1.32		0.05	25.6	1.13	46.30	0.01	0.75	0.38	23.40	22.90	33	36	31	CL	92.1
120.3 - 121.6	7.9	5.57	45.2	2.39	0.93	58.30	0.66	0.90	0.04	9.4	1.05	8.45	0.01	0.78	0.25	24.70	-18.20	25	53	23	SIL	66.1
129.4 - 134.4	7.3	8.95	30.4	13.80	3.74	89.40	0.68		0.01	3.4	0.67	7.05	0.04	0.45	0.18	14.10	-7.01	74	18	11	BL	33.8
134.4 - 138.4	3.7	10.70	20.7	16.60	8.43	76.10	0.21		0.01	1.5	0.45	0.00	0.06	0.23	0.13	7.19	-7.18	67	6	5	LS	31.6
138.4 - 141.3	3.4	11.30	19.2	22.80	9.65	77.00	0.24	0.35	0.01	1.9	0.45	-0.31	0.07	0.22	0.16	8.87	-7.19	66	6	5	LS	31.0
145.6 - 150.6	8.3	3.90	44.0	1.02	0.41	37.20	0.33	0.90	0.01	1.5	0.38	3.63	0.05	0.16	0.15	5.00	-1.37	82	8	11	LS	60.0
150.6 - 154.6	9.1	2.36	32.1	0.48	0.25	19.40	0.30		0.01	1.5	0.33	4.75	0.13	0.05	0.15	1.56	3.18	82	11	7	LS	114.0

## APPENDIX 5-B. Drill Hole 389-51 Overburden Analysis

Interval (ft) Top- Bot	pH	EC (mmhos/cm @ 25°C)	SAR	Ca (meq/l)	Mg (meq/l)	Na (meq/l)	Boron (ppm)	Total Selenium (ppm)	H2O Sol. Selenium (ppm)	Tot. Org Carbon (%)	Total Sulfur (%)	Neut. Pot. (l/10000)	Sulfate Sulfur (%)	Sulfide Sulfur (%)	Organic Sulfur (%)	Pyr S AB (l/10000)	Pyr S ABP (l/10000)	Sand (%)	Silt (%)	Clay (%)	Texture	Sat. (%)
5.5 - 6.3	8.2	4.03	26.3	2.08	2.38	39.20	0.18	0.02	0.01	2.7	0.01	61.80	0.01	0.01	0.01	-0.01	61.80	68	18	14	SL	33.2
6.3 - 8.6	8.4	2.16	22.2	1.11	0.73	21.30	0.24	0.20	0.01	2.9	0.01	37.90	0.01	0.01	0.01	-0.01	37.90	76	16	9	SL	33.4
8.6 - 13.8	8.2	2.15	13.3	1.94	1.11	16.40	0.09	0.45	0.01	2.1	0.15	237.00	0.14	0.01	0.01	-0.01	237.00	76	15	9	SL	26.1
13.8 - 14.8	7.9	3.50	15.7	4.66	3.49	31.80	0.12	0.02	3.0	0.21	46.30	0.20	0.01	0.01	-0.01	48.30	60	25	15	SL	32.2	
14.8 - 19.8	7.8	3.91	14.9	5.84	5.39	35.90	0.21	0.04	3.9	0.20	33.30	0.08	0.11	0.01	3.44	29.60	33	45	22	L	39.5	
19.8 - 24.8	7.9	4.88	18.0	4.73	5.46	36.20	0.12	0.05	0.04	3.6	0.22	67.40	0.07	0.14	0.01	4.37	63.00	35	43	22	L	38.7
24.8 - 27.7	8.0	5.61	16.5	8.14	6.36	44.50	0.03	0.02	4.3	0.20	75.50	0.03	0.16	0.01	5.00	70.50	26	47	26	L	41.9	
27.7 - 28.7	8.0	3.20	18.7	2.47	3.13	31.90	0.12	1.05	0.02	5.2	0.22	88.00	0.05	0.05	0.12	1.56	86.40	12	56	30	SCL	55.9
28.7 - 29.7	7.8	8.05	14.6	11.50	14.40	53.30	0.18	0.02	5.4	0.23	67.50	0.07	0.15	0.01	4.86	62.00	42	34	24	L	40.0	
29.7 - 31.2	8.2	3.23	20.3	2.29	3.16	33.50	0.12	0.45	3.6	0.19	55.30	0.03	0.04	0.12	1.25	54.00	46	33	21	L	37.3	
31.2 - 32.6	7.8	5.86	12.6	14.70	16.80	50.10	0.12	0.10	0.01	4.4	0.19	53.30	0.04	0.14	0.01	4.37	48.80	53	27	20	SCL	33.2
32.6 - 37.8	7.8	3.93	6.2	17.20	12.10	23.90	0.03	0.10	0.01	1.7	0.17	209.00	0.18	0.01	0.01	-0.01	208.00	76	17	8	SL	24.6
37.8 - 40.3	8.4	2.48	17.1	1.74	1.22	20.80	0.03	0.01	2.8	0.19	90.50	0.18	0.01	0.01	-0.01	90.50	66	23	11	SL	26.2	
40.3 - 43.4	8.0	4.16	17.0	8.63	4.64	40.40	0.09	0.20	0.01	2.6	0.17	124.00	0.18	0.01	0.01	-0.01	124.00	71	16	11	SL	20.5
43.4 - 48.8	8.5	4.17	46.3	1.16	0.79	45.70	0.54	0.60	0.04	4.5	0.51	49.30	0.15	0.22	0.14	8.87	42.40	25	37	39	CL	77.7
54.8 - 59.8	8.7	4.12	37.8	0.87	0.51	56.30	0.54	0.55	0.07	5.7	0.77	17.40	0.01	0.57	0.20	17.80	-0.37	35	41	24	L	73.4
59.8 - 63.0	8.3	5.04	45.6	1.30	0.41	43.30	0.54	0.08	0.08	5.4	1.43	8.47	0.08	1.14	0.21	35.80	-27.10	22	54	24	SL	62.4
71.0 - 72.4	8.9	2.72	24.4	0.70	0.26	18.90	0.45	0.55	0.08	5.2	0.29	8.18	0.02	0.12	0.15	3.75	4.41	20	46	35	SCL	88.1
72.4 - 73.0	8.2	2.73	43.7	0.89	0.33	34.10	1.11	1.05	0.20	25.3	0.61	15.80	0.01	0.20	0.41	6.25	9.34	46	20	34	SCL	110.0
73.0 - 76.8	7.8	5.99	31.1	2.59	1.00	68.40	0.63	0.90	0.08	11.3	0.83	22.50	0.04	0.51	0.28	15.90	6.58	27	35	38	CL	101.0
76.8 - 81.8	8.9	2.05	37.6	0.39	0.24	21.10	0.30	0.04	0.04	4.4	0.25	116.00	0.01	0.12	0.12	3.75	113.00	22	53	28	SL	62.4
81.8 - 86.8	9.0	2.04	40.3	0.46	0.23	23.70	0.39	0.40	0.03	4.0	0.20	130.00	0.01	0.01	0.20	-0.01	130.00	30	44	28	L	83.9
86.8 - 91.8	8.9	2.40	39.8	0.48	0.41	26.40	0.45	0.03	3.8	0.43	132.00	0.20	0.08	0.15	2.50	120.00	19	57	24	SL	67.5	
91.8 - 94.2	8.7	2.51	46.3	0.47	0.23	27.40	0.48	0.04	6.5	0.31	85.90	0.01	0.11	0.20	3.44	82.40	42	30	28	CL	90.3	
94.2 - 97.7	7.1	5.59	41.9	2.91	1.03	58.80	1.41	1.25	0.07	70.7	2.78	0.73	0.10	2.03	0.83	63.40	-82.70	62	11	8	L8	63.2
97.7 - 98.2	4.6	11.30	30.4	17.50	8.82	143.00	1.14	1.15	0.06	70.3	1.36	11.30	0.02	0.50	0.04	15.80	-4.35	53	16	30	SCL	80.3
98.2 - 101.2	8.8	2.74	43.4	0.62	0.23	28.30	0.30	0.03	6.2	0.66	93.90	0.01	0.48	0.21	14.40	79.60	23	44	33	CL	120.0	
101.2 - 106.2	9.8	1.20	19.0	0.53	0.24	11.80	0.30	0.01	3.3	0.26	126.00	0.08	0.05	0.15	1.58	124.00	20	51	30	SCL	211.0	
106.2 - 111.2	9.4	1.33	18.8	0.76	0.19	13.10	0.45	0.02	5.6	1.30	37.40	0.01	1.03	0.27	32.20	5.23	43	25	32	CL	138.0	
111.2 - 113.7	9.2	1.79	30.6	0.52	0.29	19.50	0.51	0.60	0.01	4.9	1.35	27.80	0.01	1.07	0.28	33.40	-5.61	31	31	38	CL	108.0
120.9 - 121.5	9.8	1.90	39.2	0.42	0.17	21.30	0.60	0.25	0.08	3.8	0.22	30.10	0.02	0.07	0.13	2.19	27.90	20	40	40	SIC	119.0
121.5 - 126.7	9.5	1.58	29.3	0.42	0.17	15.90	0.57	0.40	0.04	4.8	0.23	152.00	0.01	0.07	0.15	2.19	150.00	30	42	26	CL	74.2
126.7 - 127.2	7.2	6.13	35.5	5.62	1.26	65.90	2.25	1.30	0.07	74.3	1.38	25.10	0.01	0.60	0.00	21.60	3.52	65	11	5	LS	60.3
127.2 - 129.0	8.8	3.00	55.5	0.46	0.19	32.10	0.69	0.50	0.07	7.6	0.96	5.29	0.02	0.70	0.24	21.90	-16.60	21	58	21	SL	75.2
129.0 - 139.6	9.6	2.64	52.2	0.47	0.09	27.60	0.68	0.85	0.02	5.0	0.79	8.11	0.02	0.58	0.21	17.50	-8.30	21	54	26	SL	114.0
139.6 - 140.5	7.5	6.77	55.3	2.63	0.91	75.60	0.76	0.30	0.01	3.8	0.96	5.21	0.32	0.43	0.21	13.40	-8.22	65	16	17	SL	62.3
140.5 - 153.6	9.0	3.32	60.0	0.53	0.14	34.70	0.27		0.01	6.7	0.42	4.90	0.19	0.10	0.13	3.12	1.77	63	12	5	LS	68.8

**APPENDIX 5-B. Drill Hole 487-01 Overburden Analysis**

Interval (ft) Top - Bot.	pH	EC (mmhos/cm @ 25°C)	ESP	SAR	Ca (meq/l)	Mg (meq/l)	Na (meq/l)	Boron (ppm)	H <sub>2</sub> O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Carbonate Sulfur (%)	Sulfate Sulfur (%)	Pyritic Sulfur (%)	Organic Sulfur (%)	Total S ABP (t/10000)	Pyritic S ABP (t/10000)	Sand (%)	Silt (%)	Clay (%)	Texture	Sel. (%)	
5.0 - 15.0	7.5	5.56			14.2	24.30	0.70	55.90	1.60	0.12	1.2	1.73	0.5	1.85	0.05	0.03	-49.00	3.00	6	47	45	SIC	96
16.0 - 17.2	6.0	2.23	27.5		23.6	1.80	0.70	28.40	0.30	0.33	0.3	0.11	14.4				141.00		43	31	26	L	68
17.2 - 19.9	7.6	6.49			19.3	21.10	4.90	69.50	0.20	0.06	1.1	0.34	10.0				69.00		5	45	50	SIC	99
19.9 - 22.6	6.5	1.62	47.5		22.5	0.60	0.70	18.10	2.50	0.09	0.1	0.03	6.3				62.00		6	37	57	C	284
23.7 - 35.0	4.0	4.80			10.2	22.10	11.60	41.80	1.70	0.50	2.2	0.41	0.1	0.26	0.02	0.13	-12.00	0.00	2	34	64	C	74
35.0 - 39.1	7.6	2.20			10.0	4.90	2.60	19.80	0.40	0.06	1.2	0.11	17.2				169.00		28	43	29	CL	45
39.1 - 41.5	9.0	0.88			16.1	0.40	0.30	9.50	0.40	0.04	0.1	0.06	39.0				368.00		43	37	20	CL	32
41.5 - 43.5	9.2	1.24	51.9		17.1	0.40	1.40	16.20	1.80	0.13	1.3	0.34	6.3				52.00		3	54	43	SIC	94
48.7 - 47.0	6.5	1.82			24.6	0.20	1.20	20.80	1.50	0.16	6.3	1.53	0.2	0.26	1.03	0.24	-46.00	-30.00	3	67	30	C	67
53.4 - 57.3	0.1	0.94			6.6	1.20	9.90	15.50	1.80	0.12	2.4	0.58	0.2	0.06	0.36	0.11	-18.00	-9.00	4	56	38	SICL	94
57.3 - 60.7	9.0	0.98	58.8		17.6	0.10	0.80	11.80	0.78	0.15	4.5	0.65	0.3	0.18	0.36	0.11	-17.00	-8.00	12	59	29	SICL	76
65.3 - 70.0	9.4	0.89			18.0	0.50	0.50	10.10	1.90	0.10	0.8	0.06	0.2				0.00		4	50	46	SIC	147
70.0 - 74.6	9.4	1.00	63.1		17.0	0.50	0.40	11.40	1.50	0.06	0.4	0.14	1.1				7.00		10	46	42	SIC	106
74.6 - 77.9	9.5	0.97			7.9	1.30	6.80	15.70	0.50	0.05	1.0	0.06	22.2				220.00		32	42	26	L	66
77.9 - 81.4	9.3	1.15			22.5	0.30	0.40	13.30	2.00	0.16	3.1	0.37	4.4				32.00		10	74	16	SIL	135
81.4 - 84.8	9.0	1.86	63.7		36.2	0.40	0.30	21.40	2.00	0.24	3.6	0.51	0.2	0.03	0.35	0.13	-14.00	-8.00	3	39	55	C	150
85.8 - 89.7	9.5	0.97			21.2	0.40	0.20	11.80	2.60	0.06	0.6	0.04	0.4				3.00		5	53	42	SIC	181
89.7 - 93.5	9.6	0.75	70.0		18.4	0.30	0.20	9.20	3.40	0.06	0.6	0.02	1.1				10.00		6	54	40	SIC-SICL	181
93.5 - 98.5	9.7	0.59			13.6	0.30	0.20	6.90	2.50	0.03	0.1	0.01	6.9				69.00		36	32	30	CL	215
98.5 - 103.5	9.6	0.57	69.8		14.5	0.30	0.10	6.50	2.60	0.02	0.2	0.00	6.7				67.00		52	19	29	SICL	229
103.5 - 106.5	9.8	0.61			19.4	0.20	0.10	7.50	1.50	0.02	0.7	0.02	9.0				68.00		57	32	11	SIL	133
106.5 - 113.5	9.7	0.64	55.6		15.6	0.20	0.20	7.10	0.30	0.03	1.1	0.08	6.0				58.00		56	33	11	SICL	87
113.5 - 118.5	9.3	1.32			27.6	0.30	0.20	13.80	2.40	0.17	5.4	0.80	0.2	0.08	0.37	0.15	-17.00	10.00	1	42	57	SIC	172
118.5 - 123.1	9.8	0.94	68.1		26.9	0.20	0.10	11.10	2.10	0.06	2.1	0.65	15.0				130.00		8	61	31	SICL	126
123.1 - 127.7	10.1	0.87			24.8	0.20	0.20	11.10	3.80	0.05	3.2	1.50	1.6	0.00	1.30	0.20	-31.00	-25.00	10	59	31	SICL	123
127.7 - 132.4	9.4	1.23	59.4		35.4	0.20	0.10	13.70	2.70	0.04	2.2	1.42	1.1	0.52	0.73	0.17	-33.00	-12.00	2	61	37	SICL	112
136.1 - 140.4	9.6	0.70			27.2	0.10	0.10	8.60	2.30	0.12	2.4	0.15	0.2				-3.00		0	41	59	SIC	111
143.2 - 145.2	9.6	0.63			8.7	0.20	2.30	9.70	3.00	0.17	8.6	0.22	0.2	0.01	0.07	0.14	-5.00	1.00	4	41	55	SIC	112
149.2 - 152.6	9.9	0.59	69.6		17.6	0.10	0.40	8.80	2.90	0.16	1.4	0.15	0.2				-3.00		2	25	79	C	125
152.6 - 156.0	9.9	0.74			29.1	0.10	0.10	9.20	3.10	0.15	4.2	0.10	0.2				-3.00		2	47	51	SIC	128
162.4 - 165.2	9.5	1.07	72.6		38.2	0.10	0.10	12.40	1.90	0.11	3.4	0.80	0.0	0.16	0.55	0.13	-27.00	-17.00	11	52	37	SICL	104
165.2 - 168.0	6.8	1.85			70.5	0.10	0.00	22.30	1.30	0.02	3.2	1.80	4.2	0.14	1.33	0.21	-11.00	0.00	10	62	28	SICL	96
168.6 - 171.0	9.6	0.62			9.8	0.10	1.10	7.50	0.40	0.02	0.8	0.00	0.1				-2.00		72	19	9	SIL	30

## APPENDIX 5-B. Drill Hole 487-02 Overburden Analysis

Interval (ft)	pH	EC (mmhos/cm @ 25°C)	ESP	SAR	Ca (meq/l)	Mg (meq/l)	Na (meq/l)	Boron (ppm)	H2O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Carbonate Total Sulfur (%)	Sulfate Sulfur (%)	Pyritic Sulfur (%)	Organic Sulfur (%)	Total S ABP (V/10000)	Pyritic S ABP (V/10000)	Sand (%)	Silt (%)	Clay (%)	Texture	Sat.	
Top - Bot																							
0.0 - 5.0	8.1	0.58			2.8	2.60	1.20	3.30	0.40	0.00	0.4	0.03	7.2			71.00		56	26	18	BCL	33	
5.0 - 6.4	8.5	1.20	13.5		15.6	0.60	0.70	12.60	1.20	0.00	0.0	0.02	7.4			73.00		6	59	35	BICL	58	
6.4 - 9.8	8.4	0.33			6.0	0.50	0.40	4.00	0.40	0.00	0.1	0.01	5.9			59.00		66	27	7	SL	26	
9.8 - 13.1	8.5	0.21			3.9	0.60	0.30	2.60	0.20	0.00	0.0	0.01	16.3			183.00		52	39	9	L	24	
13.1 - 14.0	8.5	0.48			7.8	0.40	0.40	4.90	0.80	0.01	0.1	0.01	8.1			81.00		13	56	29	BICL	48	
15.0 - 18.5	8.5	0.32			5.5	0.40	0.40	3.50	0.80	0.02	0.1	0.01	4.6			46.00		40	43	17	L-SIL	38	
18.5 - 22.1	8.4	0.66			19.9	0.20	0.20	8.90	0.60	0.02	0.2	0.01	9.4			94.00		20	53	27	BICL-SIL	42	
22.1 - 25.7	8.2	0.43			8.4	0.40	0.40	5.30	0.70	0.04	0.4	0.02	7.7			76.00		18	60	24	SIL	51	
25.7 - 29.4	8.2	0.48			6.3	0.60	0.60	4.90	0.50	0.04	0.3	0.02	8.0			79.00		16	61	21	SIL	41	
29.4 - 32.0	8.3	0.31			3.6	0.60	0.50	2.70	0.20	0.03	0.0	0.02	28.9			286.00		32	59	9	SIL	29	
32.0 - 35.6	8.1	0.52			6.1	0.60	0.60	5.30	0.30	0.02	0.2	0.03	9.6			95.00		23	56	21	SIL	42	
35.6 - 37.2	7.8	1.21			4.5	2.70	3.20	7.80	0.50	0.10	0.9	0.06	10.8			103.00		7	63	30	BICL	49	
42.9 - 47.7	8.7	1.55	41.5		29.9	0.20	0.40	16.40	1.20	0.12	3.1	1.05	0.2	0.11	0.80	0.14	-31.00	-23.00	2	67	31	BICL	93
47.7 - 52.2	8.8	1.07			37.6	0.10	0.10	11.90	0.70	0.06	1.0	1.89	0.6	1.54	0.26	0.09	-53.00	-2.00	5	76	17	SIL	50
52.2 - 56.7	9.1	0.48	40.6		17.9	0.20	0.50	10.80	0.40	0.04	0.5	0.15	4.1			36.00		2	82	16	SIL	60	
56.7 - 61.2	9.5	0.87			34.5	0.10	0.00	10.90	0.50	0.04	0.7	0.06	1.7			15.00		1	78	23	SIL	154	
61.2 - 65.7	9.7	0.90	61.1		32.6	0.10	0.00	10.30	0.40	0.03	0.3	0.07	7.4			72.00		1	75	24	SIL	207	
65.7 - 70.2	9.7	1.07			37.6	0.10	0.00	11.90	0.50	0.04	0.7	0.10	4.6			45.00		0	75	25	SIL	226	
70.2 - 74.8	9.3	1.00	51.0		35.1	0.10	0.10	11.10	0.60	0.06	1.0	0.14	5.3			48.00		5	82	33	BICL	96	
74.8 - 76.4	8.8	1.05			25.7	0.10	0.30	11.50	0.70	0.19	1.7	0.32	0.2	0.02	0.27	0.03	-6.00	-6.00	11	70	19	SIL	47
84.1 - 88.6	9.2	1.83	66.2		34.5	0.20	0.50	20.40	1.40	0.23	1.4	0.31	0.3	0.01	0.16	0.12	-7.00	-3.00	4	38	60	C	165
88.6 - 93.2	9.6	1.77			53.2	0.20	0.10	20.80	1.00	0.19	3.6	0.86	14.9			128.00		1	60	36	BICL	195	
93.2 - 97.8	9.8	1.22	73.1		41.1	0.10	0.00	13.00	1.10	0.08	3.7	0.90	4.0			12.00		3	64	33	BICL	182	
97.8 - 102.4	9.5	1.30			49.0	0.10	0.00	15.50	1.00	0.06	2.2	0.67	1.4	0.14	0.42	0.11	-7.00	1.00	1	68	31	BICL	124
102.4 - 106.9	9.8	1.43	87.6		45.9	0.10	0.10	14.50	1.40	0.04	1.9	1.27	1.2	0.14	0.98	0.15	-28.00	-19.00	0	53	47	SIL	121
106.9 - 110.8	8.7	2.09			60.8	0.20	0.10	23.80	1.50	0.07	5.2	2.03	0.1	0.27	1.65	0.11	-82.00	-51.00	3	59	36	BICL	106
110.5 - 122.9	9.7	1.31	71.6		47.1	0.10	0.00	14.90	2.30	0.31	3.6	0.28	0.1	0.11	0.14	0.03	-8.00	-3.00	1	92	7	SI	164
122.9 - 126.2	8.7	2.20			66.7	0.10	0.10	21.10	1.80	0.24	9.2	1.65	0.0	0.35	0.99	0.31	-52.00	-31.00	5	37	56	C	154
126.2 - 127.8	9.8	1.66	80.6		49.0	0.00	0.00	15.50	1.30	0.17	1.7	0.29	0.1	0.04	0.19	0.08	-8.00	-5.00	0	35	65	C	166
127.8 - 132.2	9.4	1.61			54.7	0.00	0.00	17.30	1.80	0.17	11.4	2.11	0.6	0.00	1.74	0.37	-80.00	-48.00	7	39	54	C	155
132.2 - 132.7	8.3	2.96	41.4		68.2	0.30	0.10	30.50	2.50	0.11	25.6	3.41	3.2			-75.00		33	22	45	C	84	
132.7 - 135.7	8.5	2.04			61.4	0.10	0.00	19.40	2.40	0.07	25.7	2.20	0.2	0.18	1.65	0.38	-67.00	-50.00	22	57	21	SIL	77
138.6 - 141.8	8.0	2.18	71.5		64.5	0.10	0.00	20.40	1.70	0.13	4.6	1.67	0.3	0.12	1.35	0.20	-49.00	-38.00	3	55	42	BIC	156
141.8 - 144.8	8.0	2.66			60.9	0.10	0.10	25.60	1.50	0.02	3.7	1.67	1.5	0.10	1.37	0.20	-37.00	-26.00	25	42	33	CL	110
146.0 - 147.2	8.6	0.56			5.9	0.10	2.70	7.00	0.80	0.02	6.5	0.22	0.1	0.00	0.12	0.10	-8.00	-3.00	63	22	15	SL	34
147.2 - 150.0	9.5	1.05			10.3	0.10	2.00	10.80	0.40	0.00	0.1	0.18	0.5			-1.00		78	8	14	SL	35	

### APPENDIX 5-B. Drill Hole 487-03 Overburden Analysis

Interval (m) Top - Bot	pH	EC (mmhos/cm @ 25°C)	ESP	SAR	Ca (meq/l)	Mg (meq/l)	Na (meq/l)	Boron (ppm)	H2O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Carbonate Total % CaCO3	Sulfate Sulfur (%)	Pyritic Sulfur (%)	Organic Sulfur (%)	Total S ABP (V/1000)	Pyritic S ABP (V/1000)	Sand (%)	Silt (%)	Clay (%)	Texture	Sat.	
0.0 - 9.0	6.4	1.81		5.1	12.1	2.50	1.20	16.50	1.40	0.00	0.1	0.06	18.1			158.00		29	49	22	L	44	
5.0 - 9.0	6.7	0.73			6.6	0.80	0.80	5.70	0.30	0.02	0.0	0.01	22.3			223.00		26	58	15	SIL	32	
9.0 - 10.0	6.4	0.91			6.3	0.70	0.80	6.70	0.40	0.02	0.2	0.02	12.8			128.00		14	50	27	SICL-SIL	47	
10.0 - 11.7	6.0	1.03			3.8	3.20	2.10	6.10	0.20	0.02	0.1	0.04	15.8			155.00		22	64	14	SIL	36	
11.7 - 12.2	6.3	0.68			7.3	0.70	0.80	6.30	0.40	0.02	0.5	0.02	9.5			94.00		6	58	36	SICL	60	
12.2 - 14.0	6.3	0.62			6.5	0.60	0.70	5.20	0.20	0.02	0.2	0.02	13.4			133.00		18	50	23	SIL	42	
14.0 - 17.7	8.4	0.54			5.9	0.60	0.60	4.80	0.20	0.03	0.1	0.02	30.7			308.00		9	71	20	SIL	38	
17.7 - 21.4	8.4	0.54			3.7	0.90	0.80	3.40	0.20	0.02	0.2	0.01	18.4			184.00		16	64	20	SIL	36	
21.4 - 23.1	8.2	0.47			2.6	1.10	0.80	2.40	0.30	0.01	0.9	0.00	68.3			683.00		4	85	11	SIL	31	
23.1 - 27.0	8.4	0.74			5.6	0.80	0.80	4.70	0.20	0.03	0.4	0.04	29.2			261.00		6	88	23	SIL	40	
29.8 - 31.9	6.3	1.00			7.8	0.90	0.80	7.20	0.50	0.08	0.6	0.07	19.8			194.00		15	58	27	SICL-SIL	50	
33.9 - 39.0	6.6	1.58			39.5	0.20	0.00	15.30	1.30	0.22	1.7	0.30	1.5			6.00		1	34	45	C	128	
45.0 - 49.0	9.0	1.41	46.9		44.3	0.10	0.00	14.00	1.00	0.07	0.4	0.10	1.9			18.00		3	51	48	SIC	133	
49.0 - 53.0	9.4	1.15			28.9	0.10	0.20	11.20	0.80	0.04	0.3	0.11	7.8			75.00		15	52	33	SICL	319	
53.0 - 57.0	9.0	1.49	51.2		39.0	0.20	0.00	15.10	1.00	0.12	1.2	0.10	0.9			6.00		1	50	49	SIC	144	
61.0 - 61.6	7.0	3.04			46.8	0.60	0.20	29.80	2.60	0.29	12.7	1.84	0.1	0.00	1.66	0.27	-58.00	-51.00	20	29	42	C	63
61.6 - 63.3	6.9	1.53	50.9		45.9	0.10	0.00	14.50	1.20	0.17	2.3	0.32	1.7			7.00		1	48	51	SIC	119	
63.6 - 65.9	9.3	0.88			26.3	0.10	0.00	8.80	0.80	0.02	0.5	0.05	12.5			123.00		23	60	17	SIL	36	
65.9 - 66.5	9.5	0.89	24.0		21.5	0.10	0.00	8.80	0.40	0.01	0.3	0.02	47.3			472.00		23	64	13	SIL	27	
66.5 - 69.3	8.7	0.95			30.7	0.10	0.00	9.70	0.50	0.01	0.4	0.10	58.6			583.00		1	86	13	SIL	26	
69.3 - 71.7	8.0	1.54	52.1		47.4	0.10	0.00	15.00	1.30	0.05	2.0	0.80	8.2			57.00		0	58	42	SIC	101	
71.7 - 72.2	8.4	2.07			51.6	0.20	0.00	20.00	1.50	0.06	5.5	1.78	0.3	0.14	1.48	0.18	-53.00	-43.00	1	33	66	C	92
73.5 - 77.9	9.0	1.49	51.6		46.5	0.10	0.00	14.70	1.10	0.13	1.0	0.22	0.2	0.00	0.16	0.06	-5.00	-3.00	0	51	49	SIC	112
77.9 - 82.3	8.5	1.68			57.9	0.10	0.00	16.30	1.20	0.14	1.6	0.43	1.2			-1.00		1	45	54	SIC	105	
85.1 - 86.0	8.6	1.64	52.2		50.0	0.10	0.00	15.80	1.20	0.16	2.8	0.36	0.2	0.00	0.28	0.10	-8.00	-6.00	2	38	80	C	127
87.1 - 92.0	8.6	1.62			50.9	0.10	0.00	18.10	1.20	0.13	3.0	0.24	5.0			42.00		1	54	45	SIC	97	
92.0 - 96.8	9.0	1.34	50.0		43.3	0.10	0.00	13.70	0.90	0.06	1.1	0.10	11.6			115.00		2	55	43	SIC	101	
96.8 - 98.1	9.3	0.84			28.1	0.10	0.00	8.90	0.70	0.01	0.4	0.05	45.9			457.00		23	81	16	SIL	29	
98.1 - 102.3	9.1	1.18	51.3		39.2	0.10	0.00	12.40	1.10	0.03	1.7	0.10	12.8			123.00		3	82	35	SICL	98	
102.3 - 106.4	9.1	1.16			39.2	0.10	0.00	12.40	1.10	0.09	1.9	0.12	10.4			100.00		2	58	40	SIC-SICL	104	
114.3 - 119.5	9.1	1.34	53.1		42.7	0.10	0.00	13.50	1.30	0.10	2.5	0.25	7.0			62.00		1	54	45	SIC	119	
120.0 - 124.2	9.2	1.16			39.5	0.10	0.00	12.50	0.90	0.06	1.2	0.20	8.4			78.00		0	51	49	SIC	134	
124.2 - 125.2	9.4	0.94	51.0		31.0	0.10	0.10	9.80	0.70	0.05	1.0	0.10	13.5			132.00		1	88	30	SICL	66	
125.5 - 130.5	9.3	0.88			29.1	0.10	0.10	9.20	0.40	0.02	0.4	0.07	25.7			265.00		14	85	21	SIL	52	
130.5 - 132.2	9.4	1.22	53.4		40.8	0.10	0.00	12.90	0.90	0.09	2.3	0.13	6.7			83.00		1	57	42	SIC	127	
132.2 - 132.9	9.4	1.36			45.2	0.10	0.00	14.30	1.30	0.15	7.4	1.06	1.0	0.00	0.68	0.18	-23.00	-18.00	7	51	42	SIC	123
132.9 - 133.9	9.1	1.52	59.9		51.2	0.10	0.00	18.20	1.00	0.16	5.4	0.35	0.2	0.00	0.23	0.12	-9.00	-5.00	2	30	66	C	144
138.0 - 141.6	9.4	1.41			47.4	0.10	0.00	15.00	0.80	0.10	3.7	0.70	2.0			-2.00		2	81	37	SICL	154	
141.6 - 142.2	9.5	1.18	61.0		39.5	0.10	0.00	12.50	0.40	0.01	1.7	0.33	38.1			371.00		8	74	18	SIL	115	
142.2 - 145.1	9.8	1.26			41.7	0.00	0.00	13.20	1.20	0.04	3.0	1.00	4.6			14.00		1	58	41	SIC	138	
145.1 - 145.5	10.1	1.03	74.2		33.2	0.10	0.00	10.50	1.80	0.04	0.1	0.22	1.2			5.00		5	18	77	C	91	
145.5 - 149.5	9.4	1.36			46.2	0.10	0.10	14.60	1.00	0.02	2.5	1.82	2.3	0.04	1.34	0.14	-25.00	-19.00	5	52	43	SIC	102
149.5 - 153.6	9.4	1.36	57.4		45.2	0.00	0.00	14.30	1.00	0.04	1.8	1.25	5.2			13.00		1	58	41	SIC	112	
150.4 - 161.0	9.2	1.19			39.5	0.10	0.10	12.50	1.10	0.13	3.9	0.36	0.1	0.00	0.27	0.00	-10.00	-7.00	5	50	45	SIC	116
165.4 - 168.3	9.3	1.56	65.4		50.9	0.10	0.00	18.10	1.50	0.18	5.2	0.42	0.1	0.00	0.30	0.12	-12.00	-8.00	2	30	66	C	141
169.8 - 171.5	9.8	1.41			46.1	0.00	0.00	15.20	1.40	0.16	1.7	0.09	1.7			14.00		0	53	47	SIC	134	
171.5 - 172.1	9.5	0.64	26.5		22.5	0.10	0.20	8.70	0.20	0.01	0.2	0.04	69.7			69.00		0	86	14	SIL	22	
172.1 - 175.0	9.8	1.00			34.5	0.00	0.00	10.90	0.80	0.07	0.7	0.04	2.0			19.00		10	84	26	SIL	75	
175.0 - 175.8	8.5	0.89	57.7		21.8	0.00	0.00	6.90	2.80	0.11	34.0	0.55	0.1	0.00	0.19	0.36	-16.00	-5.00	26	52	20	SIL	70
181.1 - 182.0	9.3	1.80			56.3	0.00	0.00	17.80	1.90	0.19	5.6	0.95	0.2	0.48	0.25	0.22	-28.00	-6.00	9	52	39	SICL	134
182.0 - 184.0	9.8	1.62	74.9		49.7	0.00	0.00	15.70	1.60	0.10	2.4	0.76	0.3	0.00	0.63	0.13	-21.00	-17.00	9	54	37	SICL	125
184.0 - 187.0	9.2	1.97			63.9	0.10	0.00	20.20	2.20	0.06	3.8	1.69	1.2	0.27	1.27	0.15	-41.00	-28.00	5	56	40	SIC-SICL	121
186.5 - 189.4	9.2	1.40	66.2		46.5	0.00	0.00	14.70	3.30	0.45	12.7	0.43	0.1	0.00	0.31	0.12	-12.00	-9.00	9	43	48	SIC	102
189.4 - 193.3	9.7	1.18			35.1	0.10	0.00	11.10	0.20	0.00	0.2	0.11	0.5			2.00		76	8	18	SIL	96	
193.3 - 197.2	9.9	1.17	36.2		34.8	0.00	0.00	11.00	0.70	0.01	0.2	0.38	0.5			-7.00		77	10	13	SIL	46	
197.2 - 201.1	10.0	1.21			36.4	0.10	0.00	11.50	0.10</td														

**APPENDIX 5-B. Drill Hole 487-04 Overburden Analysis**

Interval (ft) Top-Bot	pH	EC (mmhos/cm @ 25°C)	ESP	SAR	Ca (meq/l)	Mg (meq/l)	Na (meq/l)	Boron (ppm)	H2O Sol Boron (ppm)	Tot. Org Carbon	Total Sulfur (%)	Carbonate Sulfur (%)	Sulfate Sulfur (%)	Pyritic Sulfur (%)	Organic Sulfur (%)	Total S ABP (t/1000ft)	Pyritic S ABP (t/1000ft)	Sand	Silt	Clay	Texture	Set.
0.0 - 5.0	8.8	7.54		28.20	15.00	0.40	78.30	0.10	0.06	0.0	0.34	9.0				78.00		47	24	29	SCL	216
5.0 - 8.0	9.5	3.35	59.8	55.90	0.50	0.10	30.80	0.00	0.18	0.1	0.07	14.4				142.00		48	25	29	SCL	270
8.0 - 10.0	9.3	2.41		37.80	0.60	0.20	23.90	0.00	0.26	0.4	0.05	9.6				94.00		4	57	30	SICL	132
10.0 - 11.1	9.4	1.03	25.0	25.10	0.20	0.00	9.70	0.00	0.10	18.8	0.00	83.8				630.00		0	96	14	SIL	27
11.1 - 15.9	8.8	2.79		61.00	0.30	0.10	27.30	0.10	0.28	0.5	0.07	8.6				64.00		3	50	47	SIC	101
15.9 - 20.7	8.2	4.69	29.7	34.20	2.50	1.00	45.30	0.10	0.08	0.4	0.18	7.1				66.00		4	48	48	SIC	93
20.7 - 25.5	9.2	1.99		60.10	0.10	0.00	19.00	0.20	0.10	0.2	0.08	6.3				61.00		8	55	37	SICL	89
25.5 - 30.3	9.3	1.44	58.5	42.40	0.10	0.10	13.40	0.40	0.08	0.3	0.05	6.4				82.00		4	54	42	SIC	102
30.3 - 34.9	9.3	1.55		9.30	1.40	5.80	17.60	1.40	0.10	0.5	0.12	3.7				33.00		1	48	51	SIC	110
34.9 - 36.0	9.5	0.94		29.70	0.10	0.00	9.40	0.30	0.03	0.1	0.05	33.8				336.00		3	72	25	SIL	49
36.0 - 39.5	9.2	1.17	49.9	35.70	0.10	0.00	11.30	0.60	0.06	1.3	0.13	12.7				123.00		0	54	48	SIC	89
39.5 - 42.9	9.2	1.37		35.80	0.20	0.00	13.80	1.00	0.11	1.2	0.20	8.4				58.00		0	44	56	SIC	102
42.9 - 44.2	6.3	2.30	39.2	53.00	0.30	0.00	23.70	1.70	0.32	14.5	0.98	0.2	0.01	0.83	0.34	-29.00	-15.00	8	47	47	SIC	70
44.2 - 48.1	9.0	1.30		41.40	0.10	0.00	13.10	0.80	0.09	1.2	0.24	9.0				82.00		2	46	52	SIC	80
48.1 - 52.0	8.1	2.32	37.1	42.80	0.60	0.10	25.30	1.30	0.28	4.4	0.62	0.3	0.14	0.50	0.18	-23.00	-13.00	2	35	63	C	102
52.0 - 58.0	8.8	1.80		36.00	0.30	0.00	18.10	0.80	0.08	1.8	0.36	7.7				66.00		0	45	55	SIC	91
58.0 - 58.5	9.2	0.86	41.3	23.20	0.20	0.00	9.00	0.70	0.02	1.3	0.06	31.0				307.00		0	72	26	SICL	64
58.5 - 59.9	9.1	1.03		28.70	0.20	0.00	11.10	0.80	0.08	0.9	0.10	17.7				174.00		0	60	40	SIC-SICL	94
59.9 - 63.3	9.1	0.98	47.4	36.10	0.10	0.00	11.40	0.90	0.10	1.7	0.13	6.8				62.00		0	44	56	SIC	103
63.3 - 66.7	9.0	1.54		40.50	0.20	0.10	15.70	0.90	0.19	4.8	0.39	1.0				-2.00		2	40	58	C-SIC	96
73.8 - 75.0	8.0	2.08	40.0	51.00	0.30	0.00	22.80	1.60	0.71	17.1	1.15	0.4	0.11	0.58	0.46	-32.00	-14.00	10	41	49	SIC	65
77.8 - 78.9	7.3	1.97		44.20	0.40	0.10	22.10	2.50	0.48	33.9	2.06	0.3	0.06	1.12	0.84	-61.00	-32.00	22	50	28	SICL	85
78.9 - 82.6	9.3	1.90	39.2	47.00	0.30	0.00	21.00	1.30	0.25	6.6	1.36	0.2	0.29	0.86	0.21	-41.00	-25.00	3	40	57	C-SIC	88
82.6 - 86.3	8.8	1.16		40.50	0.10	0.00	12.80	0.90	0.09	2.3	0.34	12.3				112.00		0	48	51	SIC	83
86.3 - 90.0	8.8	1.57	39.4	41.80	0.20	0.00	16.20	1.20	0.19	3.4	0.66	1.4	0.06	0.45	0.10	-5.00	0.00	1	29	70	C	96
90.0 - 94.0	8.0	1.83		45.20	0.30	0.00	20.20	1.70	0.39	14.5	1.60	0.4	0.16	0.90	0.51	-46.00	-27.00	7	23	70	C	86
101.1 - 102.1	6.9	1.16	46.9	28.20	0.30	0.00	12.80	1.10	0.14	5.8	0.11	0.2				-1.00		3	44	53	SIC	128
102.1 - 103.5	9.3	1.21		33.50	0.10	0.00	10.80	0.80	0.08	0.5	0.23	10.3				96.00		0	59	41	SIC	152
103.5 - 105.4	8.6	1.63	44.7	34.80	0.40	0.00	17.30	0.90	0.21	5.6	0.79	0.7	0.06	0.55	0.16	-16.00	-10.00	2	52	46	SIC	82
110.8 - 112.6	8.8	1.01		34.20	0.10	0.00	10.80	0.70	0.11	3.9	0.35	7.3				62.00		10	63	27	SIL	51
112.6 - 114.3	9.0	0.94	42.8	24.80	0.30	0.00	11.10	1.00	0.12	1.7	0.14	5.3				49.00		0	58	41	SIC	79
114.3 - 117.8	9.0	0.86		25.30	0.20	0.00	9.80	0.80	0.03	1.1	0.16	34.8				342.00		2	73	25	SIL	43
117.8 - 120.8	9.3	0.81	30.0	20.80	0.10	0.00	6.50	0.40	0.02	0.8	0.06	29.3				291.00		13	72	15	SIL	28
120.8 - 123.6	9.1	0.72		26.80	0.10	0.00	6.40	0.80	0.03	0.9	0.06	27.3				271.00		6	74	21	SIL	29
123.6 - 127.6	9.0	1.20	33.9	39.80	0.10	0.00	12.80	1.30	0.06	2.4	0.62	9.5				75.00		2	51	47	SIC	74
130.8 - 134.1	9.0	1.31		41.40	0.10	0.00	13.10	1.80	0.21	4.8	0.82	0.3	0.03	0.84	0.15	-23.00	-17.00	1	44	55	SIC	83
141.7 - 146.3	9.7	0.96	89.1	23.20	0.20	0.00	9.00	1.80	0.15	2.4	0.11	0.2				-1.00		1	39	60	C	125
146.3 - 150.9	9.6	1.20		36.80	0.00	0.00	12.20	2.50	0.22	1.4	0.15	0.2				-3.00		1	56	63	C	140
150.9 - 151.5	9.6	0.86	50.5	27.50	0.00	0.10	8.70	1.00	0.08	1.0	0.05	2.2				5.00		8	56	36	SICL	102
151.5 - 155.4	9.6	1.02		33.50	0.00	0.00	10.80	1.80	0.11	0.9	0.07	0.2				0.00		0	48	52	SIC	136
155.4 - 159.2	9.0	0.97	60.8	32.90	0.00	0.00	10.40	0.80	0.06	0.6	0.41	8.0				67.00		3	57	40	SIC-SICL	127
159.2 - 162.1	10.0	0.63		27.50	0.00	0.00	6.70	0.50	0.04	0.8	0.68	6.5				37.00		9	54	37	SICL	165
162.1 - 165.0	9.9	0.99	64.1	33.20	0.10	0.00	10.50	0.80	0.03	0.6	0.05	18.2				180.00		9	56	32	SICL	152
165.0 - 169.3	9.8	1.04		28.70	0.20	0.00	11.10	1.70	0.09	0.8	0.05	7.8				76.00		1	48	51	SIC	141
169.3 - 170.3	9.1	1.13	61.9	39.50	0.10	0.00	12.50	0.90	0.05	1.0	0.04	6.0				56.00		4	49	47	SIC	152
170.3 - 174.4	9.4	1.25		45.50	0.10	0.00	14.40	1.10	0.08	1.4	0.07	3.7				34.00		2	43	55	SIC	127
174.4 - 178.4	8.5	0.97	55.1	35.10	0.10	0.00	11.10	0.70	0.02	0.7	0.05	22.5				223.00		16	55	27	SICL-SIL	70
179.4 - 184.4	9.4	1.27		46.40	0.00	0.00	15.30	1.30	0.07	1.3	0.16	11.7				112.00		2	52	48	SIC	111
184.4 - 189.4	9.3	1.26	57.4	46.80	0.00	0.00	14.80	1.30	0.09	2.7	0.51	9.2				76.00		1	54	45	SIC	89
189.4 - 190.5	9.8	1.29		46.20	0.00	0.00	14.80	1.40	0.09	4.5	1.16	4.2				6.00		4	55	41	SIC	122
190.5 - 196.1	9.7	1.39		50.30	0.00	0.00	15.90	1.50	0.03	4.3	1.84	0.8	0.00	0.83	1.01	-50.00	-18.00	3	54	43	SIC	70
196.1 - 201.9	9.3	1.65		40.90	0.30	0.00	18.30	1.50	0.04	1.6	1.20	3.3	0.14	1.10	0.14	-7.00	1.00	3	49	48	SIC	84
201.9 - 202.5	9.5	1.24	44.4	48.20	0.10	0.00	14.80	0.80	0.00	0.4	0.58	51.8				496.00		0	79	21	SIL	54
202.5 - 206.0	9.6	1.50		37.80	0.30	0.00	18.90	1.50	0.05	1.5	1.06	7.5				41.00		3	48	51	SIC	88
206.0 - 209.5	9.0	1.31	56.8	46.70	0.10	0.00	15.40	1.80	0.26	15.7	1.19	1.3	0.00	0.96	0.23	-24.00	-17.00	5	54	41	SIC	70
223.3 - 226.3	9.0	1.84		64.50	0.10	0.00	20.40	2.00	0.40	10.4	0.85	0.2	0.20	0.44</td								

**APPENDIX 5-B. Drill Hole 487-05 Overburden Analysis**

Interval (ft) Top - Bot.	pH	EC (mmhos/cm @ 25°C)	ESP	SAR	Ca (meq/l)	Mg (meq/l)	Na (meq/l)	Boron (ppm)	H2O Sol. Selenium (ppm)	Tot. Org. Carbon (%)	Total Sulfur (%)	Carbonate Total Sulfur (% CaCO3)	Sulfate Sulfur (%)	Pyritic Sulfur (%)	Organic Sulfur (%)	Total S ABP (/1000)	Pyritic S ABP (/1000)	Sand (%)	Silt (%)	Clay (%)	Texture	Sat.	
0.0 - 4.0	8.1	1.00			5.4	3.10	0.60	7.30	0.30	0.00	0.1	0.03	21.8			217.00	40	43	17	L	32		
4.0 - 6.0	8.4	0.66			9.5	0.60	0.30	6.40	0.30	0.00	0.4	0.01	14.9			149.00	44	46	10	L	29		
6.0 - 12.0	8.5	0.53			11.9	0.30	0.10	5.30	0.20	0.00	0.0	0.01	16.9			169.00	43	36	16	L	29		
12.0 - 15.8	5.6	0.71			21.2	0.10	0.00	6.70	1.10	0.00	0.2	0.01	0.1			1.00	1	35	64	C	84		
15.8 - 19.6	4.7	0.84	15.2		25.3	0.10	0.00	6.00	0.80	0.00	1.0	0.03	0.1			0.00	1	30	60	C	81		
19.6 - 20.2	4.0	2.49			27.9	0.90	0.90	26.20	1.40	0.01	19.5	0.41	0.0	0.00	0.32	-13.00	0.00	7	66	25	BIL	58	
20.2 - 22.2	4.0	2.37	7.1		24.1	1.10	1.00	24.70	1.30	0.01	8.9	0.23	0.1	0.06	0.00	0.17	-6.00	1.00	3	55	42	BIC	48
22.0 - 33.0	4.1	4.84			15.2	8.50	8.50	44.30	0.70	0.00	0.9	0.26	0.2	0.17	0.00	0.11	-7.00	2.00	1	23	76	C	88
33.0 - 36.9	3.6	6.22			11.1	22.50	15.50	48.30	0.80	0.01	3.5	0.74	0.1	0.45	0.00	0.29	-22.00	1.00	1	45	54	BIC	61
39.1 - 44.0	7.0	5.48	10.3		17.9	13.00	5.50	54.40	0.50	0.06	1.2	0.22	3.8			31.00	0	37	63	C	88		
44.0 - 47.0	8.9	2.10			42.7	0.40	0.20	23.40	0.20	0.07	0.4	0.07	15.5			153.00		6	51	43	BIC	132	
47.0 - 50.0	9.4	1.46	46.6		38.9	0.30	0.10	16.50	0.10	0.02	0.3	0.05	16.5			163.00		6	55	37	BICL	178	
50.0 - 52.6	9.3	1.45			41.6	0.20	0.10	16.10	0.00	0.06	0.6	0.05	2.6			24.00		7	54	39	BICL	185	
52.6 - 53.9	9.8	1.45	43.9		39.6	0.20	0.10	15.40	0.10	0.06	0.7	0.04	4.5			44.00		3	47	50	BIC	183	
53.9 - 57.6	9.9	1.24			39.5	0.10	0.00	12.50	0.30	0.03	2.3	0.04	7.8			77.00		9	46	43	BIC	234	
57.6 - 62.3	9.7	1.32	46.1		44.3	0.10	0.00	14.00	0.30	0.02	0.5	0.04	10.8			105.00		12	43	45	BIC	233	
62.3 - 67.0	9.6	1.35			47.4	0.10	0.00	15.00	0.60	0.04	0.9	0.04	11.1			110.00		2	46	50	BIC	198	
67.0 - 67.5	9.5	1.03	52.1		34.5	0.10	0.00	10.90	0.40	0.14	1.0	0.06	5.9			57.00		37	25	38	CL	219	
70.4 - 74.3	6.9	1.50			50.0	0.10	0.00	15.80	0.90	0.12	2.1	0.22	3.8			32.00		2	52	46	BIC	70	
74.3 - 76.1	9.3	1.22	34.6		40.5	0.10	0.00	12.80	0.80	0.06	1.2	0.22	22.2			215.00		3	58	38	BICL	55	
78.1 - 81.3	9.5	0.87			30.4	0.10	0.00	9.60	0.80	0.03	0.6	0.05	32.3			321.00		3	69	28	BICL	34	
81.3 - 84.0	9.1	1.68	41.4		45.4	0.20	0.00	17.80	1.60	0.07	1.5	0.55	7.9			62.00		1	46	53	BIC	74	
86.0 - 88.3	7.5	3.02			43.7	0.70	0.30	30.90	1.30	0.18	6.7	1.76	0.1	0.11	1.43	0.22	-54.00	-44.00	1	47	52	BIC	63
92.5 - 96.9	9.2	1.57	55.5		51.6	0.10	0.00	16.30	2.10	0.15	2.1	0.53	10.0			53.00		5	63	32	BICL	73	
96.9 - 101.9	9.1	2.04			55.0	0.20	0.00	21.30	3.30	0.08	3.3	1.45	0.2	0.05	1.27	0.13	-43.00	-38.00	4	62	34	BICL	78
101.3 - 105.8	9.7	1.40	52.6		46.2	0.10	0.00	14.60	1.70	0.12	1.7	0.09	1.2	0.11	0.85	0.03	-18.00	-15.00	3	69	28	BICL	70
110.9 - 114.5	9.2	1.63			62.6	0.10	0.00	19.80	0.90	0.22	9.6	0.93	0.3	0.09	0.23	0.21	-14.00	-4.00	5	34	61	C	128
114.5 - 116.1	9.9	1.19	57.9		39.2	0.10	0.00	12.40	1.50	0.10	1.5	0.16	4.0			35.00		4	47	49	BIC	96	
118.1 - 119.1	10.0	0.92			31.3	0.00	0.00	9.90	1.10	0.05	1.1	0.07	6.5			6.00		9	52	39	BICL	84	
119.1 - 124.2	10.0	0.95	56.5		13.6	0.30	0.90	10.50	1.10	0.03	1.1	0.06	12.7			125.00		0	56	35	BICL	80	
124.2 - 128.2	9.9	0.96			31.9	0.10	0.00	10.10	4.80	0.02	4.8	0.06	13.9			127.00		2	65	33	BICL	102	
129.2 - 134.3	9.8	1.06	55.1		36.4	0.10	0.00	11.50	1.30	0.07	1.3	0.03	11.9			118.00		1	62	37	BICL	100	
136.5 - 139.3	8.2	2.31			61.7	0.20	0.00	23.90	2.10	0.35	21.6	1.79	0.1	0.06	1.14	0.59	-55.00	-35.00	13	43	44	BIC	75
139.3 - 140.3	9.9	0.97	58.2		32.9	0.10	0.00	10.40	3.00	0.12	3.0	0.38	8.7			75.00		1	61	16	BIL	121	
140.3 - 144.7	10.3	0.97			30.7	0.10	0.00	9.70	1.00	0.06	1.9	0.49	13.2			118.00		1	72	27	BIL	125	
144.7 - 149.1	9.9	1.05	60.5		33.2	0.00	0.00	10.50	2.70	0.05	2.7	1.31	3.4	0.07	1.00	0.15	-7.00	0.00	2	73	25	BIL	65
149.1 - 153.5	9.9	1.31			41.1	0.00	0.00	13.00	2.30	0.04	2.3	1.30	1.7	0.19	1.06	0.14	-26.00	-18.00	1	74	25	BIL	66
157.6 - 159.2	9.8	1.01	62.9		32.6	0.00	0.00	10.30	1.60	0.19	6.9	0.23	0.1	0.00	0.10	0.13	-6.00	-3.00	3	66	32	BICL	110
159.2 - 160.0	9.7	0.80			24.0	0.10	0.00	7.80	0.30	0.02	0.3	0.05	6.0			50.00		57	40	3	BL	26	
160.0 - 164.6	9.7	1.07	62.2		35.1	0.10	0.00	11.10	1.00	0.06	1.0	0.06	10.5			104.00		4	63	33	BICL	107	
164.6 - 168.2	10.1	1.04			35.4	0.10	0.00	11.20	1.00	0.04	1.1	0.06	25.3			262.00		4	72	24	BIL	71	
177.5 - 181.1	10.4	1.31	74.1		43.0	0.10	0.00	13.60	2.40	0.32	2.5	0.27	0.0	0.00	0.14	0.13	-6.00	-4.00	1	46	53	BIC	143
181.1 - 185.1	10.2	1.36			44.3	0.10	0.00	14.00	2.80	0.13	5.9	0.66	0.1	0.19	0.31	0.16	-20.00	-9.00	9	46	45	BIC	129
185.1 - 190.0	6.3	1.83	12.2		29.4	0.00	0.10	17.40	0.70	0.00	0.6	0.94	0.9	0.17	0.81	0.16	-20.00	-10.00	63	31	6	BL	37
190.0 - 190.7	9.1	1.48			46.8	0.00	0.00	14.80	1.70	0.07	8.7	1.95	5.7			-4.00		10	77	13	BIL	65	
190.7 - 194.9	7.4	1.17	5.2		33.5	0.00	0.00	10.60	0.50	0.00	2.0	0.40	0.0	0.06	0.18	0.14	-13.00	-6.00	79	21	0	LS	33
194.9 - 199.0	9.9	1.25			36.4	0.00	0.00	11.50	0.30	0.00	0.1	0.06	0.3			1.00		87	13	0	8	30	

**APPENDIX 5-C**

**1987 METHODS OF ANALYSIS**

1987 METHODS OF ANALYSIS.

Sample Preparation

Crushing and grinding to minus 2.0 mm (for AB potential to .25 mm).

Saturation percent

Richards, 1954

Method 27a. Saturated paste.

pH

Richards, 1954.

Method 21c. 1:2 (soil:water) extract, pH meter.

E.C.

Richards, 1954.

Method 4. 1:2 (soil:water) extract, EC meter.

Calcium, Magnesium and Sodium

Richards, 1954.

Method 3. 1:2 (soil:water) extract, ICP.

(1987 Methods of Analysis -cont'd)

SAR

Richards, 1954. Calculation.

Boron (hot water soluble)

Page et al., 1982

Hot water extraction, ICP.

Selenium (hot water soluble)

Page et al., 1982

Hot water extraction, AA-hydride.

Acid-Base Potential

Sulfur (total)

Sulfur Forms (for samples with A-B potential < -5)

Neutralization Potential (Calculated from CaCO<sub>3</sub>,%)

Sobek et al., 1978 EPA 600/2-78-054.

Calcium Carbonate (total)

ASTM Method 513--82, Acid neutralization-colorimetric detection of CO<sub>2</sub>.

(1987 Methods of Analysis -cont'd)

Organic Carbon (total)

ASTM Method 4129-82, Hi-temp combustion-colorimetric Detection of CO<sub>2</sub>.

Texture

Page et al., 1982

Method 4304. Particle size by pipet method after pre-treatment with H<sub>2</sub>O<sub>2</sub>, HCl, washing with H<sub>2</sub>O, and dispersing with Sodium hexa-meta phosphate.

ESP

Richards, 1954

Method 20a. Exchangeable cation percentages.

**APPENDIX 5-D**

**1989 METHODS OF ANALYSIS**

## 1989 METHODS OF ANALYSIS.

### Saturated Paste

Page et al., 1982

Method 10-2.3.1.

Measure 1/3 to 1/2 cup soil into plastic cup which has a snap tight lid. All deionized water to the soil while mixing with a spatula. When the paste glistens, flows slightly with the container is tipped, and slides cleanly off the spatula. The saturation criteria are reached. Allow the paste to stand at least 4 hours, but preferable overnight. Recheck the saturation criteria. Free water should not have collected on the surface. Add either more soil or water to attain proper consistency. At this point, pH and saturation percentage are obtained. Paste is then filtered through a Buchner funnel using vacuum filtration. The extract is collected in a test tube for E.C. and SAR analysis.

### pH

Richards, 1954 Method (21a)

Page et al., 1982. Method 12.6

Standardize the pH meter with pH 7 and pH 4 buffers before use. If samples have exceptionally high pH's also check the pH 10 buffer. After remixing the pastes to check the saturation criteria, insert pH electrode into the paste, and move the electrode gently through the paste until a stable reading is obtained. Record sample pH.

Saturation Percentage

Page et al., 1982. Method 10-2.

Richards, 1954. Method (27a).

After remixing the pastes to check the saturation criteria, place a subsample of the paste into a small cup of known weight. Weigh and record the wet weight of the cup and sample, then place in a 105°C oven until dry, usually overnight. Reweigh dried sample and record as dry weight.

Electrical Conductivity

Page et al., 1982. Method 10-3.3.

Prepare a water bath at 25°C. Place saturated paste extracts and a KCl standard in the bath and allow them to come to equilibrium. Measure conductivity of KCl standard and record to be used as a correction factor. Measure and record conductivities of paste extracts.

Water Soluble Ca, Mg and Na

Page et al., 1982. Method 10-3.4.

Place 1 ml of saturated paste extract in a small plastic cup and add 20 ml of 0.6% SrN0<sub>3</sub>. Cap samples if they are not to be analyzed immediately. Analyze for Ca, Mg and Na by atomic absorption spectrometer.

SAR

Richards, 1954. Method (20B)

Calculated value:

$$\text{SAR} = \text{Na} / [(\text{Ca} + \text{Mg}) / 2]^{1/2}$$

Neutralization Potential

Sobek et al., 1978. Method 3.2.3.

Determine amount of fizz for each sample with 10% HC1 to insure that enough acid is added to react with all the CaCO<sub>3</sub>. Weigh 2.00 g of -60 mesh sample into a 250 ml beaker. Add amount of standardized 0.1 N HC1 indicated by the fizz test. Heat to almost boiling (do NOT allow to boil) for 10 min. or until reaction complete. Add Deionized water to bring total volume to approximately 125 ml. Cover with a watch glass and boil for at least one minute. Cool and titrate with standardized 0.1 N NaOH to a pH of 7. If less than 3 ml of NaOH is used to titrate the sample, rerun sample using more HC1.

(1989 Methods of Analysis - cont'd)

Calculations:

Tons CaCO<sub>3</sub> per 1000 tons Material = {(mls HCl added x N HCl) - (mls NaOH titrated x N NaOH)} x 25

Total, HCl Extractable, HNO<sub>3</sub> Extractable, and Nonextractable Sulfur

Sobek et al., 1978. Method 3.2.4 and 3.2.6.

Weigh one portion of -60 mesh sample for total sulfur determination. Rinse approximately 5 g of sample with 2:3 HCl until a total of 50 ml of acid has been added. Rinse with approximately 50 ml of deionized water. Dry sample and filter paper. Scrape sample from filter paper and, if necessary, grind with a mortar and pestle. Weight a portion for sulfur analysis.

Place remaining HCl rinsed sample in a beaker and add 50 ml of 1:7 HNO<sub>3</sub>. Cover with a watch glass and boil gently for 30 min. Cool and filter. Rinse with 50 ml of deionized water. alternatively, sample may be allowed to stand in 50 ml of 1:7 HNO<sub>3</sub> overnight. Filter and rinse as above. Dry sample and filter paper. Scrape sample from filter paper, grind, and weigh a portion for sulfur analysis.

Analyze all samples using a Fisher Sulfur Analyzer.

Calculations:

Sulfate Sulfur % = Total Sulfur % - HCl Rinsed Sulfur %

(1989 Methods of Analysis - cont'd)

Pyritic Sulfur % = HCl Rinsed Sulfur % - HNO<sub>3</sub> Rinsed Sulfur %

Organic Sulfur % = Sulfur % after HNO<sub>3</sub> Rinse Potential Acidity

or;

Pyritic Sulfur Acid-Base in tons CaCO<sub>3</sub> per 1000 tons material = Pyritic Sulfur % x 31.24

### Boron

Page et al., 1982. Method 25-9.1

Weigh a 25 g sample of soil into a 4 oz. plastic bottle. Add 50 ml of 0.1% CaCl<sub>2</sub>. Place lid loosely on bottle and heat in the microwave until steaming hot - do not boil. Heating time in the microwave depends on the number of samples being heated. Allow to cool 15 to 20 minutes. Be consistent with the cooling time. Filter the sample and collect the extract for Boron and Selenium analysis. Analyze by ICP spectrometer.

Selenium (water soluble)

Page et al., 1982. Method 25-9.1 and 3-5.5.4

Use same extraction procedure as for Boron analysis. Pretreat sample before analysis to convert Selenium (VI) to Selenium (IV) and to destroy any organic matter in the extract. Place 10 ml of sample in a large test tube. Add 1 ml of 30% H<sub>2</sub>O<sub>2</sub> and heat for exactly 20 minutes in a boiling water bath. Add 10 ml of concentration HCl and heat again in the water bath for exactly 20 minutes. Cool and analyze by hydride method of analysis on the ICP spectrometer.

Selenium (total)

Page et al., 1982. Method 3-5.3.3 and 3-5.3.4

Weigh 0.5 g of mesh soil into a 50 ml Teflon digestion tubes. Add 5 ml of HNO<sub>3</sub> and 5 ml of HClO<sub>4</sub>. Heat in digestion block at about 200°C until volume is reduced to 2 or 3 ml. Cool, add 2 more ml HClO<sub>4</sub> and 5 ml of HF, and heat at 200°C until all silicates are dissolved. Reduce volume again to 2 or 3 ml. Cool, transfer solution to 50 ml volumetric flask and bring to volume. Pretreat extract in the same manner as the water-soluble Selenium and analyze by hydride method on the ICP spectrometer.

Acid-Base Account

Sobek et al., 1978 Methods 3.2.4 through 3.2.6.

Calculated value:

$$\text{Acid-Base Account} = \text{Neutralization Potential} - (\text{Pyritic Sulfur \%} \times 31.24)$$

Calcium Carbonate

Richards, 1954.

Procedure is the same as for Neutralization Potential, except that 2.00 g of -10 mesh sample is used. Report results as % CaCO<sub>3</sub>.

Organic Carbon

Page et al., 1982

Dry about 1 tsp. to 1 tbsp. of -60 mesh sample in 105°C oven for at least one hour. Cool in a desiccator. Using an analytical balance, weigh a porcelain combustion capsule which has also been oven dried and desiccated. Record weight. Add approximately 2 g of cooled sample to capsule, weigh and record as first weight. Place capsule in a muffle furnace, bring temperature to 550°C and hold for 8 hours. Cool sample in desiccator and reweigh. Record final weight.

Texture

EPA 600/4-79-054, 1983. Method 3.4.3.

Weigh 55 g of soil into an 8 oz wide-mouth plastic bottle. Add 100 ml of Calgon, cap and shake overnight. Rinse contents of bottle into hydrometer cylinder and bring to volume. Stopper cylinder and mix contents by inverting cylinder once per second for 1 min. Remove stopper and rinse. Place hydrometer in cylinder and take a reading exactly 40 sec. from the time the cylinder was set down. Record reading. After taking the hydrometer reading, measure the temperature of the suspension and record. At 8 hr., replace the hydrometer in the suspension and record second reading. Measure and record temperature.