

# DOD 4145.19-R-1 NAVMC-1101

# STORAGE AND MATERIALS HANDLING

**DEPARTMENT OF DEFENSE** 

SEPTEMBER 1979





# ASSISTANT SECRETARY OF DEFENSE

WASHINGTON, D. C. 20301

15 September 1979

#### FOREWORD

This regulation is issued under the authority of DoD Directive 4145.19, "Storage and Warehousing Facilities and Services," August 13, 1975.

It is effective immediately and is mandatory for use by the Department of Defense. Heads of DoD Components may issue supplementary instructions only when necessary to provide for unique requirements within their respective Components.

Address recommendations for amendments through channels to:

Headquarters
Department of the Army
ATTN: DALO-SMS
Washington, D.C. 20310

ROBERT B. FIRIE, JR.

Assistant Secretary of Defense (Manpower, Reserve Affairs & Logistics)

# DISTRIBUTION:

Active Army, ARNG, USAR: To be distributed in accordance with DA Form 12-34B requirements for Storage of Supplies and Equipment.

Air Force: F


Marine Corps: MARCORPS CODE: IC

DLA: 3; 52A

# CONTENTS STORAGE AND MATERIALS HANDLING

~			Page
CHAPTER		GENERAL	
Section	1.	Purpose applicability, and policy	1-1
	2.	Glossary of terms	1–2
CHAPTER	II.	STORAGE SPACE MANAGEMENT	
Section	1.	Type of facilities	2-1
	2.	Space requirement factors	2-13
	3.	Planning the storage layouts	2-23
	4.	Space control and reporting	2-41
CHAPTER	III.	STORAGE PROCEDURES	
Section	1.	Receiving	3-1
	2.	Shipping	3-14
	3.	Stock location	3-16
	4.	Pest management	3-25
	5.	Inventory	3-43
	6.	Care of supplies in storage	3–63
		Operations in controlled humidity space	3–69
		Security of materials in storage	3-75
		Carrier loading	3–78
	10.	Unit loads	3–124
CHAPTER		MATERIALS HANDLING EQUIPMENT (MHE) AND PRINCIPLES	
Section		Basic principles	4–1
	2.	Illustrated nomenclature	4–5
	3.		4-43
	4.	MHE requirement factors	4-47
	5.	On-the-job training course for operators of MHE	4–62
CHAPTER	v.		
Section	1.	Lumber	5-1
	2.	를 하면 보면 보면 보면 보면 보면 되었다. 그는 사람들은 사람들은 사람들은 사람들은 사람들은 사람들은 사람들은 사람들은	5-19
	3.	Vehicles (tracked and wheeled) and artillery	5-25
	4.	Hazardous commodities	5-50
	5.	Subsistence	5-88
	6.		5–121
	7.	Packaged petroleum products	5-143
	8.	# # #################################	5-148
	9.		5–16
CHAPTER	VI.	SAFETY	6–1
CHAPTER	VII.	STORAGE MANAGEMENT TECHNIQUES	7–1
CHAPTER		ON-THE-JOB TRAINING FOR STORAGE PERSONNEL	
APPENDIX	A.	REFERENCES	A-1
	В.	FORMS	B-1
	C.	METRIC/TEMPERATURE CONVERSION CHARTS	C-1

TOPICAL INDEX—To be developed

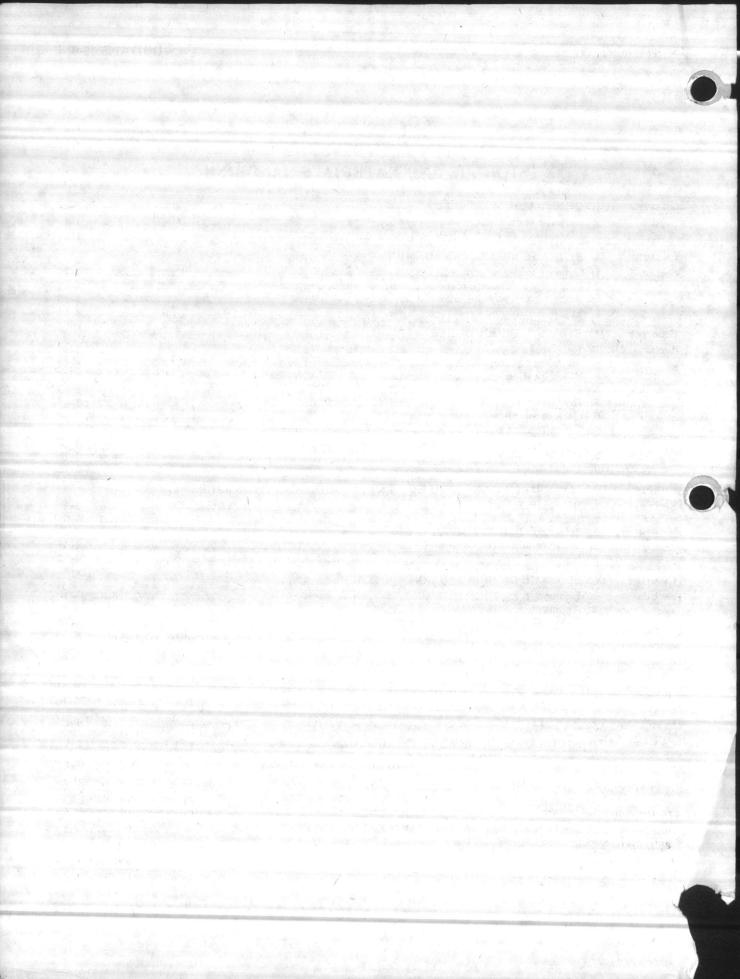

# **CHAPTER 1**

## GENERAL

# Section 1. PURPOSE, APPLICABILITY, AND POLICY

	Paragraph
Purpose and applicability	1-101
Policy	1-102
Organization and use	1-103

# 1-101. Purpose and Applicability

- a. This regulation establishes uniform storage and materials handling policies, procedures, and responsibilities for use by DOD supply installations/ activities involved in the receipt, storage, issue and care of military supplies and equipment, except for preservation-packing and operation, defense property disposal storage facilities, and maintenance of bulk petroleum fuel handling facilities.
- (1) Preservation-packing of military supplies and equipment is contained in joint services publications DSAM 4145.2/TM 38-230-1/NAVSUP PUB 502/AFP 71-15/MCO 4030.31B, Vol I, Preservation and Packing, and DSAM 4145.2, Vol II/TM 38-230-2/NAVSUP PUB 503, Vol II/AFP 71-16/MCO 4030.21C, Packing. Guidance applicable to bulk petroleum fuel handling facilities is set forth in MIL-HDBK-201, Petroleum Operations.
- (2) DPDS Manual 4160.5, Storage Operations (Warehousing) at the Defense Property Disposal Offices provides guidance on storage of excess and surplus materials.
- b. The provisions of this regulation apply to the Department of the Army (DA), the Department of the Navy (DN), the Department of the Air Force (DAF), the Marine Corps (MC), and the Defense Logistics Agency (DLA) (referred to collectively as "DOD Components").

# 1-102. Policy

a. Implementation of this regulation also requires compliance with DOD Directives 4165.60, Solid Waste Management-Collection, Disposal, Resource Recovery, and Recyling Program and 6050.1, Environmental Considerations in DOD Actions. Ad-

ditionally, implementation outside the United States requires consideration of host nation environmental quality laws and regulations.

- b. Storage and materials handling policies, procedures, and methods at DOD Component supply installations/activities will be uniform to the maximum practicable extent. Policies, procedures, and methods indicated herein by directive words such as "will," "shall," or "must," are mandatory in both the Continental United States (CONUS) and overseas. The use of such words as "may" or "should" indicates that the procedures and methods described are recommended but not necessarily mandatory.
- c. The following DOD regulations will be used in conjunction with this regulation:

Number	Title
DOD 4145.19-R	Storage and Warehousing Facilities and Services
DOD 4145.19-R-2	Storage and Materials Handling Standard Methods
DOD 4145.19-R-3	Storage Modernization


d. When necessary, DOD Components may authorize temporary deviations when compliance with mandatory provisions is temporarily impracticable or the deviation is required as an exigency measure. Temporary deviations, including any extensions thereto, will not exceed 90 days. DOD Components may authorize interim deviations from the mandatory provisions of the regulation. Advice of any authorized deviation which may extend beyond 90 days will be forwarded to the Department of Army (DA), ATTN: DALO-SMS, WASH DC 20310, within 15 days of the date of authorization, for a coordinated determination as to whether it should

be (a) incorporated into the regulation, (b) continued as an authorized deviation, (c) withdrawn, or (d) referred to the Assistant Secretary of Defense (Manpower, Reserve Affairs and Logistics) (ADS (MRA&L)) for approval.

## 1-103. Organization and Use

- a. Organization. This publication is organized by major subjects (chapters) and functions (sections). A table of contents reflects the scope of subjects included. The looseleaf format of the regulation facilitates changes and additions to the text.
- b. Table of contents and index. The organization of this publication is such as to make it possible to locate desired information easily by referring to the table of contents in front of the manual to determine general locations, and to the table of contents at the beginning of each section for specific locations. Information that is too detailed for identification by this method may be located by reference to the topical index.
- c. Paragraph numbering system. The chapter, section and paragraph numbering system identifies the appropriate chapter followed by the section, and the applicable paragraph number within the chapter. Subparagraphs are identified by lower

case alphabetics followed by numerics and lower case alphabetics in parentheses:

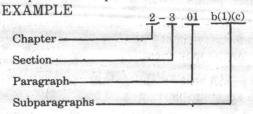

- d. Page numbering. Pages are numbered consecutively in a separate series for each chapter. Each page number will be preceded by the appropriate chapter number, e.g., 3–15 (page 15 of Chapter III).
- e. Illustrations. The purpose of the illustrations is to show by means of photographs, charts, or filled-in forms, the principles and procedures explained in the text. The illustrations do not necessarily show current names, dates, and figures, but are included in order that the principles outlined in the written instructions may be clarified.
- f. Publication of changes. The DA will coordinate all changes or revisions to this regulation with the DOD Components and ASD (MRA&L) prior to publication. Authorized changes to this regulation will be issued as required upon approval of the ASD (MRA&L).

## Section 2. GLOSSARY OF TERMS

Uniform terminology is basic to uniform operating procedures. Following is a glossary of words and terms making up the language of storage and materials handling for operating personnel.

**Advanced decay**—The stage of decay in which the disintegration is readily recognized because the wood has become punky, soft and spongy, stringy, pitted, or crumbly.

Air dried or air seasoned—Dried by exposure to the air, usually in a yard, without artificial heat.

Air shipment—Transportation by air either inside or outside continental limits of the United States.

Aisle—Any passageway within a storage area.

Allocated space—A definite number of net square feet of a specified type of storage space formally apportioned for use.

Assembly—Area used for collecting and combining material components.

**Assignment of space**—Designation of specific space within the installation for storage purposes.

Attainable cubic feet—The product of net storage space (sq ft) multiplied by the stacking height(s) permitted by safety regulations/restrictions and floor load limitations with available materials handling equipment (MHE) and storage aids.

Backlog—An accumulation of incompleted work.

Bale—Articles or materials compressed in a shaped unit and usually bound with cord or metal ties under tension. May be wrapped in paper, thin veneer wood, textile material, or combinations thereof.

Bay—Designated area within a section of a ware-

- house or depot shop, usually outlined or bounded by posts, pillars, columns, or painted lines.
- Bill of lading—Acknowledgement of the receipt of goods for movement by the carrier and the contract for the movement.
- Bin area—An area for the storage of supply items which are binnable.
- **Binder**—Any material such as burlap, heavy paperboard, or thin lumber placed between layers of stock to stabilize stacks.
- Bin storage space—Area in which bins have been erected; includes the aisles and working space between bins.
- Blitz can—The standard US Government issue 5gallon container used especially to transport water or gasoline.
- Block—Self supporting regular stack of supplies, two or more units wide, two or more deep, and two or more high. A block may be rectangular or pyramidal.
- Block storing—Storage of similar containers or material in a block.
- Blue stain—A bluish or grayish discoloration of the sapwood caused by the growth of certain moldlike fungi on the surface and in the interior; made possible by the same conditions that favor the growth of other fungi.
- **Bolster**—Block of hardwood supporting drafts of lumber and used when transporting the drafts by means of truck straddle carriers.
- Box—A rigid container having closed faces, usually constructed of wood, metal, paperboard, fiberboard, plywood, plastic, or a combination of such materials. Strength and stability is dependent upon the material of the faces and the fastening of faces in assembling the box.
- Box car—A fully enclosed freight car having doors on both sides and/or sometimes on the ends. Used for general freight services.
- Box pallet—A pallet with framework back and sides, so constructed that several may be stacked, one upon another, without the weight being borne by the supplies but only by the pallets.
- Box shop-Area used for fabricating, manufactur-

- ing, assembly, or repair of containers and storage aids.
- Bridge plate—Plate, usually of metal, used to span the space between freight cars or trucks and the loading platform.
- Brown stain—A rich brown to deep chocolatebrown discoloration of the sapwood in some pines caused by a fungus that acts similarly to the bluestain fungus.
- Bulk liquid storage space—Space inside tanks designed for the storage of liquid bulk.
- Bulk storage—Storage in warehouses of any large quantity of supplies usually in original containers or storage of liquids or solids such as coal, lumber, rubber bales, petroleum products, or ores in tanks or piles.
- Bursting strength—The pressure required to rupture a container when it is tested in a specified instrument under specified conditions.
- Butt boards—Boards arranged at an angle on a sorting platform to facilitate the formation of lumber drafts with uniform faces.
- Caged storage—Storage space segregated within a building and specially screened or barricaded to prevent pilferage or to isolate hazardous materials.
- Care of supplies in storage—A program whereby supplies and equipment in storage are preserved in a serviceable condition through inspection and action taken to correct any forms of deterioration and to restore the supplies to ready-for-use condition.
- Carrier—A commercial transportation media providing railroad cars, motor trucks, ships, airplanes, or other conveyances for transporting supplies.
- Check—A lengthwide separation of wood, the greater part of which occurs across the rings of annual growth.
- Chemical brown stain—A discoloration of wood, that sometimes occurs during the air or kiln drying, apparently caused by the oxidation of extractives.
- Chill space—Refrigerated warehouse area in which the temperature can be controlled between 36° F. and 46° F. (2° C. and 8° C).

- Chute—Usually an inclined trough, sometimes a tube, used to convey supplies from an upper to a lower level.
- Cleated-fiberboard box—A rigid container constructed by joining six panel faces which are made of plywood, reinforced with wood edges or intermediate cleats.
- Commodity—A specified grouping of items of supply.
- Common carriers—See carrier.
- Condensation—Moisture resulting from condensing, such as the moisture gathered on a cold surface in a warm room.
- Consolidation station—Place to which less than carload lots of freight are relayed so that they can be grouped with other freight to make full carloads for the same delivery point.
- Container—A receptable such as a bag, barrel, drum, box, crate or package used to hold and to protect contents. (See also the definition of container, intermodal, ISO.)
- Container, intermodal, ISO—An article of transport equipment which meets the standards of the International Organization for Standardization (ISO) designed to facilitate and optimize the carriage of goods by one or more modes of transportation without intermediate handling of the contents and equipped with features permitting its ready handling and transfer from one mode to another. Containers may be fully enclosed with one or more doors, open top, tank, refrigerated, open rack, gondola, flatrack, and other designs. Included in this definition are modules or arrays that are so configured they can be coupled to form an integral unit regardless of intention to move singly or in multiplex configuration.
- Contamination—Any matter foreign to the finished element, compound or part, which has an adverse effect on the material.
- Controlled humidity (CH) warehouse space— Space which has been especially prepared for and equipped with equipment for control of humidity.
- Cooper—To cover holes and cracks from the inside (e.g., freight car, bags, containers) to prevent leakage of bulk grain.
- Corner marker—A conspicuous marker placed at

- aisle intersections as a caution to personnel to prevent bumping stacks, or other fixed objects.
- Corrosion—Deterioration of material by chemical action, usually as a result of galvanic acid, or alkaline action, or oxidation of metals.
- Corrosion preventive—Any agent such as oil, plastic, paint, wrap or other surface treatment of metals whose primary function is to prevent, inhibit, or deter corrosion.
- Corrosion preventive compound—A compound applied to metal surfaces to prevent, inhibit, or deter rust or corrosion. The term is usually applied to compounds which can be removed by water or solvent cleaners in order to distinguish compound from paint films.
- Covered space—Area within any roofed structure.
- Crate—A rigid shipping container constructed of structural members fastened together to hold and protect the contents. It may be sheathed or unsheathed.
- Critical item—Essential item which is in short supply or expected to be in short supply for an extended period. (Not to be confused with "critical application item" which is defined as an item essential to preservation of life in emergencies.)
- Cross aisle—A passageway at right angles to main aisles, used for the movement of supplies, equipment, and personnel.
- Cross stacking—The placing of one layer of containers at right angles to those just below to increase the stability of the stack.
- Cross tie—Cross layers of supplies as in cross stacking, except that only an occasional layer is crossed, and not every other one.
- Cube—The product of length by width by depth.
- Decay —Disintegration of wood substance through the action of wood-destroying fungi.
- Deck boards—Top or bottom surface of a pallet.
- **Defect**—Any nonconformance with specified requirements.
- Degreasing—Solvent cleaning by dipping, using hot vapor.
- Demurrage—An assessment against the shipper or consignee for the detention of common carrier

equipment beyond the period of free time allowed for loading or unloading.

**Direction of storage**—A method used to gain maximum storage space and various aisle arrangements to provide flexibility for storage operations.

**Desiccant**—A material which will absorb moisture by physical or chemical means.

Deterioration—Any impairment of item quality, value, or usefulness. Includes damage caused by erosion, oxidation, corrosion, or contamination.

**Draft of lumber**—Lumber arranged and stacked in a bundle so as to facilitate shipment, storage, and handling.

**Draw-bar pull**—The pulling power exerted at the draw-bar (as by a locomotive or tractor).

**Drum**—Metal container for liquids, usually preceded by the quantity, e.g., 5-gallon drum, 55-gallon drum.

Dry tank space—Area in tanks designed for the storage of supplies other than bulk liquids or gases.

Dry rot—A term loosely applied in many types of decay but especially to that which, when in an advanced stage, permits the wood to be easily crushed to a dry powder. The term is actually a misnomer for any decay, since all fungi require considerable moisture for growth.

**Dunnage**—Any material (boards, planks, blocks, pneumatic pillows) used to support or secure supplies in storage or while in transit.

End item—A final combination of a product, component part and/or material which is ready for its intended use.

Fire aisle—A passageway established to aid in fighting or preventing the spread of fire, or for access to fire fighting equipment.

Fiberboard box—A rectangular three dimensional shipping container, made either of solid fiberboard or corrugated fiberboard. Distinguished from a carton which is not designed as an outer shipping container.

Flammable warehouse—Area designed for the storage of highly flammable material.

Floor load—Weight that can safely be supported

by a floor, expressed in pounds per square foot of floor space.

Floor plan—A scale drawing of the floor area of a building showing columns, stair wells, elevator shafts, offices, washrooms, doors, and other structural features.

Fogging—Application of chemical compound, in the form of vapor, to interior surfaces or relatively inaccessible surfaces.

Fragile—Delicate, weak and easily damaged.

Freeze space—Refrigerated warehouse area where temperatures can be controlled below a level of 32° F. (0° C).

Freight—All material, products or commodities, express and mail, shipped by rail, water, highway or air.

Fungus—A germlike parasite which flourishes on organic material in a humid atmosphere at moderate and high temperatures.

Gondola—An open-top freight car with sides and ends.

Grain thief—Device consisting chiefly of a long tube used for taking grain samples from various depths in a load of grain.

Gross space for storage operations—That amount of gross storage space less unusable space, standby space, and outgranted space.

Gross space used in support of storage operations—That area used for preservation and packaging, assembly, packing and crating, container manufacturing, receiving, shipping, inspection and identification, administrative storage offices, rest areas, tool rooms, battery charging stations, and other similar support areas.

Gross storage space—Gross area, regardless of its location or the purpose for which the space was designed or designated, which is assigned or used for any operation concerning storage or the support of storage functions.

Gross weight—The weight of the container plus its contents.

Hazardous commodities—Material consisting of explosives, flammables, corrosives, combustibles, oxidizers, poisons, toxics, sources of ionizing

radiation or radiant energy, biologicals and radiologicals, magnetics, and compressed gases, which because of their nature, are dangerous to store or handle and present real or potential hazards to life and/or property.

Heartwood—The hard wood at the core of a tree trunk.

Honeycombing—The storing or withdrawing of supplies in a manner which results in vacant space that is not usable for storage of other items.

Humidity-Moisture in the air.

Humping—The switch of railroad car(s) in classification yards where the car(s) are pushed over a mound (hump) and the slope of the hump used to supply the motivation power for switching the car(s) onto the desired track(s). The "hump" track may or may not be equipped with car retarders.

Igloo space—Area in an earth-covered structure of concrete and/or steel designed for the storage of ammunition and explosives.

Incipient decay—The early stage of decay in which the disintegration has not proceeded far enough to soften or otherwise perceptibly impair the hardness of the wood.

Inspection—Examination and testing of supplies and services (including, where appropriate, raw materials, components and intermediate assemblies) to determine whether the supplies and services conform to contract requirements.

Intermediate pack—A wrap, box, or bundle which contains two or more unit packs of identical items.

Inventory—A physical count performed to determine the on hand quantity of an item or group of items.

**Ionizing radiation**—Any electromagnetic or particulate radiation capable of producing ions, directly or indirectly, in its passage through matter. (See *radioactive material*.)

Kiln dried—Dried in a kiln with the use of artificial heat.

Labor pool—A centrally controlled group of workers who are assigned to particular jobs or areas when needed.

Large-lot storage—A quantity of supplies, four or

more stacks, stored to maximum height, usually accepted as stock stored in carload or greater quantities.

Layout—A floor plan showing assignment of gross space for storage operations and supporting functions.

LCL (less-than-carload)—A quantity of freight less than that required for the application of a carload rate.

Leaker—A container which, through mechanical maladjustment or damage, is not hermetically sealed, permitting air to enter and product to exude.

Levels of packaging—A term used to refer to the degree of protection required during shipment, handling, and storage of supplies.

Line item—A separate item of supply on a transaction document.

Loading platform—A flat surface to facilitate loading or unloading, usually erected alongside a warehouse at the approximate level of a rail car or truck floor.

Location audit reconciliation—Match between valid location records and the accountable records, in order to identify and correct situations where items are in physical storage but not on record, on record but not in storage, of where common elements of data (other than quantity) do not match. Research of mismatches, including special inventories when required, result in corrective action.

Location survey—A physical verification, other than actual count, between actual assets and recorded location data to insure that all assets are properly recorded as to location, identity, condition, and unit of issue.

LTL (less-than-truckload)—A quantity of freight less than that required for the application of truckload rate.

Low combustibility—Materials which, in themselves, will not normally ignite, but which, in combination with their packaging, will contribute fuel to fire.

Magazine—Area in a warehouse-type structure above or below ground designed for storage of ammunition and explosives.

- Main aisle—A passageway wide enough to permit the easy flow of equipment, supplies, and personnel; generally runs the length of the building.
- Major discrepancy—When the total dollar value of the overage or shortage for the stock number exceeds \$200.00. Major discrepancies are used to compute and report error rates on a line item basis as a percentage of items inventoried.
- Marking—Numbers, nomenclature or symbols stamped, painted, or otherwise affixed to items or containers.
- Materials handling—The movement of materials (raw materials, scrap, semifinished, and finished) to, through, and from productive processes; in warehouses and storage; and in receiving and shipping areas.
- Materials handling equipment—Materials handling equipment as discussed in this regulation is defined as any stationary or mobile equipment, powered, mechanical, or hand operated, that is used for the physical handling, storage, and movement of supplies.
- Medium lot storage—A quantity of supplies, one to three stacks, stored to a maximum height.
- Metric system—A decimal system of weights and measures based on the meter as a unit length and the kilogram as a unit mass. Derived units include the "liter" for liquid volume, and "stere" for solid volume, and "are" for area.
- Mezzanine—Area provided by the construction of an intermediate or fractional story between any floor and ceiling of any building used for storage operations.
- Moderate combustibility—Materials and their packaging, both of which will contribute fuel to fire.
- Moisture content of wood—Weight of the water contained in the wood usually expressed in percentage of the weight of the oven-dry wood.
- Nailed wood box—A box constructed of wood/faceboards assembled by fastening top, sides, and bottom to the ends with nails or screws or sides to ends with interlocking mortise and tenon corners.
- Net storage space—Gross space for storage oper-

- ations minus gross space used for aisles, structural loss and support space.
- Net weight—The weight of the contents, not including the container.
- Nomenclature—A noun and any necessary modifying adjectives required to describe and identify an item of supply.
- Noncombustibility—Materials and their packaging which will neither ignite nor support combustion.
- Nonperishable items—Items which do not require refrigeration during transportation and storage.
- Nonstorage space—Area within gross space which is not used for storage because of structural loss or designation for other than storage purposes.
- Obligated—Portion of net usable storage area earmarked by depot authority for the storage of supplies due in.
- Occupied net storage space (cu ft)—The product of net square feet occupied, multiplied by actual storage heights, or representative storage heights determined by statistical sampling when applicable.
- Occupied net storage space (sq ft)—Floor area which is actually occupied by material plus the entire bin and rack areas less aisles.
- Office space—Space utilized by storage personnel in the performance of routine office-type duties. Excludes office space located in warehouses or other buildings not used in support of storage operations.
- Open space—Improved or unimproved area designated for use in storing material.
- Open improved space—Area which has been graded and hard surfaced or prepared with topping of some suitable material so as to permit effective material handling operations.
- Open unimproved space—Area which has not been surfaced but is used for storage purposes.
- Open unimproved wet space—Water area specifically allotted to and usable for the storage of floating equipment.
- Original pack—The first pack applied to a specified quantity of items.

- Osnaburg—A rough, coarse, durable cotton fabric in plain weave used for bagging and industrial purposes.
- Other space—Any area assigned for storage operations, within a structure designed for other than storage purposes. Dry tank space is included.
- Oversea shipment—Supplies consigned to a destination outside the continental limits of the United States.
- Packaging—The process and procedures used to protect material from deterioration and/or damage. Includes cleaning, drying, preserving, packing, marking, and unitization. (See preservation and packaging.)
- Packing—Assembly of items into a unit, intermediate, or exterior pack with necessary blocking, bracing, cushioning, weatherproofing, reinforcement and marking.
- Packing and crating area—Area used for the application of exterior shipping containers.
- Pallet—A low portable platform of wood, metal, or fiberboard to facilitate the act of moving, storing, and transporting of supplies as a unit.
- Pallet support sets—Intended to form box-type pallets when assembled onto flat wood pallets, to allow for stacking of pallets containing irregularly shaped commodities that are susceptible to crushing.
- Palletized unit load—Quantity of any item, packaged or unpackaged, arranged on a pallet and securely fastened thereto, so that the whole is handled as a unit.
- Palletizing—The placement and securing, when necessary, of units or containers on pallets.
- **Perishable items**—Items which require refrigeration during transportation and storage.
- Pile—A quantity of material that can be stacked or stored in a specified area.
- **Planograph**—A scale drawing of a storage area showing the approved layout.
- Pocket rot—Advanced decay which appears in the form of a hole, pocket, or area of soft rot usually surrounded by apparently sound wood.

- Portable tank—A closed container having a liquid capacity over 60 US gallons and not intended for fixed installation. (29 CFR 1910.106)
- Potential vacant space—That portion of occupied net usable space which is temporarily not used for storage because of space voids in front of stacks of material (honeycombing) or space voids at the height of stacks which can be made available by rewarehousing or utilization of maximum heights in stacking.
- **Preservation**—Application of protective measures including cleaning, drying, preservative materials, barrier materials, cushioning, and containers when necessary.
- Preservation area—Area used for preserving, unit/ intermediate packing, and marking of materials.
- Preservative—Any substance that, when suitably applied to wood, makes it resistant to wood-destroying fungi, borers of various kinds, and similar destructive life for a reasonable length of time.
- Rack space—Floor area occupied by racks, box pallets, or pallets with metal superstructures installed when such are used as permanent storage aids, identified as a specific location, and as distinguished from bulk storage. (See also storage space.)
- Radioactive material—Any material or combination of materials which spontaneously emits ionizing radiation; includes natural elements such as radium and accelerator-produced radionuclides.
- Rail storage space—Trackage allotted for the purpose of storing rolling stock.
- Ramp—An inclined plane serving as a way between different levels.
- Receiving—The receipt of inbound supplies; includes planning, handling, and document processing incident thereto.
- Receiving area—Area used for checking, inspecting, and preparing incoming material (both new procurements and returns), prior to its delivery to storage areas.
- Rejection—Nonacceptance of material.
- Requisition—Authoritative demand or request for

supplies or services on form(s) authorized for such requests.

**Rewarehousing**—Relocation of supplies within the same storage activity.

Security—Protection of supplies against theft, sabotage, or other malicious acts.

Seasoning—Removing moisture from green wood in order to improve its serviceability.

Shed—A building without complete side and end walls.

Shipping—Actions necessary to deliver material to a carrier for movement to a consignee.

Shipping area—Area used to assemble material pending its loading for shipment.

Shipping container—Any suitable exterior container used for shipment of supplies.

**Shipping document**—Form used to authorize the shipment of Government property.

Shooks—A bundle or set of tops, bottoms, sides and ends of boxes ready to be put together; a veneer of wood out of which boxes (as wire-bound boxes) are made.

Small lot storage—A quantity of supplies, comprising less than one stack.

Spacers—Wooden strips inserted between drafts of lumber to induce sufficient air currents between, through, and under the stacks to carry off moisture saturated air.

**Spot**—The placing of a truck or freight car in a desired location preparatory to loading or unloading.

Springer—A filled can with ends bulged as a result of overfilling, insufficient exhausting, or evolution of hydrogen or carbon dioxide gas through bacterial actions or action of acid contents on metal can.

Stack—A quantity of supplies stored vertically, occupying approximately one pallet space on floor, utilizing necessary storage aid to assure stability.

Sticker—A wooden stick or strip placed between boards or plywood sheets stacked in piles to hasten drying and reduce warping—also called "crosser."

Stock number—National stock number (NSN) assigned to an item.

Storage—The keeping or placing of property in a warehouse, shed, or open area; or the state of being stored.

Storing—The orderly arranging of supplies in storage.

Strapping—Metal or nonmetallic materials used, or their application, for the reinforcing or securing of crates, boxes, bales or bundles.

Structural loss—Space not usable for storage because of construcion, subterranean or physical characteristics.

Supplies—All items necessary for the equipment, maintenance, and operation of a military command.

Support set—A knockdown metal framework consisting of upright side sections, top supporting crossbars, and one or more bottom tie rods to be affixed to a pallet. (See *pallet support set*.)

Tally-in—Itemized list of supplies received or process of recording the number of containers or quantity of material received.

**Tally-out**—Itemized list of supplies included in an issue or shipment or process of recording the number of containers or quantity of material issued or shipped.

Tank storage—See dry tank.

**Tarpaulin**—Canvas or other materials usually treated to resist moisture and chemicals, used as a protective covering.

**Temperature controlled space**—Space in which the temperature can be controlled within specific limits.

Tier—A horizontal layer of a column, row or stack.

**Total cubic feet**—The product of net storage space (sq ft) multiplied by the unobstructed stacking height permitted by safety regulations/restrictions in a particular storage area.

Transitory shelter—A prefabricated, sectional, metal structure, normally with complete sides and ends but without utilities, classed as a storage aid rather than a real property facility. When

used for storage, is reported as "other nonware-house space." (See also *storage space*.)

Transportation—Media for the movement of personnel and material.

**Type of loads**—Type of loads as relating to stackability of material.

Type I—easy load. The load is single item or single interior container which provides complete and uniform support to all faces of the shipping container. The contents are of moderate density and relatively sturdy. Some examples are wood or metal chests, tool kits, and canned and boxed items packed in a fiberboard box which completely fills the shipping container.

Type II—average load. The load is composed of more than one item or interior container which gives some support to all faces of the shipping container. The contents are of moderate density and are relatively sturdy. Some examples are goods in metal cans which are not packed in the interior containers, bottles individually cushioned, hardware in cartons, etc.

Type III—difficult load. The load gives little or no support to the shipping container. The contents can be extremely heavy, very fragile, very irregular in shape, bulk materials which are free to shift and flow, or a combination of several of these factors. Some examples are rivets, bolts and nuts, delicate instruments, machined parts and assemblies, etc.

Unheated space—Area not equipped with heating facilities.

Unit of issue—Designation of the item unit; as each, number, dozen, gallon, pair, pound, ream, set, yard.

Unit pack—The first tie, wrap, or container applied to a single item or quantity unit thereof, or to a group of items of a single stock number, preserved or unpreserved, which constitutes a complete or identifiable package.

Utilities-Facilities constructed for the service of

the depot, such as boiler rooms, power plants, etc.

V-board—Weather-resistant fiberboards of various grades and types.

Vacant net space—Usable space which is not occupied by material or storage bins or racks.

Vacuum packed—Package from which air has been withdrawn, prior to hermetic sealing.

Vacuum packaging—A packaging method in which a commodity is sealed under vacuum.

Vault—A specially constructed, nonportable, burglarproof, fire-resistant structure for storage of material requiring maximum protection against pilferage or destruction.

W-board—Weather-resistant fiberboards of various grades and types.

Warehouse—A building designed for storage purposes and constructed with roof and complete side and end walls.

Warehouse chart—(See planograph.)

Warehouse denial—Advice that a specific item required on a shipping directive is not available due to stock exhaustion or other reasons.

Warehousing—The performance of physical functions incident to receipt, storage, and issue of supplies. (See definition of *storage*.)

Wet storage—Storage of ships or other floating equipment, afloat.

Wet tank—A tank designated for the storage of liquids.

Whipping of yarn—Material with which a rope end is bound.

Wirebound box—A shipping container whose sides, top, and bottom are of rotary cut lumber, sliced lumber, resawn lumber, fiberboard or combinations thereof, usually three eighths of an inch or less in thickness, fastened to cleats and to each other by means of binding wire and staples.

# **CHAPTER 2**

# STORAGE SPACE MANAGEMENT

# Section 1. TYPES OF FACILITIES

	Paragraph
Introduction	2-101
Covered storage space	2-102
Open storage space	

# 2-101. Introduction

The contents of this section show the general appearance and functions of the most common types of storage facilities used by DOD Components.

# 2-102. Covered Storage Space

Covered storage space is storage space within any roofed structure. Within this category are a variety of structure types. Those types in general use are as follows:

General-Purpose Warehouse Controlled Humidity Warehouse Refrigerated Warehouse Flammable Storage Warehouse Dry Tank Shed Transitory Shelter Above Ground Magazine Earth Covered Magazine

a. General-purpose warehouse. A general-purpose warehouse has a roof, side walls and end walls, and may have ground level and/or truck or railcar bed-level loading docks. Cantilever support canopies over docks may also be provided. This type warehouse may be heated or unheated. It is used for various storage functions and for the storage of a wide variety of items. The greatest portion of covered storage space at DOD installations is normally in this type structure. General-purpose warehouses are primarily single-story buildings, though multistory buildings also qualify. Because of its predominance, the single-story structure is the only one shown in this section. The single-story structure with loading docks at truck and railcar bed

level has become the standard warehouse (fig. 2-1).

- (1) A truck dock of sufficient width, on one side of the general-purpose warehouse, provides for loading/unloading of truck-hauled supplies. The matching dock and warehouse floor permit direct access of materials handling equipment to and from warehouse interior to and from interior of carrier conveyance.
- (2) On the opposite side of the standard general-purpose warehouse, a railcar dock runs the full length of the structure. This permits easy access to railcars from any warehouse door. Rail docks should be located on either side of the two right angle sides of new warehouses to allow for future expansion of the buildings.
- (3) Office space in general-purpose warehouses may vary in size and location. In most instances, such space is located within the warehouse. In others, the space is attached to the outside of the warehouse. In either case the office space is generally located on the same side of the warehouse as the truck docks.
- (4) Normally, two main aisles run the length of the general-purpose warehouse. These aisles allow materials-handling equipment or supplies to move straight through the length of the building. Typically, these main aisles are connected by cross aisles.
- (5) Functions found in a general-purpose warehouse may include loose issue and/or bulk storage, receiving, shipping, preservation, packing, carton fabrication, unit and set assembly, security areas, and administrative offices.



Figure 2-1. An example general-purpose warehouse.

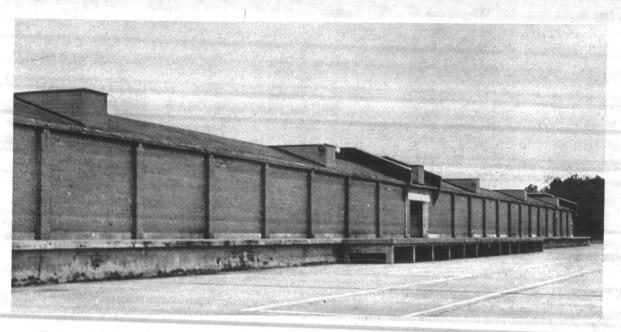


Figure 2-2. Controlled humidity warehouse.

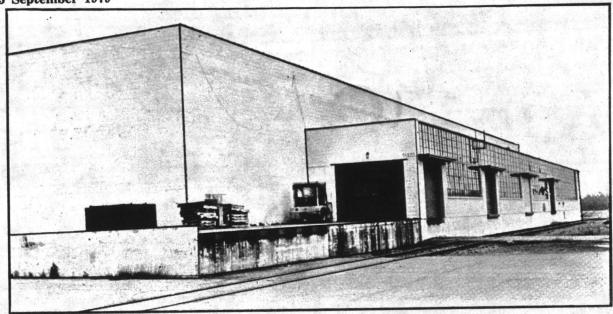


Figure 2-3. Refrigerated storage warehouse.

b. Controlled humidity warehouse (CH).

(1) Almost any type of warehouse may be operated under CH conditions if properly sealed and equipped. However, the general-purpose warehouse is the type most frequently built for or converted to a CH environment. Figure 2–2 is an example of a general-purpose warehouse converted to a CH type warehouse.

(2) Humidity control equipment and operations in CH warehouses are discussed in detail in section 7 of chapter III.

c. Refrigerated warehouse. Outwardly, such a warehouse resembles a general-purpose warehouse though usually smaller. It may have truck and rail-car docks on opposite sides of the warehouse or combination docks on one side (fig 2–3).

(1) The interior of refrigerated warehouses is usually divided into two parts. One part is designated as chill space in which the temperature can be controlled between 36° F. and 46° F. (2° C. and 8° C.). The other part is designated as freeze space. In this area, the temperature can be controlled below a level of 32° F. (0° C.).

(2) Because of the division of refrigerated warehouses into chill and freeze space, there are no main aisles that run the length of the warehouse. Cross aisles provide access to railcar and truck docks.

d. Flammable storage warehouse. The flammable storage warehouse is built of noncombustible materials and has fire walls with a 4-hour fire-resist-

ance rating. The main source of protection comes from an alarm reporting system and automatic deluge-type sprinklers connected to an adequate water supply.

(1) Inner fire walls with no doors are preferred in flammable storage warehouses because of the greater fire protection afforded. However, fire walls without doors necessitate greater care in stock location, since subsequent stock movements must be accomplished without benefit of free movement within the building.

(2) Because it is a special-purpose warehouse, varying sizes and construction features of flammable storage warehouses are found at different storage installations. The flammable storage warehouse shown in figure 2–4 is constructed at ground level.

(3) Some general-purpose warehouses or sections therein may be converted for storage of flammable material. However, alterations must be in strict accord with fire protection requirements.

(4) More specific details on flammable warehouse operations are contained in section 4, chapter V, of this regulation. Details on storage of compressed gases and storage of acids are also found in section 4, chapter V.

e. Dry tank.

(1) Dry tanks are constructed of metal (bolted) except for a concrete floor. These tanks may have controlled temperature and humidity. Tanks may

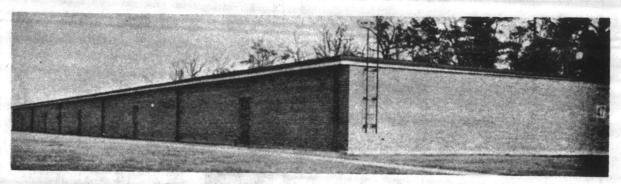


Figure 2-4. Flammable warehouse.

be sealed units (fig. 2-5) or fitted with doors (fig. 2-6).

- (2) Dry tanks are used for long-term storage. Access roads parallel the rows of tanks. Because of the size and shape of dry tanks, there are no operating aisles for materials handling equipment although materials handling equipment is used in the storing process. Figure 2–7 shows a partially completed storage arrangement inside a dry tank.
  - f. Sheds.
- (1) Sheds are buildings without complete sides and end walls. Some utilities may be provided. Figure 2–8 is an example of one type of shed. Since they are not readily dismantled for relocation, they are usually considered permanent structures. Sheds are used for the storage of material that requires maximum ventilation or material that does not require complete protection from the weather.
  - (2) There are various means by which shed-

- stored supplies requiring added protection from the weather may be protected while other supplies requiring only minimum protection are left semiexposed. As illustrated in the left side of figure 2–9, tarpaulins may be used as side walls. Pallets may be positioned to form a protective wall (fig. 2–10). The use of pallets in this fashion, where feasible, serves a dual purpose since valuable storage space inside the shed will not be occupied by empty pallets.
- (3) Figure 2–11 shows a transitory shed. This is a prefabricated structure which can be dismantled for movement and reassembly. These can also be positioned on concete slabs.
- g. Transitory shelters. These are prefabricated metal structures normally with complete sides and ends but no utilities therein. Such structures can be dismantled for movement and reassembly. Figure 2–12 is an example transitory shelter.

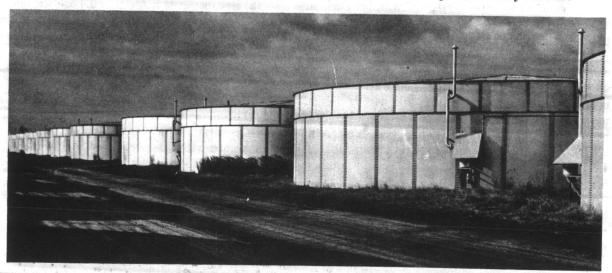


Figure 2-5. Sealed dry tanks (sections must be unbolted for access).

15 September 1979

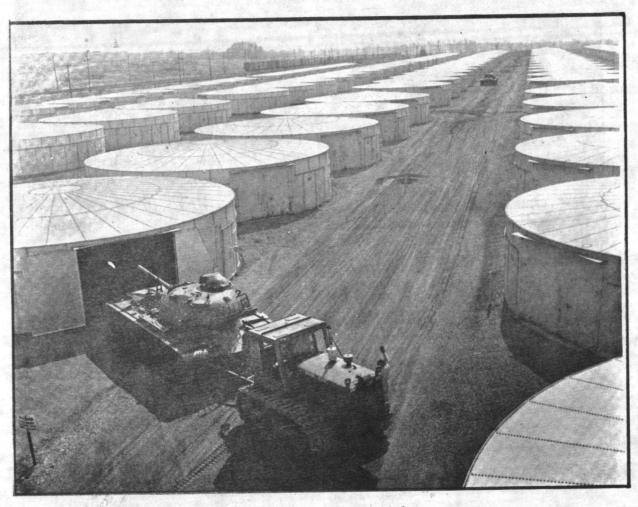


Figure 2-6. Dry tanks fitted with doors.



Figure 2-7. Partially filled dry tank.

15 September 1979 DOD 4145.19–R–1



Figure 2-8. A type of shed.



Figure 2-9. Shed storage showing the utilization of tarpaulins as end walls.

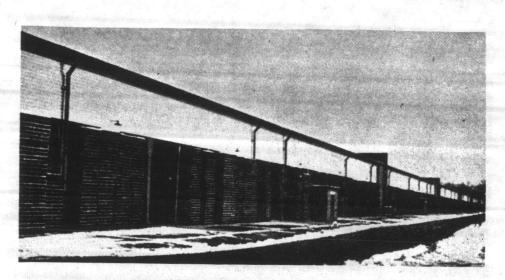


Figure 2-10. Shed storage showing the utilization of pallets as protective sidewalls.

15 September 1979 DOD 4145.19-R-1



Figure 2-11. A type of transitory shed.

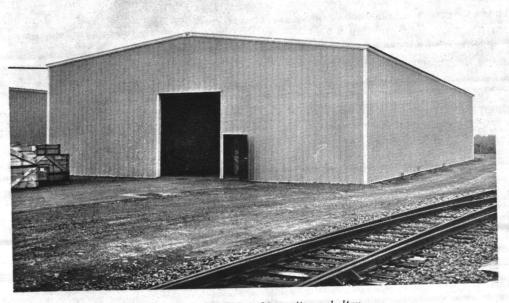


Figure 2-12. A type of transitory shelter.



Figure 2-13. Typical above-ground magazine.

# h. Above-ground magazine.

(1) An above-ground magazine is especially designed for the storage of ammunition and explosives. Because of the nature of the items stored, above-ground magazines are built of fireproof materials and well ventilated to lessen the danger of explosion. Note the ventilators on top of the building and the metal roof in figure 2–13. These buildings are widely separated to minimize the destructiveness of an explosion. Although it may be necessary at times to use a general-purpose warehouse to store small arms ammunition, the warehouse will not be classified as a magazine because it does not have the special design required for proper storage of ammunition and explosives.

(2) One type of above-ground magazine has a dock that runs the entire length of the building to service both trucks and railcars. Inside the typical magazine, there are no main aisles running the length of the building. Generally, cross aisles, corresponding to outside door location, run from the

front to rear of building. However, in the instance of large-lot storage as a single item of ammunition, aisles in certain sections of the magazine may be eliminated.

i. Earth-covered magazines. Earth-covered magazines such as igloos are also used for the storage of ammunition and explosives.

(1) The igloo is generally constructed of reinforced concrete with an arch-type roof covered with earth. The arch roof is an added safety feature. In the event of an explosion, the highest point of the arch, being the weakest point, would collapse first, thereby lessening the damage caused. Adequate ventilation is provided by earth-covered magazines. Although they are not heated, the inside temperature ordinarily ranges between 40° F. to 45° F. in winter to 60° F. and 70° F. in summer.

(2) Because of the isolated location and peculiar construction features of an earth-covered magazine, the type of materials-handling equipment used is often limited. A clearance must be provided be-

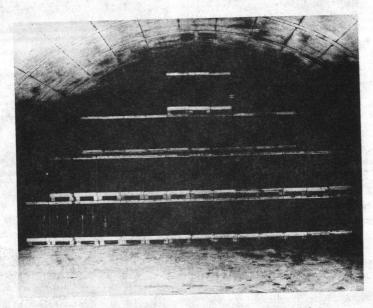


Figure 2-14. Explosives stored in a typical igloo.

tween stacks and walls. The amount of clearance will be in accordance with commodity characteristics and regulations of the appropriate military service. The typical earth-covered magazine has door(s) on only one end. Truck doors at earth-covered magazines are rare. Normally, a centrally located dock(s) is constructed in the ammunition area to service railcars and trucks.

(3) In addition to quantity-distance factors, storage heights in earth-covered magazines are limited by the arched roof (fig. 2–14).


(4) Figure 2–15 depicts some typical earth-covered magazines.


# 2-103. Open Storage Space


Open storage space is an improved or unimproved open area designated for storage purposes.

a. Open improved storage space. This includes space that has been graded and surfaced with concrete, tar, or asphalt, crushed stone or gravel, or other suitable topping. While covered space is preferred and even necessary for most supplies, certain material not readily susceptible to damage by adverse weather conditions can be stored in this type space.

- (1) An open improved storage area usually has a hard surface of a more conventional surfacing material (fig. 2–16). The area shown provides adequate drainage, affords protection of supplies from wet ground conditions and provides adequate running surface for operation of materials handling equipment. A steel mat topping may be used but is a least desirable method but necessary in some instances due to immediate need or lack of other suitable topping material.
- (2) Storage layouts for improved open areas vary because of terrain features and type of commodity stored. Aisles become in reality roadways due to the size of the materials-handling equipment required.
- b. Open unimproved storage space. Open unimproved storage space is an unsurfaced open area designated for storage purposes.
- (1) The limitation on the use of material-handling equipment is a significant disadvantage of this type storage. Storage managers must be very selective of the type stocks designated for this type storage and use such space only when a higher grade of open improved storage space is not available.
  - (2) A storage layout for an open unimproved

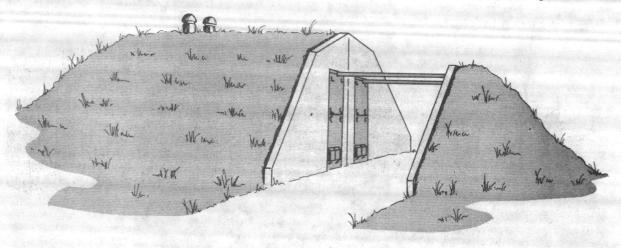

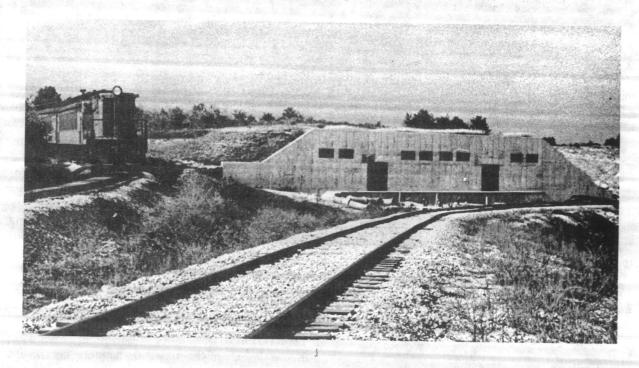

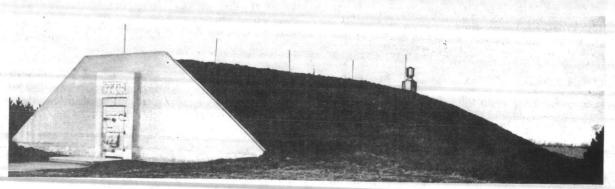

 $Figure\ 2\hbox{--}15.\quad Typical\ earth-covered\ magazines.}$ 



Figure 2-16. Hard surfaced open improved area.

storage area is affected by the same criteria as that for open improved storage areas. However, to take advantage of existing drainage, supplies may have to be positioned and aisles or roadways may have to be located, without regard to conventional storage practices. More details on storage layouts for all types of storage are contained in section 3 of this chapter and section 3 of chapter III.

# Section 2. SPACE REQUIREMENT FACTORS

	Paragraph
General	2-201
"그래프트를 마다지겠다면요" 이 그렇게 얼굴에 들었다. 하는 그는 그는 이 그를 생각하여 하세요? 그리고 그 그를 깨가고 하고 있다. 그는 그 그는 이 그 없다고 있다.	2-202
Scope Considerations in space requirement computations	2-203
Development of data for use in space requirement computations	2-204
	2-205
Open storage areas	2-206

#### 2-201. General

Storage space is a basic resource of any storage operation. Economy depends upon the optimum utilization of this space, and the proper arrangement of operations incident to the receipt, storage, and issue of materials. Space economy can be obtained only by thorough planning for the use of space.

### 2-202. Scope


This procedure does not apply to wet storage areas, rolling stock yards, petroleum, oil, and lubricants (POL) tank farms, storage of complete aircraft, industrial tool storage in contractor plants, or to ammunition storage space computations which are developed under separate instructions of the military services.

# 2-203. Considerations in Space Requirement Computations

There are many factors which must be considered in developing a procedure for computing storage space requirements. These factors must be recognized in a way that will enable ready adaptability by all echelons concerned with computing space requirements or occupancy factors. The following identify these key factors:

a. Quantity of inventory. Although many elements contribute to the computation of storage space requirements, quantity is the basic element or conversion factor. From this, space requirements can be computed through application of dollar value and/or cubic footage of supplies.

b. Characteristics of storage facility. Since storage space is three dimensional, facility character-

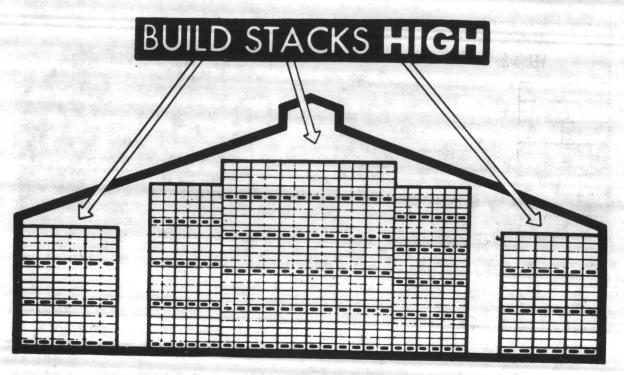

... utilize vertical space to the fullest extent... save floor space for additional receipts.

Figure 2-17. Effective use of vertical space.

istics must be carefully analyzed. Limitations such as stacking height, floor capacity, structural clearances, and other obstacles must be recognized.

- c. Equipment capabilities. Use of potential warehouse storage height may be restricted by equipment capabilities to achieve the vertical utilization.
- d. Commodity characteristics. The maximum stacking height potential is also influenced by the characteristics of the material or its packaging. These may not permit stacking to the height available. The type of commodity being stored must therefore be considered in determining whether the gross cube available can be filled. This consideration supports the idea of categorizing supplies into groups to promote a constant storing height potential.
- e. Total warehouse storage space. The gross storage space within a warehouse includes:

- (1) Storage support space. See section 2, chapter 1.
- (2) Aisles. See section 2, chapter 1, and section 3 of this chapter.
  - (3) Structural loss. See section 2, chapter 1.
  - (4) Net storage space. See section 2, chapter 1.
- f. Occupancy of net storage space. Considerations such as ceiling heights, commodity characteristics, and "elbow room" are factors which preclude the possibility of complete occupancy of net storage space. In any storage operation, it is desirable to have "elbow room" available for operational flexibility. This "elbow room" space must be limited to the absolute minimum required for effective storage. Sufficient "elbow room" should be available to minimize the continuous necessity for relocation of stocks to "fit" additional receipts into the storage

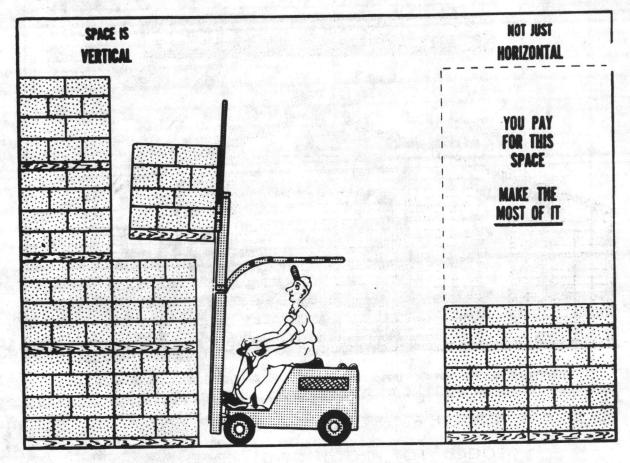


Figure 2-18. Space is three-dimensional.

pattern. Fifteen percent of the net available space is considered an adequate allowance for "elbow room" for general supplies. Ammunition is of course governed by quantity-distance factors found in appropriate publications.

g. Examples of space considerations. Figures 2–17 through 2–21 are illustrations of some of the considerations in properly computing storage space requirements.

# 2-204. Development of Data for Use in Space Requirement Computations

Computation of space requirements should use cubic feet and/or square feet as conversion factor(s) in relating material to space. In the planning for, and selection of material for storage in specific warehouses or warehouse sections, the selection should be based upon the volume of inventory, stackability, bin requirements, etc. In other words,

material with low stackability should not be located in high ceiling warehouses when lower ceiling or low floor level capacity warehouses are available. This also applies to bin areas, storage support areas, relatively small inventories of the same item, etc. The following will apply in developing data to support space computations:

a. Average stacking heights. The characteristics of storage warehouses influence the heights to which material may be stacked. The compostion of the inventory will normally vary from installation to installation with resultant effects on average stacking heights. For example, a substantial inventory of an item that possesses very limited high storage potential, as opposed to a very limited inventory of the same item, would have a marked bearing on storage height average for that item. For this reason, each storage activity must compute independent data which will reflect average potential storage height of inventory.

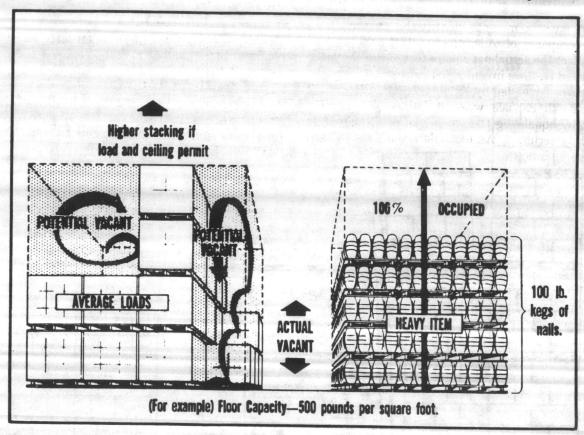


Figure 2-19. Floor load limitation.

- (1) In order to relate to space, the stacking height must be established. Establishing stacking heights should not be predicated on the basis of the height to which supplies are currently stored, but rather to the height that supplies are capable of being stored in accordance with proper warehousing practices. This height to which supplies are capable of being stored is known as the potential storage height. Another influence which must be recognized is the inventory. For example, the quantity on hand could result in some supplies being stacked to less than the potential height. This practice reduces the average potential storage height. The term "adjusted potential storage height" applies to this recomputation.
- (2) It will be necessary to survey inventories in order to determine acceptable and attainable storage heights. Computer facilities, where available, should be utilized to provide greater accuracy and lessen expenditure of manpower. To attain satisfactory benefits from such a survey, and to avoid establishing stacking heights for each item, supply

inventory should be grouped into selected categories and the average heights determined for each category. As examples, separate categories may possibly be established for type 1, easy load, type 2, average load, and type 3, difficult load, as defined in glossary of terms, and for unpacked items such as vehicles.

- (a) Supply groupings should be sufficiently categorized to reflect relatively constant and accurate average potential stacking heights as well as adjusted potential stacking heights which take into account the variables of supply inventory.
- (b) Results of the survey will indicate an overall potential height and adjusted potential height for each category grouping. This should be frequently assessed to assure data correctly reflect the current storage situation.
- b. Square foot computations. Stacking height data will be reconciled to the amount of floor area (square footage) that is currently utilized in storing inventory. In the event that potential or adjusted potential storage height is not fully occupied, pro-

15 September 1979 DOD 4145.19-R-1

vision must be made to identify the current excessive occupancy of square feet of floor area in order to reflect the actual net square feet of storage space required to store inventory. The height of stacking should be extended by attrition to bring the actual storage in balance with the adjusted potential, thereby equalizing the amount of net square feet actually occupied. An example problem is worked out as follows:

A survey has indicated that supply category X is capable of being stacked to an average potential height of 14 feet and an average adjusted potential height of 13 feet. The survey also disclosed that material currently occupies 218,000 square feet of floor space. The average stacking height to which materials are actually stored averages only 12 feet. How many square feet are required to store inventory? See figures 2–22 and 2–23.

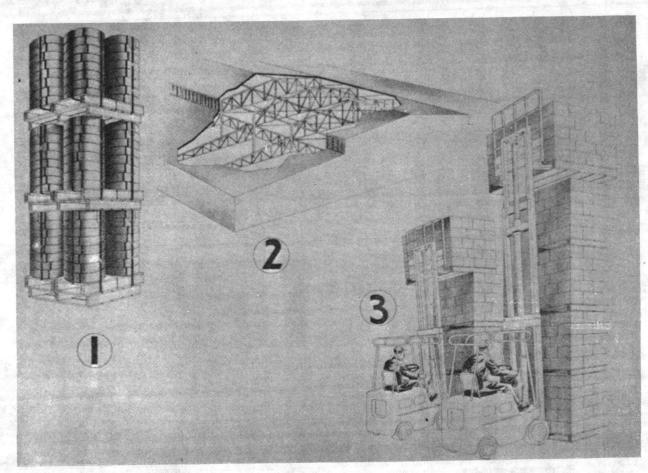


Figure 2-20. Facilities and equipment are limiting factors in attaining storage heights.

① Coils of steel banding are shown in a stack column that is erected to only moderate storage height. Although the characteristics of this item with regard to stability would allow a substantially higher stacking level, the weight, considering floor load capacity, has reached the maximum. Floor load capacity may, therefore, influence stacking heights.

② Structural supports of a warehouse are a major limiting factor in attainable stacking heights. Above illustration depicts a shed-monitor-type warehouse. Note that shed area has substantially less stacking height potential than does the middle area, or monitor section.

® Even though a warehouse possessed highly preferable features as relates to floor load capacity and clear vertical space, these would be to little avail unless characteristics of stacking equipment were capable of taking full advantage of the potential. Illustration depicts the lost space consequences of a lift truck with limited stacking reach.

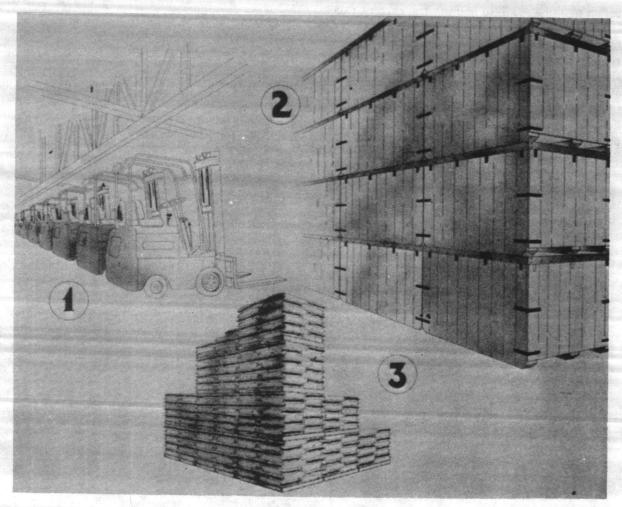


Figure 2-21. Commodity characteristics also influence storage heights.

① Forklift trucks represent those items that are stored unpacked and are of such contour to preclude stacking. Within the limits of appropriate facility assignment, items of this type, in the interests of space utilization effectiveness, are normally located in storage areas where the least storage height potential exists. Inventory such as this is categorized as being of limited stacking height potential.

② Items which are packed in containers of substantial strength or items which support the surface of the containers will ordinarily lend to high stacking. Therefore, selection of storage location should provide for maximum stacking height potential.

<sup>®</sup> There are many items which lend only to moderate stacking heights for several reasons. As an example, the packs may be too weak to withstand the extreme stack weights imposed as a result of relatively high storage or else the packs are somewhat unstable. The bagged items shown in this illustration are representative of the above reasons which limit stacking heights.

PART A  P = POTENTIAL storage height  A = ACTUAL storage height  AP = ADJUSTED POTENTIAL storage height	$\frac{A}{AP}$ = Adjusted vertical space utilization effectiveness. $\frac{12}{14}$ = 86% Potential vertical space utilization effectiveness.
$\frac{A}{P}$ = Potential vertical space utilization effectiveness (fig. 22).	$\frac{12}{13} = 92\% \text{ Adjusted potential vertical space}$ utilization effectiveness.

15 September 1979

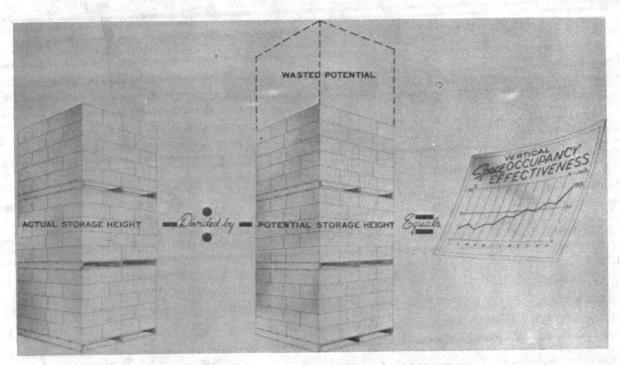


Figure 2-22. Space occupancy effectiveness ( $\frac{A}{P}$  = effectiveness).

#### PART B

S = SQUARE FEET occupied by inventory

E = Space occupancy EFFECTIVENESS

R = Square feet REQUIRED to store inventory

(fig. 23)

 $S \times E = R$ 

 $218,000 \times .86 = 187,480$  Square feet required for optimum effectiveness

or

 $218,000 \times .92 = 200,560$  Square feet required to store present inventory.



Figure 2-23. Actual square feet required to store inventory (S  $\times$  E = R).

c. Cubic foot computation. Since both horizontal and vertical dimensions have been provided in a and b, above, the multiplication of the total square

foot area of storage by the stacking height (feet) will equal the total cubic feet of storage space available. Formula will read:

H = Vertical storage HEIGHT

S = SQUARE FOOT area

TCF = TOTAL CUBIC FEET

 $H \times S = TCF$ 

AH = Attainable stacking

HEIGHT

S = SQUARE FOOT area

ACF = ATTAINABLE CUBIC FEET

 $AH \times S = ACF$ 

d. Dollar value of inventory (except ammunition). In any space computation formula, quantity of inventory is the primary element. Knowledge of the total dollar value of the supply inventory is also a valuable asset for use in conversion of receipts and issues to space occupied or vacated. For example, computation of this data can be used in formula development to indicate that \$5,000 worth of

supply receipts will require X amount of storage space or \$10,000,000 worth of supply inventory will occupy Y amount of space. (Inflation/deflation factors must be considered when determining space requirements by this method.) The value of this approach, as a convenient medium of space computation, should be apparent. These data may be applied as indicated in succeeding formulas:

PART A—Determining dollar value of inventory per cubic foot

DV = DOLLAR VALUE of supply inventory on hand

CF = CUBIC FEET required to store inventory (c above)

VC = Dollar VALUE of inventory per

CUBIC foot (fig. 24)

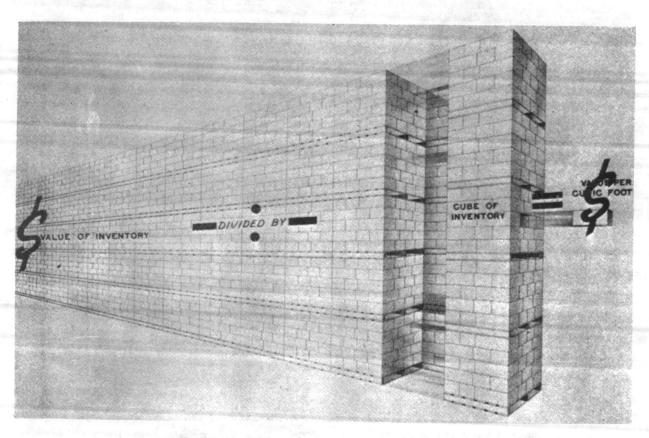


Figure 2-24. Dollar value per cubic foot  $(\frac{DV}{CF} = VC)$ .

Part B—Allowance for incoming receipts (estimated):

Element 1:

I = INBOUND receipts cost value

VC = DOLLAR VALUE of "on hand" inventory per CUBIC FOOT

CF = CUBIC FEET required to store additional inventory (fig. 25)

15 September 1979

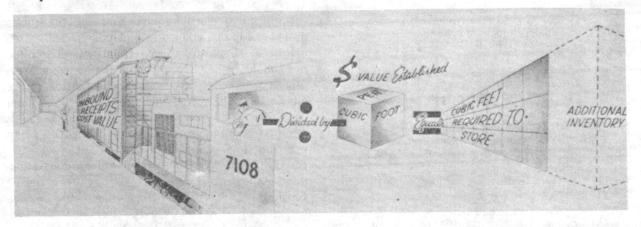


Figure 2–25. Cubic feet required to store additional inventory ( $\frac{I}{VC}$  = CF).

Element 2:

H = Vertical storage HEIGHT to which additional inventory may be stacked.

CF = CUBIC FEET required to store additional inventory.

S = SQUARE FEET required to store additional inventory (fig. 2–26).

DOD 4145.19-R-1

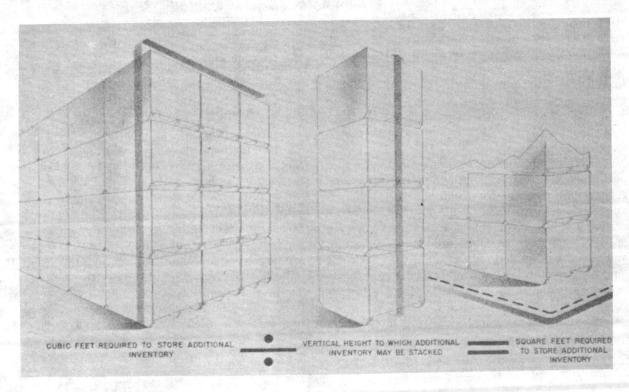


Figure 2-26. Square feet required to store additional inventory ( $\frac{CF}{H} = S$ ).

Part C—Allowance for outgoing shipments (estimated) is a reversal of the procedure enumerated for incoming receipts and is computed as follows:

Element 1:

O = OUTBOUND shipment cost value.

VC = DOLLAR VALUE of "on hand" inventory per cubic foot.

CR = CUBIC FEET of space RELEASED through shipment of inventory.

 $\frac{O}{VC} = CR$ 

Element 2:

H = Vertical storage HEIGHT to which inventory was stacked.

CR = CUBIC FEET of space RELEASED through shipment of inventory.

SR = SQUARE FEET of space RELEASED through shipment of inventory.

 $\frac{CR}{H} = SR$ 

e. Bin areas. The computation of space requirements for establishment of bin areas will be predicated on the following:

(1) The number of line items to be stored which will reflect the number of bin openings required.

(2) The size of bin openings (outside dimensions).

(3) The height to which bin columns will be erected.

'f. Space utilization in storage support. Not all space in a storage area can be allocated to material storage. However, the diversion of space from actual storage to storage support functions should be held to the minimum consistent with good operating practices. Considerations in computation of space requirements for storage support activities are as follows:

(1) The requirements for space for storage support functions are greatly influenced by the mission responsibilities of the particular activity. As an example, tonnage handled or net storage space operated need not necessarily have an absolute bearing on the amount of space allocated to preservation, and packing. Detailed evaluation of the particular operating circumstances would, therefore, be necessary before accurate computation could be accomplished.

(2) It would be impractical to establish firm

ratios of space allotted for storage support purposes on the basis of personnel employed or gross area operated. However, storage management personnel should frequently appraise actual support requirements to assure that valuable space is not allocated to these functions in excess of minimum requirements.

(3) Computation of space requirements for support functions should be developed, in great part, through review of both past and current requirement experience. When projecting future needs, consideration should be given to possible mission changes which would alter requirements. Such acknowledgment will enhance the accuracy of projected allocations as compared to actual proved need (fig. 2–27).

g. Gross space requirements. Formula for computing gross space requirements for storage is as follows:

N = NET SQUARE FEET of space allocated to storage.

A = Space allocated to AISLES.

SS = Space consigned to STORAGE SUPPORT functions.

S = STRUCTURAL loss space.

G = GROSS storage area N + A + SS + S = G.

#### 2-205. Open Storage Areas

The formula described in g above will also apply in determining open storage space requirements, except that consideration need not be given facility restrictions as may affect stacking heights.

#### 2-206. Summary

Space requirements are not computed on an "after the fact" basis. To put it another way, inventories are not stored and then computations developed to indicate that X amount of storage space is required. To the contrary, space requirements are projected ahead of actual physical occupancy with a degree of accuracy to assure avoiding overallocation.

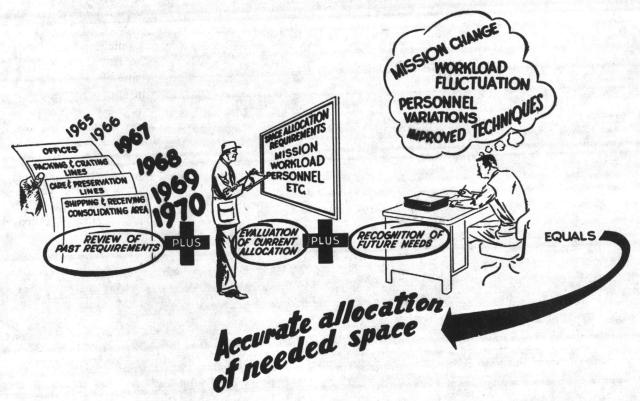


Figure 2-27. Factors of consideration in computing storage support space requirements.

#### Section 3. PLANNING THE STORAGE LAYOUT

	Paragraph
Introduction	2-301
Factors influencing layout plan	2-302
Preparation of layout plan	2-303
Utilization of floor plan in stock layout	2-304

#### 2-301. Introduction

a. A storage area floor plan layout is an excellent management tool for space control. It enables planning for the effective use of space. The layout is the framework in which the overall depot storage space layout is developed. It serves as the basis for developing the storage area planographs. (See sec. 3, chap. III, for instructions on planographs.) The layout also is the basis for preparation of the storage space status report. (See sec. 4, this chap.) Storage plans for installations and activities storing ammunition will be developed as prescribed by the responsible military service.

b. Using the principles of space requirements determinations outlined in section 2 of this chapter, effective storage area layouts can be developed.

c. A complete and current floor plan shows the actual manner in which the gross space within a storage area is used. The plan shows the division of space into storage, receiving, shipping areas, main aisles, cross aisles, fire aisles and offices. Each section or other subdivision of the floor plan will show the square footage of gross space, nonstorage space, and the net space available for storage.

#### 2-302. Factors Influencing Layout Plan

a. Item similarity. Items with similar handling requirements should be stored together when practicable. This facilitates storage and issue and contributes to effective care of supplies. There is normally no requirement that material will be segregated and stored by an inventory manager.

DOD 4145.19-R-1 15 September 1979

b. Item popularity. Activity or popularity is an important factor in planning the storage layout for material. The fastest moving bulk stocks should be planned for storage in areas that are quickly and easily accessible to reduce travel of materials handling equipment and stock selection personnel. Loose issue areas should be located adjacent to packing and processing areas. Fast moving bin stocks should be easily accessible to expedite stock selection and replenishment actions. To the extent feasible, items with the slowest turnover rate should be planned for placement in areas progressively farther from active stock or processing areas. The principle of location by popularity is shown in figure 2–28.

c. Item size and weight. The dimensions and weight of individual items affect not only the amount of storage space allotted, but also the location in which items are to be stored. For example, a 5-ton dynamo would be stored in a location that would provide a balance between accessibility to required handling equipment and the least amount of intradepot transport. Normally, except for those items requiring overhead cranes for handling, the greater the item density the less overhead clearance or ceiling height required.

d. Item quantity. Quantity of material on hand affects the amount of space required on the layout. It will frequently be desirable to increase the

amount of space assigned to an item in a single location in order to eliminate the need for two locations. This may reduce effort and travel in replenishment actions for binnable items and reduce administrative effort required for maintenance of the location record system.

e. Item characteristics. Most items of supply are of such nature that special storage areas are not required. However, there are some items which do require special considerations.

(1) Hazardous. Some materials have characteristics which require the materials to be specially stored or handled to prevent a hazard to personnel and facilities. Appropriate recognition of this factor must be taken when planning storage layouts. (See sec. 4, chap. V.)

(2) Sensitive. Material which requires a high degree of protection and control due to statutory requirements or regulations, such as narcotics and drug abuse items; precious metals; items which are of high value; highly technical or of a hazardous nature; and small arms, ammunition, explosives and demolition and material. (See sec. 8, chap. III.)

(3) Perishable and deteriorative. Some materials have a limited storage life and care must be taken to assure that the oldest stock or that which may have an earlier expiration date is issued first. Many foods, drugs, etc., must be kept in refrigerated areas or in temperature controlled areas. For

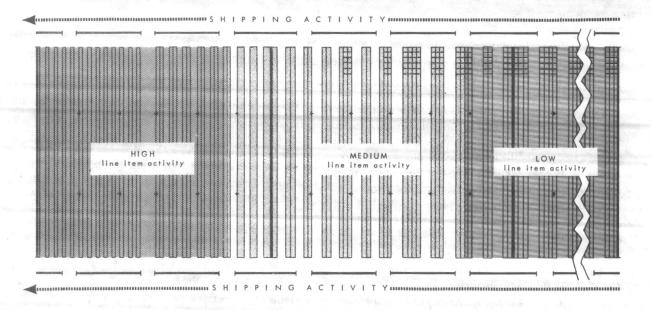


Figure 2-28. Storage of stocks by popularity.

all items of a perishable or deteriorative nature, the most suitable storage environment must be made available. (See sec. 5, chap. V.)

- f. Aisles. Preplanning of aisle postitioning on layouts must be done prior to placement of materials. Allowing the aisle layout to take shape as materials are placed in stock may result in placing materials in inaccessible locations and loss of space.
- (1) Aisle layout is determined by the structure of the warehouse; quantity, nature, and activity of materials to be stored; and by the types and capacity of materials handling equipment available.
- (2) Aisles should only be wide enough to provide maneuvering room for the materials handling equipment available for the stock storage and selection actions. For aisle widths required for forklift truck operation, see (7) (a) below.
- (3) Width of aisles in bin and shelving areas should permit easy movement of stock selector trucks through the storage area. Generally, this requires an aisle of 30 to 36 inches in width.
- (4) Aisles should be planned to provide straight and clear passageways unobstructed by support columns, elevators, heaters, or other such construction features. A particularly important factor is the location of columns. Space loss due to columns will be reduced if columns are used as aisle and bay boundaries.
- (5) Every block of material should be adjacent to a working aisle and stored so that stock can be removed without the necessity of moving another item. The simplest means of providing accessibility is to create a large number of aisles and short rows, but this practice is inconsistent with the principle of minimizing the number of aisles. The best rule to follow is to be certain that materials are stored on both sides of and facing the working aisles. Pallet racks, placed parallel to the long dimension of the building, in side-to-back storage with a bulk stock, permit the use of transportation aisles to provide accessibility to small lot material (fig 2–29).
- (6) Since a mix of material may contain a wide variety of lot sizes, various bay depths must be provided. For example, if a single column of pallet loads is placed in a bay which has a capacity of five such columns, space for four columns is lost (fig 2–30). The availability of a variety of bay sizes is affected by aisle layout and the direction of storage. When the best conceived plan for direction of storage fails to produce a sufficient number of small



Figure 2-29. Storage of small lot items in racks in bulk storage areas.

bays for the class of material handled, the number of working aisles must be increased.

- (7) Working aisles are those from which material is placed into and removed from storage. Working aisles are of two types, transportation aisles, running the length of the building, and cross aisles, running across the building.
- (a) The working aisle widths specified herein are not to be construed as the absolute limitation for all operations. They represent the dimensions under which most operations may be conducted. Aisle widths must be established to assure complete consonance between operational efficiency and space economy. The aisle widths specified below are based upon a load of 40 inches.

2,000-pound trucks	9'6"
3,000-pound trucks	6'0"
(narrow aisle)	
3,000-pound trucks	7'0"
(extensive reach)	
4,000-pound trucks	10'0"
6,000-pound trucks	11'6"

Aisle widths for different load lengths will be determined on the basis that a variation of 8 inches in the load length will have a corresponding variation of 6 inches in the aisle width. For example, a 48-inch load length will increase the aisle widths indicated above by 6 inches. Determination of aisle

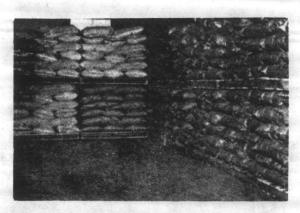


Figure 2-30. Space loss resulting from storage of medium lots in bulk large lot storage location.

width is affected by turning radius of equipment (MHE) to be used.

(b) In most storage layouts, the volume of activity requires two transportation aisles for efficient layout. Such aisles run the length of the building and should be wide enough to permit two-way traffic for the materials handling equipment being utilized in that particular area.

(c) At least two cross aisles are needed in the standard warehouse section. Such cross aisles should be in accordance with the aisle requirements outlined in (7) (a) above as the bulk of storage operations will be carried on in cross aisles.

(8) Personnel aisles are those used as pedestrian routes only and may be required for access to doors or to special interior areas; such aisles should be held to a minimum. Where there is not enough traffic on working aisles to prohibit use as personnel aisles, working aisles should double as such.

(9) Service aisles are those which provide access to stacks for inventory, inspection, or for protective processing. These type aisle requirements are normally very limited. Efficient warehousing operations require that each storage row contain only one item with the same number of containers per pallet. This facilitates inventory as well as issue and normally makes special service aisles unnecessary. Such aisles may by necessary, however, for special commodities (e.g., subsistence) which require frequent inspections.

g. Working areas. Working areas are nonstorage space (other than aisles) in which operations incident to storage or materials handling are performed. Working areas include receiving and shipping bays, packing floor space, strapping lines, battery charging stations, offices, and locker rooms. Such

spaces reduce storage area and, therefore, should be held to the minimum compatible with efficient operation.

(1) Working areas are normally located in those portions of a warehouse which have the lowest ceilings. Usually points which serve all personnel in a building, such as offices and locker rooms, are located in the center section of the building against a side wall so as not to interrupt work in large storage bays, and so that personnel entering from outside will not walk through the storage areas. Working areas are located so as to minimize the total time required for travel of personnel and equipment between storage locations and working areas.

(2) Although set rules cannot be established for allocation of space to working areas, it is essential to keep such space to a minimum. Working areas must be controlled to ensure that such areas do not expand beyond the defined boundaries.

(a) Temporary storage of materials within a working area, particularly in receiving and shipping bays, should be held to a minimum. Clerical procedures and checking operations should be so organized that materials can be processed immediately upon arrival in the working area and quickly removed to storage.

(b) Utilization of cube in working areas is just as important as in storage space. The use of pallet racks and shelving frequently will save space in working areas.

(c) When practicable, working areas which serve several buildings should be consolidated. For example, the establishment of a central packing floor space for several buildings will result in less space consumption than the total required by packing floor space in each building. Also, this facilitates the centralized use of special equipment and concentrates the supervision of specialized jobs.

# 2-303. Preparation of Layout Plan

When making storage layouts whether for covered or open storage, a floor plan of each storage area should be prepared. The plan must indicate all obstacles such as support columns, stairwells, elevator shafts, office locker rooms, and washrooms (fig. 2–31).

a. Basic bulk storage layout criteria. Most of the principles involved in bulk storage are exemplified in the layout for a complete building as illustrated by figures 2–32 and 2–33. Various layouts for bulk

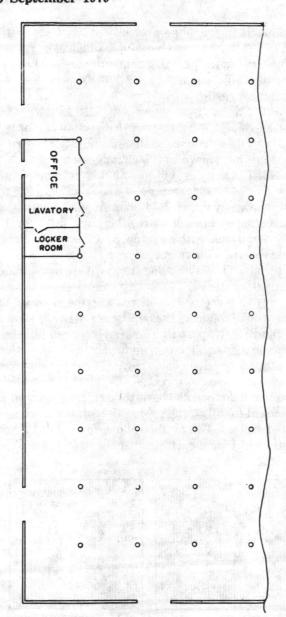


Figure 2-31. Storage floor prior to stock layout.

storage are shown. There is practically no variation in bay depth as shown in figure 2–32; each bay is about 40 feet in depth so that any lot of less-than-carload quantity will have to be placed in a bay which it will not completely fill, resulting in loss of space. The main aisle runs lengthwise through the building. When comparing figure 2–32 with figure 2–33, note that the aisle layout is unchanged, but that in figure 2–33 all aisles are used as storage spaces and a variety of bay sizes are provided. Also, in figure 2–33, side-to-back bays of various sizes are

located adjacent to each intersection, so that the distance required for movement of a small lot from the door or from another bay is at a minimum.

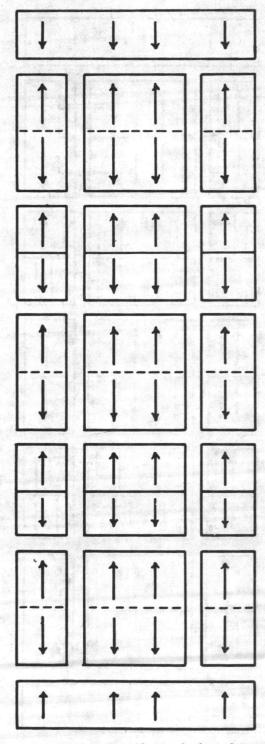


Figure 2-32. Space layout for large lot.

(1) Easy access to material makes direction of storage a significant factor in space utilization. Selection of the proper direction of storage can be

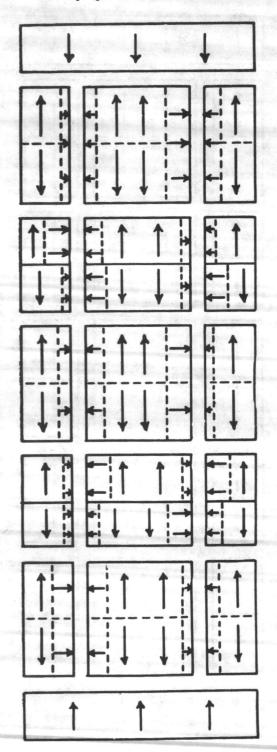


Figure 2-33. Space layout for large lot and small lot.

invaluable in providing a variety of bay sizes without increasing the number of working aisles. At the same time, such planning tends to spread the volume of traffic equally over all working aisles, relieving congestion.

(2) Figure 2–34 shows a layout for large lot storage developed in respect to direction of storage in a bay 80 feet square. Columns and other obstructions are not shown in this arrangement.

(3) The simplest but most inflexible disposition of storage space is storage of a single item aisle to aisle shown by figure 2–34, part A. With four pallet loads stacked in each space, there are faces for 17 different items, with each row containing 68 pallets, which is the equivalent of about two carloads of materials. This layout does not provide for storage of small lot items.

(4) One method of increasing the number of rows and of reducing the depth of each row is shown by figure 2–34, part B. The area has been bisected by an imaginary line perpendicular to the direction of storage, and in each row different items are placed in opposite directions from this line. This practice is known as "back-to-back" storage and is standard for all storage using the forklift truck and pallet system. This method allows faces for 34 items instead of 17 and each row is only 40 feet deep, the

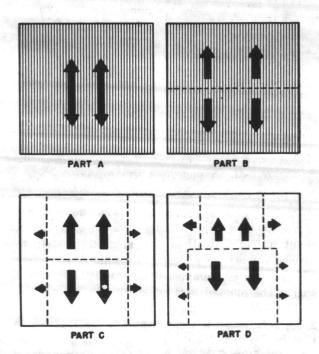


Figure 2-34. Example direction of storage arrangements.

15 September 1979 DOD 4145.19-R-1

equivalent of one carload. This layout is an improvement over that shown in figure 2–34, part A, but still makes no provision for less-than-carload quantities.

(5) Another method of storage which provides further flexibility is obtained by placing short rows of pallets along the sides of a large bay as shown by figure 2–34, part C. Stringers for these pallets are perpendicular to the predominant direction of storage; this is known as "side-to-back" storage. An imaginary line is drawn, and small lots are placed from this line out to the aisles. By using all aisles as faces of stacks, space has been provided for small lots without increasing the number of aisles and without sacrificing accessibility.

(6) The off-center division shows how further variety in row sizes can be provided (fig. 2-34, part D). The back-to-back line is set off-center, providing one very large bay and one of intermediate depth. Such a layout is desirable only when there is assurance that a substantial number of items will be held in quantities of two carloads or more. The depth of side-to-back bays varies from one to four pallets to provide a variety of short rows. Pallet racks placed side-to-back in bays permit fuller space utilization. Figure 2-34, parts A, B, C, and D, are not intended to present a standard layout for any class of materials, but only to point out what can be done with a fixed space and various aisle arrangements to provide maximum flexibility for storage operations.

b. Basic bin, shelf, and rack layout criteria. The amount of space assigned to a specific item within a bin section is governed by the factors shown in paragraph 2-302. However, the size or weight of an item is not necessarily related to its popularity. Fast moving binnable items, whether large or small, must be assigned space adequate to minimize replenishment frequency, time, and effort. There are many factors favoring issues from bin locations and the repetitive issue of small quantities of binnable-type items from bulk storage can rarely be justified. Proper use of bins will minimize the inventory and security problems found where there are broken cases of binnable-type items in bulk storage locations. Fast moving items should be kept in the center levels to facilitate issue and the heavy items should be placed in the lower levels. Lightweight items should be placed on the upper levels. Bin shelving arrangements are developed on the plan sheet (fig. 2-35).

(1) The utilization of 75 percent of space within bin and shelf openings, determined on the stock level to be carried, will be considered adequate. Losses in cube beyond this figure indicate the need for readjusting size of bin or shelf opening.

(2) Double decking of bins and shelving, if practicable, will result in better utilization of storage space. However, other factors involving economy of operation should be considered and when increased operating costs offset the savings, bins and shelving should not be double decked. When mezzanine platforms are used, they should have open

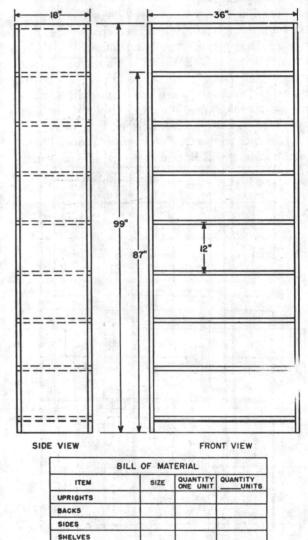


Figure 2-35. Bin shelving plan sheet.

LABEL HOLDERS

BASE STRIPS

type metal floors which will not obstruct the effective use of sprinkler systems.

- (3) A determination of storage aid requirements should be made prior to actual development of stock layout planographs. Appropriate adjustment of these requirements should be accomplished at any time it is found that increased space utilization can be achieved. Typical storage aids are bins, shelving, shelf boxes, and various types of racks. For illustrations of standard bin sizes and proper bin alignment see figures 2–36, 2–37, 2–38, and 2–39. Typical rack designs are illustrated in figures 2–40 and 2–41.
- (a) Shelf boxes can provide a flexible arrangement for efficient use of shelf space. The shelf boxes provide retainer walls on four sides of the material being stored thereby eliminating stock sloping which wastes usable cube space. Shelf boxes can also be "double stacked" on a bin shelf to facilitate use of cubic space. When relocation of the item is required, it can be accomplished by moving the shelf box with contents. The result is reduced handling of loose stock. Basic types of shelf boxes are:

- 1. Small, one compartment.
- 2. Small, two compartments.
- 3. Large, metal, one compartment.
- 4. Large, corrugated.

A complete study of shelf boxes has been made to determine the sizes which provide the greatest flexibility. The standard small one and two compartment shelf boxes are 41/2 inches high, 51/2 inches wide and 1 foot 5 inches deep as shown by figure 2-36; the standard large one compartment steel shelf box is 10% high, 111/4 inches wide and 171/2 inches deep as shown by figure 2-37; the standard large corrugated shelf box is 8 inches high, 10 inches wide, and 16 inches deep and shown by figure 2-38. The shelf space sizes 1 through 6 indicate the number of standard boxes required to house the items; size 3X indicates 1 complete shelf without boxes; size 6X indicates 2 complete shelves without boxes (fig. 2-39). Smaller items are stored in small one or two compartment shelf boxes which fit 12 to the shelf.

(b) All single pallet lots should be stored in metal pallet racks whenever practicable. In build-


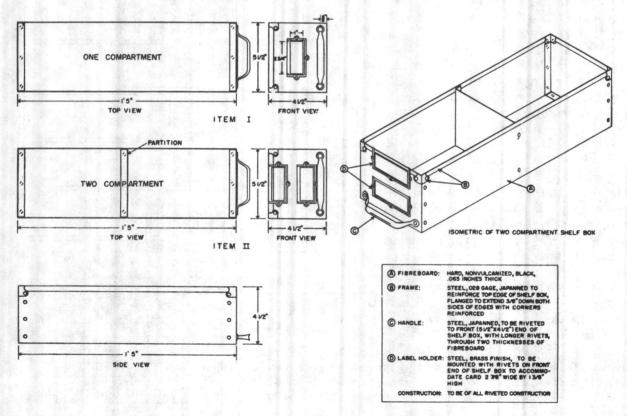


Figure 2-36. Shelf box, small, one and two compartments.

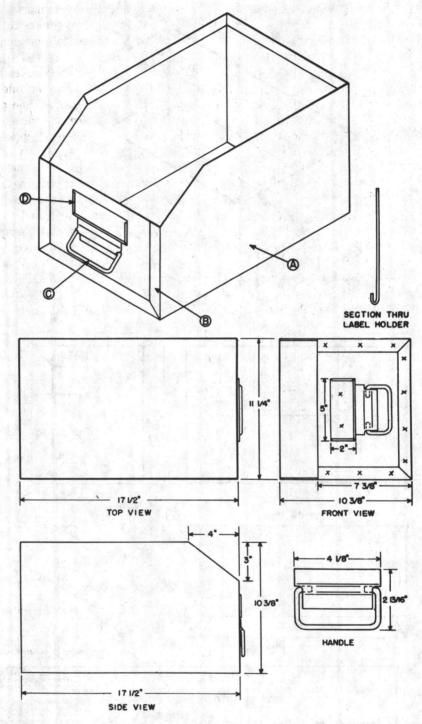

- A Steel\_\_\_\_\_ # 18 ga.
- Construction\_\_\_\_ Steel # 18 ga. spot welded, all laps forming box shall be 1". (B)
- © Handle\_\_\_\_\_ Steel No. 20 to be spot welded to front (111/4" x 7%") end of shelf box.

  ① Label Holder\_\_\_ Steel No. 20 to be spot welded on front end of box to accommodate card 41/2" wide by 1¾" high.

Figure 2-37. Large metal shelf box.


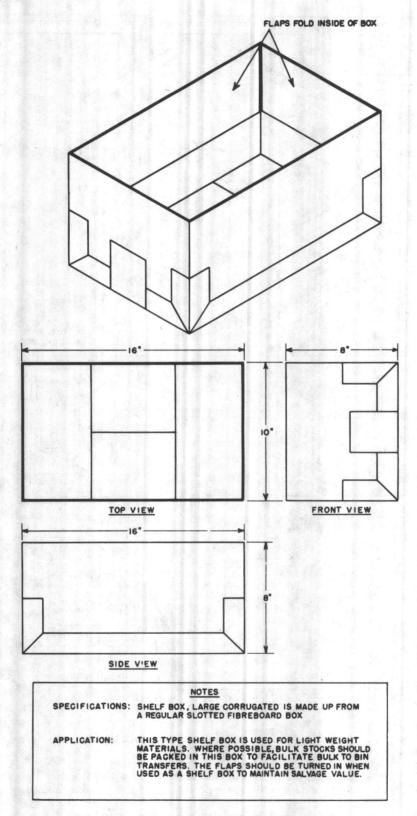


Figure 2-38. Large corrugated fiberboard box.

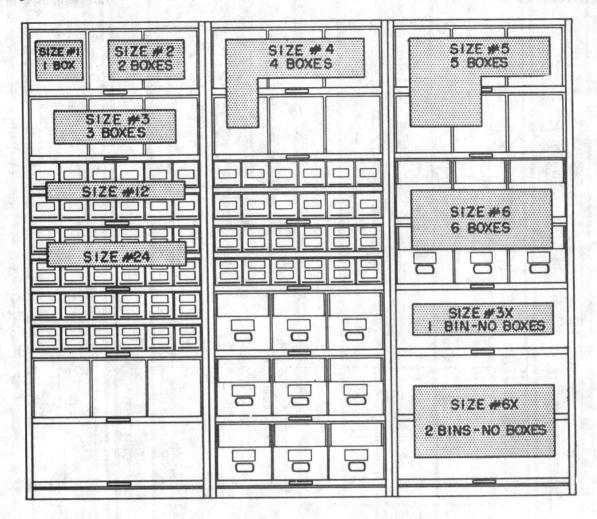

#### NOTE

THE SHELF BOX ARRANGEMENTS SHOWN ABOVE ARE EXAMPLES OF ONLY SOME OF THE LAYOUTS THAT CAN BE USED. THE NUMBER OF SMALL OR LARGE BOXES OR WHOLE SHELVES TO BE USED DEPENDS UPON THE PHYSICAL CHARACTERISTICS AND VOLUME OF BIN STOCKS TO BE STORED.

THE MAIN PRINCIPLES TO BE FOLLOWED ARE:

- I. USE SHELF BOXES EXTENSIVELY FOR EASE OF IN-VENTORY AND STOCK RELOCATION.
- 2. SMALL LOTS IN THE CENTER SO THAT THE MAJORITY OF ITEMS ARE IN CHEST HIGH POSITION FOR EASY PICKING.
- 3. HEAVY, LARGE ITEMS TOWARD THE BOTTOM WITH MOST INACTIVE ON LOWEST SHELVES.
- 4. LIGHT, LARGE ITEMS TOWARD THE TOP WITH MOST INACTIVE ON HIGHEST SHELVES.

Figure 2-39. Typical bin shelf box arrangement.

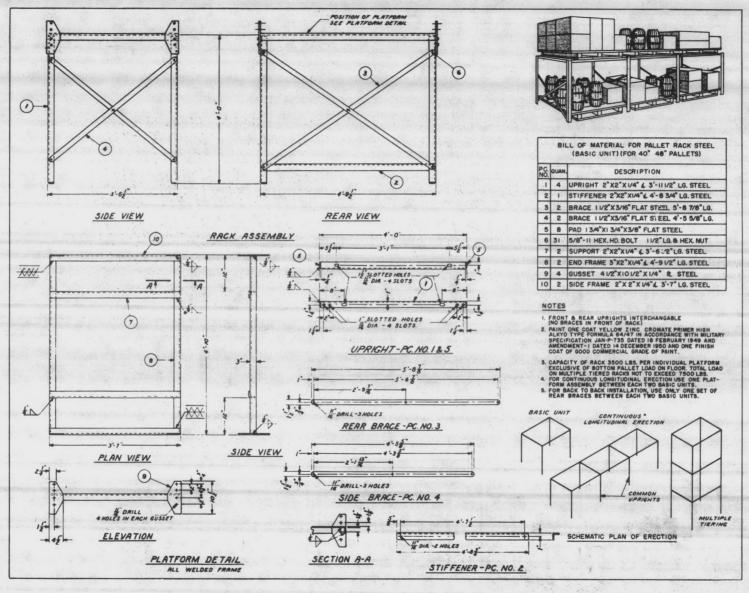


Figure 2-40. Metal pallet rack for storage of small-lot items.

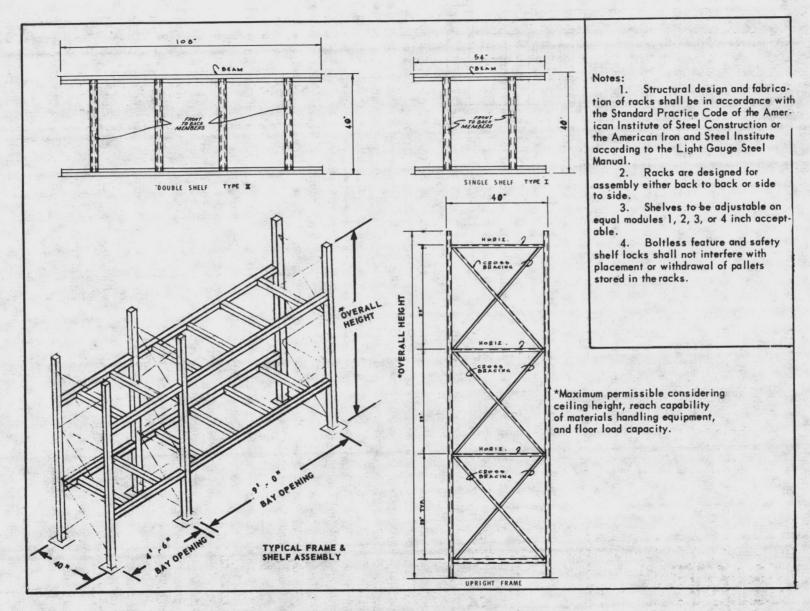


Figure 2-41. Metal pallet rack for storage of small lot items (boltless adjustable type).

ings with stacking overhead of 10 feet or less, a one-platform, two-level rack similar to the illustration in figure 2–40 should be used. In buildings with stacking overhead in excess of 10 feet, the number of levels will be determined by the available stacking height, the reach capability of materials handling equipment and floor load capacity. Normally, 4 feet should be allowed for each level opening. A building with a 20-foot maximum stacking height, could therefore accommodate five stacking levels or a four-platform pallet rack.

- 1. Multiplatform pallet racks are illustrated in figure 2–41. The conversion to metal pallet racks at installations not so equipped is a highly desirable goal if maximum space utilization and most effective use of resources are to be achieved.
- 2. Racks for military use have been standardized for use with either one (single opening) or two (double opening) 40 by 48-inch pallet loads of material per level. Single opening racks have platforms approximately 54-inches wide and hold one 40 by 48-inch pallet per level. Cost per pallet opening is higher in a single opening rack and this type should only be used when space limitations preclude use of the double opening size. Double opening racks have platforms approximately 108 inches wide and hold two 40 by 48-inch pallets per level. Since the difference in cost between a 54 and a 108inch platform is relatively small, and an upright column has been eliminated, the cost per pallet stored is smaller in a double opening rack than in a single opening rack.
- 3. Cantilever racks provide excellent storage aids for long narrow items (see chap. IV, sec 2).
- 4. Use of racks for storage of tires is explained in chapter V, section 6 of this regulation.
- c. Open storage layout criteria. The efficient utilization of open storage space can be accomplished by proper planning and space layout. There are many types of open storage space and to utilize each in the most effective manner requires judicious planning and a thorough knowledge of materials handling by storage personnel. Considerable thought must be given to the types of equipment to be used in each storage area to assure that adequate operational or working areas are provided in the layout of various types of space.
- (1) Determinant of open storage layout. The layout of open storage areas is determined, to a

great extent, by the location and layout of the existing track and road facilities that serve the area.

- (2) Objectives of open storage layout. The objectives of open storage layouts are—
- (a) Efficient utilization of each type of storage space.
- (b) Straight line flow of stock from unloading point to storage.
- (c) Maximum utilization of existing track and road facilities.
- (d) Ready access to each storage area or stock item.
- (3) Cube utilization in open storage may be increased materially by the utilization of storage aids. It is impossible to designate a maximum or minimum acceptable storage height for all open stored materials; however, cubic space should be utilized as efficiently in open storage areas as is practicable commensurate with good storage practices. The same general principles used in stacking supplies under cover apply to most items that can be stored in the open. The efficient utilization of open storage cubic space is just as important as the utilization of covered storage space.
- (4) Storage adjacent to double tracks should be reserved for storage of extremely heavy stock. This is the ideal layout for heavy lifts as it permits the car to be spotted on the more distant track and the crane to operate between the car and the storage point. In this arrangement, the distance from the crane to the material in the car or its intended storage point is at a minimum. This permits maximum utilization of crane lift capacity. Usually, doubletrack storage areas are at a premium, therefore, where possible the area on both sides of a doubletrack should be used for storage of heavy materials. However, to facilitate the use of the storage area behind this heavy material it is necessary to provide 20-foot aisles at 100-foot intervals leading from the track to the inner storage areas.
- (5) With a locomotive crane, stores can be stacked on a line 8 feet from the nearest rail of the track. This will permit the crane to make the swing required to move material from the car to the stack without danger of the counter balance or cab of the crane colliding with the materials stored on either side of the tracks.
- (6) Where crawler, truck mounted, or warehouse type cranes are used, it is necessary to maintain along one side of the track an operational aisle 25 feet in width, measured from the rail nearest to

the storage area. This aisle provides the necessary clearance between the car and stock for efficient crane operations. Also, this aisle is necessary to permit the loading or unloading of cars by fork truck and the transportation of stock by crane, fork truck, or tractor-trailer train from car side to the storage areas not immediately adjacent to the track.

(7) Because of track and road layout or terrain, each hard-surfaced open storage area presents varied problems in space layout. For this reason, layout plans must be flexible in order to utilize a higher percentage of the net usable storage space in each area. Some example open storage layouts are shown in figures 2–42 and 2–43.

#### 2-304. Utilization of Floor Plan in Stock Layout

a. Basic use. Using the floor plans, enter the location of aisles, shipping, receiving, bin, bulk, medium lot, pallet rack, and storage operational areas. After the location of the basic storage and operational areas are determined, the direction of flow and storage must be established and entered

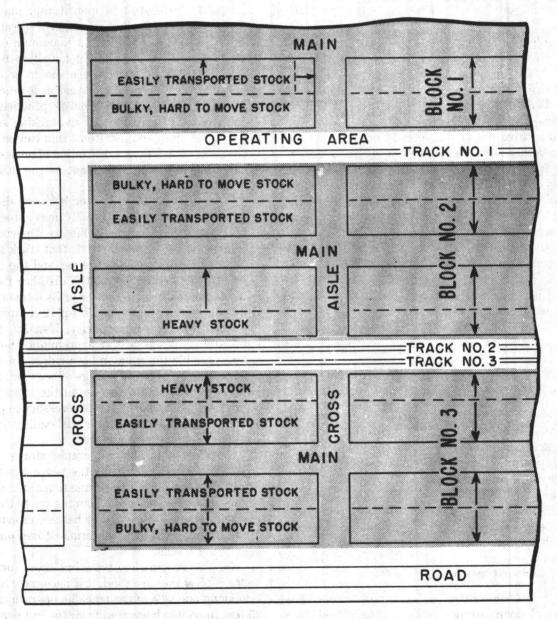


Figure 2-42. Example layout for open storage area.

on the floor plan. Figures 2-44, 2-45, and 2-47 (located in back of manual) are examples of layouts after preparation of initial floor plans.

b. Planning uses. The requirement for storage space, by type, amount, and position must be calculated utilizing estimated or known quantities,

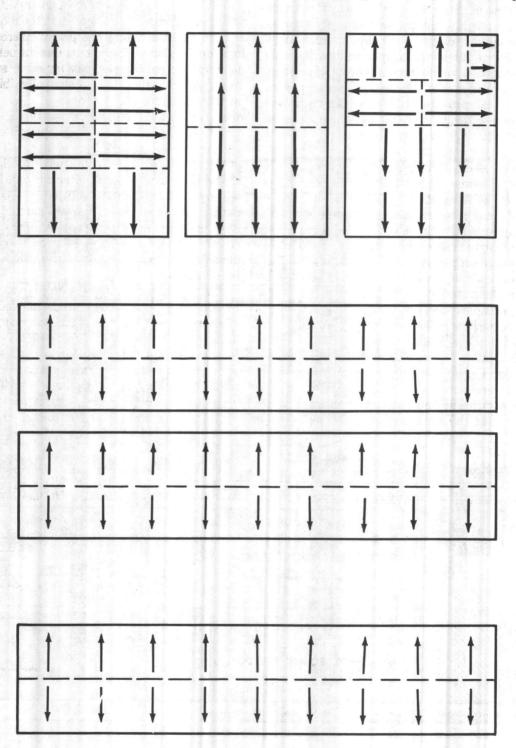


Figure 2-43. Example layout for open storage area.

15 September 1979 DOD 4145.19-R-1

sizes, characteristics, and the demand frequency shown in current reports, historical data, and forecasts (sec. 2). Quantities of bin sections and the various types of racks required will then be determined. The amount and location of the space assigned for these storage aids will be in consonance with the principles discussed in preceding portions of this section. A preliminary layout will be drawn on the floor plan and submitted to a comprehensive check as to the probable validity of the data used and to review the calculations which were made from the data. It is essential that any revision of a layout be accomplished in the planning stage rather than after storage aids have been erected and material stored. The principles of efficient storage layout, as illustrated by figure 2-44, require the minimum number and width of aisles, the maximum degree of straight flow movement patterns, the approximate positioning of bin and rack storage areas, storage support function areas, and the maintenance of flexibility in storage depth. The storage operation illustrated by figure 2-44 is small in size, but the principles shown apply to any storage operation regardless of square feet occupied, the range and depth of items stored, or the simplicity or sophistication of the materials handling equipment used. Figure 2-45 illustrates placement of bins for a warehouse automated materials handling system. In such a system, popular items are placed in bins nearest the material flow lines (conveyors, etc.). Storage layouts must be planned to consolidate productive functions into a centralized location to the greatest feasible extent. Such planning will result in a layout which reduces travel time and distances. This, in turn, decreases the requirements for materials handling equipment, increases work unit production per manhour, lessens personnel fatigue and error rate, provides for closer supervision and greater security, and permits flexibility in use of the work force.

c. Flexibility. Changes in the types of the materials handled or the average quantities in stock will require periodic changes of layout. The storage officer must be aware of the need for changes and when such changes occur, alter a layout if a change will increase operational efficiency. Also, consolidation of the material in several partially depleted rows into one location, or removal of residual quantities to small lot or loose issue areas can convert unusable space into usable space and honeycombing is reduced.

d. Effect of stock selection on layouts. Stock selection from bulk storage areas can influence the effectiveness of layouts. Material must be withdrawn row by row starting from the aisle and working back to the wall or imaginary line, and never across the whole front of the stacks. Withdrawals across the front of the stacks merely widen the aisle and do not create additional space for the storage of new commodities. This incorrect method of stock

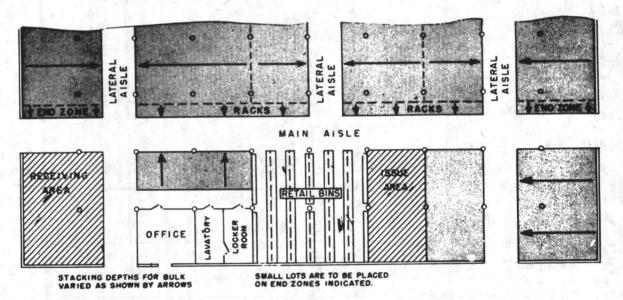


Figure 2-44. Example stock layout.

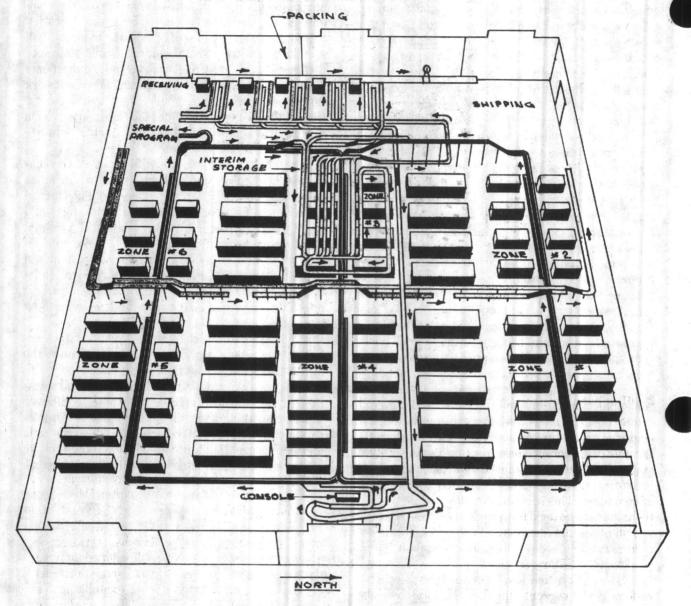


Figure 2-45. Layout containing an automated materials handling system.

withdrawal is a common cause of "honeycombing" in storage areas (fig. 2–46). Honeycombing also includes void spaces within the arrangement of materials on pallets, which results in space loss. Space

loss between stacks may be due to excessive overhang, resulting from poor palletization of the stock item. 15 September 1979 DOD 4145.19-R-1

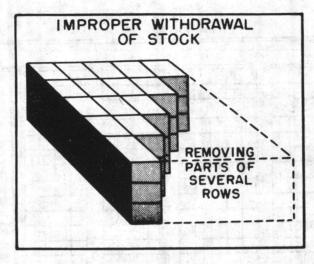


Figure 2-46. Honeycombing due to improper withdrawal of stock.


#### Section 4. SPACE CONTROL AND REPORTING

	Paragraph	
Space control techniques	2-401	
Space reporting illustrated	2-402	
DOD storage space reporting requirement	2-403	Sept.

#### 2-401. Space Control Techniques

- a. Scope and purpose. Effective control of space begins with the operating supervisor and extends through the storage manager, the activity or installation commander, the major command head-quarters, and to higher department or agency levels of command. This section provides certain uniform techniques to be used for proper space control. Storage plans for installations and activities storing ammunition will be developed as prescribed by the responsible military service.
- b. Space allocation map. A map of the installation reflecting the current status of the total area allocated for storage operations and the location or other related activities will be maintained by the storage manager. This map will show the type of space, specific functional use, e.g. receiving, shipping, bulk storage, loose issue storage, office space, etc. When applicable, broad material groupings may be added to identify storage of repair parts, end items, ammunition, etc. Identification of these areas may be accomplished by the use of color coding. An overlay may be used to facilitate updating the map.
- c. Floor plan or planograph. The base for designing local space control techniques for storage

- areas is the floor plan or planograph. Floor plans for general supply storage areas are discussed and illustrated in section 3 of this chapter. Detailed planographs depicting specific storage layouts are generally developed from these floor plans. Detailed planographs for general supply storage areas are discussed and illustrated in chapter III, section 3, of this regulation.
- d. Storage space survey worksheet. Utilizing information obtained from planographs, storage space survey worksheets should be developed for each general supply warehouse section, shed, open storage area, etc. Figure 2–48 is an example survey worksheet which can be used. These worksheets are scaled drawings of storage areas and provide feeder data input for storage space status reports. Ammunition storage space data will be maintained on planographs in the manner prescribed by the responsible service. The example survey worksheet shown is not applicable to ammunition.
  - e. Storage space status report.
- (1) A storage space status report will be prepared periodically. For control purposes, storage space status reports may be required monthly, or quarterly or as often as deemed necessary by the individual DOD Component. For reporting pur-

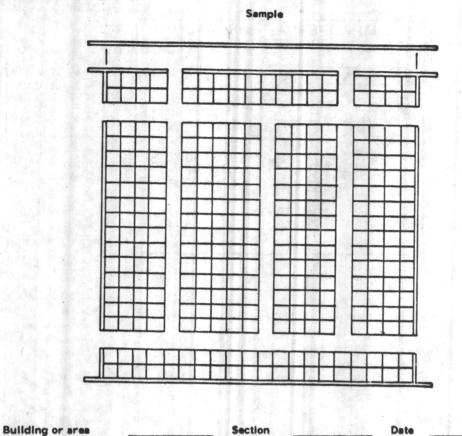

Gross square feet	* Occupied square feet
Alsies	* Vacant square feet
Structural loss	* Unobstructed stack height (s)
Support space	* Attainable stack height (s)
Net square feet	* Average stack height
Total Cubic Feet	Attainable cubic feet
(Unobstructed stack height(s) x ne	t sq. ft.) (Attainable stack height(s) x net sq. ft.)
en rough Meuropal and	NOTES NOTES
Occupied cubic feet Common/cross-serviced DOD material Non-DOD material	Information identified with asterisk will normally be constant.     Information shown on this illustre-
Reporting Component material	tion should be modified to meet local requirements.
Potential vacant space	
TYPE "A"	(Total "A")
· · · · · · · · · · · · · · · · · · ·	
The second secon	
	(Total "B")
Recoupable through rewarehousing	
(Potential vacant type "A" x averag	e stack height + potential vacant type B)

Figure 2-48. Storage space survey worksheet.

SPACE RECAPITULATION RECORD AC						Ac	tivity						Date								(FEEDER DATA FOR DO FORM 805 REPORT)					
	-		1 1	1	7 7			200	The state of	3 .	17	. 2	TYPE OF	SPACE			3 3									
TYPE FACILITY OPEN OPEN OPEN OPEN OPEN OPEN OPEN OPEN					HEATED		- The Real Property of the Rea	GF CH	MAGAZINE	1,7	GRO	GROSS SOUARE FEET IN BUILDING TOTAL BUILDING NO.								GROSS SOUARE FEET IN OPEN AREA						
COVERED OPEN OF N OPEN OPEN OPEN OPEN OPEN OPEN OPEN OP						FLANMAR	LE	- 50	FREEZ	EACHILL										BUI	OPEN AREA NO.					
8.0		SEC	TION A-C	ROSS ST	ORAGE SP	ACE	That is				100			ECTION B-I		GE SPAC	E	VAC					SECTION C-STORAGE SPACE ANALYSIS (NET CU FT)			
	PACE FOR	GROSS FOR	LIN		OUT-	GRANTED	USED FOR	AISLES	TOTAL	TOTAL	ATTAIN		1	OCCUPIED	CUPIED COMMON/CROSS SERVICE					UNOBLI		ABLE CU	REQUIRE.	RECOUPABLE WITH ADDI-	REQUIRES MAJOR RE	REQUIRES
٥.	TOR OPER PREVIOUS REPORT	GROSS SPACE FOR STOR OP ERATIONS THES RPT	USABLE	STANDBY	TO NON DOD USE RS	USE RS	OPE RA- TION	LOSS, SPT SPACE	SOUARE	FEET	FEET	SOUARE FEET	FEET	ING COMP	TOTAL	000	NOM	SOUARE FEET	FEET	SOUARE	FEET	FT THRU REWARE HOUSING	MENT NEXT		PAIR/MODI- FICATION	MENT
				1										ign .								1000				
			1.57			. 4	1			7 14					219 m			1		1						
											92.76				T. ALIEN				17	一样		-	-1 -			
	4							6.3										Y						- 10		
	2.7%							4 - 5		3/162																
																										18
			4 181									100														
	april d			3 - 13		1																				in the second
	1							6.0									-44									
				dia.	194			100		5										3-47						13
	The state of		-	1, 3	14			175.3	100	1															100	
1																							and the same		100	
EMAR	CS.		T UN		100					10.00	- 0		Research to				55		Tarp.							
													***													

Figure 2-49. Sample space recapitulation record.

poses, DOD Components must comply with the frequency requirements of the Storage Space Management Report (DD Form 805).

- (2) Storage space status reports are basically current records of space utilization and occupancy. These reports are to be assembled by the storage administrative activity responsible for space control and reporting. The information contained therein will be recapitulated for space reporting to higher levels.
- (3) Internal reports will also include specific data pertaining to potential space improvements. For general supplies, potential space improvement data are identified during storage space surveys as potential vacant type "A" (sq. ft.) and type "B" (cu. ft.). This potential vacant "B" space information is reported in formal space reports as recoupable cubic


space through rewarehousing. For local management purposes, potential vacant space, type "A" (sq. ft.) warrants consideration when it reaches 5 percent of net square feet occupied in a specific storage area. These affected areas will be reviewed by storage managers to direct efforts to reclaim such space by rewarehousing. Potential vacant space is discussed and illustrated in more detail in this section under "Space Reporting Illustrated."

f. Space recapitulation record. Figure 2–49 represents a sample space recapitulation record which may be used to recap storage space data. Such a record provides an effective means of consolidating storage space data by building, area, type of space, etc., and can be used in conjunction with storage space status reports.

### 2-402. Space Reporting Illustrated

The following illustrations provide pictorial guidance in understandable terms for use by personnel involved in space reporting.

# STORAGE AND NON-STORAGE

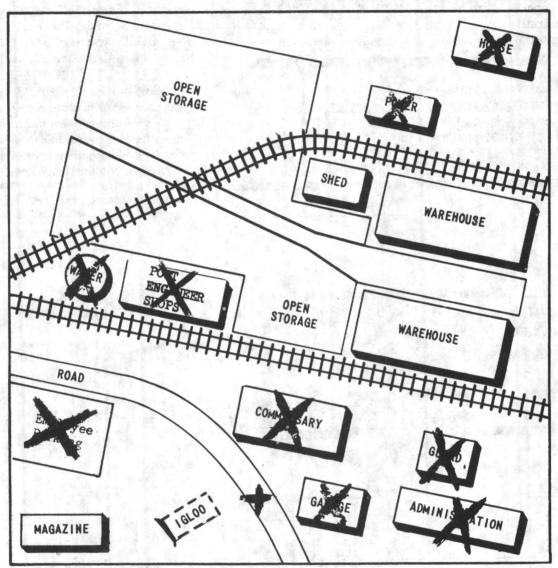


# THIS IS A MAJOR SUPPLY INSTALLATION.

Not all of the area in a supply installation is storage area. Not all of its buildings are storage buildings. Some of its open area is not storage area. But certain parts of the installation, either by nature or by use, constitute storage area. Their dimensions—side by side and end to end—make up GROSS STORAGE AREA, expressed in square feet. Added all together, this footage is GROSS SPACE FOR STORAGE OPERATIONS. This is the only area of the installation you report as STORAGE SPACE.

# MEASURING WAREHOUSE SPACE


# USE INSIDE DIMENSIONS

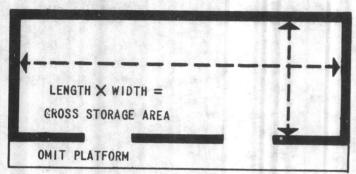

You measure all these structures by taking inside dimensions. The width in feet is multiplied by the length in feet and the result is the square-foot area, or TOTAL GROSS STORAGE AREA. This is less than the outside dimensions by the thickness of the walls. You don't pay any attention to inside fire walls, passageways, ramps, stair wells, or such matters. However—

# IF YOU HAVE A BUILDING LIKE THIS


in which there is a cutback in the walls you measure the cutback and exclude it from TOTAL GROSS STORAGE AREA.

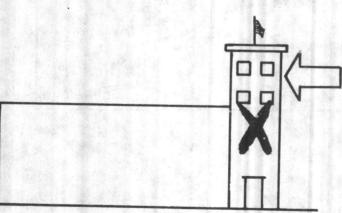

# OR LIKE THIS

in which there is a tower for offices, or any portion not designed for storage (though in a storage building) you exclude it from TOTAL GROSS STORAGE AREA. However, if this tower had been designed for storage and later converted to storage offices, you would include it in TOTAL GROSS STORAGE AREA. Even if it was not designed for storage but is used for that purpose you report it during the period of use.

# **MEASURING "OPEN" AREAS**

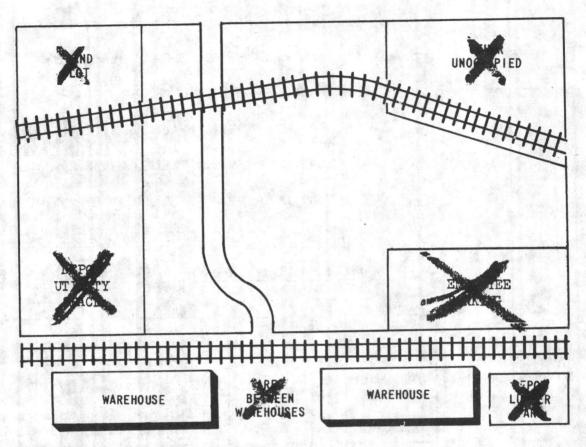

# THIS IS OPEN STORAGE

Open storage may be either improved or unimproved (occupied or unoccupied), or OTHER (occupied only). Improved is included in making up your figure for TOTAL GROSS STORAGE AREA. However, in the case of unimproved open areas, only that space actually occupied by stored material or used in support of storage operations will be reported.

Measure open area in much the same way as you measure covered area. But take outside dimensions. Take the length in feet and the width in feet, and multiply the two together.

This will give you gross area expressed in square feet. If, however, the area is irregular in shape, you may have to make additions or deductions to arrive at a correct figure. But make no deductions for tracks or roadways running through the area.

Bear in mind that open storage does NOT include sand lots, depot parking space, maneuvering space between warehouse, etc.—even though some have prepared surfaces. However, if such space is actually occupied by material it will be reported as storage space for the period actually occupied.

### THIS IS HOW YOU FIGURE SPACE


# WHAT IS GROSS, SPACE FOR STORAGE OPERATIONS?

MEASURING LENGTH X WIDTH (SQ FT) OF BUILDINGS, OR AREAS DESIGNATED AS STORAGE AREAS
(AS SHOWN IN PREVIOUS ILLUSTRATIONS).

STEP 2

UTILIZING DATA (SQ FT) CALCULATED, YOU
MUST THEN SUBTRACT GROSS STORAGE SPACE

NOT USED FOR STORAGE OPERATIONS, SUCH AS:

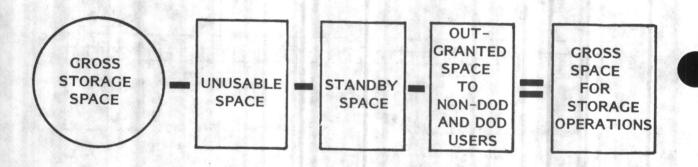

#### **EXPLANATION OF TERMS:**

UNUSABLE SPACE— IS SPACE SO DETERIORATED THAT IT FAILS TO

PROVIDE A SUFFICIENTLY PROTECTIVE ENVIRON—

MENT FOR STORAGE, OR SPACE THAT IS UNSAFE

FOR ANY STORAGE PURPOSE, UNDERGOING REPAIR,

OR SPACE UNWARRANTED FOR STORAGE BECAUSE

OF ITS LOCATION, SECURITY RISK, OR ITS OCCU
PANCY WOULD BE IN VIOLATION OF LOCAL SAFETY

ORDINANCES.

GROSS SPACE FOR STORAGE OPERATIONS—CONTINUED

STANDBY SPACE ..... GROSS SPACE PLACED IN STANDBY STATUS.

OUTGRANTED SPACE ..... IS GROSS SPACE LEASED, LICENSED OR PERMITTED TO PRIVATE OR NON-

OR PERMITTED TO PRIVATE OR NON-DOD GOVERNMENT AGENCIES FOR THEIR OPERATION AND/OR GROSS SPACE LICENSED OR PERMITTED TO OTHER DOD COMPONENTS FOR THEIR

OPERATION.


# WHAT IS NET STORAGE SPACE?

ANSWER: NET STORAGE SPACE IS GROSS SPACE FOR STORAGE OPERATIONS

MINUS GROSS SPACE USED FOR AISLES, STRUCTURAL LOSS

AND SUPPORT SPACE. (REMEMBER--WE ARE STILL USING

SQUARE FEET CALCULATIONS.)

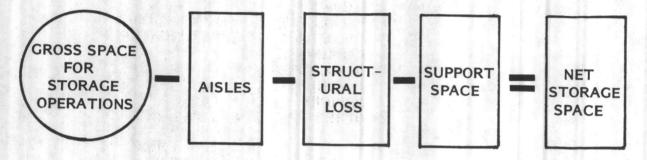

#### **EXPLANATION OF TERMS:**

AISLES--

GROSS SPACE USED IN STORAGE TO PROVIDE

FIRE AISLES; PERSONNEL ACCESS AISLES; MAIN

AISLES; AND CROSS AISLES.

STRUCTURAL LOSS--

IN COVERED STORAGE STRUCTURAL LOSS IS GROSS
SPACE THAT IS NOT USABLE FOR STORAGE BECAUSE
OF OBSTRUCTIONS CAUSED BY PHYSICAL CHARACTERISTICS SUCH AS POSTS, PILLARS, RAMPS, DOOR
CLEARANCES, FIRE WALLS AND SPACE LOST BY
INSTALLED EQUIPMENT SUCH AS SWITCH PANELS,
DEHUMIDIFICATION EQUIPMENT, ETC. IN OPEN

# NET STORAGE SPACE—CONTINUED

STRUCTURAL LOSS

(CONT'D) OR OUTSIDE STORAGE STRUCTURAL LOSS INCLUDES SPACE TAKEN UP BY

RAILROAD TRACKS, FIRE BREAKS, AND CLEARANCES FOR UTILITY LINES. ETC. AISLES ARE NOT IN-

CLUDED.

SUPPORT SPACE ..... GROSS SPACE USED IN SUPPORT OF

STORAGE OPERATIONS INCLUDES

STORAGE SPACE USED FOR:

RECEIVING

SHIPPING

PRESERVATION AND PACKAGING

INSPECTION AND IDENTIFICATION

PACKING

**BOX SHOP** 

ASSEMBLY

OFFICES

OTHER .....SUCH AS PARKING

OR STORAGE

AREAS FOR MHE

(AISLES NOT IN-

CLUDED)

BATTERY CHARG-

ING STATIONS

EMPLOYEE REST

ROOMS

TOOL ROOMS

LOCKER ROOMS

TIME CLOCK


AREAS

SMOKING AREAS

But remember: IT MUST BE STORAGE SPACE THAT IS BEING USED

FOR ANY OF THE ABOVE.

# NOW! LET'S SUMMARIZE WHAT WE HAVE COVERED SO FAR

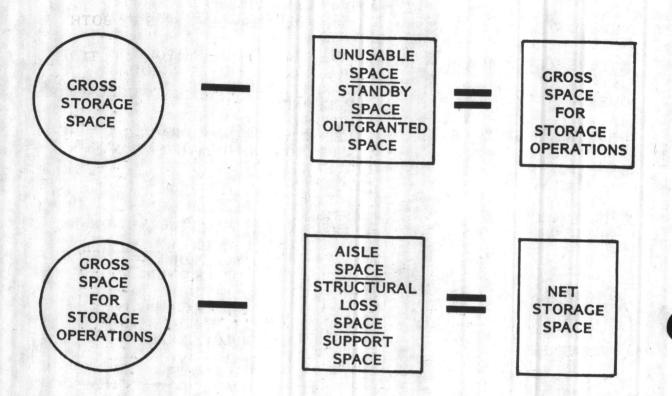

#### NOTE

UP TO THIS POINT WE ARE STILL DISCUSSING SPACE BY SQUARE FEET
MEASUREMENTS. NOW WE ARE READY TO EXPLAIN HOW NET STORAGE
SPACE IS REPORTED IN TERMS OF SQUARE FEET AND CUBIC FEET.

# HOW DO WE REPORT NET STORAGE SPACE?

NET STORAGE SPACE IS REPORTED TO HIGHER HEADQUARTERS BY BOTH


SQUARE FEET AND CUBIC FEET MEASUREMENTS. FIRST WE MUST DETERMINE

OUR CAPACITY OF NET STORAGE SPACE, THEN WE CALCULATE OCCUPANCY


AND VACANT SPACE. LET'S LOOK AT CAPACITY FIRST:

CAPACITY OF NET STORAGE SPACE IS DETERMINED BY:

 DETERMINING NET STORAGE SPACE (SQ FT) (WHICH HAS ALREADY BEEN ACHIEVED IN PREVIOUS ILLUSTRATIONS)

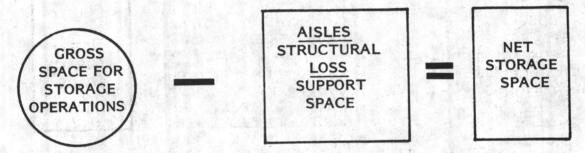

2. DETERMINING TOTAL NET CUBIC FEET AND ATTAINABLE CUBIC FEET:

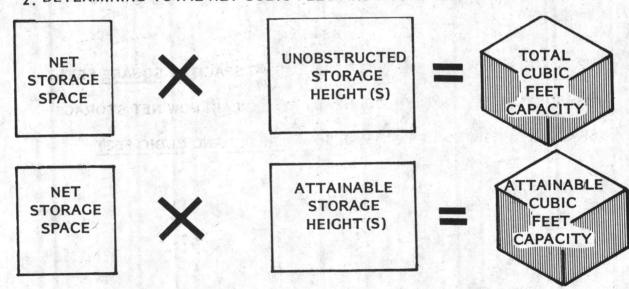

# LET'S CLARIFY TOTAL CUBIC FEET AND ATTAINABLE CUBIC FEET CAPACITIES:

IN COVERED STORAGE . . .

TOTAL CUBIC FEET—IS THE PRODUCT OF NET STORAGE SPACE (SQ FT) MULTIPLIED BY THE UNOBSTRUCTED STACKING HEIGHT(S) PERMITTED BY SAFETY REGULATIONS/RESTRICTIONS IN A PARTICULAR STORAGE AREA, BAY OR SECTION OF A COVERED FACILITY

ATTAINABLE CUBIC FEET—IS THE PRODUCT OF NET STORAGE SPACE (SQ FT) MULTIPLIED BY THE STACKING HEIGHT(S) PERMITTED BY SAFETY REGULATIONS/RESTRICTIONS AND FLOOR LOAD LIMITATIONS WITH AVAILABLE MHE STORAGE AIDS. THEREFORE, ATTAINABLE CUBIC FEET REPRESENTS THE CUBIC SPACE USABLE OR AVAILABLE FOR STORAGE WITH EXISTING RESOURCES.


BIN CUBIC	
CAPACITY	


IS THE PRODUCT OF OUTSIDE DIMENSIONS—LENGTH, WIDTH, AND HEIGHT (L  $\times$  W  $\times$  H), UNUSED CUBIC SPACE ABOVE THE BINS WILL NOT BE INCLUDED AS ATTAINABLE SPACE.

# RACK CUBIC CAPACITY

IS THE PRODUCT OF THE RACKS' OUTSIDE DIMENSIONS (L  $\times$  W  $\times$  H). CUBIC SPACE ABOVE THE RACKS WILL BE INCLUDED TO THE EXTENT THAT USE OF SUCH SPACE IS PERMITTED BY SAFETY LIMITATIONS

# EXAMPLES OF DETERMINING CUBIC SPACE CAPACITY IN COVERED STORAGE:

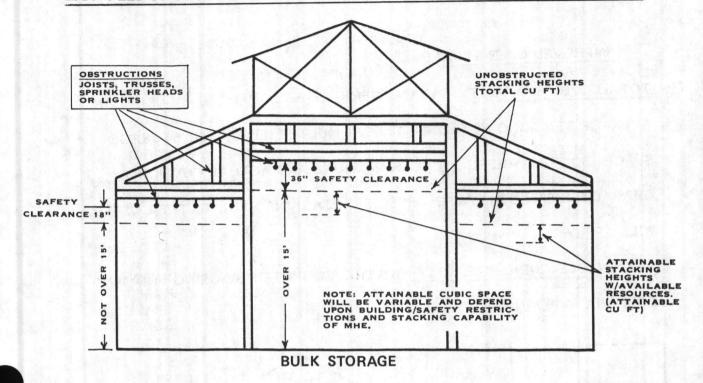

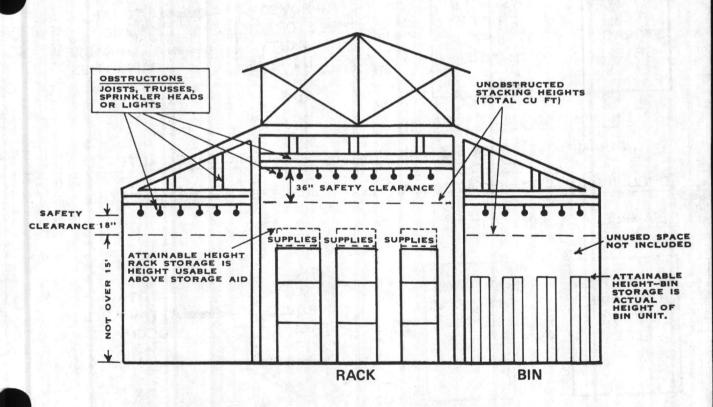


DOD 4145.19-R-1 15 September 1979

# HERE'S HOW TO COMPUTE CUBIC SPACE CAPACITIES IN OPEN STORAGE-

# IMPROVED OPEN STORAGE...

TOTAL CUBIC CAPACITY—WILL GENERALLY BE COMPUTED BY USING AN AVERAGE STACKING HEIGHT OF 10 FEET MULTIPLIED BY NET STORAGE SPACE (SQ FT). WHERE LOCAL CONDITIONS AND ACTUAL COMMODITY CHARACTERISTICS DICTATE A SPECIFIC STACKING HEIGHT, THE LATTER WILL APPLY.

ATTAINABLE CUBIC CAPACITY -- WILL BE COMPUTED BY USING THE SAME CRITERIA EXPLAINED ABOVE.

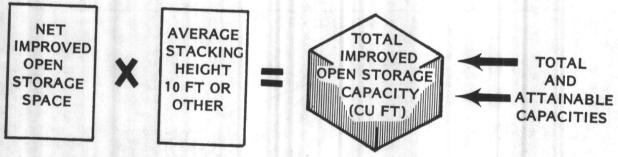


# UNIMPROVED OPEN STORAGE...

IN UNIMPROVED OPEN STORAGE ONLY REPORT CUBIC SPACE ACTUALLY

OCCUPIED BY MULTIPLYING SQUARE FEET OCCUPIED BY A REPRESENTATIVE

(SAMPLE) STACKING HEIGHT.

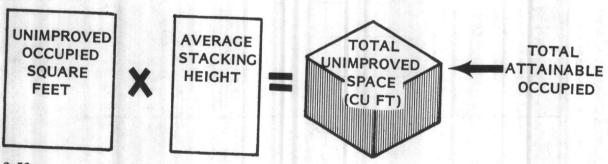

IGLOO AND MAGAZINE SPACE

THE BASIC INSTRUCTIONS CONTAINED HEREIN FOR COVERED STORAGE APPLY ALSO FOR REPORTING AMMUNITION CUBIC STORAGE SPACE CAPACITIES WITH REGARD TO:

TOTAL CUBIC FEET ... NET STORAGE × UNOBSTRUCTED STACKING HEIGHT(S).


AND
ATTAINABLE CUBIC
FEET

NET STORAGE  $\times$  ATTAINABLE STACKING HEIGHT(S).


THESE GUIDELINES MAY BE AUGMENTED BY SPECIAL DOD COM-PONENT INSTRUCTIONS ESTABLISHING UNIFORM UNOB-STRUCTED OR ATTAINABLE HEIGHTS IN SPECIFIC FACILITIES (IGLOOS AND MAGAZINES). WHEN SUCH SPECIFIC HEIGHTS ARE ESTABLISHED AND FURNISHED, REPORTING ACTIVITIES WILL COMPUTE CUBIC SPACE CAPACITIES ACCORDINGLY.

### DETERMINING OCCUPIED AND VACANT NET STORAGE SPACE-

SPACE IS EITHER OCCUPIED OR VACANT. ALSO, OCCUPIED SPACE CAN
BE UTILIZED IMPROPERLY AND BE CLASSIFIED AS POTENTIAL VACANT
SPACE. FOR REPORTING PURPOSES, LET'S FIRST DISCUSS THE METHODS
OF REPORTING OCCUPIED SPACE; THEN WE WILL ILLUSTRATE EXAMPLES
OF OCCUPIED, VACANT AND POTENTIALLY VACANT SPACE:



THE AMOUNT OF SQUARE FEET OCCUPIED BY BINS, RACKS, AND MATERIAL IN COVERED AND OPEN BULK STORAGE AREAS. BIN AND RACK SPACE IS CONSIDERED OCCUPIED WHETHER OR NOT MATERIAL IS STORED THEREIN (L × W).



THE PRODUCT OF NET SQUARE FEET BY ACTUAL STORAGE HEIGHTS OR HEIGHTS DETERMINED BY STATISTICAL SAMPLING, WHEN APPLICABLE:

BIN AND RACK OCCUPANCY WILL BE COMPUTED
BY DETERMINING WHAT PORTION OF TOTAL
ATTAINABLE SPACE IS VACANT THROUGH STATISTICAL SAMPLING OR RECORDS OF AVAILABLE
AND OCCUPIED OPENINGS. THEN: TOTAL
ATTAINABLE CUBIC FEET MINUS VACANT CUBIC
FEET EQUALS OCCUPIED BIN AND RACK SPACE.

DETERMINING OCCUPIED AND VACANT NET STORAGE SPACE—
CONTINUED

BULK OCCUPANCY IN COVERED STORAGE WILL BE BASED UPON PERIODIC SURVEYS OF BULK LOCATIONS TO DETERMINE REPRESENTATIVE BULK STACKING HEIGHTS FOR EACH STORAGE FACILITY.


IMPROVED OPEN OCCUPANCY IS BASED UPON NET SQUARE FEET OCCUPIED MULTIPLIED BY AN AVERAGE STACKING HEIGHT OF 10 FEET (OR OTHER SPECIFIC HEIGHT IF DETERMINED).

UNIMPROVED OPEN OCCUPANCY WILL BE BASED ONLY UPON OCCUPIED SQUARE FEET TIMES AN AVERAGE STACKING HEIGHT.

## • OCCUPIED VS VACANT

# Space is Three-Dimensional

SPACE IS
OCCUPIED

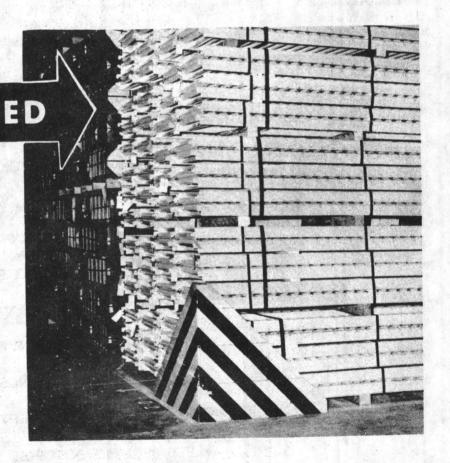

Our next item is OCCUPIED NET STORAGE SPACE. To get this figure you could of course measure the space actually occupied. That's doing it the hard way because in most cases your occupied space is greater than your vacant space. It's simpler and more accurate to compute the total vacant space

and subtract that figure from NET STORAGE SPACE. ACTUAL VACANT is not much of a problem. You just measure the floor space that is not occupied by supplies. You include space occupied by empty pallets and dunnage, you do not include short spaces in front of stacks or broken spaces.

USABLE BUT NOT USED

THESE ARE THE PRINCIPAL TYPES OF OCCUPIED SPACE THAT ARE REVIEWED AND REPORTED AS:  $POTENTIAL\ VACANT\ SPACE$ 



SHORT SPACES AND BROKEN SPACES ("HONEYCOMBING")



TYPE A POTENTIAL VACANT includes ALL spaces in front of stacks which cannot be used for the storage of supplies other than identical sizes, lots, etc. It is a type of space loss which can frequently be overcome by setting aside shallow spaces along aisles for small lots.

This space is captured during the space surveys and reported as space recoupable through rewarehousing.



LOW STACKING (failure to stack to full permissable height)



The test for TYPE B is simple. Just ask yourself, Has stock been stacked to maximum permissible height, considering the floor load, height of roof rafters and ceiling joists, commodity characteristics, and strength of package? If not, correct the condition mentally—in other words, do a job of mental rewarehousing—and enter the space thus uncovered (mentally reclaimed) as potential vacant.


#### AVOID CONFUSION

These are not POTENTIAL VACANT:

- Space occupied by empty pallets or racks (=ACTUAL VACANT).
- Low stacking caused by limitations of floor load, height of roof rafters and ceiling joists, commodity characteristics, and strength of package (=100% OCCUPIED).


## These are cases of Potential Vacant, Type A

We begin with short spaces or broken spaces caused by poor warehousing. In the two examples on this page supplies have been stacked in such a way as to create unusable areas—unusable, that is, except for the identical item or lot number. Such space is POTENTIAL VACANT (TYPE A).

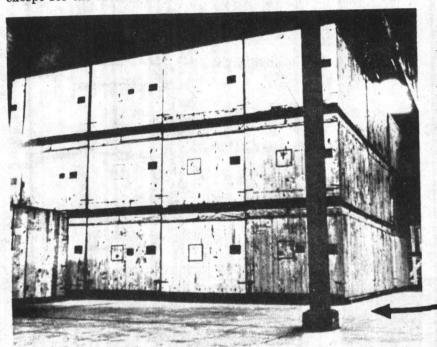

By stacking forward from wall to aisle three cases deep (instead of across the space), 30 percent of this space could be reclaimed. Such reclaimable area is to be reported as POTENTIAL VACANT,

> 30% POTENTIAL VACANT

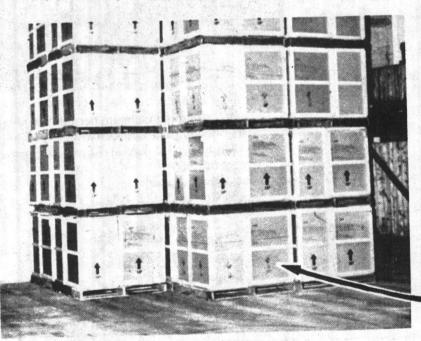


In this case supplies have been removed across the front instead of in rows from aisle to wall. As a result these supplies occupy parts of three rows instead of filling one. Report 66% percent of central area as POTENTIAL VACANT.

> 66%% POTENTIAL VACANT

## • POTENTIAL VACANT

## Also Type A - Short Spaces in Front of Stacks

In some instances this type of space loss—short spaces in front of stacks—can be avoided. In some instances the condition may be more or less unavoidable. In either case the space that might be reclaimed is reported as POTENTIAL VACANT—no matter what the cause or application.

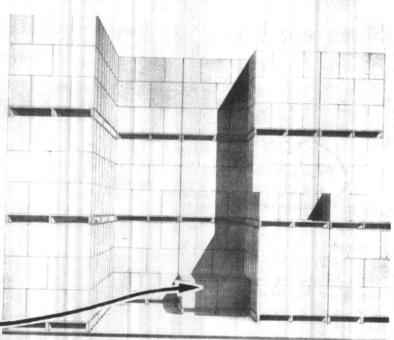





Here are items (small-arms ammunition) which must be stored by lot number, thus causing short spaces in front of stacks. POTENTIAL VACANT results.

Generally speaking, warehousing practice that leaves short spaces in the midst of a stack is not good warehousing. But good or bad, avoidable or unavoidable, such spaces are reported as POTENTIAL VACANT. Fifty percent of the center row in the photograph is occupied; accordingly the rest is POTENTIAL VACANT (TYPE A).





## • POTENTIAL VACANT

## Next we have Type B-Low Stacking



Simple inspection shows that the lot in the foreground could be stacked one pallet higher or, preferably, three cases high (instead of two) on each pallet. This means that 20 to 33 percent of the space occupied by this lot should be reported as POTENTIAL VACANT.

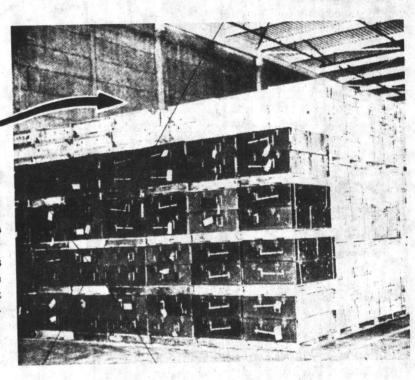

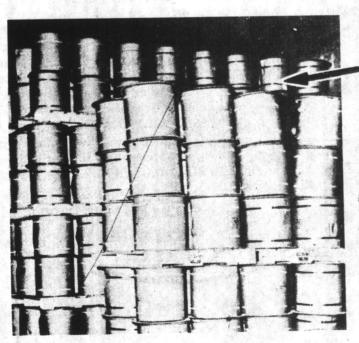

25% POTENTIAL VACANT

By loading the pallets in the foreground in the same way as the pallets in the rear, these reels could be stacked eight high instead of six; therefore 25 percent of the near row is POTEN-TIAL VACANT (TYPE B). TYPE A POTENTIAL VACANT is present in the two unfilled rows.

## POTENTIAL VACANT



25% POTENTIAL VACANT

These reels could have been stacked one pallet higher with a resultant saving of space amounting to 25 percent (TYPE B).

# Another subject for "Mental Rewarehousing"

As a practical matter it is desirable to supplement "mental rewarehousing" with paper computations. Suppose you have a situation like that shown above. As noted in the caption, another tier could be stacked above the three already in place.

By simple inspection we can see that one-

fourth, or 25 percent, of the available height is not utilized. This means that 25 percent of the floor space occupied by this stack could be saved by rewarehousing; hence if the stack occupies 1,200 square feet of floor space, then 25 percent or 300 square feet would be reported as POTENTIAL VACANT.

STORAGE SPACE IS CRITICAL Use it wisely. Report it accurately, especially take action to recover POTENTIAL VACANT. This is "found" space. Don't overlook it.

# • POTENTIAL AND ACTUAL Mixed and Miscellaneous (CONTINUED)



25% POTENTIAL TYPE B

POTENTIAL VACANT TYPE A

> ACTUAL VACANT

Here are two types of POTEN-TIAL VACANT. They're easy to diagnose. Central block exhibits TYPE B, because full height is not utilized. The same is true of reels in background. Foreground obviously is TYPE A POTENTIAL VA-CANT, though actual percentage cannot be determined from the photograph. As in the photo reproduced at the bottom of the preceding page, if back-to-back stacking were employed here, a half row of AC-TUAL VACANT space would be gained.



POTENTIAL VACANT TYPE A

### SPECIAL CASES

## **Stacking Height Limited**




100% OCCUPIED

At first glance this might appear to exhibit TYPE B POTENTIAL VACANT, but these are coils of rubber-insulated wire which could not be stacked higher without damage to the commodity; hence by definition this space is 100 percent OCCUPIED.



These are batteries stacked to the limit of permissible floor load (second floor, multistory warehouse); hence the space occupied is 100 percent OCCU-PIED. Frequently, more economical stacking of such items can be attained by placing them on the ground floor where the permissible floor load is greater. But this fact does not change the status, for reporting purposes, of a stack already in existence.

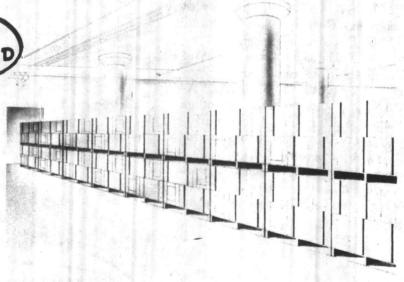

### GUIDE FOR COMPUTING OCCUPIED AND VACANT SPACE

1. During storage space surveys, estimates and computations will be based upon pallet sizes and square feet grids occupied by each, including overhang and space between pallet tiers. The factors to use for various pallet sizes are as follows:

a.  $32 \times 40'' = 12$  sq ft. b.  $40 \times 48'' = 16$  sq ft.

c.  $48 \times 60'' = 26 \text{ sq ft.}$ 

 $d. 48 \times 72'' = 31 \text{ sq ft.}$ 

- e. Other size pallets will be computed by multiplying the length plus 6 inches (2 inches on each side for overhang plus 1 inch on each side for space between tiers) times the width plus 6 inches.
- 2. To determine whether a partially loaded pallet is to be counted as full or empty, the standard will be a loaded pallet of a particular item and the following computation will be made:

a. Pallet containing less than 50 percent of an item will be considered as

empty.

b. Pallet having more than 50 percent of an item will be counted as full.

3. Difference between "Actual Vacant Space" and "Potential Vacant Space":

a. Actual vacant space—Floor area of net storage space which is not occupied by materials or storage bins. (Do not include potential vacant space as vacant


space.)

7 14 75 170 170

- b. Potential vacant "A" space—That portion of occupied net usable space which is temporarily not used for storage because of space voids in front of stacks of material (honeycombing) or space voids at the height of stacks which can be made available by rewarehousing or utilization of maximum heights in stacking.
- 4. In computing potential vacant space on the floor, the following figures will be used:
- a. Distance less than 6 inches will be disregarded. For example: 5'' = 0'; 1'4'' = 1'.
- b. Distances in excess of 6 inches will be figured as 12" or 1', i.e., 9'' = 1'; 1'7'' = 2'.

## GUIDE FOR COMPUTING POTENTIAL "B" STORAGE SPACE

During storage space surveys, personnel performing this function must compute potential type "B" (cubic space) voids when maximum stacking heights are not achieved, and in those instances where such space can be recouped by rewarehousing. This information is annotated on survey worksheets and totaled. Later it will be added to the total cube determined for type "A" space to achieve recoupable cubic feet through rewarehousing. Here is a simple way to figure type "B" cubic space:

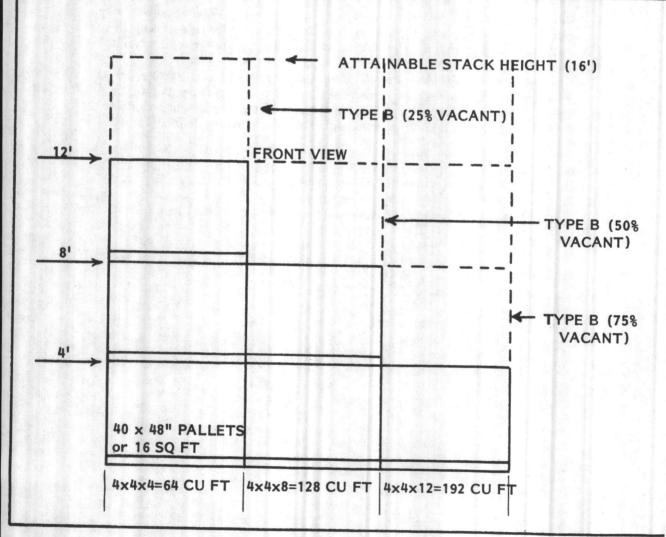

# GUIDE FOR COMPUTING POTENTIAL "B" STORAGE SPACE—(CONTINUED) NOTE

Each stack of vacant type "B" space in this example is equal to 64 cubic feet. By figuring the capacity of one void space (or pallet load), you can arrive at a total figure by counting vacant spaces then multiplying vacant pallet loads by 64 cubic feet. This method should also be used for depth of stacks.

Example:

64 cubic feet = 1 stack


No. of void spaces

(pallet loads) = 10

 $10 \times 64$  = 640 cubic feet (type B)

You simply annotate 640 cubic feet on worksheet for above item.

## BB

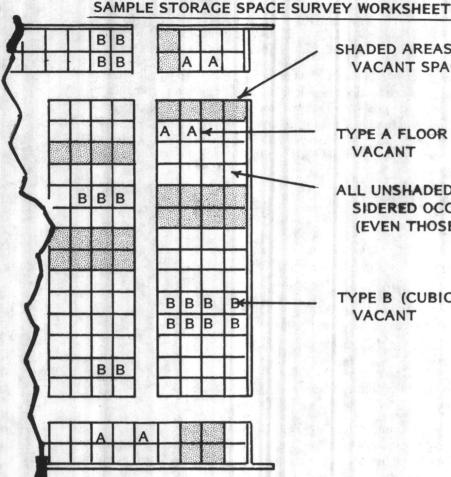

SHADED AREAS REPRESENT VACANT SPACE

TYPE A FLOOR SPACE POTENTIAL VACANT

ALL UNSHADED AREAS ARE CON-SIDERED OCCUPIED SPACE (EVEN THOSE MARKED A OR B)

TYPE B (CUBIC SPACE) POTENTIAL VACANT

VACANT SQUARE FEET = THE SUM OF ALL SHADED GRIDS

OCCUPIED SQUARE FEET = NET SQUARE FEET-VACANT SQUARE FEET

SUMMARY

### POTENTIAL VACANT SPACE

TYPE A:

THE SUM OF ALL GRIDS ANNOTATED "A"

TYPE B:

THE TOTAL CUBIC FEET, APPLIED TO WORKSHEET

BY SURVEY PERSONNEL

### CONVERT POTENTIAL VACANT SPACE TO CUBIC FEET (OFFICE PERSONNEL)

TYPE A:

MULTIPLY ALL GRIDS "A" x AVERAGE STACK HEIGHT

TO CONVERT TO CUBIC FEET

TYPE B:

TOTAL CUBIC SPACE DATA FROM WORKSHEET

TYPE A (CU FT)

TYPE B (CU FT)

TOTAL

CUBIC FEET RECOUPABLE THROUGH REWAREHOUSING

Space is reported as:

Let's see how the above information is actually recorded, then computed on survey worksheets for reporting purposes.

How To Record, Then Compute Vacant, Occupied and Potential Vacant Space During Storage Space Surveys

How is it done?

OF MALES AND AND A STANLAND OF STANLAND

- 1. Have necessary worksheets ready for survey personnel.
- 2. Instruct survey personnel to record appropriate data.

#### NOTE

Computations (except for potential space type "B") should be accomplished later by office personnel.

- 3. Information to be recorded will be applied to worksheets as follows:
- a. Record actual vacant space by shading in those areas of the storage layout that are vacant. You do *not* include short spaces in front of stacks or honeycombing as vacant space.
- b. Record type "A" vacant space by annotating the letter "A" in those grids where short spaces exist in front of stacks or where honeycombing is evident.
- c. Record type "B" vacant space by annotating the letter "B" in those grids where stacking heights could be improved by rewarehousing. (When "B" is recorded during a survey, cubic feet to be gained must also be recorded somewhere on the worksheet.)

## 2-403. DOD Storage Space Reporting Requirement

DODI 4145.5 requires DOD Components to submit a DD Form 805, Storage Space Management Report. The guidance and illustrated methods shown in this section should provide operating personnel with an understanding of how storage space is measured and computed. Application of this information will aid in overall storage space management and control and also will assist in preparation of feeder data for separate reports required by the DOD Components and for the DD Form 805 report.

#### CHAPTER 3

#### STORAGE PROCEDURES

#### Section 1. RECEIVING

	Paragraph
General	3-101
Planning and coordinating the operation	3-102
Spotting and control of carriers	3-103
Unloading operations	3-104
Checking incoming material	3-105
Receipt documents	3-106
Marking of material for storage	3-107
Moving supplies to storage	3-108

#### 3-101. General

a. Prompt and accurate processing of receipts is a prime requisite of an effective supply system. The details of receiving operations are influenced by the types of supplies to be handled, distance to the storage location, type of MHE available, and the physical characteristics of the storage installation.

b. Although the basic principles of receiving are universally applicable wherever supplies are received for storage and subsequent distribution, receipts of classified, pilferable, and sensitive items (including small arms) require special handling and controls over and above the basic receiving principles. Section 8 of this chapter delineates the controls necessary to process these type materials.

#### 3-102. Planning and Coordinating the Operation

a. The planning of receiving operations requires complete coordination among the storage activities responsible for the different phases of the operation. This is particularly true for items with a security classification. The proper evaluation of advance information prior to actual material receipt is of utmost importance to ensure that appropriate preliminary steps are taken to receive the supplies as efficiently and economically as possible. Any correspondence concerning due-in receipts should be considered in planning. Prepositioned material receipt documents, purchase orders, contract schedules, advance bills of lading or other shipping documents are types of data used to determine ap-

proximate arrival dates and type and quantity of supplies. Pertinent information on significant duein receipts must be given to personnel concerned with warehousing, transportation, preservation, packing, and inspection.

b. Planning and coordinating promote effective storage space utilization, efficient assignment of labor and equipment, and recognition of receipts requiring special handling or processing. Normally it is not recommended practice to reserve specific storage space for expected due-ins. However, through advance planning general determinations can be made on where receipts will be stored.

#### 3-103. Spotting and Control of Carriers

- a. Although current directives require that the consignee be notified prior to the shipment arrival, rail cars and trucks may arrive with little or no advance notice.
- b. Upon notification of or arrival of a shipment the carrier must be directed to the desired unloading site. This action is called spotting. Proper spotting results in—
- (1) Straight line flow so that minimum travel distances and handling actions will be necessary from the carrier to the receiving area or storage location.
- (2) Continuous flow and proper balance between labor and equipment. Lost motion and waiting time for labor and equipment must be held to a minimum.

(3) Localizing the unloading operation hence supervision is easier. Also, the use of shorter hauls may reduce requirements for MHE.

c. Truckloads or carloads of a single item or other large quantities of an item should be spotted for unloading at the warehouse where the material will be stored. This should also be done for heavy or large cube items not suitable for handling in a central receiving area. Some carrier tariff provisions provide for multiple deliveries at the receiving installation. Such a provision should be used when practical to position material near the final storage location.

d. Carloads or truckloads of mixed material, containers with more than one line item, parcel post itmes, returns from local shop facilities and using organization can normally be spotted and processed more efficiently through a central receiving activity.

e. Unloading operations to release the carrier must be closely monitored as there are specific periods for carrier holding without a penalty charge. These periods are called free time. If the carrier is retained beyond the authorized free time, time in excess is subject to demurrage or detention charges.

(1) Rail car demurrage charges are assessed for the detention of freight cars on the basis of a specified amount per car-day. Shippers or consignees who detain cars for loading, unloading, or furnishing orders to the carriers beyond the free time allowed by carrier tariffs are required to pay the lawfully published charge. Specific questions related to rail car demurrage should be referred to the installation transportation officer to ensure that current charges and rules are considered.

(2) Truck detention rules and penalty charges vary with individual trucking concerns and locations. Specific questions must be referred to the carrier freight traffic office.

#### 3-104. Unloading Operations

a. Each unloading operation requires planning and on-the-spot supervision. The unloading of supplies should be compatible with procedures involved in tally-in and inspection of the receipt. In general, the mechanics of unloading supplies will vary according to the type of carrier, type and weight of supplies, type of unloading facility, and MHE available.

b. The general unloading sequence described be-

low is applicable to supplies received by rail car or motor truck.

(1) Before a sealed rail car or truck is opened, the seal must be checked for condition and serial number. If the seal is broken or missing, or if in the case of exclusive use of van shipments and rail car shipments the serial numbers do not agree, an annotation should be made on the documentation and in the case of sensitive cargo, the transportation office and security office notified prior to unloading.

(2) Rail car doors are opened by a device similar to that illustrated in chapter IV, section 2. Federal safety regulations specifically prohibit the use of forklift trucks to open rail car doors even when the doors are equipped with "pockets" to provide for this type of operation. Truck doors are opened manually by the truck driver. Doors must always be opened so that personnel are protected against falling containers or items.

(3) A preliminary inspection should be made when the carrier's equipment is opened. If there is obvious evidence of shortage or damage, the unloading operation should be suspended, if practical, pending inspection by the carrier's representative.

(4) The method of entry into the carrier for unloading depends upon the type of carrier, type of material received and the physical characteristics of the receiving area. If unloading is to be accomplished at a dock level warehouse platform, a bridge plate or some type of mechanical or hydraulic dock leveler may be used to permit entry of unloading equipment into the carrier. Extensive conveyors may also be used at dock level warehouse platforms. If the warehouse platform is at ground level, a portable platform may be used to aid in unloading by forklift truck. Also, a portable ramp may be used to allow entry of a forklift truck into the carrier.

(5) Supplies which will move to the storage location either directly from the carrier or from the receiving area should be palletized, while in the carrier or as the receipt is offloaded from the carrier to the extent practicable.

a. In placing containers on pallets within the carrier, the aim must be toward maximum palletization (or unitization) so that the unloading operation can be accomplished as rapidly and efficiently as possible. During this stage of the operation the supervisor should make certain that the appropriate pallet pattern is used. (See pallet pattern selection table (table 3–1) and pattern outline table (table 3–2)).

b. The pattern should be reversed on successive layers so that containers will interlock and be tied together. Protection of personnel, consideration of container strength, the size of the door opening, and capacity of equipment affect the size of the pallet load.

c. Palletized containers should be positioned so that the identification markings are visible at the outer rows of the pallet load. Proper palletization upon receipt permits warehousing with a minimum

of delay.

- (6) A forklift truck must have a limited collapsed mast height to enter a conveyance to remove the supplies. Generally, a forklift truck with a capacity of 2,000 or 4,000 pounds and a collapsed mast height of 83 inches or less can be used for unloading rail cars, trucks or intermodal containers. However, the floor strength of carrier equipment must be checked to assure that the floor can support the equipment and load. Forklift trucks should not be used in semi-vans unless the tractor is in place or suitable jacks are in place to prevent the van from upending. Because of size limitations, a 4,000-pound forklift truck with a collapsed mast height of 91 inches is the largest that can normally be used for direct rail car unloading, and a 4,000-pound forklift truck with a collapsed mast height of 83 inches is the largest that can be used for direct motor truck unloading.
- (7) Intermodal containers on chassis, rail cars or on the ground can be offloaded with the same MHE used to unload material from trucks. In general, containers are removed from rail cars before contents are removed.
- (8) Figures 3-1, 3-2, and 3-3 depict various workable methods of unloading and movement of supplies.

#### 3-105. Checking Incoming Material

a. Tallying incoming material. Accurate checking for number of containers and apparent damage to material is a basic receiving action. Material should be tallied concurrently with the unloading operation (see para 3–104). The inbound receipt document is generally used as the tally record. When not available, a blank copy of the receipt document normally used may be used to record and tally. When a blank copy is used for record and tally purposes, all available information pertaining to the receipt will be inserted in the appropriate portions of the form. The tally count may be made by lining

through the numbers around the border of the inbound document and circling the number of missing packages; or it may be accomplished by the stroke tally method or by recording of container quantities using the reverse side of the document as a work sheet. The quantity of supplies actually unloaded and accounted for must be reported as received. In many instances, full truck and freight car shipments of items packed in uniform quantities may be checked by the pallet load as they are removed from the conveyance. This method of checking is particularly advantageous for all unloading operations where the unit load method has been used by the shipping activity.

b. Inspecting supplies.

- (1) Once unloading has begun, damaged containers should be set aside for examination by technically qualified personnel. In addition to these inspections, a Packaging Improvement Report (DD Form 6) should be made for supplies that have been improperly preserved, packed or marked as defined in AR 700-58/NAVSUPINST 4030.29/AFR 71-13/ MCO P4030.29A/DSAR 4145.8 Discrepancy in Shipment Confirmation (DISCON) (SF-363) and/or Discrepancy in Shipment Report (short title DISREP), (SF-361) will be prepared to report over, short, astray, damaged freight or other type transportation discrepancies as defined in AR 55-38/NAV-SUPINST 4610.33B/AFR 75-18/MCO P4610.19C/ DSAR 4500.15 (RCS MTMC-54 (R1)). Photographs are extremely valuable and should be used when details of the discrepancy cannot be adequately explained or can be more fully supported by such documentation. Additional inspection will be performed at the discretion of the Service/Agency concerned.
- (2) The inspection-at-destination directives of the military services dictate whether a complete or a sample inspection is required.
- (3) If point of acceptance is at source, exterior containers except for classified items and small arms need not be opened unless there is evidence of tampering, damage during transit, or other indications that warrant such action. Classified items and small arms will require a 100 percent verification of quantity received by opening containers and physically viewing container contents (see sec. 8 of this chap.). Similarly, sealed inner containers need not be opened unless there is justifiable reason.
- (4) Repackaging and marking of receipts may be necessary if received in damaged containers or

Table 3–1. Pallet pattern selection table (40  $\times$  48 inch pallet)

#### INCHES IN LENGTH

	6	64	7	73	8	0)	9	91	10	105	11	119	76	125	13	139	16	14	15	15	16	164	17	179	18	164	19	194	àc.	20t	21	1.
6	155	755	ПВ	115	115	115	71	71	m	150		65	65	60	106	106	46	45	45	62	100	100	100	78	76	78	78	711	20	10	76	-
4		757	181	67	67	67	24	61	61	120	65	65	38	63	63	60	60	62	65	98	58	58	90	67	67	19	19	119	47	95	42	
7			117	66	113	113	24 64	64	110	74	49	. 49	69	105	75	75	73	75	39	99	99	99	99	19	19	19	19	42	40	42	48	F
0					113	113	64	64	83	76	85 25	25	97	57	57	73	73	73			27	27	87	77	77	77	72	72	72	72	72	+
04						ш	76	76	109	175	25	23	55	55	55	44	64	27	27	27	97 97	27 27	98	77	77	78	72	72	72	30	30	d
9									108	108	40	27	87	21	80	18	18	19	15	19	15	14	90	18	72	30	30	30	30	30	30	1
95									108	108	48	21	80	20	80	18	18	14	14	14	14	14	97	-	1-0	-	26	26	26	26	86	<del> </del> -
10										106	87	21	80	30	17	17	17	14	16	14	14	14	97			26	26	26	26	26	26	4.
10)											104	104	104	104	104	17	16	29	29	15	12	97	97	26	26	26	26	26	24	56		+
11											1		100				28	88	59	п	п	9	9	86	27	26	26	8	0	8	102	T
113	-				_										26	26	88	88	ш	п	9	9	9	26	8	8	8	0	8	105	105	Ī
123	-								_	_		_			28	98	58	13	п	п	9	9	9	8	8	8	0	7	7	105	105	I
13										-	-	-			13	103	103	п	11	9	9	9	9	8	7	7	7	7	102	105	716	1
13)											1	-		3.1	43	203	103	-	37	37	37	96	96	7	7	7	7	7	102	105	105	1
16.						7												37	37	91	91	91	91	7	1	7	7	5	3	,	5	+
165																						•		-		-				-	-	1
15																																t
155	_		7.6					- 05			1							5 - 1						196						١	١	ŀ
16	-							_	-	_		_																	A	99	95	
17	-					-	-			-	-	_				_									•	١	,	95	95	99	95	
175						-			-	-	-	-	-		-	-		-	-		-			-	•	95	95	95	95	93	95	L
10							-			$\dashv$	-	-	-			-		-	-		-	-	-	-	-	-			-	-	_	1
18}																		-		-	-	-		-	-	-		-			_	H
19																					-			-						-	-	H
19}																															- 19	1
80	-	_		_															-		3											
12	-	-	. 1		- 1	. 1	1	_ 1	- 1		- 1		. 1	1	- 1	- 1	1		1	- 1												
214	-											US	E C	F	TAT	H.TE											_					L
55	1																										-	_		_	- 1	-
554	7																										-	-	-	-		-
23				1		Do	+ 0	mm i				h.															-	-	$\dashv$			-
235				_	•	De	Le.	LIILI	ne	W.	Lat	n	anc	T	eng	gtn	0	I C	on	tai	Lne	r	to				-					H
69	_					ne	ar	est	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	11	ıcn																-	- 4				-
54	-	_		_		_				u s																						
25)	-	-		2		Lo	ca	te	th	e ]	Len	gtl	n c	f	cor	ıta	in	er	at	th	10	to	p,									
26	-+	-				an	d	wid	lth	at	, 1	ef'	t s	id	e	of	in	dex	C	har	rt,	t	he									
200	+	$\dashv$				CO	nta	air	er	pa	att	em	n n	um	ber	· W	il:	l b	e :	for	ind	a	t				-	-		_	10	L
26 } THUO 36						th	e :	int	er	sec	eti	on	of	t	WO	co	lu	ms									B					
364																			. (								-	-	-		-	-
35				3		Ti	e ·	loa	.d	bv	re	Ve	rei	nø	ns	++	em	f	'n	0	ch	+ -	ier				+	-	-	-	-	-
351	1				1				-	J		, 0,		5	Pe		011		01	90	.011	٠.	T-G-T	•			-		-			
36	1			1.		U-	4 ~1	4	ma = -	. 1				21			2			.,		· · · · · · · · · · · · · · · · · · ·										
36)	-	-		4	•	пө	TRI	16	ma;	y	9	sul	JBC	TU	ute	a	10	W	Ja.	th	wh	en	th	e								
371	+	-				CO	nta	ain	er	8 8	re	0.	S	uf.	110	cie	nt	st	re	ngt	h	to	wi	th.	-							
38						st	and	d s	up	eri	mp	ose	ed	10	ads	3,	and	l W	he:	re	su	ch					-	_	_	_	- 19	
304	$\dashv$					pl	ace	eme	nt	wi	11	Ca	aus	e 1	10	ad	ve	rse	e:	ffe	ect	i	n t	he			-	-	-	-	_	_
19						sh	ipr	nen	t	or	st	ora	age	0	f t	he	ma	ate	ri	el.						. 1	+	-		-	-	_
19-1							-			_	_	-	0				-110									Preside	+	-		-		H
0							1604	2	· 3																	To the	+	+	-	-	0.97	-
-	T							T		T		1	1	1	1	1	1	1	1	1	+	1	1	+	1	1	-	+	-	-	-	-
어	7 O N 1			188	4	130	T	T		1				-	-		-	-	-	-	-	-	-+		-	-	_			_	-	-
4	-	-	-	-	-	_	-					_	12.										-		. 1						- 1	1
14	$\pm$	1	$\downarrow$	1			$\exists$		$\pm$						$\exists$	1					+	+	+	+	+	+	+	-			-	-
1	#																							-	+	-						

Table 3-1.—Continued

#### INCHES IN LENGTH


	22	223	23	234		24	25	251		264	27	8/19	28	201	29	294	30	30)	31	nj	32	324	33	33)	34	344	35	351	36	36}	37	T
•	43	43	56	36	56	56	34	34	34	- AL	87	81	1			10	10	10	70	70	70	70	70	70	70	55	55	55	33	55	55	-
61	56	56	56	56	34	34	34	34	34			10	10	10	10	10	10		80	80	80	60	55	55	55	55	55	55	55	55	69	t
7	17	43	33	33	33	93	93	93	93	10	10	10	10	10	10	80	80	80	80		54	34	54	54	54	94	54	54	34	69	69	t
73	40		1		10	10	10	10	10	10	10	10	10	57											68	68	68	68	68	68	68	t
8	40	10	10	10	10	10	10	10	10	10	10			700											68	68	68	68	68	50	50	+
8	10	10	10	10	10	10	10	10	10								68	23	23	23	53	23	23	23	23	83	50	50	50	50	50	t
9		36	36	36	36	36	36	92	92		Year.												35	35	53						-	╀
91	. 36	36	36	36	92	92	92	92	92					N.		-		-		35	35	35	35	53								+
10	36	36	36	92	92	92	92	92	92			975		CON TO	-		35	35	35	35	35	53	53	-73					-		-	+
104	92	92	92	92	92	92	92	92	92					35	35	35			35	- 37	37	"	73						П	п	31	+
11											35	35	35	35	35	35	35	35	37						31	31	n	п	n	37	37	1
Li.				2 1				-	35	35	-	-	-	-	-	33	35															1
13						-		35	35	-	35	35	35	35	35		May 1			79				IIA I								1
12)				-	35	35	35	-	-	35	35	35	35				79	79	79					-							1	L
13			74	30	-	-	-	35	35	35	35			79	79	79	79	79								1800			8	2	8	L
-	32	22	35	35	35	35	35	35	35			79	79	79	19	79	79								6 4	5	2	2	8	8		L
135	-	32	32	32	32	32	32	91	91				T. Com										8	8	2	8	5	8	8	•	2	
14	32	32	32	32	32	91	91	91	91											1.1.4.	8	5	3	2	8	8	5	6	5	2	2	T
164			100				3	3	3			114		Sen i		. 0			1		April 1	1			-	15						Γ
19					3	3	3	3	. 3													1		W 0 1/2								T
15)		1	)	3	3	3	3	3	3						33.0			1	143							No.						T
16		3	3	3	3	3	3	3	3		1					h. 1						×				The same		7	300			T
16}	3	3	3	3	3	3	3	3	3							2.7	1111							13.7					94	94	94	t
7	3	3	3	)	3	3	3	3							. 18									1			94	94	94	94	94	+
17}	47 6				18 18			90	90									200		2.9			-		1				1			+
18							6	90	90															1	1							+
84			W. Isl	1800		6	90	90	90									-				1	1	1		-				-		1
19				6	6	90	90	90	90											1	1	1	1			-	-	-		1000		1
24			6	90	90	90	90	90	90		-							1	1	1	1	1	-									+
20	7.1	6	6	90	90	90	90	90	90	-					-	-	1	1	1	1	1	-	-		-				100	-		+
10	6	6	90	90	90	90	90	90	90		-		-		,	,		-	-		1								-			1
21	6	90	90	90	90	90	90	90	90	415	-	7		1	1	1	1	1	1	1			-		_			96.5				1
21)					4		~	,,,	,0		-	-	-		-	1		1	1									113				1
22	-	-						-					1	4	1	1	1	1								949	-	-				L
-	-		014	-			-							-														18-/19				1
55.	-	-	1		-				-		-																					L
23	-	-			- 9										.09												N.	1				1
135	_								1.00	-						-				100												1
4	_																															Γ
44				188																								1618		89	89	Γ
5.					1 7																							-0/9	89	89	89	T
53			777					1811		199	2			(2)							100					Miles	89	. 89	89	89	89	T
6										66								70.0					1	777		89	89	89	89	89	89	1
10 H			1		1 3																											-
i l					-	1	100	1 3																-				- 7 5		1	14.4	1
44			1	1															1					-								+
5			-							-	-		-		-	-		-			-	-					-		-			+
51		-								-	-							11							-		_				-	1
6	1		-					160			-	-					-	-	-	-		-						100			-	1
6)	-	-					-			-	-	100			-		-		-		_	-				-		A. P.				1
7	-		-			-	-			-	-							-		- 3		902										1
73		-												1000			-	44														L
6		_					100				-												100	11.5%	13						1	1
	-										1			118 -		-		1		13 4												Γ
84			1.		110					1	1		1	1919				1	-			1										Γ
9																100		100								150		1975.32			33/4	T
-												100								1											100	T
								Est									-			7		1									7	1
0	0. 1	-	9507							1																7	-				-	+
0	1		Contract of the last		-	-	-	The Later of the L	-	-	-		-				-	-	-		-		000	1000	MALL OF			unitable b	200		1	+
9) 0 0) 1		-									-			- 1				1										1000		10000	100	
o oj									-	-	-	-	-			-	-	-														+
0																																+
o oj L																																-

Table 3-1.—Continued

#### INCHES IN LENGTH

						·	,					CHI	-	TM	THE	TAG	TU					1				· ·			
	318	344	39	199	40	404	41	415	42	429	43	434	44	44.5	45	458	40	403	67	474	48	44	49	494	50	904	91	916	91
6	124	124	124	124	124	52	50	152	25	25	52	123	123	153	123	123	123	123	153	123	123	12)	183	123	123	123	123	123	16
64	ú9	69	69	51	51	51	31	51	51	51	31						(48)	(NS	681	BB	6/3	88	69	FIB.	M	80	69	86	1
-7	69	51	51	51	- 51	51	51	51	51	51	51	BH)	вн	118	88	65/3	elei	683	68	na	88	68	60	AH.	-88	6/1	643	66	1
79	50	50	50	50	50	50	50	50	50	50	50										61	81	87	87	BI	87	01	87	
В	50	50	50	50	50	50	50	50	50	50	50				81	w	87	67	81	87	87	87	87	81	87	87	87	87	
84	50	50	50	50	50	50	50	50	50	50	50	81	87	87	87	81	81	87	87	87	87	87	87	87	87	07	87	67	
9					31	31	u	n	и	31	31														86	86	86	86	
99	31	31	u	и	77	31	31	11	31	31	107									116	06	86	86	86	86	86	86	86	
10	31	31	U	31	a	11	31	31	ш	107	107				86	86	tu,	A6	06	86	86	06	86	86	16	86	86	86	1
10	31	п	31	31	n	31	31	31			86	86	86	86	86	06	86	86	86	86	116	86	86	86	86	86	86	86	t
ш							2	101	101	101	101				9 3										- 10				t
114			5	5	2	5	101	101	101	101	101		,						-		-						-		t
15	2	5	2.	2	2	101	101	101	101	101	.101								-			-	-		05	89	85	05	_
124	5	2	5	2	101	101	101	101	101	101	101										65	R5	85	05	. 85	85	85	05	-
13	5	. 2	101	101	101	101	101	101	101	101	101		-			775	05	85	85	85	85	85	85	85	65	05	85	85	+
135	2					-		-				-	De	De.	Oe.	00	-	-	-	-	-	-	-	-			-		+
14	2				-	-	-		-		-1	0.	85	85	85	85	A5	85	85	A5	05	65	85	85	85	89	85	85	1
-			-		-	-	-	-			94	85	85	85	85	85	115	85	85	85	85	85	85	85	85	85	89	89	1
144	- 17	-		-			94	94	94	94	94	-		-	-	-	1	-	-			- 1		100					1
15				-	94	94	94	94	94	94	94		-	-	-	-	5 (3)			-				TEAH!	-			100	1
15)		94	94	94	94	94	94	94	94	94	94	-				-								PIG	200	9			1
16	94	94	94	94	94	94	94	94	94	94	94					1						1.8		1		1			L
164	94	94	94	94	94	94	94	94	94	94	94																		1
17	94	94	94	94	94	94	94	94	94	94	94																		Ι
174							0 100																				84	84	Γ
18																				2		100			86	es.	84	84	T
184																100				1.5	-	84	84	84	84	84	84	84	t
19										18	1									84	84	84	84	84	84	84	84	84	t
196		W 1975									10						84	84	84	84	84	84	84	84	84	84	84	84	t
80								-							84	84	84	84	84	84	84	84	84	84	84	84	84	BA	۰
204	1									100			84	84	84	04	84	.84	84	Bh	84	84	84	Bh	84	84	84	84	t
57									-		84	84	84	84	Bh	84	84	84	84	84	Bh	84	84	84	84	84	84	84	+
RI						7,00	-		89	89	84	Bla	84	84	84	84	84	Bh	84	Bh	84	BA	84	84	84	84	84	84	t
22		-		-	-	-	89	89	89	89	0)								-	-		-	-	-		-	-		H
-	-			-	-	-	-	-	-	-	-	-								-	-	-		1					H
654		-			89	89	89	09	89	89	89				-					-		_	-						Ł
23			89	89	89	89	09	89	89	89	89																		L
234	89	89	89	89	89	89	19	09	89	89	A9													1					L
2k	8)	89	89	09	89	89	89	09	89	89	89	1																	L
364	89	89	89	89	89	89	09	89	69	89	89																	1	
25	89	89	89	89	89	89	09	89	89	89	89																		
259	B9	Rg	89	89	89	89	89	89	89	89	89																		Γ
26	89	89	89	89	89	89	89	89	89	89	89																		Γ
264 IRU 34							1000						1									1							
344			303			133							M. I							1									t
39																											83	83	t
354			5000	1						7	1					35								100		83	83	83	t
36							1000	-														13			83	83	83	63	t
36)								1			-											26		83	83	83	83	83	t
37						-		-										100		-		83	83	83	83	83	63	83	H
-					-						-			-		-	-	-		-	00	-	_	-		_	-	-	-
371		-		-		-	-	-	-			-				-			-	-	83	83	83	83	83	83	83	83	
38	- 100			-			-		-			-			-			-	83	83	83	83	63	83	83	83	63	83	-
184				-		-		-		8	9							83	83	83	83	63	83	63	83	83	83	83	+
-		100	1000														83	83	83	83	83	83	83	83	83	83	83	83	+
39		123					2		1				100			83	83	83	63	83	83	63	83	63	83	83	63	83	
39 394			00000												83	63	83	83	83	83	83	83	83	83	83	83	83	83	Γ
39 394			111111			-	-						83	83	.83	83	83	83	83	83	83	83	83	_	63	4.	83	83	Γ
39 394 40										9.61 43												03 1	03	83	03 1	83	63 1		400
39 394 10 104										9 8		83	-	-	83	83	83	83	83	63	-	-	-	_	-	_	_	-	Т
39 394 40 404											61	-	83	63	83	83	83	83	83	63	83	83	83	83	83	83	83	83	-
39 394 40 404 41										93	63	83	83	63 83	83	83	83	83	83	83	83	83	83 83	83	83 83	63 63	83	83	
39 39½ 40 40½									83	83	63 63 63	-	83	63	-	-	-	-	-	-	83	83	83	83	83	83	83	83	-

INCHES IN WIDTH

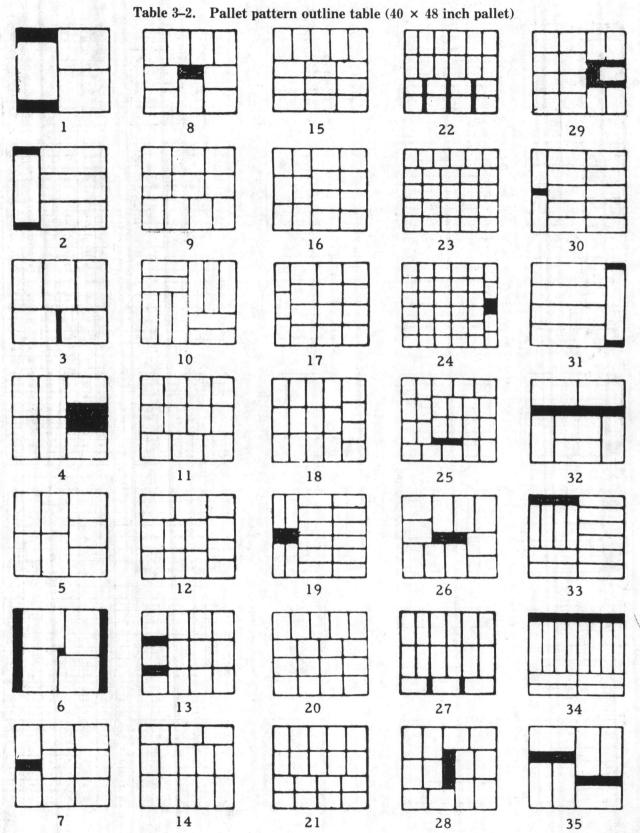

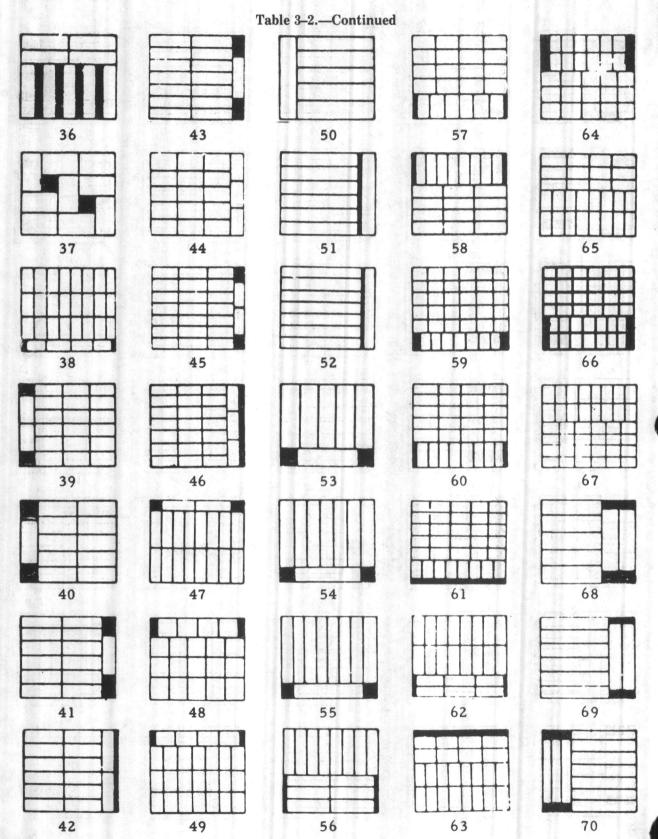


Table 3-2.—Continued


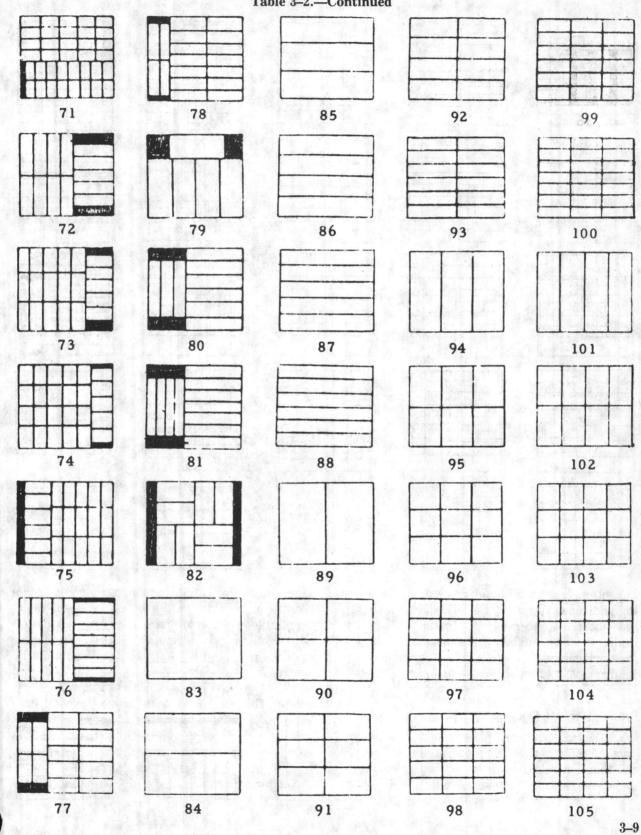


Table 3-2.—Continued

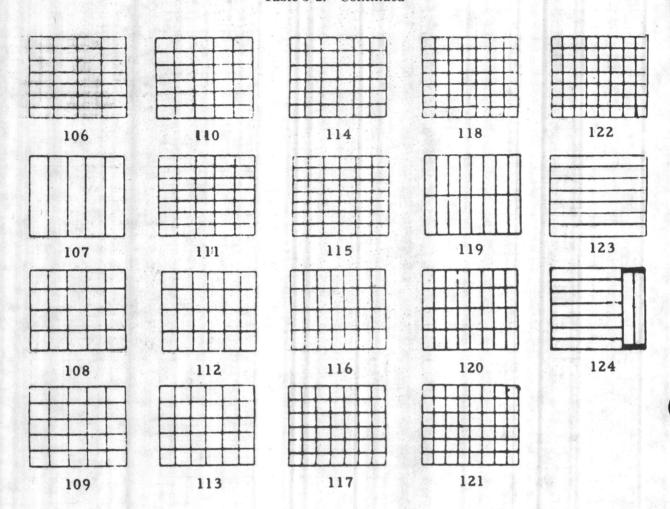

in containers unsuitable for proper storage. Opening and repacking may also be required if there is any question concerning the contents of the container. When containers of radioactive materials are damaged in shipment, subsequent actions must be directed by a qualified Radiological Protection Officer.

#### 3-106. Receipt Documents

a. Control. The control of receipt documents is basic to effective receiving operations. It is essential that controls provide appropriate measures to avoid confusion in document handling and also pro-

vide timely status information. Such controls can be established through the use of document registers, a file of document suspense copies, or by use of microfilming techniques. Manual or computer methods may be used to develop and maintain the control system. A daily review of file make-up will be made to assess delays in the processing of receipts. The control system may be expanded to serve as a proof of storage tool or as a base for quality control samples on receipt actions. The specific type and extent of control will be determined by the appropriate service or agency.

b. Processing. The flow of documents in the re-

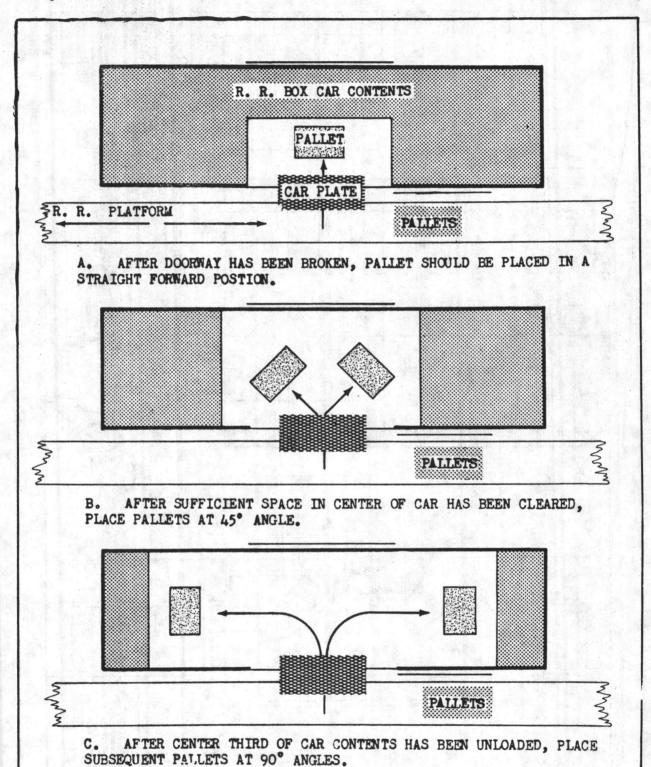


Figure 3-1. Unloading and movement to storage using forklift truck.

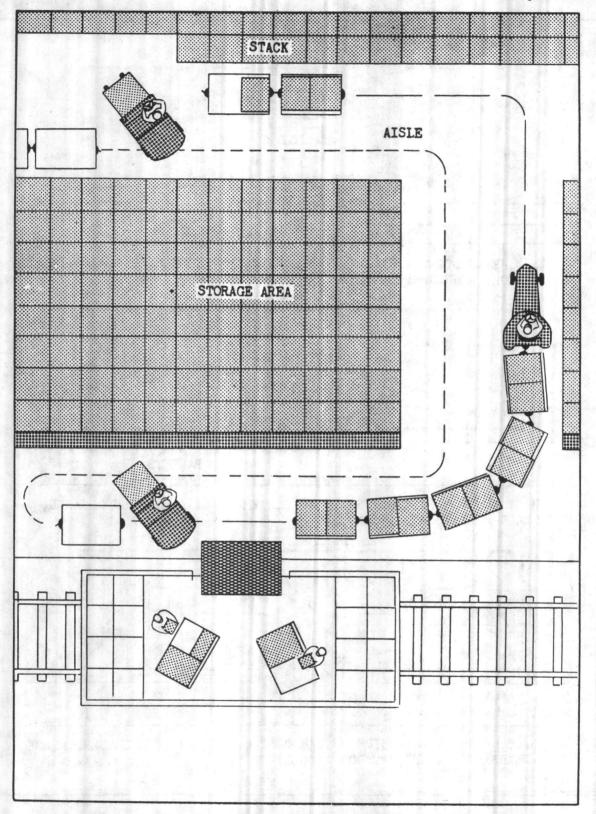


Figure 3-2. Unloading and movement to storage using tractor-trailer train.

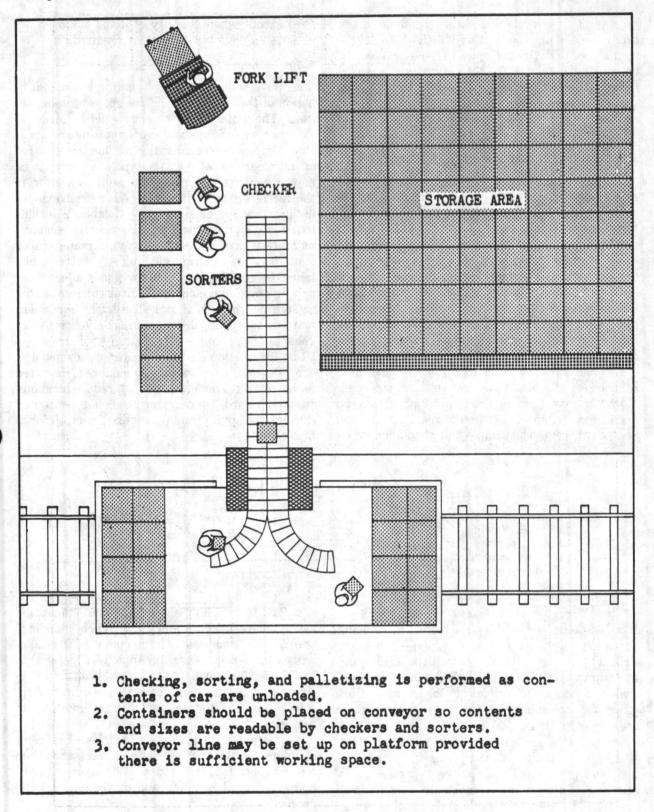


Figure 3-3. Unloading and movement to storage-mixed car lots.

ceipt processing cycle will vary depending on the type of receipt and the location of activities involved in the receipt actions. Copies of the document or information extracted from the documents are used for inquiries to the locator file and for updating the various accounting records associated with material receipts.

#### 3-107. Marketing of Material for Storage

- a. Material properly marked prior to movement to storage will result in more accurate stock accounting, more accurate issues, and easier inventory actions.
- b. All material or its container (excluding small items of retail stock) must be marked clearly with the stock number, nomenclature, quantity and unit of issue. Material which deteriorates in storage (subsistence, batteries, film, etc.) requires date marking to aid in first in–first out issue. Any markings on containers not applicable to the present material will be obliterated.
- c. Small items of retail stock may be identified by marking the bin or shelf where item is stored. However, one item in each bin or shelf may be marked as a sample to assure positive identification of stock therein. The sample unit should not be is-

sued except when quantity of items has been depleted to a point where issue is required.

#### 3-108. Moving Supplies to Storage

- a. Movement of supplies to storage is a continuation of the unloading and receipt processing actions. The material movement should be made by the most expeditious and economical means available. Matters for consideration include the selection of equipment to be used, the type of supplies to be moved, and the distance of the storage area from the carrier or receiving area. Where conveyor or in-floor tow systems are not available, a forklift truck is generally used for short distance movements (less than 400 feet each way); a tractor-trailer train (possibly electronically guided) for larger distances (over 400 feet); or automotive equipment for certain conditions such as difficult terrain or excessive weight of material. The latter equipment may be radio controlled intra-installation transport vehicles. See chapter III, section 3, of this regulation for location control of material movement.
- b. Repacking operations should be integrated with overall movement actions to reduce handling. In other words, the material should be routed through the appropriate processing actions prior to final storage.

#### Section 2. SHIPPING

	Paragraph
General	3-201
Shipment planning	3-202
Freight planning	3-203
Documentation	3-204
Shipment preparation	3-205
Loading	3-206

#### 3-201. General

a. This section provides guidelines in shipping operations as they pertain to storage functions. Primarily the guidelines deal with selection and movement of material through the supply operations and subsequent delivery to the transportation officer for outloading. Specific shipping instructions are found in DOD 4500.32–R (Military Standard Transportation and Movement Procedures (MIL-STAMP)). In addition to the provisions of this section, the procedures and controls, prescribed in section 8 of this chapter, will be applied to shipments of classified, pilferable and sensitive items, including small arms.

- b. The term "shipping" in its broad application covers many functions and tasks. When "shipping" is related to wholesale storage operation it encompasses the actions necessary to deliver material to the carrier for movement to a consignee. Its effectiveness depends upon accurate recording of receipts, proper storage, and correct marking of material.
- c. The application of the principles of efficient shipping practices can alleviate unnecessary strain on transport facilities and provide more efficient and economical handling and movement of DOD cargo.
  - d. The shipping operation involves different or-

ganizational elements. This section does not imply that functions mentioned will be performed by a particular element within the installation.

e. The provisions of this section do not apply to shipments of ammunition and other dangerous articles. Directions for the preparation and shipment of such items are contained in directives issued by the military services.

#### 3-202. Shipment Planning

a. Planning for shipping operations actually begins long before receipt of a document authorizing issue. The receipt, location, and storage of supplies should be planned in a manner to expedite and simplify subsequent stock selection and preparation for shipment.

b. Planning for a specific supply movement begins upon receipt of information regarding items to be shipped to a particular destination. Proper consideration of the factors shown below will determine when and where to spot carrier equipment, when and where to use special equipment, and the most efficient way to assemble the material for shipment.

(1) Quantity, weight, and cube of material to be shipped.

(2) Requirements for security, packing, shipment marking, intra-installation material movement, personnel, and materials handling equipment.

(3) Mode(s) of transport to consignee.

(4) Date required for release to transportation.

#### 3-203. Freight Planning

a. Freight planning is the process of determining the number of transportation units (truckload, less than truckload, or carload and less than carload, and container) needed to move a given shipment. This is accomplished by determining the weight and (if possible) the cube of the line items shown on the shipping documents and ascertaining the mode of transportation. Transportation equipment of adequate capacities should then be obtained. Supplies and material should be assembled and shipped in intermodal containers, carload or truckload lots whenever practicable, in order to reduce the transit costs and conserve transportation equipment.

b. All shipments, regardless of weight, should be referred to the transportation officer at the originating installation. While route orders may be requested and obtained on all shipments, generally a 10,000-pound minimum (subject to specific exemption by the individual services) is observed. A

route order will specify the mode of transportation and routing. If a domestic shipment is involved, the route order will be valid for a time frame as designated in the Military Traffic Management Regulation (AR 55–355, NAVSUPINST 4600.70; AFM 75–2, MCO P4600.14A, DSAR 4500.3); if an oversea shipment is involved, the order will specify a date for arrival at port.

c. It is the responsibility of the storage office to furnish the transportation office with all necessary information for obtaining routings.

#### 3-204. Documentation

- a. Efficient handling of supplies being readied for shipment requires the preparation of documentation in time to accompany shipment. The system for control of outbound shipments varies with the services and is therefore not covered in detail here.
- b. An overriding factor, regardless of shipping service, is the fact that all shipments must be properly documented to eliminate delay, damage, or loss. Unless properly documented there can be delays in loading, turn-around time of equipment; time to reach destination; or material loss due to misdirected shipments.

#### 3-205. Shipment Preparation

- a. Whenever a shipment is to be made, the supplies should immediately be properly packed, documented, marked, inspected and assembled in a convenient area so that no time will be lost in carrier loading. Equipment should not be ordered from the carrier before it is known that supplies will be ready for loading.
- b. Generally, supplies are moved to an assembly area or shipped direct from the storage area. The latter method permits expeditious loading with elimination of the in-between step of consolidation at a preassigned area.
- c. Supplies requiring preservation, packing, marking or other processing should be moved to and from these functional areas via mechanized transport facilities when possible. Mechanized transport includes use of powered conveyors, intrainstallation transport facilities designed especially for this task, and electronically controlled tractor trailer trucks. The key is minimal or zero manual handling, cross hauling and double handling. Intra-installation transport conveyances should be radio controlled and operate on appropriate sched-

DOD 4145.19-R-1 15 September 1979

ules to prevent backlog and bottlenecks at material transfer points.

- d. After the load has been prepared for shipment (or before if possible), the transportation office should be requested to order equipment from the carrier. The request should include precise information for spotting of equipment and any special requirements such as the need for double door freight cars, refrigerated trucks, etc.
  - e. When supplies must come from different ware-

houses or storage locations, the carrier equipment may be spotted accordingly, rather than being held at a single loading point. Effective spotting will ensure loading within the prescribed free time limits and maintain a balanced operation by effective use of material handling equipment and personnel.

#### 3-206. Loading

Section 9 of this chapter provides procedures and techniques for loading carriers.

#### Section 3. STOCK LOCATION

	Paragraph
General	3-301
Policy	3-302
Design of a stock location system	
Location site identification	
Maintaining the location system	3-305
Special requirements	3-306

#### 3-301. General

Stock location systems must pinpoint an exact storage location in a simple, easily understood manner. This is necessary to minimize training requirements, to assist in timely and accurate storage or selection of stock, and to provide a base for optimum utilization of storage space. This section prescribes the basic requirements of a location system.

#### 3-302. Policy

- a. Each military service/agency will establish a uniform stock location system to be used by subordinate supply and storage activities. These systems will provide a centralized stock locator file to the maximum extent practicable. Stock location systems will make optimum use of mechanized processing equipment, communications systems, and automatic data processing (ADP) equipment. Ammunition stock locations systems including planographs, storage site data records, and identifications, locator and inventory records and procedures will be established as prescribed by the responsible military services commands.
- b. Planning for storage locations for classified, sensitive, and/or pilferable items will include coordination with the Security Officer/Provost Marshal to ensure that the security guidance provided in chapter III, section 8 is implemented.

#### 3-303. Design of a Stock Location System

a. Planograph. A planograph is a drawing of the

actual layout of a storage structure or outside storage area. The planograph portrays the manner in which the gross space within the storage structure or outside storage area is subdivided. These subdivisions can be for such functions or uses as storage areas, shipping and receiving areas, main aisles, working aisles, locker or restrooms, and offices. The chief of the storage activity is responsible for the preparation and use of planographs. Planograph layouts are subject to approval of the individual designated by the pertinent commodity and capacity factors established in chapter II, section 2. Planographs for ammunition igloos will be developed as prescribed by the responsible military service. The warehouse planograph will be located in a prominent or focal point of activity in each warehouse, shed or other storage area of comparable size. It should be mounted on a wood back and covered with a clear, acetate overlay. Space vacancy information may be incorporated on this overlay by use of a grease pencil which will enable easy revision as required. Maintenance of planographs is at the discretion of each DOD component.

- b. Perimeter lines. The lines drawn around the outer side of any space subdivision on a planograph are called perimeter lines. The term describes the outer boundary of any storage area.
- (1) The area shown on general purpose warehouse planographs for bulk storage will be divided into equal 52-inch segments in width and length directions. These segments will be subsequently

15 September 1979 DOD 4145.19-R-1

referred to as "grids." This concept is based on use of the general purpose pallet, 40 inches long and 48 inches wide plus 4 inches for material overhang and handling space. These grids are used to denote locations and the position of pallets along working aisles. The depth of pallet storage can be shown on the planograph by broken lines (figs. 3–4 and 3–5). If the perimeter line along any side of the storage area is not equally divisible by 52 inches, the marginal difference should be prorated to increase each grid proprotionately.

(2) The details of drawing perimeter and intersecting lines on the planograph for large lot and medium lot bulk storage are the same (figs. 3–4 and 3–5). Large and medium lot terms are explained in

chapter 1, section 2.

(3) Use of perimeter and intersecting lines in establishing grid patterns for small lot bulk storage is shown in section 2 of figure 3–6. The term "small

lot" is explained in chapter 1, section 2.

(4) For storage areas with bin, shelving, and pallet rack storage aids, the dimensions of the storage aids will govern the planograph grid layout. In these areas the 52-inch grid pattern will be disregarded. Section 1 of figure 3–6 is an example bin or shelving layout. Figure 3–7 is an example pallet rack type storage layout.

(5) Perimeter and intersecting lines for shed, transitory shelter, standard magazine, and open storage areas are shown on the planograph in the same manner as prescribed for general purpose

warehouses.

c. Identification of grids.

(1) Identification of individual grids will begin at the bottom left side of the planograph and continue in sequence to the top. This procedure will be repeated for each row of grids moving in sequence from the left to the right side of the planograph (figs. 3-4 and 3-5). Sequence of left to right identity may begin anew for each section, bay, etc., if desired. The sequence of planograph identity for these length and width grids will be consistent for all installation storage areas regardless of the number of area subdivisions. These grid identities then become part of the location description pattern (d below) used for locating material. Generally, a specific grid will be situated in the same relative position within similar storage structures or within open storage areas. This minimizes the need for personnel to reorient themselves when moving from one storage area to another. Once the grid identities have been determined, it is unnecessary to show on the planograph those grids not being used for material storage except aisles in bulk storage areas ((2) below). The planograph should show the grid identities required to locate stocks. Unused grids will remain available for floor plan changes as necessary.

(2) In order to provide flexibility for stock increases which require layout changes, grid identities will be provided for aisle space surface areas on bulk storage area planographs. Thus, grids required for locations in the new layout will be readily available in proper sequence without disturbing the marking of grids previously established (figs. 3–4 and 3–5).

d. Location description pattern. Each material location in storage must have a description pattern which will permit immediate recognition of the specific site. This description consists of numeric or alpha numeric characters and is preferably separated into groups for easier reading. The significance of individual characters or group of characters in the location description will be established by each military service or agency. The location description pattern established should assure that the number of characters used are kept to a minimum and yet clearly identify material locations.

(1) Installations with building, warehouse, area, or block designations which have permanently assigned engineer drawing numbers or letters may assign other code designators to such facilities for location description pattern purposes only. However, reports related to utilization, building schedules, etc., will refer only to the permanently assigned number or letters.

3-304. Location Site Identification

a. Marking. When planographs have been drawn and the location description pattern has been established, location identifications at the actual sites

are necessary.

(1) In open storage areas, appropriate location identification at strategic points will be shown on permanent, weatherproof placards or signs.

(2) In warehouses where floor surfaces permit, location description markings should be displayed on the floor. Marking can be applied with decals, by stencil brush, or by spray paint equipment. When applied to a clean floor and protected by a coat of clear lacquer or other suitable compound, sprayed or stenciled markings should last for sev-

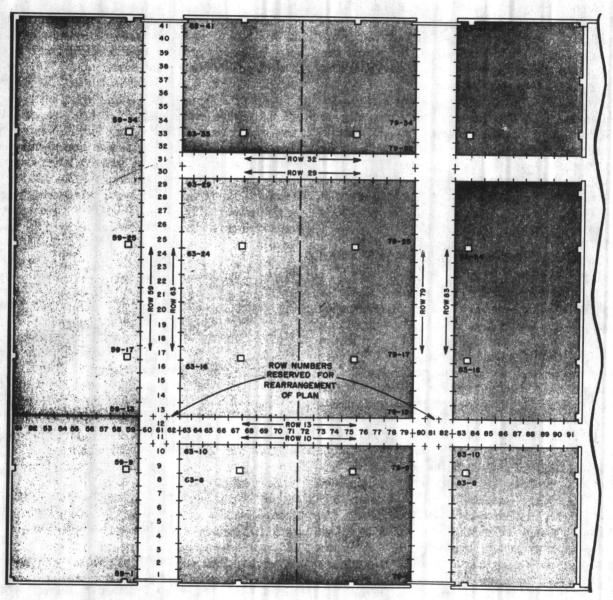


Figure 3-4. Example of stock location layout for large lot bulk storage.

15 September 1979 DOD 4145.19-R-1

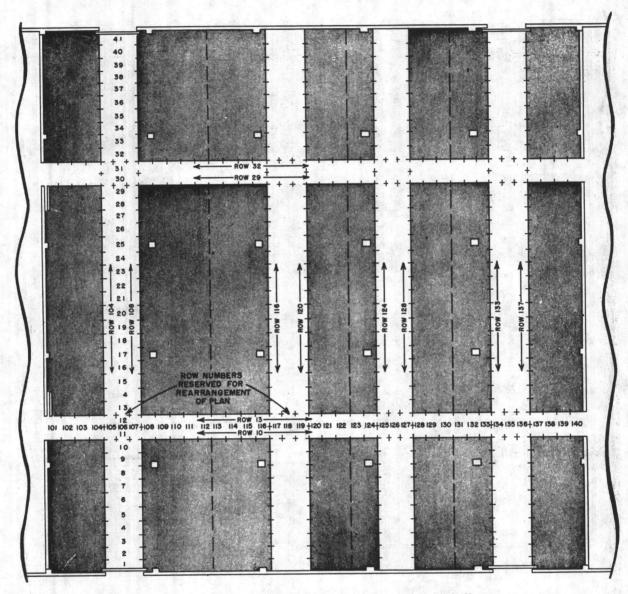


Figure 3-5. Example of stock location layout for medium lot bulk storage.

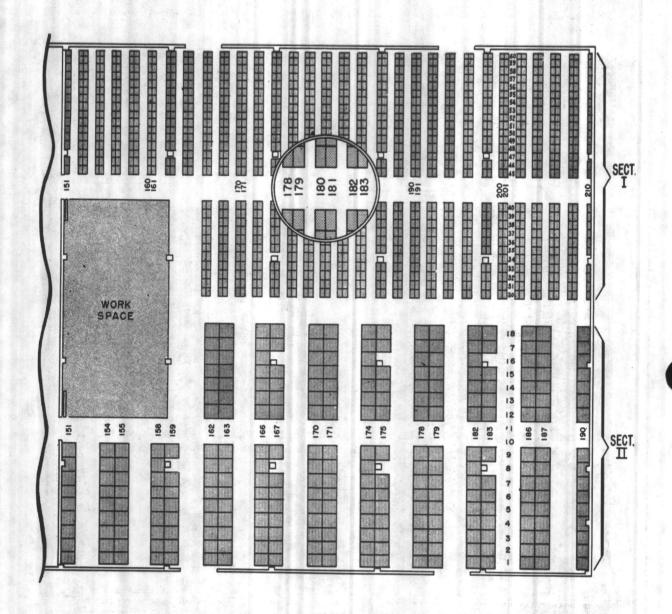


Figure 3-6. Example stock location layout for retail bin or shelving and small lot bulk storage.

15 September 1979 DOD 4145.19-R-1

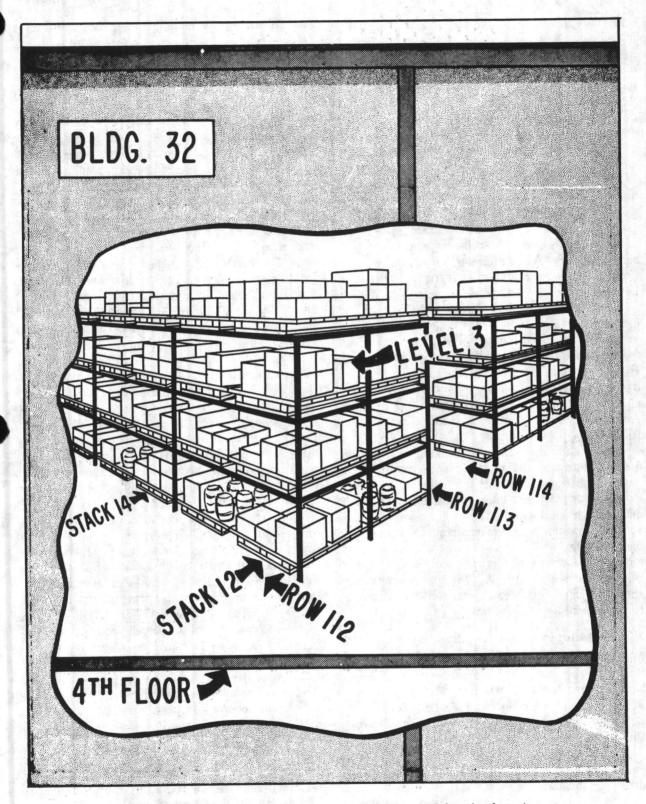


Figure 3-7. Example of view of a pallet rack type stock location layout.

eral years in normal warehouse operations. Markings should be placed within the aisle boundaries in order to be visible at all times and at the edges of the aisle to reduce wear from personnel and vehicle traffic. Where the floor-marking method is not practical due to type of floor surface, markings may be displayed on posts facing operating aisles, or on other suitable easily visible structural members, or as otherwise directed by the responsible military service/agency.

(3) For sheds and transitory shelters, location markings will be displayed in the same manner as warehouse markings.

(4) The quantity of location markings in storage areas will be as directed by the responsible military service/agency. As a minimum, each aisle intersection should be marked and every fifth grid should be marked along working aisles.

- (5) Due to variables in aisle and sotrage aid dimensions in bin, shelf, and pallet rack storage areas, the standard method of marking prescribed for bulk storage areas cannot always be applied. However, suitable location identification will be displayed. Applicable markings will be posted on storage aid ends facing working or traffic aisles. Additional markings may be painted on the floor (fig. 3–8).
- (6) In addition to the site marking described in preceding prargraphs, marking is also required for vertical location identification in certain cases. For example, this type marking is required on bin, shelf and pallet rack openings to designate a particular vertical location. Numeric or alpha characters may be used (figs. 3–7 and 3–8). In the case of bulk storage areas where vertical identification is not required, a standard alpha or numeric character should be used within the location description pattern to maintain uniformity.

# 3-305. Maintaining the Location System

Maintaining the stock location system is a responsibility of the storage management activity. Warehousing personnel will not normally keep records of receipts and issues or maintain balance records, however military services may authorize an exception for ammunition.

- a. Stock locator file. A stock locator file is the "heart" of a stock location system. It is an address directory for all stored material.
- (1) Existing records may be used to initially develop the locator file. To assure optimum accu-

racy, however, file establishment should include a complete wall-to-wall survey of material on hand. Appropriate location information is then entered into the locator file. The file must contain a locator record for each item stored. A record should reflect, as a minimum, the stock number, condition code, unit of issue, and location(s). Additional data may be entered as deemed essential to operations, for example, noun nomenclature, physical security/pilferage codes, shelf life codes, expiration dates, or lot numbers.

- (2) Procedures must be established to insure positive control of all additions, deletions, and changes to the locator file. Effort must also be directed to limiting the number of stock locator records. This can be done, in part, by selecting storage locations which can hold the total quantity on hand. Intelligent selection of locations for stock issues and receipts plus consolidation of multilocation material into fewer or into a single location will also aid in reduction of locations per item.
- (3) Site of the locator file will depend on the installation layout and the type of stock locator system used, i.e., maintained by manual means, or by use of EAM equipment, or by use of ADP equipment. The file could be located in an appropriate storage operation, in a central machine processing office, or as part of central computer records. There will, however, be only one locator file maintained except when a supplementary file is necessary for control of security items.
- (4) Activities without an EAM or ADP capability or activities which store only a small number of items may use a locator file system which is maintained entirely on a manual basis. Location data maintained on ADP equipment can be available almost instantaneously by use of certain ADP remote inquiry equipment. The EAM and ADP methods can mechanically or automatically provide, in varying degrees, related supply documentation such as labels, stock selection forms, material movement forms, and inventory count cards. Use of EAM and ADP equipment will minimize actions and provide speed and accuracy in processing location actions and in the maintenance of the locator file.
- b. Receipt of material. Upon receipt of material, the locator file will be screened for the stock number received. When a location already exists, the material will normally be routed to that location upon completion of identification and classification actions. If the quantity received obviously would not

15 September 1979 DOD 4145.19-R-1

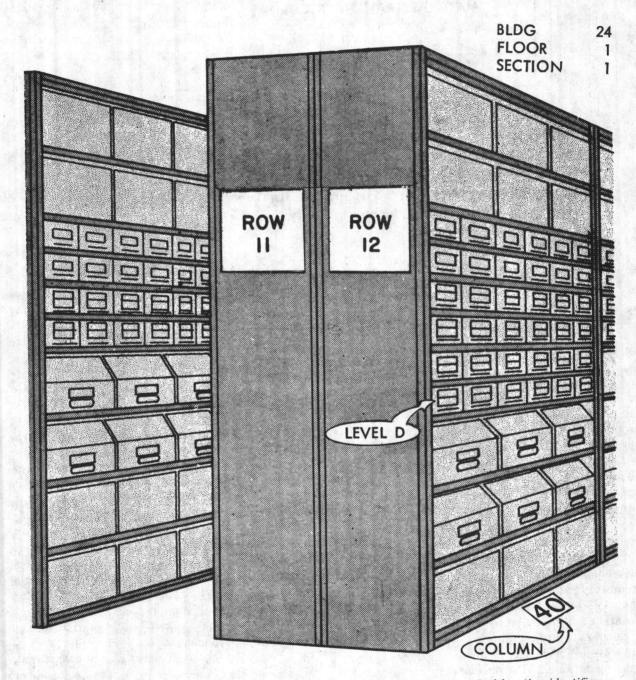


Figure 3-8. Example bin location descriptive pattern, including use of vertical location identifier.

	MATERIAL TRANSFER R	ECORD	DATE MATERIAL RECEIVED
CONS	IGNOR		
INVOI	CE OR IR NUMBER	TO (Building)	
	LOCATION DATA		QUANTITY
1.	Enter stock number and	nomenclatu	re of item.
2.	Enter existing location (s	) if one or i	more exist.
3.	Warehouseman will annot and return to locator acti		cation data
D,	FORM AUG 55 858 REPLACES NAV. S. AND A. FORM OCT 54, WHICH WILL BE USED U	663, NTIL EXHAUSTED.	GPO: 1958 OF-4577

Figure 3-9. Material transfer record.

fit into the existing location, the material will be routed to an appropriate warehouse area for final location selection by the warehouseman.

(1) For receipts without an existing location, if a file of empty locations by size and type is maintained this file will be used to prelocate applicable items. If such a file is not maintained, the material will be routed to the appropriate warehouse for selection of a final location by the warehouseman.

(2) Placing material into an existing location, establishing a new location, or deleting a location requires feedback to the locator file control activity. For this purpose, receipts moving to the storage location will be accompanied by either a Material Transfer Record (DD Form 858, fig. 3–9), or other approved service/agency form, or a copy of the receiving document. The document accompanying the material to storage must be annotated by the warehouseman with the final location data and returned to or through the locator file control activity for proper recording.

c. Issue of material. EAM machine or ADP computer generated issue documents may have material locations printed on stock selection documents. Activities without this capability must screen the locator file and manually annotate locations.

For general supply items, when the quantity selected reduces the location balance to zero, the warehouseman will prepare a location delete action on the appropriate service/agency form and forward it to the locator file control activity. Because of item configuration or replenishment frequency, certain locations may be designated as permanent and not require deletion when temporarily empty. Criteria and procedures for control of this will be established by each service/agency.

d. Location changes. Warehousing actions frequently involve movement of stored material into a new location or consolidation with similar material in existing location(s). The location additions or deletions caused by these actions will be immediately annotated by the warehouseman on the ap-

propriate service/agency form and forwarded to the locator file control activity.

e. Changes to data elements in locator file. Changes to standard elements of management data in the locator record, such as stock number, physical security/pilferage code, shelf life code, etc., may be accomplished automatically based on centralized service/agency data broadcasts when ADP capability exists. Activities without this ADP capability will require manual actions to alter locator file records. Service/agencies will establish procedures and documents to assure that the required data changes are addressed at the material location.

#### 3-306. Special Requirements

Stock location systems require a periodic validation of locator record data to ensure accuracy. This validation is accomplished in two phases. The first phase, a location survey, is done by comparing certain data in actual warehouse location with that in locator records. The second phase, a location audit reconciliation, involves a reconciliation between the validated storage activity locator records and the accountable activity stock record. The DODI 4140.35, Physical Inventory Control for DOD Supply System Material, is the basic document which requires these validations and establishes accuracy levels for the surveys and audits.

## Section 4. PEST MANAGEMENT

	Paragraph
Purpose and scope	3-401
General Genera	3-402
General	3-403
General ObjectivePolicy	3-404
Policy	3-405
Dognongihilities	0 200
[프레크레이블로크, ) 레크리트 이 N	0-400
#프레이탈레웨어 대통령인 이번 100m 150m 150m 150m 150m 150m 150m 150m	0-401
Inspection	3-408
Insect control measures	3-409
Insect control measures	3_410
Rodent control measures	3-411
Bird control measures	0 410
Reclamation or disposal of infested stocks	3-412
at	3-413
TrainingSafety	3-414
Training	3-415
First aid suggestions	3-416
First aid suggestions	3-417
Effect of pesticides on aquatic life and wildlife	0 410
References	3-418

## 3-401. Purpose and Scope

This section establishes the guidelines necessary to successfully maintain an effective stored products pest management program. Pest control is an element in the overall care of supplies in storage, which, in turn, is an integral part of the storage function.

#### 3-402. General

Many types of supplies are susceptible to infestation and damage by insects, rodents, birds, and other pests. Methods and equipment are not normally available to the consuming organization to permit reclaiming of infested stock or to provide adequate control measures. Therefore, both supply economy and troop health and welfare require that supplies

be uncontaminated and undamaged by pests upon receipt by the consignee. The success and continuity of a pest management program is enhanced by the maintenance of accurate records and reports. Results of work accomplished should be reviewed periodically to measure the effectiveness of preventive control actions.

#### 3-403. Objective

The prime objective of pest management activities is to prevent or minimize loss of supplies caused by such pests. This objective can best be achieved through the segregation and arrangement of infestible subsistence, proper warehouse sanitation, regularly scheduled inspections by trained personnel, and utilization of appropriate equipment, insecti-

cides, rodenticides and other control measures. Pest management is a continuous activity which begins with the production of stock, through the initial receipt of the stock and continues through to the ultimate consumer. In order for a stored product pest management program to be effective, the program must utilize various techniques, including both chemical and nonchemical controls, and actively involve storage, transportation, inspection, pest control, and concerned command elements.

## 3-404. Policy

DD Form 1532 (Pest Control Summary Report) (DODI 4150.7) will be prepared by installations to provide necessary data to ensure effective programs for selection and safe application of pesticides.

## 3-405. Responsibilities

- a. Assistance from other agencies. Specialists of the United States Department of Health, Education, and Welfare (Public Health Service), the United States Department of Agriculture, the United States Department of Interior, and the United States Department of Treasury (Bureau of Customs) provide consultation service and assistance on problems of medical and agricultural importance (e.g., disease and pest control, quarantine control, customs inspection) as requested. Required technical assistance can be obtained from the area or command entomologist or applied biologists. Requests for services of these specialists will be made by the installation commander to the appropriate operating agency commander.
- b. Quarantine control. Full cooperation will be given by all echelons of command to officials of other Governmental agencies to ensure compliance by supply activities with the quarantine regulations, requirements, and controls of such agencies as they pertain to supply operations. The responsible entomologist will provide technical guidance on the elimination of pests from military cargo and other aspects of quarantine control.
- c. Materials and equipment. Only standard issue pesticides and equipment will normally be used in pest control operations. Pesticides and/or equipment proposed to be substituted for those listed in the Federal Supply Catalog will be approved in accordance with instructions of the Military Department concerned. Equipment for the application of pesticides includes:
  - (1) Appropriate safety equipment.

- (2) Aerosol generators.
- (3) Fumigation equipment and facilities.
- (4) Ultra-low volume dispensers.
- (5) Power spray equipment.
- (6) Fumigation chambers (in special cases).
- d. Stored supplies.
- (1) The installation engineer or public works officer will operate and maintain approved equipment for elimination of pests infesting stored supplies in general purpose warehouse storage, controlled humidity storage, shed storage, and open storage. Fumigation, whether it be preventive or corrective in nature, is one of the basic tools of an effective pest management program. It includes the following:
- (a) The installation engineer or public works official will be responsible to assure safety precautions are in effect prior and subsequent to fumigation or other chemical pest control.
- (b) As a minimum, individuals in charge will have the responsibility to notify station safety, security and fire supervisors and the resident medical authority of the fumigation operations, building number, proposed length of fumigation time, and name of fumigant being used.
- (2) Approval of the installation commander will be obtained for fumigation of entire buildings to control pests and insect infestation in stored supplies.
- (3) The storage officer will provide for movement of items to and from fumigation chambers and will prepare the items for fumigation. Items infested by insects or damaged by other pests may require shipment to commercial contractors for fumigation and cleaning. Repacking contracts may be utilized if adequate facilities are not available at the installation or if the work can be done more economically by this means. Such contracts will be reviewed by the appropriate area (including Naval applied biologist) command entomologist.
- (4) Only trained and certified pest control personnel will apply residual or space treatment pesticides, fumigation, operate fumigation chambers and aerate treated items.

# 3-406. Pest Control Operations

Pest control operations will provide the necessary measures to insure the safe and efficient control and quarantine of insects, rodents, and other pests. Pest control operations will be conducted as a scheduled part of the installation's regular repairs and maintenance program and will include—

a. Inspections by trained and certified pest control operators to determine the need for and effectiveness of pest control measures.

b. Establishment of construction needs and maintenance criteria for prevention of pests.

c. Land drainage, clearing and control of vegetation in outside storage and pest breeding areas.

d. Application of pesticides on materials, in buildings, on grounds, and as soil treatment.

e. Use of wood preservatives.

f. Fumigation and disinfecting of stored supplies.

g. Control of pests, grasses, or other weeds in storage areas.

h. Safe storage of pesticides and maintenance of pest control equipment.

## 3-407. Inspection

- a. Spot inspection. Virtually all items of subsistence, except canned or bottled foods, are susceptible to infestation or damage by insects, rodents, and other pests. Woolens, mixed woolens, furs, feathers, felt, natural fibers, and untreated hard woods are subject to attack by insects. A spot inspection of any commodity to determine degree of infestation should rarely exceed 10 percent of the lot. Normally a 5 percent inspection will indicate the condition of the lot being inspected. In either event, inspection should be discontinued when infestation is first detected and the lot will be fumigated or otherwise appropriately treated. Subsequently, a further examination will be accomplished to determine whether or not the stock is suitable for issue.
- (1) The importance of detecting insect infestation in the early stages cannot be overemphasized, particularly when climatic and other environmental conditions are conducive to incubation and migration. Certain insects are attracted to light and infestations may be detected by scanning windows and other sources of light. Insect activity can be anticipated when the product temperature is 50° F and above, or the air temperature is 60° F and above, and the relative humidity is in excess of 35 percent. Generally, insect activity will increase as the temperature and relative humidity rise. Therefore, the frequency of inspections will be increased during prolonged hot, humid weather.
- (2) Some of the most common types of destructive insects are shown in figures 3-10 through 3-

- 13. Figure 3-14 illustrates bread made with flour previously infested for various periods. Rodents and birds present a continuous, year-round problem.
- (3) In the fall of the year, rodents in the fields are attracted to warm warehouses, especially warehouses where subsistence items are stored. Birds contaminate stored supplies when they enter warehouses to feed on spilled foods or to obtain shelter. Termites, which penetrate warehouses through expansion joints in the floor, destroy wood, paper and other supplies containing cellulose. Losses due to these pests can be held to a minimum by timely inspections and prompt remedial action.

b. Inspection at time of receipt. A visual inspection must be made of infestible supplies at time of receipt prior to unloading operations unless exempted by the headquarters having stock accountability for the supplies.

(1) If the supplies from the vendor are infested, the shipment should be rejected. However, if the inspection shows only a light car or container surface infestation, the stock will be placed in an isolation area which has been treated with an insecticide and will be fumigated before being placed in the

storage area. The stock may be fumigated in the car or van prior to unloading.

(2) When infestation is noted upon receipt, the headquarters having stock accountability should be contacted for specific instructions prior to acceptance or fumigation.

- (3) Samples of infested supply items will be collected at time of inspection for technical evaluation and analysis by entomologists or taxonomically qualified entomology technicians. Such analyses are required for identification of insects, degree of contamination, and other purposes related to disposition of the lot concerned. Samples will also be taken of supply items suspected of being infested and these samples incubated for final determination of insect infestation.
- c. Inspection of returned material. Material returning to storage sites from using activities (especially inter-country movement) presents the possibility for introduction of pests and diseases of medical and agricultural importance. Disease vectors and agricultural pests may be introduced into the country receiving material in or on cargo, cargo containers, foodstuffs, or soil adhering to bags, boxes, vehicles, or other military equipment. A carrier manifest certifying that retrograde cargo is


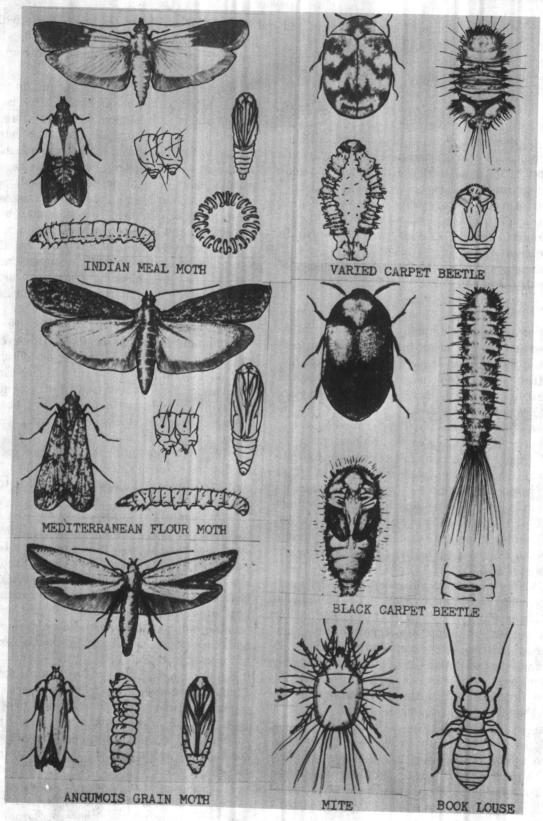



Figure 3-10.

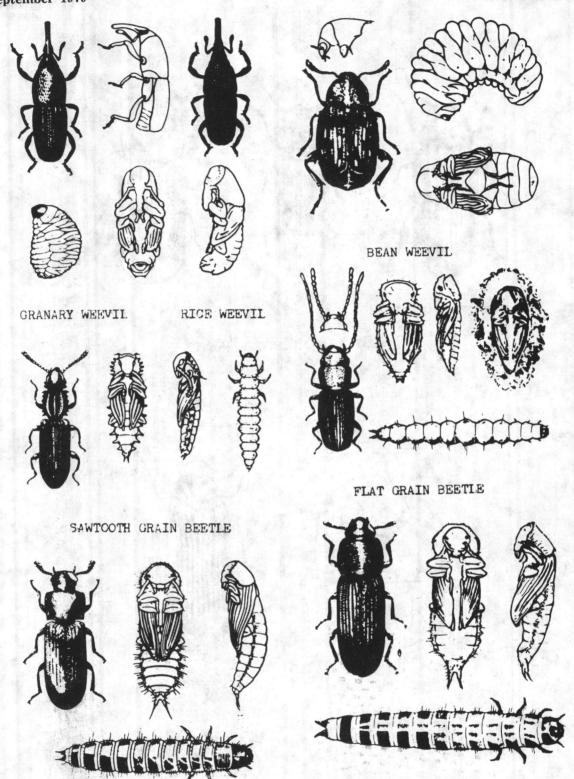

BLACK FLOUR BERTLE

Figure 3-11.


CONFUSED FLOUR BEETLE

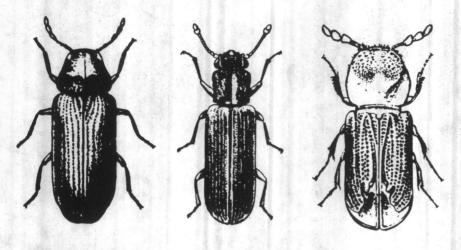

FURNITURE BEETLE


LEAD CABLE BORER

# WESTERN POWDERPOST BEETLE

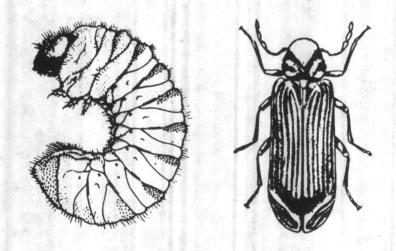

CALIFORNIA DEATH-WATCH BEETLE

Figure 3-12.

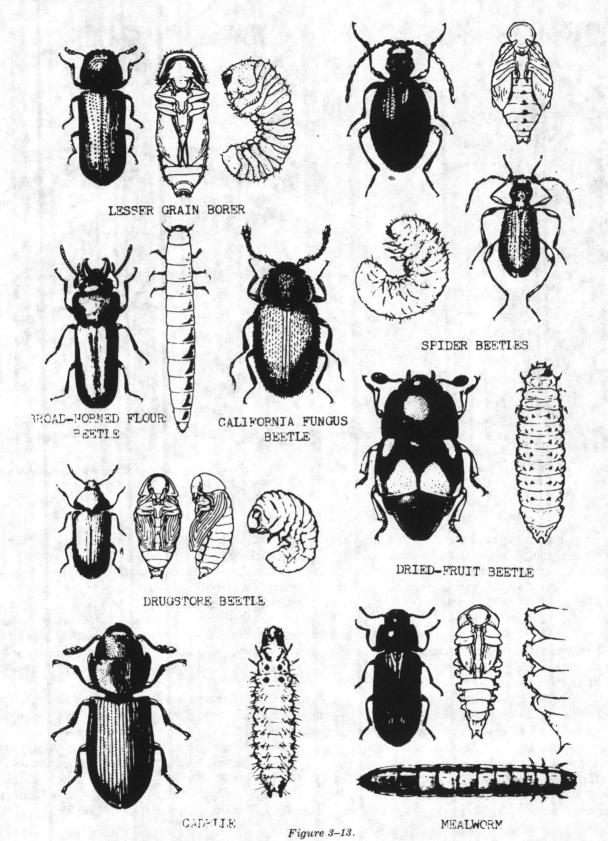

3-31

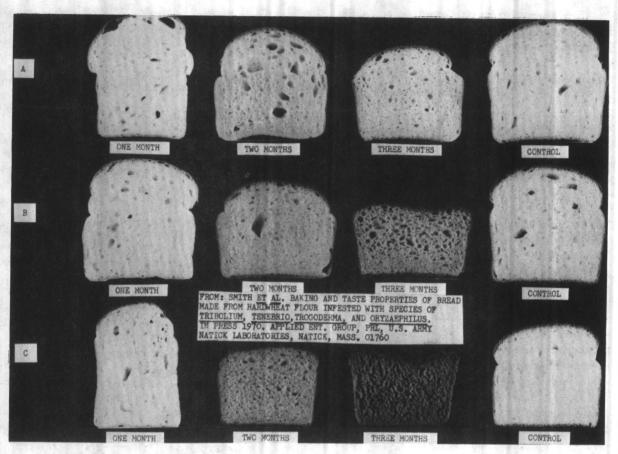


Figure 3-14. Slices of bread made from flour previously infested by flour beetles for periods of one, two and three months as follows: A—Tribolium confusum, ebony strain, 50 adults per replicate; B—Tribolium castaneum, 50 adults per replicate; and C—Tribolium castaneum, 100 adults per replicate.

free from contamination as well as free from hazardous and dangerous articles is not licensed to treat these returns lightly. The recommended procedure, in the case of subsistence, is to fumigate prior to placement in the warehouse when such returning material must be accepted.

- (1) Hazardous and dangerous articles have been detected in cargo classified as general cargo. These articles (e.g., ammunition shells, bombs, poisonous gases) must not be introduced inadvertently into the United States or other nations.
- (2) Normally every precaution is taken at point of foreign origin to assure that hazardous articles are not included in shipments of general cargo and that the shipment is free of contamination. However, an intensive, continuous, and aggressive public health and agricultural quarantine program must be carried on in all United States Armed Forces

operations throughout the world involving retrograde cargo.

- (3) To provide safeguards, inspections uncovering the presence of dangerous and/or hazardous material will be reported expeditiously. This includes the inspection of these materials in retrograde cargo as the presence of quarantinable rodent and/or insect infestations including prohibited packaging materials such as native grasses, mattresses, etc.
- (4) The report, as a minimum, should identify the shipper, type of cargo affected, probable cause of the situation (if known), immediate corrective action taken, and any additional information considered applicable. The report should be submitted to the Armed Services Explosive Safety Board (ASESB) or the Armed Forces Pest Control Board (AFPCB) as appropriate (DODI 4500.35).

(5) Returned material found, or suspected, to be contaminated by hazardous material or pest infestation will be placed in an isolated area and will be treated as prescribed herein before being sent

through the processing area.

d. Inspection while in storage. Storage facilities and exteriors of infestible material will be inspected at regular intervals by trained and qualified pest control personnel. The infestible contents of such products will be inspected by veterinary, food, or qualified subsistence quality assurance inspectors. The storage activity's insect and rodent control personnel and the inspection specialists should perform a joint monthly inspection of vulnerable stocks and storage areas. A report should be prepared on each inspection to show the results thereof and recommended action. Inspection personnel will be provided with required equipment such as flashlight, magnifying glass, hand sifter and grain thief. Visual and spot inspections should be accomplished at the storage stack. A central inspection area should be available for the performance of more thorough and extensive examinations.

e. Inspection of outbound shipments. Supplies will be visually inspected at time of outbound shipment. The car or truck will also be inspected prior to loading for evidence of insects and rodents. Cracks and ruptures in car and truck interiors provide a good harborage for insects. Due to the condition of the car interior, climatic conditions, and type of pack, it may be necessary to provide for

intransit fumigation of the carrier.

f. Inspection procedure for subsistence. Advanced infestation in bagged, domestic pack subsistence can usually be readily detected by a visual inspection. To detect infestation in an earlier stage, or to any degree within a multiwall bag, it is necessary to open the bag and sift sample lots of the contents. A hand sieve with catch pan is required for this operation. Recommended for this purpose is sieve, sifting, 8- or 12-inch diameter, No. 10 mesh, or locally made sieves which utilize an 8XX bolting cloth as the screening material for flours. A No. 8 mesh sieve or locally made sieves which utilize normal window screens may be used for bulk items such as macaroni or beans. Mechanical sifting equipment will be made available when workload warrants. More specific details for inspecting insect-infested subsistence are provided in MIL-STD-904, Guidelines for Insect Infestation of Subsistence.

(1) The seams and ears of the bags will be carefully examined for evidence of insect infestation. The top layer of stacked subsistence is the most vulnerable area affected by bird droppings, and will be inspected frequently when it is known that birds are entering warehouses.

(2) Containers of spices, pepper, dried milk and other finely divided subsistence stocks will be se-

lected at random, emptied and sifted.

(3) Spaghetti, macaroni, and cereal products will be visually inspected and then sieved for insect and rodent infestation.

- (4) All paperboard and other nonmetal containers will be checked for areas damaged by rodents and the contents inspected for evidence of insects. Under some circumstances it may be desirable to incubate a sample of the commodity to determine the presence of immature stages of insects.
- (5) All other infestible subsistence will be inspected by visual and/or open container examination as prescribed by the material manager.
- g. Inspection procedure for textiles, textile products. Treated woolen clothing, blankets and similar items in compressed bales are seldom affected by insects. Insecticide vapors are trapped within the bale for long periods of time due to the type of packaging. Wooden boxes and fiberboard containers do not afford similar protection. Sample lots of items should be selected at random, removed from the containers and examined for evidence of moths, larvae, silverfish, and other destructive pests. Folds and seams particularly should be carefully inspected. Naphthalene flakes or other insecticides will be replenished at time of inspection. Wearing apparel fabricated from textiles that have been treated with an insecticidal repellent within the last two years is not normally susceptible to insect infestation. These stocks can be identified by labels on the exterior of package captioned "mothicide."
- h. Inspection Procedure for Wood Products. Powder/post beetle infestation can be readily detected by the presence of wood dust and small holes in the stock. Shipments received from tropical areas are particularly prone to this type of infestation. All types of hardwood items without protective treatments are subject to attack by this insect, e.g., furniture, craft items, tool handles, wooden equipment parts and pallets. When inspecting canvas

folding cots, the side rail concealed by the canvas slip-on should be carefully examined.

- (1) Termites are the most destructive insect pests at military activities. They may damage a building so severely that condemnation and replacement are required. They eat wood and other cellulose products such as paper, cardboard and fiberboard, and will destroy structural timbers, pallets, crates, boxes, tool handles, furniture, books, and other wood products and even cotton products. In attacking packaging or crating in storage areas, they will seriously damage stored items such as nylon parachutes and woolen clothing. All structures built wholly or partially of wood should be inspected at least annually for active termite infestation regardless of preventive measures employed in construction. Attention must also be given to those conditions conducive to further termite attack.
- (2) The installation engineer or public works officer will assist the storage officer in the inspection of lumber and other forest products for infestation by insects and wood-destroying fungi. Infested timbers will be treated with approved pesticides; depot stocks of wood products will be treated to prevent further infestation and damage when infestation conditions exist.
- i. Inspection procedures and control measures for household goods. Items of household goods susceptible to attack by insects should be carefully inspected immediately prior to packaging. The appropriate insecticide or repellent should be applied during packaging and packing operations. The exterior of the boxes and packages should be inspected upon receipt at warehouse and at regular intervals while in storage for indications of insect and rodent infestation. If infestation is detected, the box or package should be fumigated using the atmospheric pressure method only. Boxed or crated household goods must not be vacuum fumigated. The entomologist or a certified pest control operator especially trained in fumigation techniques should prescribe the fumigant and the method of fumigation. Storage areas for household goods should be sprayed at regular intervals with residual sprays.
- (1) As required, the installation engineer or public works officer will apply appropriate control measures for eliminating infestations in household goods and furniture that are in use.
  - (2) Household goods will be inspected imme-

diately prior to packing and crating for storage and shipment. When infestation is found, appropriate control measures will be applied.

## 3-408. Housekeeping

Proper housekeeping practices are essential for the protection of supplies in storage. Floors, containers, materials handling equipment, storage areas, pallets, and other storage aids must be clean and free of any substances that will attract, provide food for, or harbor insects, birds, and rodents. Tears and ruptures in sacked and boxed subsistence must be closed with a patch or repackaged. Dead rodents, birds, and other pests should be removed from the storage area. Rodent proof garbage and trash receptacles in sufficient numbers will be provided and their use enforced. Removal of all garbage and trash should be accomplished at least weekly.

## 3-409. Insect Control Measures

Control programs for insects and related pests at military installations will provide for the application of preventive as well as direct measures. An economical and effective control program requires, among other things, the selective use of spraying, dusting, fumigation, insect proofing, the use of wood preservatives, drainage, poison baits, the elimination of breeding areas, and the practice of good sanitation. Inasmuch as there are several hundred species of pests of stored products which may require one or more control methods, the specific information regarding choice of treatment, safe application, formulation, and operational guidelines will be found in the tri-Department technical publication, Insect and Rodent Control (TM 5-632/AFM 9-16/NAVFAC MO-310) and Rodent Control (TB MED 144/NAV-MED P-5052-26/AFM 161-3). Additional technical assistance required should be requested from the appropriate command or area entomologist.

a. Personnel for application of insecticides. The application of insecticides and similar chemicals will be made by personnel trained and certified in their safe and effective use as required by DOD standards for insect and rodent control operations. The entire control program will be supervised by trained and DOD certified personnel qualified to determine requirements and program effectiveness. Environmental pest control measures in the peripheral civilian community will be supported and encouraged.

b. Low temperatures. Subsistence items susceptible to insect infestation are not normally adversely affected by prolonged periods of low temperatures, 0°F through 32°F. Insect activity at such temperatures is arrested or substantially retarded. Textile, wood items and infestible subsistence should be stored in unheated warehouse sections when space and storage conditions permit. Temperatures lower than 0°F maintained for a minimum of two weeks will normally be required to kill insect eggs.

c. Fumigation and treatment. Fumigation will normally produce satisfactory insect kill when the ambient temperature and temperature of the stock is 60°F and higher. This operation will not adversely affect items of subsistence or other types of stock, when directions on the fumigant label are followed. When infested processed infestible subsistence must be fumigated, the fumigant of choice is aluminum phosphide. Under unusual circumstances, other fumigants might be required. However, fumigants other than aluminum phosphide will not be utilized unless they are recommended by the area command or district (applied biologist) entomologist. Also, there is no residue generated to provide continued protection following fumigation. Therefore, fumigation stocks should be stored in an area that has been sprayed previously with a residual insecticide. With the exception of subsistence items, fumigation by vacuum chamber is an effective and efficient method. A high degree of penetration into the interior of the item is achieved by most fumigants making unnecessary the opening of bales, boxes, multiwall bags, and similar type of packs.

(1) Stocks can be fumigated satisfactorily under tarpaulins, in sealed atmospheric chambers, boxcars, and vans.

(2) As a precautionary measure, processed subsistence items susceptible to insect infestation may be fumigated with hydrogen phosphide upon receipt when ambient air temperatures exceed 50°F. However, any such preventive type of fumigation should only be conducted with the concurrence of a command or district (applied biologist) entomologist.

(3) Stocks in storage found to be infested must be fumigated as early as practicable to prevent further contamination.

Note: Boxed and crated household goods will not be vacuum fumigated. Other methods of fumigation are authorized. Also, processed subsistence items will not be fumigated with methyl bromide. Repeated fumigation

with methyl bromide will result in a buildup of inorganic bromide residues which can exceed FDA established tolerances.

d. Dosages and exposure times. Vacuum chamber fumigation dosages and exposure times will adhere to the label instructions of the fumigant utilized. For fumigants recommended use in vacuum chambers, consult the appropriate area, command, or district (applied biologist) entomologist.

e. In-place atmospheric fumigation. (The Armed Forces Pest Control Board Technical Information Memorandum No. 11, Hydrogen Phosphide Fumigation with Aluminum Phosphide). Processed subsistence items that become infested can be effectively fumigated in place when covered with lightweight polyethylene film. The fumigant of choice for this method is phosphine gas which is generated from aluminum phosphide. Aluminum phosphide in the presence of atmospheric moisture produces phosphine or hydrogen phosphide gas. The effects of this gas upon ammunition items are not well known, but are under study. Until these studies have been completed and this section revised, this method of fumigation is not permitted for ammunition, explosives and related metal parts. The penetration characteristics of this gas are of a particular advantage since it can be used effectively with all types of pack (hermetically sealed glass or metal excluded).

(1) In-place fumigation can be conducted without moving the commodity. Sufficient space (normally 24–36 inches) must be provided between
stacks of different infestible subsistence and the
stacks and all walls to obtain the minimum polyethylene tarp overhang of 18 inches on the floor and
to facilitate inspection of material. Such fumigation
must be conducted by certified pest control personnel in strict accordance with the Armed Forces Pest
Control Board's Technical Information Memorandum No. 11.

(2) Hydrogen phosphide (phosphine) gas is explosive under vacuum conditions; therefore, the use of aluminum phosphide is restricted to atmospheric fumigation in a closed space or under a polyethylene paulin. Phosphine fumigation should be conducted only by specially trained and certified pest control personnel.

f. Vault fumigation. Vaults for the fumigation of supplies may be constructed of wood, concrete, brick, or of wood frame with sheet metal lining. Clothing, furniture, and wood products can be effectively fumigated with methyl bromide to elimi-

nate insects. Phosphine can be used with food products. These vaults must be sealed to prevent the escape of the fumigant during exposure. Equipment should be provided for applying the methyl bromide or aluminum phosphide after the vault is loaded and sealed, and an exhaust fan installed to aid in the aeration of the treated supplies and the vault. For specific dosage information refer to the methyl bromide label. The rectangular steel chambers normally used for vacuum fumigation may be utilized as a vault for the fumigation of crated household goods (furniture), or other commodities that might be damaged by high vacuum. When utilizing these chambers for atmospheric vault fumigation, an initial vacuum of 5 inches should be placed on the chamber in order that the dosage of methyl bromide will readily flow from cylinder through volatilizer into the chamber.

(1) Aluminum phosphide will not be used in vacuum fumigation.

- (2) Installations having vacuum fumigation chambers will, upon request, fumigate commodities of other DOD or Governmental agencies. Agencies requesting vacuum fumigation of commodities will transport their property to and from the treatment chambers.
- g. Carrier equipment fumigation. Rail cars and vans or trucks indicating infestation at time of receipt should be fumigated prior to unloading in order to reduce the mechanical transfer of insect populations into military storage facilities.
- (1) If the loaded carrier equipment is in good state of repair, effective fumigation can be accomplished by introducing aluminum phosphide in accordance with MIL-STD-1486.
- (2) Under no condition will any residue of a formulation containing aluminum phosphide be allowed to come in contact with processed foods.
- h. In-transit fumigation. When directed by higher headquarters or when previous arrangements for clearance of the fumigant have been made with the installation due to receive a rail car shipment of infestible subsistence, in-transit fumigation must be accomplished. This fumigation can only be applied by DOD certified pest control personnel and must be in accordance with MIL-STD-1486.
- i. Receipt of fumigated carrier equipment. Rail cars/vehicles received displaying fumigation warning signs will be serviced by trained and certified pest control personnel. Cars received in less than 72 hours from introduction of the fumigant should

not be entered without chemical canister mask approved for use with the fumigant involved, or self contained breathing apparatus. Dust respirators will not be used for this purpose. Cars received with more than 72-hour fumigation can safely be cleared by certified pest control personnel.

(1) If an in-transit fumigation shipment is received and the pest control personnel determine that such shipment has been inadequately fumigated or envelopes are missing, contact the area or command entomologist for technical advice and the Directorate of Subsistence, Defense Personnel Support Center, for advice on disposition of the shipment prior to off-loading of products.

(2) Fumigated subsistence will not be consumed until at least 48 hours after unloading from freight cars.

- j. Space fumigation. The fumigation of warehouses, and other large spaces, requires technical assistance. Commercially owned vessels will be fumigated under the regulations and supervision of the US Public Health Service. The services of the cognizant command or area entomologist are also available for Government-owned vessels.
- (1) Adequate preparation should be given to the space to be treated. Windows, doors, skylights, and other openings should be wedged and sealed and all broken window panes replaced. When the space to be fumigated is properly sealed, the fumigant should be applied in compliance with the label instructions for the fumigant utilized.
- (2) Methyl bromide, when recommended for space fumigation, is utilized at a dosage of 1 pound per 1,000 cubic feet of space with exposure of 12 to 24 hours.
- (3) Methyl bromide will not be used for processed subsistence fumigation. When using methyl bromide, make certain no food items (other than cans or hermetically sealed glass) are within the space to be fumigated. Aluminum phosphide can be utilized for space treatment of subsistence warehouses, but should only be conducted under the supervision of an entomologist.
- (4) Adequate provision must be made for aeration at end of exposure to prevent workers from being exposed for extended periods to concentrations of any fumigant.
- k. Residual insecticide sprays. Residual insecticide sprays should be used to provide long lasting protection to noninfested stocks or to prevent the spread from previously infested materials. Residual

insecticides should be applied on walls, floors of bays, and pallets. Only residual insecticides recommended by the Armed Forces Pest Control Board specifically for subsistence storage areas will be utilized in subsistence storage facilities. The insecticide of choice for such residual application, as well as dosages, application rates, and frequency of application, must be determined by the area or command entomologist.

l. Space insecticide treatments. In areas of such operations as subsistence repackaging or ration breakdown points, it normally is necessary to use insecticides having very light residual effect and minimum odor or staining properties. These are used as "space treatments" and achieve a quick knockdown effect and temporary control. Consult the area or command entomologist for pesticides and methods of application authorized in such areas. Insecticide, pyrethrum, liquid form, 0.4 percent pyrethrin, 1.6 percent synergist (NSN 6840-00-400-2140) is available for application as a space insecticide treatment.

(1) The application of approved pesticides, such as 5 percent dichlorvos, in warehouses used for the storage of processed/packaged subsistence on a regular preventive basis is the most effective method of preventing the spread of insect infestation within

storage facilities.

(2) A dispenser, insecticide, stored products automatically controlled emission (SPACE) II (NSN 3740-01-019-4557) is used to disperse the pesticide in large warehouses. One dispenser is required for each million cubic feet of warehouse space (fig. 3-

(a) The machine is placed in a warehouse at the end of a work day and set up by a qualified pest

control operator.

(b) The machine automatically turns on and dispenses its insecticidal dose during the peak activity period of the stored products pests at night. The dispenser will automatically shut off after operation.

(c) Buildings being treated will be closed and all nonessential ventilation shut off during the treatment period. All entrances will be locked and protection signs posted at all entrances. Unprotected workers will not be allowed to enter buildings under treatment.

(d) Pest control personnel will open the building and turn on ventilation systems 30 minutes before other workers are allowed to enter the building.

(e) Warehouses containing insect susceptible supplies will receive a pesticidal space treatment once each week or as recommended by the area or command entomologist, when the commodity temperature is above 50°F or the air temperature is 60°F or above.

m. Dip or soak insecticide treatment. Wood products such as tool handles, pallets, ladders, gun stocks, and similar items should be protected from wood destroying insects by use of dip or soak insecticidal treatments. These treatments can be made by the use of tank or vat type receptacles which permit complete immersion of the desired quantity of wooden items for a period of 3 minutes or longer. Insecticides give effective long lasting protection against more insects affecting wood in storage. Where it is desired to provide protection against both insects and fungi, pentachlorophenol, preferably with a water repellent added, has proven effective. Only certified pest control operators utilizing pesticides as recommended by the area or command entomologist will perform application of these pesticides.

## 3-410. Rodent Control Measures

a. General. The Armed Forces are concerned with rodents primarily because these animals act as reservoirs of some of the most serious diseases affecting man. The economic aspects of a rodent infestation are also considerable. The monetary losses encountered through consumption and contamination of foodstuffs and through damage to buildings and property amount to millions of dollars annually. Rodent control work should be regarded as a continuous program with a sustained effort to eliminate the causes of infestation rather than one of recurrent intensive campaigns. Satisfactory rodent control is dependent on the elimination of food and shelter. The control program will include removal of food and water supply, elimination of shelter, rodent proofing structures and eradication by trapping, poisoning and burrow fumigation.

b. Evidence of infestation. Observation of rat signs is essential in ascertaining whether rats currently infest buildings, in determining the degree of infestation, and in planning an effective control program. These signs are droppings, runways, rub marks, tracks, burrows, nests, damage, rat odor, rat hairs, live rats, dead rats, and damage to stored products. Talc as a tracking patch, can be used to

identify active infestations.

DOD 4145.19-R-1

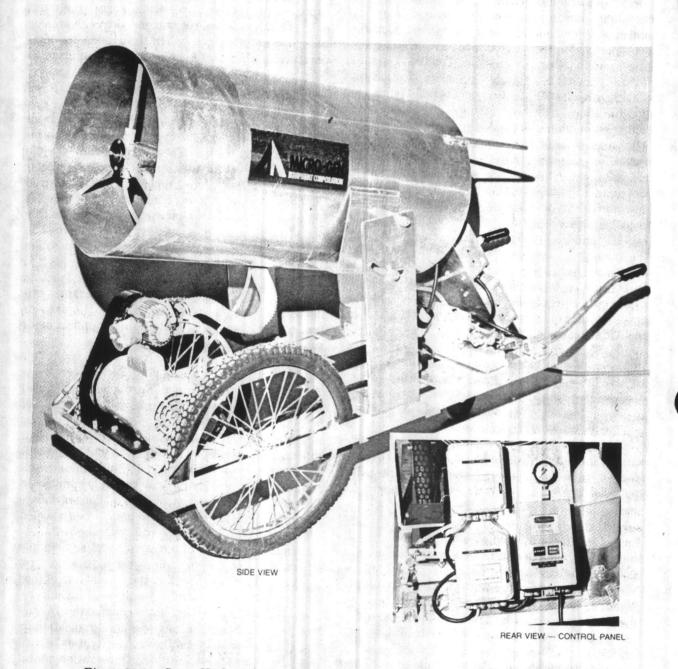


Figure 3-15. Space II—Insecticidal dispenser used for space treatment in large warehouses.

c. Elimination of food and shelter. The primary factors influencing the degree of infestation are the amounts of food and harborage available. Few rats are found in buildings where food is not handled. The cleanliness of an establishment is a most important factor affecting the number of rats which may be present. When waste food is piled on the floor, in open cans, or other unprotected sites, little additional evidence is needed to show that the site will support rats. Rat infestation can usually be traced to unsanitary conditions, consisting chiefly of infrequent refuse collection and inadequate disposal practices. General sanitation as a rodent control measure includes primarily a planned and continuous program of collection and disposal of debris, rubbish, and garbage, and the proper stacking of food supplies. Such practices reduce available food and harborage for rats.

d. Erection of barriers. Ratproofing of existing buildings for prevention and control of rats is sometimes necessary. Sheet metal of 26-gauge or heavier, 1/4-inch mesh hardware cloth, and concretes are suitable materials for use in ratproofing. Openings of sizes that will permit entrance of rats and mice to the interior of warehouses should be closed. Other openings, such as cracks around doorways, gratings, and windows less than 4 feet above the ground through which rats may enter directly or by enlarging the opening should be covered with 1/4-inch mesh hardware cloth or other suitable ratproofing material. Openings around boxed-in piping and wire conduits should be closed. Conduits for wiring should be closed and limited, if possible, to sizes that will prevent passage of rats and mice. Fire stops in double walls and floors of wood construction should exclude potential rat runways along beams, and spaces between walls should be blocked. Doors should be self-closing and fit tightly. Wood sills and doors at ground level may be sheathed in sheet metal to withstand gnawing.

e. Application of poison baits. The most economical means of effecting wholesale destruction of rats and mice is the use of poisons (rodenticides). Because most of these poisons are toxic to man and domestic animals, the use of baits at military installations should be properly directed and supervised. Rats vary widely in food preferences. These preferences may be ascertained by observing the type of food scattered about the harborage as well as by test baiting. It has been observed that an average adult rat may require approximately three-

fourths to one ounce of dry food and from one-half to one ounce of water in a 24-hour period. Because the requirement for water is an urgent one, water is an effective bait in itself. If other sources are denied to the rats, the attractiveness of all food and water bait is greatly enhanced. Bait boxes or feeding stations may be used, when necessary, to protect poison baits from weather and to safeguard installation personnel, children, and domestic animals.

f. Fumigation. Calcium cyanide fumigation will destroy rats in their burrows outside of buildings. This material (NSN 6840-00-264-6684) is a grayishwhite granular powder which produces hydrocyanic acid gas (hydrogen cyanide (HCN)) almost instantly upon exposure to the moisture or air. It kills very quickly and both the dust and the liberated gas will kill man and the other animals including insects. Although safe when properly done, calcium cyanide fumigation is a hazardous process and must be done only by trained personnel. Fumigation should never be attempted in burrows extending under occupied buildings or closer than 15 feet from a building. Personnel will be required to wear chemical cartridge respirators approved for use with this type fumigant.

g. Use of traps. Trapping is recommended for use in those places where it is not advisable to use poison bait or gas. In trapping rats, the proper placement of the traps is far more important than is the selection of bait. Rats follow natural runways whenever possible. There instinct for stealth and protection causes them to travel behind anything that is placed near a wall. The best baited trap will rarely entice a rat into the open. When a trap can be set behind objects which are stacked close to the wall or behind a board that is leaned against a wall, it will be much more likely to lure a rat into investigating it.

(1) Rats quickly become "trap wise," necessitating frequent changes in setting and bait. Traps require servicing daily and sometimes twice daily. Traps should be cleaned whenever necessary to ensure efficient operation. It is not necessary to avoid handling traps nor is it necessary to wash or sterilize them since human odors or odors from previously caught rats do not deter rats from approaching them.

(2) Baits may be any foods attractive to rats. The baited traps should be placed near, but not in rat runs because rats prefer to investigate food and

may be wary of obstructions in their runways. Traps near a wall or other vertical surface should be placed about 1 foot from and at right angles to the wall with the hair-trigger toward the wall. Thus, a rat running along the wall from either direction, in leaving the run, will go straight for the bait on the trigger. It is desirable to vary the bait every few days and switch to an entirely different type.

h. House mice. Control of house mice may be accomplished in much the same manner as that described for rat control; namely, trapping and poisoning. The snap traps used for mice control are much smaller than those used for trapping rats and usually result in better catches when baited with peanut butter, bacon, or oatmeal. Traps must be spaced closer together for mice than for rats since the normal range of mice is only 10–30 feet from their nest.

i. Field rodents. The methods for control of field rodents vary according to the type of animals and the conditions under which they live. Technical assistance in the control of field rodents may be obtained from the cognizant area, command or district (applied biologist) entomologist, Federal, State, and County agencies in the United States and corresponding agencies in foreign countries.

# 3-411. Bird Control Measures

The following procedures are recommended in controlling pigeons, English sparrows, European starlings, and other bird pests in and about storage depots. Each instance where pest birds are a problem is unique. The area or command entomologist should be consulted on any bird problem, but must be consulted prior to the use of any reduction measures.

a. Preventive measures. Keep the ground around the storage area free from spilled grain and other food. Remove spoiled grain and other waste food from the premises and use covered receptacles to hold waste food material that is carried for a period of time.

(1) Stored supplies in warehouses can be protected from bird droppings by placing weighted brown paper on top layer of stacks or by covering with a 2-mil polyethylene film.

(2) The use of mesh wire to prevent access to building or roosts should be a major consideration in bird control. Screen all windows, ventilation, etc., with wire mesh no larger than three-fourths

of an inch. Small doors that remain open should be fitted tightly with screens equipped with suitable springs. Large doors which must remain open pose a special problem. Due to the relatively few alternatives, the area or command entomologist should be contacted for specific recommendations.

(3) Roosting can be permanently prevented by installing aluminum or galvinized iron sheeting at a 45° or greater slope on the exterior ledges of buildings. Temporary measures to discourage roosting include the use of glue on ledges and copings, electrical devices to produce shock and sharppointed wires in the form of spike fences. These methods or devices may require frequent servicing for best results.

b. Reduction measures. Bird populations may be reduced by destroying nests and eggs during the spring and summer and by trapping and poisoning. Population reduction efforts should be coordinated with the birds' reproductive cycle(s) and seasonal movements.

# 3-412. Reclamation or Disposal of Infested Stocks

After infested stock has been fumigated or otherwise disinfested, it should be carefully examined for fitness for human consumption or serviceability by the supporting veterinary or appropriate medical authority. Contaminated items of subsistence should be rendered unfit for human consumption, salvaged for animal food or, if more appropriate, destroyed by burning. (Denaturing can be achieved by the application of a colored fish oil or coal oil.) Cloth or subsistence items not heavily contaminated and which do not have an off-color or odor should be considered for rebolting or rescreening and returned to stock. If the insect infestation has been light and detected at the onset, rebolting of cloth before returning stock to storage may not be necessary. In each instance, technical advice prior to disposition of the affected stock should be obtained from specialists referred to above, the military service vested with staff supervision, the veterinary food inspection service, the medical officer, or the local representative of the US Food and Drug Administration. If rebolting or rescreening equipment is not available at the storage activity, commercial facilities should be utilized.

# 3-413. Storage of Pesticides and Sanitary Requirements

a. General. Pesticides used at military installa-

tions can be stored and handled safely by trained and certified personnel following label instructions and procedures recommended by the area or command entomologist. These materials are toxic to humans and animals and certain items are particularly dangerous if used or handled carelessly or improperly. Accordingly, it is essential that appropriate measures be taken to prevent accidental and deliberate access to these materials by unauthorized personnel. Proper storage is also essential to protect and prolong the life of the equipment.

- b. Toxic materials. Areas in which toxic materials are stored and mixed should be enclosed and secured to prevent access by unauthorized personnel. Storage space should be located so there is no danger of food contamination or fire hazard. Ventilation is required.
- c. Facilities. In addition to providing for the safe storage of toxic materials, pest control shop space should have facilities for the protection of personnel and the safe mixing of materials. Showers and washing facilities will be readily available near the mixing area for the use of personnel. Minimal pest control facility criteria are set by each Service; contact the area or command entomologist for guidance. Food will not be consumed in storage and handling areas. Separate lockers for work and street clothes will be provided.
- d. Transportation. Vehicles utilized for the transportation of pesticide supplies will be provided with locked compartments to eliminate the possibility of unauthorized persons gaining access to toxic materials.
- e. Disposal. The area or command entomologist will ensure that excess or deteriorated fumigants or pesticides remaining from fumigation or other pest control operations are properly disposed of in such a manner to avoid creation of hazardous conditions and potential environmental contamination. Criteria for selection of safe disposal methods include type of pesticide, formulation, amounts, containers, and geographical location. For facilities equipped with special high temperature (1800°F) incinerators or approved burial sites, disposal may be accomplished by the installation pest control technician if trained in disposal operations.
- (1) In all other cases, the area or command entomologist must be consulted prior to any disposal action. Usable pesticides (fumigants, herbicides, insecticides, rodenticides, etc.) in unopened

containers will be returned to the Federal Supply System.

(2) Damaged stocks determined to be reparable should be reported as prescribed by the responsible military service.

## 3-414. Training

a. Training and certification of operators.

(1) All personnel engaged in pest control operations will be trained and certified in accordance with policies and procedures established by DOD standards.

(2) Regular training courses will be provided to insure availability of trained and qualified inspectors and pest control operational personnel.

(3) Training of operational personnel will include:

(a) Safe storage, mixing, transportation, application, and disposal of pesticides, to include the proper first aid techniques for the pesticides to be

(b) Changes in techniques due to development of new and improved materials and equipment.

(c) Keeping records of all pest control operations.

(d) Identification of potential pest infestation problems and related information.

(4) A DOD certificate will be issued to operating personnel who successfully complete the required training.

b. Periodic training and recertification. The field of pest control is ever changing with development of new material and equipment, and with new research results ready to be translated into operational usage. These developments make it necessary for pest control personnel to receive periodic retraining. Training and recertification must be accomplished every 3 years.

## 3-415. Safety

- a. Pest control operations. Pest control operations will be performed by or under the direct supervision of trained and certified personnel. A minimum of two pest control personnel must be present during fumigation operations.
- (1) Protective devices such as masks, respirators, gloves, safety shoes, goggles and protective clothing will be provided for all persons engaged in pest control operations.

Note. Rubber gloves should never be worn with liquid fumigants, such as methyl bromide, due to the potential for skin burns resulting from spills. For some solid fumigants, such as aluminum phosphide, rubber gloves are required. Specific data on the wearing of the correct garments with fumigant can be obtained from the pesticide label or the appropriate area or command entomologist.

(2) Facilities will be provided for the minor repair of pest control equipment.

(3) Adequate provision for security of pesticides during transportation will be provided as necessary, e.g., special use vehicles, locked chests.

(4) When a structure ordinarily utilized by humans is undergoing fumigation, large warning signs will be placed on all entrances to prohibit entry. Furthermore, one or more guards may be posted during the fumigation and aeration periods if deemed necessary by the area or command entomologist. Guards should be obtained from normal installation military or civilian police sources.

(5) The installation Medical Officer, Safety Officer, and fire department will be advised of the fumigant to be used and where and when fumigation will take place prior to beginning the operation.

- (6) Respirators and gas masks will be used by all personnel who handle pesticides. When engaged in mixing or applying concentrated chemicals where dust, mists, or vapors are present, a combined dust and organic vapor type respirator will be worn. All respirators, gas masks, cartridges, and canisters utilized must be OSHA/MESA approved for the specific pesticide being handled.
- (7) Individuals who handle pesticides must wear an approved respiratory device appropriate for protection against those pesticides. Paint respirators do not provide protection from pesticide vapors.
- (8) During fumigation and in some phases of aeration, an OSHA approved full faced mask and canister or self-contained air pack will be used.
- b. Protective clothing. Protective clothing and gloves (made of tough fabric with synthetic coating resistant to oils, greases, petroleum solvents, acids, corrosive chemicals and abrasive) will be used. Rubber latex gloves are also satisfactory.
- (1) As indicated above, handlers of methyl bromide should not wear gloves. If they are used, trapping of the liquid or vapor under the gloves may result in chemical burns.
- (2) Other protective clothing, such as coveralls or fatigues, must be worn by operators who handle

concentrates or who are continuously exposed to insecticide formulations.

(3) Extra sets of coveralls or fatigues should be available to operators in the event clothing should be contaminated by spillage or other causes.

(4) If insecticides or a fumigant such as methyl bromide is spilled on the skin, it should be washed off immediately with soap and water. If clothing or shoes become contaminated they should be removed at once and a shower or bath taken. Methyl bromide will cause severe "burns" if allowed to contact the skin and remain there momentarily. This can occur in gloves, under watch bands, rings, etc. Gloves and other close fitting items should not be worn while handling methyl bromide.

## 3-416. First Aid Suggestions

- a. General. The first consideration when an accident occurs, such as gross contamination of the body with concentrates or the inhalation of poison gases, is the removal of the victim from the toxic atmosphere or from other types of continued exposure. No matter what the nature of the poison, it is important to reduce the exposure. Anyone who has collapsed in an atmosphere of toxic gas should be removed to fresh air immediately. In the case of other exposures, decontamination should be carried out as soon as the condition of the patient permits.
  - (1) In the event of internal poisoning—
- (a) If the victim has stopped breathing, clear airway and apply artificial respiration.
- (b) Comply with the antidote and first aid treatments recommended on the label of the poisonous substance.
- (c) If victim is unconscious, do not attempt to administer antidotes internally.
- (d) If victim is cold, wrap in blankets but do not apply hot objects.
  - (e) Transfer victim to hospital.
  - (2) In the event of serious skin contamination—
- (a) Remove all contaminated clothing and flood contaminated areas of skin with copious amounts of water.
- (b) Follow this with a thorough washing with soap and water.
  - (c) Report to a physician for examination.
  - (3) In the event of poisoning by toxic gases—
- (a) Remove victim to fresh air quickly. Personnel doing this moving will be equipped with ap-

propriate respiratory protection devices. If victim's breathing has stopped or is weak and intermittent, artificial respiration should be given promptly and persistently.

(b) If victim has been exposed to HCN, break an amyl nitrate pearl in a cloth and hold lightly under victim's nose for 15 seconds. Repeat five

times at 15 second intervals.

(c) Remove contaminated clothing but keep patient warm.

(d) Send for a physician.

- (e) If, during or after methyl bromide fumigation, the individual should experience symptoms such as nausea and vomiting, dizziness, double or blurred vision, ringing in the ears, extreme fatigue, headache, loss of appetite, abdominal pain, impaired, blurred, or hesitant speech, or mental confusion, he or she should report immediately to a physician.
- b. Symptoms of phosphine poisoning. The early reactions to phosphine poisoning are acute, obvious, and readily reversible.
- (1) Slight poisoning. Sensation of tightness in chest and diaphragm, vomiting and diarrhea.
- (2) Medium to severe poisoning. Dizziness, numbness and cold sensation in limbs, anxiety, sound of ringing in the ear, difficult or painful breathing, dry cough.
- (3) Serious poisoning. Bluish coloration of the skin, muscular spasms, cardiac insufficiency, and coma.
- (4) First aid measures for phosphine poisoning. Only persons equipped with appropriate respiratory protective devices should remove the victim immediately into the open; medical assistance should be called immediately. Treat as for shock—place victim in a recumbent (flat) position, with face turned to side and clear airway, if unconscious, and keep quiet and warm; apply oxygen breathing equipment, if available, or use positive pressure ventilation (mouth-to-mouth resuscitation), if necessary. Do not give any antidote—in particular, do not give any substance comprised of fats and oils (e.g., castor oil, butter, milk).

# 3-417. Effect of Pesticides on Aquatic Life and Wildlife

a. Improperly handled pesticides may be carried by wind and water into adjacent or distant areas where they may contaminate wildlife. Unless basic precautions are observed, unnecessary injury is caused by drift of pesticides to wooded areas occupied by wildlife, drift to land area not intended for treatment and drift to fishbearing waters. Use of the more granular form or a coarse spray makes possible better control and less drift during application. Runoff or washoff by rain from treated areas to fishbearing waters must also be guarded against.

b. Pesticides differ as to their toxicities to mammals, birds and fish and their persistence in the environment. The addition of any persistent chlorinated hydrocarbon pesticide is likely to result in damage to aquatic life. Therefore, as concentrations of these chemicals increase in the aquatic environment, progressive damage will result. These compounds may persist unchanged for many years and consequently present a continuing threat to animal communities. The use of other kinds of chemical pesticides in or around surface waters may produce a variety of acute or chronic effects on fish or invertebrates. Because these other chemicals are usually not as persistent as the chlorinated hydrocarbons, some of them can be used around water, but only in amounts below those that produce chronic damage to desirable non-target species.

#### 3-418. References

The information contained in this section is primarily for the guidance of operations supervisory personnel, specialists in care and preservation of supplies, and insect and rodent control personnel. Included is specific technical and practical information necessary to develop and maintain an adequate pest control program. Additional technical information is available in TM 5-632/AFM 9-16/NAVIAC MO-310; TB MED 144/NAV MED P-5052-26/AFM 161-3; the Armed Forces Pest Control Board Technical Information Memorandum No. 11, Hydrogen Phosphide Fumigation with Aluminum Phosphide, MIL-STD-904, and MIL-STD-1486.

# Section 5. INVENTORY

	Paragraph
General	3-501
Principles of inventory control	3-502
Inventory planning	3-503

우리 2명 : 경영화 2명 2명 2명 경영하다 보는 전 2명 3명 2명	
Inventory training	3-504
Preparation of material for inventory	3-505
Summary	3-506

#### 3-501. General

- a. To assist in achieving optimum economy in the management and use of DOD supplies, it is essential that accurate records of quantity, condition and ownership of the individual items be maintained. Periodic verification of these records is accomplished through physical inventory. In its most basic form, physical inventory is an actual count of an item at its storage site. In the broad sense, inventory of military property involves a number of actions other than a physical count of the material on hand. Some of these actions are the verification of stock record balances; the investigation, disclosure and analysis of cause of inventory discrepancies; and the adjustment of stock records and financial records. This section is concerned primarily with the actions related to the physical count of material.
- b. Certain items have characteristics which require that they be identified, accounted for, secured, segregated or handled in a special manner to ensure their safety or integrity. Because of these special considerations, inventory of such items is called a controlled item inventory. Controlled items are—
- (1) Classified items. Material which requires protection in the interests of national security.
- (2) Sensitive items. Material which requires a high degree of protection and control due to statutory requirements or regulations such as narcotics; precious metals; items which are of high value, highly technical or of a hazardous nature; and small arms, ammunition, explosives, and demolition material.
- (3) Pilferable items. Material having a ready resale value, civilian utility, or application as to personal possession and are, therefore, especially subject to pilferage.
- c. Department of Defense Instruction 4140.35, Physical Inventory Control for DOD Supply System Material, is the basic document DOD Components use to implement DOD inventory policies.
- d. The DODI 4140.35 sets forth a minimum acceptable accuracy level for sample inventories below which a 100 percent inventory must be taken. The DOD Components may establish a more stringent accuracy level if deemed necessary. Only ma-

jor discrepancies (see glossary of terms) are used to compute accuracy.

e. DOD Component activities submit a quarterly Report of Inventory Control Effectiveness (RCS DD-I&L (Q) 935) to the next higher headquarters. This report is used to assess inventory performance.

## 3-502. Principles of Inventory Control

Physical inventory procedures must provide positive control of "infloat" material and documentation. This control will include material release orders, receipts, adjustments, and catalog data changes. Mutually agreeable cutoff dates must be established between storage and accountable activities for inventory actions. Pre-inventory and post-inventory actions must be identifiable to ensure proper consideration in balance reconciliations. Effective inventory control must also include the following:

- a. Establishment of an inventory control organization to encompass all related inventory functions.
- b. Establishment of training programs to develop optimum capability for the conduct of inventory.
- c. Establishment and maintenance of accurate stock location records. See section 3 of this chapter.
- d. Accomplishment of all directed physical inventories.
- e. Adequate control over any movement of material undergoing inventory.
- f. Accomplishment of required research prior to processing adjustment actions.
- g. Isolation of causes of potential and actual discrepancies. Initiation of corrective action to prevent recurrence.

# 3-503. Inventory Planning

Each physical inventory must be planned, taking into consideration the following:

- a. Number of items involved.
- b. Number of locations involved.
- c. Manpower requirements.
- d. Anticipated productivity.
- e. Scheduling to obtain maximum efficiency and accuracy.

f. Preparation of material in storage to facilitate inventory counting.

#### 3-504. Inventory Training

With the factors in paragraph 3–503 established, actual steps to accomplish the inventory should be outlined. Each individual participating in the inventory should be given a specific assignment. Prior to starting inventory actions, necessary training for all personnel involved, both military and civilian, should be completed. Required training should be conducted through coordination of all organizational elements concerned. Suggested points for emphasis in the conduct of this training are—

- a. Purpose of inventory.
- b. Familiarization with the inventory organization and each participant's part therein.
- c. Importance of attaining the highest degree of accuracy.
  - d. A thorough orientation in-
- (1) Recognition and recording of correct stock number, nomenclature, and unit of measure.
  - (2) Item identification.

- (3) Condition classification, such as serviceable, unserviceable, or other appropriate category.
  - (4) Counting techniques.
- (5) Recognition of improper or unsafe material storage practices.


## 3-505. Preparation of Material for Inventory

Every effort should be made to arrange and maintain stored material in the best possible manner through application of proper storage practices. Prior to taking an inventory, stocks should be—

- a. Properly identified and clearly marked.
- b. Identified as a "Do Not Inventory" item, when these items are not to be included in the inventory count.
- c. Stored in the minimum number of separate locations commensurate with proper storage practices.
- d. Stored uniformly with respect to quantity per container and containers per pallet.
- e. Clearly highlighted to show where conditions other than those in d above exist.

#### 3-506. Summary


The following series of illustrations emphasize some key elements in properly accomplishing inventory actions.

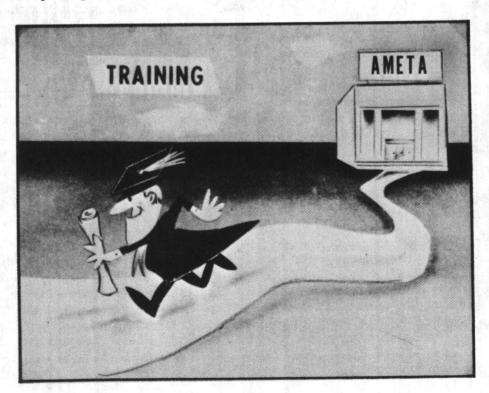

DOD 4145.19-R-1

a. Adequate training is a prerequisite of efficient inventory control operations.

(1) DOD educational centers offer many specialized courses of instruction in inventory control, statistical sampling, and quality control. Such courses of instruction will provide personnel with a high degree of skill.

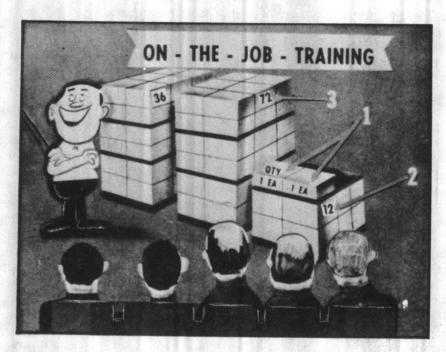

(2) In addition to formalized off-post training, each individual assigned to inventory activities should be given adequate on-the-job training to include the following:

Preparation of documentation.

Identification of items.

Difficulties involved in counting at each type location.

Safety requirements.


Security considerations.

(3) These training suggestions, if effectively organized, should result in each individual being fully qualified for this particular assignment.

15 September 1979 DOD 4145.19-R-1



b. Each error that creeps into the record keeping system has a potential adverse effect on inventory actions. The ideal attack on this problem would be to eliminate the introduction of errors. But with thousands of transaction entries made each day, it is impossible to prevent error introduction in total. So we do the next best thing—we try to minimize error introduction and contain error growth. Quality control actions are designed to do this as are the location survey and location audit procedures.

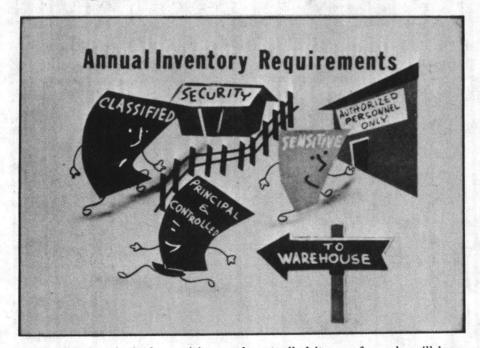


c. Classified, principal, sensitive, and controlled items of supply will be considered separate lots. A complete inventory of these lots will be accomplished

once each year or more frequently if desired by the installation commander or accountable property officer. There are sound reasons for this.


- (1) Classified items require special protection because of their security designation and, therefore, should be given special treatment to insure that each of these items is accounted for and our national interest is protected.
- (2) Principal items are of strategic importance, high monetary value, unusual complexity of issue, and often involve procurement difficulties; therefore, these items should also be given special attention.
- (3) Sensitive items have a ready sale in illicit markets and are especially likely to be pilfered. A periodic inventory of each of these items is essential for their protection and to discourage pilferage attempts.
- (4) Controlled items of supply are closely supervised because of their basic cost, operational essentiality, complexity, or stock position and should also be given special attention.
- d. An important point to keep in mind when performing inventories and reconciliations is that inventories are normally conducted on an open "business as usual" concept.
- (1) We can have both documentation and material "in-float." Both these situations must be considered when counts and recorded balances do not agree. The next two illustrations depict this point.



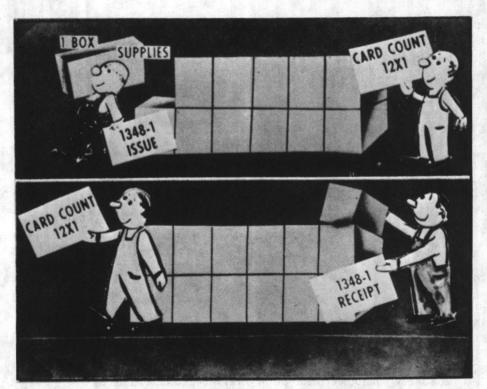


(2) We can see how, through normal receipt and issue transactions, counts may vary from balances and require recounting. Actions such as these are considered as float documents and should be reviewed carefully prior to submitting final inventory results.

DOD 4145.19-R-1

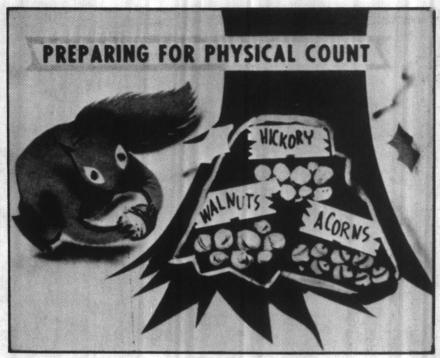


e. A survey conducted prior to an inventory, to determine and correct deficiencies, is an important phase of inventory preparation. During this period, every effort should be made to insure that conditions detrimental to the count are detected and eliminated. We know that normal warehouse activities tend to disrupt the orderly placement of stocks, identification placards, and containers on pallets, in pallet racks, or in bins. If left uncorrected, these and other warehousing irregularities could seriously deter satisfactory completion of the inventory. A preliminary survey which includes all facets of storage and warehousing methods that may interfere with inventory is a recommended pre-inventory action. Let us not compromise the quality of the inventory because we did not make adequate preparations. The next seven illustrations show some of the storage situations that may be observed in a pre-inventory survey.

15 September 1979

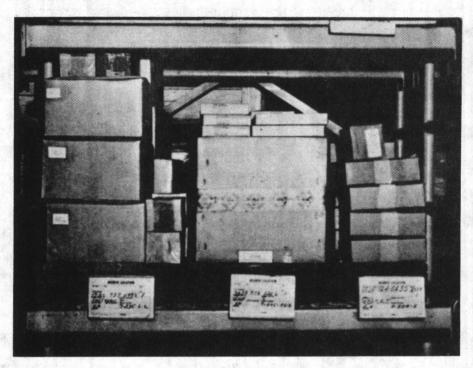


(1) During a preliminary survey you may discover conditions such as pictured above. Here is a pallet rack containing material stored in such a manner that many handling actions would be necessary to determine quantities. When material is originally palletized, every effort should be made to place containers in such a manner that nonmenclature and quantities can be easily seen.

DOD 4145.19-R-1 15 September 1979

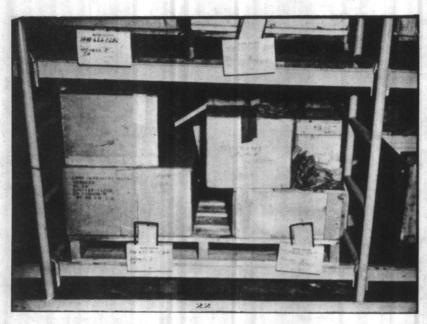


(2) This is another example of material not ready for inventory. No markings on some of the containers and loose pieces in a rack location mean opening, counting, and repackaging most of the stock; thereby, increasing the chance for error. This is a condition which should be eliminated during the preliminary survey.

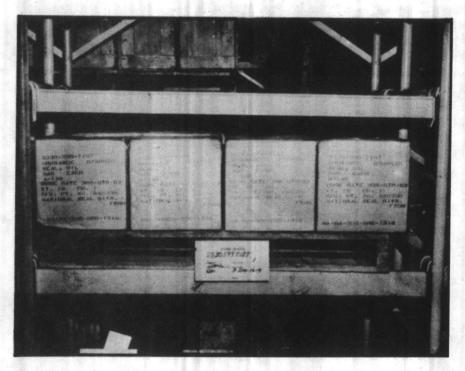


(3) Here material is cartonized and placed to facilitate convenient recording of quantities without removal of stocks from the rack. Original containers such

as these, or sealed and properly marked packages, need not be opened for inventory counting.

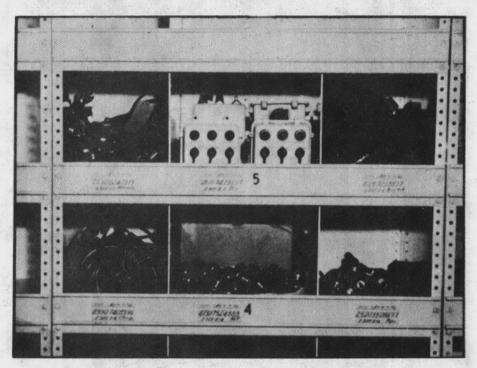

(4) These are loose bin stocks which are not properly prepared for inventory. Placement in unit packs would accelerate the process of counting and help eliminate counter errors.

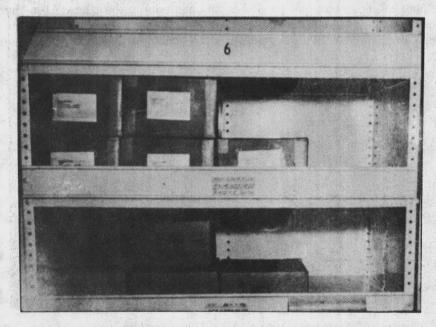


(5) Identification and quantities here are exposed in such a manner that counting will be a simple matter.

DOD 4145.19-R-1 15 September 1979




(6) Here is a situation which can cause counting errors. Note that this is a multi-item stack. A careless counter could inventory the whole stack as one item. Next, note the open box (not labeled as an open box) in the stack. Also, there are no markings visible on this box or on the one along side of it. Storing more than one stock number in a bulk storage stack should be avoided.

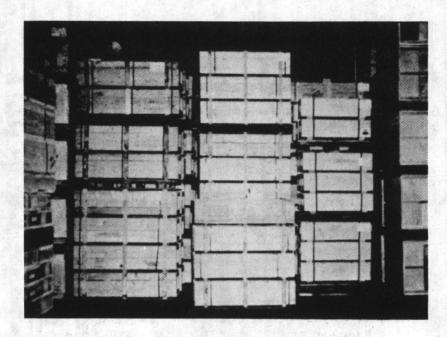


(7) This example of warehousing reveals a condition which, if not recognized, could cause an inventory error. All three rows in the photo are the same item, but the row on the right has a different size box. An inventory counter, if not alert for such a condition, might believe these boxes are another item and omit the quantity from the total stock in location.

DOD 4145.19-R-1 15 September 1979

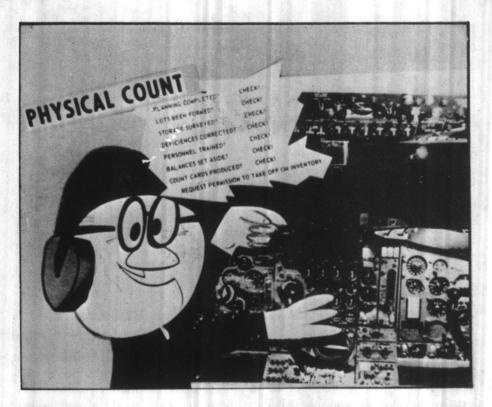

f. Now that we have approached the starting point, let's take a final look at our pre-inventory checklist to assure that we take off in the right direction. When all points check affirmative, we can proceed with physical count and get the inventory off the ground.

15 September 1979 DOD 4145.19-R-1

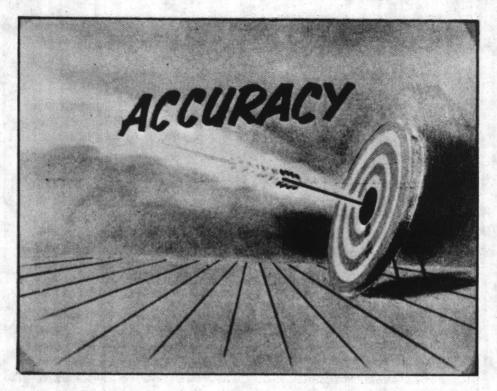

g. When starting your physical count, all actions should be aimed at one target—ACCURACY. To hit this bull's-eye means a successful inventory with a minimum of effort and costs.



h. In striving for accuracy, nothing can be left to chance. When conducting the physical count, be sure you know what you are counting—don't guess. You cannot count what you cannot see, so examine bulk and bin locations carefully. Make a note of discrepancies found and notify the appropriate office so that corrective action can be taken.

15 September 1979 DOD 4145.19–R-1




i. During the first count phase, the quantities indicated on containers and pallet and/or stack cards may be accepted provided an examination of the containers reveals no obvious errors. All irregularities (warehousing deficiencies) will be reported to the appropriate activity for correction.



j. As this picture illustrates, it doesn't pay to take too much for granted. Although original containers, or packages that have been packed and sealed locally, need not be opened for inventory, counters should be continuously alert for questionable containers. If there is a reason to believe that the quantity is inaccurate, or the identification doubtful, the container should be opened, verified, and count recorded accordingly.

DOD 4145.19-R-1

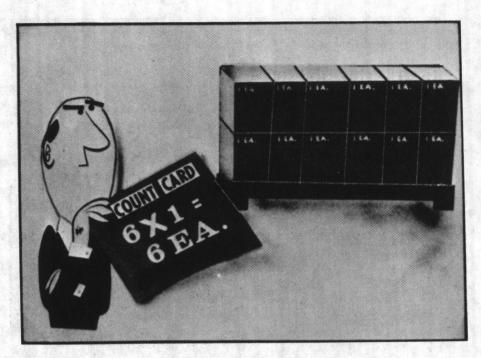

k. Incorrect counting is the prime example of how erroneous adjustments and secondary counts are generated. After you have recorded your count, give it a second look to assure that what you are going to report is correct.



l. An important part of every inventory is the research and investigation conducted on discrepant items prior to and after the stock records are adjusted.

(1) Research and investigation is the responsibility of the inventory and stock accounting activities. Inadequate research actions will result in unwarranted adjustments and increases the number of complete inventories. A review of items prior to updating stock records, could eliminate an inventory adjustment.

(2) Research documents prepared during inventory phase to determine if material was in float, or if change had occurred which affected the quantity identified or condition of the item. After adjustments have been processed to the stock records, a complete and thorough investigation will be made on items designated by the accountable property officer. Research lists prepared from the adjustment routine must be screened and transaction activity histories prepared on each major discrepancy. Review histories for receipt, issue, and adjustment documents prepared during inventory, which may have been in float at the time count was conducted. Determine whether there are posting errors or adjustments of offsetting quantities since the last inventory that would explain the discrepancy and preclude report of survey actions.

m. When an approving authority is examining inventory adjustment reports prior to approval, he/she may decide through personal judgement and experience that an item shortage may be due to loss through pilferage, theft, or other unauthorized means. When this happens, and the storage cannot be explained by offsetting adjustments, erroneous posting, or improper shipments, he/she will direct preparation of a report of survey. The Report of Survey (DD Form 200), will be prepared by the responsible officer and processed in accordance with applicable Service Agency regulations.

# REPORT OF SURVEY TO MORE TO MORE TO CONTROL TO MORE TO MORE

Section 6. CARE OF SUPPLIES IN STURAGE	Paragraph
General	3-601
Policy	3-602
Objectives	3-603
Responsibilities	3-604
Basic COSIS program actions	3-605
Guidelines for systematic inspection of material in storage	3-606
Special considerations in care of stored material	3–607
Preservation and packing methods for material protection	3–608

#### 3-601. General

The care of supplies to assure a ready for issue condition is an important task. The DOD Components prepare and publish detailed instructions to provide for the care of items for which they have storage responsibility. Such publications will agree with the policies of this regulation. The use of quality control techniques and storage serviceability standards will enable a Care of Supplies in Storage (COSIS) program to be accomplished at minimum cost with optimum efficiency. Quality control and deterioration data will be generated to be used for improving standards of serviceability, specifications, and procurement quality standards.

#### 3-602. Policy

a. A program for COSIS must include—a quality control system for inspection and or test; a system for reporting and recording of quality control data; provisions for the entry of true condition code of material into item balance records; performance of exercising actions on applicable material; and a system to assure corrective actions are accomplished

on material deficiencies uncovered by inspections. DOD Components will determine the degree of activity required in each phase of the program and establish procedures. Major factors affecting the degree of activity are the type of item, type of storage provided, and anticipated length of storage.

- b. For material not covered by storage service-ability standards or other adequate inspection procedures, frequency of material inspection (excluding shelf-life items) will be based on the type storage provided for the material (table 3–1). Frequency of inspection for shelf-life items will be based on expiration dates.
- c. Adequate protection from the elements and environmental conditions will be provided by means of proper storage facilities, preservation, packing, or a combination of any or all of these measures.
- d. The results of quality data generated from analysis of inspection of items during shipping, set assembly, special inspections directed by the item manager, customer complaints, and other quality feedback information will be used to supplement

the regular cyclic inspection results to evaluate the adequacy of the COSIS program.

Table 3-1. Inspection frequencies for material not covered by storage serviceability standards.

	Frequenc
Type of storage	(months)
Controlled humidity (or equivalent	60
rating when such rating has been	
approved by higher authority)	
Controlled temperature warehouse	30
Noncontrolled temperature warehouse	24
Shed/transitory shelter	12
Open	6
### [전투자 : 100] 11 12 12 12 12 12 12 12 12 12 12 12 12	

## 3-603. Objectives

The objectives of a COSIS program are to-

- a. Maintain material readiness posture in CONUS and oversea commands at an optimum level.
- b. Assure that the true condition of material is known and recorded through cyclic inspections and tests.
- c. Provide a basis for realistic workload forecasts to determine and substantiate budget and manpower requirements.
- d. Assure that only material representing current or anticipated supply system requirements is scheduled for preservation/represervation and packing to preclude expenditure of resources on excess or obsolete material.
- e. Permit adjustments in storage inspection frequencies and quality control efforts to provide greater efficiency and economy through analysis of data concerning variation in deterioration rates.

#### 3-604. Responsibilities

- a. The care of supplies is an integral part of the storage and quality control responsibilities. To discharge these responsibilities properly and with a minimum of cost, a carefully developed program is necessary at all echelons.
- b. Where the stocks of one DOD Component are stored in a facility of another DOD Component, the Component operating the facility is responsible for accomplishing the care of supplies in the manner established by the owning Service or Agency or in accordance with existing cross-service agreements.

#### 3-605. Basic COSIS Program Actions

- a. Performance of scheduled inspection actions on material in storage.
  - b. Performance of required exercising actions.
  - c. Proper identification of items.

- d. Determination of adequacy of storage environment, preservation, packing, and marking.
- e. Accurate determination of item condition and posting of this condition to record.
- f. Arresting all forms of deterioration that will adversely affect the end use of required items.
- g. Restoration of required items to a serviceable condition for issue.
- h. Detection of fungi, mildew, spoilage, insect infestation, and/or rodent, or other pest damage to stocks; prescribe or administer treatment; and ensure that adequate preventive and corrective measures are taken. (See sec. 4, this chap.)
- i. Inspection of shelf-life items and assignment of condition codes thereto in accordance with DODI 4140.27, Identification, Control, and Utilization of Shelf-Life Items.

Note: The term shelf life does not apply to Class V items.

- j. Assuring that all applicable elements are informed of any unsatisfactory conditions found to exist in stocks; the reasons therefore; corrective actions required and taken; any pertinent data which can be used to improve the item and its care; and the packaging and/or storage environment considered to be best suited for its continued storage.
- k. Recommending to the applicable DOD Component, basic changes in serviceability standards or adaptations to local conditions, such as storage environment or availability of specialized testing capacity not normally found in storage installations. For example, quality analysis may indicate the need for adjusting the frequency of inspection, or changing the preservation procedures, or for revision of Acceptable Quality Levels (AQL) or defect classifications.

# 3-606. Guidelines for Systematic Inspection of Material in Storage

a. Cyclic inspection. Inspection of material in storage is an extremely important step in the evaluation of material quality. Its purpose and objectives are directly related to a COSIS program. In many instances, long periods of time elapse from the time of receipt of material by the storage activity until ultimate issue/shipment to the user. During this interim period stored material must be systematically inspected to detect condition, degradation, deterioration, corrosion, damage and other deficiencies caused by improper storage methods, extended periods of storage, or by the inherent deterioration characteristics of the mate-

DOD 4145.19-R-1

al. Minor deficiencies must be detected before ey become of major significance, thus providing r corrective actions before the material becomes is in the serviceable or unusable. In this regard, a promam of cyclic inspection identifies those stocks hich require corrective preservation and packing assure that material is maintained in a service-le condition and identifies those assets which retire condition reclassification to a lesser degree serviceability.

b. Effective and efficient execution of the Cyclic spection system requirements will assure that—

- (1) Stored material is inspected at intervals incated by the assigned shelf-life code, inspection equency code, or type of storage afforded the aterial.
- (2) Quantitative data generated by the cyclic spection system are thoroughly analyzed, sumurized, and furnished periodically to management assist in the elimination of causes for deficiencies.

# 3-607. Special Considerations in Care of Stored Material

a. Material in open storage. Ideally, all material should be stored in covered storage space. However, since covered space is usually at a premium, there are occasions when material must be placed in open storage areas. These items must be preserved properly to withstand the exposure to elements. Additional protection can be gained by use of plastics, tarpaulins or portable shelters over material. Figures 3–17 and 3–18 are a few examples.

(1) Care must be exercised in the covering of materials placed in open storage. The relatively quick temperature changes, to which such materials are subjected, cause moisture to condense on the material, and, unless this moisture is evaporated and carried away by adequate ventilation, will cause the stores to mold or decay. In the case of most metal products moisture condensation will

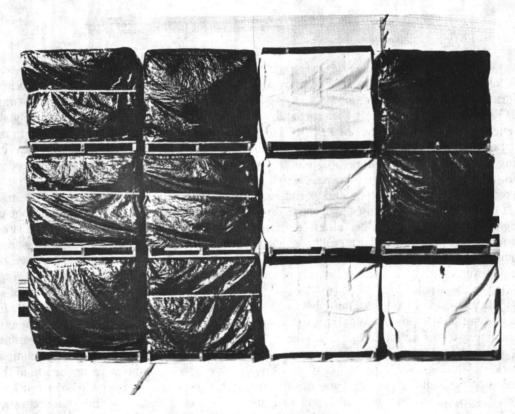


Figure 3-16. Individually protected pallet loads.

DOD 4145.19-R-1 15 September 1979

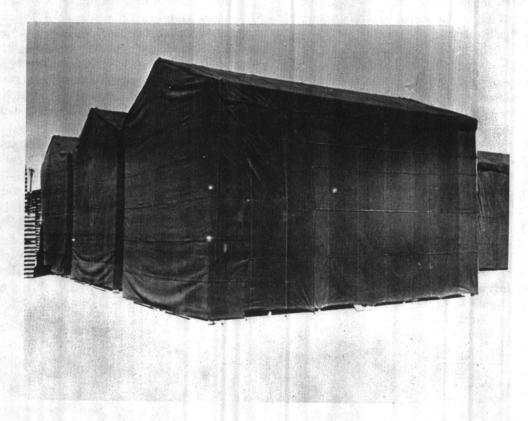


Figure 3-17. Tarpaulin type shed arrangement.

cause excessive rust, resulting in a high rate of deterioration for the stored item.

(2) When covering materials with tarpaulins or other such materials a clearance of 12 to 18 inches should be maintained between the bottom of the covering and the ground, where possible. In the covering of machinery or other materials which are not boxed, the tarpaulin should extend to, but never below, the top of the dunnage on which the material is being stored. To further induce air circulation in and around the stored material an opening should be provided in the upper area of the stack covering; it should be arranged, however, so that rain or snow cannot enter the stack.

(3) All material stored outdoors should be elevated above the ground by use of dunnage or specially built platforms or foundations (see chap. V, sec. 3, para. 5-305b(6) for exception for wheeled and tracked vehicles). The type of storage area will determine to a great extent the type of dunnage required to provide adequate ventilation beneath the stack. On well-drained paved or black top areas,

the dunnage used should provide a minimum clearance of 4 inches between the stores and the ground. On well-drained gravel or similarly surfaced areas the dunnage should be increased to provide a minimum clearance of 8 inches. Where it is necessary to utilize ungraded or poorly drained areas for storage, the dunnage used should provide a minimum clearance of 10 inches above the highest possible water level. Such clearances do not pertain to the storage of lumber in open areas. (For detailed information on lumber storage, see chap. V, sec. 1).

(a) It is impossible to specify the dunnage bearing surface required for all storage conditions. On good concrete surfaces 4 by 4-inch dunnage spaced on 2-foot centers would be sufficient to support a stack of comparatively heavy equipment. However, if this same stack of equipment were to be stored on an ungraded or comparatively soft storage area, the bearing surface of the dunnage on the ground would have to be increased in proportion to the decrease in the supporting quality of the storage area. Therefore, the storekeeper must con-

sider both the weight of the proposed stack and the supporting quality of the surface of the storage area in determining the type and quantity of dunnage required for each stack.

- (b) Under certain conditions, concrete blocks may be substituted for, or used in conjunction with, wood dunnage. Warranting circumstances could include—moist or humid areas where damp rot or termite infestation may occur; dry or torrid areas where dry rot or wood beetle infestation may occur; planned long term storage programs; or the lack of salvage dunnage, necessitating the use of new materials, in which case the cost factor would be considered.
- (4) Materials stored in the open require closer attention than those stored in warehouses or sheds. Such material must be inspected for indications of preservation failure, such as paint blisters due to rust beneath the paint, flaking or peeling of paint, or deterioration of other applied preservative. Usually, this is indicated by small areas of rust or corrosion on the preserved item. Additionally, after hard rains, heavy snows, windstorms, and abrupt changes in the weather, stocks must be inspected for torn or displaced coverings, accumulations of water or snow, or other conditions that may adversely affect the material, and for damage to corrosion preventives which have been applied. More frequent inspection is required when the atmosphere contains industrial waste, dust, salt, or acids; when the relative humidity is high; or when the material is subjected to wide variance in temperature.
- b. Shelf-life items. Items which possess deteriorative or unstable characteristics to the degree that a storage time period must be assigned to assure that they will perform satisfactorily when issued. There are two types of these shelf-life items. Type I shelf-life items have a definite (nonextendable) storage time period terminated by an expiration date which was established by empirical and technical test data. Type II shelf-life items have an assigned storage time period which may be extended after the completion of prescribed inspection and/or restorative action.
- (1) Storage personnel are responsible for executing the control program as directed by the inventory manager. Effective shelf-life control at the warehouse level requires vigilance on the part of all personnel, careful supervision, and understanding of the intent of the controlling procedures.

Shelf-life items will be identified on storage records by the assigned shelf-life codes. Warehousing practices should permit ready access to oldest stocks and controls will be established to ascertain that the releasing authority's directives, as to which stock to issue, are followed. Stocks and records will also reflect appropriate condition codes. Normally, shelf-life items will be issued on a First-In, First-Out (FIFO) basis although exceptions to this policy may be necessary when circumstances require.

(2) Stocks other than shelf-life items should also be rotated by use of FIFO principle wherever practicable.

- c. Exercising. Storage serviceability standards may require exercising of certain equipment (e.g., weapon recoil mechanisms, certain vehicles, certain aircraft components). These exercising actions must be done when required.
- d. Special material condition marking. Material condition tags/labels (MIL-STD-129) will be used to identify material when material may possibly become mixed during maintenance, storage, or shipment within (or between) installations, or when physical evidence of inspection is necessary for material control to prevent duplicate inspections. These forms/labels are not for indiscriminate use on material that presents no problem in storage or transfer. The five material condition tags and five material condition labels to be used in identifying material are itemized and their use explained on table 3-2. To preclude inadvertent shipment of unserviceable or condemned material, such material should be stored separately from serviceable material.
- (1) The tags/labels conspicuously marked "SERVICEABLE," "UNSERVICEABLE (REPARABLE)," "UNSERVICEABLE (CONDEMNED)," "SUSPENDED," or "TEST/MODIFICATION," as applicable, will contain adequate information regarding the identity and condition of the item.
- (2) Any additional information or data required to assist in depot material control may be added to the tags/labels provided that such data are compatible with the prescribed usage of each tag/label.
- (3) It is extremely important that material condition tags/labels be protected from being removed, defaced, mutilated, or altered, to avoid duplication of work in redetermining the condition and identification of the material.

#### DOD 4145.19-R-1

(4) These tags and labels may be obtained through normal supply channels.

# Table 3-2. Listing of materiel condition tags, labels, and instructions

Materiel condition tags and labels

DD Form 1574 (Serviceable Tag— Materiel)

DD Form 1574-1 (Serviceable Label—Materiel)

DD Form 1577-2 (Unserviceable (Reparable) Tag— Materiel)

DD Form 1577–3 (Unserviceable (Reparable) Label—Materiel)

DD Form 1577 (Unserviceable (Condemned) Tag—Materiel)

DD Form 1577-1 (Unserviceable (Condemned) Label—Materiel)

DD Form 1575 (Suspended Tag— Materiel) Use

To identify serviceable materiel in condition codes A, B, and C.

To identify
unserviceable
materiel that is
potentially
restorable to a
usable condition.
This includes
materiel in
condition codes E,
F and G.

To identify
unserviceable
materiel that is
condemned as
unsuitable for
restoration to a
usable condition
(condition codes H
and P.)

To identify materiel that is suspended (stocks awaiting classification, 15 September 1979
Materiel condition

tags and labels
DD Form 1575–1
(Suspended
Label—Materiel)

returned materiel awaiting classification, or stock held pending negotiation or litigation (condition codes J, K, and L)).

Use

DD Form 1576 (Test/ Modification Tag— Materiel)

DD Form 1576–1 (Test/ Modification Label—Materiel) To identify serviceable materiel that requires test, alteration, modification, conversion, or disassembly prior to issue (condition code D).

(5) Responsibility for preparation and application of material condition tags/labels will be restricted to quality assurance/quality control/inspection personnel.

# 3-608. Preservation and Packing Methods for Material Protection

Inspection of material under a COSIS program may generate a need for a preservation/packing action.

a. Basic regulation. The Joint Regulation AR 700–15/NAVSUPINST 4030.28A/AFR 71–6/MCO 4030.33A/DSAR 4145.7 (Packaging of Material) provides uniform criteria for use by all DOD Components in the selection and prescription of packaging.

b. Detailed criteria. Specific instructions governing basic techniques and details of cleaning, selecting and applying of preservatives, packaging, and packing to protect material against deterioration and damage are prescribed in appropriate Government specifications, standards, and in Service/Agency directives.

## Section 7. OPERATIONS IN CONTROLLED HUMIDITY SPACE

	Paragraph
General	3-701
Policy	3-702
Responsibilities	3-703
Criteria for facility selection	3-704
Selection of supplies	3-705
Material protection factors	3-706
Utilization factors	
Equipment and operations factors	

#### 3-701. General

a. In high humidity environment, conventional storage facilities do not afford adequate protection (to certain types of supplies) against damage and deterioration that can result from excessive humidity. This is particularly applicable where supplies are to remain in storage for extended periods. Items selected for CH protection will normally be those items afforded a minimum degree of military protection, commercially packed or bare. To ensure that the capability of material to perform its intended function will not be impaired or that supplies will not become unfit for consumption as a result of exposure to excessive humidity, methods have been developed to provide control of humidity within storage warehouses.

b. The control of humidity within storage structures is a method of protection—not a method of rejuvenation. Controlled humidity storage will not remove rust that is already present, nor will it otherwise restore material that has deteriorated prior to storage. Material placed in this type storage in a condition other than clean may continue to deteriorate, particularly when contamination is of a corrosive nature.

c. The recommended relative humidity (RH) levels for broad categories of material are as follows:

Material	Percent RH
Metals	40-50
Plastics	Below 70
Paper	40-55
Wood	40-55
Textiles	40-50
Rubber	30-100
Leather	Below 70
Optics	Below 60

#### 3-702. Policy

Controlled humidity space will be considered premium space and will be occupied at all times to the maximum practicable extent on a priority basis with those items to which controlled humidity affords

the greatest degree of protection and benefit. Procedures governing the control and usage of exterior doors in controlled humidity buildings will be developed locally to ensure that the operation of dehumidification machines is kept to a minimum.

#### 3-703. Responsibilities

a. The following responsibilities will be assigned to a proper organizational element:

(1) Operate, calibrate and maintain humidity reduction equipment and all meters, recording devices, and other similar equipment related thereto.

(2) Accumulate, summarize, and distribute developed "control" data to the extent required to effect efficient operation of equipment and maintenance of humidity levels.

(3) Correct, or bring to the attention of the proper persons, any conditions exposed which indicate undesirable trends in inside moisture levels, unreasonable continuous operation of dehumidifying equipment, excessive "open door time," or any other factor which suggests excessive moisture ingress.

(4) Assure that full objectives of the controlled humidity storage program are realized, i.e., maximum practical utilization of this asset by reduction and retention of inside relative humidity at prescribed level through prudent control of "open door" time as well as other applicable moisture influencing considerations set forth herein. Insure the existence and maintain surveillance over safe operating conditions with regard to the potentiality of carbon monoxide gas.

b. A centrally located exterior relative humidity recording instrument will be used as a means to advise controlled humidity space users when outside relative conditions are at such level as to allow access doors to remain open if desirable, and also to close doors when outside conditions rise above 50 percent relative humidity.

c. Conditions in controlled humidity buildings

which require repair will be reported as soon as detected.

# 3-704. Criteria for Facility Selection

- a. Controlled humidity storage space should be provided for areas where the outdoor relative humidity is above 50 percent for more than 50 percent of the total time.
- b. Equipment for the control of humidity in storage space will be operated to provide an environment not to exceed 50 percent relative humidity.
- c. The modern, permanent warehouses (WW II and later) are preferred for the storage of current distribution stocks. These warehouses should be converted to controlled humidity space (by section or complete warehouse) as required and permitted by available funds.
- d. The older type permanent warehouses with inconvenient loading docks or ramps, or other features which prevent maximum efficiency in storage operations will, when economically practicable, be converted to controlled humidity space for the long-term storage of selected items, including mobilization reserve stocks and industrial equipment reserves, which normally are not stored with regular distribution stocks for rotation.
- e. Sections of warehouses used exclusively for shipping, receiving, and box shop operations normally will not be converted to controlled humidity space.
- f. Considering cost of installation and continuing cost of operation, controlled humidity space can be installed most economically in permanent and standard portable frame warehouses, such as—
- (1) Permanent type warehouses constructed with built-up roof, concrete roof decking with steel framing or laminated wood roof framing, block or brick side walls and dock level floors.
- (2) Permanent type warehouses, gabled roof with steel framing; block or tile walls, windows, and louvers.
- (3) Permanent type warehouses constructed with monitor in center third of roof, block or brick side walls, and dock level floor.
- (4) Standard portable frame warehouses of a type properly constructed for controlled humidity installation.
- g. The mobilization type warehouses, built-up roof with timber framing, monitor on roof; with continuous window openings, wood or asbestos siding, should not be considered for conversion to con-

trolled humidity space, except as a low priority, due to the expense of such conversion.

# 3-705. Selection of Supplies

- a. Supplies to be stored in controlled humidity areas will be selected in accordance with the criteria and provisions prescribed by the military service or agency.
- b. In the storage of ammunition, safety factors inherent to this commodity will be followed.
  - c. Humidity affects materials as follows:
- (1) Ferrous metals corrode in varying degrees above 50 percent relative humidity.
- (2) Aluminum alloy and nonferrous metals deteriorate to a limited extent at 90 percent relative humidity.
- (3) Minerals such as mica, asbestos, and fibrous glass show no deterioration by moisture.
- (4) Fibers of manila and sisal rope may become very brittle at humidities under 30 percent relative humidity; however, upon exposure to normal humidities, they absorb normal water content and resume normal physical properties.
- (5) Items such as voltmeters, resistors, telescopes, pressure gauges, and items comprised of both electrical parts and ferrous metals such as electric motors, controllers, telephone hand sets, amplifiers, circuit breakers, and mechanical fire control computers show deterioration by moisture on various components and in various degrees above 50 percent relative humidity.
- (6) If the relative humidity falls below 30 percent, there is a tendency for rubber cable coverings and other insulating materials or electronic equipment to dry out and crack.
- d. Equipment items, mobile and immobile which, because of their physical characteristics, are not adaptable to stacking, should, when committed to controlled humidity storage, be first considered for storage in low roof areas, if such are available. Due consideration will be given to serially numbered items so far as stored methods may affect facility of in and out movement.
- e. Unserviceable, economically reparable material awaiting repair, classification (return material), or repackaging, will be temporarily afforded controlled humidity storage in accordance with the priority established for the serviceable item on a space available basis.
- f. Items for normal distribution and for mobilization reserve which are usually stored together for

rotation of stock will continue to be so stored when committed to controlled humidity storage.

g. Depots having dry storage tanks must recognize one basic difference between controlled humidity warehouse space and controlled humidity tanks. Supplies stored in dry tanks must of necessity be confined to inactive, reserve type stocks, since ready and frequent access to the interior of these tanks is not normally economical or practical.

# 3-706. Material Protection Factors

a. Items to be placed in controlled humidity storage may be afforded the minimum practicable preservation and packing, in accordance with requirements of the military service or agency.

*b*. Items currently in storage or received from procurement will not be repackaged to attain a lower level of protection for controlled humidity storage, unless such is accomplished as a byproduct of normal care and preservation and maintenance operations.

c. Preservation and packing levels can be safely reduced to the minimum for material consigned to controlled humidity storage. However, the degree of additional hazard imposed on supplies from the time they are shipped from the safe confines of controlled humidity storage until they are consumed must be taken into account. Supplies in general must continue, as always, to be protected at a time of shipment to a degree commensurate with the maximum anticipated hazard to which they will be subjected in movement from storage to consumer.

d. In certain cases, supplies and equipment destined for storage in controlled humidity facilities are purchased at a reduced level of preservation and packing. Supplies received from vendors, so packed, will be placed in controlled humidity storage as soon as possible after receipt. In the event controlled humidity space cannot be made available after receipt, the level of protection will, if required, be raised consistent with the type of storage and the anticipated length of storage.

e. Items received from sources such as procurements, returns, and transfers, identified for controlled humidity storage, will be placed in available controlled humidity space according to priority. However, as a matter of judgement on the part of storage or inspection personnel, an item of higher priority, with levels of preservation and packing able to withstand normal storage, may be passed

over in favor of items of lower priority with lesser levels of preservation or packing.

f. Any action which reduces the level of packaging of material, on the assumption that it will be stored in controlled humidity space, will require adequate controls to assure storage in controlled humidity space.

g. Movement of supplies and/or pallets which are wet or damp into controlled humidity areas should be avoided.

h. Inter-warehouse transfers should be conducted under preferred climactic conditions.

*i*. Schedules for cyclic inspection will normally be extended for items under controlled humidity storage.

# 3-707. Utilization Factors

a. Only through maximum use of controlled humidity space will the full extent of inherent economic and physical benefits be realized. Maximum use, however, does not mean simply filling the warehouse, but maximum occupation by supplies that require the protection.

b. Storage operations in controlled humidity warehouses will utilize the same basic principles of good warehousing that are practiced in conventional warehouses. Specific attention will be given to modernization plans which are geared to the improvement of practices. Storage arrangement should provide for maximum utilization of available cube, direct accessibility of supplies and equipment for proper stock rotation, accurate and legible identification, mobility of each item, and application of safe storage practices.

# 3-708. Equipment and Operations Factors

a. Controlled humidity equipment should be located within the warehouse so as not to obstruct traffic aisles (fig. 3–118).

b. It is essential that the entrance of humid air into controlled humidity warehouses be kept to the minimum in order to maintain the relative humidity at desired level. Door control is most important, since the greatest source of moisture penetration is through open doors. An alarm system may be provided to signal open doors.

c. Movement of supplies into and out of controlled humidity space will be planned, to the greatest extent practicable, so that only one exterior cargo door in a section is open at a time. When two doors are open at the same time, particularly on opposite

sides of the warehouse, drafts are generated which greatly increase the infiltration of outside air.

- d. To offset any operational disadvantage occurring as a result of the "closed door" policy, a convenient means can be provided that will cause cargo doors to immediately open and subsequently close when entrance or exit is made. It is time-consuming for operators to dismount from their vehicles, open the doors, remount the vehicles, and drive through the doors and then dismount once again to close the doors behind them.
- e. Use of power-actuated auxiliary doors is one recommended means for counteracting this problem in active controlled humidity areas. Large curtain type rubber or metal doors actuated by contact with materials handling equipment (tractors, forklift trucks) can be installed in appropriate openings when desirable. These auxiliary doors are not intended to replace current security doors; therefore, they will be so positioned as not to interfere with the opening and closing of the permanent doors (fig. 3–119).
- (1) In the normal warehouse operation, inside doors connecting the separate warehouse sections are left open during operational periods. For controlled humidity warehouses, during any extensive movement of materials into or out of a single controlled humidity section to an outside area, these inner connecting doors to adjacent sections should be closed to minimize spread of moisture.
- (2) Normally, personnel traffic, using regular personnel type doors, will have little effect on controlled humidity operations. Personnel should be cautioned to use these doors in lieu of fire doors and that the doors do not remain open.
- (3) It is advocated practice to seal as many access doors as practicable in conversion to controlled humidity space. The sealing of cargo doors should be so designed that doors can be opened for use as peak work situations of major significance and duration warrant. It is also advisable to design sealing techniques in a manner that will allow doors to remain in "hung" position. Closure should not involve bricking up of doorways or removal of doors.
  - f. In certain geographic areas, there may be pe-

riods when the relative humidity of outside air will fall below 50 percent. Under such conditions, cargo doors may be opened without securing the inside area from outside moisture penetration. This allowance of "free" air circulation must be predicated on day-to-day atmospheric conditions and not "time of year" considerations.

- g. The use of battery-powered equipment in controlled humidity warehouses is preferred, and is particularly recommended in very active areas.
- (1) Availability can be an important factor in equipment selection for handling supplies in controlled humidity storage. The handling of hazardous commodities and operations within hazardous areas will be given priority for use of battery-powered materials handling equipment.
- (2) Where battery-powered equipment cannot be or is impracticable to obtain or use in controlled humidity storage, gasoline engine-powered equipment can be used with certain precautions. In use of such equipment, certain factors must be considered.
- (a) Reduced ventilation multiplies the hazard of using gasoline engine-powered equipment, because of the increased concentration of exhaust contaminants.
- (b) When utilizing gasoline engine-driven equipment in controlled humidity warehouses, any concentration of carbon monoxide gas which exceeds 50 parts of carbon monoxide per 1,000,000 parts of air must be prevented.
- (c) An engine with a "rich" mixture produces far more carbon monoxide than one with a "lean" mixture, and the rate of evolution of carbon monoxide is much greater when the engine is cold.
- (d) Gasoline engines in controlled humidity storage should be turned off when not in service, and should never be allowed to idle in standby service.
- h. The installation safety officer, upon request, will perform or obtain qualified personnel to perform tests and make determination as to the extent of hazard caused by equipment engine exhaust and when deliberate ventilation must be introduced to prevent undesirable concentrations.

DOD 4145.19-R-1

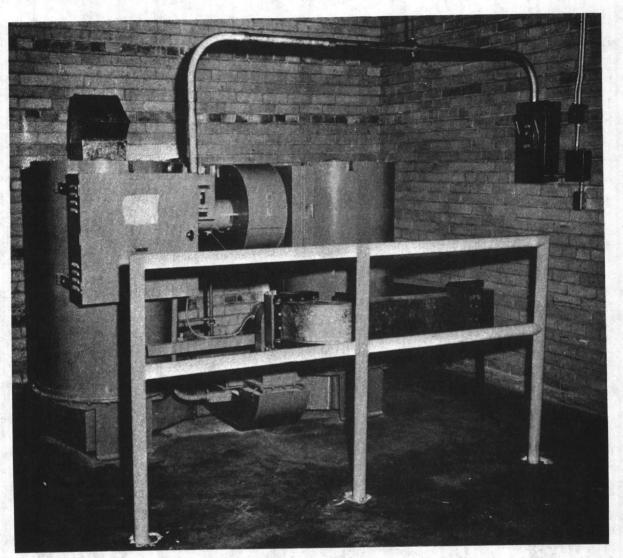


Figure 3–118. A dessicant type dehumidifier. These machines are installed at prescribed intervals within the ware-house to draw in the moist air, extract the moisture and blow the dry air back into the area. To eliminate obstructing operating areas these machines can be located on elevated platforms.



Figure 3-119. Auxiliary door actuated by contact with materials handling equipment.

## Section 8. SECURITY OF MATERIALS IN STORAGE

	Paragr
Purpose	3-80
Definitions	3-8
General	3-80
Responsibilities	3-8
Storage security	3-8
Storage of small arms	3–8
Receiving (classified material; pilferable/sensitive items; small arms)	3–8
Inspection	3-8
Inventory	3-8
Shipping and marking	3–8
DOD Small Arms Serialization Program (SASP)	3-8

#### 3-801. Purpose

This section establishes the minimum security requirements for the storage and handling of classified, pilferable, and sensitive material. It also addresses the requirements for serial number control and reporting of small arms under the DOD SASP.

#### 3-802. Definitions

a. Classified material. Material which requires protection in the interest of national security.

b. Pilferable material. Material having a ready resale value or civilian application as to personal possession, and is therefore especially subject to theft (e.g., watches, certain tools, and clothing).

- c. Sensitive items. Material which requires a high degree of protection and control due to statutory requirements or regulations, such as narcotics and drug abuse items; precious metals; items which are of high value, highly technical or of a hazardous nature; and small arms, ammunition, explosives and demolition material.
- d. Small arms. Handguns; shoulder-fired weapons; light automatic weapons up to and including, .50 caliber machine guns; recoilless rifles up to and including 106MM; mortars up to and including 81MM; rocket launchers manportable; grenade launchers, rifle and shoulder fired; and individually operated weapons which are portable and/or can be fired without special mounts or firing devices and which have potential use in civil disturbances and are vulnerable to theft.

#### 3-803. General

a. Protection of property.

(1) The protection of property, including the prevention of internal pilferage or major thefts of government supplies and equipment, is one of the functions in warehousing. This function must in-

clude the protection of supplies and equipment both in storage areas and while they are in transit.

- (2) Military installations throughout the world would lose millions of dollars worth of property each year if subjected to uncontrolled pilferage or theft. However, the risks incurred cannot be measured in terms of dollars alone. Loss of critical supplies for tactical units could result in unnecessary loss of life and danger to national defense.
- (3) In some areas, losses have assumed such proportions as to jeopardize the mission of the installation. All installations can anticipate loss. Actual losses will depend on such variable factors as type and amount of materials, equipment, and supplies which are produced, processed, and stored at the facility; number of persons employed; social and economic conditions in surrounding communities; command attitudes; and physical security measures employed. Because these factors will differ greatly in various types of installations and in different geographical locations, each must be considered separately.
- b. Measures for control. Specific measures for prevention of pilferage will be based on careful analysis of the conditions at each installation. The most practical and effective method for controlling pilferage is the establishment of adequate physical security and psychological deterrents. This may be accomplished in a number of ways.
- (1) An aggressive security education program is an effective means of convincing employees that they have much more to lose than they do to gain by engaging in acts of theft. It is important for all employees to realize that pilferage is morally wrong no matter how insignificant is the value of the item taken.
- (2) It is particularly important for supervisory personnel to set a proper example and maintain desirable moral climate for all employees.

(3) All employees must be impressed with the fact that they have a legal responsibility to report any loss to proper authorities.

(4) Adequate inventory and control measures should be instituted to account for all material, supplies, and equipment. The awareness of poor accounting controls provides one of the greatest sources of temptation to a potential pilferer.

(5) An effective material control system will be established which includes inspection of delivery

and vendor vehicles.

(6) All suspected losses will be investigated quickly and efficiently.

(7) An effective key and lock control system will be established and monitored regularly for security purposes.

(8) Bulk quantities of highly pilferable stock will be stored in enclosed security areas and distributed from there to using sections in limited amounts.

(9) Accurate methods of taking physical inventories and of accounting for stock procurement, usage, and salvage will be established.

# 3-804. Responsibilities

a. Commanders will administer the necessary physical security measures for protection of classified, pilferable, and sensitive material, together with small arms control and operation of SASP in accordance with applicable military service/agency regulations.

b. Commanders will insure that all persons involved in the receipt, storage, issue, repair and inspection of classified material are versed in the instructions contained herein and in regulations governing the security of classified material.

c. The installation TOP SECRET Control Officer, or his alternate, will insure the security control of TOP SECRET material during receipt, storage and issue.

# 3-805. Storage Security

a. Storage of classified items. These items should be kept separate from other material. The most satisfactory method is to store such items in a separate building with a higher degree of physical protection than other buildings. Where a separate building is not available or where its use is not warranted by the quantity of classified storage, a room, cage, or crib may be constructed within a warehouse building. All areas which contain clas-

sified material will be secured by means of approved locking systems. This will include any temporary storage space used for intransit classified material. In addition to classified items being stored separately from other material, classified material will be segregated in storage from sensitive but unclassified items. This further segregation will prevent exposure to compromise of classified material incident to a break-in aimed at stealing unclassified but sensitive items. Standards for the physical protection of classified items are specifically established in DOD Directive 5200.1 as implemented by each Military Service and the DLA.

b. Storage of pilferable and sensitive items.

(1) In addition to normal installation security procedures, commanders will assure that storage procedures and techniques afford adequate protection for pilferable/sensitive items. Structural standards and control procedures should be as set forth in implementing military service/agency regulations. Depending on local conditions and experience, these protective measures should include vault types or caged and/or fenced and locked security areas, assignment of responsibility for control of pilferable/sensitive items to specific individuals, restricting access to pilferable/sensitive item storage areas, and procedures to control movement of these items within the storage installation.

(2) Pilferable/sensitive items will not ordinarily be stored in the same area with classified material. However, when instances require pilferable/sensitive and classified items be stored together, the entire storage area will be classified, and controls applied, equivalent to the highest security classi-

fication of any item therein.

(3) Pilferable items ordinarily will not be stored in warehouses where security protection is lacking. Circumstances, however, may result in pilferable items requiring general purpose storage environment, i.e., items in large banded containers for which secure storage space is temporarily not available. When this situation presents itself, general purpose storage environment is permitted, however, when such containers are opened for partial issues, the residual quantities will be transferred to a specified secured area.

(4) Sensitive items classified as "controlled substances" in the Drug Act of 1970 must be stored in an approved vault or safe with a three-tumbler combination unless a US Department of Justice, Drug Enforcement Administration (DEA) Regional Of-

fice has approved another type of secure facility. Retrograde controlled substances must be approved for disposal by the DEA Regional Office before such disposal actions can be taken. Disposal actions must be observed and attested to by responsible personnel.

# 3-806. Storage of Small Arms

a. Small arms will be stored apart from other pilferable and sensitive items for the purpose of maintaining strict physical security and limiting access to specifically authorized personnel.

b. When available facilities do not permit geographic separation of small arms into separate buildings, then, storage is permitted in buildings where other pilferable or sensitive items are stored. When this occurs, small arms will be separated from these items by a locked security cage, fencing, or other acceptable means.

c. Storage layouts for small arms should be designed to facilitate receipts, issues, inventory counts, and serial number verifications.

d. To meet these requirements, small arms storage areas must be planned to accommodate large, medium, and small lots of material with minimum rewarehousing.

e. Retrograde small arms awaiting decontamination, inspection, classification or processing action prior to storage or disposition will be controlled, secured, and given surveillance to the same degree as provided issuable small arms.

 $\hat{f}$ . Small arms will be stored in vault type or highly secured storage areas in accordance with DOD and military service/agency directives addressed to this subject.

# 3-807. Receiving (classified material; pilferable/sensitive items; small arms)

a. Classified material.

(1) All duties involving handling or access to unpacked or unpackaged classified material, and the applicable classified documents or correspondence pertaining thereto, will be accomplished only by properly cleared individuals. All receipts will be subjected to a 100 percent verification of quantity.

(2) In cases where classified shipments are received with violations of security requirements, the installation Security Officer will be notified immediately. The shipment in question should not be left unattended until properly documented and securely stored.

b. Pilferable/sensitive items (to include controlled substances).

(1) Receipts of pilferable or sensitive items will be provided controls to assure proper handling, recording, and storing. Receipt inspection procedures for pilferable/sensitive items will include determination of any evidence of tampering and the material placed under control as expeditiously as possible. If pilferage or loss (shortage) in shipments is suspected, immediate coordination between the transportation and security office will be effected.

(2) Whenever possible, the unloading will be accomplished at the storage location site or as deemed necessary an authorized person from the receiving area will accompany the material to the storage area and obtain warehouseman's signature

upon release.

(3) Where pilferable or sensitive material moves to a storage area over a mechanical handling system, such as a power and free conveyor or a towline conveyor system, special locked (padlocked) containers will be used. This also applies to material moving from the storage to shipping area.

c. Small arms. In addition to b above the follow-

ing will be applied:

(1) All small arms receipts will be subjected to a 100 percent verification of weapons and serial numbers plus a quality check of the operations.

- (2) Unloading of small arms will be accomplished on a priority basis and material placed under control as expeditiously as possible to reduce the opportunities for loss or pilferage. When unloading procedures cannot be completed during operational hours, a separate, secured area, vault or cage, meeting the structural and security standards of the military service/agency regulations will be utilized as a temporary holding area.
- (3) Whenever possible, the unloading will be accomplished at the storage location site, thereby eliminating additional movement.

(4) Stringent inspection procedures will prevail throughout operations to determine any evidence of tampering.

(5) Timely and close coordination between transportation and security offices will be accomplished in cases of suspected pilferage or loss (shortage) in shipments of small arms.

# 3-808. Inspection

a. All inspection, identification, repair, testing, packing, marking, checking, and associated physi-

cal operations required in connection with classified, sensitive and pilferable material (including small arms) should be performed within the restricted storage area whenever possible. When quantity or complexity of processing precludes this, temporary restricted area should be established as required.

b. Discrepancies discovered during the receipt, issue, storage, inspection, and shipping operations will be processed in accordance with DOD and military service/agency directives addressed to this subject.

# 3-809. Inventory

Inventory of classified, pilferable, and sensitive items will be in accordance with DODI 4140.35 and military service/agency directives addressed to this subject.

# 3-810. Shipping and Marking

- a. Shipments will be provided controls necessary to assure proper handling.
- b. Preferably, classified, sensitive and pilferable items selected for shipment should be packed by the consignor in the building where the material is stored.
- c. Whenever the above cannot be accomplished, stringent visual and/or escort controls will be enforced during preshipment processing and material movement.

d. Shipments will be preserved, packed, and marked to minimize intransit exposure of material to scrutiny, container rupture, undetected entry, loss, damage, illegal acts, and security compromise.

e. Markings will not reveal the nature of the material except to the extent required for compliance with transportation regulations, or when the shipper service has determined that ready identification of items being shipped is necessary (ref MIL STD-129).

f. Loading will be accomplished as soon as the cargo is brought to the carrier. Load preassembly outside of security areas should not be practiced.

# 3-811. DOD Small Arms Serialization Program (SASP)

- a. Criteria. All DOD Components, activities, and installations will be part of a worldwide small arm serial number control system.
  - b. Concept and procedures.
- (1) The concept for the serial number control of small arms is based on the use of the DOD Central Registry that provides investigative agencies, within 72 hours, the identification of the last accountable activity having a specific serial numbered small arm. Investigative agencies will process all inquiries to the DOD Central Registry.
- (2) The procedures for serial number control and reporting are found in DOD 4140.22M.

# Section 9. CARRIER LOADING

Introduction	Paragraph 3-901
Subsection 1. CAR LOADING	
General	3-902
Loading rules for rail carriers	3-903
Action of pressures on cargo	3-904
Floating loads	3-905
Mixed loads	3 906
Bagged commodities in closed cars	3 907
Palletized loads in closed cars	3_908
Cylindrical containers in closed cars	3_909
Machinery and machine tools	2 010
Loading of hazardous commodities	3 911
TOFC/COFC loads	3–912
Subsection 2. TRUCK/TRAILER LOADING	
Preparation for loading	3_913
Balanced load	3-915

Paragraph

Load movements	3-916
Types of loading	3-917
Freight loss and damage	3-918
Instructions for securing materials transported by DOD-owned motor vehicles	3-919

# Subsection 3. PNEUMATIC DUNNAGE

#### 3-901. Introduction

- a. Improper loading is one of the major causes of loss and damage during transportation and the resulting delay in use of material at destination. The purpose of this section is to provide guidance in proper loading and therby help prevent discrepancies during transportation.
- b. After determination has been made to move materials and supplies, the freight traffic office should be advised so that the proper mode of transportation may be selected. This advice should include, among other things, information as to whether the shipment—
  - (1) Is palletized or unpalletized.
- (2) Consists of high center of gravity items, requiring special tie down or bracing methods.
- (3) Consists of items having heavy concentrated weights.
  - (4) Consists of fragile or critical items.
- (5) Consists of items subject to contamination, such as flour, sugar or other items.
  - (6) Consists of explosives or other hazardous

commodities and whether they have been properly marked and labeled.

- (7) Will be handled at origin or destination or both by materials handling equipment. In addition to the above information, selection of the proper mode of transportation requires consideration of conditions at origin and destination, probability of transshipment, degree of security needed in movement, military requirements, the cost of transportation, the type of service provided, etc.
- c. Stowage of freight aboard vessels is not usually encountered by warehousing personnel and will not be discussed in this section; likewise, less carload and less truckload shipments will not be included since they are generally loaded and unloaded by the carriers, except shipments of explosives and ammunition.
- d. This section does not establish organizational alinements or functions. Although certain warehousing and traffic functions are described, it is not intended to imply that those functions will be performed by particular organizational elements within the services or shipping activities.

## Subsection 1. CAR LOADING

#### 3-902. General

a. Types of commodities handled. The shipment of military supplies is possibly the most complex traffic function in the world. This is due, in part. to the wide variety of commodities involved and their diverse physical characteristics. The commodities shipped range from small items easily handled by one person to those which are so bulky as to require the use of multiple or idler cars, or exceed the size or weight limitations of standard transportation equipment and facilities, and require the use of special routings or heavy duty equipment. Others may be hazardous (explosives, acids, poisonous gases, etc.) and require caution in preparation for transportation; perishable, and require protective service from heat or cold; delicate, and require special handling; or in critical supply. Another factor leading to this complex situation is the multiplicity of types of shipping containers used.

- b. Selection of type of rail car.
- (1) Of initial importance in car loading is the selection of the proper car. This must be done with a view to its fitness for the particular commodity to be loaded, since properly loaded shipments are often damaged by unfit equipment. On the other hand, freight which in itself is not highly susceptible to damage may cause damage to equipment better suited for other classes of freight. Selection of rail cars for shipments of explosives and ammunition will be in accordance with the requirements of DOT regulations.
- (2) Rail freight cars are generally classified as box, gondola, refrigerator, hopper, tank, and flat. In this general range will be found many cars con-

structed to transport specific commodities. Many freight cars are specially equipped with blocking and bracing appliances which form an integral part of the car. While it is the duty of the carrier to inspect cars thoroughly before they are placed for loading by shippers, it is to the shipper's interest to ensure that cars selected are in all respects suitable for the kind of freight to be shipped.

c. Shipper's loading responsibilities.

- (1) Freight should be loaded to withstand the normal hazards of transportation. Shippers are required to load freight carried at carload rates, unless otherwise provided by tariff, and are also required to load heavy or bulky freight which is carried at less than carload rates, but which cannot be handled by regular station employees or at stations where carrier's facilities are not sufficient for handling. In addition, shippers must observe carrier's rules for safe loading of freight and protection of equipment, and movable parts (machinery) must be secured. When articles are loaded on open cars, small detachable parts must be removed and placed in packages or secured within the article. Shipments of explosives and ammunition will be loaded in accordance with service regulations and publications.
- (2) In addition to selecting the proper type of car, the following precautions should be taken against the use of defective or unclean cars:
- (a) Examine the interior of the car for any defects of roof, sides, or floor that might cause snagging, tearing, scarring or rupture of container, or permit the entry of rain, dirt or other matter likely to injure the freight.
- (b) Remove protruding nails and other obstructions not part of the car.
- (c) Reject cars that cannot be suitably conditioned without mechanical or other extensive repairs.

# 3-903. Loading Rules for Rail Carriers

a. Conformance with loading rules. Personnel engaged in or responsible for loading, blocking, and bracing freight should have available for use and be familiar with the rules for the proper loading and securing of shipments, as outlined in the publications referred to in b below and in applicable service/agency publications. By complying with the applicable rules, procedures and methods, the shipper has accomplished the first step in assuring safe and economical carloading.

- (1) Mandatory requirements. Rule 27 of the Uniform and Consolidated Freight Classifications requires shippers to observe carriers' rules regulating the safe loading of freight and the protection of equipment. Mandatory rules are contained in the Association of American Railroad's Circular Number 42-E, "General Rules Covering Loading of Carload Shipments of Commodities in Closed Cars," and all Associations of American Railroads pamphlets covering the loading and securing of shipments on open top cars.
- (2) Minimum standards. The various methods and specificiations contained in all Association of American Railroads car loading pamphlets will be observed as minimum requirements for the proper loading, blocking and bracking of shipments for movement by rail freight on or in open top and closed cars.
- (3) Loading methods not specified. When freight is to be loaded on or in open top or closed cars, and no loading and securing methods are provided therefor, it will be blocked and braced according to the best method or procedure that can be devised from Assocation of American Railroads (AAR) pamphlets or other sources covering similar material (see also para 3–919).
  - b. Source of rules.
- (1) AAR. Pamphlets and bulletins containing rules governing the loading of railroad cars are issued by AAR. These are usually filed in the office of the installation transportation officer.
- (a) Following is a list of closed car pamphlets published by AAR:

# Pamphlet

No.	Title
1	Automobiles-Motor Vehicles Shipped in Auto Loader Cars.
2	Automobiles-Motor Vehicles Shipped L.C.L. or Carload in other than Auto Loader Cars.
3	Bags-Commodities in Flour and Other Grain Products, Sugar and Kindred Commodities,
	Rice Salt Coffee Beans Pennits etc

- 4 Barrels, Drums or Kegs.
- 5 Batteries-Storage.
- 6 Brick and Hollow Building Tile.
- 7 Brick-Hot Top.
- 8 Plywood.
- 9 Cable on Reels and Wire Commodities.
- Car-Doors-Battening as Protection Against Damage by Weather, Cinders, etc.
- 12 Cylinders—Empty, With or Without Caps.
- 13 Fiberboard Containers (Solid or Corrugated)—
  Commodities.

a	mphlet	
	No.	Title
	14	Freight-Loading, Bracing and Blocking of.
	15	Furniture—Carload.
	16	Furniture—Less Carload.
	17	Grain and Grain Products in Fibre-board Containers and Sacks.
	18	Cylindrical Steel Containers (Small) and Mixed Loads in Larger Steel Drums and Boxes.
	19	Livestock—Loading and Handling.
	20	Lumber (Dressed) and Mill Work.
	21	Machinery.
	22	Marble in Slabs—A-Frame Method.
	25	Paper and Simiilar Commodities on Skids.
	26	Gypsum Plasterboard, Wallboard, Sheathing, Lath and Plaster.
	27	Projectiles, Bombs and Cartridge Cases (empty).
	28	Radiators—Cast Iron.
	29	Refigerators—Mechanical.
	30	Roofing Materials—Prepared.
	31	Soda Ash.
	32	Stones—Pulp Grinder.
	33	Stoves and Ranges.
	34	Tank Cars—Transporting Non-dangerous Commodities.
	35	Untreated Cross Ties.
	36	Bulk Grain.
	38	Unsaturated Roofing Felt and Pulpboard Paper.
	39	Newsprint.
	40	Vitrified Clay Sewer Pipe.
	41	Dictionary of Standard Terms.
	42	Rolled and Plate Glass (Not Bent).
	42C	General Rules Governing Loading of Carload Shipments of Commodities in Closed Cars.
		그 그 그 그 사이를 하고 있다고 그렇지다. 이 프랑락이 나를 가는 사람이 되는 사람들이 되는 것이다.

(b) The Loading Rules Committee, Mechanical Division, AAR, has issued a loose leaf binder containing 7 sections of "Rules Governing the Loading of Commodities on Open Top Cars." The sections are listed by number and title as follows:

Title
General Rules.
Loading of Steel Products Including Iron and Steel Pipe.
Loading of Road Grading, Road Making and Farm Equipment Machinery.
Loading of Miscellaneous Commodities Includ- ing Machinery.
Loading of Forest Products
Loading of Department of Defense Material
General Rules Governing the Loading of Com- modities on Open-Top Trailer to be handled in TOEC

Section No. 6 will be the primary guide for loading and securing all Department of Defense material shipped on open top rail equipments. Sections Nos. 1 through 7 prescribe loading methods for practically every type of commodity which is loaded on open type rail cars. Sections Nos. 1 through 5 and 7 will be used only if the commodity to be shipped is not covered in Section No. 6.

(2) Bureau of explosives. The instructions concerning the loading of ammunition, explosives, and other hazardous materials in closed cars and on open top cars which have been issued by the Bureau of Explosives are listed below. These may be obtained from the Association of American Railroads, Bureau of Explosives, 1920 L St. NW, WASH DC 20036.

Par	mphlet	
	No.	Title
6 -		Drawings and Photographs, Loading and Bracing Carload and L.C.L. Shipments,
		Explosives and Other Dangerous Articles.
6a		Illustrating Loading and Bracing Methods, Carload and L.C.L. Shipments, Loading
		Projectiles, Loaded Bombs, etc.
6b		Approved Method Loading Carload Shipments Gasoline in "Blitz Cans."
6c		Illustrating special bulkhead braces for open top and closed vans and flat bed trailers and
		methods for loading and bracing less than trailer shipments of explosives and other
		dangerous articles via Trailer-on-Flat Car (TOFC).

#### 3-904. Action of Pressures on Cargo

- a. Types of pressure. The types of pressure action on loads shipped by rail are as follows:
- (1) Lateral, or crosswise, pressure occurs when rounding curves.
- (2) Vertical pressure occurs because of the action of the trucks hitting low joints and crossings.
- (3) Lengthwise pressure occurs in coupling, starting, stopping, switching, and in slack action.
- b. The closed car. Considering the pressures that materials are subjected to in over the road travel by rail and considering the boxcar as a big shipping container on wheels, the bracing and blocking mediums in the car should be essentially the same as the interior packaging of individual shipping containers.
  - c. Vertical pressure.
- (1) Absorption of vertical pressure. The vertical pressures or vibrations, over and above the overhead weight of the load, are the most numerous but are small in magnitude and are accumulative. Generally, the damaging action from vertical pres

sure is absorbed by the interior cushioning or bracing within the individual package or containers.

(2) Commodities affected by vertical pressures. Certain commodities are sensitive to vertical pressures and must receive additional bracing or cushioning as well as a selected method of loading. For example: If rolls of lineolum are loaded flat the vertical pressures of vibrations will tend to flatten the rolls; bundles of light metal tubing or pipe will undergo a settling from vibrations and may become flattened or dented. However, if the linoleum is stood on end and separation gates are used to divide the load, and if the pipe or tubing is stowed with a filler between layers to absorb the pressures, there is little chance of damage to the shipment in transit unless the car should be subjected to abnormal shocks or impacts.

#### d. Lateral pressures.

- (1) Type of action. Lateral pressures are toward the side walls induced by a car rounding a curve which tends to move the containers out of alinement with adjacent containers. Also, lateral pressures tend to crush the containers on the off side of the car when rounding a curve. Although these pressures are of small magnitude, if the containers are out of alinement, subsequent lengthwise forces can cause damage because of uneven distribution of pressure.
- (2) Distribution of weights. To insure against uneven distribution of weight in the car, the load should be braced to prevent cross car movement of the load. Uneven distribution of weight within the car may cause the side bearings to become fouled and the car derailed, as the trucks bind and do not roll around curved track. Of great importance is the side bracing of high center of gravity items; applicable bracing must be applied to prevent tipping (fig. 3–120). For additional illustrations of bracing for high center of gravity or top heavy items see AAR Pamphlets 14 and 21.
- (3) Doorway protection. Provide proper doorway protection to assure that load does not cause doors of car to bulge or break open when rounding curves, and to facilitate opening of doors, and assure protection to personnel opening doors (see figs. 3–121, 3–122 and 3–123).
- (4) Prevention of lateral movement. To provide adequate protection against lateral movement at all times the load must be tight crosswise. Proper blocking and bracing must be applied to prevent the load from shifting or moving out of alinement.

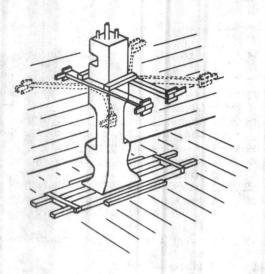


Figure 3-120. Side bracing of high center of gravity items.

- e. Lengthwise pressures. Most damage in rigid braced loads is prevented by loading containers tightly to prevent development of slack within the load. Once slack begins to develop within the load, repeated impacts may cause a void large enough to allow the containers on the top layer to fall between the load and the ends of the car. To protect against damage in rigid braced loads, containers will be loaded tightly with the strongest parts arranged to provide support lengthwise of the car. All loads (excluding floating loads) should be loaded or braced to minimize any possibility of movement.
- 3-905. Floating Loads. (Not permitted for shipments of explosives, ammunition and other hazardous materials, nor permitted in any box car equipped with under-car or end-of-car shock mitigating cushion devices.)
- a. Types of floating loads. There are two types of floating loads; the full floating load and the controlled floating load commonly called the "Snubbing Method." Many items present special loading and bracing problems because of the weight, size, shape, or fragility; such items of this type brought about the development of the floating load. For further information concerning loading to withstand the various types of pressure see AAR Pamphlets 14 and 21.

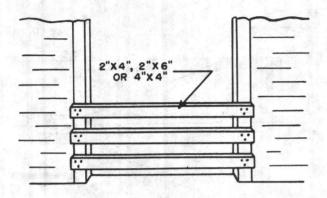


Figure 3-121. Doorway protection for rough freight only.

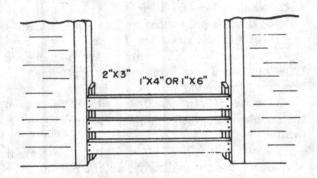
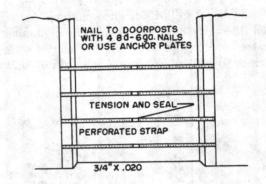


Figure 3-122. Flush doorway protection for cars with wooden doorposts.

b. Controlled floating load.

(1) Description. When using the controlled floating load, blocking is not applied against the front or rear of the unit or the units to be shipped. Generally, as the units are to be shipped by this method are items that are skidded, that is, engines, machine tools, generators, or large motors, snubbing or braking devices are applied against the side of the skids. Under lengthwise impact, the shift of the skidded item is controlled, and the item is held in contact with the floor of the car. Thus, the greater part of the shock forces are dissipated through the friction and riding of the skid structures. The item is actually isolated from lengthwise shock forces. There are two commonly used snubbing devices-antiskid plates and lag screws. The antiskid plate and method of application are shown



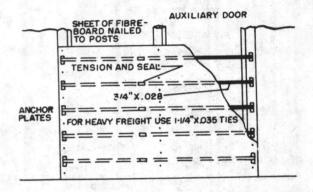
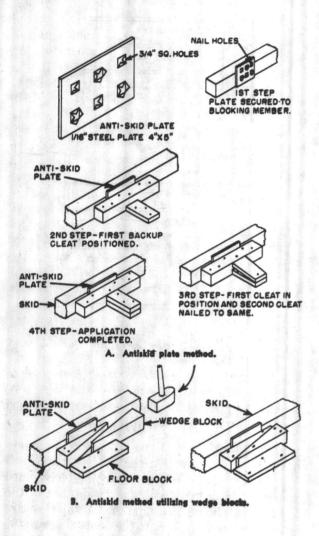


Figure 3-123. Use of steel straps for double door auto boxcar.

in A and B, figure 3–124. The lag screw and method of application is shown in C, figure 3–124.

(2) Application of snubbing devices. In applying the lag screw snubber, the lag screw is turned in, in a predrilled hole in the snubbing block, until the screw tip is flush with the inside face of the block. The snubbing block and the backup cleat are securely nailed and spiked to the floor. Measure the amount the lag screw head projects beyond the outside face of the snubbing block and with a wrench turn the lag screw into the side of the skid until 1/2-inch penetration is obtained. The bite of the screw tip into the side of the skid will serve as a retarder to control both lengthwise and upward movement. The antiskid method is basically the same except that a plate is inserted in lieu of a lag screw. The method of arrangement for placing either the antiskid plate or the lag screw snubbing device is shown by figure 3-125. The maximum distance for locating the end snubbing devices from ends of the skid should be approximately 24 inches to 30 inches (fig. 3-125). The snubbing devices on each side of the skid should be equal in number and located directly opposite. The number of snubbing devices to be employed on each side of skid will




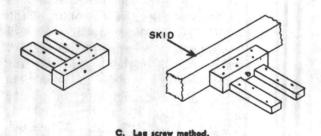


Figure 3-124. Snubbing machine.

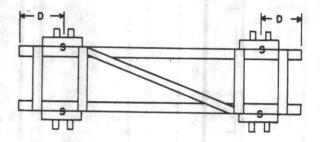

NOTE: DISTANCE "D" NOT MORE THAN 30". "S" REPRESENTS SNUBBING DEVICES.

Figure 3-125. Location of snubbing devices.

vary with the weights of the item and the desired amount of restriction of movement. Generally, the number varies from two to five devices on each side of the skid. After end devices are located, the additional devices are spaced in between.

- (3) Application and use. The snubbing devices should be used on machinery, especially legged type, boats and those commodities that should be protected from sudden or severe shock.
- (4) Several items cleated together. The use of the snubbed load is recommended wherever practicable.
- c. Floating load. The floating load absorbs a great amount of shock pressure as containers slide over the floor of the car, thus riding with the "punch." The materials may or may not be palletized. However, the pallet loads or containers are secured in a unit by binding with steel straps. Units may be placed in each end of the car, or as a single unit extending through the doorway area. Space for floating may be at each end wall and doorway; all in the doorway; or with a single unit at the end walls. There are variations of this load which are termed "Restricted" floating loads. (For additional details see AAR Pamphlets Nos. 14, 21, and Section 2 of Loading Rules for Open Top Cars.)

## 3-906. Mixed Loads

a. Nature of problems. The variety of different shapes, sizes, and weights of articles and containers, so frequently required to be loaded together in one car, furnishes a greater problem than solid loads of one type container or commodity. It is paramount that the number of mixed cars be held to a minimum. Planning the shipments to obtain the maximum of solid loads will not only result in less

damage, but will prove to be more economical in bracing material and loading time required. (See AAR Pamphlets 4, 13, 18, and 24 for additional information.)

b. Segregation of load.

(1) Scneduling for segregation. The same type containers or articles in a mixed load should be loaded together in the car; the loading and bracing practices should be followed as for solid loads of these individual items. More efficient working procedures are obtained when it is possible to schedule flow of supplies to the loading platform in order to be segregated.

(2) Methods of segregation. The following meth-

ods of segregation are suggested by-

(a) Layer.

(b) Units lengthwise of the car.

(c) Units crosswise of the car.

- (3) Segregation by layer. When segregating or separating articles by layers, the heavy articles should be in the lower layers; the lighter and fragile items in the upper layers. For example: Drums, barrels, heavy crates, or boxes in the floor layers; bagged commodities, wirebound boxes, and fiberboard boxes should be loaded on top of the heavy containers. If the lighter containers or items cannot be loaded directly on top of heavier containers, separators or fillers will be placed between the layers. These separators may be of wood or fiberboard depending on the amount of protection or support required. When loading commodities in bags or fiberboard containers or lightly constructed wood boxes on top of barrels or drums, wood filler boards will be used for separating medium; when separating bags loaded on fibreboard containers, a heavy paper will suffice. Generally, separators are not required between layers of the same type wood boxes, wirebound boxes, or fibreboard containers; however, small dimension containers will not be loaded directly on or against unsupported panels or cleated panel containers or open crates without adequate separating material.
- (4) Segregation by units. When separating containers by units lengthwise of the car, the recommended loading pattern for the different containers as covered in the AAR Pamphlets for solid loads of the containers should be followed, that is, fibreboard boxes in bonded block patterns, cylindrical type containers by nesting or offsetting, and bagged commodities by brick wall or binding methods.
  - c. Separation gates. Generally, separation gates

are required when containers of different type and size are loaded side by side. Separation gates may be of the floating type (not secured to the car side walls) when used between units of containers having practically the same strength and rigidity. When separation gates are used between a unit of heavy strong containers on one side and a unit of lighter and weaker containers on the other side, the separation gate should be fastened in place to prevent the heavier containers crushing the lighter containers when subjected to load pressures. When the load pressure exerted in either direction may cause damage, the separation gate should be anchored in both directions by the reverse steel strap method. See AAR Pamphlet No. 14 for detailed information concerning the construction of separation gates. In addition, AAR Bulletin No. 527 of the General Information Series contains information on the construction of a re-usable car brace for securing part car loads. This brace is adaptable for use when switching cars on the station during the loading of mixed shipments. Certain types of special box cars have built-in fixtures and equipment for quick application of multiple-deck flooring, adjustable gates, bulkheads, etc. These cars are particularly adaptable to the securement of delicate or fragile freight.

- d. Blocking. Machinery and rough items such as castings, steel frames, pipes, and bars should be blocked both lengthwise and crosswise of the car as recommended for these commodities in the applicable AAR Pamphlets.
- e. Separators. Separators will be used when one side of the car contains items or containers that may be crushed because of lateral pressures caused by side shift of heavier articles. The separators will be reinforced by blocking to car floors and side walls. Where the containers loaded adjacent to each other need protection only from tearing, snagging, or chafing it will not be necessary to secure the separators in a fixed position. The separators will be placed lengthwise of the car between the two different type containers, that is, when open crates are loaded adjacent to fibreboard containers. The fillers or separators serve the single purpose of preventing physical contact between two types of containers.
- f. Compliance with general rules. The weight distribution requirements of the General Rules in AAR Circular No. 42-E will be complied with when

loading mixed loads in cars, using the separation or segregation methods or procedures.

# 3-907. Bagged Commodities in Closed Cars

- a. Types of damage. The types of damages which can occur to bagged products are—
  - (1) Contamination.
- (2) Snagging of bags on car walls, floors, and in doorway areas.
  - (3) Chafing.
  - (4) Moisture damage.
- b. Contamination and snagging. Contamination and snagging can be prevented by application of the principles mentioned in paragraph 3–902.
- c. Prevent chafing. Chafing against car wall can be controlled by loading the bagged commodities away from the car wall in a "pyramided layer" build up (fig. 3–126). Tight loading and proper floor protection will prevent chafing in the lower layers. Jamming or wedging of bags in the doorway area can be prevented by installation of proper doorway protection, or by setting back the load at least a half a bag length from each door post, continuing through the doorway area interlocking the bags in a pyramided layer pattern or by the retaining paper method (B and C, fig. 3–126).
- d. Control of moisture damage. Moisture damage to bags can be controlled by proper protection from the elements while loading the car. Bags should not be stacked on damp platforms or damp car floors.

# 3-908. Palletized Loads in Closed Cars

- a. Economy of palletized cargo.
- (1) Introduction. Palletization is a system whereby a large number of small items are grouped and unitized on a pallet for handling by mechanical means, such as a forklift truck. The efficiency gained by reducing the number of handlings is shown in the example of loading a freight car with 1,800 small boxes. For example: By grouping the boxes on 36 pallets, each containing 50 boxes, the ratio of transfers has been reduced from 1,800 individual box handlings to 36 mechanized pallet moves. Also, each time a package is handled there is the possibility of damage, therefore, reduced handling results in less damage to cargo.
- (2) Stable pallet loads. If the items are assembled carelessly on a pallet, the pallet will not protect the material during handling or transit operations. If a pallet unit becomes disarranged, it is not much better than individual loading, and requires a large

amount of manual handling to reassemble in an orderly arrangement. Therefore, it is important that the palletization of items be arranged carefully and the individual items be secured properly into a strong compact unit, capable of being handled and shipped safely.

Note. See section 10, this chapter, for more detail on unit loads.

- b. Boxcar information.
- (1) General. For guidance in planning pallet units and loading, basic data on boxcars is necessary. While the dimensions listed in subparagraph (2) below are the most common for standard boxcars, dimensions of some older or special cars may vary.
- (2) Inside floor dimensions of boxcars. Typical inside floor dimensions of boxcars are as follows:
- (a) 9 feet 2 inches wide by 40 feet 6 inches long.
- (b) 8 feet 6 inches wide by 40 feet 6 inches long.
- (c) 9 feet 2 inches wide by 50 feet 6 inches long.
- (d) 8 feet 6 inches wide by 50 feet 6 inches long.
  - (3) Car door widths.
- (a) Single door boxcars. The doors in single door boxcars are six feet wide. Some of the newer cars have doors with a 7-foot and an 8-foot width.
- (b) Double door boxcars. The doors in double door boxcars vary from approximately 10 feet 6 inches to 16 feet 6 inches. The average standard clear width opening is 15 feet 0 inches.
  - (4) Refrigerator car information.
- (a) Inside floor dimensions. The inside floor dimensions of a standard size refrigerator car are 8-foot 2%-inch width  $\times$  33-foot 2%-inch length. Some cars will vary from this standard.
- (b) Car door widths. Car doors are 4 feet 0 inches wide although newer cars are being built with 6-foot 0-inch wide doors.
- (5) Boxcar floors. When moving in and out of cars with a loaded forklift truck, this heavy concentrated load in motion causes a considerable strain on the car floors. In order to avoid accident or injury, the car floors must be protected. Circular 42E, Rule 5(D), Operating-Transportation Division, AAR, General Rules Covering Loading of Carload Shipments of Commodities in Closed Cars, requires, when lift trucks are used for loading and

unloading, suitable steel plates must be placed in car to prevent damage to floor (fig. 3-127).

- c. Loading on pallet.
  - (1) Prevent pressure on load. When the pallet

units are loaded into a car, each unit must have a firm bearing contact against the adjacent unit. Pallet unit A, shown in figure 3–128, provides bearing contact along the edges of the pallet only and not

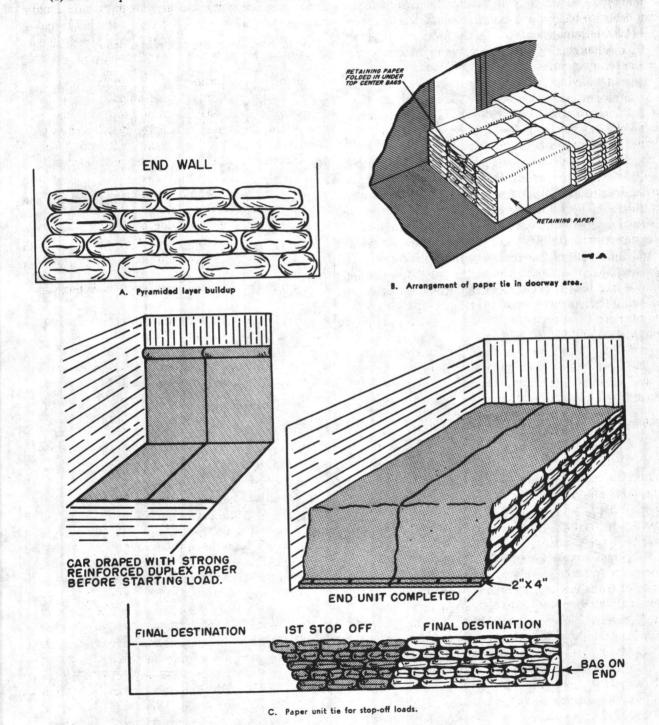


Figure 3-126. Prevention of chafing.

against the load. Generally, this is not recommended for small container assembled units as it is difficult to prevent the unit moving on the pallet.

(2) Broad load bearing surface. In the arrangements, as shown by pallet units B and C in figure 3–128, a broad faced bearing contact is obtained between the vertical faces of the units, when placed in a carload. However, since this places the containers in the direct line of the load pressures occurring during transit, it is necessary that the containers and the assembled pallet unit must be sufficiently strong and carefully secured together on the pallet.

# d. Loading factors.

(1) Tight loading. Pallets should be placed tightly in both ends of the car. Generally, for practical purposes it is necessary to have some side clearance space of approximately 1 to 2 inches between pallets in order to maneuver the pallets into place by the forklift truck. As shown in section A-A, figure 3–129, the total crosswise slack space between pallets and side walls of car is relatively small (approx. 6 in) and, ordinarily, would not require any additional crosswise bracing.

(2) Side shifting. In order to prevent side shifting of load and with a possible derailment of car in transit, Circular 42E, Operating-Transportation Division AAR, Rule 4(C) requires ". . . where the vacant space across the car, between piles and between load and car side, exceeds a total of 18 inches, the load must be secured so as to prevent moving or tipping towards side of car." If, in loading narrow pallets, there is 18 inches or more of space concentrated along the center line of the car, the pallets must be braced to prevent side shifting of load by some form of sufficient crosswise bracing.

(3) Doorway space. The loading at the doorway is finished off with proper bracing to secure and hold the load in place during transit. The doorway section of the load is a critical area in which to work as space is needed to maneuver the forklift trucks or other mechanical equipment which might be used (parts (A) and (B), fig. 3–130). For example: The space C, indicated on part (A), figure 3–130, at the doorway is braced securely by means of a wooden center gate D or steel strap anchored gate E indicated on part (B), figure 3–130. By this method, the bracing can be removed at destination and with

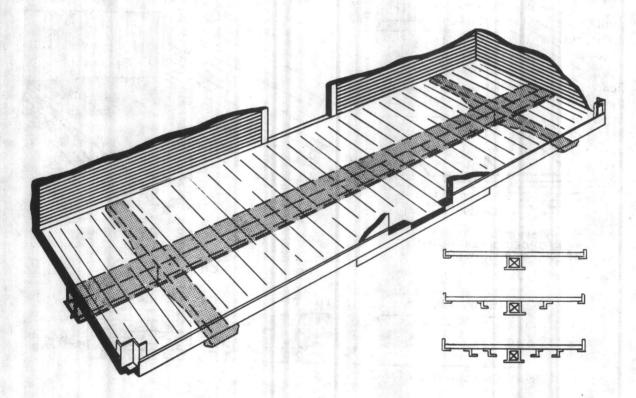


Figure 3-127. Floor supports

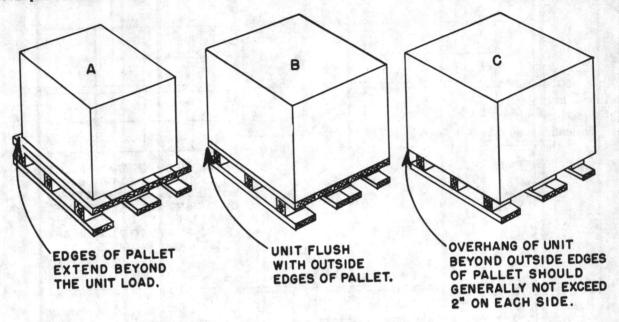


Figure 3-128. Palletized loads.

this work space in the doorway section, the car can be unloaded without difficulty.

(4) Filling the doorway. As shown in the example in (3) above, it is desired to completely fill the lengthwise space of the car with pallet units; however, some practical difficulties arise. When the last two pallets, shown by the shaded portion of figure 3-131, are moved into place, invariably, there is some slack space (possibly 4 to 12 inches) at one or both sides of these doorway pallets (fig. 3-130). When this occurs, it is necessary to squeeze into this slack space some form of bracing dunnage that will secure the load tightly in place to prevent shifting and damage in transit. Also, it should be considered that in this type of a through solid load, the pallet units in the doorway will be squeezed tight during transit and, consequently, will be difficult to pull out of the load at the destination. This difficulty can cause damage to the merchandise on these first few doorway pallets when trying to "break into" such a load. Therefore, many shippers and receivers prefer to brace the loads as explained in (3) above leaving a space in the doorway section of the car to facilitate handling operations (part (B), fig. 3-130).

# 3-909. Cylindrical Containers in Closed Cars

a. Special problems of loading.

(1) Description. Cylindrical containers include

steel barrels, drums, slack, and tight coopered wooden barrels, kegs, pails, and fibreboard drums. See AAR Pamphlet No. 4 for more detailed information on loading of cylindrical containers.

(2) Shape affects stability. Cylindrical containers have a circular contour and when loaded in a car, do not have complete face or surface contact or support between adjacent containers, which creates an unstable condition. Many containers in use are constructed of lightweight materials that will flex, bend, or crush under concentrated pressure. Therefore, it is necessary to have at least a two-point contact between adjacent containers.

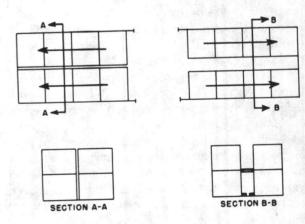


Figure 3-129. Crosswise slack.

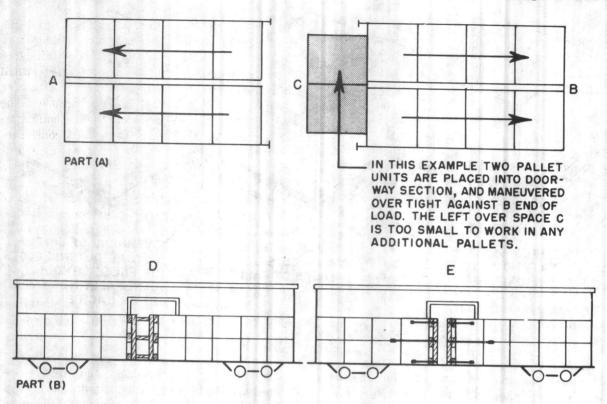


Figure 3-130. Doorway area.

- (3) Contrasted stability of square and cylindrical shapes. The alignment in bearing surfaces between containers having square or rectangular shapes is shown in part a, figure 13. With the units placed as illustrated, the construction resembles a multistoried house. This arrangement provides complete stability for such containers. If cylindrical containers were placed in straight lines, as shown in part b, figure 3–132, there would be no stability between the containers. This would be similar to trying to stack billiard balls one on top of another as shown in part c, figure 3–132.
- (4) Offset loading. The method of loading containers shown in pard d, figure 3–132, is the preferred method due to the stability obtained by offsetting the containers. This method provides a two-point contact between containers and any force or pressure brought to bear against a container is distributed to the adjacent containers. Other advantages are that this method retards rotation of containers and will accommodate crosswise loading where drums will not fill the voided space.
  - (5) Diagram. It is necessary at times to load

- a desired number of containers in a car as shown in part e, figure 3–132. However, there is a disadvantage to this method since the containers tend to be forced into the voided space at either side of the car. In the pattern shown in part d, figure 3–132, this open space is divided into three smaller spaces.
- (6) Importance of tight loading. Emphasis will be placed on tight loading. The proper positioning of cylindrical containers placed tightly against others is a basic requirement. Tensioning of steel straps or the application of wooden braces will not produce a tight load if the containers are not loaded tightly during the process of loading.
  - b. Loading wooden barrels.
- (1) Bilge protection. Bilge protection is necessary in the loading of wooden barrels and should be placed so that it will contact the barrel at the strongest point which is 6 inches from the top and bottom chimes. The bung stave is the weakest stave in the construction of the barrel. The barrel should be positioned so that the bung stave does not contact adjacent barrels or the end or side walls of the car.



Figure 3-131. Placing of last two pallets.

- (2) Double decked load. When it is necessary to double deck the load, dunnage of not less than 1-inch thickness must be placed lengthwise on top of the bottom or floor layer.
- c. Center bracing. When planning a load of cylindrical containers decide upon a pattern which will leave the least amount of open space in the doorway area; thus, the load in each end of the car will have the same number of containers against the bracing, preferably the lesser number.
- d. Drums with rolling hoops. When loading drums with rolling hoops in a rigid, braced load, the

load must be arranged so as to prevent the hoops from riding up on each other and thus creating slack lengthwise on the load. This method is also effective for preventing the latches from coming open, when loading drums with detachable tops.

e. Pails and 5-gallon containers. Because of the flexibility of light gage pails and the method of fastening the tops (particularly of 5-gallon containers of paint), it is mandatory that the load be sectionalized into at least four units. Divisional gates will be fastened securely to the side walls of the car (fig. 3–133). The blocking and bracing will be placed against the strongest part of the container when blocking and bracing pails, 5-gallon containers, and fibre drums.

# 3-910. Machinery and Machine Tools

a. Importance of proper loading.

(1) Dollar damage. Because of the high dollar value of this equipment any damage can involve a large loss.

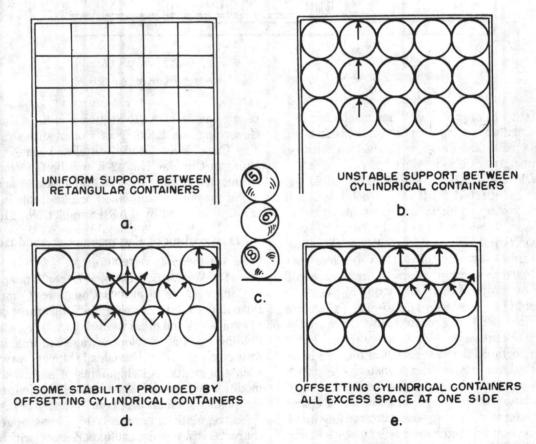


Figure 3-132. Loading diagrams cylindrical containers.

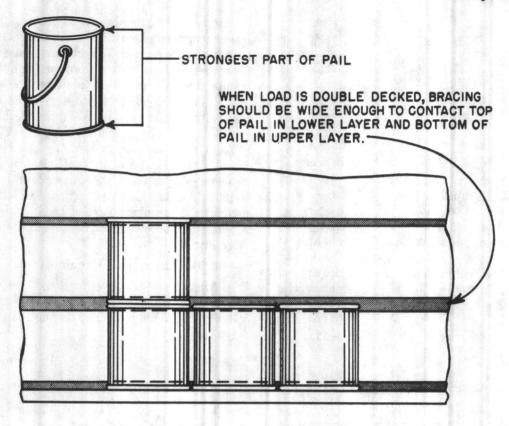


Figure 3-133. Bracing for flexible or light gauge cylindrical containers.

(2) Delay to production. When machinery destined to a manufacturing point is received damaged, there is a resultant delay in production until replacement parts can be produced.

(3) Difficulty of replacement. If possible, repairs can be effected or, if this is not feasible, it may be necessary to manufacture a unit or part as the damaged item may be the only one of its type.

b. Inspection before preparation for shipment. Prior to shipment (particularly if the machinery has been in inactive storage) a careful inspection will be made of the item or items to be shipped. The items should be examined to determine if there are any damaged or missing parts that would make the machine inoperative or hazardous for shipment. Of special importance is the securing of interior bracing of movable parts such as tail stocks, counterbalancing weights, and swing turrets.

c. Blocking and bracing requirements. Department of Defense machinery and allied or like items moving on open top equipment will be blocked and braced in accordance with the mandatory minimum

requirements of AAR Section No. 6, of the Rules Governing the Loading of Commodities on Open Top Cars. When loaded in closed cars, General Rules in Circular No. 42-E will be followed. Recommended loading methods for blocking and bracing of machinery and allied or like items in closed cars are covered by AAR Pamphlet No. 21.

# 3-911. Loading of Hazardous Commodities

a. Adherence to regulations.

(1) Other than Military Services. Under an Act of Congress, the Interstate Commerce Commission formulates regulations for the safe transportation of explosives and other hazardous articles which are binding upon all carriers engaged in interstate or foreign commerce and upon all shippers forwarding such shipments. All shipments of hazardous commodities will be prepared and forwarded in strict compliance with all pertinent shipping regulations. These regulations are based upon knowledge of the characteristics and past experiences with chemicals, compressed gas, and other hazardous com-

modities. The mandatory rules for all open top cars is Section 1 of the rules governing the loading of commodities on open top cars and closed car rules as outlined in AAR Pamphlet No. 42-E are applicable in the loading of hazardous commodities as well as the rules of the Interstate Commerce Commission and the Bureau of Explosives.

(2) Military Services. The responsibility for development of safe handling techniques for explosives and live ammunition is the responsibility of the individual service. Publications of these serv-

ices govern safe handling practices.

b. Hazardous commodities offered to carrier. Explosives and other hazardous commodities may be offered to carriers for transportation only when such commodities are in proper condition for transportation, are as defined, and are packed and marked, labeled, described, certified, and loaded and braced according to pertinent regulations. Methods of manufacture, packing and storage, insofar as they affect safety in transportation, must be open to inspection by a duly authorized representative of the initial carrier or of the Bureau of Explosives. Shipments that do not comply with the regulations must not be offered for transportation.

c. Inspection. Inspection of Equipment for Transportation of Class A Explosives-A car must not be loaded with Class A explosives unless it has been inspected by an employee of the carrier and certified by him to be in proper condition for such loading. After a certified car has been furnished by the carrier and before loading has commenced, the shipper must inspect the interior of the car and, after loading, certify to its proper condition. When shipments are loaded by the shipper, an employee of the carrier must inspect the finished load and certify to its compliance with governing regulations.

d. Loading Methods.

(1) General. All hazardous commodities must be loaded in the car in such a way that such commodities will maintain the position as placed, under normal transportation conditions. Small lots of hazardous items must be blocked and braced securely; such lots will not be loaded in such a manner as to depend upon other freight for bracing. Also, all other items in the car must be braced in a manner to prevent heavy items from coming into contact with the hazardous commodities. For example: Forgings coming into contact with acid carboys or batteries.

(2) Blocking and bracing methods. All the blocking and bracing procedures or methods as outlined in the various carloading pamphlets, with slight alterations, can be adapted to fit the requirements for safe loading of hazardous commodities. The floating center gate with slight alterations will provide bracing for carload shipments of boxed carboys, barrels, cylinders of compressed gas, drums, and boxes. The controlled floating load for handling of filled or empty compressed gas cylinders has proven most satisfactory. (See Bureau of Explosives Pamphlet No. 6 and AAR Pamphlet No. 12.)

(3) Cylinders of compressed gas. Small shipments of cylinders containing compressed gas will be loaded on their sides except when boxed or crated. Cylinders may be loaded upright, if securely braced to the car. Acetylene cylinders will be loaded upright at all times because of the construction of the interior of the acetylene cylinder. Chlorine gas cylinders should also be loaded in an upright posi-

tion at all times.

(4) Munition commodities shipped in ISO containers will be secured with AAR (American Association of Railroads) and CG (Coast Guard) approved restraint systems.

### 3-912. TOFC/COFC Loads

- a. Trailer-on-flatcar (TOFC) shipments usually require a ramp to allow the chassis to be driven onto the flatcar. Two types of equipment are used for TOFC loads: (1) Improved strength semitrailers (piggyback trailers), or (2) ISO containers mounted on a chassis.
- b. Containers (including ISO containers) not mounted on a chassis are often shipped on flatcars (COFC). Specialized equipment is available to lift these containers and position onto a flatcar. Several examples of handling equipment for such containers are shown in figures 3-134, 3-135, and 3-136.

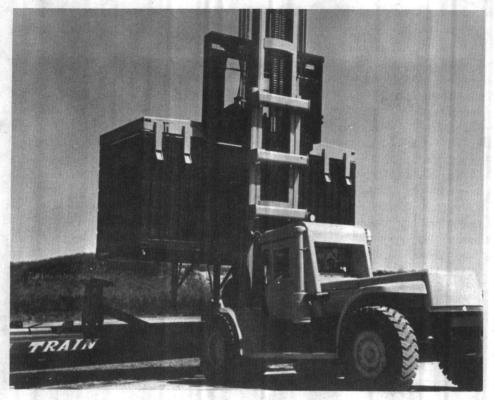


Figure 3-134. Frontloader forklift truck equipped with toplift attachment.



 $Figure \ 3\text{--}135. \quad Side loader \ truck \ equipped \ with \ top lift \ attachment.$ 

15 September 1979 DOD 4145.19-R-1

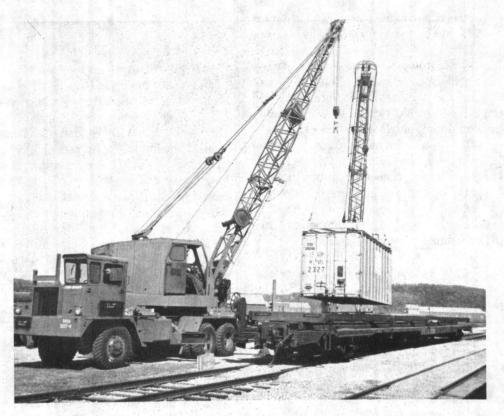


Figure 3-136. Mobile crane equipped with toplift attachment.

### Subsection 2. TRUCK/TRAILER LOADING

### 3-913. Preparation for Loading

a. Need for good equipment. Generally, a carrier has several types of vehicles, one of which may be suitable or more adaptable to the commodity to be shipped. It is the joint responsibility of the shipper and the carrier to make every effort to assure safety in transit, as well as safe arrival at destination.

b. Explosives and other hazardous articles. Department of Transportation regulations for the preparation of explosives and other hazardous articles for transportation by highway common carriers, construction of containers, packing, marking, etc., are contained in American Trucking Association, Inc., Publishing Interstate Commerce Commission Regulations for the Transportation of Explosives and other hazardous articles by Motor, Rail and Water, Current Issue. This publication is normally filed in the office of the installation transportation officer.

#### 3-914. Loading

a. Importance of proper loading. The delivery of truck and trailer shipments in good condition depends to a large extent on the manner in which the vehicle was loaded and on the care which was taken in preparing the vehicle for loading. Personnel responsible for loading, blocking and bracing freight should have available for use and be familiar with the rules for the proper loading and servicing of shipments. Shipments of explosives and ammunition will be loaded in accordance with approved procedural publications/drawings issued by the Military Services.

b. Tight loading. The most important single factor contributing to the prevention of damage in truck and trailer loading is that of tight loading, which cannot be overemphasized. Rarely does the material to be shipped fit a closed truck, van, or trailer without side slack or end slack, particularly


when the front end is rounded or curved. In most instances slack may be taken up with bulkheads or dunnage.

- c. Difficulty of tie down. The construction of present day closed trucks, vans, and trailers does not facilitate tight loading, blocking, or bracing. Most commercial closed trucks, vans, and trailer bodies are made of aluminum, plywood, or other thin metal shells designed to protect the materials from weather in transit. Ordinarily, provision is not made for the essential requirements of blocking, bracing, or tie down. The safe bracing of high center of gravity items in closed trucks, vans, and trailers presents a problem calling for good judgment, ingenuity, and sound workmanship to assure safe arrival of these items at destinations.
- d. Variation in vehicles. Physical dimensions, capacities, weight limitations, and load distribution of trucks and trailers vary greatly. These variations preclude the covering of all types of loads. Accordingly, the methods or procedures described must be considered typical and will be adapted to individual loads of various commodities as required.
- e. Containers loaded with ammunition on qualified flat bed trailers will be tied down on the flat bed in accordance with approved regulations.
- 3–915. Balanced Load. Equal distribution of load is just as important in truckloading as in carloading. The importance of weight distribution is shown in figures 3–137 and 3–138.

### 3-916. Load Movements

- a. Causes of load movement.
- (1) Forward movement. The forward movement of loads, if not braced properly, will be caused by—
  - (a) Braking of vehicle on steep descents.
- (b) Sudden stops to avoid hitting pedestrians or vehicles.
- (2) Rearward movement. The rearward movement of loads, if not braced properly, will be caused by—
  - (a) Ascension of steep hills.
- (b) Load rebounds after the sudden application of brakes.
- (c) Sudden increase of speed in order to avoid an accident.
- (3) Lateral movement. The lateral movement of loads, if not braced properly, will be caused by—
  - (a) Rounding corners on sharp curves.

- (b) Traveling on high crowned or banked roads.
  - (c) Swerving to avoid accidents.
  - b. Prevention of load movement.
- (1) General. All of the movements of loads may occur when vehicles are traveling on rough or unpaved road or when traveling over snow and ice. However, practically all load movement can be prevented or eliminated by proper blocking and bracing. All loads will be balanced in the vehicle lengthwise and crosswise before the vehicle is released. Precautions will be taken to prevent vertical movement because of sudden stops or travel over rough terrain; as vertical movement can cause the breakdown of good blocking and bracing practices. If the load is not tight or is out of alinement, the unbalanced loading will cause unequal pressures. The use of bulkheads, separation gates, dividers (lengthwise and crosswise), layer separations, runners, blocks, cleats, and strapping properly fabricated and applied, will eliminate or prevent all load movement.
- (2) Forward movement. Forward movement can be prevented by shoring firmly against the front or nose bulkhead. The front bulkhead serves to square the load and to distribute load pressures over the frontal area of the vehicle rather than just at points of contact. When vehicle, furnished by the motor carriers, has a rounded or streamlined front end or an end other than square and the material to be loaded is a critical item, a delicate or fragile item, or an item that requires special protection and straight alinement to assure safe arrival at destinations, front bulkheads of a type and size compatible with the weight and type of commodity to be shipped may be used. A typical nose or front bulkhead is shown by figure 3-139. Front bulkhead detail and installation is shown by figures 3-140 and 3–141. The use of front bulkheads is not necessary in square nose trailers or vans unless the nose of the trailer or van has been bulged by forward load movement in previous shipments. If such a condition exists and the material to be shipped falls in the category previously outlined, the front bulkhead should be used.
- (3) Rearward movements. Rearward movements can be prevented by use of a rear bulkhead or gate. The rear bulkhead or gate must be braced, either with diagonal supports back to the door posts of the vehicle or by secured risers against the door posts and the bulkhead or gate. Backup blocks must




43% 43%

Trailers are also designed for uniform load distribution, as shown by the above sketches. The fundamental difference between loading trailers and trucks is: in the case of trucks, the average design provides for about 90% of the payload on

the rear tires and 10% on the front tires. In the case of trailers, the payload should be distributed equally between the rear tires and the fifth wheel which transfers its load to the truck-tractor.




With a part load or with a very heavy load having little bulk, it is common practice to put it at the front end of the trailer to get traction on truck-tractor rear tires. This overloads the truck tires and shortens their mileage life, to say nothing of bending the



truck rear axle housing. Application of trailer brakes may lock wheels, cause tire flat spots, or skidding, or both.

The load should be distributed over the full length of the trailer floor or platform.

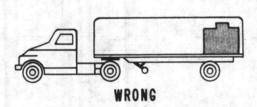

These examples are obviously wrong. In the case of the first trailer, the heavy load at the rear is overloading the rear trailer tires. There is practically no load on the fifth wheel, and the trucktractor rear tires would certainly slip and wear away rubber. Braking distribution would also be very uneven.



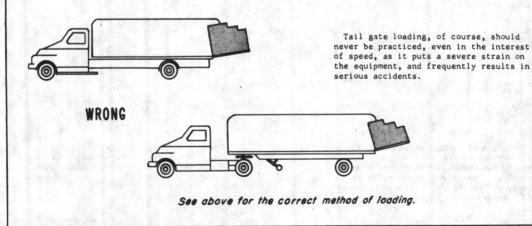


Figure 3-137. Approximate distribution of total weight-vehicle plus payload.

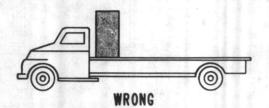

A heavy load, like a big piece of machinery or a safe, should not be loaded against the cab. This loading will bend the frame, perhaps permanently. It will also overload the front tires, may even cause a blowout on a worn tire. Hard steering will also result, and the load may be top-heavy.



A heavy concentrated load should be placed near the rear and on its long side if at all possible. Host of the load should be over the rear axle to get proper tire loading and eliminate bending of the frame.




A very heavy load should not be loaded at one side. This overloads one spring and the tires at that side. This loading could be bad enough to allow the brakes to lock on the wheels at the light side and cause flat spots on the tires, or a skid on a wet surface.




This loading has equal loads on rear tires and eliminates twisting of the frame, which might loosen rivets of cross members or frame brackets. Uniform loading crosswise prevents axle housing and wheel bearing overloading, too.


This above example applies to trucks and trailers alike.




This loading should never be permitted. The frame bends, the rear tires are very much overloaded, and enough weight is taken from the front tires to make steering almost impossible.



Again, the proper place for a concentrated load like this is just ahead of the rear axle, with the longest side on the floor.



This type of loading results from the use of the wrong vehicle for the job. Such loading can result, on rough roads, in an actual pivoting of the truck on its rear wheel, and taking the front wheels entirely off the road.



A tractor-trailer combination is the proper vehicle for use in service like this. By using the proper vehicle, damage to the truck and tires, and even serious accidents, may be avoided.

Figure 3-138. Examples of right and wrong truck loading.

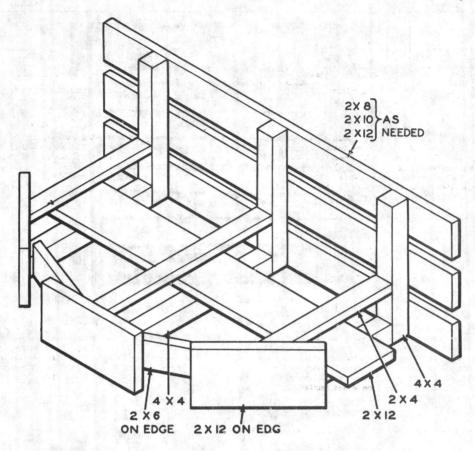


Figure 3-139. Front bulkhead.

be driven into place and nailed to the risers and gate to eliminate slack (A and B, fig. 3–142 and figs. 3–143 and 3–144).

(4) Lateral movement. Lateral movement can be eliminated by the use of space fillers, longitudinal separators, steel strapping, and by the use of rigid blocking and bracing devices.


### 3-917. Types of Loading

a. Wheeled containers. Closed trucks and trailers should be considered as large containers on wheels; as such, the interior bracing or blocking of the vehicle should conform as near as possible to the packing of individual containers. Through the use of filler material, bracing, blocking, separation gates, and layer separators it is possible to adapt the wide variety of items to the dimensions of the vehicle. Interior blocking and bracing provides cushioning and interior packaging to the material in this wheeled container and also protects the vehicle. Cargo containers of ISO/ANSI standards loaded

with general commodities will also use conventional blocking and bracing methods.

b. Adaptability of vehicles. The truck and trailer is adaptable to the many and various types of loads required to move the varied types of commodities such as, heavy or light items, fragile, bulky, compact, dense and rough, and high center of gravity items. In order to accommodate this variety of items the shipper must plan the load; properly prepare the truck; and block and brace accordingly. One method of preparing a truck for shipment of cylindrical items is shown by figure 3–145.

c. Unit loads. There are many types of loads suitable for truck loading, that is, the bonded block load for materials shipped in fibreboard containers; brick wall method; key sack method; paper retaining method; and lengthwise crosswise methods for loading bagged materials. However, the key sack method of loading is restricted to cloth bags and is not recommended for multiwall paper sacks. Paper retaining method of loading can be used for full truck load or stop off load (see A, fig. 3–146).

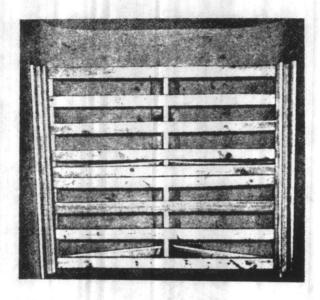

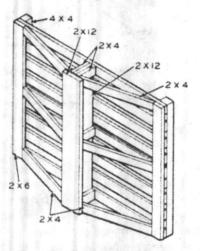


Figure 3-140. Front bulkhead-positioned in trailer, detail of bulkhead.


d. Step down load. In the step down type load, the bulk of the weight is on the axles and is stepped down to the center of the vehicle. The stepping down of the load is achieved by use of a riser; the height of the riser must be half the height of the unit or container being braced. The item or container may be utilized as a riser; however, in most instances, the riser should be fabricated from lumber or other suitable material (see B, fig. 3–146).

### e. Palletized loads.

(1) Advantages. The advantages of a palletized load is that a quantity of small packs or units can be consolidated into a few large packs; thereby reducing the number of handlings. For example: 300 containers of a given item can be consolidated into

10 pallet loads, thus, reducing the number of handlings by plus 96 percent. Consequently, the number of handlings involved in loading and unloading may be reduced from 300 to 10. Accordingly, palletization of materials for shipment would be beneficial to both the shipper and the carrier. Explosives and ammunition will be palletized in accordance with approved procedural publications/drawings issued by the military services.

(2) Forming pallet loads. Palletized loads may form a full uniform load, a tiered load, a staggered load, or a strapped load. The load should be balanced, weight should be evenly distributed, and blocking and bracing should be kept to a minimum. A staggered load of palletized items is illustrated

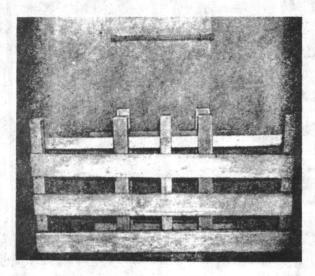




Figure 3-141. Front bulkhead—positioned in trailer, detail of bulkhead.


by figure 3–147. The pallets are staggered to obtain a compact balanced load.

- (3) Pallet size for maximum utilization. Pallets must be suitable for handling by all media of transportation for maximum utilization. The general service pallet 40 by 48 inches meets these requirements.
- f. Strapped pallet loads. Generally, pallet loads are strapped fore and aft and are secured on all sides. Blocking and bracing is kept to a minimum as the weight of the load combined with floor blocking of the bottom tier prevents the load from shifting in transit.
- g. Flat-bed truck and trailer loading. The basic principles of weight distribution, tight loading, and prevention of load movement all apply to the loading of open top vehicles. Materials loaded on an open top vehicle will be secured to the vehicle to prevent any possibility of the load shifting or falling

off the vehicle, shifting and contacting other traffic, fouling underpasses, culverts, bridge abutments, and creating a hazard to pedestrians. When the trucks and trailers, either open or closed, are pilitary equipment, it will be the responsibility the driver to assure that the vehicle is properly loaded and the load secured before the vehicle moves.

### 3-918. Freight Loss and Damage

- a. Adherence to methods and techniques to prevent loss and damage. Adherence to prescribed loading and securing methods and techniques will help reduce loss and damage to shipments in transit to a minimum.
- b. Visible loss or damage. Visible loss or damage existing at time of receipt of a shipment should be observed and properly recorded by the receiving

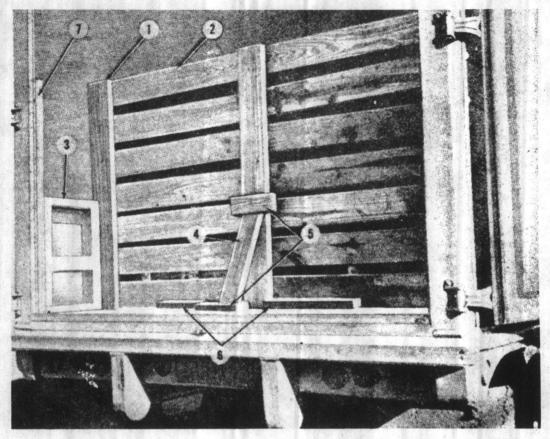

- Upright, 2" x 6" (3).
   Facing members, 1" x 6" as required by height of load
   End brace, 2" x 4" (2).

- Diagonal, 2" x 4" (1). Cleats, 2 x 4" (2). Back-up cleat, 2 x 4" (2). Upright, 2 x 4" (2).

### A. Posit oned in trailer.



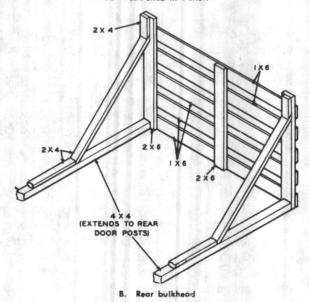


Figure 3-142. Rear gate.

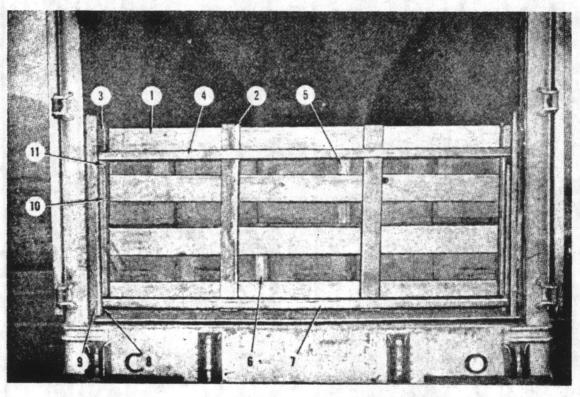

- Rear gate face member, 1" x 6" (4).
  Rear gate verticals, 1" x 4" (2).
  Rear gate verticals, 2" x 4" (2).
  Cross brace 2" x 4", nailed to kickers (2).
  Top layer fillers, 1" dunnage as needed.
  Bottom layer fillers, 1" dunnage as needed.
  Cross brace, 2" x 4", nailed to floor kickers (1).
- 8. 9. 10.
- Kicker, 2" x 4" nailed to floor (2).
  Upright, 2" x 4" nailed to door post (2).
  Upright support, 2" x 4", nailed to
  2" x 4" vertical (4).
  Kicker, 2" x 4", nailed to rear upright and
  upright support (2).

Figure 3-143. Rear gate positioned in truck.

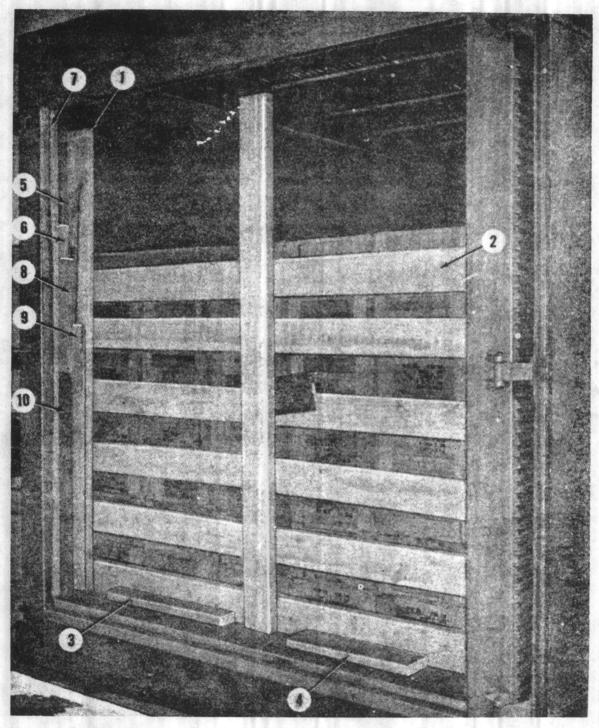


Rear gate vertical, 2" x 6" (3).
Rear gate face member, 1" x 6" (6).
Backup cleat, 2" x 4" (1).
Backup cleat, 2" x 6" (1).
Upright, 2" x 4" as needed.

Figure 3-144. Rear gate and dunnage.

Spacer, 2" dunnage as needed.
 Upright, 2" x 4" nailed to door post.
 Filler strips, 1" dunnage as needed.
 Filler strip, 1" dunnage as needed.
 Upright, 2" x 4" as needed.

15 September 1979 DOD 4145.19-R-1

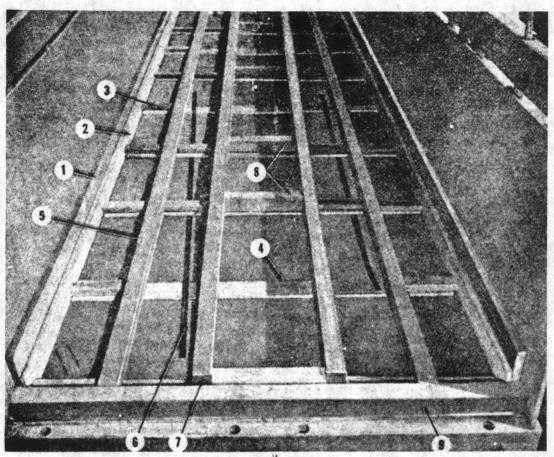

- Sidewall reinforcement, 2" x 12" on edge. Backup strip, 1" x 6" on edge. Spacers, 2" x 4", nailed to sleepers. Sleepers, 1" x 6", nailed to floor. Intermediate riders, 4" x 4".

- Fore and aft strapping, 11/4" x 0.035", precut and positioned undersleepers.

  Center riders, 4" x 6".

  Center braces, 4" x 4".

  End cross piece, 4" x 4".

Figure 3-145. Preparatory shoring for cylindrical items.

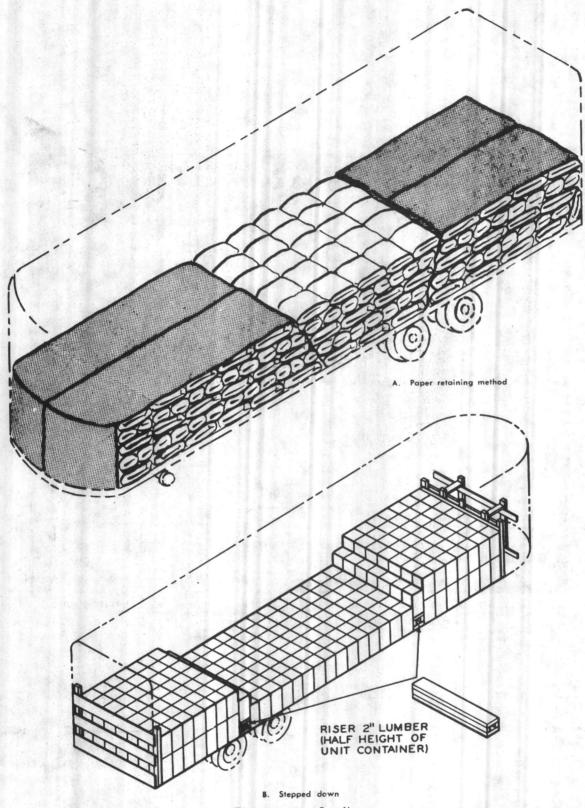


Figure 3-146. Loading.

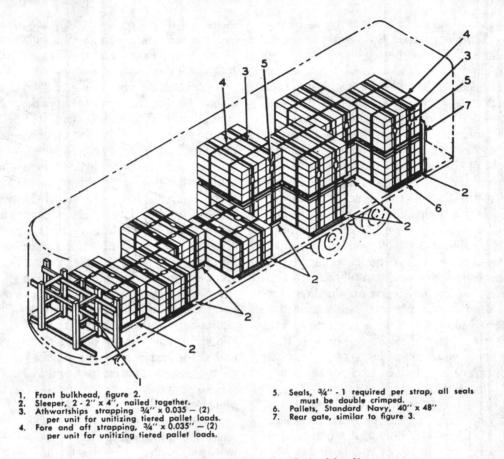


Figure 3-147. Staggered palletized loading.

personnel in accordance with the procedures of the appropriate military department.

- c. Concealed loss or damage. A complete report of circumstances, including the time damage to or loss of shipment was observed, should promptly be made to the appropriate local military freight traffic personnel responsible for initiating basic freight claims action, when—
- (1) Damage to or shortage in a shipment was not observed at time of receipt from the commercial carrier (concealed loss or damage).
- (2) Damage or shortage is discovered while being stored, processed, or reshipped from storage.
- (3) It can be shown that the loss or damage did not occur after the material left the custody of the carrier.
- (4) It is indicated that the loss or damage occurred during the transportation.

# 3-919. Instructions for Securing Materials Transported by DOD-Owned Motor Vehicles

- a. General. Every truck, semitrailer, full trailer, and pole trailer used for transporting cargo over public streets and highways will be equipped with bulkheads, tie downs, side boards, and blocking as hereinafter specified. Combinations consisting of a truck trailer and a pole trailer shall have the option of providing a bulkhead mounted either on the front of the pole trailer, or behind the driver's compartment of the tractor. When the bulkhead required is mounted on the tractor, the lading on the pole trailer will be securely fastened with tie downs meeting the requirements listed herein.
  - b. Bulkhead requirements.
- (1) Height and width. Bulkheads will be of such height as to block the forward motion of any piece

of lading on the vehicle, or alternately, as high as the driver's compartment of the vehicle or combination. Bulkheads will be of such width as to block the forward motion of any piece of lading on the vehicle or alternately, as wide as the widest portion of the vehicle.

- (2) Strength. The ultimate strength of the bulkhead will be such that it is capable of withstanding a horizontal forward force equal to one-half the static weight of the cargo carried when such force is distributed over that portion of the bulkhead extending from the floor of the vehicle upward to a height sufficient to stop the forward movement of any piece of lading carried on the vehicle or to the height of the driver's compartment of the vehicle or combination whichever is the lesser height.
- (3) Penetration resistance. Bulkheads will be so designed, constructed, and maintained as to resist penetration by any piece of lading carried on the vehicle when such vehicle is subjected to the maximum deceleration of its service brakes. Bulkheads will not have openings large enough to pass the smallest piece of lading carried on the vehicle.
  - c. Blocking and bracing requirements.
- (1) Cargoes subject to forward shifting. On vehicles carrying cargoes which cannot be placed firmly against the forward bulkhead, suitable blocking and bracing or tie downs will be provided in addition to the bulkhead specified in b above to prevent the forward shifting of such cargoes when the vehicle is subjected to the maximum deceleration of its service brakes.
- (2) Cargo subject to side shifting in transit. Vehicles carrying cargoes of such nature as to be subject to side shifting in transit, even when equipped with sideboards or stakes as required in e below, will have in addition such cargo securely blocked or braced to the sides of the vehicle.
- d. Tie down requirements. Every cargo-carrying vehicle will be equipped with either sideboards or tie down devices designed to prevent the falling, shifting forward, or backward motion of any lading being carried. Tie down devices will be as follows:
- (1) If the vehicle is without sideboards or sides, it shall be equipped with a minimum of two tie down devices on load lengths of 21 feet or less. For loads over 21 feet a minimum of three tie down devices will be used and an additional tie down device for each 10 feet of load length over 30 feet. Additional tie down devices will be provided if necessary to secure each piece of lading being transported,

either by direct contact with the tie down device or by use of dunnage contacting sufficient individual pieces of the lading and the dunnage then secured by the tie downs.

- (2) Each tie down device will be equipped with a load binder, Federal specification GGG-G-325, Binder, load. The binder chain will be attached to the tie down bar or to such other tie down devices provided by the truck manufacturer. When vehicles are not equipped with tie down devices, the binder chain will be of sufficient length to pass over the cargo and underneath the vehicle body or flat bed, stake sides, or pole trailers. Chain will be ¾ inch steel BBB Coil Chain in accordance with Federal specification RR-C-271, Chains and Attachments, Welded, Weldless and Roller Chain. Binding chains will be adjusted as tight as possible.
- e. Stakes and sideboards. Vehicles carrying cargo not secured in compliance with (1) above will be equipped with sides, sideboards, or stakes; a rear end gate; and header board. Stakes, sideboards, end gate, and header board will be of no lesser height than the load carried, and without an opening large enough to pass the smallest article on the vehicle as loaded.
- f. Long material. When cargo, such as long lengths of pipe, piling, telephone poles, or similar material, is carried on pole trailers and it is of such length that the cargo must be used for connecting the front and rear bolsters, uprights, the height of the cargo will be inserted in pockets on the right and left side of each bolster. Such uprights will be tied together above the load. Also, the cargo will be bound together by a binding chain at the center of the load length. A red flag will be tied to the end of oversized material for safety purposes.
- g. Vehicles exempt from tie down requirements. Vehicles transporting articles which because of size, shape, or weight require special vehicles for their carriage or special methods for their fastening, are exempt from tie down requirements stated herein. Loads on such vehicles, however, will be securely and adequately fastened to prevent any forward, backward, or sideward motion of the load when the vehicle is subjected to the maximum deceleration of its service brakes.
- h. Acceptable loads. Department of Defense drivers will not be permitted to move a load if the load is not secured in compliance with these instructions when such loads are offered for transportation over public streets and highways.

### Subsection 3. PNEUMATIC DUNNAGE

# 3-920. Use and Maintenance of Pneumatic Dunnage

a. Use. Pneumatic dunnage is an airtight bag with a valve or valves for inflating and, in the case of reusable types, for deflating. It is designed to occupy void spaces in loaded rail, highway or marine conveyances, including intermodal containers, to secure shipments in transit. Pneumatic dunnage is not for use in aircraft. It may not be used to secure explosives or other hazardous articles without prior approval of the Bureau of Explosives. Also, it cannot be used to secure loads of military explosives and ammunition.

b. Types and sizes. Pneumatic dunnage is available in two types—reusable (fig. 3–148) and disposable (fig 3–149). The nomenclature is "Dunnage, Pneumatic, Cargo Shoring—Type I Disposable and Type II Reusable." Both are covered by Federal specification PPP-D-1427. Units are available through normal supply channels from the Defense General Supply Center, Richmond, VA. Sizes of pneumatic dunnage adopted by the Department of Defense as most suitable for general use are as follows:

	Inflated size	Deflated size	Weight (approx)
Type I	36" x 48"	36" x 58"	12 lbs
(Disposable)	48" x 48"	48" x 58"	18 lbs
	48" x 71"	48" x 82"	22 lbs
	48" x 96"	48" x 106"	26 lbs
Type II	48" x 48"	57½" x 57½"	18–22 lbs
(Reusable)	48" x 72"	57½" x 81½"	26-29 lbs

(1) Reusable pneumatic dunnage can be utilized for an indefinite number of shipments. It is fabricated from high tensile strength, finely woven, nylon fabric treated with a rubber or rubber like compound and vulcanized as a single unit. (Units equipped with a removable bladder are also currently in the system. This design has been outdated by the specification listed above, however, these units should be used until no longer serviceable.) The unit has a high-flow valve assembly which consists of a threaded valve body molded into the dunnage unit. On some models the inflation valve has a metal washer and special nut to anchor the valve body to the dunnage unit. On these models a valve stem screws into the valve body and is secured by a chain attached to the metal washer. Other manufacturers use an "O" ring type inflation valve which incorporates a valve cap and a valve insert which houses a check disc.

Reusable pneumatic dunnage units bear a serial number. This affords opportunity for control purposes. Units can normally be returned to the shipper without significant expense or problem. When used for dunnaging rail shipments, most tariffs provide for the free rail return of the units by the reverse of the inbound routing. Where free return is not provided, tariffs will indicate the charges involved. Where return cannot be reasonably achieved, disposable pneumatic dunnage units may offer a cost advantage.

(2) Disposable pneumatic dunnage, which is designed for one time use, consists of an inner bag made of high-density airtight polyethylene encased in layers of 100-pound test extensible kraft paper. The outer layer of kraft paper is coated with a weather-resistant polyethylene coating. The ends of the bag are sealed by a procedure in which the polyethylene inner bag and all layers of paper are wrapped around a 7/16-inch wooden dowel. The inner bag and paper are held in position on the dowel by a 1/26-inch-thick tubular metal sleeve. An inflating valve is heat sealed into the inner bag. This valve is not designed for rapid deflation of the unit. At destination, disposable pneumatic dunnage is deflated by cutting or otherwise puncturing the bag.

c. Dunnage. There are two principal considera-

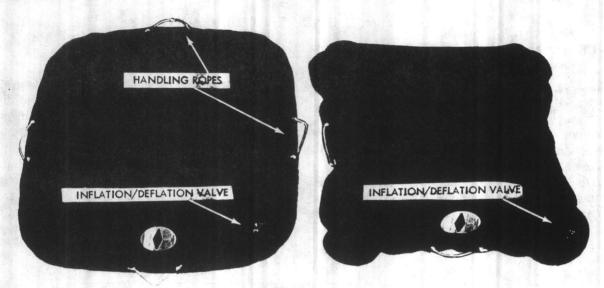



Figure 3-148. Reusable pneumatic dunnage unit complete.

tions in dunnaging of material in transportation conveyances, i.e., performance and cost. Regardless of costs, the selected methods must do the job; however, there is usually more than one method that will achieve the performance goal; hence, cost comes into clear focus. Over many years of experience, the application of fixed dunnage is well understood. This technique is explained elsewhere in this section. So that a method may be properly explored in determining the most preferable dunnage to install under a given situation, the following recount advantages and considerations in use of pneumatic dunnage:

- (1) Allows more rapid installation and removal than conventional dunnage. Under many applications, this method is more economical in total than other dunnaging methods (*d* below).
- (2) Provides a highly resilient load restraining method.
- (3) Provides relatively low pressure bracing (2 to 5 PSI) for loads. (Inflation pressure for pneumatic dunnage units in truck trailers/containers must not exceed ¾ PSI max.)
- (4) Is capable of tightening loads in which compactness was not sufficiently achieved during loading; however, efficiency of loading procedures should not be reduced because of this corrective action of pneumatic dunnage. (There is no substitute for proper loading, regardless of type of dunnage material used.)
  - (5) Is capable of repositioning cargo loads

shifted by sudden impact and also will expand to take up slack developed through normal load jostling in transit. When a load does shift on sudden impact, the dunnage unit cushions the load, whereas fixed bracing does not. This cushioning action is advantageous for even slight impacts.

- (6) Is capable of retaining adequate cushioning air pressure during long-distance shipments up to 30 days.
- (7) Is not seriously affected by changes in temperatures and altitude encountered during surface transport (pneumatic dunnage is *not* for use in aircraft).
  - d. Comparative dunnaging costs.
- (1) Use of pneumatic dunnage can result in substantial savings in certain applications when used in lieu of conventional type dunnage. To effectively assess the possibilities of savings by use of this method as compared to fixed dunnage in a particular situation, it is necessary to consider the following:
- (a) Manhours required for the dunnage operations as well as hourly rates for workers (skilled car blockers are not required for pneumatic dunnage).
- (b) Cost of conventional dunnage material as opposed to the cost of reusable pneumatic dunnage. In the case of reusable pneumatic dunnage, usage cost is obtained by dividing the original cost of the unit by the number of trips expected from the unit (could range up to 100 or more trips).
  - (c) Miscellaneous costs to include any cost of

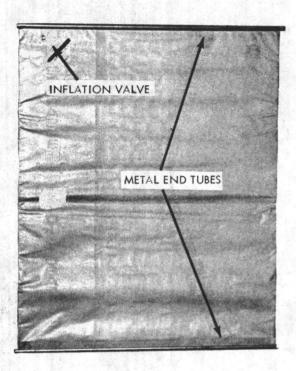

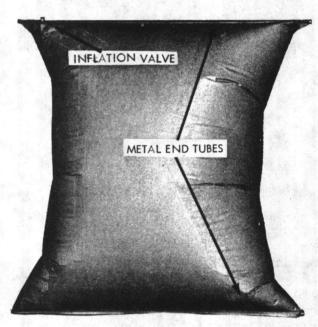
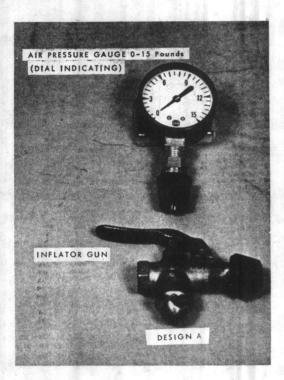


Figure 3-149. Disposable pneumatic dunnage unit complete.

return of reusable pneumatic dunnage, as well as administrative costs to control accountability. Maintenance of the reusable units is considered negligible.

- (d) Salvage value of conventional dunnage.
- (e) Dunnage removal costs.
- (f) The choice between use of disposable or reusable pneumatic dunnage. Where the return of dunnage units can be reasonably assured, the reusable types are generally the more economical to use. The choice to be made is not solely a judgment as to whether pneumatic dunnage is more economical to use than the more conventional methods, but also a further determination must establish which type and size of pneumatic dunnage offers the greater cost advantage.
- (g) Loading pattern. A pattern which results in the very minimum void space so as to obviate the use of any dunnage is the most economical procedure. When applied to specific dunnaging problems employing various methods for staying a load, the savings to be realized through application of pneumatic dunnage are in direct relation to the type and extent of conventional dunnage which would otherwise be utilized.
- e. Accessories. In addition to a source of compressed air, an inflation kit (fig. 3–150) is required for the use of pneumatic dunnage (reusable or disposable). This kit consists of an air pressure gauge 0–15 pounds with 1 pound graduations and an inflator gun (air chuck) with a ¼ inch inside pipe thread. The gauge and gun are each fitted with a



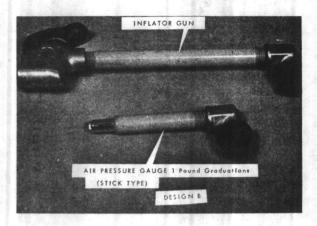


Figure 3-150. Pneumatic dunnage inflation kit.

special rubber tip that seats into the valve. On occasions where inflation pressures must be more finely controlled (such as use in truck trailers or when dunnage is securing fragile or critical items), an inflation gauge with ¼-pound graduations should be used.

### f. Placement.

(1) Consideration of the characteristics of pneumatic dunnage is required prior to use. Pneumatic dunnage units secure load contents by exerting pressure against the cargo surfaces facing the void; therefore, it is necessary that the profile and physical make-up of the surfaces be capable of accepting the pressures involved. Packaged or unpackaged items of a very irregular contour or with sharp or pointed edges may pose a problem in use or may cause damage to the pneumatic units. Rough surfaces can also cause abrasion and wear. Cargo must afford a rather solid, even surface for pneumatic dunnage contact. The use of buffer boards (plywood, fiberboard or lumber) to spread pressures over a greater area may be desirable in some cases to insure optimum results in use of pneumatic dunnage. Since cargo is loaded from the ends of a rail car to the center, void space results at the door area in the center of the car. Unless an extremely fragile load is involved, there is no need to shore cargo with dunnage units at ends of a car as adequate dunnage units in center of the load will compress cargo against the ends of the car. Use of dunnage units on top of a load is not necessary since the weight of cargo and lateral pressure of dunnage units will restrict vertical movement. Pressure exerted by the dunnage units will also generally restrain lateral movement of cargo. Additional units may be used for positive insurance against any excessive lateral movement of fragile or critical material.

(2) Pneumatic units are designed to fill a 12-inch void when inflated to 2 to 5 PSI air pressure. (Pneumatic dunnage used in truck trailers/containers should not exceed ¾ PSI as sides or ends of trailer may be deformed by greater pressures.) Where cargo loading would result in a void significantly larger than 12 inches, the load should be planned, if practicable, to provide separate smaller voids. In the interest of load security, maximum cushioning, and wear upon the units, the dispersion of dunnage units to several points in the load is usually more desirable than placing two or more

bags directly against each other to fill a large void. A point to emphasize is that the initial inflation of pneumatic dunnage within a void normally results in a 2- to 6-inch expansion of the void depending on the cargo load characteristics, hence what was a 12-inch void may finally measure 14 to 18 inches.

(3) For load configuration adaptable to pneumatic dunnage use, each conveyance with a void space of approximately 12 inches after cargo loading (across width of conveyance) can accommodate positioning of at least one unit of pneumatic dunnage or a row of the units to restrain the cargo. Figures 3-151 through 3-157 illustrate various sample patterns that may be used to adapt pneumatic dunnage to the various load voids and configurations. Note that dunnage arrangement must be designed to secure the entire lading. Buffer boards (may be of various types depending on lading features) should be inserted when rough surfaces of load may puncture or abrade the pneumatic dunnage units, or when pressure of the inflated units may damage the cargo, or where the load faces offer a pattern that would be difficult to stay without buffers. These figures depict either disposable or reusable units.

### g. Operational procedures.

- (1) Installation.
- (a) Measure void space between cargo surfaces where dunnage units are to be inserted. Determine number of units required based on horizontal and lateral void spaces, number of rows of cargo, number of tiers of cargo, and characteristics of cargo. Determine size of units required based on dimensions of surfaces facing the void. Determine the number of buffer boards required, if any.

Note. Loading practices which insure tight cargo positioning will minimize void spaces between containers and reduce cargo movements upon dunnage inflation.

(b) Position dunnage units to ensure maximum effective contact with the part of the load they are to brace. Top tier units of a 2-tier installation which must be inflated several feet above the car floor may be suspended in position for inflation by hangers attached to dunnage handles (fig. 3–158). This can be accomplished by spanning the void space with a bar across the top of the two load sections and then suspending the bags with wire hangers hooked through the dunnage handles. Bags are then inflated just enough to secure the units in position. At this point, the suspending hangers and crossbar should be removed to prevent binding the

hangers against the bags. Care should be taken to assure that valves are positioned for ease of inflation/deflation and pressure readings.

(c) Inflate each unit to proper air pressure using air compressor/air supply and inflation kit. When more than one unit of pneumatic dunnage is placed in a conveyance, the inflation process should be alternated from one unit to another until all units reach desired pressures. This will assure that each unit will assume regularity in contour and size with subsequent firm positioning. Inflation requires only a few minutes per unit depending upon output volume of air compressor/air supply. A high volume air supply is most suitable. Each unit is designed to normally cushion within a 2 to 5 PSI range as restricted by load characteristics. Pressure may be increased to a maximum of 8 PSI, depending on load characteristics, when initially compacting cargo. (Reminder: 3/4 PSI maximum in truck trailers/containers.) This over inflation must then be "bled off" to the proper shipping pressure. When inflation is completed, tighten each valve stem by hand (do not use a wrench or pliers to tighten valve). Properly inflated and positioned units will maintain correct contour in void space, but an unrestrained, insufficiently restrained, or overly inflated unit will tend to assume a round shape and will transfer excessive pressure to a limited area of the cargo facing. When inflating disposable pneumatic dunnage, inflate the unit slowly until the bag has filled out; rapid inflation has a tendency to crystallize the polyethylene liner opposite the inflator valve.

(d) Measure the resultant void. If excessive void is present, deflate units. (This deflation process is more suitable for reusable units as disposable units do not provide rapid deflation using valve fixture.) Reposition cargo, if practicable, or insert additional dunnage units in the void. When dunnage units are correctly installed, they must be deflated to the normal shipping PSI, usually 2 to 5 pounds (¾ PSI maximum inflation in truck trailers/containers) depending on cargo characteristics. As mentioned above, deflation process is slow with disposable units so excessive pressures should not be built up.

(e) Figures 3–159 through 3–165 illustrate various application patterns in use of disposable or reusable pneumatic dunnage units. Observe that figures 3–162, 3–163, and 3–164 depicting marine carrier application show multiple dunnage units positioned side-by-side for void filling. In this area

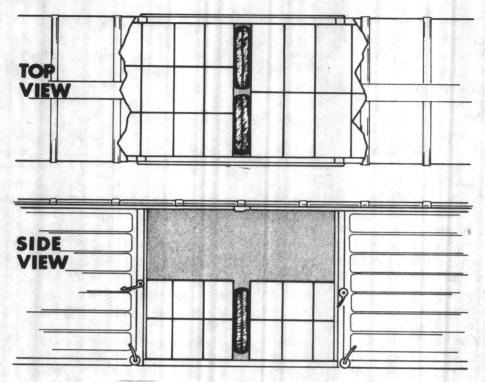


Figure 3-151. Single void pneumatic dunnage bracing pattern.

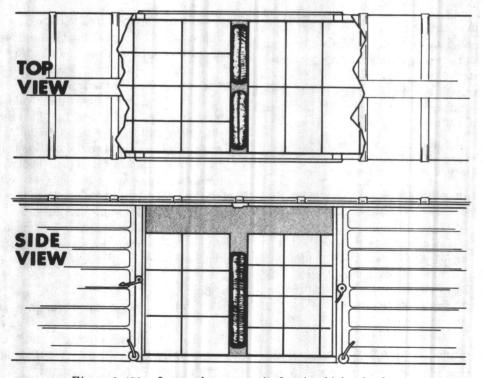


Figure 3-152. Larger dunnage units bracing higher loads.

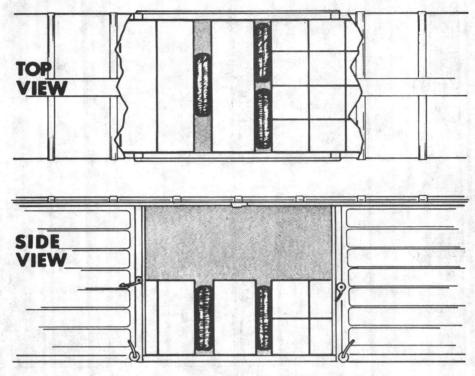


Figure 3-153. Multiple void bracing with pneumatic dunnage units.

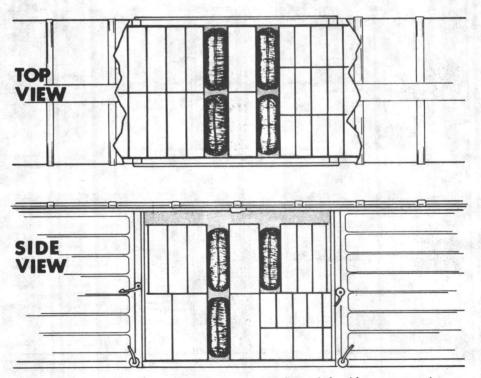


Figure 3-154. Pneumatic dunnage units in varied void arrangement.

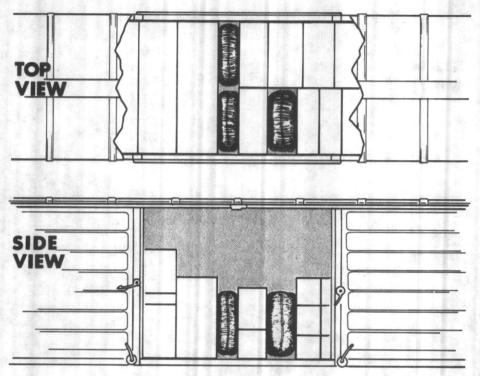


Figure 3-155. Pneumatic dunnage units staying load of various package sizes.

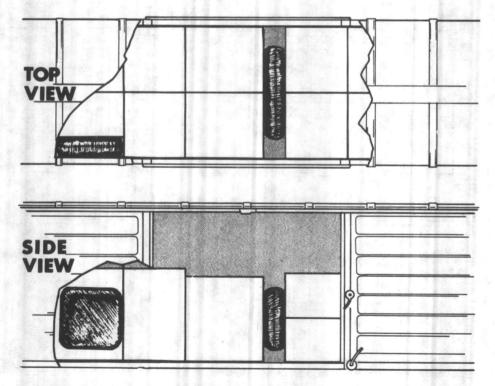


Figure 3-156. Pneumatic dunnage stays load laterally and longitudinally.

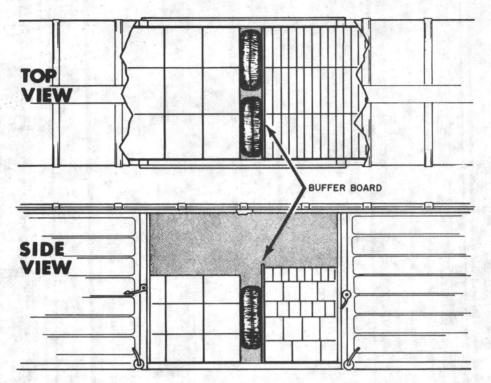


Figure 3-157. Buffer board insertions.

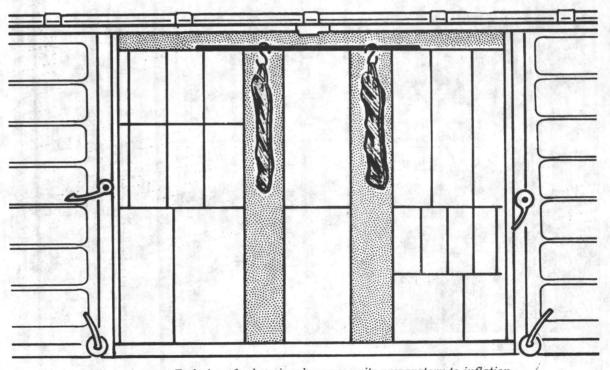


Figure 3-158. Technique for hanging dunnage units preparatory to inflation.

DOD 4145.19-R-1

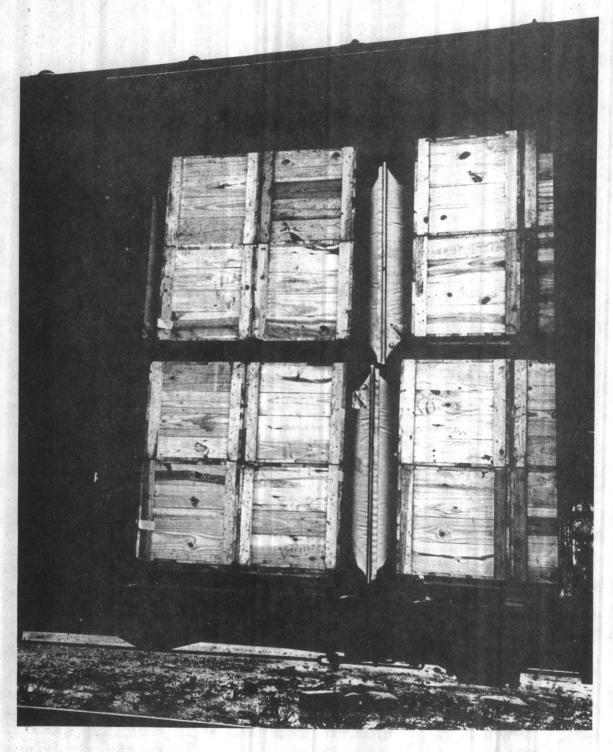


Figure 3-159. Load stayed with multiple rows of dunnage units, size 48 by 48 inches.

DOD 4145.19-R-1

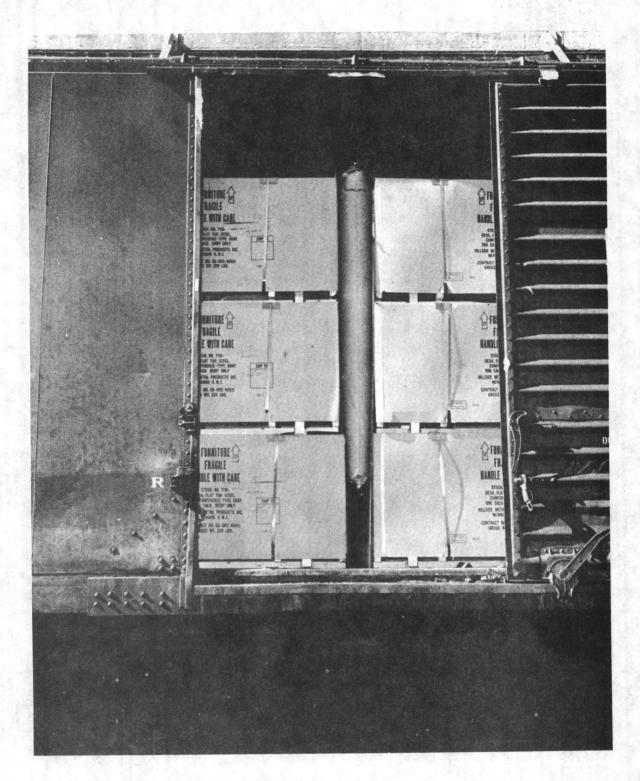


Figure 3-160. For load protection, buffer boards complement 48- by 96-inch dunnage units.

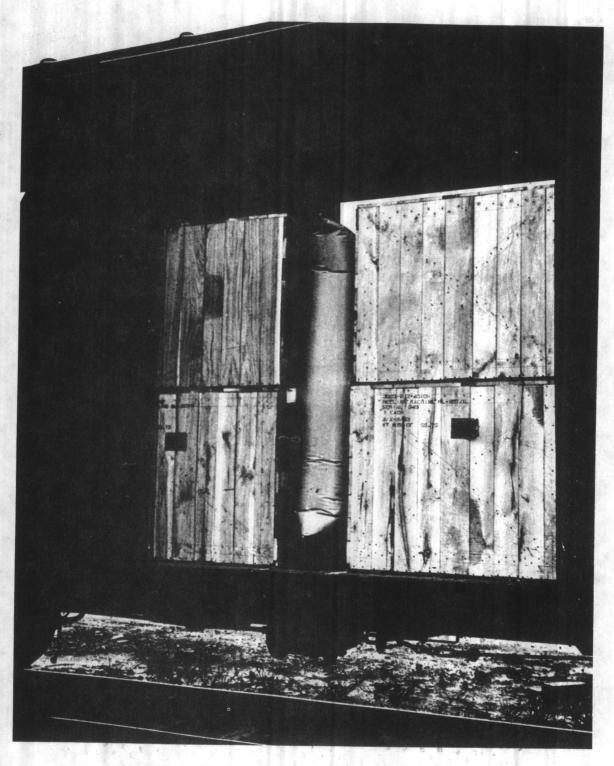


Figure 3-161. Load stayed with 48- by 72-inch units.

15 September 1979 DOD 4145.19-R-1

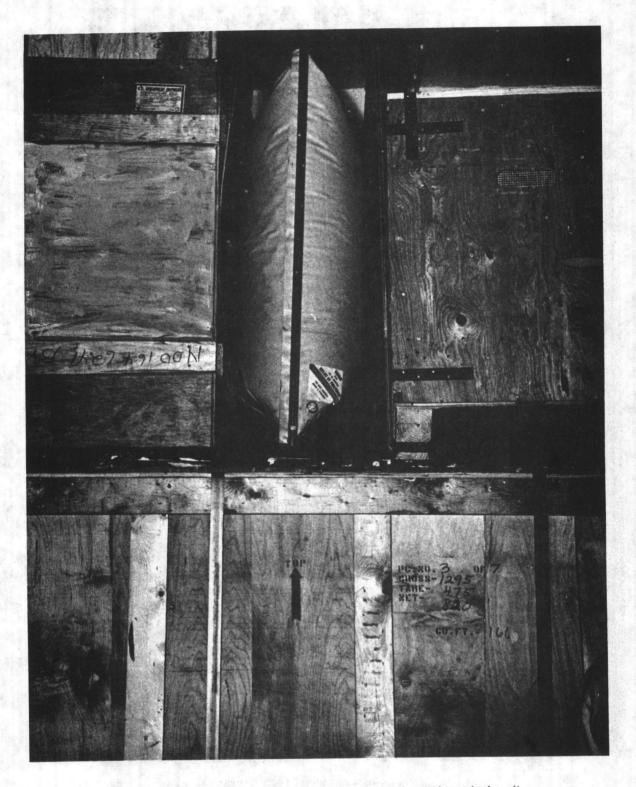


Figure 3-162. Load void in vessel hold occupied by 48- by 48-inch unit.

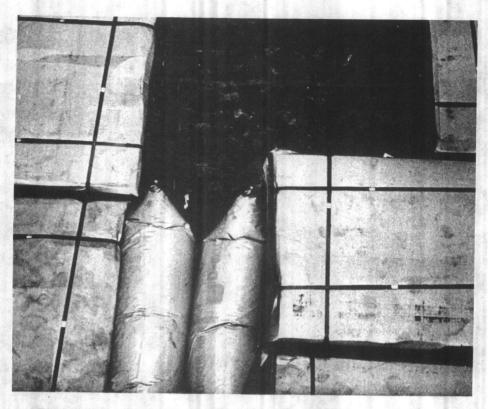


Figure 3-163. Two units placed side-by-side occupy load void in vessel hold.

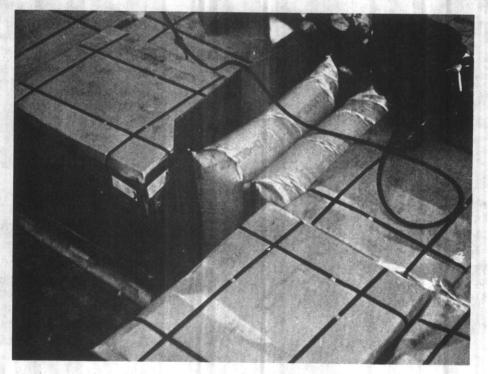


Figure 3-164. Dunnage units in process of inflation in vessel lower hold.

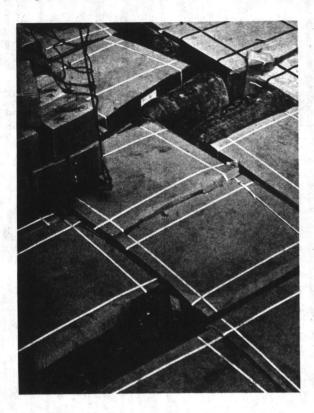


Figure 3–165. Variable sized voids occupied by dunnage units in stowage.

of use (marine), this procedure has proven acceptable, notwithstanding the comments in f(2) above. (2) Removal.

(a) Cut or otherwise puncture the disposable pneumatic dunnage units at any desirable location on the bag and remove from conveyance.

(b) Deflate the reusable pneumatic dunnage units by releasing the valve. Make sure that deflation of unit(s) will not permit any unsupported cargo to fall or shift to an unsafe position. Upon removing unit from conveyance, roll up toward the valve end to force the exit of any remaining air. This should be done immediately upon removal and the valve components retightened to prevent valve damage or entry of foreign material. Units removed at destination should be marked for inspection and repair, as appropriate. Dunnage units should be placed in a protected storage area if not to be immediately returned to shipper. See b(1) above on return of units. Keep buffer boards for further use, if practicable, upon removal from carriers.

h. Care and handling of pneumatic dunnage units.

- (1) Reusable pneumatic dunnage units should be stored in areas that are relatively cool and not exposed to excessive sunlight. A convenient means of storing the units is to lay them out on pallets equipped with superstructures so as to avoid excessive superimposed weight. Normally, not more than 25 units should be contained within such a storage aid. The units, with male valves securely fixed in closed position, are to be laid flat. Folding of the units for storage will tend to cause deterioration of the unit at the fold area should they remain in such position for extended periods, especially with weight imposed on them. Disposable pneumatic dunnage units do not require any more protection in storage than given to other paper products. They can be stored in the receiving container. Disposable units have a recommended shelf life of 12 months.
- (2) A reusable pneumatic dunnage unit must be inspected and repaired, as necessary, when puncture, abrasion, valve failure, or other defects are evident.
- (a) Inspectors should consider valve components and surfaces of casing, mark areas requiring patching; if punctures cannot be detected by visual inspection, inflate unit to 6 pounds pressure, brush soap suds over the valve area and other areas of the bag to test for suspected leaks. Bubbles indicate leaks and these leaks should be clearly marked for repair. A sure way to determine the pressure retention capabilities of the units is to inflate them to 4 to 6 pounds PSI; then set aside for 24 to 48 hours. A final check would then be made before use to assure that they are holding adequate pressure.
- (b) Repair of reusable pneumatic dunnage units can be accomplished as follows:
- (1) Install new valve parts, if inspection indicates a leaking valve.
- (2) Patch punctures or tears. The damage area must not exceed 6 inches in length nor be within 3 inches of valve or bag seam. Repairs will be accomplished with repair kit (available from dunnage unit manufacturers). The instructions included with the kits should be carefully followed. Reusable dunnage units with major damage such as valve deformation, seam damage, or any damage within 3 inches of the seam or valve should be returned to the manufacturer for repair if the projected remaining life of the unit justifies such action.

Note: For bladder type units remaining in system, the repair considerations above will also apply to the bladder.

(3) Since disposable pneumatic dunnage is for one-time use, there is no inspection for repair nor any processing for return to shipper.

### Section 10. UNIT LOADS

Delian	Paragraph
Policy	3-1001
Principles of unit loads	3-1002
Types of unit loads	2 1002
Advantages of unit loads	3–1003
Unitizing methods	3-1004
Unitizing loads by shrink wrapping	
Cinciang loads by shrink wrapping	3_1006

## 3-1001. Policy

Maximum use will be made of unitized loads where such use will result in an overall economy to the Department of Defense. To conserve time, manpower, equipment and reduce the possibility of pilferage, unit loads will be used in receiving, storage, and shipping operations wherever practicable. Items which can be palletized will be formed into unit loads as soon as received and handled as units throughout the entire storage and materials handling operation. Individual procedure publications/drawings will be issued by the Military Services to cover palletization of explosives and ammunition commodities. It is mandatory that these publications/drawings be used when palletizing explosives and ammunition.

# 3-1002. Principles of Unit Loads

- a. The combining of numerous items into a unit load of appropriate size which can be handled with available equipment and within existing facilities is most economical. The larger the number of items handled as a unit, the smaller the handling cost per item. The savings by this method can offset the initial cost, operation, and maintenance of the mechanical equipment required to lift and transport the heavier loads.
- b. To minimize double handling of material, non-palletized items which are received in quantities suited to palletization will be palletized at the earliest practicable point during the receipt process (fig. 3–166).
- c. Practical limits to the application of unit loads include the physical characteristics of the items, size of pallet, storage area, elevators (size and capacity), size of doors, capacities of available materials handling equipment, and aisle widths.
  - d. Generally, large rigid items (such as lumber,

pipe, and bar stock) need not be palletized but can be bound into unit loads for mechanical handling. As much tonnage as possible will be hauled in a single trip.

e. The unit load principle can also be applied to the design of the container for individual units or items. For example, a 50-pound unit can be handled in less time and at less cost per pound than two 25-pound units. However, the weight of any unit or container that must be eventually manhandled will be limited by the strength of the average man. For this reason the gross weight of these containers or units should be limited to no more than 70 pounds where possible.



Figure 3-166. Cartons palletized close to stock for unit handling.

DOD 4145.19-R-1



Figure 3-167. Nonbonded unit loads.

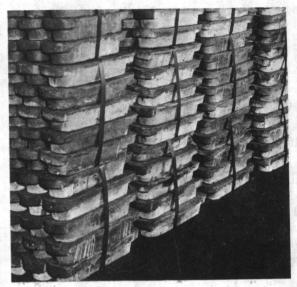


Figure 3-168. Bonded unit load.

### 3-1003. Types of Unit Loads

a. Unit load. A unit load is normally composed of two or more pieces or containers handled as a single unit. Generally, the unit load will be supported on a pallet or on a base so designed that the load can be picked up from any direction by mechanized handling equipment. When a special base is not provided, the material will be arranged and tied in such a manner that handling as a unit load will be possible.

b. Palletized and containerized unit loads. Definitions, methods, materials, and techniques concerning palletized and containerized unit loads on standard general purpose pallets, skids, runners, or pallet-type base will be in accordance with MIL STD-147 (palletized and containerized unit loads for 40" × 48" pallets).

c. Bonded unit load. Frequently, because of the type of material or items to be transported, or because of shocks and movement which may occur while in transit, it will be necessary to bond the items comprising the unit load. The items will be formed into a bonded unit load (with or without a pallet) by means of adhesive, strapping, edge protectors, or other storage aids designed for this purpose (fig 3–168). The bonded load will be designed to remain as a unit, from the place of assembly to

the ultimate place of use, throughout all phases of storage, handling and shipment.

d. Nonbonded unit load. Nonbonded unit loads will be a type or shape that can be deposited, without bonding, on a load base and transported as a unit during normal handling and storage operations (fig. 3–167).

### 3-1004. Advantages of Unit Loads

a. Economy. Unit loads provide an economical means of handling, storing, and transporting by eliminating manual handling of individual items and minimizing the incidence of pilferage.

b. Speed in handling. With unit loads, more tonnage can be moved in less than is possible with other handling methods.

c. Utilization of cubic space. Material in unit loads can be mechanically stacked to greater heights, thus utilizing a greater percent of available cubic storage space. Covered space is expensive; therefore, increased utilization will decrease the overall cost of storage. During periods of increased receipts, the demand for storage space frequently exceeds the supply. Utilization of cubic space is even more important at this time.

d. Decreased damage to material. Incidence of damage to material handled under the unit load

concept will be much less than for material handled as individual containers through all steps of storage and transportation.

e. Safety. Handling of material in unit loads is safer for personnel. Many of the accidents most common to storage operations occur where individual container handling is involved.

# 3-1005. Unitizing Methods

a. Nonpalletized unit loads. Usually, nonpalletized unit loads (including lumber, steel and bar stock) whether assembled for storage or shipment will be much larger in length than the normal palletized unit load. However, the dimensions of nonpalletized unit loads should not exceed 48 inches in either width or height (figs. 3–169 and 3–170).

b. Use of storage aids. Storage aids such as dunnage, collars, spacers, separators, strapping, and others should be utilized when necessary to secure, bolster, or protect unit loads in storage as well as loads prepared for shipment. For details in the use



Figure 3-169. Nonpalletized unit load of boiler tubes.

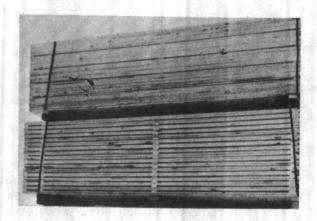


Figure 3-170. Nonpalletized unit load of lumber.

of these aids for storage purposes refer to chapter V of this regulation. For their use in shipping functions refer to MIL STD-147.

- c. Cube dimension and weight requirements of unit loads.
- (1) The detailed requirements concerning unit load cube dimensions and weight are contained in MIL STD-147.
- (2) Palletized unit loads made up for storage and not for shipment may exceed the height and weight limitations specified for unit loads designed specifically for shipment. Deviations will be limited to the following:
- (a) Capacity of the materials handling equipment.
  - (b) Stacking height of the unit.
  - (c) Unusual shape or size of items.
- (d) Storage capacity of the building or storage area.

# 3-1006. Unitizing Loads by Shrink Wrapping

a. Definition. Shrink wrapping. A process of enclosing a load (usually pallet size) in a preformed polymer bag or polymer roll stock and with the application of heat, a reduction of the enclosure size

occurs thereby creating a firm, form fit about the load.

- b. Types of shrink equipment. The major types currently available are—
- (1) Shrink chamber. This is a heat chamber or oven (heat source can be gas or electricity) having a single door for entrance and exit, and a conveyor or movable platform to transport the load. The operating temperature is automatically controlled and the time the load is subjected to the heat is either automatically or manually controlled. Length of load time in chamber depends on film thickness and film type. Approximate capacity is 30 pallets/hour.
- (2) Shrink tunnel. This equipment has operating characteristics similar to the shrink chamber with major differences being in feed mechanisms and feed rate. With the exit door being a separate opening and opposite from the entrance, a continuous feed of pallet loads is possible handling a capacity of 35 to 60 pallets per hour depending on type of equipment. Heat loss through the entrance and exit openings can be contained either by actuated doors or air curtains. The tunnel is the method necessary if a high rate of output is required (fig. 3–171).

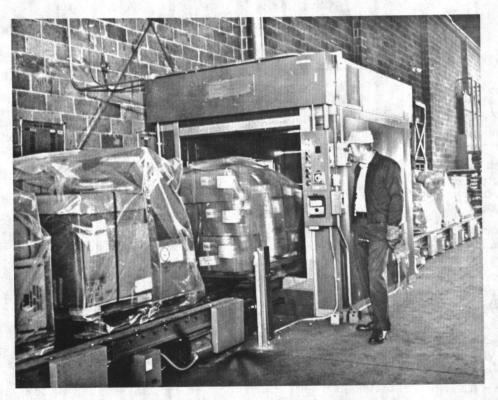


Figure 3-171. Shrink tunnel.

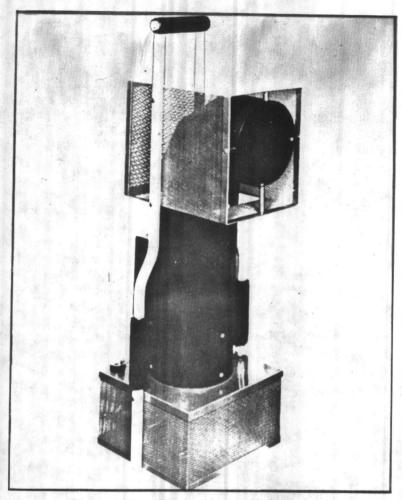


Figure 3-172. Hand-held, portable heat cannon.

- (3) Rotary tower. This type uses electrically heated hot air to shrink the film as the load rotates a full 360° in front of the heat source. As only part of the film is subjected to the heat at one time, a slower output results.
- (4) Ring type. This type uses a gas or electric heat source contained within a square or rectangular framework which is regulated to lower gradually around the load. This method heats all four sides as the heat source passes over the load. The operation is automatic with cycle time again varying with the gauge and type film used.
- (5) Hand-held portable heat cannon (fig.3-172). This is designed for sample load preparation and limited quantity production. It is the smallest and least costly piece of equipment available.
  - c. Types of shrink film available.
    - (1) A variety of shrink films is available and

- the user must assess his particular requirements to determine the density and type of film to be used. There are two general categories of film, sheets (figs. 3–173 and 3–174) and preformed bags (figs. 3–175 and 3–176).
- (2) The preformed bags are more widely used, each type being available in a wide range of thickness, construction, and sizes. Some of the shrink films available are listed below:
  - (a) Polyethylene.
  - (b) Polyvinylchloride.
  - (c) Polystyrene.
  - (d) Polypropylene.
  - (e) Polyester.
  - (f) Polyvinylidene chloride.
  - (g) Rubber hydrochloride.
  - d. Shrink film characteristics.
    - (1) Polyethylene film because of its perform-

15 September 1979 DOD 4145.19-R-1

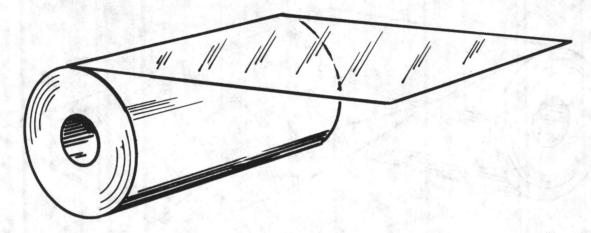


Figure 3-173. Flat sheeting.

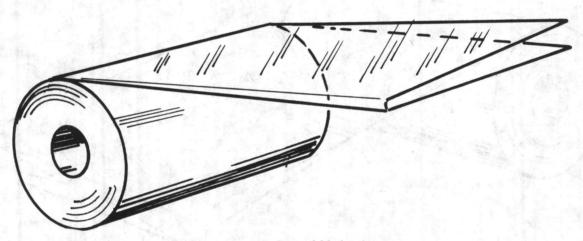


Figure 3-174. Centerfold sheeting.

ance characteristics and low cost is the most widely used. The ability to stabilize heavy loads becomes apparent when it is realized that the applied shrink-film surface area is approximately 10 percent greater than the surface area of the palletized load. Shrink tension is thus applied after this 10 percent has been shrunk to fit the contour and allows the film to become a structural part of the package.

(2) In film production, controlled stretching builds stress characteristics into the film. Heating the film releases the built in stresses causing it to shrink. The film shrinkage can be controlled in two directions, either in the circumferential direction or height of the load.

(3) Thickness of polyethylene shrink film used varies depending on the restraint requirements.

Most industrial applications use film 2.5 to 8 mils thick. The ability of film to stabilize a heavy load is easy to visualize when one realizes that a restraining force of 2,000 psi sometimes occurs over the entire area of the load surface. This factor together with the inherent elasticity of film makes it an outstanding containing medium.

(4) Shrink-film bags can be either centerfold or gusseted types (figs. 3–175 and 3–176). The centerfold bags are rolled, sealed, and perforated from centerfold film and have their primary shrink around the circumference of the load. This type of shrink direction gives a more consistent shrink and tends to keep film from pulling away from the bottom of the pallet. This factor is extremely important since the purpose of the application is lost if the film

DOD 4145.19-R-1 15 September 1979

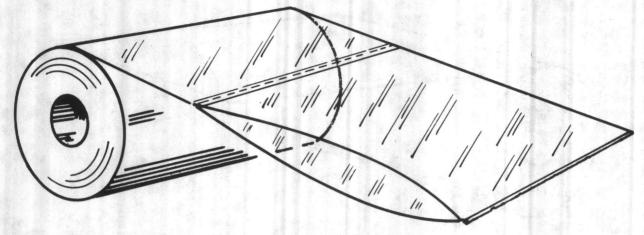


Figure 3-175. Centerfold bags.

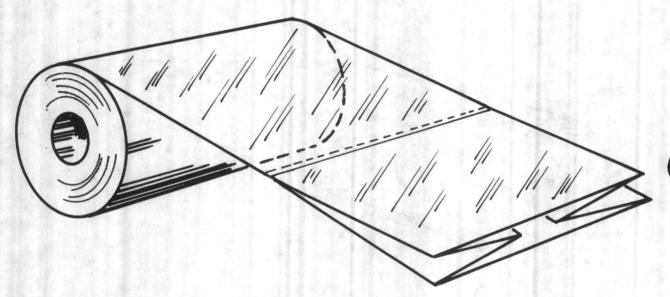


Figure 3-176. Gusseted bags.

does not tightly grasp the pallet. The gusseted bags are rolled, sealed and perforated from gusseted tubing. The primary shrink here is in the vertical direction rather than the circumferential. This type of shrink direction tends to cause the film to pull away from the bottom of the pallet. This can be controlled by guiding the heated tunnel air primarily to the bottom of the pallet.

- e. Determining film bag size and thickness. Bags are specified by width, depth, length and gauge.
- (1) Bag size determination is based on the following:
- (a) Width—approximately 4 inches more than load width.

- (b) Depth—approximately 4 inches more than load length.
- (c) Length—one half of depth of load plus height of load (including pallet) plus 4 inches.
- (2) Thickness (gauge) of the film material needed is determined by the weight of the pallet load and type of film to be used (para 5.1.2.3., MIL STD-147).
- f. Advantages of shrink wrap. The advantages of shrink wrap palletizing make it desirable for many load bonding applications.
- (1) Shrink films conform to odd shapes and sizes thereby offering greater versatility in package size reduction than conventional strapping.

- (2) Strapping impressions and product abrasion are eliminated.
- (3) The overwrap of shrink film shields the load from outside moisture conditions and also prevents dust collection on the material. The load will frequently lend itself to temporary outside storage thereby easing warehouse problems.

(4) Shrink-film overwrap deters pilferage by making entry obvious when it has occurred. Opaque film is also available which prevents ready identification of specific contents of the pallet.

(5) Shrink film is more safely removed from the pallet load than conventional metal strapping.

- (6) Shrink wrapping is more economical than the standard combination of corrugated triple-wall containers and steel strapping.
  - g. Disadvantages.

Note. Many of the disadvantages listed below also apply to conventional metal strapping methods.

(1) Shrink wrap does not add stacking strength. Stacking strength of noncartoned loads depends upon the strength of the commodity.

(2) Shrink wrap provides no protection from


impact forces on sides or top of load.

(3) Interlocking pallet patterns are particularly important in order to take advantage of the frictional forces of the package surfaces to provide load integrity.

(4) For best results, outside dimensions of the load should be close to or slightly less than the size of the pallet to allow the film to cling to the pallet. (Film will perform adequately in most cases even with a material overhang.)

(5) Plastic film is elastic in varying degrees. Thickness and density of film must be carefully selected to provide sufficient tension to maintain load integrity.

- (6) When pallet loads are stacked, nail heads, splinters, or rough surface of upper pallet can abrade or tear film. (Such abrasions or tears, however, will not spread further by themselves.)
- (7) Most films are adversely affected by sunlight. (Ultraviolet inhibitor film can be used where this protection is desired.)
- (8) Satisfactory application of film requires precise control of temperature and time during the shrinking process.
- (9) Shrink ovens occupy more space than conventional strapping equipment.
- (10) Some minor heat loss occurs in most convection type shrink ovens. This must be considered if such units are to be used in refrigerated areas.
- (11) Shrink equipment for high speed operation is more expensive than conventional equipment. (This can be offset by labor savings and increased production.)
- (12) Film envelope provides poor ventilation. However, since film use is not a method of packaging protection but a device to bond loads for movement from shipper to customer, this is not a serious problem.
- (13) Some types of film may pose disposal problems. However, polyethelene is the most commonly used and can be easily recycled. If recycling is not feasible incineration or disposal in sanitary landfills is preferred.
- h. Safety. Shrink wrapping operations will be inspected at least every three months by installation fire prevention, safety or health personnel. Matters such as ventilation, use of protective equipment and clothing, and potential fire conditions should be included in this inspection.

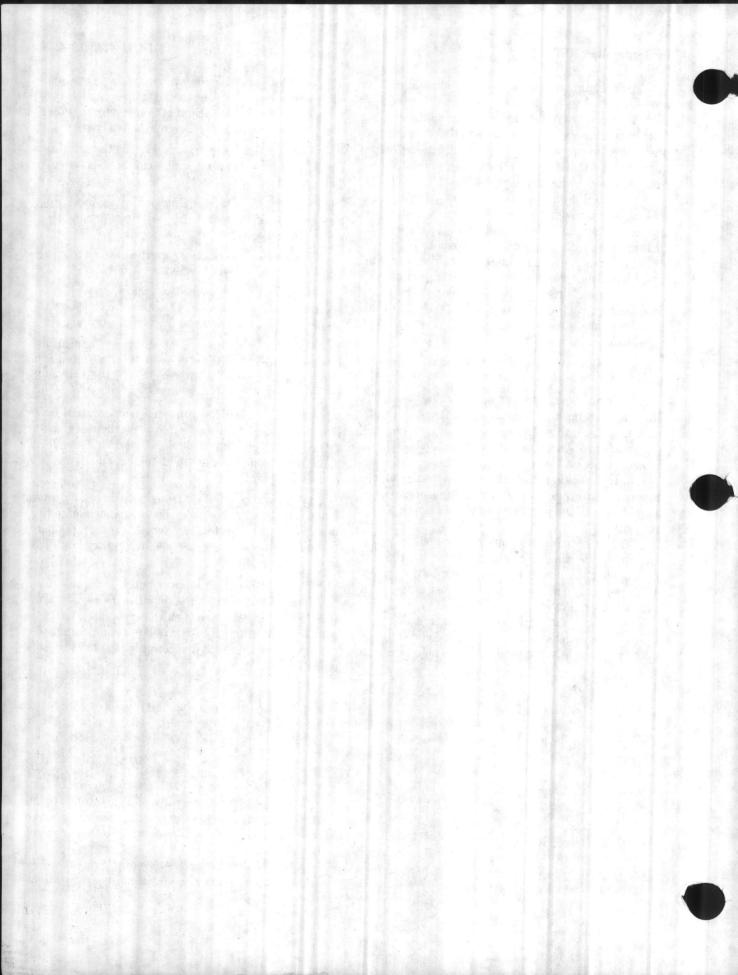

## **CHAPTER 4**

## MATERIALS HANDLING EQUIPMENT (MHE) AND PRINCIPLES

## Section 1. BASIC PRINCIPLES

	Paragraph
General	4-101
GeneralContainers	
ContainersLoading and unloading	4-103
Loading and unloading	4-104
Conveyors	4-105
Industrial trucking Effective utilization of manpower	4-106
Effective litilization of manpower	

#### 4-101. General

a. Definition. Materials handling is the movement of materials to, through, and from productive processes; in receiving, storage, packing, and shipping areas. While materials handling practices vary, the basic principles remain constant. Since these basic principles are sometimes overlooked, certain underlying guidelines must be recognized.

b. Least handling is the best handling. The greatest economy in moving materials is secured by not handling the material at all. Since this situation rarely exists, an attempt must be made to keep handling to a minimum.

c. Standardization of methods and equipment aids the materials handling activity. Standardization of equipment results in the reduction of costs of operation, in that maintenance, repair, storage, and issue procedures can be simplified.

d. Materials handling equipment must be selected for a multiple number of applications. Equipment selected should be chosen with the consideration that flexibility is the key note (i.e., that it can be used for multiple operations). Therefore, emphasis must be given to the flexibility with which equipment can be converted to handle other jobs.

e. Specialized equipment should be kept to a minimum. Materials-handling operations requiring special equipment are costly. Normally, first cost, cost of operation, and maintenance costs are greater for special equipment than for standard equipment.

f. Volume dictates the method of handling materials. The number of pieces to be moved determines the method of handling. Regardless of the

size, shape or value of an item to be moved, the first question to be answered before the selection of method for moving: how many pieces are to be moved?

g. Advanced planning on materials handling methods and equipment should be carried on simultaneously with other planning activities and undertakings with full recognition of present and future factors. The most essential phase of any program is planning. To be effective, planning activities in our organizations must be coordinated. As an example, some of the factors requiring advanced planning are—

(1) Protection required against weather or breakage.

(2) Legal and physical restrictions in reference to transportation.

(3) The possibility of using unitized loads.

(4) The standardization of equipment and methods.

(5) Combining materials handling methods.

(6) Safety hazards involved.

h. Lengths and number of moves of materials should be kept to a minimum. Movement paths of material should be studied for the possibility of reducing "backtracking" and length of moves, resulting in better utilization of equipment and personnel.

i. Equipment capacities should never be exceeded. The rated capacities of equipment should never be exceeded. Overloading causes excessive wear of equipment and creates additional accident potential.

j. All materials handling operations should be analyzed for improvement possibilities by elimi-

DOD 4145.19-R-1 15 September 1979

nation, combination or simplification. Combination of operations may result in the simplification and reduction of the number of times that material has to be handled.

k. Selection of materials handling equipment is based on the economies of operation. These economies are measured in cost of moving the materials. Greater "pay loads" for each handling operation will

result in less handling cost per piece.

1. Physical state of materials is a factor in determining MHE. The three physical states of material-solid, liquid or gas-determine the method of containment (pack). Gases are contained in cylinders; liquids such as acids are contained in carboys; and solids such as sheet and bar stock metals may require wood skids. This, in turn, influences selection of materials handling equipment.

m. Straight line flow. The shortest distance between two given points is a straight line. The time required to travel a given distance is reduced by

following a straight line.

- n. All materials handling operations should follow a defined method. What causes variation in the length of time required for handling a given product? The method used in picking up, carrying to, setting down, and returning from is always the source of variation. The standardization of the method will provide a basis for determining handling requirements. It should be recognized that the establishing of this method, normally, will not require the detailed refinement as that used in such studies as micromotion analysis.
- o. Short, irregular moves lend themselves to manual materials handling. Some materials handling operations do not occur with any degree of repetitiveness. The use of equipment for such an operation may be much more costly than manpower. When moves are short, irregular, and load capacity of men not exceeded, it may be more economical to use manpower.
- p. Wherever practicable, materials should be prepositioned for the handling operations. Consideration should be given following handling operations. Such prepositioning moves as placing-

(1) Containers in a position to facilitate picking

- up. (2) Containers on a conveyor in such a manner as to reduce accidents and lessen equipment dam-
- (3) Materials so as not to obstruct other materials movements, will result in reduced materials

and equipment damage and a reduction in number of accidents.

q. Wherever practicable, materials should be moved in horizontal plane or with the aid of gravity. When loading and unloading, personnel have to reach either down or up, excessive effort is used which might have been greatly reduced if the workplace layout had been planned. The ideal lifting position is at the waist. The nearer to the waist that a container or part can be picked up and disposed, the greater will be the efficiency.

### 4-102. Containers.

a. Definition. A container is defined as a means which provides the necessary inclosure, using compatible material arranged so as to properly retain the product and restrain its movement to the degree necessary for protection in handling, storage and transportation. The proper selection and design consideration given to each container reduces loss or damage to parts and assures protection to the container, especially the re-usable types.

b. Containers must provide necessary inclosure to retain the product properly and restrain its movement to the degree necessary for protection, handling and storing. The principle states the requirements of any container. The degree to which the requirements are met depends on the economics involved. The container required for ladders would not have to retain or restrain the product to the

same degree as one for aircraft engines.

c. Minimum materials with maximum strength should be used in container construction. When the possibility of tiering exists, containers should be so constructed as to support the maximum number of filled containers which may be placed on its top. While strength is required, a minimum of material capable of insuring that strength should be used.

d. Containers should be designed for shipping and storage, as well as for use at point of use. It is often possible to design a container so that it acts as a hopper or supply bin for work in process. When this situation exists, storage area, cost of handling

and container costs may be reduced.

e. Unit load is basic, container incidental. Regardless of the type of container used, the important factor is the method of loading that container. Greater economy is obtained through the use of the unit load as more material can be moved at a single time. The more pieces or pounds moved, as a unit load in a single handling operation, the lower the cost per piece or per pound and the shorter the time required to move any given volume.

f. Collapsible containers require less storage space when empty, and can be returned at lower transportation costs. Because of the high transportation costs, it is important that a thorough study be made before selecting returnable containers. Some of the factors to be considered in the selection of returnable containers are—

(1) First cost, including initial shipping from

container manufacturer.

- (2) Cost of transportation to and from its destination.
  - (3) Total investment required.

(4) Records involved.

- (5) Potential loss resulting from damage to product.
  - (3) Maintenance cost.
- (7) Accumulating, segregating and storage space involved at both user and supplier stations.
  - (8) Conservation of material resources.
  - (9) Number of re-uses likely to be made.
- g. Containers must be standardized wherever possible. Standardization of containers facilitates materials handling, in that carriers, loading and unloading devices, conveyors, measuring methods and methods of handling can be standardized. When containers are standardized the amount of equipment necessary for handling can be reduced.
- h. Unit loads should be increased to economic maximum. Greater economy is obtained as the unit load is increased, provided container or equipment capacity is not exceeded. The more pieces carried in one load, the greater the efficiency.

## 4-103. Loading and Unloading

- a. General. Those familiar with materials handling activities recognize the fact that the major portion of personnel in that area are engaged in loading and unloading activities. It is, therefore, important that this materials handling function be given a great deal of consideration. Loading and unloading activities cover the necessary operations to handle or transfer the many kinds of materials to or from various carriers.
- b. Where economical loading and unloading personnel should be replaced with mechanical devices. Where volume, size and/or weight merit, mechanical handling devices can be used economically. Such devices as conveyors, industrial trucks, cranes, etc., aid the loading and unloading activity. Safety

hazards can be reduced and protection increased when mechanical devices are used in place of personnel. The opportunity for loss and damage of packages is greatly reduced when manual handling is kept to a minimum.

- c. Proper loading and unloading will prevent damage. In most instances, loose material is subjected to more damage than properly packed material. Adequate planning should precede any loading operation, recognizing such factors as center of gravity of carrier, adequate dunnage, heavy material on bottom, rated capacity of carrier, possibility of container and product damage while in transit.
- d. Points of material pickup and delivery should be kept to a minimum. A larger number of pickup and delivery points will increase the loading and unloading requirements, thus affecting manpower and costs. The possibility of combining several pickup points into one central point should be considered.
- e. Where economical, material should be segregated by source or destination. In segregating material by source or destination, unnecessary shuffling and reshuffling of material is eliminated. Segregation of material for this purpose is advantageous in all cases where volume is great enough to warrant.
- f. High priority items should be placed in an accessible location. Proper loading of high priority material will expedite delivery at destination, so it can readily be unloaded.
- g. Area, materials, tools, and equipment should be provided at proper locations. In the loading and unloading of box cars, areas for dunnage, strapping, strapping tools, lumber, tools, and other miscellaneous equipment and supplies should be provided at easily accessible points.
- h. Adequate lighting and ventilation will facilitate loading and unloading. Proper ventilation and lighting facilities will aid in the reduction of errors and accidents in loading and unloading area. Portable lights and fans should be considered on docks and carriers where needed.
- i. Dock heights should, as nearly as possible, be compatible with bed height of carriers. This is primarily achieved with bridge plates or permanently installed adjustable ramps.
- j. Expedited materials should be loaded and unloaded at a specific dock or location. Such items as parcel post, air freight, express have the tendency

to congest dock areas unless ample facilities are provided. Normally, the "detention time" for the agency, acting as carrier of expedited material, is short; but the loading and unloading delays which they may create are costly.

## 4-104. Conveyors

- a. Definition. A conveyor, excluding mobile units, is defined as a device to move materials along a defined path. The storage and shipment of units in large quantities and materials handling depend upon each other. Since conveyors are one of the major devices for the handling of materials, the task of getting the highest efficiency and economy out of the use of conveyors involves selecting the right conveyor or system of conveyors for the job. Today, the conveyor is recognized as one of the more important tools in the materials handling field. It is a cost-saving, energy-saving, and profit-making modern mechanism.
- b. Before selecting a conveyor as a purely transporting medium, the economics involved should be studied. The cost of placing the item on, or removing it from the conveyor may exceed the value gained through the use of the conveyor.
- c. Gravity conveyors should be used where practicable. When the analysis of the product indicates that for loading and unloading highway and railway equipment some type of conveyance is required to facilitate the operation, roller feed gravity conveyors should be considered. Gravity conveyors are used to advantage when loading or unloading small containers as they reduce handling and the need for industrial trucks, thus reducing detention time. Maintenance cost for gravity feed conveyors is considerably lower than for other means of conveyance.
- d. Conveyor speed controls rate of material delivery. The rate at which materials arrive at the work station can be controlled by the conveyor speed to maximize work station output.
- e. Whenever practicable, conveyors should be standardized. Conveyors should be purchased utilizing standardized specifications to reduce the cost of repair, the stockage of repair parts, and the cost of maintenance training. Cost and repair data should be maintained and used in the improvement of specifications.
- f. Wherever practical, conveyor loading and unloading should be accomplished by mechanical means. A basic principle of any materials handling operation is: "Do not handle the item except for

performance of essential operations." Material should be moved mechanically whenever possible with emphasis on movement through the entire operation with minimized manual actions. Mechanical loading and unloading of material should be emphasized (i.e., items can be moved from belt conveyors to power and free conveyors by automatic pickup station). The use of mechanical handling aids will maximize the productive time of available manpower.

g. Synchronization of conveyors eliminates waits at transfer points and destination. Another advantage of the variable speed conveyor is that it can be set so as to tie in with other lines of operations.

h. Conveyor installations must provide adequate clearances for industrial trucks. This applies not only to the vertical plane, but also to the horizontal plane. In conveyor installations, ample clearance should be provided for industrial trucks and loads to be carried.

## 4-105. Industrial Trucking

- a. Definition. Industrial trucks are defined as mobile equipment and accessories designed for intradepot or on base facilities materials handling. This covers a wide variety of mechanical equipment, each designed to perform some materials handling job efficiently. No one unit will perform all operations.
- b. An economic balance exists between the amount of equipment used and the volume of materials handled. Too often the amount of equipment available is not sufficient. This results in the use of more costly means of moving materials or not being able to keep up with required schedule. The condition sometimes exists where too many units are available; consequently, there are idle units. Through proper performance records and planning the most economical number of operating units can be determined.
- c. The distance to be traveled is the principal factor in determining the proper equipment. "How far" will determine the equipment to be used. A tractor train is more economical to use for long hauls than the fork truck. In some instances manual movement is more economical when the distance is just a few feet.
- d. Industrial trucking operational costs should be analyzed. It is important that an operational cost record be kept of every unit of equipment to provide information which, among other things, may be

used to improve preventive maintenance and the selection of new equipment.

## 4-106. Effective Utilization of Manpower

a. General. Manpower is perhaps the most basic facility for handling materials. Throughout the materials handling and processing cycle manual handling may occur. In view of this condition each

situation should be examined for possible improve-

b. Efficiency in MHE operations. Where a known manual handling operation exists, it should be accomplished in an efficient manner to preclude repetitive handling at another stage in the material processing cycle. An example would be proper palletizing of material at the receiving dock to eliminate repalletizing at the warehouse where the material will be stored.

## Section 2. ILLUSTRATED NOMENCLATURE

	Paragraph
Introduction	4-201
Forklift trucks	4-202
Warehouse tractors	4-203
Truck, fixed platform, gasoline, or electric	4-204
Truck, straddle, carry	4-205
Crane truck, warehouse	4-206
Pallet-type handlift trucks	4-207
Tiering truck, electric (narrow-aisle type)	4-208
Warehouse trailers	4-209
Hand trucks	4-210
Dolly trucks	4-211
Conveyors	4-212
Pallets	4-213
Storage accessories and aids	4-214

#### 4-201. Introduction

The illustrations in this section show some of the basic MHE and storage accessories used by DOD Components. The MHE equipment illustrated falls into two basic categories: powered and nonpowered as defined and set forth in Military Standard 137C, Materials Handling Equipment. The inclusion of MHE and storage accessories in this section does not preclude the continued use or adoption of devices with similar purposes.

## 4-202. Forklift Trucks

#### a. General.

(1) A forklift truck is a vehicle designed to pick up, carry, and stack unit loads of supplies and equipment. Standard forklift trucks are available with lifting capacities of from 2,000 to 20,000 pounds and lifting heights of from 100 to 210 inches. The trucks are equipped with telescopic masts that permit loads to be lifted beyond the height of the collapsed mast, and most trucks have free lift, which is the height to which the forks can be raised before the inner slides move upward from the mast and in-

crease the overall height. Gasoline-powered forklift trucks may be equipped with solid-rubber or semi-solid tires for use in warehouses or pneumatic tires for use in outdoor storage areas; electric-powered forklift trucks are equipped with solid-rubber or semisolid (or cushion) tires for indoor operation only. Forklift trucks are not designed to be used as tow vehicles and should not be used for that purpose.

- (2) Whenever a truck is equipped with vertical only, or vertical and horizontal controls elevatable with the lifting carriage or forks for lifting personnel, the following additional precautions shall be taken for the protection of personnel being elevated
- (a) Use of a safety platform firmly secured to the lifting carriage and/or forks.
- (b) Means shall be provided whereby personnel on the platform can shut off power to the truck.
- (c) Such protection from falling objects as indicated necessary by the operating conditions shall be provided.
  - b. Standard items. The following types of forklift

trucks have been adopted as standard for the military services.

- (1) Truck, forklift, solid or semisolid rubber tires, 2,000-pound 100-inch lift.
  - (a) Type of power. Gasoline.
  - (b) Load center. 24 inches.
- (c) Standard operating aisle. 9'6" with 40" load length.
- (d) Application. This is a special-purpose light duty forklift truck designed for use in areas where low overhead clearance requires the use of a truck with a low collapsed mast height. Also suitable for truck and rail car loading (fig. 4–1).
- (2) Truck, forklift, solid or semisolid rubber tires, 2,000-pound, 100-inch lift.
  - (a) Type of power. Electric.
  - (b) Load center. 24 inches.
- (c) Standard operating aisle. 9'6'' with 40'' load length.
- (d) Application. This truck is normally used for essentially the same purposes as the gasoline-powered model. It is widely used for handling explosives and flammables, when properly shielded, and for operations that involve movement to and from cold-storage areas (fig. 4–2).
- (3) Truck, forklift, solid or semisolid rubber tires, 2,000-pound 127-inch lift.
  - (a) Type of power. Gasoline or electric.
  - (b) Load center. 24 inches.

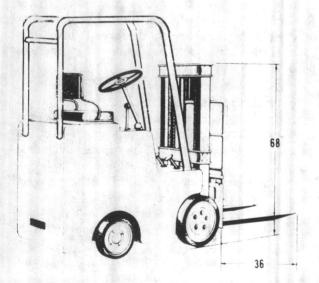


Figure 4-1. Truck, forklift, solid or semisolid rubber tires, 2,000-pound, 100-inch lift.

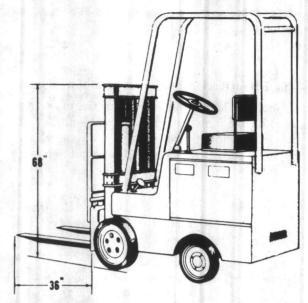


Figure 4-2. Truck, forklift, solid or semisolid rubber tires, 2,000-pound, 100-inch lift.

- (c) Standard operating aisle. 9'6" with 40" load length.
- (d) Application. Basic light-duty truck for indoor warehousing operations. Mast and lifting height permit entry into rail cars. Maneuverability allows fast and easy operation in cross and main aisles. Lifting height and capacity are sufficient for effective stacking of small, uniform, light loads. Electric-powered models are more suitable than gas for poorly ventilated areas and, when properly shielded, for handling of flammable items and explosives (fig. 4–3).
- (4) Truck, forklift, pneumatic tires, 2,000-pound, 127-inch lift.
  - (a) Type of power. Gasoline.
  - (b) Load center. 24 inches.
- (c) Standard operating aisle. 9'6" with 40" load length.
- (d) Application. This truck is used in essentially the same manner as models with solid-rubber tires, and may also be used for limited outdoor storage operations in areas with hard standings and on relatively smooth surfaces offering little tractive resistance (fig. 4–4).
- (5) Truck, forklift, solid or semisolid rubber tires, 4,000-pound, 100-inch lift.
  - (a) Type of power. Gasoline.

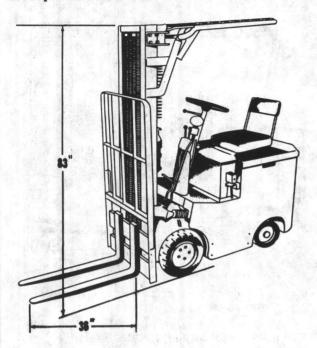


Figure 4–3. Truck, forklift, solid or semisolid rubber tires, 2,000-pound, 127-inch lift.

- (b) Load center. 24 inches.
- (c) Standard operating aisle. 10 feet with 40" load length.
- (d) Application. Standard low-mast, medium duty forklift truck used in operations where low collapsed mast height is necessary because of limited overhead clearance (fig. 4–5).
- (6) Truck, forklift, solid or semisolid rubber tires, 4,000-pound, 100-inch lift.
  - (a) Type of power. Electric.
  - (b) Load center. 24 inches.
- (c) Standard operating aisles. 10 feet with 40" load length.
- (d) Application. Standard low-mast, medium-duty electric forklift truck used in essentially the same manner as the gasoline-powered model. It is more suitable than gas for operation in poorly ventilated areas and, when properly shielded, can be used for the handling of flammable items and explosives. It may also be used for operations in cold-storage areas (fig. 4-6).
- (7) Truck, forklift, solid or semisolid rubber tires, 4,000-pound, 144-inch lift.
  - (a) Type of power. Gasoline or electric.
  - (b) Load center. 24 inches.

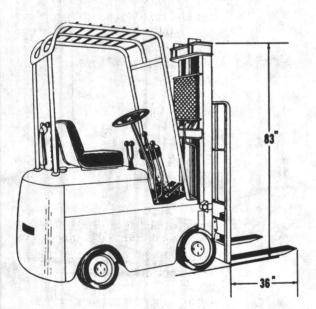


Figure 4-4. Truck, forklift, pneumatic tires, 2,000-pound, 127-inch lift.

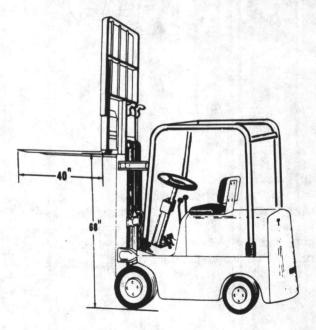


Figure 4-5. Truck, forklift, solid or semisolid rubber tires, 4,000-pound, 100-inch lift.

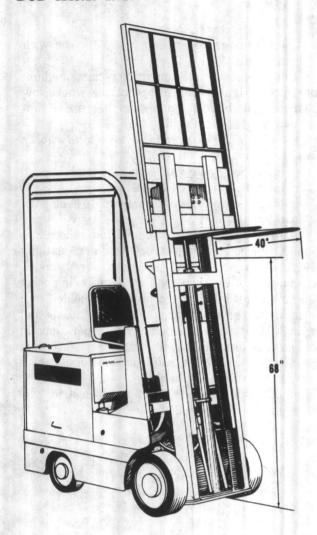


Figure 4-6. Truck, forklift, solid or semisolid rubber tires, 4,000-pound, 100-inch lift.

- (c) Standard operating aisle. 10 feet with 40" load length.
- (d) Application. This model is most widely used in the military storage system. Because of its versatility, it can be used for most general mediumduty inside warehousing. It is capable of entering rail cars for loading and unloading.
- (8) Truck, forklift, pneumatic tires, 4,000-pound, 144-inch lift.
  - (a) Type of power. Gasoline.
  - (b) Load center. 24 inches.
- (c) Application. General-purpose medium-duty forklift truck for outdoor storage operations.

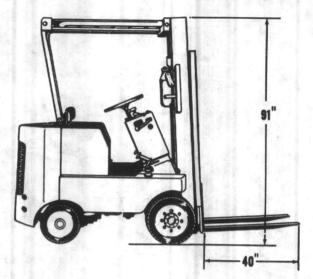


Figure 4-7. Truck, forklift, solid or semisolid rubber tires, 4,000-pound, 144-inch lift.

It has maneuverability to operate in relatively confined outdoor storage areas; and can operate satisfactorily on many types of road surfaces and graded areas, including cinders or gravel (fig. 4–8).

- (9) Truck, forklift, pneumatic tires, 6,000-pound, 127-inch lift.
  - (a) Type of power. Gasoline.
  - (b) Load center. 24 inches.
- (c) Application. Basic heavy-duty truck for outdoor storage operations. It has a longer wheel-



Figure 4-8. Truck, forklift, pneumatic tires, 4,000-pound, 144-inch lift.

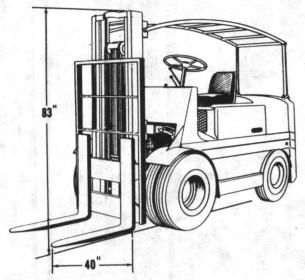


Figure 4-9. Truck, forklift, pneumatic tires, 6,000-pound, 127-inch lift.

base and greater stability than the 4,000-pound model and can operate over rougher surfaces. Selection of truck depends more upon size and weight of load than upon lifting height. Low lifting height and lack of maneuverability restrict adoption of truck as a general-purpose, heavy-duty model (fig. 4-9).

- (10) Truck, forklift, solid or semisolid rubber tires, 6,000-pound, 100-inch lift.
  - (a) Type of power. Gasoline.
  - (b) Load center. 24 inches.
- (c) Standard operating aisle. 11'6" with 40" load length.
- (d) Application. A special-purpose, heavy-duty truck for indoor storage operations, principally shipping and receiving. The truck may also be used to handle and stack loads in low ceiling areas such as vaults at ports of embarkation. Although mast height permits entry into vans and rail cars, the weight of the truck and lack of manueverability must be taken into consideration before the truck is used for direct loading or unloading. The truck may be used, however, to transfer heavy or bulky loads from rail cars to a tractor-trailer train (fig. 4–10).
- (11) Truck, forklift, solid or semisolid rubber tires, 6,000-pound 127-inch lift.
  - (a) Type of power. Gasoline or electric.
  - (b) Load center. 24 inches.
- (c) Standard operating aisle. 11'6" with 40" load length.

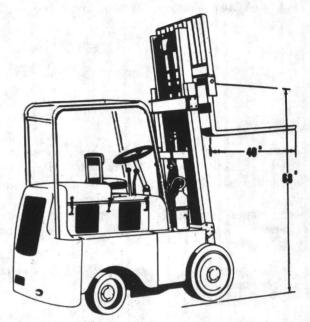


Figure 4-10. Truck, forklift, solid or semisolid rubber tires, 6,000-pound, 100-inch lift.

(d) Application. Basic heavy-duty truck for indoor storage operations. It is used when additional lifting capacity is required to handle heavy loads. Electric-powered models, when properly shielded, are used to handle explosive or flammable items and in areas where gasoline-powered trucks are impracticable due to possible damage to supplies or harm to personnel (fig. 4–11).

(12) Truck, forklift, solid or semisolid rubber tires, 6,000-pound, 168-inch lift.

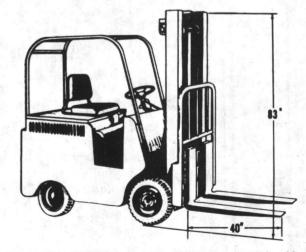


Figure 4-11. Truck, forklift, solid or semisolid rubber tires, 6,000-pound, 127-inch lift.

- (a) Type of power. Gasoline or electric.
- (b) Load center. 24 inches.
- (c) Standard operating aisle. 11'6'' with 40'' load length.
- (d) Application. A heavy-duty forklift truck for warehousing operations. It is used principally for stacking supplies above lift limit of light- and medium-duty models. Greater lifting capacity allows truck to handle bulky, oversize loads as well as heavier, compact loads. Limited maneuverability restricts use to wider operating aisles. High collapsed mast height restricts use to buildings with high ceilings and doors. Truck may be used for limited number of loading or unloading operations when trailers or flatbed trucks are involved (fig. 4–12).
- (13) Truck, forklift, pneumatic tires, 6,000-pound, 168-inch lift.
  - (a) Type of power. Gasoline.
  - (b) Load center. 24 inches.
- (c) Application. A heavy-duty forklift truck for outdoor storage operations. It is used principally for loading and unloading flatcars and trailers at yards, docks, and other outdoor shipping or receiving areas. The truck can be operated satisfactorily on all types of road surfaces. Use of chains makes it possible for truck to operate in snow (fig 4–13).
- (14) Truck, forklift, pneumatic tires, 15,000-pound, 210-inch lift.

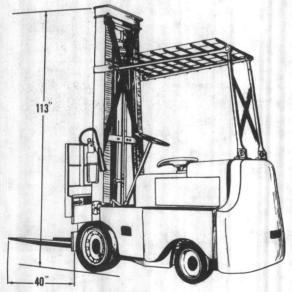


Figure 4–12. Truck, forklift, solid or semisolid rubber tires, 6,000-pound, 168-inch lift.

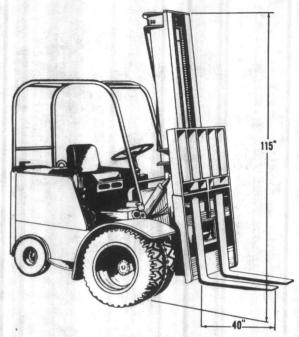


Figure 4–13. Truck, forklift, pneumatic tires, 6,000-pound, 168-inch lift.

- (a) Type of power. Gasoline.
- (b) Load center. 24 inches.
- (c) Application. Maximum-capacity truck for outdoor storage operations. It is used principally for loading and unloading oversize heavy loads and for stacking and relocating large heavy materials in outdoor storage areas. It is very often needed

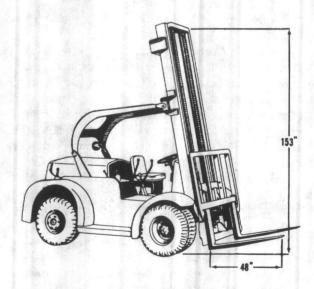


Figure 4–14. Truck, forklift, pneumatic tires, 15,000-pound, 210-inch lift.

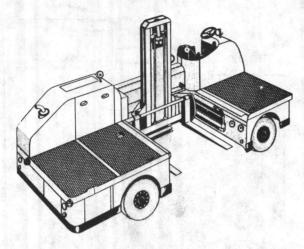
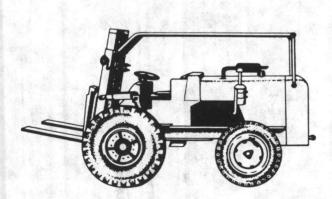


Figure 4-15. Truck, forklift, pneumatic tires, 10,000-pound, 144-inch lift, sideloading.

to handle less-than-maximum-capacity loads that, because of size or shape, require a load center greater than 24 inches. This type truck may, for example, lift 15,000 pounds at 24 inches and 11,000 pounds at 40 inches. The use of fork extensions or other attachments, such as a bar and hoist for unloading, will further reduce lifting capacity (fig. 4–14).

- (15) Truck, forklift, pneumatic tires, 10,000-pound, 114-inch lift, sideloading.
  - (a) Type of power. Gasoline.
- (b) Application. Standard sideloading truck used for receiving, transporting, and loading operations. It is used principally to load, directly into aircraft, supplies and equipment prepared for delivery by parachute. The truck can be used to handle pipe, lumber, or similar material up to lengths of 65 feet. It has a turning radius of approximately 25 feet and can travel on varying types of smooth surface roads up to a speed of 30 miles per hour (fig. 4–15).
- (16) Truck, forklift, pneumatic tires, rough terrain.
  - (a) Type of power. Gasoline or diesel.
  - (b) Load center. 24 inches.
- (c) Application. A standard rough terrain forklift truck, available in three load capacities—4,000, 6,000, and 10,000 pounds, is equipped with high-flotation pneumatic tires for operation on unprepared or unstabilized surfaces, over beaches, in deep sand, or in snow, ice, or mud. It is used primarily for loading and unloading flatbed trailers, landing craft, or other similar types of small cargo



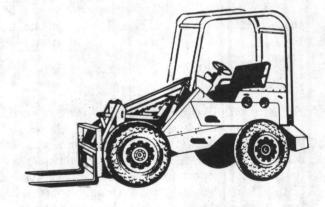


Figure 4-16. Truck, forklift, pneumatic tires, rough terrain.

DOD 4145.19-R-1 15 September 1979

vessels. It may also be used for stacking large, heavy loads of equipment (fig. 4-16).

#### 4-203. Warehouse Tractors

a. General. A warehouse trailer is an electric-or gasoline-powered vehicle designed to pull a train of warehouse trailers. Gasoline-powered models. equipped with pneumatic tires, have a rated drawbar pull of from 4,000 to 7,500 pounds. Electricpowered models, with solid-rubber tires, have a rated drawbar pull of 2,000 or 4,000 pounds. Drawbar pull, which is the motive force that the tractor can exert in pushing or pulling loads, is merely a means of indicating tractor capability, and the actual capacity of the tractor is normally far in excess of the drawbar pull rating. A tractor with a drawbar pull of 4,000 pounds may, for example, have an actual towing capacity of 90 tons; and a tractor with a drawbar pull of 7,500 pounds, 200 tons. Its value to storage and warehousing, however, lies in the fact that the tractor-trailer train, when used in conjunction with forklift trucks, provides for the completely mechanized loading, transporting, stacking, and warehousing of supplies.

b. Standard items. The following types and sizes of warehouse tractors have been adopted as standard for the military services. These tractors are, in most cases, the low-profile industrial type. The 7,500-pound drawbar pull tractor may, however, be the agricultural type with high-flotation pneumatic tires for operation in rough or unpaved storage

areas.

(1) Tractor, warehouse, electric, solid-rubber tires, 2,000-pound drawbar pull.

Application. Basic light-duty, electric-powered tractor for operation in warehouses and other closed storage areas. It may be used to advantage at arsenals for the movement of explosive and flammable items, when properly shielded, and at cold-storage installations where movement through areas of different temperatures will not have an effect on tractor performance. It may be used at shiploading points for movement of supplies directly aboard cargo vessels (fig 4–17).

(2) Tractor, warehouse, electric, solid-rubber tires, 4,000-pound drawbar pull.

Application. Standard heavy-duty tractor for indoor warehousing operations. It is used in essentially the same manner and for essentially the same purposes as the light-duty, electric-powered model.

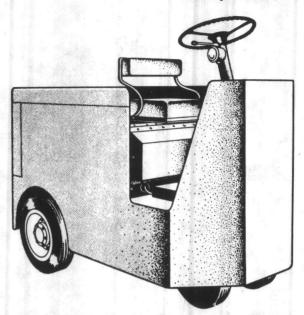


Figure 4-17. Tractor, warehouse, electric, solid-rubber tires, 2,000-pound drawbar pull.

Drawbar-pull rating or towing capacity should not be considered as deciding factors for selecting or excluding this tractor. The efficiency of a tractor-trailer train is not measured in maximum weight of supplies per trip; rather, it is measured by the total number of tons that can be hauled each day. The selection of the tractor and the determination of efficiency or economy of operation must be based, therefore, upon the physical conditions to be overcome, the number of stops involved, and the length of haul to be made (fig. 4–18).

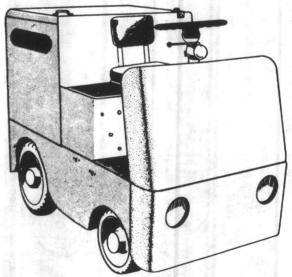


Figure 4–18. Tractor, warehouse, electric, solid-rubber tires, 4,000-pound drawbar pull.

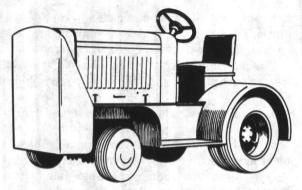


Figure 4-19. Tractor, warehouse, gasoline, pneumatic tires, 4,000-pound drawbar pull.

(3) Tractor, warehouse, gasoline, pneumatic tires, 4,000-pound drawbar pull.

Application. Standard medium-duty tractor for outdoor storage operations. It may be used in plant yards, for hauling trailers, or towing airplanes from hangars to airfields. It may also be used for general-purpose towing or pulling at freight sheds, piers, warehouses, or other areas. It has sufficient weight, horsepower, and traction to operate on virtually all types of running surfaces (fig 4–19).

(4) Tractor, warehouse, gasoline, pneumatic tires, 7,500-pound drawbar pull.

Application. Standard heavy-duty, gasoline-powered tractor for outdoor storage operations. This capacity tractor is available in two styles. The first is the low-profile, industrial type with conventional pneumatic tires on both drive and steering wheels. The second type is the high-flotation model with oversize pneumatic tires on the drive wheels. This tractor may be used in storage areas with rough or muddy terrain. It has a greater underclearance than the low-profile type, but lacks its speed and maneuverability. It is possible, however, to use both types for towing heavy equipment or large

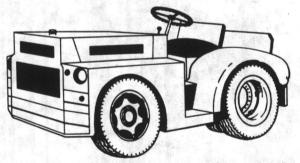


Figure 4-20. Example of tractor, warehouse, gasoline, pneumatic tires, 7,500-pound drawbar pull.

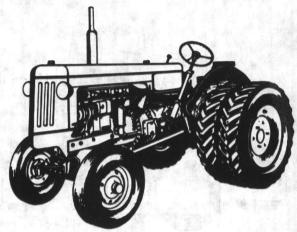


Figure 4-21. Example of tractor, warehouse, gasoline, pneumatic tires, 7,500-pound drawbar pull.

special-purpose vehicles such as refrigerator trailers. This may be accomplished by the use of a fifthwheel attachment or truck carriers (figs. 4–20 and 4–21).

## 4-204. Truck, Fixed Platform, Gasoline, or Electric

Application. The platform truck is a nonelevating electric- or gasoline-powered vehicle used exclusively as a load carrier. It may be used to supplement a forklift truck in the same manner as the tractor-trailer train depending upon the size and weight of the load and the distance the load is to be moved. In addition to transporting supplies, the truck may be used as a portable servicing unit when equipped with spare parts and tools or with gasoline and oil dispensing facilities. The standard gasoline-powered model, equipped with pneumatic tires, has a load capacity of 4,000 pounds. The electric-powered, usually equipped with solid-rubber tires, has a load capacity of 2,000 pounds (fig 4–22).

## 4-205. Truck, Straddle, Carry

Application. The straddle truck is a gasoline-powered, four-wheel vehicle designed to straddle, pickup,

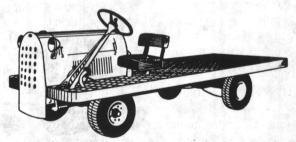


Figure 4-22. Truck, fixed platform, gasoline.

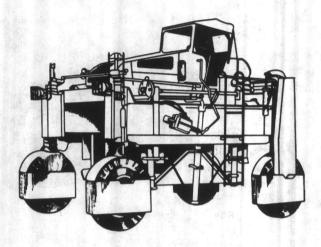


Figure 4-23. Truck, straddle, carry.

and transport loads of long and heavy supplies such as pipe, lumber, and steel. It may also be used for handling pulpwood; bridge members; and containers of bulk materials such as coal, rocks, and similar commodities. The standard straddle truck for the Military Departments has a capacity of 30,000 pounds (fig. 4–23).

## 4-206. Crane Truck, Warehouse

a. General. A warehouse crane truck is a power-driven, self-propelled unit consisting of a boom mounted on a mobile wheel chassis. The boom can be operated independently so that sluing and topping can be accomplished without movement of the chassis. Power is supplied by a gasoline engine or by electric motors. Gasoline-powered crane trucks

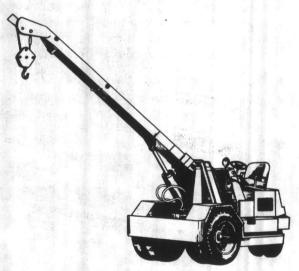


Figure 4-24. Crane truck, warehouse, gasoline.

are equipped with pneumatic tires for outdoor operation, and range in capacity from 6,000 to 20,000 pounds. Electric-powered crane trucks are equipped with solid-rubber tires for indoor operation, and have a capacity of 6,000 or 10,000 pounds (fig. 4–24).

b. Application. The warehouse crane truck is used to lift, swing, and lower loads that are too heavy or bulky or otherwise unsuitable for handling by other types of materials handling equipment. It may be used for loading and unloading flatcars, flatbed trailers, or gondolas. The warehouse crane truck is sometimes used to transport loads horizontally for short distances when sufficient overhead clearance is available (fig. 4–25).

## 4-207. Pallet-Type Handlift Truck

a. General. The pallet-type handlift truck is available in two distinct designs—the hand-operated, hand-propelled model and the electric-powered, hand-operated model. The truck is equipped with two load carrying forks that can be raised about 4 inches to carry palletized loads. It is used to move pallet loads that do not have to be tiered and where short hauls are required. It may be used for the movement of pallet loads in boxcars or into trucks, as well as for in process movements during shipping and receiving operations. It works well in conjunction with forklift trucks and can be operated where forklift cannot because of space limitations.

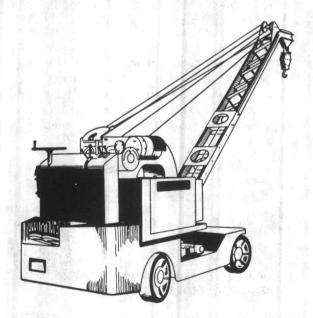


Figure 4-25. Crane truck, warehouse, electric.

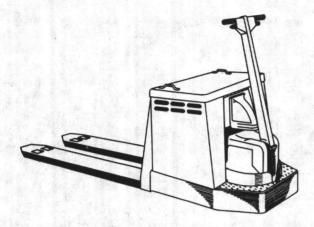


Figure 4-26. Truck, lift, hand, electric, pallet type.

b. Standard items. The following types of handlift trucks have been adopted as standard for the military services (fig. 4–26).

(1) Truck, lift, hand, electric, pallet type.

Application. This model is used whenever the distance the load is to be moved, the size of the load, the presence of grades or inclines along the route, or other considerations require the use of powered equipment.

(2) Truck, lift, hand, pallet type.

Application. This model is used whenever the operating conditions do not require a hand truck with the special characteristics of the powered model. It may be used to advantage in the loading of box cars, trucks, and aircraft (fig. 4–27).

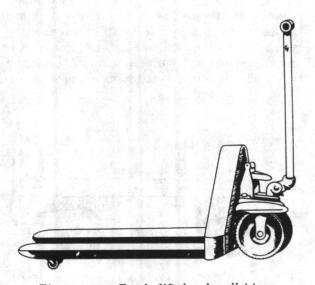


Figure 4-27. Truck, lift, hand, pallet type.

# 4-208. Tiering Truck, Electric (Narrow-Aisle Type)

Application. The tiering truck is an electric-powered forklift truck of the straddle arm design. The forks on this truck are located between two outriggers, or straddle arms, that extend forward in a plane at floor level parallel to that of the forks to straddle the pallet load. Because the straddle arms have contact with the floor, they support the elevated load and no counterweight is required. The overall weight of the tiering truck is generally less than that of a conventional counterbalanced forklift truck of the same rated capacity. The tiering truck is more maneuverable than the standard forklift truck and can generally operate in 6-foot aisles. The standard tiering truck for the military services is the electric-powered type that has a load capacity of 3,000 pounds and a lifting height of 100 or 130 inches (fig. 4-27).

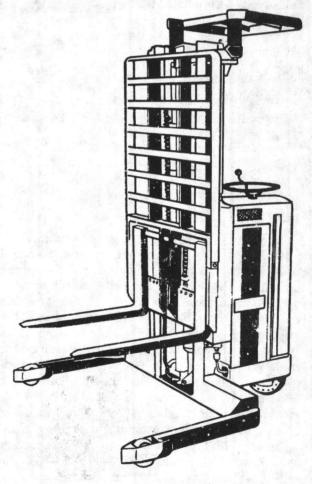


Figure 4-28. Truck, tiering, electric, 3,000 pound.

DOD 4145.19-R-1 15 September 1979



Figure 4-29. Trailer, platform, warehouse, 4,000- or 6,000-pound, towed by driverless tractor system.

#### 4-209. Warehouse Trailers

Application. A warehouse trailer is a load-carrying platform mounted on casters or wheels. Standard trailers are available in a wide variety of sizes and capacities, and may be equipped with solid-rubber or pneumatic tires. The caster-steering type has fixed rear wheels that carry about two-thirds of the load, and caster wheels at the front through which steering is accomplished. The caster steering-type trailer is produced in 4,000- and 6,000-pound capacities, similar to that illustrated by figure 4-29. The fifth wheel steering type has rear wheels mounted on a rigid axle and front wheels mounted on a center-pivoted steering axle with drawbar attachment. This type trailer is available in capacities of 6,000 or 20,000 pounds (figs. 4-30 and 4-31). The selection of the size required for a specific operation may be based upon load capacity, load size, tractor capacity, and the nature of the surface over which the load is to be towed. The fifth wheel steeringtype trailer is more suitable for heavy loads or for operation over rough surfaces. The caster steeringtype trailer is better suited to indoor operations.

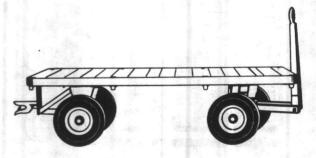


Figure 4–30. Trailer, platform, warehouse, 6,000-pound, pneumatic tires.



Figure 4-31. Trailer, platform, warehouse, 20,000-pound, solid-rubber tires.

## 4-210. Hand Trucks

a. General. Hand trucks are useful in all types of storage installations, particularly where mechanical equipment cannot be employed because of space limitations. They are often preferable to and more economical than a piece of mechanical equipment for the movement of a single item.

b. Standard items. The following types of hand trucks have been adopted as standard for the military services.

(1) Truck, hand, platform, four wheel.

Application. The four-wheel hand truck may be used to advantage in breaking out retail issues for bins, carrying light loads, or for any operation involving short hauls with frequent stops. It may also be used in multistory warehouses and for small-lot stock picking. The truck may be equipped with solid-rubber tires or steel wheels. The solid-rubber tire type is of the hardwood deck, caster steer design, and has a capacity of 2,500 pounds. The steel-wheel type is of a steel deck, fifth-wheel design, and has a capacity of 6,000 pounds (figs. 4–32 and 4–33).

(2) Truck, warehouse, double-handle type, two-wheel, solid-rubber tires.

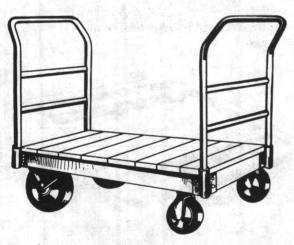


Figure 4-32. Truck, hand, platform, four wheel.

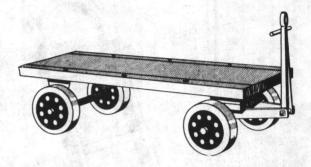


Figure 4-33. Truck, hand, steel wheels.

Application. The two-wheel hand truck consists of two handles, a platform on which the load rests, and a pair of wheels attached to the bottom of the framework. A blade extends at an angle from the bottom of the platform to retain the load, and two metal legs are located on the top corners of the platform to help bear the load when the truck is rested flat on the ground. The platform may consist of flat cross bars, which are used to handle boxes or crates, or curved cross bars, which are used for barrels or drums. The truck may be constructed of

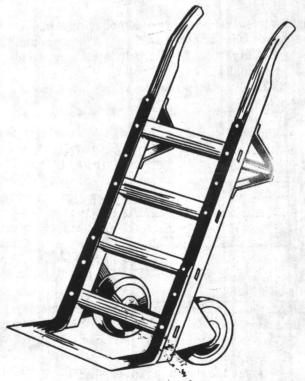


Figure 4-34. Truck, warehouse; double-handle type, 2-wheel, solid-rubber tires.

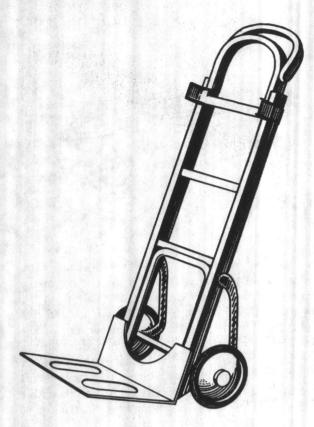


Figure 4-35. Truck, warehouse, utility.

wood or metal. The hardwood combination straightand-barrel type is not illustrated. A magnesium, general-utility type hand truck is also available (figs. 4–34 and 4–35).

(3) Truck, stockpicker, multiple shelf, solidrubber tires.

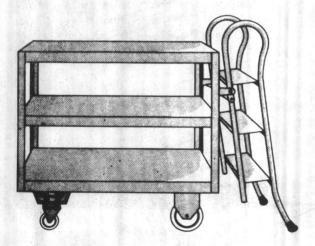


Figure 4-36. Truck, stockpicker.

Application. A stockpicker truck is a hand truck used for picking stock from retail shelves to fill orders. The warehouse employee pushes the truck into the aisles between the shelves and utilizes the truck shelves to carry the small retail issues in cardboard containers, paper envelopes, or tote boxes. Some models are equipped with a ladder to permit the stock picker to reach materials on high shelves safely (fig 4–36).

## 4-211. Dolly Trucks

Application. The dolly truck is a frame mounted on wheels or rollers and is used for shifting heavy loads for short distances. Three standard types of dollies are available. The first is the general-purpose dolly with swivel wheels (fig. 4–37).

a. This dolly with a capacity of 4,000 pounds is used primarily to move palletized loads in and out of boxcar, highway trucks and trailers. Also used within boxcars to move loads to doorway area for pick up by forklift trucks when car is not alongside loading platform (fig. 4–38).

b. The advantages of the dolly are maneuverability, ease of operation, and suitability for use on truck and reefer floors. The 24 wheels in the central portion are placed slightly lower than the wheels at the ends. The wheels at the ends are held in position by springs, which allow them to move on their axles as the load is guided to its destination.



Figure 4-37. Dolly, general-purpose.

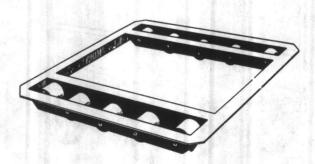


Figure 4-38. Dolly, pallet rollers.

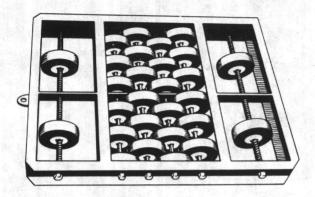


Figure 4-39. Dolly (reefer car).

The difference in height of center and end wheels permits a certain amount of rocking motion which aids in movement and guidance of the pallet load. That is, the tilting effect allows the dolly to turn, and the center wheels (on offset axles) prevent lodging of wheels in slatted floors (fig. 4–39).

#### 4-212. Conveyors

a. General. A conveyor is a device for moving supplies in a fixed line of travel. Two basic types of conveyors have been adopted as standard for the military departments. The first is the gravity-type roller or wheel conveyor. The second is the portable, power-driven belt conveyor. The gravity roller conveyor is available in standard 10-foot sections, as well as in curved sections of 45° and 90°. The gravity wheel conveyor is available in standard 10foot sections and in curved sections of 45°. The portable, power-driven belt conveyor is powered by a gasoline engine or an electric motor. The electric-powered model is available in sections of 20, 35, and 50 feet. The gasoline-powered model is available in sections of 60 feet. A telescopic powerdrive model is also available.

b. Standard items. The types of conveyors listed and illustrated in this section should be regarded as standard for the military services. Not every type in use has been listed; however, this listing should not preclude procurement of other items when required in the interest of efficient and economical materials handling.

(1) Conveyor, gravity, wheel.

Application. The wheel conveyor can be used to best advantage for the handling of medium or light packaged materials, particularly in loading and unloading barges, trucks, or railroad cars. It is de-

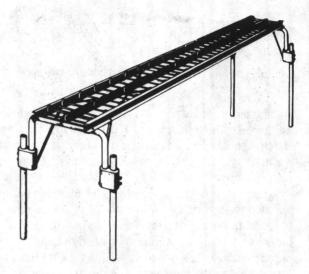


Figure 4-40. Conveyor, gravity, wheel.

signed to handle many different types of merchandise packaged in wooden or cardboard boxes with flat or semiflat surfaces. To obtain the best operation, the conveyor should have an average drop of  $1\frac{1}{2}$  to 3 inches per 10-foot section (fig. 4–40).

(2) Conveyor, gravity, roller.

Application. The roller conveyor can be installed with a slight incline to take advantage of gravity, or it can be installed level and the load pushed along manually. Several sections can be put together and developed into a continuous system for the movement of material. The conveyor can be used on piers or docks, in warehouses, in packing rooms, or wherever a steady flow of supplies is desired. It can be used to advantage for movement of packaged materials over gaps or drops that cannot be negotiated mechanically. A drop of one-half of an inch per foot is usually required to keep an object in motion on the rollers (fig. 4–41).

(3) Conveyor, belt, power-driven, portable.

Application. The power-driven belt conveyor consists of an endless belt mounted on a frame and driven by a pulley connected to a drive motor. The belt travels over a series of rollers or a sliding bed.



Figure 4-41. Conveyor, gravity, roller.




Figure 4-42. Conveyor, belt, power driven, portable.

It is used to transport materials over a fixed path of travel where inclines and declines are involved. It can be used to advantage where it is necessary to maintain the conveyor at a convenient working height above the floor for long distances. It can also operate on a horizontal path. The maximum angle of incline is usually limited to 25°. The belt conveyor can be used to load and unload cars, barges, or other carriers. It can also be used to handle packaged goods. It has proved useful for piling bags and packages, as well as for taking down packages from piles where the pallet method is not used because of lack of pallets or forklift trucks. The telescopic conveyor, which consists of floating, load-carrying members that can be adjusted to protrude varying distances from either or both ends of the frame, can be used for moving boxed or bagged material in and out of railcars or trucks (fig. 4-42).

(4) Conveyor, gravity, accordion.

Application. The accordion-type conveyor can be used as temporary bridging for aisles, as a temporary shipping platform, or for the loading of cars, trucks, or aircraft. It can be used to divert the flow of supplies to packing stations around areas where other types of conveyors cannot be installed. It can be easily and quickly attached to permanent or semipermanent conveyor installations to form a complete and continuous handling system (fig. 4–43).

(5) Gate, gravity conveyor, hinged.

Application. The hinged gate is a conveyor section that can be raised or swung to one side to provide a passageway from one side of a conveyor system to the other (fig. 4-44).

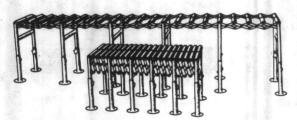


Figure 4-43. Conveyor, gravity accordion.

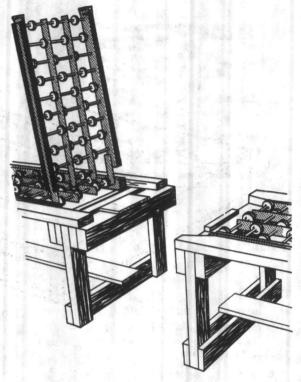


Figure 4-44. Gate, gravity conveyor, hinged.

#### 4-213. Pallets

a. General. A pallet is a low portable platform constructed of wood, metal, or fiberboard, built to specified dimensions, on which supplies are loaded. transported, or stored in units. Flat pallets are either single faced or double faced. Single-faced pallets have one platform with stringers underneath on which the weight of the load rests. Doublefaced pallets have two platforms separated by stringers. Pallets may afford two-way or four-way entry. The two-way entry pallet is so constructed that the forks of a forklift truck may be inserted from either the front or rear of the pallet. The fourway pallet is so constructed that the forks of a forklift truck may be inserted from any of the four sides. Flat pallets are constructed of either softwood or hardwood. Expendable pallets are four-way entry and are composed of either fiberboard, polystyrene or a combination of these. A box pallet is constructed with a framework and crossmembers extending up from the pallet platform, the front side normally being left open for loading or unloading.

b. Application. Figures 4-45, and 4-46, and 4-47 are hardwood pallets which permit transporting.

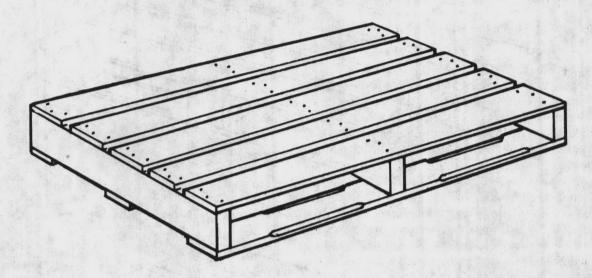


Figure 4-45. Pallet 40 by 48 inches, flush-end, three-stringer, two-way entry, hardwood.

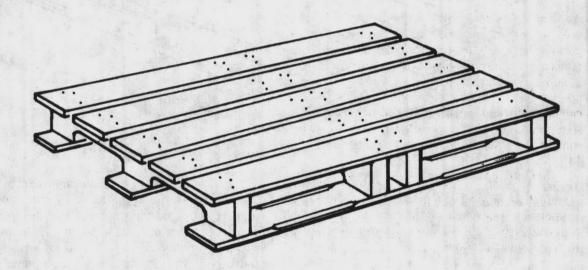


Figure 4-46. Pallet, 40 by 48 inches, wing-end, four-stringer, four-way (partial) entry, hardwood.

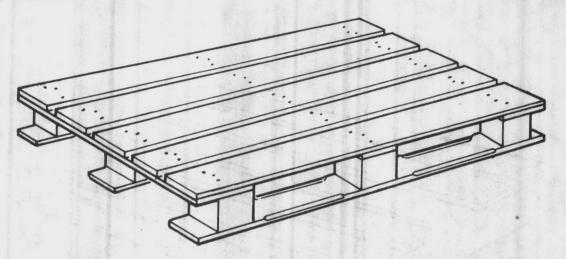


Figure 4-47. Pallet, 40 by 48 inches, wing-end, nine-post, four-way entry, hardwood.

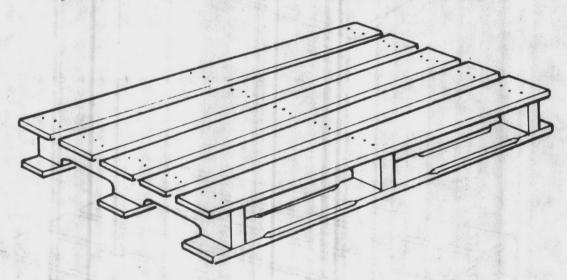


Figure 4-48. Pallet, 40 by 48 inches, four-way (partial) wing, softwood.

storing, or issuing of quantities of material with a minimum of manual handling. Material is placed manually on the pallet at time of receipt, and remains on the pallet for mechanical handling throughout the complete cycle of storage and issue operations. The efficiency of operation is greatly increased, since the pallet system of storage provides for the transportation of packaged items in unit loads and increases the volume and tonnage of materials which may be handled per manhour. Softwood pallets, type I, two-way, flush, and type II, two-way, wing are intended for use in storage operations. Type IV, four-way (partial) wing (fig. 4–

48) is intended for use in storage, except where palletized material is contained by means of pallet support sets, and for shipment worldwide regardless of the mode of transportation. The expendable buckboard pallet (fig. 4–49) used for air, CONUS, and Direct Support System (DSS) shipments interlocking load. The buckboard pallet stand (fig. 4–50) facilitates the movement of the pallet to the shrink tunnel. The box pallet (fig. 4–51) is used for storage of odd-sized items or weak containers, which will not support a superimposed load. The pallet support set (fig. 4–52) is recommended for use in lieu of the box pallet.

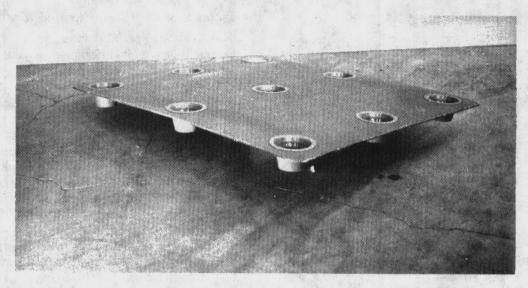
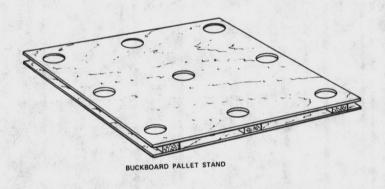


Figure 4-49. Pallet, buckboard, 40 by 48 inches, four-way entry, composed of polystyrene and fiberboard.



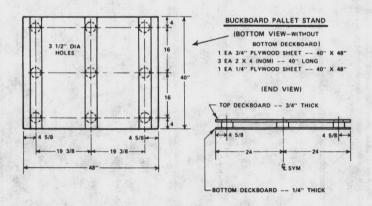


Figure 4-50. Buckboard pallet stand.

DOD 4145.19-R-1 15 September 1979

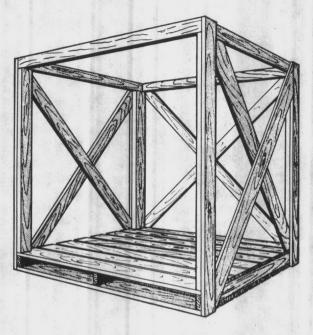


Figure 4-51. Pallet, box (may be constructed using flush or wing end type pallet)

## 4-214. Storage Accessories and Aids.

a. General. Special devices, accessories, and attachments have been designed to handle materials in situations where conventional items of MHE are not adequate for efficient operation. No attempt has been made to include all accessories and aids used by the military services. The fact that an item is included is not to be regarded as authority for use at all installations. Similarly, the fact that an item currently in use has not been included should not be regarded as authority for discontinuance. Application and utilization are subject to the judgment and approval of responsible authorities.

#### b. Pallet resources.

(1) Application. Figure 4–52 shows a support set which is used to form a box pallet when assembled onto flat wood pallets, to allow for stacking of pallets containing irregular shaped commodities that are susceptible to crushing. Support sets are used on standard two-way entry flush type or fourway entry wing type pallets. Figure 4–53 shows the use of support sets for tire storage. Support sets



Figure 4-52. Support set, stacking, material handling pallet.

15 September 1979 DOD 4145.19-R-1



Figure 4-53. Support sets used for tire storage.

will not be used with pallets constructed of soft-wood.

## (2) Pallet rack.

Application. Figure 4-54 shows the pallet rack which provides a support for pallets that is independent of lower loads. It is used where the material to be stored is not strong enough to support a superimposed load; is irregular in shape; is too small for bulk storage and too large for bin storage; or where it is desirable to remove pallets from a lower tier without disturbing upper tiers.

## (3) Pallet sling.

Application. Figure 4-55 shows a pallet sling which is used to handle a pallet for overhead lifting by a crane.

## (4) Safety pallet (OSHA 1910.178).

Application. The safety pallet (fig. 4–56) is used both for maintenance work and for placing materials into or removing materials from storage. The safety pallet is handled the same as an ordinary pallet except it is secured to the forklift truck. Primarily, the safety pallet is used to elevate personnel and tools, and to permit warehouse personnel to safely store material in high racks when items cannot be



Figure 4-54. Pallet rack.

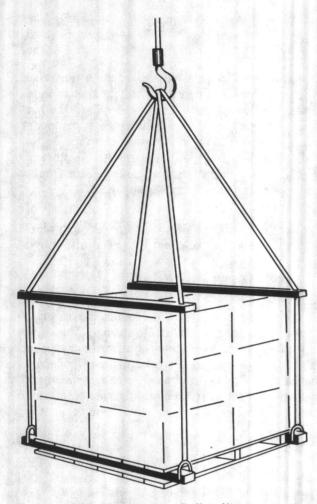


Figure 4-55. Pallet sling.

stored by forklift truck approaching at right angles due to narrow aisles. The entire pallet is painted yellow and is equipped with the following safety features (fig. 4–57).

- (a) A high coaming to prevent tools or small items from falling off (1).
- (b) An expanded metal backguard to protect personnel from moving parts of fork truck (2).
  - (c) Mitered corners (3).
  - (d) A handrail on background (4).
  - (e) Safety chains to enclose pallet area (5).
- (f) Chains for securing pallet to fork truck (6).
- (g) Checker plate flooring to prevent slippage on pallet (7).

There are two types of safety pallets, type "A" and type "B." The type A safety pallet (fig. 4-56) is

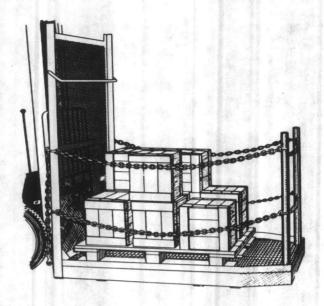


Figure 4-56. Safety pallet.

large enough to accommodate the average pallet and provide ample space from which a person can move materials safely into or out of storage. Fork extensions should be used with type "A" safety pallet (fig. 4–58) and, notice to this effect should be displayed prominently on the side of the pallet. The load carrying capacity of a fork truck rated at 24-

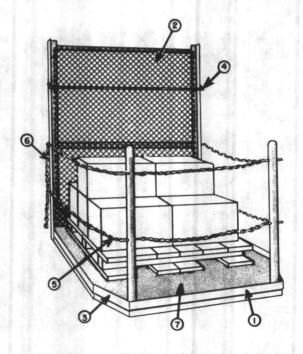


Figure 4-57. Features of the safety pallet.

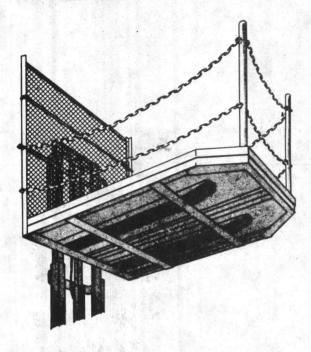


Figure 4-58. Extension forks used with the type "A" safety pallet.

inch load center is reduced by approximately 20 percent when handling loads of 60 inches long. This lower capacity must be considered when using the type "A" safety pallet. The type "B" safety pallet is similar to type "A," but smaller and more maneuverable in narrow aisles, a feature which is of value in maintenance work and in the movement of small lots of materials into and out of restricted storage areas. The specifications for construction of the type "A" and type "B" safety pallet are outlined in figure 4–59.

(h) In addition, such protection from falling objects as indicated necessary by the operating conditions shall be provided to protect personnel being elevated.

#### c. Dunnage.

(1) Application. Dunnage is used to permit mechanical handling of and to protect stock from possible damage from water flows or dampness normally generated from the floor or ground area. In either covered or open storage, stock should be stored on pallets or dunnage. Skids on boxes or crates should be considered as attached dunnage for storage purposes. Usually, dunnage consumes less storage cube than a pallet. Dunnage may be cut from salvaged dimension lumber at little cost

and, therefore, should be used in lieu of and in the same manner as a pallet. Dunnage should be used at floor or ground level and, between units in the stack when one dimension of a stable container exceeds the width of a fork truck. Large boxed or crated units, crated or boxed engines, and other such commodities may be stored efficiently on dunnage (figs. 4–60 and 4–61). A supply of dunnage, cut into appropriate lengths, should be available in all storage areas in which portions of the material is to be stored on dunnage.

(2) Vertical dunnage. Vertical dunnage is lumber cut slightly shorter than the overall height of the load. When placed equidistant around the edge of the load or between containers in a vertical position, vertical dunnage stabilizes the load and prevents crushing of the containers by absorbing that part of the load which is in excess of the strength of the container. Also, pieces may be joined at right angles, placed at the four corners of the load, and held in position by strapping. The proper length of vertical dunnage is determined by the height of the pallet load. The friction of the loads upon each pallet bottom and the proper lengths of vertical dunnage that will support the load provide the required stability for the stack.

(3) Horizontal dunnage. Some form of horizontal dunnage must be used to build stable unit loads of noninterlocking items which will withstand handling, as a unit load, by mechanical equipment. Pallets often have been used for this purpose, by placing one or two courses of a hard-to-stack item on a pallet and placing the small unit loads into storage. In such storage, a stack 18 feet high may contain as many as 7 to 8 pallets. This is inefficient use of pallets and greatly reduces the quantity of stock which may be stored in a given storage cube. By the use of horizontal dunnage, stable noninterlocking items can be made into full unit loads, without any measurable increase in the size of the unit load due to dunnage. Double faced corrugated fiberboard, thin plywood, plain fiberboard, heavy wrapping paper, or similar materials may be used as horizontal dunnage. The type of horizontal dunnage to be used will depend upon the weight, shape, cutting qualities of the item to be palletized.

(4) Horizontal binder block dunnage. Another type of horizontal dunnage used for lateral binding of palletized loads is block or binder dunnage. This dunnage consists of short lengths of dunnage lumber, cut to any desired length, with short pieces of

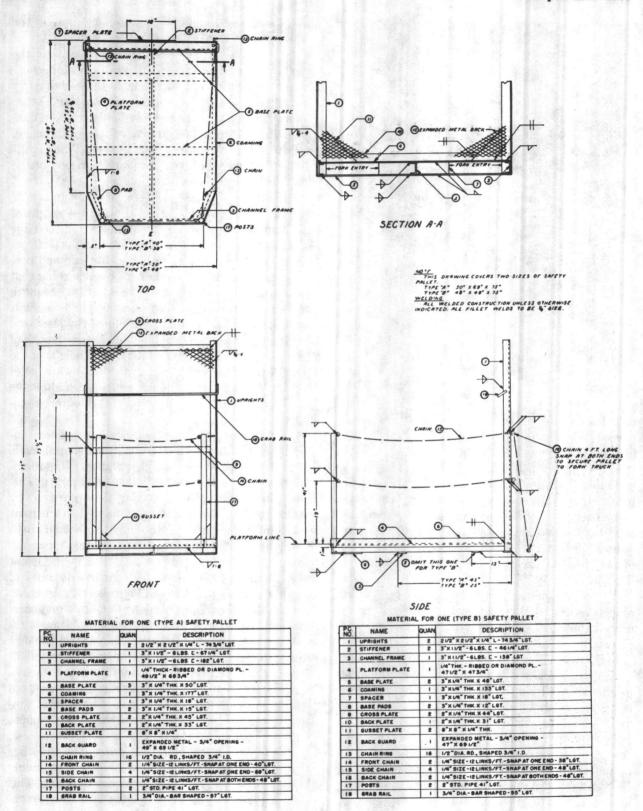


Figure 4-59. Safety pallet specifications.

15 September 1979 DOD 4145.19-R-1

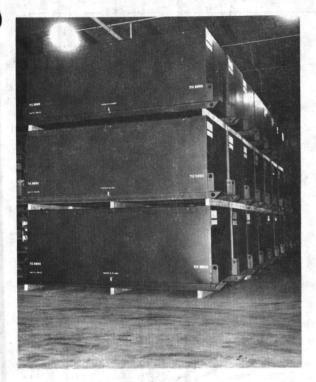


Figure 4-60. Dunnage used in the stacking of asphalt melters.

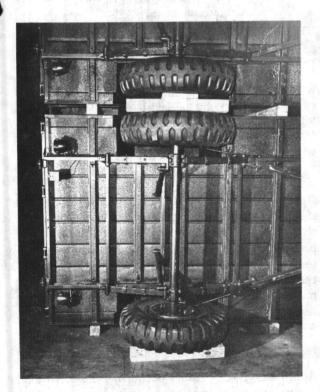


Figure 4-61. Dunnage used in the storage of trailers.

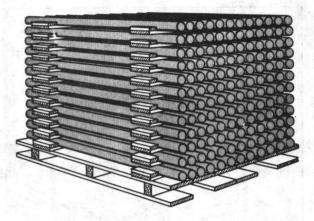


Figure 4-62. Binder block dunnage used in the storage of pip.

blocking secured to each end. This dunnage is particularly adapted to the storage of such items as soil pipe, lengths of large pipe, or similar items which require blocking to prevent rolling (fig. 4–62). Use of this type binder facilitates the removal of one or more layers of pipe from the pallet or stack at any time by use of the fork truck. Also, it results in safe unit loads and permits high stacking of this type of item.

d. Collars and notched spacers.

(1) Carboy collars. To stack glass carboys of acids and similarly packaged items, the superimposed weight of the upper pallets must be supported in such a manner that the weight will be carried by the protective crating around the carboy; this can be accomplished by the use of the wood collar (fig. 4-63). By the use of this collar, carboys can be stacked to permit maximum utilization of storage cube. Since all carboys are not identical in size or packaging, the dimensions of the collar will have to be determined by local requirements. However, care should be taken to assure that the outer edges of the collar rest directly above the sides of the carboy crate. The center member of the collar should be midway between the carboys and securely fastened, as this member supports the center stringer of the upper pallet. In ordering collars, the storekeeper should remember that a collar is not required on the top pallet.

(2) Collars for compressed gas cylinders. The valves on acetylene and similar type cylinders must be protected from the superimposed weight of the upper pallets; this is accomplished by the use of wooden collars (fig. 4–64). However, since this col-

DOD 4145.19-R-1 15 September 1979

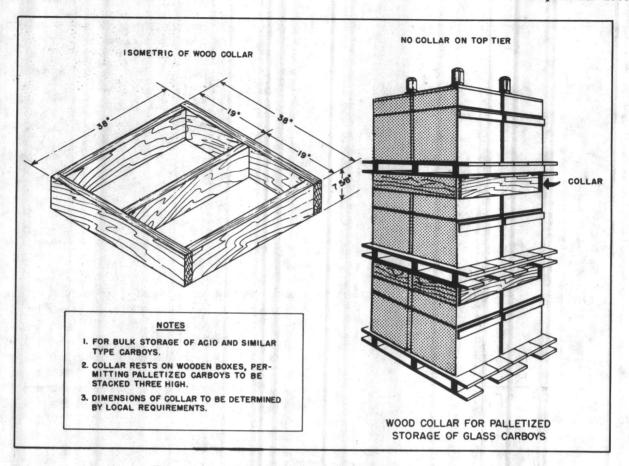


Figure 4-63. Collars used in the storage of glass carboys.

lar depends upon the cylinder, the neck of which has a slight slope, for support it is necessary that this unit be reinforced.

All cylinders palletized in an upright position must be bound with steel strapping to stabilize the load and, to prevent accidental tipping of a cylinder during transporting or stacking operations.

(3) Notched spacers. Notched spacers are used for the horizontal palletizing of compressed gas cylinders. Also, this spacer may be used to palletize short sections of large diameter pipe or similar items. The bottom segments of this type dunnage may be notched on the edge that rests on the pallet. Even though a flat surface transmits the entire weight of the load to the face of the pallet (fig. 4–65), notching the segments will not reduce the strength of hardwood dunnage below acceptable safety factor requirements. Notched spacers are recommended for smaller diameter cylinders. This method of palletization permits issue of single units

without disturbing the balance of the unit. When cylindrical items are palletized horizontally and must be transported long distances or over rough terrain, such units should be bound to the pallet with wire or steel strapping.

#### e. Fork extensions.

Application. Fork extensions are used to extend the forks of a forklift truck. The extensions, consisting of welded steel arms, can be slipped into place over the regular forks. Since the use of extensions moves the center of gravity of the load, it restricts the weight that can be lifted. This factor must be taken into account when the extensions are used to handle excessively large or bulky loads (fig. 4–66).

## f. Portable platform.

Application. A portable platform is used to load and unload supplies at open sheds, open storage or

15 September 1979 DOD 4145.19-R-1

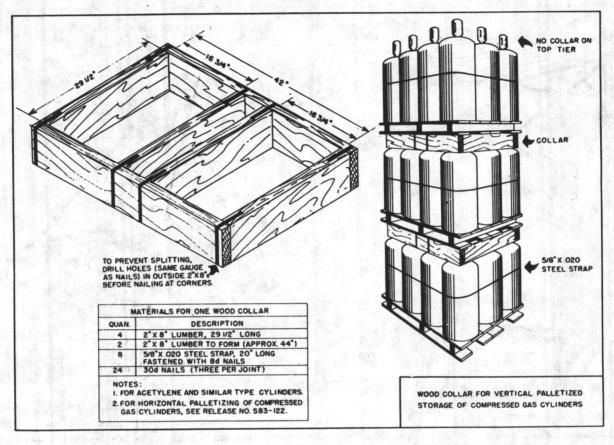


Figure 4-64. Wood collars for vertical palletized storage of acetylene cylinders.

wherever cars are being worked from ground level. It can be moved by a forklift truck and has slings for handling by a crane. One type platform is equipped with legs only. Another type is equipped with retractable legs, wheels, and pneumatic tires (fig. 4-67).

## g. Retriever trailers.

Application. Retriever trailers are used to haul forklift trucks to and from maintenance shops at widely dispersed activities. There are two basic types of retriever trailers—the single-truck type

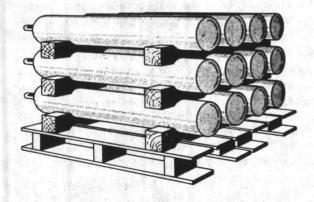


Figure 4-65. Notched spacers.

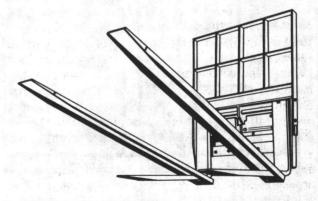


Figure 4-66. Fork extensions.

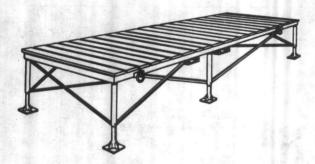


Figure 4-67. Portable platform.

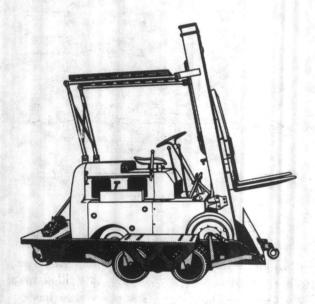


Figure 4-68. Retriever trailer, single-truck type.

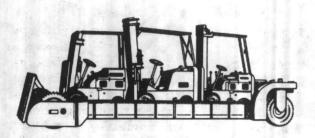


Figure 4-69. Retriever trailer, three-truck type.

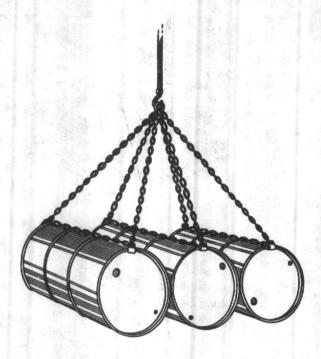


Figure 4-70. Drum-handling sling.

and the three-truck type. The single-truck type retriever can be towed by a 4,000-pound or 7,500-pound gasoline tractor. The three-truck type retriever with a gross load capacity of 33,000 pounds must be towed by a 4,000- or 7,500-pound tractor, depending upon the grade and road surface (figs. 4-68 and 4-69).

## h. Drum-handling slings.

Application. The drum-handling sling is a device for picking up drums or barrels. It was designed for shipboard loading, but can be used with a crane truck for any drum or barrel-handling operation. The sling may be of the chain type, which is a series of chain loops and sliding hooks; or it may be of the frame type, which is a steel bar from which a series of sling hooks are suspended (fig 4–70).

## i. Drum-handling attachments.

Application. The drum-handling attachment is a device capable of handling filled 55-gallon drums by means of a forklift truck. Three types of attachments are available. The first consists of a series of specially shaped and spaced forks that cradle the drums to be handled. This type of attachment handles three filled drums at one time. The second type of attachment, which is mounted on the regular

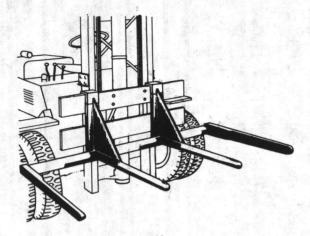


Figure 4-71. Drum-handling attachment.

truck forks, consists of side rails from which specially designed hooks are suspended at front and rear. The attachment is lowered over the drums until the hooks drop into position over the drum rims. This type of attachment handles two filled

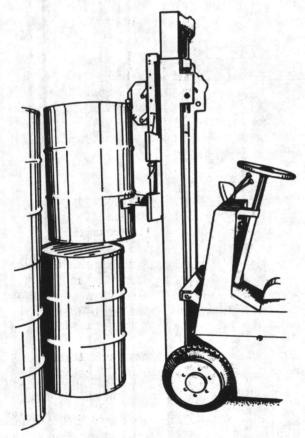


Figure 4-72. Drum-handling attachment single-drum type, vertical carry.

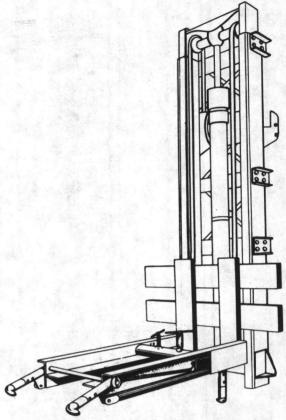


Figure 4-73. Drum-handling attachment single-drum type, horizon'al carry.

drums at one time. The third type of attachment, which is vertically operated, handles one filled drum at one time (figs. 4–71, 4–72, and 4–73).

## j. Bridge plate rack.

Application. The bridge plate rack is used to store bridge plates. Several types made of wood or metal are in use (fig. 4–74).

## k. Bridge plate.

Application. The bridge plate is a metal plate used to span the gap and compensate for difference in height between truck and truck dock and rail car and rail dock. The bridge plate permits movement of MHE in and out of trucks and rail cars. These plates are usually equipped with chains or recessed lifting hooks for pickup positioning by a forklift truck (figs. 4–75 and 4–76).

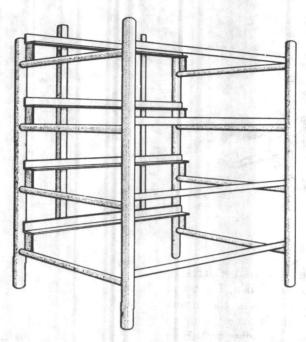


Figure 4-74. Bridge plate rack.




Figure 4-75. Bridge plate.




Figure 4-76. Bridge plate.

## l. Mechanically operated ramp.

Application. The mechanically operated adjustable ramp is used at the truck dock. The ramp is vertically adjustable to the height of truck floors so that movement of MHE in and out of trucks is permitted. These ramps are either permanently installed in the dock or located in front of the dock (figs. 4–77 and 4–78).

## m. Flip ramp dockboard.

Application. Used for truck loading and unloading. Manually operated dockboard mounted to the front of the dock (figs. 4-79 and 4-80).

## n. Mobile vehicle loading ramp.

Application. Portable ramp used for loading and unloading with forklift trucks from ground level. A detachable tow bar is provided for towing (fig. 4–81).

## o. Bottom-dumping hopper.

Application. The bottom- or self-dumping hopper is a forklift truck attachment that is used to load and unload bulk materials, small parts, or scrap (fig. 4–82).

#### p. Ram.

Application. The ram is a solid, pole-like device

15 September 1979 DOD 4145.19-R-1

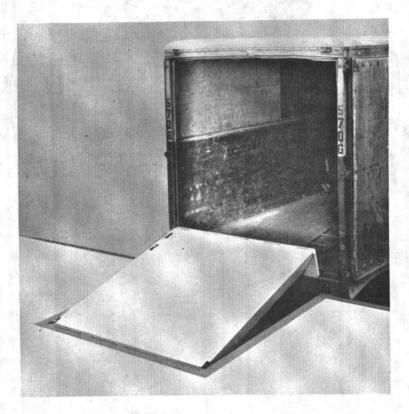


Figure 4-77. Mechanical ramp recessed in the loading dock.

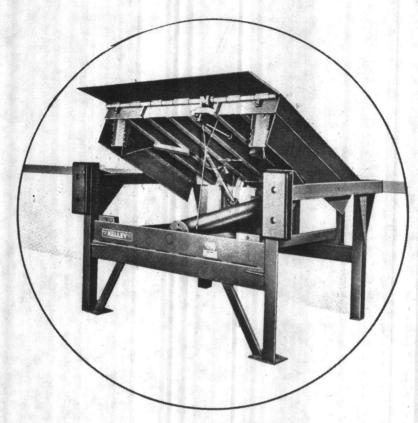


Figure 4-78. Mechanical ramp mounted in front of dock.




Figure 4-79. Dockboard in stored position.

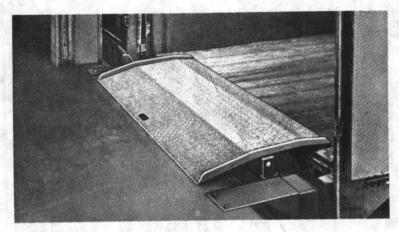


Figure 4-80. Dockboard in operating position.

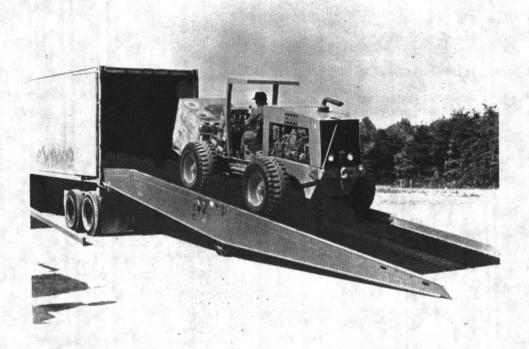


Figure 4-81. Mobile vehicle loading ramp.

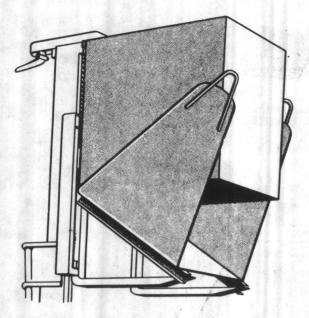


Figure 4-82. Bottom-dumping hopper.

attached to a forklift truck and used to handle coils of wire or cable, rolls of paper, or other cylindrical or open-center items (fig. 4-83).

## q. Lifting arm bar.

Application. The lifting arm bar is a crane attachment used for handling wire coils (fig. 4-84).

## r. Crane boom attachment.

Application. Converts forklift truck to mobile jib crane capable of handling bulky, irregular shaped

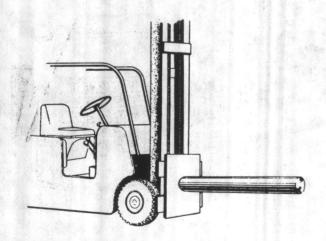


Figure 4-83. Ram.

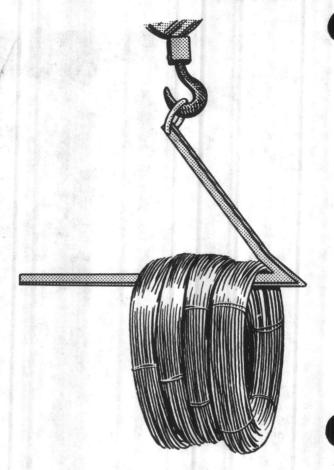


Figure 4-84. Lifting arm bar.

objects, and is a valuable aid in maintenance work. The crane boom is raised or lowered with the standard lift mechanism (figs. 4–85 and 4–86).

## s. Clamp.

Application. The use of hydraulically operated clamp arms enables the fork truck to handle many objects that cannot be palletized satisfactorily. The clamp arms grip the load by squeezing it between the clamp faces. There are numerous variations of clamp arms made to handle different types of bags, barrels, cartons, bales, and other commodities. The clamping pressure required depends on the load and usually is regulated by the operator (fig. 4–87).

#### t. Pusher.

Application. The pusher or unloader can be used to place into position such items as boxes, crates, bales, bags, unit loads, and miscellaneous material.



Figure 4-85. Crane boom attachment.

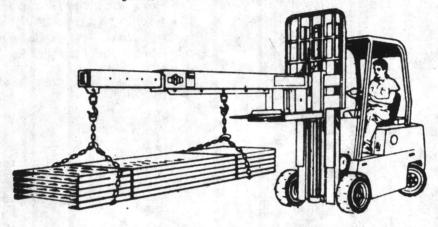


Figure 4-86. Crane boom attached to forklift truck.

The hydraulically operated pushing mechanism pushes loads from the forks of the truck (fig. 4–88).

#### u. Load inverter.

Application. The load inverter is especially valuable in activities where certain commodities like evaporated milk must be turned, when stored for long periods of time, at periodic intervals. The inverter has two sets of forks, upper and lower, plus a vertical stop to prevent the load from spilling while it is being inverted. An empty pallet is placed on the upper forks, the lower forks are inserted into the loaded pallet, and the load is revolved 180° so that the empty pallet becomes the loaded pallet and the loaded pallet is emptied. Some inverters have adjustable forks to clamp the load during the inverting process (fig. 4–89).

#### v. Revolving carriage.

Application. The revolving carriage is generally made to rotate in a circle of 360°. It is normally used in handling granular or liquid materials that are to be dumped from one container into another. The carriage is designed to accommodate forks and other attachments (fig. 4–90).

## w. Portable canopy.

Application. The portable canopy affords protection for supplies and personnel during loading and

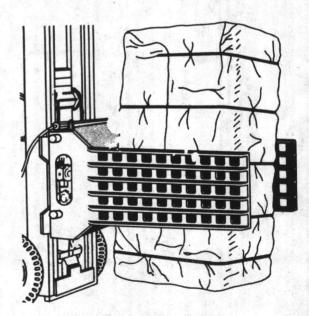


Figure 4-87. Clamp.

unloading operations in bad weather. The canopy can be stored in a warehouse aisle without interfering with operation of vehicles (fig. 4–91).

x. Car door opener.

Application. The car door opener is used to open the doors of rail cars. This allows one man to open the car door, and consists of a block, pawl, ratchet, and chain (fig. 4-92).

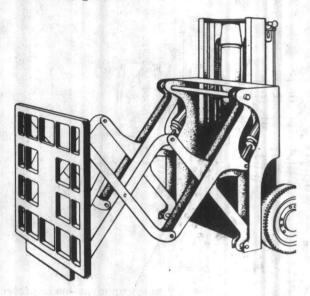


Figure 4-88. Pusher.

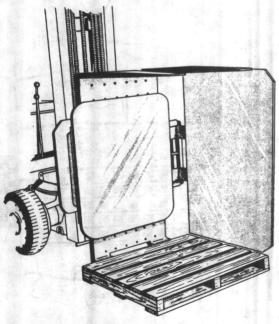


Figure 4-89. Load inverter.

## y. Pallet pusher.

Application. The pallet pusher is used in loading vans where loading docks are not available or when two-way or four-way (partial) entry pallets are being loaded and positioned with the 40-inch dimension perpendicular to the length of the van. The attachment will not damage the mast of the work truck and provides a safe loading method when used under proper conditions. However, if the lack of dock level loading capability is the prevalent condition, a mobile ramp should be provided and used in lieu of the pallet pusher (fig. 4–93).

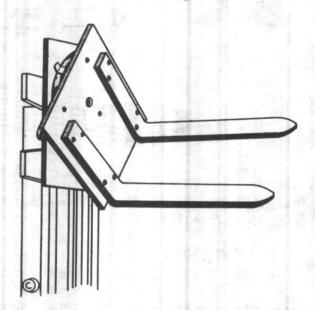


Figure 4-90. Revolving carriage.

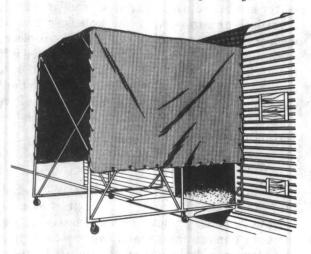


Figure 4-91. Portable canopy.

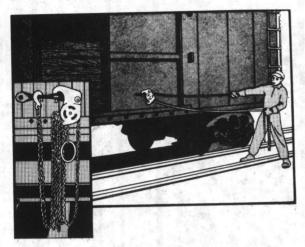


Figure 4-92. Car door opener, manual type.

z. Cantilever racks. Cantilever racks are made of steel and are generally used for storage of metal sheet, rod or bar stock. These racks are also useful for storage of plywood and other bulky items not susceptible to palletization. The height of a cantilever rack is normally limited only by the reach capability of MHE or the height of the warehouse. Rack specifications can be tailored with capabilities to meet individual storage requirements. Supporting rack columns are normally spaced from 4 feet to 6 feet apart. Arms vary from 2 feet to 4 feet in length and can be adjusted vertically on the columns to accommodate various types of material. Columns can have arms on only one side (single face) or on both sides (double face) (fig. 4–94).

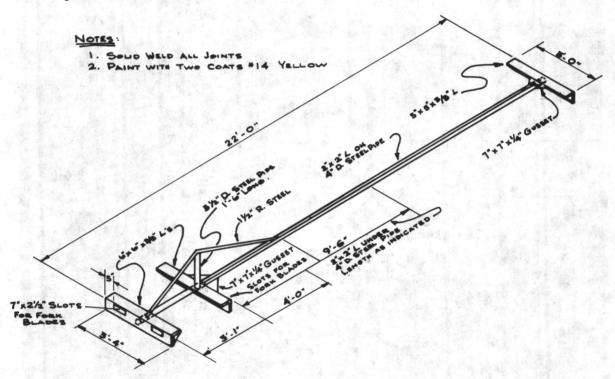


Figure 4-93. Pallet pusher.

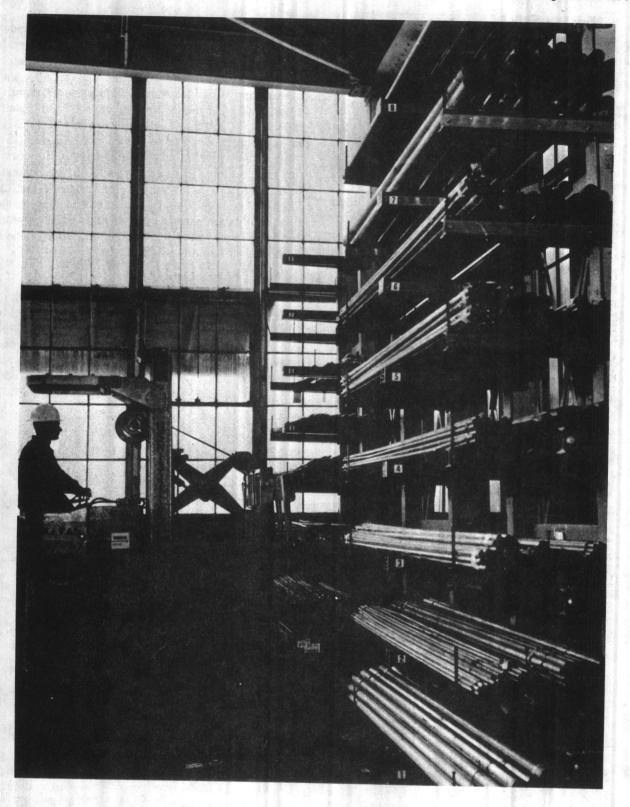


Figure 4-94. Cantilever rack (single face).

## Section 3. SELECTION OF MHE

	Paragraph
General selection factors	4–301
Building construction	4–302
Types of MHE power	4–303
Forklift truckload ratings	4-304
Warehouse tractor load ratings	4-305
Special equipment considerations	4–306
Mechanical alterations	4-307
Safety considerations for MHE	4–308

#### 4-301. General Selection Factors

a. The potential savings in terms of time, funds, and personnel resulting from the selection of the right type of MHE for an operation cannot be over emphasized. The selection of costly MHE should not be made without considering all operational factors including the cost and suitability of alternate types of equipment available.

b. When selecting equipment, the size, shape, weight, and container strength of the commodities to be handled should be considered. Examples of the application of MHE are as follows:

(1) Palletized supplies are handled by forklift trucks, sometimes in conjunction with tractor-trailer or dragline conveyors and warehouse trucks.

(2) Small, uniform sized commodities or containers are readily adaptable to palletization and handling as a unit by forklift trucks.

(3) Containers such as large bales, crates, or boxes may be efficiently handled and stacked by forklift truck and use of short dunnage or special fork attachment.

(4) Large items, such as appliances or equipment packed in boxes or crates, with cleats or runners nailed to the underside of the container, are generally adaptable to handling by forklift trucks.

(5) Cylindrical supplies with a hole through the center, such as coils of wire, can be handled by a forklift truck with a ram attachment.

(6) Heavy, bulky, and large irregularly shaped supplies are normally handled by cranes, crane attachments rigged on forklift trucks, heavy duty forklift trucks, or side loading forklift trucks.

(7) Small, flat-surfaced packages may be transferred in continuous flow over gravity or powered conveyor systems. Chutes and slides quickly deliver smooth-surfaced nonfragile packages, sacks, and bales to lower levels.

(8) Lumber, rails, etc., are handled speedily in large unit loads by heavy duty pneumatic-tired

forklift trucks, truck straddle carry, or side loading forklift trucks.

Note. Detailed information on applications for portable MHE is found in section 2 of this chapter.

## 4-302. Building Construction

a. The construction of the building used for warehousing purposes should be reviewed to determine the type of handling equipment which can be used. The construction may limit the amount, weight, and type of materials which may be stored. These limitations are imposed by the size and strength of the structure, and by certain safety and security measures. See chapter II, sections 2 and 3, and chapter VI for more information on limitations.

b. Equipment suitable for one-level operations may not be suitable for multilevel operations. Multistory operations generally are less economical than single story operations; therefore, most warehouses built in recent years have been single-story structures. Two example multistory operation restrictions are explained below.

(1) Elevators. Generally, elevators in operation were not designed for the use of mechanized handling equipment. In many instances the dimensions and the capacity of the elevator available will be inadequate to take the weight of the unit loads commonly used plus the weight of the equipment. For example, an electric fork truck capable of transporting a load of 3,000 pounds weighs nearly 4 tons; when loading an elevator with this equipment, this entire weight will be concentrated on the front edge of the elevator. Unless designed for this type of stress, even heavy capacity elevators will be strained.

(2) Ramps. The width and grade of ramps will be factors limiting the type and size of MHE which can be operated in the structures. Even a slight grade will require increased power to transport loads. Frequently, equipment capable of pulling or

carrying heavy loads up inclines will be too large for ordinary use in other storage operations.

## 4-303. Types of MHE Power

Gasoline, diesel, LPG, or electric power is used to propel forklift trucks and warehouse tractors. The following factors help to determine the selection of the proper power drive.

a. Ventilation of operating area. Closely confined or poorly ventilated spaces such as upper floors of multistory buildings require the use of electric trucks to avoid the hazard of accumulated carbon monoxide.

b. Flammable material. Electric-powered fork trucks, spark-inclosed type, will be utilized for the handling of flammable material such as paint, oil, gasoline, and flammable gas.

c. Fume absorbing materials. Certain commodities, particularly fresh fruits and vegetables, will absorb and become tainted by the fumes from gasoline or diesel engines. Electric power is required to handle these commodities.

## 4-304. Forklift Truckload Ratings

a. The fork truck pivots on the center of the drive axle; therefore, the weight of the load ahead of the front wheels must be counterbalanced by the weight of the truck. In accordance with the principles of leverage, the ability of the fork truck to lift a load depends upon the length of the load (the distance of its center of gravity from the center of the front axle of the truck) and the weight of the load. The capacity of the fork truck is stated in inch-pounds, which is the rated pounds capacity of the truck multiplied by the distance from the center of the front axle to the center of the rated load selected by the manufacturer. In general, trucks are rated by pounds and the distance from the heel of the forks to the center of gravity of the rated load (for instance, 4,000 lbs at 24-in load center). To determine inch-pounds capacity, add to load center the distance from the center of the front axle to the heel of the forks, which can be obtained from the manufacturer's specifications or by measurement. and multiply the sum by the rated load weight.

b. For example, assume a rating of 4,000 pounds at 24 inches, with a measurement of 15 inches from the heel of the forks to the center of the front axle; result:  $4,000 \times (24 + 15) = 156,000$  inch-pounds. To determine the maximum weight which may be placed on a pallet of given size, assuming uniform

weight distribution on the pallet, add half the dimension of the pallet parallel to the forks to the distance from the center of the front axle to the heel of the forks and divide the sum into the inchpound capacity of the truck. To complete the example, the maximum weight on a 40- by 48-inch pallet is 156,000 divided by (15 + 20), which equals 4,457. However, the load weight may not be in excess of the weight of the rated load stated by the manufacturer. If the dimensions of the pallet used. parallel to the forks, is less than twice the rated load center, the rated pounds capacity is the capacity of the truck; therefore, the maximum load would still be 4,000 pounds. Bending of the mast channels as the load is raised, plus forward tilt action, will reduce the capacity of elevated loads by as much as 25 percent. Overloading of fork trucks is strictly prohibited. Among the effects of continued overload are damage to lift mechanism, excessive tire wear, and strain on the truck frame.

## 4-305. Warehouse Tractor Load Ratings

a. Warehouse tractor capacity is stated in pounds drawbar pull, which is the motive force exerted at the coupling. The drawbar pull and pushing power of the tractor is figured on the basis of the engine torque, drive ratio, weight, and the traction of the tires. Although this pull is not the maximum load weight the tractor will draw, since under ideal conditions a tractor can pull a load equal to 20 times its drawbar pull, the maximum normal load weight should not exceed 10 times the drawbar pull which will allow for all technical and safety factors.

(1) Tractive effort and resistance. Tractive effort is the motive force (measured in lbs) exerted at the drive wheels of a tractor to overcome the resistance to motion. Tractor resistance is the result of rolling friction between the wheels and the surface, expressed in pounds per ton of gross weight of tractor. The type of surface over which the tractor is to travel has an important bearing on tractive resistance. The following table of road resistance shows the comparative road resistance of some of the more common types of road surfaces:

Table of road resistances

Type of road surface	Resistance in pounds per ton
Asphalt (hard)	28
Brick (glazed)	47
Brick (poor)	57
Brick (smooth)	40
Clay	200

	Resistance in
Type of road surface	pounds per ton
Concrete (poured)	53
Concrete road	36
Granite blocks	56
Gravel road	75
Ice and snow	40
Macadam	
Macadam (poor)	The same of the sa
Sand (loose, 3 in deep)	330
Sand road	275
Snow (hard)	
Snow (soft)	
Tarvia	. 47
Wood blocks	. 44
Wood planking	43
Wood planking (sticky surface)	

(2) Grade resistance. Grade resistance is the resistance for movement on a grade, to be added to or subtracted from that required for level movement. Grade resistance amounts to 20 pounds per ton of gross weight of the tractor-trailer train and the combined load for each 1 percent of grade encountered. On upgrades the percent is added to the resistance; on down-grades the percent is subtracted. Percent of grade is determined by the feet of vertical rise per 100 horizontal feet.

b. Estimating required drawbar pull. The estimated drawbar pull in pounds and application of tractors used by the military are as follows:

Drawbar pull 2,600 pounds 4,000 pounds	Application Inside warehouse Inside and outside
7,500 pounds	 Outside work, heavy

At times it may be necessary to make a rapid, reasonable accurate estimate of the drawbar pull required of the motive power unit of a tractor for the handling of loads on a level surface and also on grades. The following example will illustrate a fairly accurate method for this estimate:

Step 1: What is the drawbar pull required for a tractor-trailer for the following composition and conditions:

Weight of tractor	6,690 pounds
Weight of driver	170 pounds
Weight of 5 trailers at 500 tare each	2,500 pounds
Weight of net pay load	16,000 pounds
TOTAL GROSS LOAD	25,360 pounds
Equals	12.68 tons

Step 2: If the surface is level poured concrete, the value from the table to calculate drawbar pull is 53

pounds resistance per ton moved. The calculation then would be as follows:

$$\begin{array}{lll} 12.68 & \times & 53 & = & 672 \text{ pounds} \\ \text{Total load} & \times & \text{Road resistance} = & \text{drawbar pull} \\ \text{tons} & \text{pounds per ton} & \text{required} \end{array}$$

Step 3: If the train is required to travel up a 5 percent grade, then the road resistance of 53 pounds per ton would be increased by 20 pounds for each percent of grade. The calculation for this drawbar would be:

\*These factors show the total grade resistance or rollback force in pounds per ton for a 5 percent grade.

For this application, a tractor with a 2,600-pound drawbar pull would be satisfactory.

## 4-306. Special Equipment Considerations

a. Truck tiering electric (straddle type). This truck eliminates the counterweight and the attendant increase in length by using outriggers which extend forward in a plane at floor level parallel to the plane of the forks. The truck can operate in 6foot aisles, the forklift truck requires 10-foot aisles. However, the outriggers must straddle the bottom tier when the truck is positioning a pallet which necessitates the use of single wing pallets. Since it is not practicable to use single wing pallets for the bottom tier only and double wing pallets for the upper tiers, this truck is used in pallet rack areas where single wing pallets only can be used. The truck tiering is lighter in weight than the conventional forklift truck which permits its use on light construction and in elevators of limited capacity. The military services use a 3,000-pound capacity truck which is available in both riding and walkie type. A variation of these trucks provides for the forks to extend by mechanical means, thus eliminating the requirement to straddle the pallet.

- b. Warehouse crane.
  - (1) Usually, the lifting and carrying capacity

of the warehouse crane is stated as the maximum weights which may be lifted at various boom angles. (If the boom is telescopic, maximum capacity is obtained with the boom at the shortest length.) As the boom is lowered toward the horizontal position, or as its length is extended, capacity decreases.

(2) A load chart showing the capacity of the crane under all circumstances, should be visible on the crane. These charts furnished by the manufacturer will indicate clearly the safe load in pounds for maximum and minimum position of the boom and for at least two intermediate stations.

(3) If the crane has a sluing boom and if the load is to be moved only within the circumference of the slue, it is not necessary to move the crane. The boom is slued to the proper position and the load is ready for placing.

(4) If the crane has a rigid boom or if the load is to be carried farther than the sluing boom can reach, it is necessary to move the crane. The crane should not be moved until both the load and the boom are in proper position for traveling, in order to reduce the swing of the load.

c. Fixed conveyor equipment. In choosing a conveyor system, the initial cost; the length of time it will take to pay for itself; the cost of maintenance and operation; volume of items processed and the type of material handled by the activity contemplating the use of conveyor equipment must be considered. Through the use of conveyors, savings are achieved through the elimination of trailer train operation, elimination of double handling and in various other ways. An increase in production can be realized due to maintaining work rhythm; that is, workloads do not build up at any point but move to the next station in an even flow, reducing peaks and valleys to the minimum.

(1) Power belt conveyor. The powered belt conveyor consists of an endless belt mounted on a frame and driven by a head pulley connected to a drive motor. The belt travels over a series of rollers or a sliding bed. A takeup to adjust belt tension is provided. A belt conveyor can operate on inclines, declines, or horizontal paths. The maximum angle of incline on most materials is limited to approximately 25°. Small, semibulky, bulky, or individual items with flat, smooth surfaces that do not lend themselves to palletizing, or tote boxes and part baskets are transported on this type conveyor. Inasmuch as it is powered, this type conveyor may be used in conjunction with the dead roller conveyor

to transport material from floor level to working level, or moving material to the next processing point by the use of timing devices, deflectors and controls, over a distance where gravity would not suffice. It can be used in single or double combinations to form a portable conveyor system. In addition, a telescopic system may be used when a definite location for loading or unloading facilities cannot be set up due to shapes and sizes of vehicles transporting cargo. That is, the conveyor could be extended or retracted. For example, different types of aircraft at air freight terminals, or various types of commercial trucks at receiving and shipping docks. The performance of a belt conveyor depends on the width of the belt, the type of material used for the belt, the supports and horsepower of the drive.

(2) Overhead towing conveyor. This conveyor consists of an overhead rail and chain mounted on rollers that run on the channelled rail. Loops are spaced as desired along the towing chain for the purpose of attaching material carriers. When the carriers are ready for movement, the carrier is positioned onto a loop of the moving chain and the carrier moves to its predetermined destination. This conveyor is used to deliver material in point to point processing and to and from production lines; for examples, from receiving to various stockrooms for storage and from storage to packing and shipping points. This type of conveyor conserves floor space as it does not require as much space as tractor-trailer operations. The selection of this system for any operation should be primarily based on volume of items or tons handled, or combination of the two, which must be great enough to justify its installation.

(3) Subfloor conveyor. The subfloor-type conveyor consists of a moving link chain with chain track imbedded in the floor. Retractable pins or pods are mounted vertically on front of platform trucks. When the truck is ready to be transported, it is placed over the chain and the pin is dropped. The truck is towed forward as the pin falls in the slot of the chain. The subfloor conveyor permits free travel of other MHE as there are no overhead obstructions to prevent use of high mast for trucks required for high stacking purposes. This conveyor is used for the same purpose as the overhead towing conveyor; that is, to deliver material in point to point processing and to and from production lines.

## 4-307. Mechanical Alterations

MHE is engineered and guaranteed by the manufacturers to perform specified functions. Mechanical alterations to power plants, hydraulic systems, operating levers, and controls, lifting and structural members and counterweights may seriously affect operation of equipment or endanger personnel. Alterations to MHE will not be effected prior to approval of the appropriate military service. Requests or recommendations to effect alterations will be addressed through normal channels and will include—

a. Complete details of the proposed alterations,

including such photographs, blueprints, and engineering data as may be necessary.

- b. Reasons for the alteration.
- c. Anticipated improvements.

## 4-308. Safety Considerations for MHE

Chapter VI of this regulation provides overall safety guidance for storage operations. The following OSHA references are provided for specific equipment.

- a. 1910.178—Powered Industrial Trucks.
- b. 1910.179—Overhead and Gantry Cranes.
- c. 1910.180—Crawler, Locomotive, and Truck Cranes.

## Section 4. MHE REQUIREMENT FACTORS

	Paragraph
General	4-401
General	4-402
Factors affecting equipment requirements	The state of the s
Planning the operation	4-403
riaming the operation	4-404
Computing MHE requirements	
Computing pallet requirements	4-405
Considerations in requirements for fixed equipment	4-406
Considerations in requirements for fixed equipment	4 405
Fleet management	4-407

#### 4-401. General

A balanced operation provides for the optimum number of people and MHE to accomplish a specified workload. Too many laborers and not enough equipment will cause bottlenecks. On the other hand, too much equipment and not enough laborers will also cause bottlenecks. In both cases, either people or equipment will be idle part of the time. In a balanced operation, a smooth flow of work is accomplished and neither people nor equipment are idle. This section provides basic guidance in determining MHE requirements.

## 4-402. Factors Affecting Equipment Requirements

a. If all supplies moving into storage were palletized loads, squared off for stacking, there would be little need for anything other than a forklift truck and driver. However, this is not always the case. Trucks and railcars are sometimes hand loaded and consequently must be manually unloaded. Figure 4–95 represents some other conditions affecting equipment requirements.

b. Terrain features, location arrangement and design characteristics of buildings, extent of open storage area, and road and rail facilities are all ele-

ments under the general heading of physical layout which influence equipment requirements.

c. Equipment requirements are also influenced by mission responsibilities which determine the types of commodities handled and influence the types of handling equipment.


d. The number of forklift trucks, conveyors, etc., are influenced by the workload. An increased workload may require increased usage and greater payload or an increase in the equipment fleet. A decreased workload will have the reverse effect.

## 4-403. Planning the Operation


Effective planning should include factors of quantity, types and characteristics of equipment required, scheduling of use, economical travel ranges, and timing of the operations. See figures 4–96, 4–97, 4–98, 4–99, 4–100, and 4–101.

Figures 4–96 and 4–97 represent two examples of developing balanced operations. Figure 4–96 depicts a medium distance "in-between" haul wherein two tractors and four trailer trains keep pace with two lift trucks. Figure 4–97 depicts a shorter haul wherein only one tractor with three supporting trailer trains services two lift trucks. Determination of requirements will have been made by com-


## VARIOUS CONDITIONS AFFECTING EQUIPMENT REQUIREMENTS

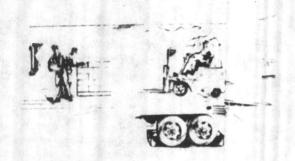

SHORT MASTED FORKLIFT TRUCK SERVICING LOW DOOR HIGHWAY VAN

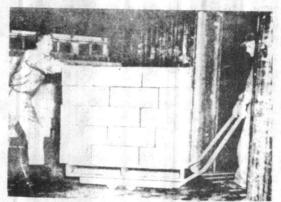


REEFER CAR OPERATION

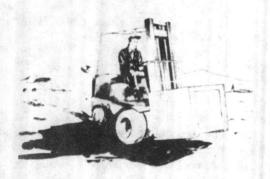

TERRAIN AND CLIMATIC CONDITIONS



ELECTRIC TRUCKS ARE NECESSARY FOR CERTAIN OPERATIONS

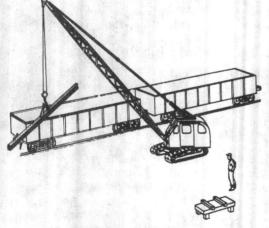

CRANE OPERATION UNLOADING GONDOLA CAR



STRADDLE TRUCK CARRYING A LOAD OF UNUSUAL SHAPE

Figure 4-95. Types of equipment that effectively serve supply operations under varying conditions.

## OPERATIONS BALANCE


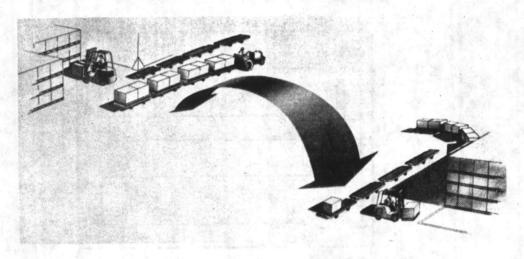


Figure 4-96. Tractor-trailer rewarehousing operation.

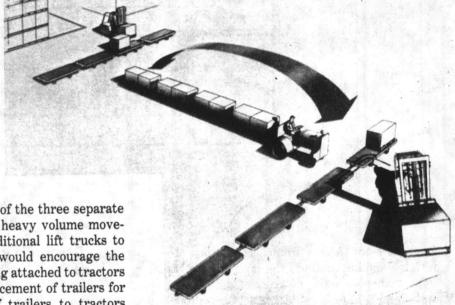

puting timing studies of each of the three separate parts of the operations. In a heavy volume movement, the assignment of additional lift trucks to each end of the operations would encourage the possibility of trailers remaining attached to tractors to effect more convenient placement of trailers for lift truck services. Ratio of trailers to tractors would then be equal, one train to one tractor. Ratio of trains to lift trucks would depend on the time consumed in the trains traveling between the two points as compared to the rate of loading or discharge by the lift trucks. In any case, the equipment

Figure 4-97. Tractor-trailer shipping operation. ratio adopted will be aimed to develop maximum production of separate pieces.

## IMPROVING TECHNIQUES

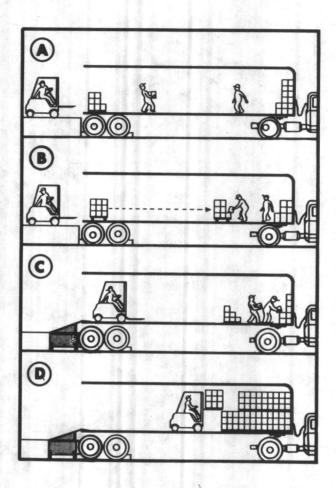


Figure 4-98. Graduated sequence of experienced operations improvement.

Regardless of the apparent acceptability of a materials handling method, the possibility of further improvement should always be considered. As a technique is improved the opportunities for reducing labor and equipment requirements are proportionately enhanced. Operations should be continually appraised for possible improvement. Acknowledging experience to be a factor of considerable magnitude to a storage operator, adoption of an attitude

such as "let's do it this way because we always have" can only penalize the ability to improve. An open-minded attitude regarding operational change is therefore, a must. Apparent benefits in progression of figure 4–98 are obvious. As each stage is implemented the complications of operations balancing have been simplified and the production potential and operational costs have been considerably affected.

Relationship of distance traveled to time consumed at known travel speeds

	Ft traveled		Travel	time ex	pended	(seconds)
Miles per hour	per second	50'	100'	150'	2001	250'
2	2.9	17.3	34.5	51.7	69.0	86.2
3	4.4	11.4	22.7	34.1	45.6	57.0
4	5.9	8.5	16.9	25.4	33.9	42.4
5	7.3	6.8	13.7	20.5	27.4	34.2
6	8.8	5.7	11.4	17.0	22.7	28.2
7	10.3	4.9	9.7	14.6	19.4	24.4
8	11.8	4.2	8.5	12.7	17.0	21.2
9	13.2	3.8	7.6	11.4	15.1	18.9
10	14.6	3.4	6.8	10.3	13.7	17.0
11	16.1	3.1	6.2	9.3	12.4	15.5
12	17.6	2.8	5.7	8.5	11.4	14.2
13	19.1	2.6	5.2	7.9	10.5	13.1
14	20.6	2.4	4.8	7.3	9.7	12.1
15	22.0	2.3	4.5	6.8	9.1	11.4

Note. Speeds at which equipment may operate should not exceed those allowed under other chapters of this regulation.

Figure 4-99. Relative distance traveled for specific time elements as associated with miles per hour rates.

## OPERATIONS TIMING

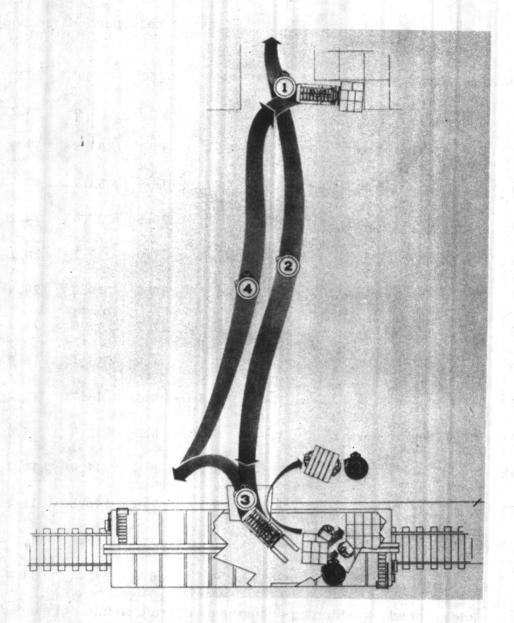


Figure 4-100. Example timing of a bulk shipping or receiving operation.

In timing of equipment in depicted operation (1) represents that time expended in approaching stack from aisle, picking up or depositing load and backing out to aisle; (2) indicates the time required to travel from stack area to dock; (3) identifies that time consumed in entering car and either depositing or

picking up load and backing onto the dock and (4) indicates the time expended in travel from dock back to stack area. The labor timing is divided into two parts: (1) removing or placing supplies on pallets and (2) either carryiong pallets to or from car, depending on type of operation.

DOD 4145.19-R-1

## DOES YOUR EQUIPMENT BALANCE?

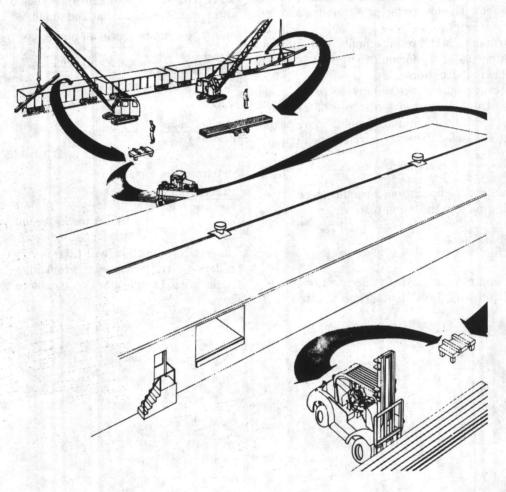


Figure 4-101. Open storage operation depicting receipt of odd-shaped items in gondola cars.

In a balanced operation all men and equipment units are synchronized to an acceptable producing pace. This figure depicts three separate equipment operations. Each must move in balance with productive capabilities of other units in this hypothetical operation. To attain this, two cranes are necessary to keep pace with one straddle truck and one lift truck. Separate timings of each segment have established pattern of equipment requirements. Considerations in timing are: (1) time expenditure for crane to discharge a unit load quantity from gondola car; (2) time expended by straddle truck in moving

unit load from off loading point to stacking point and (3) required time for forklift truck to stack supplies as deposited by straddle truck. Related time elements for each of these operations will form basis for equipment assignment. Illustration is intended to depict one method of handling a particular commodity. It is recognized that other equipment and/or methods may also apply.

## 4-404. Computing MHE Requirements

a. Several factors must be considered in determining the number of pieces of equipment to do a

particular job. The first is the volume, e.g., pallet loads, trailer trains, carloads, etc. The second is the number of units of the volume carried each trip, e.g., pieces, pounds, pallets, etc. The third is the average time used to accomplish a round trip for the equipment. The fourth factor is the time allotted to do the job. Figure 8 shows a formula which can be used to make a MHE requirements computation.

- b. Example use of the formula in figure 8 is shown in the following situations:
- (1) Storage operations require 48 pallet loads of supplies to be relocated a distance of 250 feet. One round trip takes 5 minutes, and 2 hours is the time allotted. Two pallets are carried each trip.

$$R = \frac{48 \times 5}{2} \div 120 \text{ (min)} = 1 \text{ fork truck}$$

(2) In the same operation, a requirement exists to move 192 pallets the same distance in the same time frame.

$$R = \frac{192 \times 5}{2} \div 120 = 4 \text{ fork trucks}$$

(3) A requirement exists to relocate 4,064 pallet loads a distance of 1,500 feet. Time allotted is 3

days. Since the distance is greater than 400 feet (max travel distance of fork truck) tractor trains are required. One tractor and four trailers carry eight pallets in a 20-minute round trip cycle. It takes 5 minutes for one forklift truck to load a train and 8 minutes to unload and stack.

Step 1. Compute pieces of equipment required.

$$R = \frac{4,064 \text{ pallets}}{8 \text{ pallets/train}} \times 0.33 \text{ hrs (20 min)} \div 24 \text{ hrs}$$
$$= 7 \text{ tractors}$$

Step 2.

 $\frac{7 \text{ trailer trains}}{1 \text{ trailer train}} \times 5 \text{ min} \div 20 \text{ min}$ 

= 2 forklift trucks for loading

Step 3.

 $\frac{7 \text{ trailer trains}}{1 \text{ trailer train}} \times 8 \div 20$ 

= 3 forklift trucks for unloading/stacking

The entire operation will take seven tractors, 28 trailers (4 trailers per tractor) and five forklift trucks with 12 operators to complete the job in 3 days.

# DETERMINING MOBILE MATERIALS HANDLING EQUIPMENT REQUIREMENTS

FORMULA - 
$$\frac{V}{C} \times T \div AT = R$$

#### **EXPLANATION:**

- V Volume or size of the operation to be performed.
- C Units of volume carried per trip (pieces, pounds, etc.) by equipment.
- T Average expended time to accomplish a complete equipment trip cycle.
- AT Allotted time to do the job.
- R Equipment requirement.

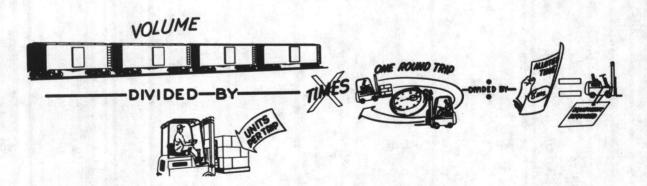


Figure 4-102. Formula to be applied in computing MHE equipment requirements.

## 4-405. Computing Pallet Requirements

a. The investment in pallets can be substantial and should be based upon definite requirements. The standard pallet is  $40 \times 48$  inches. Allowing for overhang (roughly 25 percent), the square feet occupied by each pallet is approximately 16 (4 ft  $\times$  4 ft). If height permits stacking four pallets high, four pallets are required for each 16 square feet of net usable floor space.

b. Not all space is usuable. Roof supports, aisles, mechanical equipment required for the building and other structural losses reduce the gross space to

net usable space which should be the basis for computing pallets.

c. Percent of occupancy is another consideration. Assuming a goal of 85 percent occupancy of net space is a target, the following is an example use of the formula shown in figure 4–103.

Compute the pallet requirements for 100,000 gross square feet of storage space, 70 percent net usable and 85 percent occupancy with stacking four pallet high.

$$R = \frac{(100,000 \times .70 \times .85)}{16} \times 4 = 14,875 \text{ pallets}$$

## DETERMINING PALLET REQUIREMENTS

$$FORMULA - \frac{S \times H}{D} = R$$

#### **EXPLANATION:**

- S Net covered storage area, in square feet used for bulk storage.
- H Average stacking height in such storage areas expressed in pallet courses (pallet loads).
- D Square feet of floor area occupied by a pallet as determined by pallet size with 25% added to compensate for load overhang and clearance.
- R Quantity of pallets required.

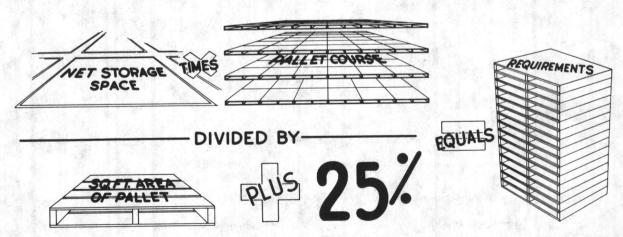


Figure 4-103. Formula for computing pallet requirements.

## 4–406. Considerations in Requirements for Fixed Equipment

a. Under certain operating conditions, fixed equipment constitutes the most economical means of material movement and should be utilized to the maximum extent practicable. In order to be able to compute requirements for fixed-type equipment, one must be thoroughly familiar with existing types and models and the conditions under which they provide the most efficient materials handling.

b. There is no set formula for computing requirements for fixed-type equipment. It is the responsibility of the storage managers to determine when and where the installation of fixed equipment will offer greater advantage than mobile types, and the particular type and characteristics which will best perform the desired handling at the desired speed.

c. While there are no common mathematical factors applicable to computing fixed equipment requirements, there are certain other factors which help determine the practicability of fixed equipment installation:

(1) A repetitive and somewhat continuous flow of material to, from, or through a common point or fixed path, i.e., processing, packaging and packing lines, baling operations, segregation lines, etc.

(2) Restricted operating space or other condi-

tions which do not permit the maneuvering of mobile equipment.

(3) The operation being performed requires separate handling of individual units or packages.

(4) Multifloor storage areas.

d. An area where fixed equipment is serving well is shown in figure 4–104. The absence of such equipment would require support from mobile equipment which would serve less satisfactorily. Fixed equipment offers constant service at unvarying capacity. In use of mobile equipment the operation is dependent on the equipment arriving at a balanced time cycle. When either the mobile equipment cycle is interrupted or the operation flow fluctuates, production complications can result.

## 4-407. Fleet Management

a. Definition. Fleet Management as distinguished from operational use of MHE encompasses overall determination of quantitative requirements at installation level, analysis of fleet utilization to determine effectiveness of the materials handling program, remedial action as required, proper maintenance for all MHE, and efficient distribution of MHE to job sites from a central control point.

b. Post analysis. A post-analysis of both requirements and utilization by using activities and at in-

# DON'T OVERLOOK ADVANTAGES OF FIXED EQUIPMENT

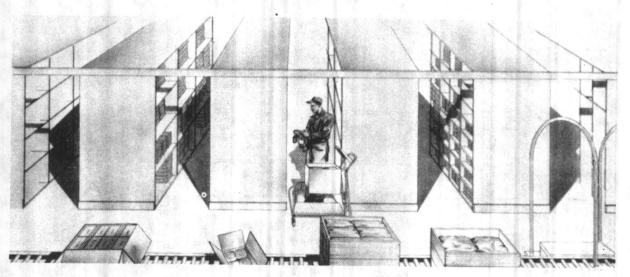


Figure 4-104. Fixed active roller conveyor line serves to good advantage in package transfer.

15 September 1979 DOD 4145.19-R-1

stallation fleet management levels will verify the adequacy or inadequacy of total fleet, pinpoint activities that constitute problem areas in materials handling utilization, and indicate the type of remedial action required. In each case proper analysis will result in an improved materials handling program, a close alinement of quantitative ceiling with workload volume, and a fleet complement containing the proper ratio of equipment by type and capacity necessary to accomplish supply movement.

c. Maintenance. Scheduled preventive maintenance, fleet population sufficient for replacement of equipment undergoing maintenance, and an effective program of first echelon maintenance by operators will result in a compact working fleet without the necessity of maintaining extra equipment which is in reality "excess" equipment. Maintenance should be performed in such manner and with such dispatch as to preclude the growth of a theory that "I need one piece of equipment but must order two due to the possibility of breakdown." Figure 4–105 emphasizes where the value of equipment is gained.

#### d. Distribution.

(1) In many operational areas the period of requirement for MHE service constitutes only a small part of the day. Under such circumstances, rather than the assignment of an equipment item for the full day, it is better practice to have the equipment

reported as being available for use to a central control office in order that further profitable dispatch can be accomplished. The office exercising control of equipment should maintain a means to visibly illustrate the location of equipment currently in use as well as unassigned equipment available for immediate dispatch. Such an aid for the control of equipment by location and using activity is illustrated in figure 4–106.

(2) Efficient control will generally result in strategic placement or dispersal of equipment. Equipment should be moved as required to satisfy operational demand as determined by workload conditions. Normal dispatch of equipment to user is for the accomplishment of a specific job; therefore, when the operation is completed, the equipment should become available for other use. However, this does not preclude the assignment of equipment, as required, to operations which need equipment periodically throughout the entire day. In each instance administrative control of equipment should remain vested in a central office responsible for MHE.

## e. Reports and reports procedure.

(1) With due consideration to the fact that MHE is a service to the operations being performed and the full potential from each piece of equipment cannot be expected, a generally acceptable method

## EQUIPMENT - WHERE IS IT?



Figure 4-105. Equipment that is not producing is not "paying its way." Minimize "out of use" time.

for analyzing equipment utilization and fleet quantity is the conversion of overall fleet activity to hours of operation expressed as a percentage of the utilization potential during an 8-hour work period. Each service has published instructions which represent minimum utilization expectations from the basic type of mobile powered MHE.

- (2) The procedure outlined below provides a suggested means for the compilation and reporting of data pertaining to the utilization of powered MHE.
- (3) The agency charged with the administration of the installation concerned is responsible for the allocation of powered MHE in accordance with the needs of each installation, for providing technical supervision and guidance in equipment utilization, and initiating remedial action where appropriate.

There should also be a central office of control, designated above installation level, who can—

- (a) Monitor the program for the reporting of MHE utilization.
- (o) Consolidate and analyze the data obtained from the reports.
- (c) Prepare a consolidated summary report of MHE utilization as required.
- (4) Each supply installation, in the discharge of assigned mission, is responsible for obtaining maximum efficiency in the operation of MHE. To accomplish this, compiled operating data must be detailed enough to furnish installations with utilization records by using units and still allow for recapitulation on a broader scale to furnish data to higher echelons. By so doing the information compiled can be used at any management level and the

USING UNIT #1	4-144	4-144	4-144	4-144	4-100	4-100														
Andrew State of the Control of the C	430	437	443	446	532	538												110		
USING UNIT # 2	4000 09P 31	4000 DBP 44	307	4-144		4-144	419		4-144	4-144	4-144	4-100 534			1					
USING UNIT # 3	4-144	4-144 491	4-144	4-144	4-144	4000 88P 40	4000 98P 46	4000 per 52	4000 DBP 53	4000 DBP 55	4000 08P 57	4000 08F 58	4000 DBP 72	7800 DBP 95	7500 08P 96	304	2-144 305	E-144 313	No.	417
USING UNIT 4	4000 08P 25	4000 00P 39	4000 99P 56	7500 00P 93	2-100	412	461	6-168	6-168	8-210 803	CAME	CRAME								
USING UNIT * 5	4000 pap 21	4000 DBP 32	4000 DBP 41	4000 DBP 43	4000 DBP 45	4000 DBP 47	4000 DBP 73	2-100	4-144	4-144	4-144	1000	433	4-144	4-144	4-144	2 7 5 5 5	4-144	4-144	
USING UNIT * 6	4000 08P 26	4000 08P 29	2-144 310	4-144	4-144	4-144 429	4-144	4-144	4-144	4-100 524	4-100 525									
USING UNIT *7	400° 09P 48	4000 DBP 75	2-144	4-144	4-144	4-144	4-144	4-144	4-144	4-144	4-144		4-100		18-210	15-210				
USING UNIT *8	2-100 200	4-144	4-144 418	4-100 542	611	6-162 624	GRANE	600												
using unit * 9	4000 DBP 24	4-100 535	4-100 539					i												
USING UNIT * 10	4000 DBP 20	4000 DBP 71	2-100 204	2-144 303	2-144 3/1	4-144		4-144	4-144	機能的	16-210 804									
USING UNIT # 11	4000 DBP 51	4-144 404																		
MAINTENANCE	4000 BBP 50	4000 DBP 59	6-160 6-26																	
UNASSIGNED	4000 DBP 42	4000 08P 74	7500 DBP	2-144 301	2-144 302	2-144 306	2-144 309	4-144	4-104		18-210 801		GRANE							

Figure 4–106. Typical MHE control board. Removable cards identify, by number each piece of equipment and the characteristics of the piece. Using units may represent any operational breakdown most suitable to exercise effective fleet control.

## WHAT A MHE UTILIZATION REPORTING SYSTEM MEANS

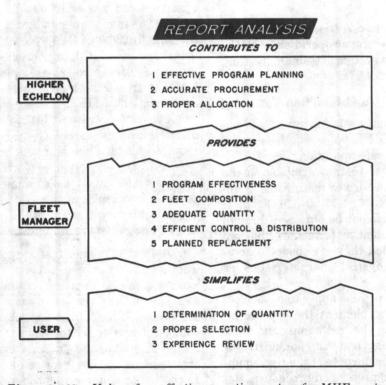


Figure 4-107. Value of an effective reporting system for MHE equipment.

analysis and the application of the information so gained will result in an effective materials handling program and establishment of materials handling fleet quantities at a level required for normal operations. Figure 4–107 illustrates areas of benefit.

Data should be compiled within each installation in the office responsible for the assignment of equipment from vehicle and equipment operational records, and maintenance shop records.

## Section 5. ON THE JOB TRAINING COURSE FOR OPERATORS OF MHE

선택하고 있다면 되었다. 그는 그는 그 그는 그는 그를 가게 하고 있다면 가장 가장 하는 것이다. 그렇게 되었다.	Paragrap
Purpose	4 501
Vision, hearing, and reaction tests	4-502
Physical examination	4-503
Instructions on types of equipment	4-504
Fundamental operational instructions for fork truck	4-505
Advanced training in fork truck operation	
Fundamental operational instructions for industrial tractors	4-507
Course in operation of industrial tractor-trailer trains	4-508
Operational instructions for truck, straddle carry (or gantry trucks)	4 500
Operating rules	4 510
Examinations for fork trucks	4-511
Examinations for other equipment	4-512
Grading examinations	4-513
Temporary permits	4-514
Additional on-the-job training	4-515
Permanent operator's permit	4-516
Renewal	
Preparation of additional training courses	4-517

## 4-501. Purpose

The purpose of this section is to provide guidance to train personnel in the proper operation of MHE. The guidance provides a system of training, testing, and licensing of personnel.

## 4-502. Vision, Hearing, and Reaction Tests

a. These tests (properly administered) will ensure that operators of MHE possess at least minimum requirements for safe operation.

b. Equipment for these tests is available in the Federal supply system as driver testing and training device, portable (NSN 6930-00-526-3639). If the testing equipment cannot be obtained through supply channels, equivalent materials may be constructed locally, provided they are made to accurately measure the physical characteristics as prescribed (fig. 4-108).

c. The following instructions apply to measuring physical abilities and supplement the specific instructions accompanying the test equipment.

(1) Before giving any test, the administrator of the test must know the purpose of the test equipment to be used and the prescribed procedure. He/ she should conduct a number of trial tests to become familiar with the test equipment.

(2) Prior to each test, he/she should explain the purpose and what the examinee is expected to do. Upon completion of testing, any physical limitations of the examinee should be explained and the compensating measures the examinee may take should be emphasized.

d. A visual acuity test determines whether the

examinee can see well enough to operate MHE safely. The minimum standard is visual acuity correctable to 20/30 in each eye. An individual whose visual acuity is 20/40, or poorer, will be referred to the installation medical examiner for decision on whether or not the individual's vision is sufficient for operation of MHE. Persons with sight in only one eye can operate industrial tractors in open areas, but not in warehouses. Sight in both eyes is required for handling ammunition and explosives.

e. A depth perception test, which is optional, determines how well the examinee can judge distances. The results of this test, if given, are used in counseling and training of the operator, although there is no minimum standard.

f. A field of vision test is given to determine whether the examinee can see to each side while looking straight ahead. A lateral range of 75° on each side of the focus line is the minimum standard acceptable. If the standard is not met, the examinee will be referred to the installation medical examiner for determination as to whether the individual's lateral vision is sufficient for safe operation of MHE. In the event an instrument is not available to test field of vision, a pencil can be used in this manner: have the person being tested look at an object straight ahead while the examiner, standing beside the person being tested and holding a pencil at eve level over the right or left shoulder, moves the pencil forward until the person can see it out of the corner of his eye. The angle at which the examinee first sights the pencil is noted. (Straight ahead is 0°.) Repeat for each eve.

- g. A color perception test determines whether the examinee is colorblind. The examinee will not necessarily be disqualified as an operator of MHE because of colorblindness. However, if there is any indication of colorblindness, the examinee will be given information on traffic lights, observation of other traffic, etc., which will enable the individual to operate MHE safely. For those activities lacking a colored light signal device, this test may be conducted by either the colored yarn test or color cards.
- h. A reaction time test (eye to foot) measures how quickly an examinee's foot can be moved in response to driving conditions. Reaction time up to and including .60 second is acceptable.
- i. A hearing test determines whether the examinee can hear well enough to operate MHE safely. The examinee should be able to hear conversation, spoken clearly and in a moderate tone, from a distance of 20 feet.

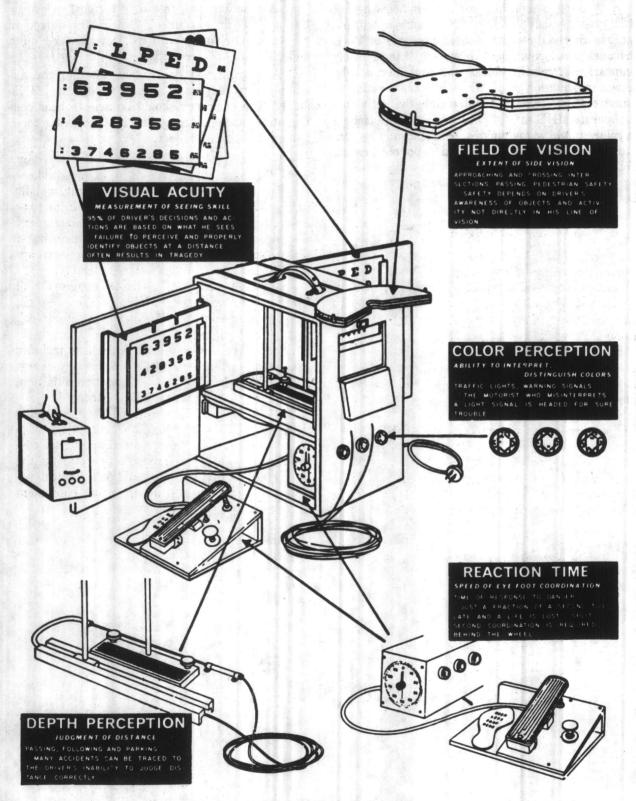


Figure 4-108. Driver testing and training device.


## 4-503. Physical Examination

- a. The physical condition of all trainees must be such that, in the opinion of the installation medical examiner, they are capable of performing their duties.
- b. Amputees in good physical condition are acceptable as operators, when in the opinion of the installation medical examiner, they can perform in accordance with the physical requirements as established by the installation. The examination report will include a justification statement as to why the missing limb will not present a safety hazard.


## 4-504. Instructions on Types of Equipment


- a. Preparation. A classroom should be provided. Illustrations for applicable types and makes of equipment should be obtained. The illustrations can be of a size to be displayed to the entire class or may be smaller in size and be distributed to each trainee. These illustrations should show not only exterior views, but also cutaway views showing interior mechanism to be described by the instructor. Other visual aids, such as models, motion picture films, sound film strips, safety posters are extremely helpful.
- b. Discussion topics. Classroom instruction should cover the following;
- (1) Discussion of the fork truck and its relationship to the palletization of material, including the placement of material in storage, and the principles, handling methods, and procedures involved.

- (2) Discussion of the fork truck and its uses as compared to those of other types of MHE, such as industrial tractors, tractor-trailer trains, cranes, industrial trailers, gravity conveyors, power-driven belt conveyors, hand trucks, pallet trucks, railroad cars and other commercial vehicles.
- (3) Discussion of the operating performance, operating parts, and the maintenance program of fork trucks, both gasoline and electric. All differences between the types of machines occasioned by a different power source should be emphasized.
- (a) Mechanical construction, weight, weight distribution and ability to carry a load, turning radius and principle, pivot or turning point, fork types, mast construction and operating principles. Figure 4–109 illustrates and explains the terms applicable to the forklift truck mast assembly.
- (b) Operating parts, such as gauges for oil and gasoline, ammeter, ignition, brake, clutch, starter, speed control, directional travel control, steering, boom lift, and tilt controls;
- (c) Maintenance program, which includes regular and periodic servicing (or battery charging), washing, lubrication, cleaning, tire condition, hydraulic system (if any) and painting.
- (4) An explanation of the results of misusing fork trucks. This could include an exhibition of worn and broken parts to illustrate the additional cost incurred as a result of improper operation of the equipment. The instructor should point out the additional dangers involved in operating equipment which has been damaged by misuse.

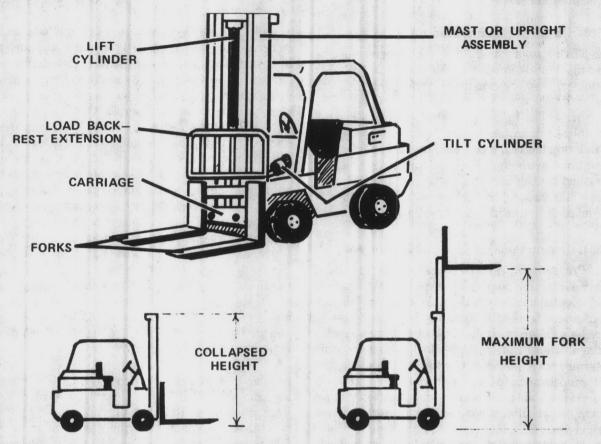

A. THE <u>COLLAPSED HEIGHT</u> IS THE DIST— ANCE FROM THE FLOOR TO THE TOP OF THE MAST WHEN THE FORKS ARE IN THEIR LOWEST POSITION.





C. THE <u>OVERALL EXTENDED HEIGHT</u> IS THE DISTANCE FROM THE FLOOR TO THE TOP OF THE LOAD BACKREST EXTENSION WHEN THE MAST IS FULLY RAISED.



D. FREE LIFT IS THE DISTANCE THE FORKS MAY BE RAISED BEFORE THE COLLAPSED MAST HEIGHT IS INCREASED.

Figure 4-109. The mast or upright is the elevating assembly of a forklift truck.

- (5) Review of savings effected by the use of mechanical equipment. The review should emphasize the saving of time in delivering needed supplies, earlier release of railroad equipment, saving of space by increased stacking height and more compact storing of material.
- (6) Discussion of safe loading practices, as outlined below;
- (a) Safe load. Overloading of fork trucks is strictly prohibited. The truck will safely lift and carry no more than its rated capacity. Among the dangers of overloading are the possibility of injury to the operator, damage to the cargo, damage to the pump and lift mechanism and excessive wear on the tires, engine, or electric motor.
- (b) Determination of safe loading. A fork truck will tip forward if the load on the forks exceeds the lift capacity of the truck. The manufacturer has established the truckload rating (expressed in pounds of load on the fork) and the allowable distance in inches from the heel of the forks to the center of gravity of the load. This distance is known as the load center.
- (c) Some manufacturers specify a number of pounds capacity with a particular length of load. Others specify a number of pounds capacity at a given number of inches from the heel of the fork. Some give an inch-pound rating based on the distance of the load center from the heel of the fork, while others base their inch-pound rating on the distance from the center of the load to the center of the front axle.
- (d) When a load is uniformly distributed throughout the length; that is, parallel to the prongs of the fork, the center of gravity will be located at half such length. When a load is not uniformly distributed throughout the length, care must be taken to determine the distance from the heel of the forks to the accurate center of gravity.
- (7) Explanation of the details of warehousing procedures. The instructor's lectures should include a discussion of warehouse aisle widths, selecting and storing stock, methods of palletizing and stacking, fire aisles, alarm boxes, and sprinkler systems.
- (8) Explanation of the appropriate OSHA requirements applicable to safe operations.

## 4-505. Fundamental Operational Instructions for Fork Truck

a. Preparation. One fork truck should be provided for every two students. All fork trucks will

be equipped with overhead guards. The area selected for training should be level, with paved surface, and should be free of other traffic.

- b. Review of previous instructions. Instructions should include a review of previous classroom discussions on the various controls, preventive maintenance, warehousing procedures, stacking methods, and safety rules pertaining to the operation of fork trucks.
  - c. Operational condition of vehicle.
- (1) Before taking his/her place on the truck, the trainee will be instructed to check the following:

Gasoline.

Water.

Oil.

Tires.

Fire extinguisher (when truck is so equipped). Security of forks.

(2) After mounting the truck, the trainee will check the following:

Horn.

Parking brake and foot brake.

Position of gear shift lever (should be in neutral).

- d. Instructor's demonstration. The instructor should demonstrate to the entire class how to operate the machine forward and backward. The trainees at this point should be cautioned against traveling with the foot resting on the clutch pedal ("riding the clutch") as this results in the loss of tension in the clutch springs, allowing the clutch to slip and causing excessive wear. The instructor should take particular care to explain that forks should always be raised just high enough for safe clearance, yet low enough to permit a clear view ahead when traveling either with or without a load. If the load's size obstructs the operator's forward view, he/she should drive the fork truck in reverse.
  - e. Trainee's practice.
- (1) Basic operation. The trainee should now drive the machine in a straight line forward and backward. The next operating practice should be circles or figure eights, performed at reduced speed. The instructor should closely observe the trainee as he/she performs these maneuvers.
- (2) Obstacle course. After the trainees have performed the basic maneuvers, the instructor should have them set up an obstacle course constructed of empty pallets. The pallets should be placed on edge in a straight line and so spaced as to allow a fork truck to pass freely between them

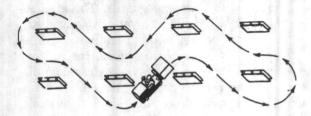


Figure 4-110. Obstacle course for operato, training.

(fig. 4-110). In traveling over this course, the fork truck weaves in and out between the pallets. Each trainee should traverse this course until he/she has become proficient in moving between the pallets in free, easy curves. As each trainee performs, the instructor should emphasize the danger of sudden stops and starts or turns with the fork truck. Sudden starts and stops may cause the pallet loads to upset, thus endangering the safety of personnel and probably resulting in damage to the material. All turns should be made as gradually as possible. Long, slow turns allow the operator to gauge distances and accurately place loads without loss of time. Spotting loads in the warehouse is a maneuver which requires extreme accuracy. Adequate time should be allowed for the trainee to practice these maneuvers before proceeding with further instructions.

(3) Operation in aisles. The next step in the training course should be the operation of the truck in aisles. First, empty pallets are arranged to form aisles of a width normally used at the installation for the size of equipment used for training purposes with corners and intersecting aisles as shown in figure 4-111. The trainee should operate the fork truck up and down the aisles, both forward and backward. If two fork trucks are available, two trainees should perform this operation at the same time, thus learning to pass in aisles (fig. 4-112). Each trainee should then practice all that has been learned to this point. After an adequate practice period, the instructor should make a careful evaluation of the performance to date to determine which trainees are to be eliminated, retained, or given advanced training.

## 4-506. Advanced Training in Fork Truck Operation

a. Load handling demonstration. The next period of instruction (before the trainee operates the

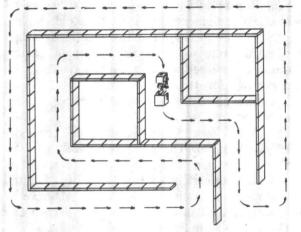


Figure 4-111. Practice aisles set up with empty pallets.



Figure 4-112. Experienced operators passing in an aisle.

machine with pallets) covers the following load handling operations in the sequence given:

(1) Approaching a pallet (fig. 4-113). Aim the forks of the truck to enter between the top and bottom boards of the pallet, at an equal distance from the center stringers.

(2) Inserting forks. The forks of the truck should be inserted into the pallet as far as they will go. It is important that the operator have the load as close to the heel of the fork as possible.

(3) Lifting and moving the pallet. The trainee should be instructed how to apply the lift control

15 September 1979

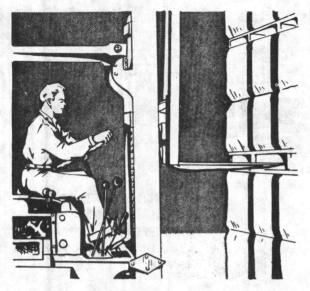


Figure 4-113. Approaching a pallet. Forks must enter at an equal distance from the center stringers.

to lift the pallet from the floor, apply the tilt control to tilt the mast back and then apply the travel controls to move the machine forward or backward.

- (4) Lowering the pallet. The trainee should be shown how to lower the pallet to the floor and then tilt the mast to a vertical position so that the forks can be removed easily.
- (5) Using the mast tilt. Demonstrate how the tilt is used to—
- (a) Lean the load against the back rest for stability during movement.
  - (b) Position loaded pallets during stacking.
  - b. Load handling maneuvers for trainees.
    - (1) Lesson one
- (a) The trainee lifts a pallet load with the fork truck and, after making a turn around the training area, spots the load on a right angle drawn on the floor (fig. 4-114). One swing is all the maneuvering that is permitted to place the load. The instructor should demonstrate each operation before turning the fork truck over to the trainee. Upon completion of a maneuver by the trainee, the instructor should point out those actions that were performed correctly and make appropriate comments on those that were not. In the problem of spotting a pallet load at a right angle in one maneuver, the instructor will point out that extra backing and shifting causes the greatest loss of time in fork truck operation. If operators are trained to spot a load on the first approach, this time loser

will be eliminated. The one-swing maneuver is accomplished by having the eye follow the path of the drive wheel on the inside of the turn. As the center of pivot of the machine lies on the line formed by the drive axle, it is obvious that the drive wheels are the key to the actual spotting of the load. After several attempts, each trainee should be able to spot a load on the right angle with no more than 2 inches of lost space.

(b) The next step is to spot a pallet load adjacent to another. This also must be performed in one swing of the machine. The fork truck approaches the stack (pallet load on the floor) by crossing in front of the stack rather than by approaching from the opposite side toward the stack (fig. 4-115). If the stack is approached from the opposite side. the pallet load will move away from the stack when the fork truck is turned to set the load down, leaving as much as 6 inches lost space. By crossing in front of the stack—the correct way—the load will travel toward the stack with no loss of space. It should be observed that in this position the fork truck is turning to straighten out the load. When the fork truck turns, the back of the truck moves to the right and the load to the left and the load can be spotted directly in line with the stack, with no loss of space. Test refers to truck B coming from left (fig. 4-115).

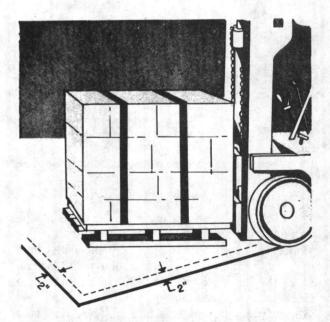


Figure 4-114. In one maneuver the trainee spots a pallet load on a right angle drawn on the floor. This must be done with no more than 2 inches of lost space.

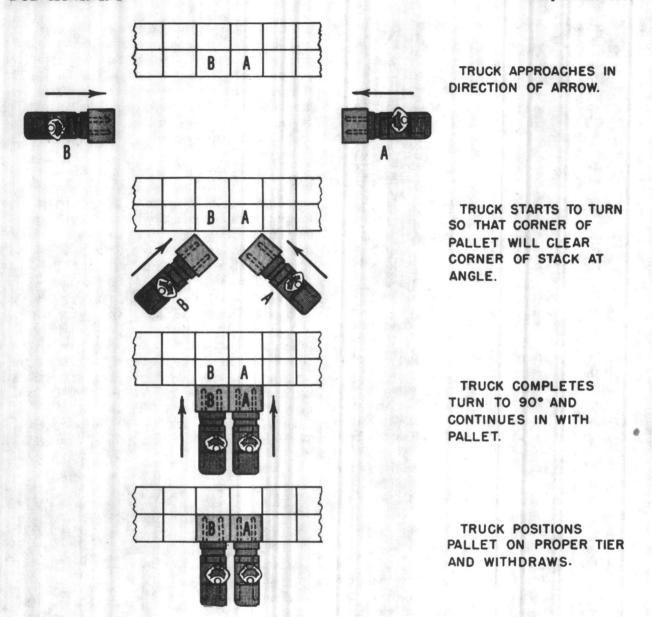


Figure 4-115. After crossing in front of the stack, the operator spots a pallet load adjacent to another.

#### (2) Lesson two.

(a) This lesson is designed to acquaint the trainee with the fundamentals of tiering. The trainee is shown how to tier first one pallet load upon another and than place a double pallet load on top of the first two with an error of no more than 2 inches in any direction (fig. 4–116). Raising a load into position for stacking while the fork truck is in motion is forbidden. Such a practice is dangerous because it obscures the operator's view while traveling in a forward motion. The performance of two

simultaneous operations (steering and lifting) endangers safety and limits operating efficiency. Operators should bring the machine to a stop up close to the stack before raising the load to tiering position (fig. 4–117).

(b) The next step pertains to the tiering of a double pallet load adjacent to the stacks. This should also be accomplished with one swing of the truck and with an error of not more than 2 inches on any side. In carrying double pallet loads, the truck is operated in reverse so that the operator

15 September 1979

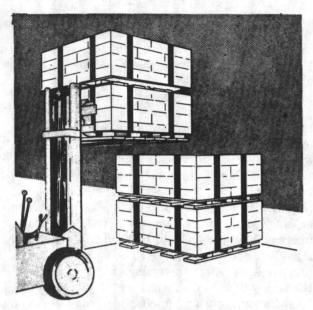


Figure 4–116. A double pallet load must be tiered with an overhang of no more than 2 inches in any direction.

will have an unobstructed view. A fork truck has the same speed in reverse motion as it does in forward motion. At this point the trainee can be instructed in the proper method of operating loaded fork trucks up and down ramps. A loaded truck, moving in a forward direction, can negotiate a slight downward grade (not to exceed 5°) safely when the mast is tilted back. However, a loaded fork truck will be driven up in forward motion and down in reverse motion on all ramps.

#### (3) Lesson three)

This lesson is a continuation of the trainee's practice in tiering pallet loads. In the previous lessons, there was no limit to the radius of turn permitted the beginner. To get the feel of the truck and to accustom his/her eye to its travel, he/she was allowed unlimited space for maneuvering. Now, however, warehouse aisles should be simulated by the placement of pallet loads in two straight lines. The two stacks should be placed to form an aisle 14 feet wide. The trainee should now be instructed to do the same tiering done in the previous lessons in this limited aisle space. As the trainee progresses, the aisle width can be reduced to the width normally used at the installation.

#### (4) Lesson four.

This lesson is deisgned to teach placement and handling of loads in limited spaces. The trainee should

now be ready to place a pallet load between two other pallet loads with only ½-inch clearance on either side of the load (fig. 4–117). This is to be accomplished without stopping the fork truck. For the first few attempts, additional clearance may be provided. In the next operation, the trainee makes a similar maneuver, except that he/she turns off a 14-foot warehouse aisle and into another aisle which is not more than 4 inches wider than the pallet load. Since the space is only an inch or two wider than the pallet load, the truck's line of approach must be at a right angle to the line of stack. Making this turn from a 14-foot aisle requires considerable practice, and the trainee should completely master this maneuver before going on to the next lesson.

#### (5) Lesson five.

This lesson is a continuation of lesson four. The trainee is required to back through the space between two pallet loads with only 1-inch clearance on either side of the load. It is a difficult maneuver and must be performed often in warehousing operations. The trainee must learn that, as the fork truck is traveling backward, he/she must give equal

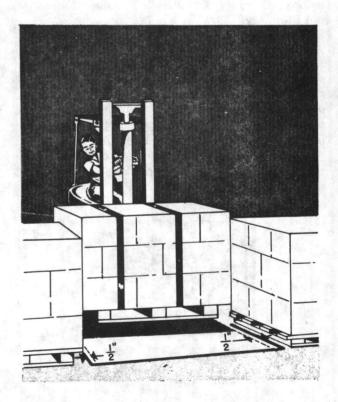


Figure 4-117. The trainee must be able to take a pallet load between two other pallet loads with only ½ inch clearance on either side.


attention to both the rear of the machine and to the pallet load, which are in opposite directions from the operator. In backing into the space, the operator should look to the rear to make certain that the fork truck will be properly centered. He/she then looks forward to assure proper pallet clearance. In this exercise of driving between pallet loads, the operator of a fork truck that has the seat on the left side should never be concerned with the right side of his/her load once it is certain there is sufficient clearance. Conversely, on trucks which the operator drives from the right side of the machine, he/she will give attention to the right side of the pallet load. On seated center control trucks, he/she can give attention to either side.

(6) Lesson six.

This lesson is designed for final examination of the trainee. Standard warehouse conditions are simulated as nearly as possible in the training area and the trainee will tier and untier a set of pallet loads according to the rules learned in the previous lessons. Tiering eight pallet loads on a run of about 100 feet should be done in approximately 12 minutes before the trainee is qualified for an operator's permit (fig. 4–120).

(7) Lesson seven.

(a) A course in railroad carloading will be given to those trainees selected for these lessons. A preliminary to the course should be a short talk on the subject. The trainees than should be taken to a loading or unloading operation so they may observe the procedure (fig. 4–119). The function and use of bridge plates should be pointed out and the method of securing and moving them should be explained.



(b) For practice in operation, a boxcar doorway, bridge plate, and boxcar wall should be marked out in the practice area by means of pallets (fig. 4–120). The trainee should demonstrate the ability to drive in and out of a boxcar in the practice area before proceeding to an actual boxcar. After proving capable, the trainee should be taken to a location where he/she can drive in and out of an empty boxcar with no load on the forks except an empty pallet.

(c) Following this practice, the trainee should be taught to place 40 by 48-inch pallets for unit load shipment in a standard boxcar floor layout marked on the practice area floor. Actual pallet loads of unbreakable goods should be used if possible and a half car should be worked two tiers high in the practice area. After the trainee has demonstrated the ability to unload a boxcar on the practice floor, he/she should unload merchandise from an actual car in a fairly quiet location under the supervision of a competent operator.

(d) Instruction in actual car loading should include the following:

1. Bridge plate placement. Make certain the bridge plate between the boxcar and the loading platform cannot slip or slide. It should be securely fastened to prevent accidents. Inspect car floors to be sure the floor is strong enough to carry the combined weight of the truck and its load.

2. Necessity for caution. When entering or leaving the boxcar, the fork truck operator should drive over the bridge plate slowly and carefully—especially when loading. Fast operation at this point can cause accidents and damage. A fork truck with two or more speeds should always be operated in low speed when entering or leaving the



Figure 4–118. Typical floor pattern. Proper stacking procedure is shown at left. The numbers indicate the sequence in which columns are stacked. Sequence for the removal of pallet loads is shown at right.



Figure 4-119. Loading a freight car.

boxcar with a load. By keeping the truck in low speed, the operator will be less likely to slip the clutch, thus preventing undue wear on clutch lining and facings. Boxcars are not always level with the loading platform. Sometimes they are higher, sometimes lower. This irregularity effects the method of loading and unloading with the fork truck. The following are considered good practices:

a. If the boxcar is level or higher than the platform, the operator should drive FORWARD INTO THE BOXCAR WITH THE LOAD AND DRIVE OUT BACKWARDS.

b. If the freight car is lower than the unloading platform, the operator should BACK IN WITH THE LOAD AND DRIVE OUT FORWARD.

3. Handling loose containers. When unloading loose containers, the operator should place the pallet as near to the boxcar door as possible, with fork entries placed in the proper position for

easy pickup by the fork truck. Commodities are removed from the doorway first and palletized outside of the boxcar. After a sufficient number of containers have been removed, the remainder can be palletized on the boxcar floor. Again, care should be exercised to see that the fork entries are in the proper position. When containers in the center section of the boxcar have been removed, the unloading should continue towards the ends of the car. Pallets can be loaded at each end of the boxcar simultaneously. In such an operation, the fork truck operator should take the pallets first from one end and then the other, alternately.

4. Handling palletized loads. If the loads in the boxcar have been shipped palletized, the fork truck operator can work directly into the car and bring out one load at a time. In this type of operation, it is sometimes possible to have two trucks unloading the same boxcar without interfering with each other.

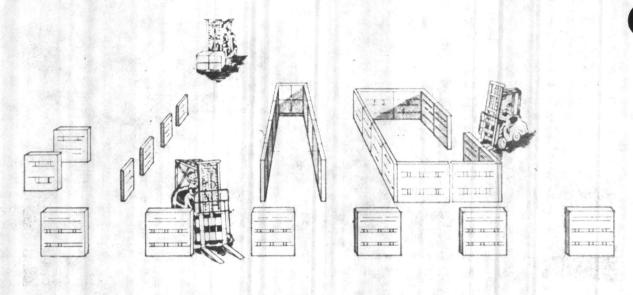


Figure 4-120. Practice area for carloading operations.

- 5. Handling large items. The following is a suggested procedure for the loading of large cases that have been stored on short dunnage.
  - a. Drive the loaded truck into the box-

car.

four.

- b. Place the case in the desired position.
- c. Set the case down on a two-by-four to permit the forks to withdrawn.
- d. Withdraw the forks of the truck to within about 2 inches of the edge of the case.
  - e. Lift slightly to withdraw the two-by-
- f. Set the load on the floor of the boxcar and back the truck away.

This procedure is reversed for the unloading of large cases from boxcars.

## 4-507. Fundamental Operational Instructions for Industrial Tractors

- a. Preparation. In beginning the course on the operation of industrial tractors and tractor-trailer trains, the instructor should show the same film as shown for fork trucks, and should make the following preparations.
- (1) Provide one piece of equipment for every two students. The same training area, maze and obstacle course, as used for training fork truck operators can be utilized (fig. 4–110).
- (2) Provide, if possible, one or more tractors representing each model used at the activity for the

appropriate periods of instruction. If two or more types are equipped with identical controls, only one example of these types will be necessary. As mechanical operation of the tractor is all that is to be explained during the preliminary period, it is not necessary to have the trailers available.

- (3) Point out to the trainees that operating a tractor is similar to driving an automobile. Functions of controls and preventive maintenance checks should be explained in the same manner as for fork trucks.
- (4) Before mounting the truck, the trainee will be instructed to check the following:

Gasoline.

Water.

Oil.

Tires.

Fire extinghisher (when truck is so equipped). Coupling.

(5) After mounting the truck, the trainee will check the following:

Horn.

Parking brake and foot brake.

Position of gear shift lever (should be in neutral).

- (6) Explain in detail the differences between the operation of electric-driven tractors and gasoline-driven tractors.
  - b. Elementary driving.
    - (1) Instructor's demonstration. Elementary

driving instructions should be given on a four-wheel tractor. Sitting beside the instructor on an auxiliary seat provided for the purpose, the trainee watches as the instructor performs and explains each phase of the operation. The initial drive should include several starts and stops. After several maneuvers, the instructor will ask the trainee to tell how to operate the controls.

(2) Training operation. After the instructor is confident the trainee can handle the tractor safely, he/she permits him/her to operate it. The instructor should closely observe the trainee make solo maneuvers around the training area. When the trainee has stopped, the instructor should point out any errors that were made in operation.

#### c. Obstacle course driving.

- (1) Instructor's demonstration. After each trainee has satisfactorily completed the solo ride, the instructor drives over the obstacle course to demonstrate the proper method of maneuvering the tractor over this course.
- (2) Trainee operation. The trainee then takes control of the tractor and drives over the obstacle course, stopping to set up any pallets he/she knocks over. The instructor watches closely as the trainee drives and discusses the good and bad points of each trainee's operation. The trainee should drive over the obstacle course as many times as the instructor thinks necessary.

## 4-508. Course in Operation of Industrial Tractor-Trailer Trains

a. Preparation. Since the principal use of the tractor is to haul trailers, the instructor's next step is to demonstrate the operation of a tractor-trailer train. A sufficient number of trailers for this demonstration should be added to the equipment being used in the training area.

#### b. Elementary driving.

(1) Instructor's demonstration. The instructor should couple together a tractor-trailer train of the maximum length permitted by local activity rules. He/she first drives it straight forward and then in long sweeping curves to demonstrate how each trailer turns in a smaller radius than the one preceding it. He/she further demonstrates by operating a train of appropriate length over the obstacle course. Also, the instructor should operate a train in aisles established by pallets set on edge in the training area to show how, in making a sharp turn,

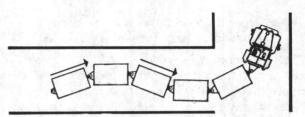


Figure 4-121. Right way to turn corners with a tractor-trailer train.

it is necessary to veer to the right before turning to the left and vice versa (fig. 4-121).

- (2) Trainee operation. After the instructor's demonstration, each trainee should haul first one empty trailer, then two, and so on—adding one at a time until the maximum number permitted is reached. Each trainee should practice maneuvering a train of the maximum length permitted, repeating the maneuver practiced with the tractor itself. That is, the trainee should first practice starting, stopping, and turning in a clear space first with one trailer, and then with several. Then, he/she should operate the train through the maze and the obstacle course.
- c. Driving loaded trains. Before starting, the trainees should inspect each trailer to see that it is properly loaded. A smooth, slow start is essential when the tractor is pulling a loaded trailer train. The trainee should be instructed to:
- (1) Drive on the right side of aisle to permit other tractors or trucks to pass.
- (2) Slow down when approaching a corner and, in turning swing wide to allow for the clearance of the last trailer.
- (3) Stop and shift into the lowest gear before going up or down a ramp; do not shift into higher gear until the entire train has cleared the ramp.
- (4) Learn to properly position and park the trailer train perfectly on the first try since the train cannot be backed into position.
- (5) Always park the train at the side of an aisle, leaving as much aisle space as possible for other traffic.
- (6) Execute a smooth, slow stop so that the trailer loads are not jarred.
- d. Uncoupling tractor-trailer trains. After the tractor-trailer train reaches its destination, the tractor should not stand idle while the trailers are being unloaded. Instead, the operator should uncouple the tractor from the trailers, pick up the previously unloaded trailer train and return again to pick up a loaded train.

## 4-509. Operational Instructions for Truck, Straddle Carry (or Gantry Trucks)

- a. Preliminary instructions. At the beginning of the course, the instructor should display and discuss appropriate illustrations of the straddle truck. Before starting the equipment, the instructor should point out to the trainee the necessity and method of checking gasoline, water, oil, tires, battery, parking brake and foot brake, drive chains, position of hoist shoes, lights, horn, position of gear shift lever (should be in neutral), and position of hoist lever (should be in neutral).
- b. Instructor's demonstration. The instructor should now demonstrate to the trainee how to drive forward and backward.
- c. Turning. The truck straddle carry is equipped with four-wheel steering. Although steering the truck when it is carrying a long and awkward load can be very difficult, the instructor should, in the preliminary instruction, merely make certain that the trainee knows the operation of the steering mechanism.
- d. Using the hoist. Because power to operate the hoist comes from the truck engine, the engine must be running while the shoes are raised or lowered. The hoist is controlled by switch buttons or by a lever, which is moved to the "raise" or "lower" position. An automatic cutout is provided to release the power and apply the brakes when the load is bound in the truck or when the shoes reach the extreme upper and lower positions. A booster level is provided to furnish additional power for the hoist when needed. If the truck is equipped with swinging shoes, the swinging action may be controlled by a separate lever or it may be automatic with the raising and lowering of the shoes.
- e. Training area and equipment. A large outdoor area should be be used as a training area for truck straddle carry operations. Because the truck is designed principally as a lumber carrier, a lumber storage yard would be ideal as a training area. The only other equipment needed will be several unit loads of lumber, placed on bolsters in such a way that they may be handled by the truck (fig. 4–122). In the handling of the load, the shoes of the truck engage the ends of these bolsters. One short and one long load should be available for use in training. The trainee practices first with the short load and later with the long one in order to gain experience in maneuvering the truck under difficult conditions.

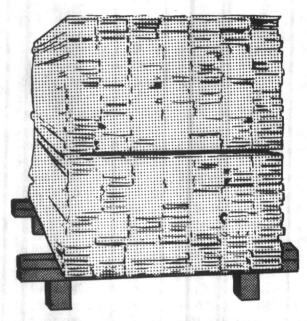


Figure 4-122. Material handled by truck straddle carry is usually stacked on bolsters.

- f. Elementary operation. Under the instructor's supervision, the trainee should start the truck properly and drive it slowly around the training area. Following the instructor's direction, the trainee should start and stop the truck, drive forward and backward, turn left and right, and maneuver it into various positions.
- g. Training with hoist. After the trainee performs the elementary operations satisfactorily, he/she should practice use of the hoist. The trainee should then practice this operation until thoroughly familiar with the use of all controls. He/she should be cautioned to abide by all safety rules governing the operation of truck straddle carry.
- h. Picking up the load. Before the truck can pick up a load, the load must be properly stacked on bolsters. This stack must not be too high or too wide for the truck to handle and its weight must not exceed the maximum capacity of the truck. Before the truck is driven over a load, the hoist shoes must be swung outward. The truck must be driven carefully over the load and stopped so that the hoist shoes are midway along the sides of the load. Then with the gear shift lever in neutral, the hoist shoes are swung into contact with the bolsters on which the load is stacked and the hoist is engaged. (If the swing of the shoes is automatic with the hoist, or if the truck has rigid shoes, the engagement of the

hoist will raise the load.) If necessary, the booster lever is used to assist in raising the load.

- i. Moving the load. When the load is securely in position, the truck may be moved either forward or backward as desired. When the load is to be carried a considerable distance, the truck should be driven forward. The truck must be driven only over solid ground. Hitting an obstruction may spill the load or seriously damage the truck. A truck carrying a load which extends ahead or behind the truck may be difficult for the trainee to maneuver. For this reason, the trainee should first practice moving relatively short loads. Also, the new operator must be cautioned not to stop the truck abruptly. A sudden stop can cause the load to slide out from the carriage and result in serious accidents.
- j. Placing the load. The trainee should next practice placing the load in various positions designated by the instructor. The truck must be at full stop before the load is spotted. Loads must never be dropped to the ground, but must be lowered gradually under power. If the truck is equipped with swinging shoes which do not swing out automatically as the hoist is lowered, the shoes must be swung outward before driving away from the load. The trainee must avoid placing the load in such a position that he/she cannot drive the truck away from it. As an illustration, a careless operator may maneuver the truck into a limited space, lower the load, and then find that he/she cannot back the truck far enough to turn it and drive away.
- k. Special handling jobs. The training should be completed with practice in handling the truck for special jobs and under unusual circumstances that might be encountered. If extremely long pieces of lumber are occasionally carried by the truck, or if it must at times operate in unusually restricted areas, trainees should practice operation under these difficulties and should understand the problems and dangers involved.

#### 4-510. Operating Rules

During training sessions, operating rules applicable to individual types of equipment should be stressed. The operating rules listed in this paragraph are examples of typical rules.

- a. All equipment. The following operating rules are applicable to all materials handling equipment:
- (1) No truck or tractor can be safer than the person who is operating it. For this reason, only authorized, properly trained and licensed persons

will be permitted to operate industrial trucks and tractors.

- (2) As soon as the operator goes on duty, he/she should check the condition of the equipment. Operators will be required to inspect the brakes, steering apparatus, horn, oil, gas, and water. Defects noted should be reported immediately to the supervisor. The operator will have authority to refuse to move an improperly loaded truck or tractor or one which is not in safe mechanical condition.
- (3) Insofar as practicable, each operator should be assigned to a specific truck or tractor and should be held responsible for it. No equipment will be operated by anyone other than the person to whom it is assigned.
- (4) Operators will not permit their equipment to be operated by unauthorizd, unlicensed personnel.
- (5) No engine will be left running while the operator is off the truck or tractor or when parked within a building. The engine should be stopped and the hand brake set.
- (6) Equipment will be taken out of the building to obtain gasoline. Under no circumstances is it permissible to refuel gasoline-driven vehicles inside of warehouses. During the refueling operation, smoking is prohibited in the area.
- (7) Gasoline tanks will not be filled while the engine is running.
- (8) Before restarting an engine, all spilled gasoline will be cleaned up.
- (9) Fire extinguisher must be on hand when filling gasoline tanks. All operators should know how to use a fire extinguisher.
- (10) Inspect all loads to be moved; do not overload; do not move a questionable load; avoid carrying loose material; refuse to move unsafe loads.
- (11) Each operator must know the load capacity of his/her machine.
- (12) Be sure the load is well balanced before moving.
- (13) Speeding, stunt driving and "horseplay" will not be permitted.
- (14) Keep three truck or tractor lengths behind other vehicles.
- (15) Speed in warehouses will not exceed 5 miles per hour.
- (16) Keep feet inside of running line of truck or tractor.
  - (17) Drive to the right whenever possible.
  - (18) Slow down at cross aisles and intersec-

tions, sound horn or gong before proceeding. When vision is obstructed by doors, corners, and elevators, sound horn or gong.

(19) Come to a stop and sound horn at exits.

- (20) Sound horn when approaching pedestrians, but do not use horn unnecessarily. Use horn only as a signal.
  - (21) Do not start, stop, or turn trucks suddenly.
- (22) Approach elevators at a right angle; stop 5 or more feet from the elevator gate and wait for a signal from the elevator operator before entering. Keep hands and feet away from controls when on the elevator.
- (23) Face in the direction you are traveling; never back up without first facing in that direction.
  - (24) Slow down on wet or slippery floors.
- (25) Avoid bumping into objects, especially in backing.
- (26) Do not park on railroad tracks or in noparking areas.
- (27) Do not use the reverse control for brake; do not run battery beyond its rated capacity.
  - (28) Do not spin the wheels or race the engine.
  - (29) Do not ride or slip the clutch.
  - (30) Keep the machine clean.
  - (31) Do not drive with wet or greasy hands.
- (32) Pushing one piece of machinery with another in order to get it started is strictly prohibited, except under the direction and in the presence of the supervisor.
- (33) Do not attempt to enter a building through a partially opened door. The door will be fully opened before proceeding.
- (34) Rail cars will not be pushed or pulled with MHE except rail car mounted cranes or other equipment designated for this purpose.
- (35) Push poles will not be used to move or place materials or objects of any kind. Approved devices adopted by the activity for use in materials handling by industrial tractors are exempt from this rule.
- b. Fork trucks. The following operating rules are applicable to fork trucks:
- (1) Operators will not fix or adjust any mechanical parts. This rule may be modified at installations where no repairman is employed and where a specific operator is known to have competence to make minor adjustments. If a fork truck is not running properly, the supervisor should be called immediately.

- (2) Check the security of overhead safety guard and back rest.
- (3) Never use the fork truck to carry loads for which it is not intended; use the right truck for the job.
- (4) No passengers will be allowed on fork trucks.
- (5) It is not permissible for anyone to "ride" the load being handled by a fork truck. This includes "riding" a load being raised or lowered. If a person must be lifted to reach stock or material, he/she will stand on a safety pallet (equipped with guard rails) placed on the forks; the supervisor must give the order and assume responsibility.
- (6) Rest forks on the gound or floor when machine is not in use.
- (7) When going down a grade or ramp with a load, back down; go forward up a grade or ramp.
- (8) When traveling empty or loaded, be sure that the forks are raised just high enough to avoid any obstructions on the floor, yet low enough to permit a clear view ahead. Mast should be tilted backward.
- (9) No counterweighting of the fork truck to increase lifting capacity will be permitted.
- (10) Forks should always be the same distance from the center of the supporting cross bar.
- (11) Check the load before moving or lifting to make sure that no material will fall.
- (12) Balance the load and tilt the mast backward to prevent tipping.
- (13) Never permit anyone to stand under suspended loads.
- (14) Watch out for others; make sure that all is clear before setting down a load.
- c. Industrial tractors. The following operating rules are applicable to industrial tractors:
- (1) Weaving the train is dangerous and will not be permitted.
- (2) Operators must not attempt to haul excessive loads that cause wheel slippage and loss of traction.
- (3) When negotiating a turn into a road or aisle, allow sufficient time to get into position to make the turn and allow for proper clearance of the last trailer.
- (4) Operators and supervisors should limit the height of the load on the first trailer behind the tractor. The height will not obstruct the rear view of the operator nor create a hazard to the operator in the event material accidentally shifts or falls.

(5) When a permanent passenger seat is provided, one passenger may be carried. No person will be allowed to occupy a temporary seat or ride on any part of the machine.

(6) No person will be permitted to ride on the

trailer train to hold the load in place.

d. Trucks straddle carry. The following operating rules are applicable to trucks, straddle carry.

- (1) Carry the hoist shoes up to avoid striking any obstruction when the truck is not loaded.
  - (2) Drive only on solid ground.
- (3) Drive cautiously at all times because of limited visibility directly in front of and to the right of the truck.
- (4) Avoid sudden stops, especially when truck is loaded.

#### 4-511. Examinations for Fork Trucks

a. The following tests should be included in the operational examination for fork truck trainees:

Test 1. A circle with a 16-foot, 3-inch radius is made by placing pallets spaced 4 feet, 6 inches apart (fig. 4–123). The trainee travels the circle twice with forks lowered and empty, weaving between pallets, first going forward, then backward. One point should be deducted for each pallet displaced. For a perfect operation the trainee is credited 10 points.

Test 2. In this part of the examination, the trainee picks up pallet loads one at a time from the supply area and places them in a row along a line drawn on the floor. On completion of this operation he/she returns the loads to the supply area. A possible score of 16 points is based on the trainee's ability to maneuver the fork truck properly and place pallet loads in a neat manner.

Test 3. The trainee is required to maneuver through a congested area similar to that shown in figure 4–124. He/she operates forward and backward through this maze of pallets. One point is deducted for each pallet displaced. Total possible score is 14 points.

Test 4. An aisle 52 inches wide and 40 feet long, constucted of empty pallets set on end, is set up in the training area (fig. 4–125). The trainee is instructed to travel the entire length of the aisle with a loaded pallet, then set the load down, back the truck up about 30 feet, move forward, pick up the load, and back out the entire length of the aisle.

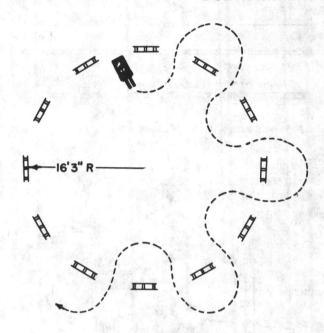


Figure 4-123. In this operational test the trainee weaves in and out between pallets placed in a circle having a 16-foot, 3-inch radius.

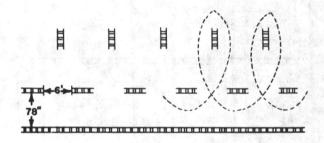


Figure 4-124. Prospective operators maneuver through a maze of pallets.

Two points are deducted for each pallet displaced. Total possible score is 10 points.

Test 5. This test consists of placing two pallets with cylinders in a simulated boxcar made of empty pallets. The pallets to be used will have a plywood top, on the center of which is painted a circle 10 inches in diameter (fig. 4–126). The trainee is instructed to place both pallets side by side in the car without disturbing the simulated box car or overturning the cylinders. If pallet walls are misplaced or cylinders toppled, the operator must first right them and then proceed with the test. Two points are deducted for each pallet displaced or cylinder toppled. Total possible score is 10 points.




Figure 4-125. An aisle constructed of empty pallets set up in the training area.

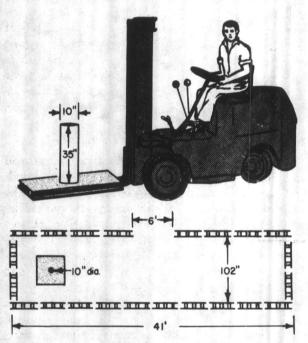


Figure 4-126. Another test consists of placing two pallets with cylinders in a simulated box car.

Test 6. In this operation the trainee will store loaded pallets in two tiers, three pallet loads high. Trainee is required to drive in at either end of the storage area and pace pallets on right angle lines. No instructions other than the reminder to tier according to previous training should be given. Two points should be deducted for each pallet placed more than 2 inches out of line. Total possible score is 20 points.

Test 7. This test, to be devised by the instructor, should be designed to summarize the operator's ability, care, safe operation, and efficiency in maneuvering the fork truck about the training area. The time element should be considered an important factor in the test. If the trainee consumes an excessive amount of time in maneuvering properly, he/she should be graded accordingly. Total possible score is 20 points.

b. Written tests adaptable to particular types of operation may be developed as deemed appropriate by the service agency concerned.

The following score sheet can be set up for grading the trainee on the operational examination:

TEST 1—10%	
Pallets displaced:	
	() @0.5
Reverse :	() @0.5
TEST 2—16%	
Pallets out of line	() 2.0
Improper approach to pla	ace pallet ( ) 0.5
Improper direction to rea	move pallet () 0.5
Excess backing, etc	() 2.0
TEST 3—14%	
Pallets displaced	() @1.0
Encounters difficulty	4.0
TEST 4—10%	
Pallets displaced:	
Forward	() @2.0
Reverse	() @2.0
TEST 5—10%	
Pallets displaced	() @2.0
Cylinder toppled	() @2.0
TEST 6—20%	
Improper approach	() @0.5
Improper leaving	)) @0.5
Quality of storage	10.00
	() @2.0
	() @2.0
TEST 7—20%	
Poor starting technique	
Poor driving position	
Rides clutch	
Stalls engine	
Clashes gears	
Races motor	
Too (slow-fast) operations	
Careless operation	
Inefficient operation	4.0
	Total deductions
	Grade

#### 4-512. Examinations for Other Equipment

An operational examination similar to the one given for fork trucks can be used. The operational test diagram and the fork truck test score sheet also can be used with slight modifications. This test score sheet should be prepared in a manner to provide for a perfect score of 100.

#### 4-513. Grading Examinations

A grade of 70 should be established as a passing score for the examination. When the trainee has obtained a passing score, he/she should be issued

a temporary operator's permit (para 4–514). Those items on which the trainee failed should be included as part of the student's additional on-the-job-training (para 4–515). At this point training films should be shown for the second time selecting the films appropriate for the permits granted.

## 4-514. Temporary Permits

Upon satisfactory completion of the training course a Temporary Operator's Permit should be issued to cover a 30-day probationary period. The temporary permit will contain a 30-day expiration date following the date of issuance. The form of temporary permit will be the US Government Motor Vehicle Operator's Identification Card (US Civil Service Commission Standard Form 46) clearly stamped or otherwise marked with the word "Temporary" to distinguish it from a permanent permit. Operators holding temporary permits may be issued a large badge of a distinguishing color so that supervisors and qualified operators can recognize the trainee as a new operator and assist him/her with suggestions and advice.

#### 4-515. Additional On-the-Job Training

- a. General. During the 30-day probationary period, the new operator should continue training. He/she can be assigned to an occasional class period with an instructor, or the instructor can carry out the training during routine inspection on all new operators at their work. This on-the-job training has two objectives: to increase the operator's proficiency and to quality him/her for use on additional MHE.
- b. Increasing proficiency. To increase the new operator's proficiency, the instructor requires the trainee to perform various difficult maneuvers with the truck or tractor-trailer train and shows him/her the safe and simple manner of operating under all circumstances. The instructor should stress constantly the importance of safety and preventive maintenance. On-the-job training with the fork truck also should consist of practice with various attachments to the fork truck, designed for specific jobs. Only skilled operators should be trained in the use of attachments.
- c. Qualifying operators for additional equipment. If the operator's training has been exclusively in the fork truck during the 30-day probationary period, he/she should receive training in the operation of the tractor-trailer train so that

in an emergency he/she will be available as a tractor operator. Tractor operators who show a high degree of skill and efficiency should be considered for training as operators of fork trucks. Even though no additional operators of fork trucks may be needed at the moment, the activity should maintain a pool of trained or partially trained operators who can carry on in an emergency. In the event the activity is in need of operators for trucks, straddle carry, cranes, or similar equipment, the new operators of MHE can be tested on this equipment during their 30-day probationary period. Those who show a high degree of aptitude for assignment to these more difficult types of equipment can be given additional training until they are qualified operators. Training films should be shown as appropriate.

#### 4-516. Permanent Operator's Permit

If at the end of the 30 days, the operator has proved satisfactory, a US Civil Service Commission Standard Form 46 properly completed and signed by the issuing official will be issued to the operator. The permit will show any restriction such as glasses required, hearing aid required, or other. The permit will also indicate qualification in explosive handling in accordance with the requirements and safety regulations of each military service. The operator will be instructed to carry the permit when operating equipment. Each operator may be issued, in addition to the permit, a badge of distinguishing color indicating that he/she is an authorized operator of industrial trucks and tractors.

#### 4-517. Renewal

Every operator holding a US Civil Service Commission Standard Form 46 will be required to have it renewed within 30 days prior to the expiration date specified on the permit. Upon application for such renewal, the operator will be required to satisfactorily complete a physical examination. Operators holding nonstandard permits with a specified expiration date will be issued a standard permit within 30 days prior to the expiration date. Operators holding nonstandard permits that do not bear an expiration date will have their permits replaced with standard forms with the least practicable delay.

# 4-518. Preparation of Additional Training Courses The training data and test factors in this regulation

DOD 4145.19-R-1

cover the training of operators for the major types of material handling equipment utilized within the military supply system. It is realized, however, that a training program is required for each of the various types of MHE in use. Therefore, it is suggested that as requirements occur for the training

of operators for MHE not specifically covered in this regulation, that the activity utilize the data contained in this regulation and data compiled by the activity to prepare a training program and test procedure applicable to the equipment for which training is required.

DOD 4145.19-R-1

#### **CHAPTER 5**

#### STORAGE OF SPECIAL COMMODITIES

#### Section 1. LUMBER

	Paragrap
General	5-101
Handling methods	5-102
Formation of lumber drafts	
Binding of lumber drafts	
Marking of lumber drafts	- 5-105
Open storage	- 5-106
Stack spacing and roofing protection	- 5-107
Covered storage	- 5-108
Storage of special items	- 5-109
Measuring moisture content	- 5-110
Kiln drying	- 5-111

#### 5-101. General

The information and instructions in this section are designed to aid personnel performing lumber storage and handling operations.


Note. Further technical data with respect to lumber storage can be found in MIL-HDBK-7, Lumber and Allied Products. That portion of section 6 of the handbook, dealing with Handling and Storage of Lumber is superseded by this regulation.

a. Storage and materials handling. The advances made in the mechanized handling of lumber have changed storage and handling methods. The development of handling equipment, such as forklift trucks and straddle carry trucks, that can be used to stack, unstack, and transport lumber, has brought about revolutionary changes; the most notable being the handling of lumber in packages. Regardless of whether lumber is handled by mechanized equipment or by manual labor, the objectives of storage and handling are unchanged.

b. Objective of storage and materials handling. The objective of lumber storage is to maintain the lumber at or bring it to a moisture content suitable for its end use with a minimum of deterioration. The objective of lumber handling is to load, transport, unload, stack, and unstack lumber economically and, without damage. Both of these objectives are obtained easily if good handling and storage

practices are followed. Adequate protection of lumber in storage will help prevent attack by fungi or insects and changes in moisture content, which encourage checking, warping, twisting, and stain in lumber and make it unsuitable for the intended use.

c. Condition of lumber placed in storage. The condition of lumber placed in storage, with respect to moisture content and possible fungus infestation, has an important bearing on the subsequent qualities of the lumber over long periods. Fungi (wood rot) and subterranean termites infecting wood are retarded in their growth when the moisture content of the wood is lower than 20 percent, however, dry wood termites, powder post beetles, and other wood borers can develop successfully in well dried wood. Lumber may be treated with a preservative in accordance with section 5 of MIL-HDBK-7 to prevent infestation for longer storage periods. If infestation occurs during drying, the fungus will continue to live in a dormant state for months or years after the wood dries and resume activity if moisture content again becomes high enough. A key to preventing deterioration during long storage is to eliminate infestation during drying and keep the wood dry in storage. All lumber must be checked thoroughly at time of receipt for moisture content and fungus infestation before storage. The preparation for storage and the type of storage will be

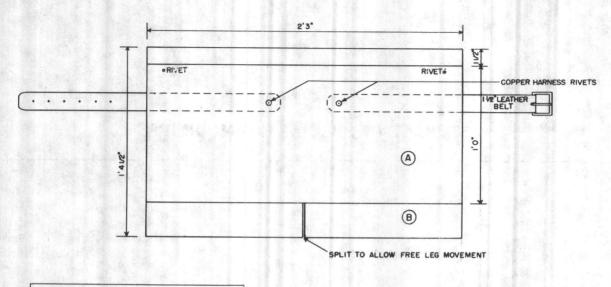

#### NOTE:

- (A) HEAVY FACING LEATHER (APPROX.) 1/4" THICK DIMENSIONS 2' 3" X 12" X 1/4"
- B SOFT LEATHER BACKING 2'3" X 1'4 V2" X V8" OR LESS

Figure 5-1. Diagram of leather apron for use in the handling of lumber.

based upon the results of these checks. It is important, especially when lumber is received in drafts, to choose drafts from different parts of each shipment and disassemble the drafts for examination; unless this procedure is followed the condition of the lumber inside the draft cannot be ascertained. Lumber presents unique problems in storage. Special piling methods are necessary to provide proper ventilation to prevent deterioration of the lumber. The method of stacking each shipment of lumber must be determined by competent personnel.

## d. Protective equipment.

(1) Lumber apron. The lumber apron for use in lumber handling should be constructed in accordance with the specifications outlined in figure 5–1. The apron should consist of a soft leather backing faced with heavy leather three-sixteenths of an inch or more in thickness. The two pieces of leather should be riveted together and supported by a belt 1½ inches in width or wider, to insure adequate distribution of the weight of the apron and lumber being handled to prevent cutting or chafing. This apron is to protect lumber handlers from injury from slivers or splinters.

(2) *Protective gloves*. Gloves that provide adequate protection from slivers or splinters must be worn by lumber handlers.

#### 5-102. Handling Methods

a. Receiving. Lumber is normally received as strapped units on gondolas, flatcars or trucks. The use of automatic and hand applied strapping and

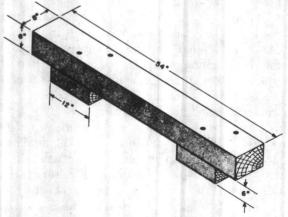


Figure 5-2. Diagram of bolster for use with 57-inch straddle carry truck.

15 September 1979 DOD 4145.19-R-1

improved handling equipment has nearly eliminated handling boards one at a time. When lumber is unitized and loaded as specified in MIL-L-14362, Unitizing and Loading of Lumber, the lumber may be moved by crane, forklift, straddle carry truck, or sideloader, eliminating manual handling. (chap. IV, sec 2 depicts MHE.) Lumber received in this manner should be placed on bolsters for transport. When drafts do not meet requirements for storage because of moisture content, improper stickering or other causes, the units should be reunitized (in accordance with para 5–103) to correct the deficiencies prior to being placed in storage.

#### b. Bolsters.

(1) Bolsters should be constructed in accordance with specifications shown in figure 5–2, except that the width of the straddle carry truck if used, will determine bolster length. In selecting timber for bolsters, care should be exercised to select solid straight grained wood, as bolsters will be subject to excessive strain in the lifting and transporting of materials. Hardwoods are preferable for construction of bolsters; however, when hardwood is not available straight grained Douglas fir or larch may be used.

(2) As the lumber is placed in storage, the empty bolsters are removed and stacked for return to loading/unloading sites. These stacks are prepared by placing two or more bolsters in position for pick up and solid piling other bolsters across them. Each successive layer of bolsters is cross piled to bind the stack securely for stability while being transported.

#### 5-103. Formation of Lumber Drafts

a. General. The handling and transporting of lumber in drafts and stacking lumber in drafts have become accepted practice throughout the lumber-producing and wood-using industries. These practices have brought about changes in yard layout and in stacking methods. Although the principles of good air-seasoning have not changed, a certain amount of adjustment is needed to conform to the more modern handling and stacking methods.

(1) When lumber is stacked for air drying in the form of drafts, the type of stickering will be determined by the seasoning required. Drafts for yard drying vary between 3½ and 4 feet, with 4 feet the most common width, and 3 to 4 feet the average height. The width of the draft will be determined by the width of the lumber and the fork


capacity of the lift equipment. The forks normally available will handle drafts approximately 4 feet in width. Stacks of unitized lumber generally are considerably narrower than handstacked piles. This tends to increase the drying rate of lumber stacked in drafts over lumber stacked by hand.

(2) Uniform size of boards in a draft is desired so that each draft of the same material will contain exactly the same number of board feet (fig. 5–3). This will eliminate many of the problems encountered in the issue and inventory of lumber products. This applies to every size of lumber handled. When it is absolutely necessary to make up a draft of random lengths, the lumber should be sorted by length and unitized with the longest lumber placed on the bottom of the draft, and the balance of the lengths grouped by length in the draft in length sequence.

#### b. Assembling a lumber draft.

(1) Construction of butt boards. The butt boards should be constructed according to specifications in figure 5-4. The 4- by 4-inch piece used for the flat base should be oak. The base should be nailed together with 16d spirally grooved, screwtype nails. Metal corners or angle irons will help reinforce the base and are essential if Douglas fir or other soft wood is substituted for oak. The angle on the butt boards is designed to give a forward pitch to each draft of 1% inches to each 12 inches in height. Since the slope of the stack foundations from front to rear is 1 inch for each 12 inches of length, this provides five-eighths of an inch pitch per foot in height in the completed stack. Should the slope of the lumber beds vary from 1 inch of slope in 12 inches of length, an adjustment to correct the pitch can be made easily by starting with a line perpendicular to the ground, then giving a forward pitch of five-eighths of an inch to each 12 inches of height plus the slope of the lumber bed. For example, suppose the slope of the foundation on which the lumber will be placed is 1½ inches in each 12 inches of length. The slope forward on the butt board will then be 11/2 inches plus five-eighths of an inch in each 12 inches of height of the butt board. This equals 21/8 inches forward slope or pitch of the butt board in each 12 inches of height. For each 10 feet of height from the bottom of the first draft, the stack will project forward 61/4 inches at the top beyond the end of the bottom board.

(2) Anchoring of butt boards. Once the position of each butt board is established, it should be an-

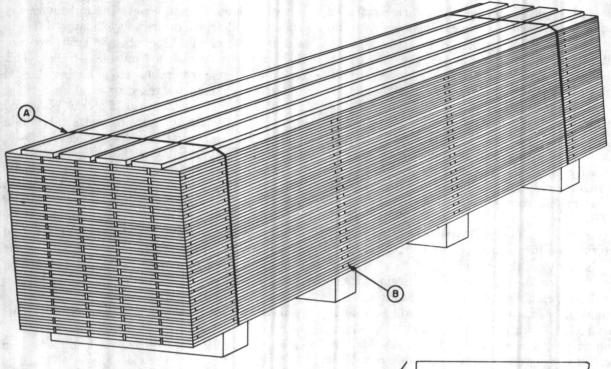

## DRAFT DATA

#### STRAPPINGS A

ITEM () ROUND, STEEL, GALV. 10 GA.
ITEM (2) FLAT STEEL 1 1/4" WG. 035 GA.

(ITEM () FIRST CHOICE)

#### STICKERING B

ITEM 3 LATH SIZE 1 1/2" X 1/2" X 48"
ITEM 4 STOCK SIZE 2" OR 3" X 3/4" X 48"

#### NOTE I


LUMBER WHICH HAS A MOISTURE CONTENT OF 19% OR LESS IS TO BE STICKERED AT EACH 8" OF HEIGHT

#### NOTE 2

LUMBER WHICH HAS A MOISTURE CONTENT OF 24% OR ABOVE IS TO BE STICKERED BETWEEN EACH LAYER. STOCK STICKERS ONLY (ITEM 4) ACCEPTABLE FOR LUMBER IN THIS CATEGORY

#### NOTE 3

LUMBER WHICH HAS A MOISTURE CONTENT BETWEEN 19% & 24% IS TO BE STICKERED BETWEEN EACH TWO LAYERS OF MATERIAL 11/2"THICK OR LESS AND EACH LAYER 15/8"THICK & ABOVE

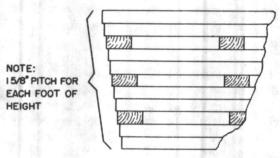

	MINIMUM	MAXIMUM
DRAFT WIDTH	40"	48"
DRAFT HEIGHT	36"	48"

Figure 5-3. Diagram outlining draft requirements for outdoor storage.

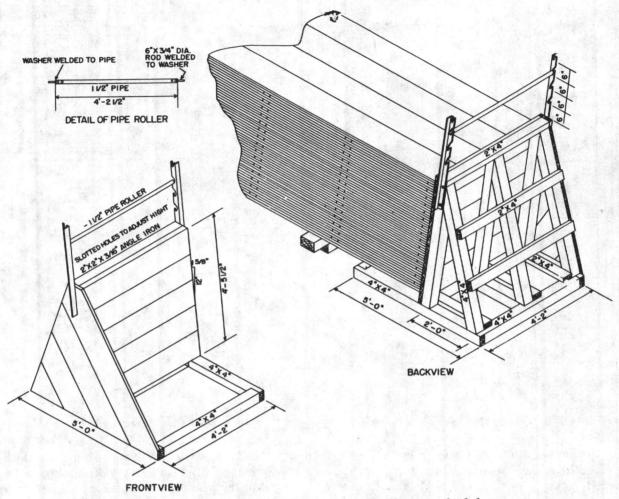


Figure 5-4. Diagram of butt boards used to control pitch on draft face.

chored firmly. This can be done by driving iron rods into the ground at points where pressure will be exerted or by nailing pieces of 2-inch stock to the butt board, extending these pieces to the platform, and nailing the pieces securely to the platform. To assist in stabilizing the butt board, a 2 by 4 is sometimes placed across the base flush against and, parallel to the face of the butt board. In this way the front end of the draft should just clear the forward straddle carry truck bolster so that a portion of the weight of the front end of the draft rests on the 2 by 4. It is essential that each butt board remain in exactly the same position once a draft of lumber is started to obtain the correct pitch and uniform face on each rick of lumber.

(3) Placing and alignment of stickers. The proper alignment of stickers in each draft of lumber

is necessary to prevent warping and bowing. Proper alignment is also necessary to assure vertical columns of stickers from top to bottom of the storage stack when the stack consists of several drafts (fig. 5-5). When placing stickers, the first stickers should be against the butt board. This will give an inverted stair step appearance to the face of the completed draft and will cause water to drip from the front of the pile instead of seeping in. The sticker will retard end drying and tend to prevent end checking of the lumber. The second sticker should be placed 12 inches from the front of the pile and the balance of the stickers positioned at 5-foot 4-inch intervals directly over pile foundations, as shown in figure 5-5. The only variation in the sticker spacing will be in the stacking of hardwoods or other lumber prone to warp. Sticker spacing for these lumbers will be on 2-foot 8-inch centers.

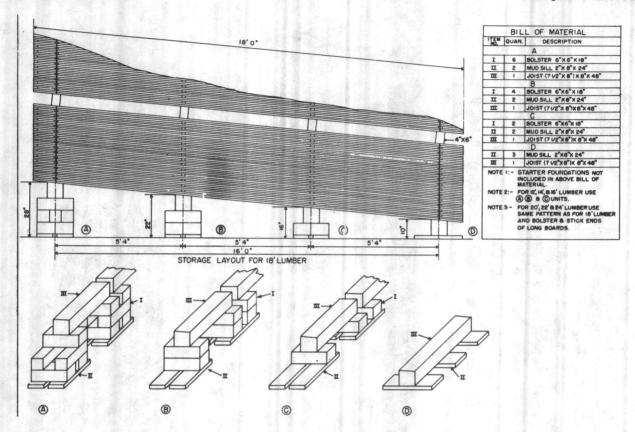


Figure 5-5. Diagram of properly stickered and formed drafts of lumber stored on wooden block foundation.

(4) Sticker guide. The sticker guide (fig. 5-6) is essential in the formation of drafts of lumber. Its basic function is to guide the placing of stickers so that the stickers will provide vertical columns of support for the lumber over each foundation support timber. Sticker guides must be constructed to function in conjunction with the butt board to give the column of stickers the same degree of pitch as is maintained on the face of the pile. Otherwise, the proper stacking of drafts of lumber is impossible as sticker alignment between drafts could not be maintained. Sticker guides should be constructed to provide the longitudinal sticker spacing shown in figure 5-5, except that, at activities where the standard storage plan has not been implemented, foundation spacing will determine sticker spacing. However, under no circumstances will sticker spacing exceed 6 feet.

(5) Sticker construction and care. Stickers may be made from any species but preferably from heartwood. Sapwood is undesirable, as it may harbor stain organisms. All stickers must be sound,

dry, free from stain and decay, of uniform thickness, and must be of sufficient width to support the weight of the pile without crushing the stickers or causing compression marks in the face of the lumber. Stickers, when not in use, should be protected from the weather to be kept dry and ready for future use.

(6) Stickering requirements.

(a) General. Lumber when received may be partially green, partially air dried, or thoroughly seasoned. To establish stickering requirements, the moisture content of the lumber must be determined.

(b) Stickering of lumber when moisture content exceeds 24 percent. Partially green lumber, or lumber with a moisture content of 24 percent or more, requires a greater amount of air circulation within the draft to remove this excess moisture as rapidly as possible to avoid possible stain and rot. Lumber with a moisture content of 24 percent and above will be stickered between each layer with stickers 2 or 3 inches wide by three fourths of an

DOD 4145.19-R-1

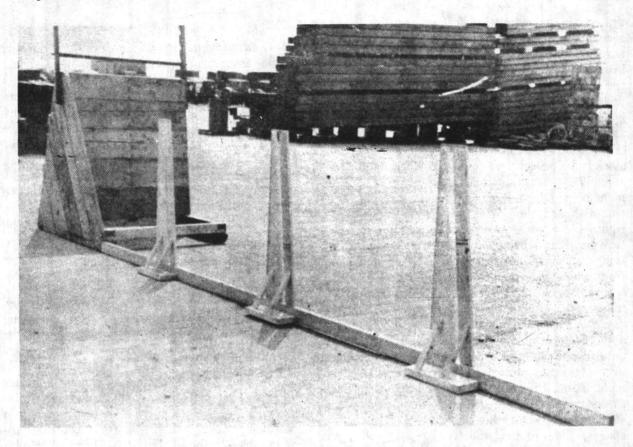


Figure 5-6. Sticker guide and butt board ready for use.

inch thick and of sufficient length to fully support each course of boards. Hardwoods 1¼ inches and over in thickness with a moisture content of 24 percent and above which are to be stacked in open storage for air drying will be stickered with 1-inch or thicker stickers. Hardwood is a slow-drying wood and should be well ventilated to speed drying and prevent stain and rot in these premium type woods.

(c) Stickering of lumber having 20 to 23 percent moisture content. Lumber with a moisture content between 20 and 23 percent does not require as much drying as green lumber and consequently requires less air circulation within the draft. This lumber will be stickered with lath (1½ by ½ by 48 inches) between each two layers of material 1½ inches thick or less and between each layer 15% inches thick and above. However, hardwoods having a moisture content between 20 and 23 percent, which are being placed in open storage for continued air seasoning, will be stickered with 1 or 1½- by

34-inch stickers of sufficient length to adequately support each board and prevent warp.

(d) Stickering of seasoned lumber. Drafts of seasoned lumber having a moisture content of 19 percent or less may be placed directly into storage and stickered at sufficient intervals to stabilize the draft.

(7) Air drying of lumber. The air drying of lumber is dependent upon the temperature, the relative humidity of the outdoor air, and the extent air is caused to enter and circulate within the stack so that it reaches each individual board.

(a) Air flow. Air, at any condition below 100 percent relative humidity or moisture saturation, possesses the ability to take up moisture from green lumber. Air that enters a stack becomes cooled as it takes up moisture from the lumber and, as its temperature decreases and relative humidity increases, it loses its ability to dry the lumber. As a consequence, if drying is to continue, the air within the stack must be replenished by ejecting the sat-

DOD 4145.19-R-1 15 September 1979

urated air and admitting fresh drier air. This is accomplished by natural horizontal and vertical air movements. Horizontal movement within the stack is brought about by differences in pressure between the two sides of the stack caused by prevailing winds, while vertical movement is brought about by the increase in density of the air within the stack as the air is cooled. Since it has been established that the horizontal movement of air within a lumber stack is the principal means of accomplishing drying. it is highly important that channels for this movement be provided. Vertical movement in itself accomplishes little drying except in the case of squares or when stock is stacked on edge, but vertical movement through interior spaces induces horizontal air movement across the faces of the boards from which most of the evaporation of moisture occurs. Horizontal movement of air within the stack takes place through the spaces formed by the stickers. Spaces for the downward movement of air are obtained to a minor degree in the draft from the natural openings between the board edges; however, the major provision for the downward movement of air is the between-stack-spacing. The wider these spaces, with respect to the total width of the stack, and the smoother the vertical sides of the spaces, the greater will be the passage of air through them. Edge-to-edge stacked boards, in drafts 31/2 to 4 feet wide, with good stack spacing in the rows are comparable to boards in a wide hand-stacked pile with chimneys at several foot intervals. In this manner, the spacing between the stacks acts as a chimney to carry the damp or saturated air down, thus stimulating horizontal movement of air within the draft.

(b) Effect of stack height on air drying. The effect of stack height on drying rate is similar to that of stack width. Increasing the stack height tends to retard drying, particularly in the lower parts of the stack. The air traveling downward in a stack becomes cooled and approaches saturation at a point higher up in a tall stack than in a short one, unless the air is replenished by horizontal movement as it moves downward. Tall stacks also tend to restrict general wind movement at the ground level of the yard. Lumber stacked in the form of drafts may range from about 4 to 20 feet in height. Movement of air through the 6-inch between-draft spacings will increase to some extent air circulation at the lower levels of the stacks.

## 5-104. Binding of Lumber Drafts

a. Binding requirements. Each draft of lumber. which is assembled for storage or shipment, should be bound with an appropriate binding. Binding of the draft is necessary to prevent movement of lumber during handling operations. Shifting of the lumber could alter the pitch on the draft face or cause the dislocation of stickers and the subsequent distortion of the lumber in the draft. Bindings must be placed directly over the stickers in order to secure a tight binding and to prevent distortion of the lumber. Also, binders placed other than over the sticker ends will tend to force the lumber in the draft together, thus closing any edge spacing between board edges which will restrict the vertical flow of air through the draft and retard drying. Bindings should be over the second and last sticker in each draft, as shown in figure 5-3. Lumber, which is to be transferred immediately from unloading point to point of use, will not require binding or stickering except as desirable to stabilize the draft for transportation purposes.

b. Binding materials. Binding should be either 10-gauge round steel galvanized wire of ¾ by 0.023-inch. type I or IV flat steel strapping in accordance with QQ-S-781. Corner protectors are not required in the binding of lumber, as the bite of the binding will tend to hold the binding in place over the stickers.

#### 5-105. Marking of Lumber Drafts

Each draft of lumber should be properly marked prior to final storage. Marking should include stock number, board feet, and the date and year received. For example, lumber received on 11 July 1977 would be dated 192/77 (192d day of 1977). Marking lumber will facilitate issue and inventory and will make it possible to issue the oldest lumber first. Lumber received from other activities is issued according to the original receipt date noted on the marker tag which should be placed on the front or pitched end of each draft. Thus, lumber received from another activity would be issued prior to lumber in stock if the marker tag indicated it was the older lumber. Adoption of this standard method of marking and dating lumber will aid in preventing the retention of old lumber in storage. Tags for the marking of lumber must be weather-resistant and capable of withstanding long periods of outdoor storage without becoming unreadable. Typed or handwritten paper tags, sprayed with a clear liquid plastic coating, may be used. Suitable dip-type plastic coatings are also available. Tags made of embossed aluminum or other weather-resistant materials may also be used.

## 5-106. Open Storage

a. Yard location and surface. Preferably, the storage yard is located in an area where the lumber is received, shipped, or used. The best location is on high ground that is level, well drained, remote from water bodies, or wind obstructing objects. such as tall trees or buildings. A low site is likely to be sheltered from the full sweep of the winds and can cause dampness which may retard drying and promote stain and decay. The ground surface should be kept free from debris and vegetation. Debris harbors stain and decay organisms and obstructs the movement of air over the ground surface and beneath the lumber piles. Vegetation can be controlled by applying crude oil, salt, or weed killers. Covering the ground with cinders, gravel, shells, or crushed stone will retard the growth of vegetation. Yard surfaces should be firm and smooth for the operation of lumber handling equipment. Rough terrain causes additional wear and tear on the machines and may cause injury to operating personnel. Also, such conditions may cause displacement of stickers and boards in the draft being transported and may impede the accurate placement of the draft during stacking operations.

b. Yard layout. A yard for storage of lumber is laid out in blocks separated by aisles (fig. 5-7). A well-designed yard facilitates the movement of lumber and the taking of inventories. The yard layout is affected by the size and shape of the available area and by the equipment used for transporting and stacking. Aisles in yards where the lumber is machine-stacked are usually 24 to 30 feet wide, the optimum being 24 feet. The aisles provide routes for transporting lumber, permit the movement of air through the yard, and serve as a protection against the spread of fire. The rows of lumber in machine-stacked yards run at right angles to the aisles with the boards parallel to the aisle. Storage blocks should not exceed 10 stacks in depth, preferably stored in combinations of 5-5, 7-3, or 6-4 stacks in back to back storage. The direction of the main aisles, those from which the stacks are built or taken down, generally is established by the nature of the yard site. Whether main aisles run parallel with or at right angles to the direction of the prevailing winds probably will not affect ventilation and air movement through the yard due to cross aisles which run at right angles to the main aisles.



Figure 5-7. Yard layout.

To permit rapid drying of aisles after a rainstorm or the melting of snow, it is advantageous to run the main aisles north and south. To increase air circulation within the stacks an aisle 2 to 3 feet in width should be maintained between the rows of stacked lumber (fig. 5-8). This between-rows aisle will be of valuable assistance in issue and inventory functions. The stack and aisle layout plan (fig. 5-9) for shed and open storage has been prepared to assist storage personnel in planning yard layout. The storage area is laid out to utilize the truck and railroad areas as main or longitudinal aisles with 24-foot cross aisles intersecting the storage area at approximately 50-foot intervals. This is sufficient storage depth to permit stacking five stacks deep in back to back storage. See chapter III, section 3. for stock numbering techniques.

c. Foundations, general. Flat piling is satisfactory for inside storage but it is recommended that all out-of-doors stacks be given a reasonable amount of slope. Slope facilitates runoff when water leaks through or blows in at the sides of the stacks. This aids in keeping the lumber dry, thus preventing development of conditions favorable to the growth of stain, decay, and attack by insects. When lumber is stacked in drafts by forklift truck, changes in stack foundations over those used for hand stacking are necessary. Also, efficient utilization of the fork truck in stacking operations requires that the drafts be stacked parallel to the aisles rather than at right angles. The top of the foundation must afford at least 1 inch of slope for each lineal foot of length. At most activities, the sloping of stacks of unitized lumber is common practice. The foundations of all stacks, except the last stack of a row, must be

spaced or arranged to permit the entrance of the fork truck. For this reason, long stringers cannot be used successfully as foundations for draft stacked lumber, especially for the center foundation.

d. Portable lumber foundations. The application of the portable lumber foundation for lumber storage is illustrated in figure 5-10. The stability of these foundations is obvious and they afford sufficient ventilation beneath the stack for drying purposes. The foundation is composed of creosote treated timber to prevent deterioration. The portable lumber foundation is spaced on 5-foot 4-inch centers (fig. 5-11). This spacing of the foundation, constructed as shown, produces the desired slope and is sufficient for the storage of most species of lumber. However, hardwoods and some other types of lumber require additional foundation support to prevent bow and warp during the drying process. This portable foundation can be increased easily from a 4- to a 7-point foundation to accommodate hardwood drafts stickered in accordance with paragraph 5-103. This increased support is achieved by placing an additional foundation unit midway between units A, B, C, and D shown in figure 5-5. The unit between is erected the same as the lower of the units which it separates and the required increase in height is obtained by placing a 3-inch thick spacer between the joist and the bolster.

e. Component parts of the portable foundation. The portable foundation consists of three component parts—6- by 6- by 18-inch blocking (7½ by 8 in) by 8- by 48-inch joists, and 2- by 8- by 24-inch mud sills (fig. 5–12). Utilization of these mud sills produces a bearing surface of approximately 11 square feet for each unit stack, which is sufficient


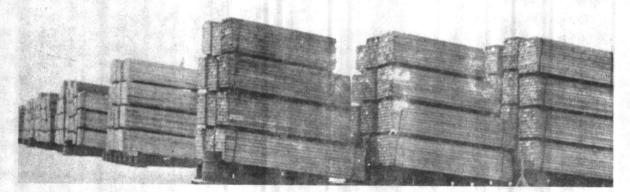


Figure 5-8. Two-foot aisles maintained between rows of stacked lumber to facilitate flow of air through the lumber yard.

15 September 1979 DOD 4145.19-R-1

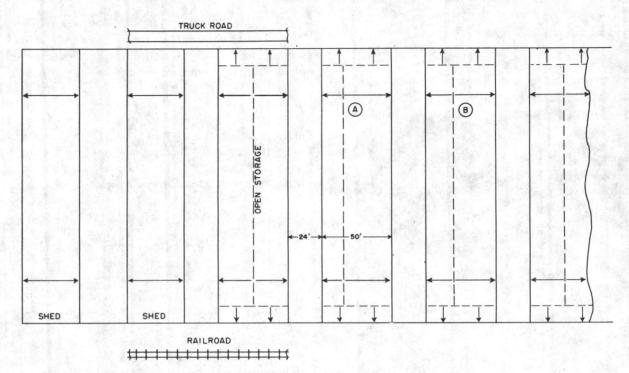

THIS RELEASE IS INTENDED TO ILLUSTRATE SEVERAL DESIRABLE FEATURES WHICH SHOULD BE CONSIDERED IN PLANNING LUMBER YARD LAYOUT.
IT SHOULD BE NOTED THAT THE TRUCK AND RAIL ROAD AREAS ARE UTILIZED AS LONGITUDINAL AISLES.
ALSO THE STORAGE AREAS ADJACENT TO THESE AISLES ARE USED FOR SMALL LOT STORAGE. THE STORAGE AREAS BETWEEN GROSS AISLES ARE 50° WIDE, WHICH IS SUFFICIENT TO STORE TWO. TOTS, FIVE
STACKS DEEP, IN BACK TO BACK STORAGE. THESE AREAS MAY ALSO BE UTILIZED TO ACCOMDOATE VARIED
QUANTITIES OF LUMBER BY STORING LOTS IN COMBINATIONS OF 6-4 OR 7-3 PILES PER LOT, AS IL—
LUSTRATED IN AREAS & AND &

SUFFICIENT AREA ADJACENT TO THE RAILROAD SHOULD BE UTILIZED FOR UNLOADING OPERATIONS TO PERMIT LUMBER TO BE SORTED AND PLACED IN DRAFTS, AT CAR SIDE, AS IT IS UNLOADED. TRUCK UNLOADING AND SORTING AREAS SHOULD BE ASSIGNED ACCORDING TO ACTIVITY REQUIREMENTS.

Figure 5-9. Diagram of yard and shed layout.

to support maximum unit load stacks on yard surfaces that will withstand the normal operations of heavily loaded fork trucks. These foundations are removed easily and unitized as lumber storage decreases thus permitting easy readjustment or layout of the lumber storage area. To facilitate storage operations, foundation components should be unitized in the quantity required to store an average car load of lumber and placed at strategic locations throughout the lumber storage area. Foundations not required for immediate use, except those strategically located about the yard, should be stored in one central location by component type.

#### 5-107. Stack Spacing and Roofing Protection

#### a. Horizontal spacing.

(1) General. Although stack spacing will vary with different situations, stacks of stickered or solid piled drafts of lumber should not be placed too close

together. Circulation around the stack is necessary if drying is to take place in lumber which is above an air-dry condition and to prevent dry lumber from picking up moisture from stagnant, humid air pockets.

(2) Spacing between stacks of unitized lumber. Lateral spacing between stacks should be 6 to 12 inches. Vertical passages or flues are somewhat more difficult to build into drafts of lumber than in the relatively wider hand-stacked piles. The need, however, for building flues into drafts 4 feet or less in width has not been demonstrated. The sum of the width of flues in hand-stacked piles equals about 20 percent of the width of the stack. Flues within the drafts should not be required if 6 to 12 inches are allowed between the sides of the stacks of unitized lumber in the yard. With this arrangement, movement of air in the spaces adjacent to the stacks will induce horizontal movement of air through the draft and accomplish drying. When drafts are



Figure 5–10. Application of the portable lumber foundation.

stacked in this manner, the spacing between the stacks takes the place of flues built into hand-stacked piles; this space, therefore, should equal approximately 20 percent of the unit stack width.

(3) Spacing of storage rows. Generally, at machine-stacked lumber yards there are no rear aisles, and spaces between the ends of the stacks are provided by spacing the rows. Spaces between rows of unitized lumber stacks vary from 2 to 3 feet in air-drying yards. Here also, it is not feasible to recommend an optimum spacing, but a spacing of 2 to 3 feet should be sufficient at stack ends to induce sufficient air currents between, through, and under the stacks to carry off moisture saturated air.

b. Vertical spacing.

(1) Space required for use of forklift trucks. Spacers (dunnage) used in connection with the stacking of lumber in drafts may be considered to be a part of the stack foundation. When a draft of lumber is picked up or set down, space for the insertion or removal of the forks must be provided. Usually, this space is about 6 inches wide in slope stacked lumber, but may be narrower when the new

model of forklift truck is used. These newer trucks have an arrangement for tilting the forks through an angle of 5° for picking drafts from sloped stacks of lumber; however, tilting mechanism is not required if 6-inch spacing is maintained between drafts.

(2) Placing of spacers. When building a stack of prepared drafts of lumber, the spacers are placed (directly over the stickers) on top of each draft or on top of the upper one when handling two at a time, before stacking. Of course, this need not be done with the lower draft of the stack where the top is reached readily from the ground. When the stack is completed, the channels caused by the placement of these spacers provide additional area for air passage through the stack. Thus, these passages conceivably may counteract the disadvantages of the relatively high stacks usually found in mechanized lumber yards.

c. Roofing protection for stacks. Lumber which cannot be stored under cover should be protected from the weather by adequate roofing. Roofing should be placed on the top draft and lashed down prior to placing the draft on the stack. A good roof always has been considered an essential feature of good air-drying practice. A roof shields the stack from direct sunshine and precipitation, particularly the upper lumber courses, and to a lesser extent. the lower part of the stack. Without a roof, the upper courses of lumber become warped and checked, and rain is permitted to penetrate the stack from the top or to drive in from the ends and sides. A leaky roof will afford protection against direct sunshine but will permit water to wet the upper lumber courses and to penetrate the stack. To afford maximum protection, a roof should project 12 to 18 inches at the ends of the stack and approximately 6 inches over the sides.

(1) Staggered board protection method. A good low-cost roof, adequate for lower grades of lumber, dimension stock, or lumber which will not remain in storage for a long period of time, can be built into each draft as it is formed. To form this roof, one piece of lumber is left out of the top layer and the remaining lumber is staggered or placed so that each board covers an opening between the tiers of lumber (fig. 5–13). Thus, moisture is prevented from entering the draft and the two layers of each unit load becomes the roof. Since drafts are built with a 15%-inch pitch per foot of height and stored on foundations which provide 1 inch of slope per

15 September 1979 DOD 4145.19-R-1

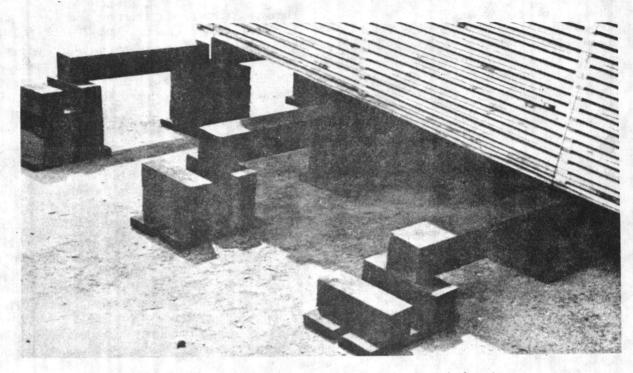


Figure 5-11. Portable lumber foundation spaced on 5-foot 4-inch centers.

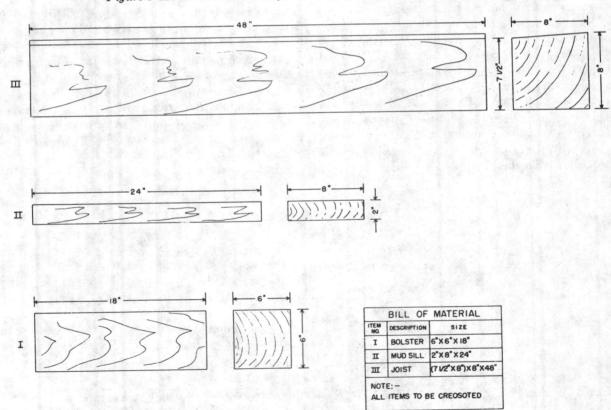


Figure 5-12. Diagram of lumber foundation components.

DOD 4145.19-R-1 15 September 1979

lineal foot, this roof will afford good protection for normal storage requirements. This roof does not afford quite as much protection from the weather as roofs with extended ends and sides, however, this is compensated for in several ways; for example, lumber is always roofed and cannot be accidentally left uncovered; permanent roofs are not maintained or stored when not in use; man-hours are not expended in subsequent roofing operations; and, as unit loads are bound, additional lashings are not required to keep roofs in place.

(2) Paper or roll roofing protection method. Building paper or roll roofing may be combined with boards to form a roof. The paper or roofing provides watertightness, while the boards support the paper or roofing in a flat sheet and permit the roof to be anchored to the stack. The boards in this type of roof should be laid in a single layer and, roughly, edge to edge. The boards forming the front and rear portions need not be overlapped but can be butted over a central crosspiece. Since this type of roof is tight, the pitch can be flatter than one composed of a double layer of overlapping boards. The use of a combination of building paper or roll roofing and boards probably is more applicable to stacks of unitized lumber than to handstacked piles. The paper or roll roofing can be laid in strips, running either crosswise or lengthwise of the stack. When laid crosswise, the strips should be lapped like shingles and held down by three or more tie pieces running lengthwise of the stack. When the strips are laid lengthwise, a tie board should be placed over each lap. This type of roof consists of a double layer of boards with paper or roofing between. The boards of each layer are laid with several inches between

the edges. With a roof of this type, there would not be a need for the boards to overlap. There is a wide variety of papers and roofing on the market, and the choice of a suitable material should be based on the life of the material with reference to the length of time the stack is to stand in the yard. It is probable that the most economical way would be to discard the paper or roofing when the stack is taken down.

(3) Other protection methods. Boards, roofing, plywood, panels, corrugated aluminum, metal sheeting, and other roofing materials also may be combined to form roof panels. The panels may be used singly or doubly in the length of the stack. In all cases the roof should be raised several inches above the top course of lumber to permit movement of air between the roof and the top of the stack. Special roofing should be used only when lumber such as oak and other high grade lumber is to be stored for long periods of time for air drying or when, because of unusual conditions, thoroughly seasoned lumber must be placed in open storage.

#### 5-108. Covered Storage

a. Sheds—open. An open shed may be likened to a storage yard with a roof. In covered storage, however, lumber may be stored on level foundations, 12 inches in height, as these stacks will not be exposed to rain or snow and will not require slope to accelerate moisture runoff. The open shed is advantageous for the storage of surfaced lumber or the better grades of lumber which are to be held in storage for a long period of time. Lumber having a moisture content in excess of 20 percent, which eventually will require covered storage, may be

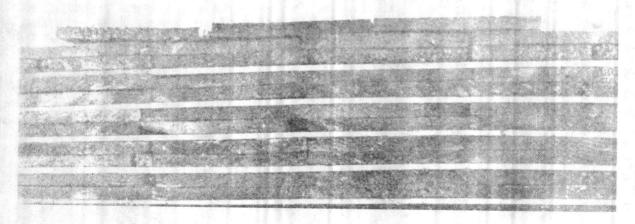


Figure 5-13. Method of building a roof into a draft of lumber.

sticker piled and placed in open shed storage for air drying, as open shed storage has approximately the same drying qualities as an open lumber yard. Lumber is placed into and removed from open sheds from the open sides thus, the areas adjacent to the shed are utilized as working aisles. Stocks may be stacked from the center of the shed out, in back to back storage or, completely through the shed, depending on quantity and similarity of stocks stored. Surfacing requirements for open sheds are similar or equal to those required for open lumber storage areas.

#### b. Sheds-closed.

(1) Uses for closed sheds. Closed sheds are used primarily for the storage of well-seasoned or kilndried lumber, plywood, molding, frame stock, and other show-type lumber intended for special use where end use moisture content requirements will be 12 percent and less. The objective during storage is to prevent the lumber from absorbing atmospheric moisture. For this reason, it is advantageous to stack lumber and other items solidly with only sufficient stickers to stabilize the stack or to designate quantities, grades, or items of stock.

(2) Floor surfacing. Closed sheds should be provided with floors, preferably concrete, asphalt. wood block, or planking. Loose surfacing is not too satisfactory and, earthen floors, particularly if the shed is located on a low damp site, may increase the moisture within the shed. For this reason, closed sheds should be located on dry well-drained sites. Ventilation of the shed should be provided by adequate and adjustable openings in the walls. Stack foundations in closed sheds should be high enough to permit air to circulate beneath the stacks. Stagnant air underneath the stacks probably would accumulate excessive dampness and thus, increase the moisture content of the lumber in the lower part of the stack. If the floor is earth or surfaced with some loose-surfacing materials, the stack foundations should be about 12 inches in height. When the shed floor is surfaced with concrete or other hard surfacing, a clearance of 4 inches beneath the stack is sufficient.

(3) Heating of closed sheds. The efficiency of a closed shed in maintaining a low moisture content in lumber and other items for high-grade end uses is increased greatly if heat is available when weather conditions require it. When a source of heat is available, a low relative humidity within the shed and consequently, a low equilibrium moisture

content for the lumber can be maintained by increasing the shed temperature 10° to 20° F. above the outdoor temperature. The heating system should be arranged so that the temperature throughout the shed is uniform.

#### 5-109. Storage of Special Items

a. Storage of shooks. Shooks should be stored under cover, preferably near the main packaging areas. Many activities find it beneficial to procure shooks instead of box lumber for the majority of standard box requirements. Shooks can be procured in open-end contracts and delivered in the quantities required for normal operations. Thus, storage space is required for only a 30- to 60-day supply of each type shook. This reduces lumber storage yard requirements and, proportionately, the need for stack foundations, stickers, bolsters, pile spacers, but boards, box manufacturing machinery, and the intradepot hauling of lumber.

b. Storage of lignum vitae. Lignum vitae is a greenish brown, hard, and heavy wood. Usually, it is stocked as blocks or logs. There is only one correct method of storage for lignum vitae, which is to store submerged in fresh water. There are various satisfactory methods of underwater storage. One method is to drive the U- or I-bolt into the end of the logs or blocks, attach the bolt to a cable and place in any pond or other body of fresh water. In the absence of natural water storage facilities, ponds or tanks must be prepared for the submerged storage of this wood. When lignum vitae is stored in tanks or ponds, it is not necessary that the water be changed as stagnant water will protect this wood as well as water that is constantly being changed. Lignum vitae quickly becomes unsuitable for use if stored exposed to the air, therefore, another method will not be substituted for the submerged storage of this material.

c Storage of plywood. Plywood will normally be in a dry condition when received and should be stored in a closed shed, particularly when the plywood has interior gluelines. For prolonged storage, a heated storage building is recommended. Plywood is commonly solid piled. Under humid conditions, there is some tendency for edges to swell because of exposed end grain, and this swelling causes dishing, especially in the upper panels of high piles. Dishing can be minimized by placing stickers in the pile at intervals. Enough stickers should be used so that plywood will not bend between them. Dry

1-inch strips are sultable for stickering plywood.

d. Storage of timbers. Moisture content itself is not of major concern for timbers. The objectives in timber storage are to prevent serious deterioration and at the same time accomplish slight drying. Timbers held in open air storage are subject to checking, splitting and warping. They are also subject to decay. Checking, splitting and warping are associated with shrinkage, stresses generated by the drying of the outer portions. Decay can result where infection takes place in those portions of timbers that are exposed to moisture and air. In large timbers, end checks may occur that are likely to develop into splits that may extend a considerable distance along the length of the timber. Surface checks are generally of minor importance except where they develop into the relatively large cracks that are likely to occur in boxed-heart timbers. Timbers may decay in storage because of fungi that were in the living tree, or infection may start during the storage period. Decay may start on the surfaces of timber in solid piles because surface drying is retarded; or in surface checks or splits into which rain or snow water penetrates.

(1) Outdoor storage of timber. Timbers stored in piles outdoors are usually exposed to sunshine and wetting because it is impractical to provide roofs. Timbers stored outdoors should be endcoated for protection from end-checking. If the coating is applied before end-checking has started, it will greatly retard the drying of the end-grain that causes checking and splitting. The various types of antisplitting irons that are used commonly on railroad ties may be used on timbers to prevent the opening up of splits that may develop from end checks. Timbers stored outdoors should be piled so that the air has access to all faces. The timbers in each layer, of course, should be placed several inches apart, and the courses should be separated by 2 by 4's. The stickers should be spaced 6 to 10 feet apart. Pile foundations should slope, and the pile of timbers should be built with a forward pitch much like hand-stacked piles of boards or dimension lumber.

(2) Open shed storage of timbers. Timbers stored in an open shed are subjected to practically the same atmospheric conditions as timbers stored outdoors, but they are protected from sunshine and wetting by the roof of the shed. Piles are level, rather than sloped and pitched.

e. Storage of poles and piling.

(1) Storage methods are identical for poles and piling. Items treated with preservatives should be close piled. Checks may expose untreated wood to infection by decay, fungi and attack by insects. Partially treated material, such as butt-treated poles, needs the same type of storage as untreated material. The foundations of piles for untreated poles should be of the pier-and-beam type and should support the first layer of poles at least 18 inches above the ground. The foundations, if wood, should be constructed of the heartwood of decay-resistant species, such as cypress, cedar and redwood, or of pressure-treated timbers of any species. Concrete piers also are satisfactory.

(2) In figure 5–14, the poles are piled parallel to one another, and for the most part, in contact with one another. Cross pieces 4 to 6 inches in diameter are placed as stickers to separate the pile by groups of six layers each. This method of piling is the so-called crib type, and is used in localities where the decay hazard is not high.

(3) In a method of piling, known as the cross-hatch type, the poles in adjacent layers are placed at right angles as shown in figure 5–15, in which the number of poles in each layer is about the same.

(4) In another method, alternate layers of poles are separated by two tiers of poles as stickers. Under some conditions, it may be advisable to have several additional tiers of poles as stickers. The more open piling, as compared with the close piling in figures 5–14 and 5–15, permits a more rapid drying rate with less chance that stain and decay will develop.

On the other hand, if it is desired primarily to reduce checking rather than stain and decay, the crib or crosshatch may be preferable.

## 5-110. Measuring Moisture Content

a. General. Ordinarily, the amount of moisture in wood is expressed as a percentage of the weight of the wood when oven dry. The three distinct methods of determining moisture content are the ovendrying method, the distillation method, and the electrical moisture meter method. The latter of the three methods is the most rapid, and does not require cutting the material. The only accurate and rapid test is by the use of a lumber moisture meter (fig. 5–16), used in accordance with MIL-STD-1363, Measurement of Wood Moisture Content.

15 September 1979 DOD 4145.19-R-1

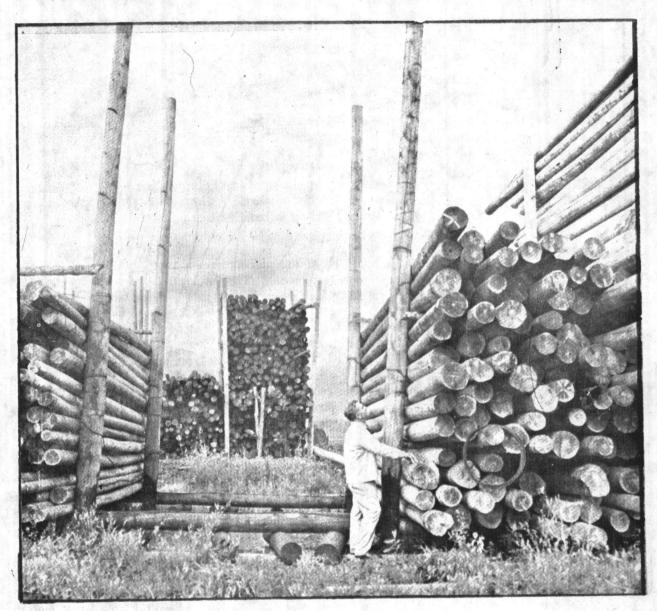


Figure 5-14. Crib method of piling poles.

b. Use of the electrical-resistance method. When the rapid indication of the moisture content of wood is desired for inspection purposes, the electrical-resistance method is the most suitable. This method is based upon the well-known fact that the electrical resistance of wood changes with moisture content. Several types of portable electric moisture meters are now on the market. The features common to the meters are two pairs of sharp metallic terminals that can be embedded quickly in the wood, batteries for supplying an electric current through the wood

intervening between the two terminals, and a means for reading the resistance in the electric circuit directly in terms of the moisture content of the wood holding the terminals. Different species of wood vary in their electrical resistance for a given moisture content, and this fact must be taken into consideration in making moisture determinations. Usually, manufacturers supply proper correction factors. The range of the present meters is about 7 to 24 percent moisture content. Moisture meters are now available with needles that are insulated

DOD 4145.19-R-1 15 September 1979



Figure 5-15. Crosshatch method of piling poles with same number of poles in each layer.

with a nonconductive coating except for the extreme tip. The insulated needles are preferred since they can measure the moisture content at various depths within a piece of lumber. The electrical-resistance method has an advantage over the ovendrying and distillation methods, principally, because of its speed and convenience as only a few seconds are required to determine the amount of moisture in any piece of wood. It is, therefore, adaptable for sorting lumber on the basis of its moisture content. The moisture content is determined by inserting the prongs of the meter in the back of the piece somewhere near the center. This avoids marring the face of the board when the metallic terminal points are inserted. The electrical methods are the only practical means thus far developed by which the moisture content of finished woodwork in place can be determined without serious injury to the wood.

c. Methods of determining moisture content in

timbers. Since wood acts as a resistance element in the electrical circuit of a moisture meter, the current flowing between electrode needles will follow the path of least resistance which is the path with the greatest amount of moisture. Thus, a meter with uninsulated electrodes will show the moisture content of the wettest wood contacted by the electrode needles. Therefore, electrical meters should not be used on lumber that has been recently wet by rainfall since the meter may indicate too high of a moisture content. Meters equipped with insulated needles are preferred. The insulated needles respond only to the moisture content of the wood in contact with the uninsulated tips, hence, it is possible to take readings at different depths to obtain a more complete indication of the moisture distribution. If moisture meters with uninsulated needles are not available, the moisture content at a depth of one-fifth of the thickness of a board will be nearly equal to the average for the entire cross section.

15 September 1979 DOD 4145.19-R-1

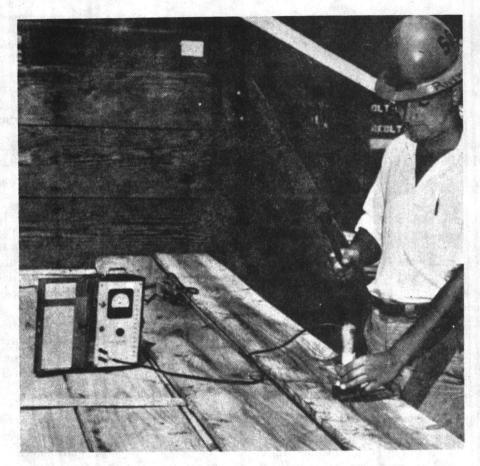


Figure 5-16. Moisture meter being used to determine the moisture content of lumber during unloading operations.

#### 5-111. Kiln Drying

a. Semidry lumber. Semidry lumber showing some visible evidence of decay either should be kiln dried to prevent further ravages of decay and then stored in the same way as uninfested dry lumber or, preferably, it should be used up as soon as possible after receipt at the installation. The choice on bundling this type of lumber will depend on the

extent of visible decay.

b. Wet lumber. Lumber that is wet and showing visible evidence of decay should be immediately kiln dried to prevent further deterioration. If a kiln is not available the lumber should be used as quickly as possible. If the lumber can be kiln dried, then its subsequent handling will be similar to the handling of semidry infested lumber.

## Section 2. AMMUNITION AND EXPLOSIVES

	Paragraph
Purpose and scope	5-201
Purpose and scope	5-202
General	
Facilities	
Storage plan	5-204
Storage plan	5-205
Warehousing	5 000
D : i	5-200
Care of ammunition in storage	5-207
Care of ammunition in storage	5 208
Shipping	5-200

그 이용하는 것이 얼마나 가장 하는 것이 되었다. 그는 그 사람들은 그는 그 그를 가장 하는 것이 없다.	Paragraph
Locator system	5-209
Inventory	5-210
Safety	5-211

## 5-201. Purpose and Scope

The purpose of this section is to establish standard policies and principles governing the receipt, storage and issue, and care and preservation of ammunition and explosives at Department of Defense establishments.

#### 5-202. General

- a. These policies and principles are general in nature. Contingencies not covered will require the exercise of discretion and judgement in complying with the requirements of this section. Detailed operational procedures are not included but will be found in the publications of the Military Services. The Department of Defense Explosives Safety Board also publishes information concerning ammunition and explosives. Military ammunition and explosives are products of war and as such are manufactured primarily to kill and destroy. Such products have inherent hazards that affect all handling operations from time of manufacture until expended in service. With a knowledge of the hazards involved, the first and foremost principle that should be considered in any discussion of ammunition storage is that ammunition and explosives must be handled, stored and shipped in a manner that will afford optimum protection against deterioration, accidental ignition and detonation.
- b. A comprehensive safety training program should be established and administered at all military establishments where ammunition and explosives are stored. Safety organizations should be established for the purpose of supervising a single coordinated Safety Program including Safety Committee activities, accident prevention inspection and correction of day-to-day unsafe conditions and practices; employee training programs, publicity, accident cause investigation and first aid training. Diligent and vigorous efforts should be made to prevent and eliminate hazards and unsafe practices. The planning of the handling of ammunition for any reason must be performed carefully and by competent experienced personnel to insure that all hazards have been recognized and that adequate safeguards are provided.

#### 5-203. Facilities

- a. Magazine. Any building or structure, except an operating building, used for the storage of explosives, ammunition, or loaded ammunition components (chap. II, sec 1).
- b. Igloo magazine or arch-type magazine. An arch-type earth-covered magazine which may be constructed of concrete, or metal.
- c. Earth covered magazines—barricaded. Earth covered magazines which are so located that the earth-covered sides or backs are toward each other, or the front of one magazine with a door barricade is toward an earth-covered side, back, or barricaded front of another magazine.
- d. Earth covered magazines—unbarricaded. Earth covered magazines which are so located that the front of one magazine without a door barricade is toward an earth-covered side or back of another magazine.
- e. Standard igloo magazine. An earth-covered, reinforced concrete, arch-type magazine, with or without a separate door barricade, constructed according to approved standard service drawings.
- f. Special type magazines. Include but are not limited to.
- (1) Magazines with steel (instead of concrete) arches and steel, wood or concrete end walls.
- (2) Earth-covered, reinforced concrete magazines (such as Corbetta, dome or box type).
- g. Aboveground magazines. Any type of approved magazine which is not earth covered. They may be either barricaded or unbarricaded.
- h. Open storage. This type of storage is undesirable and should be only an emergency expedient when authorized by the controlling authority.

## 5-204. Storage Plan

A storage plan will be prepared and maintained on a current basis by each establishment storing ammunition. The storage plan should include as a minimum:

- a. The quantity and kinds of buildings in which ammunition and explosives are stored.
- b. The quantity distance restrictions on each storage building and storage site, loading dock, holding

yards and areas, installation rail classification yards, and ammunition work shops and operating sites.

#### 5-205. Warehousing

a. General. Preparation for receipt of ammunition and explosives should commence as soon as it is known that ammunition will be received. Storage compatability charts or tables, explosive weight content of the item and other characteristics of the item being received should be checked prior to determining the storage location for the item. Within the restrictions mentioned above, a storage building should be selected to effect maximum utilization of space. When dunnage is required, a type of dunnage should be selected that will assure stack stability, proper ventilation, and ease in handling and subsequent rehandling of the item.

b. Quantity-distance tables. Quantity-distance tables established by the appropriate Military Service will govern quantities of ammunition or explosives that may be stored in a single location based on the distance the storage site is located from other storage sites, public highways and railroads, inhabitated buildings, air fields, runways and boundary

lines, utilities and utility lines.

c. Storage compatability charts or tables. The factors which determine grouping are; effects of explosion of the item, rate of deterioration, sensitivity to initiation, type of packing, effects of fire involving the item and quantity of explosive per unit. Storage compatability groupings should not be confused with hazard classifications established for quantity-distance requirements. The appropriate Military Service will issue detailed storage compatability groupings.

#### d. Aisles.

(1) Inspection aisles should not be maintained except when specific instructions to the contrary are issued by the controlling authority.

(2) Operating aisles widths in magazines should be adjusted to conform to widths required for specific types of available forklift equipment or other operational needs.

(3) Aisles should be provided for use of handling equipment, inventory, surveillance, or as necessary to distribute the load within the floor capacity, ventilation, etc., as prescribed by the appropriate Military Service. Aisles should not be maintained solely for inventory purposes, however, if storage density will not be adversely affected, storage is to

be arranged to facilitate material inventory whenever possible.

e. Space layout and utilization.

- (1) The military services are responsible for publishing instructions in the form of drawings, sketches, narratives or combinations of these media on the approved methods of storage of all types of ammunition.
- (2) Having given due consideration to safety and preferred magazine usage, the controlling authorities should establish controls which will assure storage in such a manner that most effective usage of existing storage space will result.
- f. Preferred storage for certain ammunition and explosive items. This list is not complete. More details may be obtained from publications of the appropriate military service.
- (1) *General*. Ammunition will be stored in accordance with published storage compatability charts or tables.
- (2) Storage of small arms ammunition. Small arms ammunition may be stored in above ground magazines, providing service security requirements are satisfied. Where there is more than one type available, the type which offers the most protection against fire and pilferage should be selected.
- (3) Storage of bombs with HE components. Bombs should be stored in approved earth-covered magazines where possible.
- (4) Storage of separate-loading shell or projectile. Separate loading shell or projectile should be stored in earth-covered magazines where possible.
- (5) Storage of pyrotechnic items. Pyrotechnic items will be given preferential storage in magazines which are well ventilated, dry and in good repair.

g. Storage aids.

- (1) General. Ammunition should be stored and shipped palletized to effect a reduction in handling time. For proper grounding of ammunition and explosives while in storage, reference should be made to applicable publications of the appropriate military service. The following methods of palletization are permitted when authorized by the appropriate military service in the handling, storage and shipping of ammunition:
- (a) Unstrapped pallets. Conventional double-faced pallets.
- (b) Short dunnage. Short dunnage of varying lengths used as horizontal dunnage in lieu of pallets

and where authorized by the appropriate military service drawings.

(c) Palletized unit loads. Applies to an assemblage of a particular commodity, packaged or unpackaged, strapped or tied together in a bundle. When a unit load is strapped or fastened to a pallet, it becomes a "palletized unit load." This method is commonly employed for the storage and shipment of separate loading shell or projectile and should be used to the maximum extent possible for storage and shipment of other items.

(2) Box pallets.

- (a) Small quantities of ammunition may be retained in box pallet storage to meet current issue demands.
- (b) Box pallets may be used for storage of irregular shaped, hard to stack and crushable items such as container packed items, fiber containers, bagged goods, loose small items, etc.

(3) Dunnage.

- (a) Dunnage should be placed beneath the first layer of ammunition or explosives to keep the ammunition or explosives from coming in contact with the floor or ground. The type dunnage is specified on agency storage drawings, sketches and/or narratives.
- (b) Steel racks which are grounded may be used for storage of separate loading shells, bombs and other cylindrical objects of ammunition.
- h. Storage of pilferable ammunition. Appropriate security procedures as set forth in military department/agency regulations will be applied for all small arms ammunition, demolitions, and explosives such as blasting caps, igniters, detonators, fuses and related items. The use of special locks and keys is required as directed by the controlling authority. Key and lock control procedures as set forth in appropriate military department/agency regulations will be applied.
- i. Storage of ammunition bearing security classification of Confidential or higher. The responsibility for taking the proper security measures involving the receipt, storage and issue of classified material will rest with the commander of the installation involved. Structural standards, key and lock control and applicable security procedures should conform to standards set forth in DOD 5200.1–R and appropriate military department/agency regulations.
- j. Storing and stacking of dunnage. The storage of dunnage in a permanent open storage site should

conform with the provisions of section 1 of this chapter so far as conditions permit. The location of dunnage yards will be governed by regulations published by the appropriate military service.

k. Fusible links on magazines. Fusible links will be listed on the current approved list published by Underwriters Laboratories, Inc., or other recognized testing laboratories. The melting point will be between 155° and 165° F. with a minimum rated breaking strength of 20 pounds for the door ventilator link and 8 pounds for the rear-stack ventilator link. Fusible links will not be painted.

l. Rewarehousing. Rewarehousing of ammunition will be kept to the minimum consistent with safety and operational needs.

m. Termite control.

- (1) One method of controlling subterranean termites in ammunition magazines is to provide a layer of poison soil under the slabs or around footings during construction. This principle may also be applied to structures already in place.
- (2) Earth-covered magazines will be treated only when vacant. If necessary, one section at a time may be treated.
- n. Protection against moisture damage. Every effort should be made to protect wood boxes from excessive moisture, as moisture increases the possibility of attack by various types of fungi, particularly mildew. Wood boxes of ammunition exhibiting fungi should be stacked on a pallet in a manner that will provide for air circulation around the boxes. Use of dunnage between layers is a method of allowing for air circulation.

## 5-206. Receiving Rail Cars and Motor Vehicles

Rail cars and motor vehicles containing ammunition and explosives received at military establishments will be inspected for sabotage, mechanical defects and condition of the loading at an established inspection point. All shipments received in damaged or otherwise unsatisfactory condition because of deficiencies such as improper preservation, packing, or marking will be reported on DD Form 6 (Packaging Improvement Report) in accordance with AR 700–58/NAVSUPINST 4030.29/AFR 71–3/MCO P4030.29A/DLAR 4145.8, or SF 361 in accordance with AR 55–38/NAVSUPINST 4610.33A/AFR 75–18/MCO 4610.19B/DLAR 4500.15.

## 5-207. Care of Ammunition in Storage

a. It is the responsibility of the commander of an

installation to maintain stocks of ammunition in an issuable condition. When it becomes known that there is a need to perform a preservation operation, the commander should schedule the operation in accordance with the department policies and in such a manner that required preservation is accomplished with a minimum of delay.

b. Proper type storage for ammunition to afford adequate protection should be selected in accordance with policies and regulations of the appropriate military service.

c. Incoming ammunition should be inspected to determine condition and whether adequate preservative protection has been applied. Those packages of ammunition which have been opened and are being returned to the installation as excess should be cautiously checked to determine further serviceability and preservation requirements.

d. Inspections of ammunition in storage should be made to determine if the preservatives and protective measures are adequate. A definite inspection schedule should be established and pursued.

e. Proper preservation and cleaning methods and procedures will be established and published by each military service.

## 5-208. Shipping

- a. General. Ammunition shall be packaged in the containers prescribed by the drawings and specifications for the specific stock number involved. In addition, the individual departments publish standard carloading and truckloading drawings, sketches and narratives in compliance with Department of Transportation (DOT) and US Coast Guard regulations. Other requirements are specified by AR 55–355/NAVSUP PUB 444(REV.)/AFM 75–2/MCO P4600.14A/DSAR 4500.3 (Transportation and Travel Military Traffic Management Regulation)).
  - b. Preparation for delivery.
- (1) Shipping activities will comply with DOT and departmental regulations, whichever are more restrictive.
- (2) All ammunition shall be loaded in accordance with the applicable outloading drawings and standards. Where such a drawing or standard does not exist, guidance contained in Bureau of Explosives Pamphlet Nos. 6, 6A and 6C shall be followed. These pamphlets can be obtained from Bureau of Explosives, Association of American Railroads, 1920 L Street N.W., WASH, DC 20036.

(3) All shipments will be documented and marked in accordance with DOD Regulation 4500.32–R, Military Standard Transportation and Movement Procedures, and MIL-STD-129, Marking for Shipment and Storage.

(4) Certification for shipment by military air will be made on DD Form 1387–2, Special Handling Data/Certification, as set forth in AFM 71–4/TM 38–250/NAVAIR 15–03–500/MCO P4030.19. For shipment by commercial aircraft, Restricted Articles

Tariff No. 6 is applicable.

(5) Authorized deviations from DOT regulations are issued in the form of special permits. These permits remain in effect for the period specified. Requests for new permits and renewal of existing permits are made through the cognizant Inventory Control Point (ICP).

(6) Ammunition lot integrity should be maintained in storage and shipment from the time of manufacture and assembly through the supply action to troops. Lots should not be mixed in storage and shipment

and shipment.

(7) Placards should be placed on the outside of both rail car doors, indicating on which side of the rail car the documents are to be found.

- (8) Components of DOD will give technical aid and assistance to rail and motor carriers in the event of an incident involving explosives and ammunition. All such incidents will be reported to the agency administering the installation rendering the aid in conformance with regulations of the appropriate military department.
- (9) Lumber and nails used for blocking and bracing of shipments will be of the size, variety grade and specifications approved by DOT, Bureau of Explosives and the individual department drawings, sketches or narratives.
- (10) Adequate safeguards will be taken to insure that ammunition being shipped agrees with the item and condition specified on the shipping directives.
- (11) Preparation for intransit security should conform to standards as set forth in appropriate military department/agency regulations for shipment of classified and/or sensitive material.

### 5-209. Locator System

Locator records will be established at all military establishments where ammunition and explosives are stored. There should be two records established which can be crossreferenced—one should be a record of each lot of ammunition and the locations in which it is stored (the ammunition lot record cards may be used as this part of the locator system), the second record should be a planograph for each storage building or a loose leaf book by magazine number on which is indicated its contents.

## 5-210. Inventory

Detailed inventory procedures are prescribed by the individual DOD Components.

### 5-211. Safety

- a. General. An integral part of all ammunition handling operations is consideration for the safety of personnel, property, ammunition, and explosives. It is the policy of the Department of Defense that its agencies establish adequate controls consistent with a safe and efficient operation. The controlling authority is responsible for insuring that safe practices are being observed in all operations in which ammunition and explosives are handled. That line of responsibility remains unbroken until it reaches that person who handles the item.
- b. Safety rules. Each military service is responsible for the publication of safety rules, regulations and procedures to be followed in the handling of ammunition.
- c. Posting instructions. General instructions governing the storage and care of explosives should be posted in each magazine and building where ammunition and explosives are stored. These general instructions will include as a minimum the following:
- (1) Always handle explosives and ammunition carefully.
- (2) Remove dirt, grit, and foreign materials from containers and ammunition before placing in storage.
- (3) Do not store explosives and ammunition in damaged containers.
- (4) Keep all containers in magazine effectively closed.
- (5) Store each lot separately. Make the piles stable. Provide for a free circulation of air to all parts of the pile. Where dunnage is required to keep containers and ammunition off the floor, metal dunnage is preferred.
- (6) Do not open, repair, pack, or repack containers in or within 100 feet of magazine, except as specifically authorized.

- (7) Do not keep empty containers, tools, or other materials in magazine containing ammunition or explosives except as specifically authorized by controlling authority.
  - (8) Cleanliness and order must be maintained.
- (9) Use only electric lights approved for use in magazines.
- (10) Do not smoke, or bring matches or other flame or spark producing devices into magazine.
- (11) Do not allow unauthorized persons in or near magazine.
- (12) Keep magazine sparktight, with ventilators well screened, and no openings around doors or foundations.
- (13) Keep doors locked when magazine is unattended. Close doors when vehicle is approaching platform unless vehicle is equipped with spark arrestor on exhaust.
- (14) Keep the 50-foot cleared space around above ground magazines free from combustible materials and keep adequate cleared space around igloo magazine ventilators.
- (15) Two or more doors, when available, must be open when personnel are working in a magazine containing explosives or ammunition.
- d. Standard handling methods. Standard handling methods, consistent with the safety rules and regulations of each military service, should be established for handling all serviceable ammunition packed in accordance with agency approved drawings and specifications. For all items not packed in accordance with agency drawings and specifications or an item considered to be extremely hazardous, a standard operating procedure should be developed and then approved by the commander of the installation prior to starting the operation. As a minimum, standard operating procedures should be prepared for all preservation, renovation, and modification operations.
- e. Educational program. An educational program should be instituted in each installation to develop and maintain employees' interest in the safety program and to train employees in safe practices and safe procedures. Some of the mediums available for employee education are posters, bulletin boards, score boards, special exhibits, safety contests, articles in establishment publications, safety rules, hand-out cards, pamphlets, warning signs for specific hazards, suggestion system, essay contests, sound slide films or motion pictures for groups. Appropriate "off the job" accident pres-

entation features should be included in the program, and the safety organization should stimulate the interest of and cooperate with outside agencies concerned with this phase of the accident prevention program.

f. Indoctrination of personnel. Before any new employee is placed on the job, he/she should be made cognizant of specific safety rules and regulations of the installation and the military service and in consonance with the duties to be performed. insofar as is practicable. The instructions concerning the performance of new duties should be planned in advance so that the instructor can present them in an orderly fashion. Instructions to each worker should be clear and definite. A continuous program of follow-up, reinstruction and enforcement of regulations and procedures with each employee should be maintained.

## Section 3. VEHICLES (TRACKED AND WHEELED) AND ARTILLERY

	Paragraph
Scope	5-301
Storage areas	5-302
Storage patterns	5-303
Fire protection	5-304
Methods for storage, receipt, and issue	5-305

## 5-301. Scope

This section prescribes policy for the storage of wheeled and tracked vehicles and artillery at Department of Defense installations. Detailed operational procedures will be prescribed, as deemed necessary, by the individual military service/agency.

### 5-302. Storage Areas

#### a. General.

(1) Storage areas for vehicles and artillery may be located either under cover (as in a warehouse) or in the open. The type of storage area in which any specific type of vehicle or artillery piece should be stored will be determined by such factors as the degree and length of environmental exposure the item will satisfactorily withstand, the size and weight of the item, the ease with which the item may be handled, the availability and type of vacant storage space, and the requirements imposed by the owning military service/agency.

(2) Vehicles and artillery, being relatively heavy and bulky, are difficult to handle. Therefore, storage areas selected for such items should be in proximity to rail sidings and truck loading facilities; this reduces the handling time and travel distance incident to the receipt, storage, and shipment of

these items.

(3) Sufficient space should be provided either within or adjacent to the storage area to serve as a preparation area for shipments of multiple item quantities which may require such actions as the marshalling of items for marking, addition of onvehicle equipment items, inclusion of log books, and preshipment inspection.

(4) Once items have been placed in storage, control should be maintained through use of a locator system employing a grid layout as defined in chapter III. section 3.

## b. Covered storage areas.

- (1) There are three general types of covered storage space which may be used for the storage of vehicles and artillery: controlled humidity (CH) warehouses; general purpose warehouses; and other covered space such as sheds and transitory shelters. Though large items such as vehicles and artillery are expensive in terms of the space they occupy, there remain significant advantages in using covered space for the storage of such items. Some of the advantages to be gained, to varying degrees dependent upon the type of covered storage space used, are as follows:
- (a) Ability to store material in assembled condition, requiring only minimal effort to ready it for issue.
- (b) Reduced requirement for item preservation.
- (c) Extended storage with reduced requirement for inspection and subsequent represervation.
- (2) When planning for the storage of vehicles and artillery in covered storage areas, factors to be considered include the floor load rating of the applicable storage area and the size, quantity, and location of the doors in the structure(s) involved.
- (3) CH storage space provides a high degree of protection to prevent item deterioration. To the extent this space is available and considering its necessary use for other critical material, this type of storage is also suggested for artillery, wheeled trucks and truck-tractors, and tracked combat, as-

sault, and tactical vehicles. It is recommended that items equipped with fire control (critical optics) components and other costly to preserve components be furnished CH storage. When determining what type of storage space to use for a specific application, it must be remembered that CH space is one of the most costly types of storage space to construct and maintain.

- (4) General purpose storage space, though obviously less advantageous than CH, still offers substantial protection from the elements.
- (5) Transitory shelters may be used for the storage of vehicles and artillery.
- (6) Of all the types of covered storage space, sheds offer the least amount of protection from the elements since one side is normally open. When constructing sheds, care should be taken to assure that a closed side of the shed faces the direction of the prevailing wind to minimize the effects of rain and snow.
- c. Open storage areas. Use of open storage areas results in the exposure of material to the elements; hence, the material may deteriorate from exposure to sun, rain, snow, dust, and sand. Exposure to dust or sand (especially if windblown) may result in difficulties such as clogged fuel lines and filters, stripping of paint or other protective materials from exposed surfaces, pitted glass, and malfunction of mechanical parts. For these reasons, plus the advantages noted earlier for covered storage areas, the use of open storage areas is not recommended for wheeled and tracked vehicles. However, since this material must oftentimes be stored in the open for a variety of reasons, the following actions should be taken to assure achievement of the best possible results:
- (1) Increase the degree of protection over what is required for items placed in covered storage areas.
- (2) Increase the frequency of inspection over what is required for items placed in covered storage areas. Also, consider increasing the thoroughness of the inspection.
- (3) For some parts of certain vehicles (e.g., cargo trailer beds, dump truck bodies, etc.), take precautionary action to reduce the accumulation of snow or rainwater. Such accumulation may result in the corrosion of both painted and unprotected surfaces on these parts of this type of vehicle. The probability of this occurring may be reduced by elevating one end of the vehicle or applicable

vehicular component. Cargo trailers with tailgate assemblies which allow moisture to run off should be elevated at one end (fig. 5–17). Dump truck bodies should be maintained in a slightly elevated position by inserting a 4- by 4-inch block between the dump body and the vehicle's frame. The tailgate may also require blocking to open slightly. Exposed unpainted and machined surfaces of the hydraulic ram should be preserved, then wrapped in accordance with the requirements of the applicable military service/agency.

(4) Wheeled and tracked vehicles in open (or covered) storage need not be blocked off the ground. However, vehicles which must be stored in open areas, should be placed on the most favorable terrain available to prevent this equipment from resting in mud or water. Where changing terrain or draining patterns cause this condition to exist, the equipment should be moved to a more desirable area, or some type of fill (gravel, stone, etc.) spread, or landing mat positioned to provide a more proper ground condition.

### 5-303. Storage Patterns

- a. General. Whenever material is placed within a storage area, the manner in which items are located in relation to one another forms a pattern. This is referred to as a "storage pattern." The backto-back and the block storage patterns are two efficient patterns for use in the storage of vehicles and artillery.
- (1) The back-to-back storage pattern consists of two rows of material placed in proximity to one another as shown in figure 5–18 and 5–43. Note that an aisle separates each double row so that any item is accessible without the need to move any other item.
- (2) The block storage pattern is made up of more than two rows of material placed in proximity to one another as shown in figure 3. With the block pattern, depending upon the depth of the block, access to a specific item may require that other items must be moved.
- b. Selection of the proper pattern. Many factors must be considered when determining the best storage pattern to use in a specific situation. Factors which must always be considered include, but are not limited to, the following:
- (1) Efficient space utilization. A block storage pattern will make more efficient use of space than will a back-to-back pattern since the block pattern

requires a minimal quantity of aisles. Although block patterns do result in more efficient use of space, consideration of other factors discussed below may dictate the use of a back-to-back pattern. However, a specific single type of pattern need not be used throughout an entire storage area; it is permissable to use a combination of both.

(2) Type of storage area. Normally, there is nothing which will physically inhibit the use of either type storage pattern in an open storage area. However, since open space is at less premium, the back-to-back pattern is usually used so as to minimize materials handling. In a covered storage area, the need for specific aisle placement and the location of firewalls and building supports may not allow the use of a block pattern.

(3) Item mix. When a large quantity of a single item is to be stored, the use of a block pattern is usually the logical choice, if facility design will permit. Where small quantities of different items are involved, a back-to-back pattern generally proves to be more efficient.

(4) Item issue requirements. If the issue of each piece (vehicle or artillery piece) is controlled by serial number or a similar control factor, the use of a block storage pattern is not the logical choice unless the precise sequence in which pieces will be issued can be accurately predetermined. The requirement for a single piece in the center of a block pattern could necessitate the movement of many pieces so that the desired piece may be obtained.

(5) Care of supplies in storage. The care of supplies in storage program (chap. III, sec 6) for vehicles and artillery specifies that, under certain conditions, vehicle drive trains or artillery recoil mechanisms be exercised periodically. In some instances, this can be accomplished through use of a mechanical device and, when such a device is used, sufficient space must be made available between items to allow the device to approach the item to be serviced. This may also be true when inspection defines the need to represerve material.

c. Planograph. Planographs should be used when planning and controlling space utilization in the storage of vehicles and artillery (see chap. III, sec 3).

#### 5-304. Fire Protection

Fire protection policy is not prescribed in this section and will be that stipulated by the individual services and chapter VI of this regulation.

## 5-305. Methods for Storage, Receipt, and Issue

a. Storage.

(1) Stacking. Since vehicles and artillery are relatively bulky items, they occupy considerable floor space within covered storage facilities. Economical and efficient use of such facilities may be appreciably enhanced if these items are stacked to utilize available cubic space. Stacking methods vary with the weight, dimensions, and type of item to be stacked.

(a) Except for a few items which may be stacked without need for racks or a substantial quantity of supporting dunnage, vehicles should only be stacked in covered storage areas possessing a level, surfaced floor. The use of bare earth, which is normally uneven and highly compressible, can result in an unbalanced stack. When stacking vehicles or trailers for storage or when storing vehicles or trailers loaded with other material it may be necessary to place blocks between the axle and frame to relieve pressure on the springs.

(b) Some items, such as certain types of trailers, may be stacked inverting one item and placing it over another as shown in figure 5–20. Normally, under these conditions a relatively stable stack is produced which will allow storage on slightly uneven surfaces such as dirt floors or open storage areas. When this method of stacking is used in open storage areas, the undercarriage of the uppermost item is exposed to the elements and the degree of preservation should be increased accordingly.

(c) Vehicles and artillery should not be stacked in open storage areas, except as noted in (b) above. The costs for materials handling, racks, and dunnage far outweigh any potential benefit since open storage space is the least costly of all storage space.

(d) When stacking vehicles and artillery in covered storage areas, the floor load rating of the area must be known. The combined weight of all items in the stack, plus the nominal additional weight of stacking aids (racks, stands, or dunnage), must not exceed this rating; otherwise, damaged floors, structural damage, and damage to the stored material may result.

(e) A variety of MHE types may be used to stack vehicles and artillery. The type required must be determined prior to making the decision to stack. Some of the heavier MHE with sizeable lifting capacities may be too large to move through warehouse doors, or may result in a need for oversize

aisles. This would reduce the savings to be derived through stacking. The various types of MHE which may be used for stacking are covered elsewhere in this section.

(f) To facilitate the actual stacking of vehicles and artillery, racks, stands, or dunnage may be used. The cost of these aids rises in direct relation to their weight capacity. Racks and metal stands may be obtained from commercial sources while wood stands and precut dunnage may be fabricated locally. Items which experience a relatively rapid rate of turnover should not be considered as prime candidates for stacking since the increased handling costs for such items will tend to negate the short term space saving.

(q) Racks may initially be the most costly of the three types of stacking aids, but their cost may also be more rapidly offset by their minimal incidence of repair and the limited requirement to handle and rehandle them during stacking operations. Most racks are designed to accommodate one general type or size vehicle. They are constructed in one of three basic configurations: roll-through, cantilever, and suspension. Roll-through racks are well suited to the stacking of lightweight vehicles (fig. 5-21); these are basically commercial pallet racks modified by adding channels upon which equipment may roll forward when inserted in the input end of the rack. Since roll-through racks may make up long rows and are both loaded and unloaded from the ends, they may be placed close together in a block pattern with minimal aisle requirements. This configuration will enhance the ease with which the first in/first out principle may be practiced. The second type of rack is of cantilever design (fig. 5-22). This type of rack consists of a pair of stanchions fitted with cantilever type "arms" which support the stored item from underneath. The cantilever type of rack may be used to stack items considerably heavier than those which may be stacked on rollthrough racks. The suspension type rack (fig. 5-23) consists of a pair of stanchions fitted with brackets from which lightweight or mediumweight vehicles may be suspended by their bumpers, lifting eyes or pintles.

(h) Stands may be constructed from wood or metal. Many are built in a "sawhorse" configuration and, depending upon both their design and the materials from which they are constructed, they can support items of nearly any weight (figs. 5–24 and 5–25). Unlike racks which support each item inde-

pendently (no requirement for the lowermost item to support the superimposed weight of any items stored above it), stands support the weight of all items above them. The stacking procedure involves placement of the stands directly upon the lowermost item in the stack, then placing the next item on top of those stands. Whenever stacking vehicles or artillery pieces on stands, the stands used must be sufficiently strong and so placed so as to avoid instability of the stack and damage to the suspension of each stacked item.

(i) In some instances, dunnage may be used for the same purpose of racks and stands. When properly used, dunnage permits the stacking of extremely heavy items (fig. 5–26). Dunnage material must be carefully chosen to assure that it possesses sufficient strength to support the weight to be superimposed upon it. Improperly chosen dunnage may be too soft, resulting in compression and the inability to remove the stacked items, or it may be brittle and break, resulting in an unstable stack. Properly chosen dunnage can be an easily fabricated, safe, and economical stacking aid.

(2) Fork extensions and adapters. By adding fork extensions to the common forklift truck (chap. IV, sec 2), it becomes possible for the truck to handle larger and bulkier items which it might otherwise not be capable of handling. Considering the extended load centers involved, care must be taken to assure that the forklift truck is not overloaded. Fork adapters may also be used for handling some vehicles and artillery pieces. Fork adapters are similar to fork extensions except that they are designed to accommodate specific types of styles of undercarriage configuration. Figures 5-27 and 5-28 show two different types of forklift adapters while figure 5-29 shows an adapter in use. As with extensions, when using adapters and extended load centers are involved, caution must be exercised to assure that the forklift truck is not overloaded.

(3) Towing in storage. Towing offers a distinct advantage over handling by MHE since, in many instances, towing may be accomplished by means of nonspecialized equipment already on hand. However, towing is a preferred method of movement only when item preservation will not be adversely affected by moving the item on its own wheels or tracks. Care must be exercised in the selection of a towing vehicle with adequate capacity (drawbar pull). A towing vehicle may be capable of moving an item on level ground while being incapable of

moving the same item up even a slight grade. Such conditions will cause damage to the towing vehicle. The same logic applies when towing items over rough, uneven terrain. Considerably more effort must be exerted when towing an item over rough terrain than when towing the same item on a smooth, level surface since the towed item's drag (inertia) is more on rough terrain. (See chap. IV. sec 3.)

## (4) Towing equipment.

- (a) Prime movers. There are two basic types of prime movers, either of which, when properly outfitted, may be used to tow or push even the heaviest vehicles and artillery. One is a pneumatic tired, diesel powered industrial tractor with fourwheel drive which can operate on rough terrain as well as on improved surfaces (fig. 5-30). The other common type of prime mover is the tracked tractor (fig. 5-31) which can also operate on rough terrain as well as on improved surfaces. However, tracked tractors can damage improved surfaces unless their tracks are filled with rubber track blocks (fig. 5-32).
- (b) Towing medium and lightweight material. Medium and lightweight vehicles and artillery may easily be towed over improved surfaces with a variety of equipment such as warehouse tractors (chap. IV, sec 2), 1/4-ton trucks, 5-ton trucks, etc. Care must be taken to assure that the drawbar pull of the equipment used is not exceeded ((3) above). As the weight of the item to be towed increases and the quality of the terrain over which the item must be towed diminishes, consideration should be given to the use of a prime mover.
- (c) Towing aids. Cables and chains of various lengths and strengths may be equipped with fittings which will allow them to be used in towing vehicles and artillery. However, since both chains and cables are flexible, an extra man may be required to steer or apply the brakes of the towed item. This need may be circumvented by use of a tow bar (fig. 5-33). Tow bars which are strong enough to allow both towing and pushing permit positive control of the towed item by the operator of the towing vehicle.
- (5) Item disassembly. Unless specifically approved and designated by the owning agency, the disassembly of vehicles and artillery for the express purpose of gaining storage space is prohibited, except as noted in b(3) below. If disassembly to some extent is deemed necessary, full justification will

be furnished to the owning agency as a prerequisite to gaining approval for such action. As a minimum. the justification for desired disassembly action will include all pertinent costs, the time required for item reassembly, and the method(s) of maintaining item integrity.

(6) Exercising. The drive trains of some vehicles and the recoil mechanisms of some artillery pieces must be exercised on a periodic basis (stipulated by the owning agency) to prevent deterioration in storage. In the case of vehicles, exercising may be accomplished by either running the vehicle or by the application of an exercising device consisting of a set of batteries mounted on a trailer. The batteries are attached to the vehicle's starter motor which can then move the drive train without need of starting the vehicle's engine. Running the vehicle destroys preservation; the use of an exercising machine does not. Consequently, exercising machines are recommended for this action. Artillery recoil mechanisms should also be exercised with an exercising machine (fig. 5-34) since manual exercising is for the most part ineffective.

(7) Inflation of tires. When vehicles and artillery are placed in storage, all tires (mounted and unmounted alike) will be inflated and kept at their normal operating pressure. Tire preservation should be as specified in paragraph 5-617.

b. Receipt and issue.

(1) In some cases, special equipment such as heavy duty cranes may be required to facilitate the loading/unloading process. However, all receiving activities may not be equipped with such special handling devices. Consequently, the shipping activity (point of shipment origin) must determine and allow for any undue handling difficulties that may be created at the destination. Such difficulties may sometimes be avoided by merely changing the placement of items on the conveyance or by changing the type of conveyance to be used.

(2) Vehicles and artillery may be shipped on any commonly used conveyance (e.g., railcar, tractor-trailer, etc.) in accordance with loading drawings, AAR rules or other applicable carrier requirements. One additional method of shipping vehicles is via the driveaway method where the vehicles are actually driven to their destination. Driving a vehicle to its destination will prevent the application of preservation by the shipper or will destroy any preservation previously applied to its engine and drive train. This can mean that a port

of embarkation or other consignee may be required to represerve the item before it is transshipped or stored. For shipments of some types of powered vehicles, these disadvantages may be overcome to some extent by using the piggyback method of shipment depicted in figure 5–35.

(3) Many vehicles and artillery pieces possess parts that are prone to damage or pilferage (e.g.. exterior mirrors, easily removed controls, soft-top cabs, on-vehicle equipment items, etc.). Such parts must be protected during both shipment and storage. Small parts may be removed and placed in a protected area such as a vehicle map compartment. Larger parts may be removed, preserved, packed, then securely affixed to the end item by any appropriate means (e.g., strapped with steel banding). Removed bolts, nuts, washers, etc., must be placed in one of their mating parts and secured to prevent their loss. Figure 5-36 shows boxed parts affixed to the exterior of an item awaiting issue. Note that the box has been marked so that it may be readily identified by the ultimate user.

(4) The freight planning operation will take into consideration such factors as proper segregation or consolidation of the items being shipped to assure assessment of the lowest possible freight charges and the effective utilization of available cube on the conveyance. The load pattern in or on the conveyance should be established by taking into account the possibility of partial unloading of material at stopoff points enroute; improper item placement in or on the conveyance may result in a need for much unnecessary handling at such stopoff points. The Official Railway Equipment Register contains information regarding the dimensions and cubic capacity of the railcars owned and operated by individual railroads; this document will prove useful when determining the best load configuration to use when shipping on American railcars. Additionally, some military technical publications provide information as to the quantity of items which may be loaded in or on a specific type of conveyance. Such information, though useful for guidance, will not abridge the requirement for the most practical load configuration within the rated capacity of the conveyance.

(5) When making oversea shipments of vehicles and artillery, the transportation charges are in large part determined by the amount of cubic space occupied by the items being shipped. Therefore, item cube will be reduced to the maximum practi-

cable extent for all oversea shipments. A word of caution: Item cube must not be lowered to the point where it becomes overly difficult for the receiving activity to ready the item for storage or use. The reduction of item cube may be accomplished by, among other things: Lowering gun tubes or artillery pieces to a horizontal position; removing softtop cabs from vehicles and both lowering and boxing the windshield to protect it from damage (fig. 5-37); and, in general, removing or lowering all cube consuming parts on the item being shipped. Another method of reducing cube is to invert one lightweight item, place it over another, and strap the two together with steel banding (fig. 5-20). All parts removed or exposed by such action will be preserved and packed to the extent necessary to protect them from the hazards inherent to shipping and from exposure to the elements.

(6) Cranes are not generally well suited to handling operations within confined spaces in a warehouse. Cranes are particularly useful in handling vehicles and artillery in loading and unloading operations. While a large variety of crane types is available, this does not imply that a large variety is required at any installation. Normally, one or two types in quantities commensurate with workload will suffice, especially if these are made more versatile with a carefully chosen selection of slings and spreader bars (fig. 5-38). The use of slings and spreader bars will also protect the surfaces of the lifted item from marring or crushing. Some of the general types of cranes are discussed briefly below: All of the types discussed are available in a wide range of lifting capacities.

(a) Truck mounted crane. This type of crane (fig. 5–39) consists of a selfpowered crane unit which is equipped with a boom and mounted on a powered truck or truck chassis suitable for highway travel. The truck mounted crane is highly mobile, best suited to operation on a relatively smooth and level surface, and has a lifting capacity which is generally somewhat less than that of the other types of cranes discussed below.

(b) Wheel mounted crane. This type of crane (fig. 5-40) is self-powered and equipped with a boom. The chassis on which it is mounted may or may not be selfpropelled; if it is not selfpropelled, then the entire crane must be towed from one work site to another. A wheel mounted crane that is selfpropelled is nearly as mobile as the truck

mounted crane, yet its lifting capacity is normally greater.

(c) Crawler mounted crane. This type of crane (fig. 5-41), equipped with boom, is mounted on a selfpropelled, track laying (crawler) chassis. Its lifting capacity approximates that of the wheel mounted crane, and it is well suited to operation in unimproved open storage areas. The crawler mounted crane is less mobile than either the truck or wheel mounted type.

(d) Gantry crane. The gantry crane is not equipped with a boom but consists of a hoisting apparatus suspended above the ground by a gantry-type framework. It is a powerful crane of great lifting capacity (some with more than 100,000 pounds capacity). The gantry crane may be immobile, but more commonly it is mounted on rails (fig. 5–42). It is very well suited to loading and unloading operations involving volume handling of very heavy, bulky items.

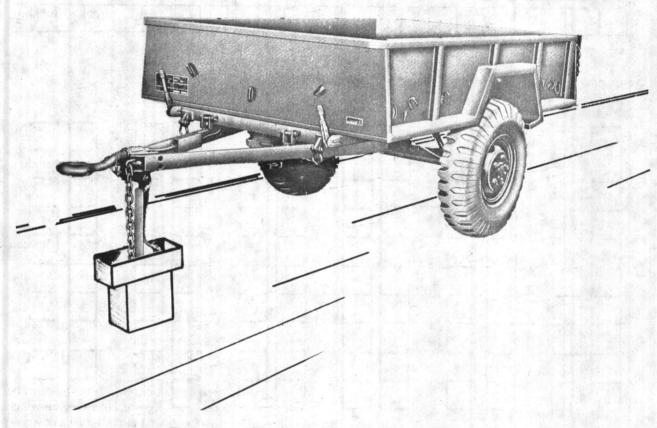


Figure 5-17. End of trailer elevated to promote drainage.

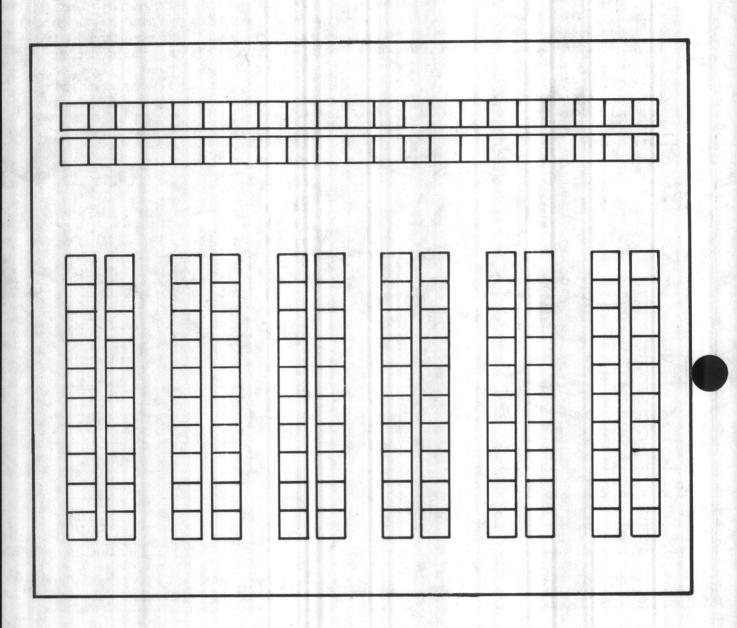


Figure 5-18. The back-to-back storage pattern.

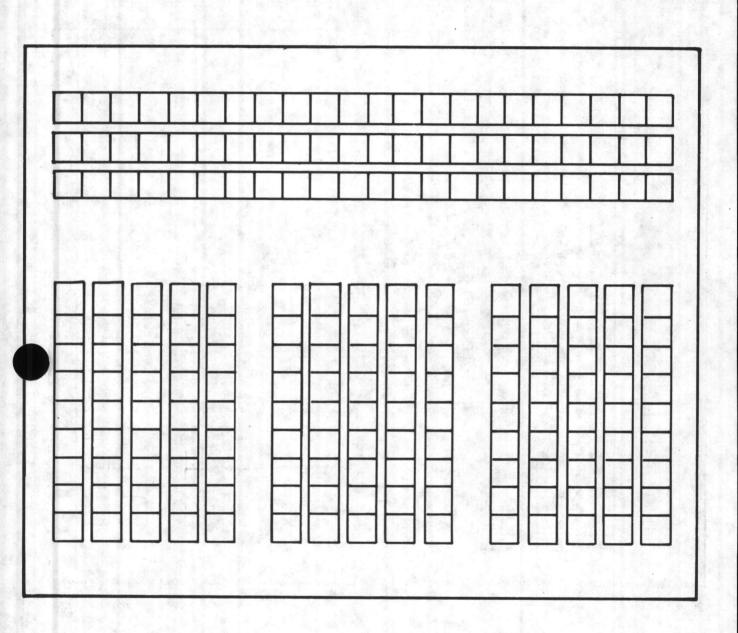


Figure 5-19. The block storage pattern.

DOD 4145.19-R-1 15 September 1979



Figure 5-20. Inverted trailers ready for storage.

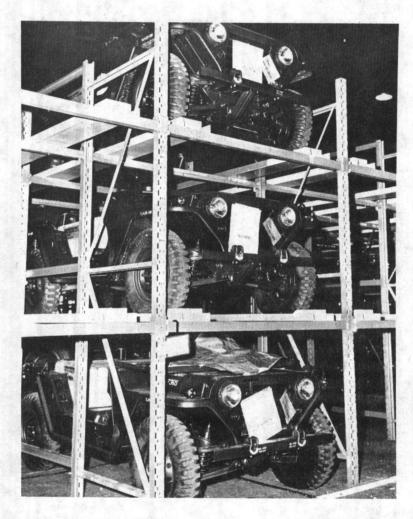


Figure 5-21. Roll-through racks for stacking vehicles in storage.

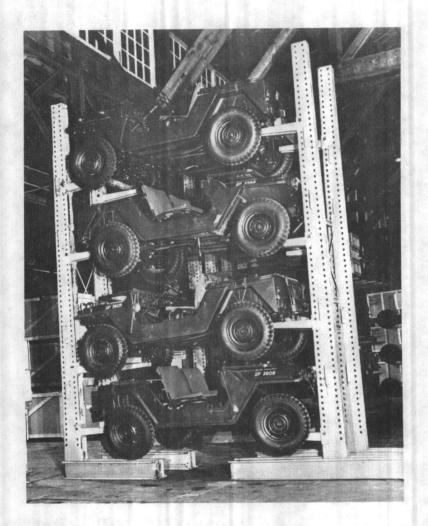


Figure 5-22. Cantilever racks for stacking vehicles in storage.

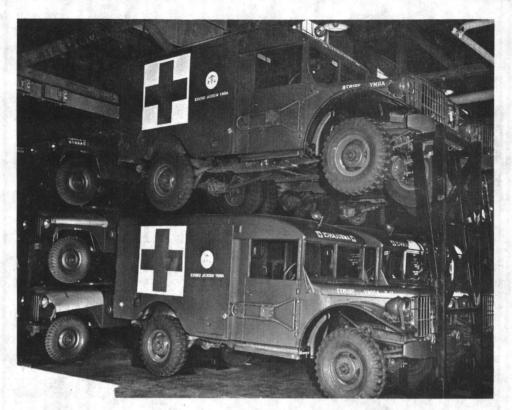


Figure 5-23. Suspension-type racks for stacking vehicles in storage.



Figure 5-24. Wood stands for stacking vehicles in storage.

DOD 4145.19-R-1 15 September 1979

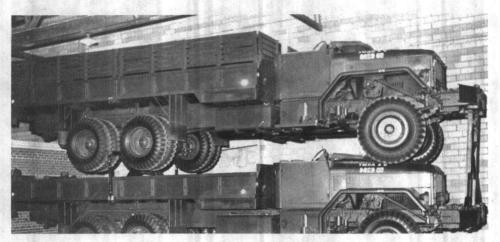


Figure 5-25. Metal stands for stacking vehicles in storage.

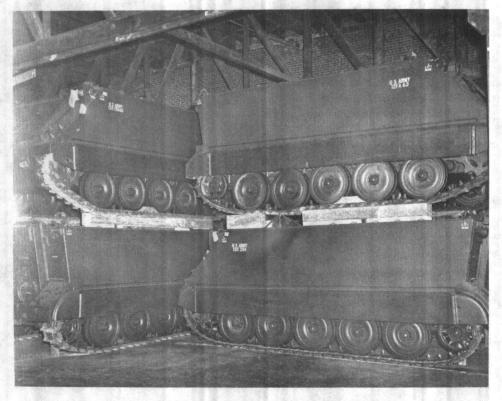


Figure 5-26. Wood dunnage for stacking vehicles in storage.

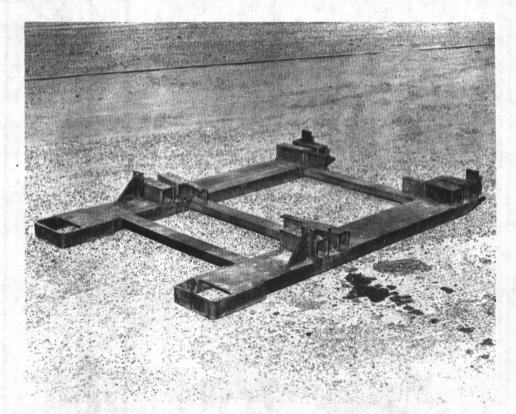


Figure 5-27. Forklift adapter used for stacking M37B1 cargo trucks.



Figure 5-28. Forklift adapter used for stacking M151 trucks.



Figure 5-29. Forklift adapter used to stack an M151A1 truck.



Figure 5-30. Example of a wheeled prime mover.

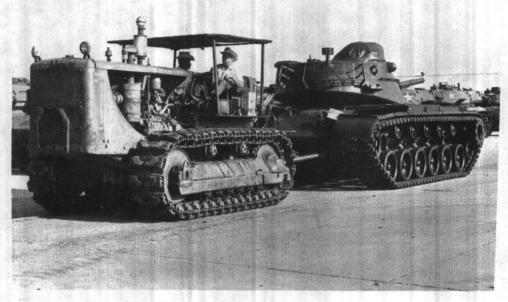


Figure 5-31. Example of a tracked prime mover.

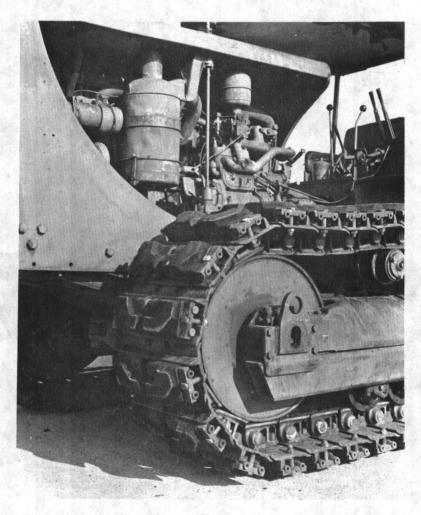


Figure 5-32. Rubber track blocks used to protect improved surfaces.

DOD 4145.19-R-1 15 September 1979



Figure 5-33. A tow bar for use when pushing a vehicle.

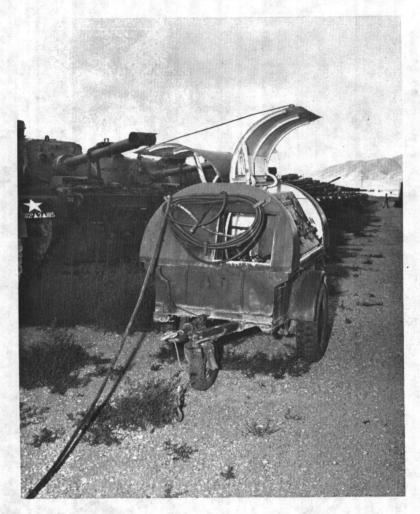


Figure 5-34. An exerciser for use on recoil mechanisms.

DOD 4145.19-R-1 15 September 1979



Figure 5-35. Truck tractors piggybacked for driveaway shipment.

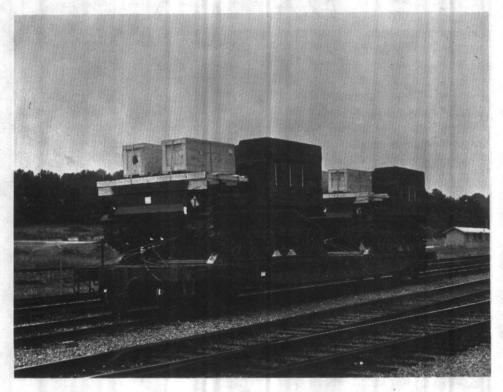


Figure 5-36. Parts, boxed and attached to end item for shipment.



Figure 5-37. Windshield, boxed for protection during shipment.

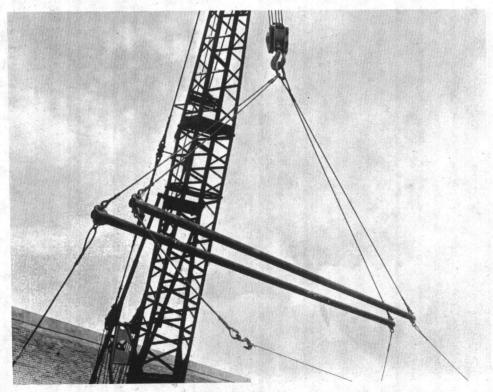


Figure 5-38. Slings and spreader bars for use with cranes.

DOD 4145.19-R-1 15 September 1979



Figure 5-39. Truck-mounted crane.



Figure 5-40. Wheel-mounted crane.

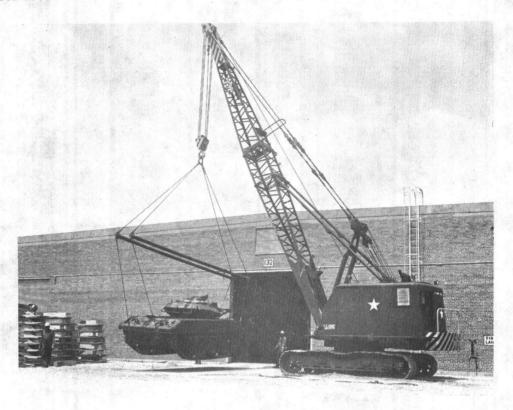


Figure 5-41. Crawler-mounted crane.

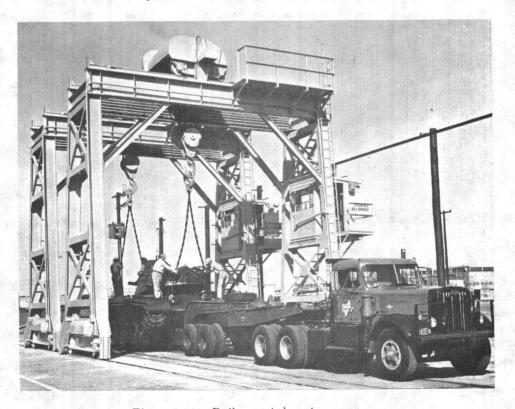


Figure 5-42. Rail-mounted gantry crane.

DOD 4145.19-R-1



Figure 5-43. Modified back-to-back (herringbone) storage pattern. (Note: This pattern allows items to be driven or maneuvered directly into their locations with minimal handling.)

## Section 4. HAZARDOUS COMMODITIES

( - 1985 - 1985 - 1985 - 1985 - 1985 - 1985 - 1985 - 1985 - 1985 - 1985 - 1985 - 1985 - 1985 - 1985 - 1985 - 1	Paragraph
General	5-401
Radioactive material	5-402
Materials with explosive characteristics	5 409
riammable and cumbustible liquids	5 404
Compressed gases	5-405
Acids	5-406
Table of hazardous materials	5-407

#### 5-401. General

a. It is neither possible nor practical to provide a complete detailed item-by-item listing of hazardous materials and their storage compatibility characteristics. This section provides overall guidance for storage and handling of various types of hazardous commodities. (Chap. VI delineates safety requirements.) Methods of storing and handling of hazardous commodities are to be oriented towards facilities acceptable to provide the necessary fire and accident prevention/protection programs. Facilities utilized to store hazardous commodities will meet the criteria established by this section. Items

not covered herein or by current service/agency directives should be researched for hazard characteristics in the following references:

(1) Dangerous Properties of Industrial Materials, by N. Irving Sax (Reinhold Publishing Corporation, 450 W. 33rd St., New York, NY.

(2) NFPA Fire Protection Guide on Hazardous Materials (Pamphlets 325A, 325M, 49, 491F and 704M), National Fire Protection Association, 470 Atlantic Avenue, Boston, MA 02210.

(3) Handbook of Industrial Loss Prevention by Factory Mutual (McGraw-Hill Handbook, 330 West 42nd Street, New York, NY 10036).

- (4) OSHA Safety and Health Standards (29 CFR 1910).
- b. Local procedures should be developed and coordinated with the installation Safety Officer or other appropriate personnel of the respective service for dealing with these items as they are brought into the inventory and made available for storage.
- c. When there is a doubt as to the hazard, identity, and storage location of any item in stock, or any item to be stored, the installation fire department, Safety Officer, Industrial Hygienist, or other appropriate personnel of the respective service should be consulted for guidance.
- d. If leakage or spillage of one of these items occurs and it has not been covered by local procedure, evacuate the immediate area and seek advice of the Safety Officer or other appropriate personnel of the respective service prior to clean up or disposal operation.

#### 5-402. Radioactive Material

The handling of radioactive material involves serious health hazards. Receipt, storage, packaging, handling, shipment and disposal are covered in the joint services regulation, DLAM 4145.8/AR 700-64/ NAVSUPINST 4000.34/AFM 67-8/MCO P 4400.105, Radioactive Commodities in DOD Supply System. MIL STD-129, Marking for Shipment and Storage; MIL STD-1458, Radioactive Materials, Marking and Labeling of Items, Packages and Shipping Containers for Identification in Use, Storage and Transportation; and AFR 71-4/TM 38-250/NAVSUP PUB 505(Rev)/MCO P4030.19D/DLAM 4145.3, Preparation of Hazardous Materials for Military Air Shipment; code of Federal regulations (CFR) 49, and OSHA 1910.96 should be consulted when shipping radioactive materials. Matters not covered by current service/agency directives or above reference should be referred to the local Radiological Protection Officer or Safety Officer for specific instructions.

# 5-403. Materials With Explosive Characteristics

- a. Many items have unsuspected inherent properties that are potentially dangerous and, although not listed as explosive or flammable when stored alone, may become hazardous when stored in proximity to other items. For example, oils combined with liquid oxygen can cause an explosion.
- b. Care must be exercized when handling these potentially dangerous items to assure storage is not

in proximity to other items. If there is a doubt, the installation Safety Officer or fire department should be consulted for specific instructions.

c. For information in these matters not contained in current service/agency directives or in this regulation refer to the National Fire Protection Guide on Hazardous Materials (NFPA 325A, 325M, 49, 491M and 704M) published by the National Fire Protection Association, 470 Atlantic Avenue, Boston, MA 02110.

## 5-404. Flammable and Combustible Liquids

- a. General. Storage of flammable and combustible liquids must consider stacking heights and distances between stacks. To provide these data, this paragraph defines classes of flammable and combustible liquids together with tables depicting the storage requirements.
- b. Flammable and combustible liquids (29 CFR 1910.106).
- (1) Combustible liquids. Any liquid having a flashpoint at or above 100° F. (37.8° C.). Combustible liquids are divided into two classes as follows: (29 CFR 1910.106(a)(18))
- (a) Class II liquids. Liquids with flashpoints at or above 100° F. (37.8° C.) and below 140° F. (60° C.) except any mixture having components with flashpoints of 200° F. (93.3° C.) or higher, the volume of which make up 99 percent or more of the mixture.
- (b) Class III liquids. Those liquids with flashpoints at or above 140° F. (60° C.). Class III liquids are subdivided into two subclasses:
- 1 Class IIIA liquids. Those liquids with flashpoints at or above 140° F. (60° C.) and below 200° F. (93.3° C.) except any mixture having components with flashpoints of 200° F. (93.3° C.) or higher, the total volume of which make up 99 percent or more of the total volume of the mixture.
- 2 Class IIIB liquids. Those liquids with flashpoints at or above 200° F. (93.3° C.).
- (2) Flammable liquids. Any liquid having a flashpoint below 100° F. (37.8° C.), except any mixture having components with flashpoints of 100° F. (37.8° C.) or higher, the total of which make up 99 percent or more of the total volume. Flammable liquids are categorized as class I liquids. Class I liquids are divided into three classes as follows:

(a) Class IA liquids. Those liquids having flashpoints below 73° F. (22.8° C.) and having a boiling point below 100° F. (37.8° C.).

(b) Class IB liquids. Those liquids having flashpoints below 73° F. (22.8° C.) and having a

boiling point at or above 100° F. (37.8° C.).

- (c) Class IC liquids. Those liquids having flashpoints at or above 73° F. (22.8° C.) and below 100° F. (37.8° C.).
- c. Tables (indoor storage) (29 CFR 1910.106 Table H-14).
- d. Warehouses or storage buildings for flammable and combustible liquids (29 CFR 106(d)(5)(vi).
- (1) If the storage building is located 50 feet or less from a building or line of adjoining property that may be built upon, the exposing wall will be a blank wall having a fire-resistance rating of at least 2 hours.
  - (2) The total quantity of liquids within a build-

ing will not be restricted but the arrangement of storage will comply with table 5-1 or 5-2.

- (3) Containers in piles will be separated by pallets or dunnage where necessary to provide stability and to prevent excessive stress on container walls.
- (4) Portable tanks stored over one tier high will be designed to nest securely, without dunnage, and adequate MHE will be available to handle tanks safely at the upper tier level.
- (5) No pile will be closer than 3 feet to the nearest beam, chord, girder, or other obstruction. and will be 3 feet below sprinkler deflectors or discharge orifices of water spray, or other overhead fire protection systems.
- (6) Aisles of at least 3 feet wide will be provided where necessary for reasons of access to doors, windows or standpipe connections.
- e. Tables (outdoor storage) (29 CFR 1910.106 Table H-16).

Table 5-1. Indoor container storage.

Class liquid	Storage level	*Protected storage maximum per pile		Unprotected storage maximum per pile	
		Gallons	Height	Gallons	Height
IA	Ground and upper floors	2,750	3 ft	600	3 ft
		(50)	(1)	(12)	(1)
	Basement	Not permitted		Not permitted	
IB	Ground and upper floors	5,500	6 ft	1,375	3 ft
		(100)	(2)	(25)	(1)
	Basement	Not permitted		Not permitted	(1)
IC	Ground and upper floors	16,500	6 ft	4,125	3 ft
		(300)	(2)	(25)	(1)
	Basement	Not permitted		Not permitted	(-)
II	Ground and upper floors	16,500	9 ft	4,125	9 ft
		(300)	(3)	(75)	(3)
	Basement	5,500	9 ft		(0)
		(100)	(3)	Not permitted	
III	Ground and upper floors	55,000	15 ft	13,750	12 ft
		(1,000)	(5)	(250)	(4)
	Basement	8,250	9 ft		(=)
		(450)	(3)	Not permitted)	

Note 1. When 2 or more classes of materials are stored in a single pile, the maximum gallonage permitted in that pile will be the smallest of the 2 or more separate maximum gallonages.

Note 2. Aisles will be provided so that no container is more than 12 feet from an aisle. Main aisles will be at least 8 feet wide and side aisles at least 4 feet wide. (Numbers in parentheses indicate corresponding number of 55-gallon drums.)

Note 3. Each pile shall be separated from each other by at least 4 feet.

\*A sprinkler or equivalent fire protection system installed in accordance with NFPA standard 30.

Table 5-2. Indoor portable tank storage. (29 CFR 1910.106 Table H-15).

Class		Protected storage maximum per pile		Unprotected storage maximum per pile	
liquid	Storage level	Gallons	Height	Gallons	Height
IA	Ground and upper floors Basement	Not permitted Not permitted		Not permitted Not permitted	
IB	Ground and upper floors Basement	20,000 Not permitted	7 ft	2,000 Not permitted	7 ft
IC	Ground and upper floors Basement	40,000 Not permitted	14 ft	5,500 Not permitted	7 ft
п	Ground and upper floors Basement	40,000 20,000	14 ft 7 ft	5,500 Not permitted	7 ft
III	Ground and upper floors Basement	60,000 20,000	14 ft 7 ft	22,000 Not permitted	7 ft

Note 1. When 2 or more classes of materials are stored in a single pile, the maximum gallonage permitted in that pile will be the smallest of the 2 or more separate maximum gallonages.

Note 2. Aisles will be provided so that no portable tank is more than 12 feet from an aisle. Main aisles will be at least 8 feet wide and side aisles at least 4 feet wide.

Note 3. Each pile will be separated from each other by at least 4 feet.

Table 5-3. Outdoor container storage.

1	2	3	4 Distance to	5	
Class	Maximum per pile (see note 1)	Distance be- tween piles (see note 2)	property line that can be built upon (see notes 3 and 4)	Distance to street, alley, public way (see note 4)	
	Gal	Ft	Ft	Ft	
IA	1,100	5	20	10	
IB	2,200	5	20	10	
IC	4,400	5	20	10	
II	8,800	5	10	5	
III	22,000	5	10	5	

Note 1. When 2 or more classes of materials are stored in a single pile, the maximum gallonage in that pile will be the smallest of the 2 or more separate gallonages.

Note 2. Within 200 feet of each container, there will be a 12-foot wide access way to permit approach of fire control apparatus.

Note 3. The distances listed apply to properties that have protection for exposures as defined. If there are exposures, and such protection for exposures does not exist, the distances in column 4 will be doubled.

Note 4. When total quantity stored does not exceed 50 percent of maximum per pile, the distances in columns 4 and 5 may be reduced 50 percent, but not less than 3 feet.

Table 5-4. Outdoor portable tank storage. (29 CFR 1910.106 Table H-17)

1	2	3	4	5
Class	Maximum per pile	Distance be- tween piles	Distance to property line that can be built upon	Distance to street, alley, public way
	Gal	Ft	Ft	Ft
IA	2,200	5	20	10
IB	4,400	5	20	10
IC	8,800	5	20	10
II ,	17,600	5	10	5
III	44,000	5	10	5

Note 1. When 2 or more classes of materials are stored in a single pile, the maximum gallonage in that pile will be the smallest of the 2 or more separate gallonages.

Note 2. Within 200 feet of each portable tank, there will be a 12-foot wide access way

to permit approach of fire control apparatus.

Note 3. The distances listed apply to properties that have protection for exposures defined. If there are exposures, and such protection for exposures does not exist, the distances in columns 4 will be doubled.

Note 4. When total quantity stored does not exceed 50 percent of maximum per pile, the distances in columns 4 and 5 may be reduced 50 percent, but not less than 3 feet.

- f. Spill containment. The outdoor storage area will be graded in a manner to divert possible spills away from buildings or other exposures or will be surrounded by a curb at least 6 inches high. When curbs are used, provisions will be made for draining of accumulations of ground or rain water or spills of flammable or combustible liquids. Drains will terminate at a safe location and will be accessible to operation under fire conditions.
- g. Fire control. Suitable fire control devices, such as small hose or portable fire extinguishers, will be available at locations where flammable or combustible liquids are stored.
- (1) At least one portable fire extinguisher having a rating of not less than 12-B units will be located outside of, but not more than 10 feet from, the door opening into any room used for storage.
- (2) At least one portable fire extinguisher having a rating of not less than 12-B units must be located not less than 10 feet, nor more than 25 feet, from any Class I or Class II liquid storage area located outside of a storage room but inside a building (29 CFR 1910.106(d)(7)(i)).
- h. Warehouse design for storage of flammable/ combustible material.
- (1) The building will be a single purpose structure, of noncombustible or fire-resistant construc-

tion, one story in height without basement or crawl space, detached, and separated from other buildings by at least 50 feet, or as specified by the respective service. The building will be divided into individual compartments or stock rooms not to exceed 20,000 square feet in areas by means of standard fire walls (fig. 5-45). In addition, a method of exhaust ventilation should be installed as recommended by the respective service. Ventilation will be located in the building in accordance with ventilation engineering standards.

- (2) Electrical installations will be in accordance with Class I, Division 2, as defined in Article 500 of the National Electric Code.
- (3) Automatic sprinkler protection will provide a discharge floor density of 0.5 gallons per minute/ square feet of floor space.
- (4) Low level ventilation will be installed to provide .25 cubic feet per minute/square feet of floor area. This ventilation is designed to preclude the accumulation of toxic or explosive mixtures.
- (5) Building will be provided with suitable floor drains or wall scuppers to expedite the removal of water discharged from sprinklers and hose streams. If floor drains are used, they will be connected to an appropriate dry well or holding tank and not to a sanitary sewer system or storm sewer.

(1) Identification of cylinders will bear color code of noun in accordance with MIL STD-101. Filled cylinders will be tagged/labelled with two stock numbers—one for the gas and one for the cylinder. The empty cylinder tag will be overstamped "MT" to designate "empty."

(2) Gases should be referred to by proper name,

rather than just "gas."

(3) Safety devices in valves of cylinders (fig. 5–46) will not be tampered with.

(4) Normally, cylinders will not be handled, shipped or stored without valve protection caps. However, small cylinders of less than 40-pound capacity, "ram-bottom" type cylinders, and cylinders with less than 625 cubic inches of volumetric capacity, such as, carbon dioxide and medical gases, do not require valve protection covers.

(5) The valve outlet connectors of both full and empty cylinders must have an authorized dust cap.

(6) Oxygen cylinders must be free from grease or oil.

(7) Numbers of markings that are stamped on cylinders will not be altered or defaced nor will additional markings be applied to cylinders without proper approval.

(8) For storage and handling purposes, all cylinders will be considered full and corresponding

care must be exercised.

(9) Empty cylinders will be stored separately but in the same manner as full cylinders. Therefore, empty cylinders will not be stored with full cylinders on the same pallet or in the same stack. Cylinders will not be lifted by the valve protection cap.

(10) Cylinders will not be lifted by cranes or mechanical lifts unless fastened in proper containers, racks, and cradles. Rope and chain slings and electromagnets will not be used to lift cylinders.

(11) Cylinders will not be used as rollers, supports, or for any purpose other than for containing compressed gases.

(12) Compressed gas will not be used to dust off clothing.

(13) Flames will not be used to test for leaks in compressed gas cylinders.

(14) Valves on empty cylinders will be kept closed.

(15) Cylinder valves will be closed before moving cylinder.

(16) Suitable materials handling equipment will be used for lifting and transporting cylinders.

(17) Suitable hand trucks should be provided

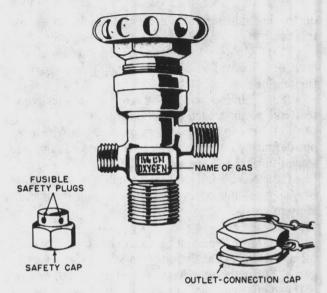


Figure 5-46. View 1. Oxygen cylinder valve.

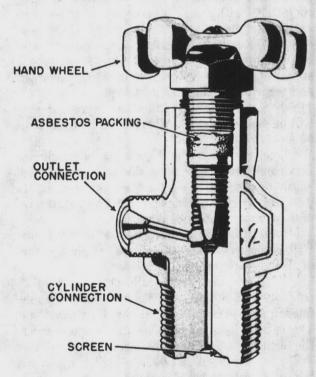


Figure 5-46. View 2. Cutaway view of acetylene cylinder valve.

for conveying cylinders; cylinders moved on hand truck must be held securely in position.

(18) When suitable hand trucks are not available, cylinders will be moved by tilting and rolling

on the bottom edge. Do not drag or slide the cylinders.

(19) Cylinders to be transported in trucks, rail cars, or ships will be braced securely to avoid overturning or moving.

(20) Cylinders will not be dropped or permitted

to strike against each other violently.

(21) Any cylinder of compressed gas which is not definitely identifiable as to contents will not be issued until the content is identified.

(22) "NO SMOKING" signs will be posted, and smoking prohibited in or around compressed gas storage sheds.

d. Storage criteria for gas cylinders.

(1) Storage facility design. The following criteria will apply to all cylinder storage of compressed gases. Future construction of structures for storage of these gas cylinders must meet these criteria and should be examined by safety personnel to verify conformity with safety standards prior to acceptance by supply.

(a) Roofed, open-sided shed storage on a concrete slab, above grade, is the preferred type of storage facility if climatic conditions are favorable

and security precautions are adequate.

- (b) All storage facilities for compressed gases will be separated from other buildings by at least 50 feet.
- (c) Flammable gases and gases which support combustion must be stored in separate sheds with a distance of at least 50 feet between sheds.
- (d) Preferably, sheds should be constructed of light, noncombustible materials.
- (e) If one or more sides are installed, provisions must be made to insure a complete change of air at least six times each hour.
- (f) All electrical installation will be in accordance with Class I, Division 2 locations as defined in Article 500 of the National Electrical Code. The use of skylights is recommended to decrease the need for electrical connections.
- (g) Sheds will not be heated. The use of stationary or rotating roof vents may be necessary to lower the temperature near the ceiling to ambient conditions during warm weather.
- (2) Enclosed storage facilities will meet the following criteria:
- (a) A single story building, above grade, must be utilized.
- (b) Separate storage rooms or compartments must be constructed for flammable gases and for

gases which support combustion. Additional compartments for specific types of gases may also be constructed.

- (c) The walls, partitions, floors, and ceilings will be of noncombustible, nonporous material. All walls and partitions will be continuous from floor to ceiling, and will be securely anchored and sealed with mineral wool, rubberized grouting, or other nonporous sealant. At least one wall of each storage room or compartment, for combustible gases, must be on an exterior wall.
- (d) It is recommended all doors to storage rooms or compartments be directly through exterior walls. All doors to storage areas will have a fire resistance rating of at least 1½ hours. All doors to storage areas from interior parts of the building (when necessary) will be protected by a swinging type, self-closing fire door for Class B openings.

(e) Windows will be wired glass with approved metal frames and fixed sash. Installation will be in accordance with Standards for the Installation of Fire Doors and Windows, NFPA 80.

- (f) Every inside storage room or compartment will be provided with either a gravity or a mechanical exhaust ventilation system or a combination of each type. Such systems will be designed to provide for a complete change of air within each room or compartment at least six times per hour. Where gravity ventilation is provided, the fresh air intake as well as the exhaust outlet from the room or compartment will be on the exterior roof or exterior wall of the building in which the room is located. Provisions will be made for exhaust outlets to accommodate gases heavier than air and lighter than air. Exhaust outlets for heavier than air gases will be within 6 inches of the floor. If a mechanical exhaust system is used, it will be controlled by a switch (manual or automatic) located outside the door of the storage room.
- (g) All electrical installations will be in accordance with Class I, Division 2, locations as defined in Article 500 of the National Electrical Code (NFPA 70).
- (3) A fire suppression system for shed and enclosed storage should be installed if the cost of the facility and stored material indicates a need. If temperatures reach the freezing point of water, a drypipe sprinkler system should be used. If temperatures do not reach freezing, an automatic wet-pipe sprinkler system should be installed in accordance with NFPA Standard 13. Either system should de-

cilities.

liver an application density of 0.50 gallons per minute per square foot for a minimum area of 2,000 square feet. The sprinkler heads installed should meet Factory Mutual Laboratory requirements for large water-drop equipment. A water flow discharge from the sprinkler system must transmit an alarm to central fire department receiving equipment. Scuppers or floor drains should be provided to remove discharged water in enclosed storage fa-

e. Protective equipment. Where irritant gases such as ammonia and sulfur dioxide are present in nuisance or light concentrations, gas tight goggles and respiratory protective devices, or full face mask respiratory protective devices should be worn. When entering areas known to be highly contaminated or when rescuing personnel from gassed areas, rescuers will be properly equipped with selfcontained breathing apparatus or other appropriate respiratory equipment. Mechanical filter respirators offer no protection against high percentages of gas concentrations and should not be used. When entering areas containing hazardous concentrations of atmospheric contaminants, necessary protective equipment will be worn as prescribed by the installation Safety Officer. Personnel shall be trained in the use and care of respiratory protective equipment and in inspection for operational capability. This training will be the responsibility of the installation fire department or appropriate personnel of the respective service. A good reference is the American National Standards Institute (ANSI) Z88.2-1969, Practices for Respiratory Protection. Additional guidance on the storage and handling of compressed gases and gas cylinders is provided in 4145.25/AR-700-68/NAVSUPINST 4440.128B/MCO 10330.2B/AFR 67-12, Storage and Handling of Compressed Gases and Gas Cylinders.

#### 5-406. Acids

a. The following fire protection and safety criteria will apply to bulk storage of acids (fig. 5-47).

(1) Building should be one story in height of noncombustible or fire-resistant construction and should be equipped with automatic sprinkler protection. If the building has sprinklers, it will be equipped with either floor drains or wall scuppers.

(2) Buildings will be heated to prevent freezing of certain acids. Ventilation will be provided by means of permanent louvered openings at floor and ceiling levels or other accepted gravity ventilation methods.

(3) Electrical installation may be for general purpose requirements.

(4) Protective clothing, eye wash, deluge shower, and self-contained breathing apparatus will be readily available for operating personnel. Personnel shall be trained in the use and care of respiratory protective equipment and in inspection for operational capability. This training will be the responsibility of the installation fire department or appropriate personnel of the respective service.

b. Typical acids that can be stored in the acid facility include:

Hydrochloric (Muriatic) Acid. Nitric Acid. Sulphuric Acid. Phosphoric Acid.

c. Different acids will be stored separately in designated areas. In lieu of aisle space, noncombustible barriers up to a minimum of 3 feet high and sealed at the floor level may be used to obtain maximum storage space.

d. "NO SMOKING" signs will be posted and smoking prohibited in or near acid storage buildings.

e. Acids are among a group of materials that are injurious to personnel because of their corrosive qualities. Care must be taken to prevent any spillage or container breakage which could permit contact to skin, eyes, or inhalation into lungs of personnel working with such material.

### 5-407. Table of Hazardous Materials (Table 5-5)


a. The table lists many of the items contained in current DOD Stock Lists and stored at DOD installations. The hazard identity column provides planning guidance to fire departments for safe tactical procedures in emergency situations by providing on-the-spot information to safeguard the lives of fire fighting personnel.

b. Under conditions of leakage or spillage, items with a health or reactivity rating of 2, 3, or 4 are dangerous to personnel not wearing proper protective equipment.

c. Items marked with double asterisks in the table indicate radioactive materials. Consult with the Radiological Protection Officer or the Safety Officer for specific instructions.

d. Items not covered in the table should be researched for hazard characteristics in the applicable service or agency publications.

## BUILDING CONSTRUCTION PREFERABLY NONCOMBUSTIBLE

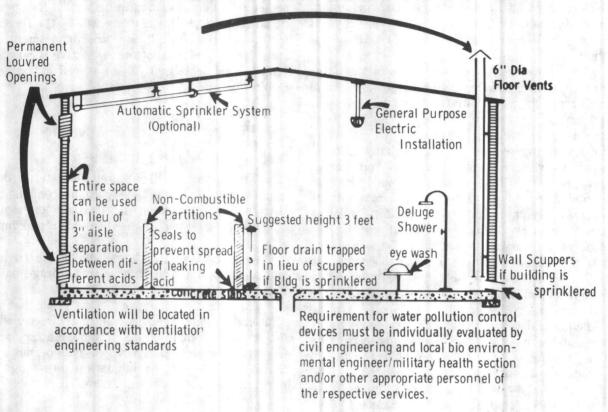

Note: Strong oxiziding acids such as perchloric and nitric acids should be seperated from organic acids such as acetic acid.

Figure 5-47. Acid storage warehouse.

# Table 5-5. Hazardous Materials Storage and Handling Criteria

and the second		Hazard	Identity			Stor-		Тур	e of Stora	ge Facilit	ies	Portable Fire	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Extin- guisher Type	Class Liquid
Acetaldehyde	2	4	2	0	Store in end of building to aid fire	A	4' aisle space	Х		4		2a–3	IA
Acetic Acid	2	2	1	0	fighting. Separate from chromic acid, nitric acid and sodium peroxide.	В	Minimum of 4' aisle space		х	g_300000	1000	1-2a-3	II
Acetic Acid Anhydride (See Acetic Anhydride). Acetic Acid (Glacial)													
(See Acetic Acid). Acetic Anhydride	2	2	2	E	Protect against physical damage.	A	4' aisle space	X				2a-3	II
Acetone	1	3	0	0		A		212		B.F. Hayes		0 0	****
Acetone Cyanohydrin	4	1	2	0	Protect against physical damage.	A	4' aisle space from class I flammables.	X		91-2		2a-3	III
Acetonitrile	2	3	1	0	Protect against physical damage.	A	4' aisle space	X				2a-3	IB
Acetyl Chloride	3	3	2	Н	Protect against physical damage.	A	None	X				2a-3	IB
Acetyl Oxide (See Acetic Anhydride)					15 and 15								
Annydride) ACETYL PEROXIDE (25%)	1	2	4	D	Special storage and handling.	E	4' aisle space						II
Acetylene	1	4	3.	0	Separate from oxygen and other flammable gases. Store upright.	C	Solid wall compartment or separate building.		100	X		1–3	IA
Acetylene (in Acetone)	1	4	2	0	The second second			1	-	S SE	1	0.0	IB
Acetylene Dichloride	2	3	2	0	Protect against physical damage.	A	None	- X	- 4		1 5 5 5	2–3	115
Acetylene Tetrabromide	3	0	1	0	Protect against physical damage.	D	3' aisle space	25			X	1	
Acrolein	3	3	2	0	Store in end of building to aid fire fighting.	A	4' aisle space	_ X				1-2a-3	IB
Acrolein Dimer	1	2	1	0	Store in end of building to aid fire fighting.	A	4' aisle space from class II flammable.	X			1876	3-4	II

Table 5-5. Hazardous Materials Storage and Handling Criteria—Continued

		Hazard	Identity			Stor-		Туј	e of Stor	age Facili	ties	Portable	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Class Liquid
Acrylic Acid	3	2	2	0	Protect against	В	4' aisle space		X			3	II
Acrylic Aldehyde (See Acrolein)					physical damage.								
Acrylenitrile		3	2	0	Store in end of building to aid fire fighting.	A	4' aisle space from class II flammables.	Х				3-4	IB
Aerosols (Paint)	See la	bel			Store in end of building.	D	3' aisle space				X	2,3,4	
Alcohol (Denatured)	_	4	0	0	Store in end of building to aid fire	A	4' aisle space	х			ar en salida a	3-4	IB
Aldehyde	and the second state of	Contraction			fighting.			orte or del		AND SHARE	Angel Highwright	STATE OF THE PARTY	
(See Acetaldehyde)	in providing	Direct College			<b>自由的是由的特别的。他们是是是一个一个的</b>	Section 1	STORE TO TOTAL THE SERVICE COMMENT						
Allyl Alcohol	3	3	1	0	Store in end of building.	A	4' aisle space from class II flammables.	х				3-4	IB
Materials.	Calera vela	BUCON LINGS	and the same		the transfer product of the contract of the contract of			a Shirt Shirt Shirt Shirt		0.5011111000			
Allyl Aldehyde					e da l'est competit a come de l'est con		and provide the state of the st	A 400 S	200	Par special			
(See Aerolein)									12.1	- 14			
Allyl Chlorocarbonate (See Allyl													
Chloroformate)		A CONTRACTOR OF THE PARTY OF TH						10710		SEE LAND			
Allyl Chloroformate	3	3	1	С	Store in end of building.	A	4' aisle space from class II flammables.	X				3-4	IC
Allylamine	3	3	1	0	Store in end of building.	A	4' aisle space from class II flammables.	X			100	3-4	IB
Potassium Sulphate) Aluminum (Dust or Powder).	0	1	1	E	Separate from combustible items.	D	3' aisle space				х	5	
luminum Acetate	1	0	0	0	No special handling	D	None	CONTRACTOR	in processing to	CONTRACTOR OF	-	AND DESCRIPTION OF THE PARTY OF	
lluminum Ammonium Sulphate.	1	0	0	7.75	No special handling	D	None				X X	1-3	
luminum Chloride	3	0	2	E	No special handling	D.	None	KIND OF STANS	a care made	Clay or the	v	1.0	
lluminum Potassium Sulphate.	1	0	0		No special handling	D.	None				X	1–3 1–3	
Aluminum Sulphate	1	0	0	0	No special handling	D	None				X	1–3	

mino Cyclohexane (See													
Cyclohexylamine)			Jan .	wester.					1		- COL		
ninopropane		66.0	7 5								and the second		
(See Propylamine)	1			16.00									
minotoluene										9.41.49	4		
(See Toluidine)			1000		And the second			- 196					
(Ortho, Para)	3	1	0	0	Separate from gases	C	Separate building or			x		3	
nmonia (Anhydrous)	3	•		Ů	such as chlorine, bromide, etc.		solid compartment.						
mmonium Acetate	0	0	0	0	No special handling	D	None				X	1-3	
mmonium Bifluoride	2	0	0	0	No special handling	D	None				X	1–3	
mmonium Chloride	1	0	0	0	No special handling	D	None	2			X	1-3	
mmonium Citrate	0	0	0	0	No special handling	D	None				X	1-3	
mmonium Dichromate	3	2	1	D	Separate from	D	3' aisle space				X	1-3	
Illinomate		100	160	10	combustible items.					4 7			
mmonium Hydroxide	2	1.	1	0	Separate from combustible items.	D	3' aisle space				X	1–3	
mmonium Nitrate	2	1	3	D	Separate from Organic	D	3' aisle space				X	1	
milonium Autrace					materials,								
			17.7		immediately remove			-					
				100	and dispose of any								100
					spilled nitrate.								
	N establish		100		"Bulk quantities should		San Marian Control						
			200	2	be stored in								
Tribut A gathery he was					accordance with TO				100			35 J	
		100			428-1-3."					1		F 100	
mmonium Perchlorate	2	1	4	D	Separate from	D	3' aisle space				X	1'	THE STREET
initionium 2 cremoraro	SUREN S			1	combustible items.								
myl Acetate	1	3	0	0	Store with class I	A	4' aisle space with	X ·				3-4	IC
my riccoate					flammables.		class II flammables.		1 2 3			The second of	
myl Alcohol	1	2	0	0	Store with class II	A	Separate from class I	X		·		1,3,4	IC
myi Alcohoi		-			flammables.		flammable by 4'						
					STATE OF THE STATE		space.					N. S.	
myl Hydrosulfide				19,771	district the second second			- Marin	ain .	100		100000	
(See Amyl				1									6.15 (24)
Mercaptan)						leras						100	and the same
myl Mercaptan	2	3	0	0	Store with class II	A	Separate from class I	X				3,4,5	IB
my Mercapoun				De Pas	flammables.		flammable by 4'		A	Section 19			
				844			space.	- Gibs	1				
myl Sulfhydrate		1				State of				29%		100	
(See Amyl	100	1000	1000	1945	39 3 3 3 3	18.4	the second contraction of the second	1914 301	400	7 19 90	1	N 19 10 10 10	
Mercaptan)							A Committee of the Comm				at di		
niline	3	2	0	0	Store with class II	A	4' aisle space	X				3,4,5	IIIA
ишие		1	1		flammables.		to the wife discussion of	- F			Office .		
nthion				1386	Contract of the second	12:04	rain sain rain na 14 mars i sain sain s	C CALL					1
(See Potassium	-	-			1	700					See		
Persulfate)	DO DO MANAGE	1		I continue	A CONTRACTOR OF THE STREET, THE	6. 2. 5. 4	the state of the s	Chicago Charles	The same of the	100 120 140	98.		The state of the s

Table 5-5. Hazardous Materials Storage and Handling Criteria—Continued

		Hazard	Identity		<b>电影</b> 医二种	Stor-		Ту	pe of Stor	age Facili	ties	Portable	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Class Liquid
Anti-Freeze (75% Ethylene Glycol). Antimonic Sulfide	-	1	1	0	None	D	4' aisle space				Х	3-4	IIIB
(See Antimony Pentasulfide) Antimony Pentasulfide	3	1	1	0	Separate from other	-	9/ side energ	e dige	832		v		
	0	1	1	U	items.	D	3' aisle space				X	1	
Antimony Red (See Antimony Pentasulfide)				To the state of th									
Argon GasAqua Fortis	0	0	0	0	None	C	None			X	n n <del>a .</del> Indo-Kenny	N/A	
(See Nitric Acid)	atem the sale	(Party)	Section 1	and the same	addition of the same of the sa	10000	the construction of the second	Total Name of	organity of the	September 198	101100000000000000000000000000000000000	gentles encode	
Azotic Acid (See Nitric Acid) Barium Binoxide (See Barium													
Peroxide)	and the same	in her had			and the second second			100	100	ing to the	o Galacia		
Barium Chlorate	1	0	2	D	Separate from other items.	D	3' aisle space				X	1	
Barium Dioxide (See Barium Peroxide)													
Barium Nitrate	1	0	1	D	Do not store on wood pallets. Immediately	D	3' aisle space				х	1	
age and		775			remove and dispose of any spilled nitrate.			14 3		160 g			
Barjum Peroxide	1	0	1	D	Separate from combustible organic materials. Remove	D	3' aisle space				х	Dry pow-	
					spilled peroxide immediately.							der.	
Barium Superoxide (See Barium						DESCRIPTION OF STREET							
Peroxide) Benzene	_	3	0	0	Store in end of	A	Separate from class II	x				3,4,5	IB
as the formation			en ouds		building to aid fire fighting.		flammable liquids by 4' space.	The state of the s		page valu	en aprilation		

Benzol			- 1					6						15 6
(See Benzene) Benzoic Acid	2	1	0	0	Separate from oxidizing materials.	D	3' aisle space				X	1,3,4	tand and a	Sept
BENZOYL PEROXIDE.	1	4	4	D	Special facility handling.	E	70 La 30 C							September 1979
Beryllium (Dust or	4	1	1	E	Separate from oxidizing materials.	D	3' aisle space				X	3		er 1
Powder). Biethylene	1				Oxidizing maveries.			1						979
(See Butadiene)					and with a second day or a factor	and the	and the second second	100		A second		1.00		
Bleaching Powder (See Calcium	1													
Hypochlorite)	19. 7	HAT I THE	1000		Electric Special Special Scientific	174		100						
Boroethane (See Diborane)							35 51 6		x			1		
Bromine (Small Lots Only).	4	0	0	М	Separate from acids— Keep from freezing. (Freezing point is 20° F.)	В	Maintain 5' space from acids.		^					
				_		D	None				X	N/A		
Bromochloromethane	1	0	0	0	Protect from physical damage.		The state of the state of the				x	5		
Bronze (Dust or Powder).		0	1	E	Protect from physical damage.	D	Keep separate from aluminum dust.				A			
Burnt Lime (See			\$1. · · ·						da a fa	1		Part of the last		
Calcium Oxide).						1 ~	G			x		3-4		
Butadiene Gas	2	4	2	0	Do not store with oxygen cylinders.	C	Separate building or solid compartment.			Λ				
Butanal (See Butyraldehyde).														
Butane Lighter Fuel (2 3-oz containers).	1	4	0	0	Store in end of building.	A	3' aisle space from class II flammables.	Х			3	3-4		
Butanoic Acid (See Butyric Acid).				1 67		- 65.						1		
Butanol			K. S		History M. St. St. St.	1							N 19 19	
(See Butyl Alcohol).	100	100	la de	10000		100		v				3	IC	
Butyl Alcohol	1	3	0	0	Store with class II flammables.	A	Separate from class I flammable liquid by	Х				0	ic.	
			100	1	A MANUAL TO SERVICE AND A SERV	100	4' aisle space.	X				3-4	IB	
Butyl Acetate	1	3	0	0	Store in end of building.	A	Separate from class II						IIIA	П
Butyl "Cellosolve"	2	2	0	0	Store with class II flammables.	A	4' aisle space from class I flammables.	X				. 3-4	IIIA	DOD
Butyl Ether		egik filoso na anida		1000	A CONTRACTOR OF THE CONTRACTOR			a de chille		el transfer			12.87	4145.19-R-
(See Dibutyl Ether).	1	4	4	D	Special storage and	E	4' aisle space					1,3,4	II	5
BETYL HYDROPEROXIDE.	1	1	1	1	handling.			1 3	1		1			19
BUTYL	2	3	4	D	Special storage and	E	The second second second	-			1			I
DUILD	1 -	1			handling.			Land W	1 2.	To Street West	100			1 2

Table 5-5. Hazardous Materials Storage and Handling Criteria—Continued

		Hazard	Identity			Stor-		Тур	e of Stor	age Facili	ties	Portable	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Class Liquid
BUTYL PERBENZOATE. BUTYL	1 2	3	4	D D	Special storage and handling. Special storage and	E	general menter					3,4	
PEROXYPIVALATE			. 0	sec.	handling.		and the state of t	and the					
Butyraldehyde (Normal and Iso).	2	3	1	0	Store in end of building.	A	4' aisle space	March 1				3,4 Foam	IB
Butyric Acid	2	2	0	0	Store in end of building.	В	4' aisle space		X			3,4	IIIA
Butyric Aldehyde (See Butyraldehyde).													
Cadmium Oxide	3	0	0	0	No special treatment	D	None				X	1-3	
CALCIUM	1	4	2	E	Special storage and handling.	E	Patricipal Control of the Control of					5	
Calcium Carbide	1	4	2	Е	Store in unsprinklered, non-combustible shed for storage over 10	DE	End of warehouse with 3' space from other materials.		ation make		pr su retugio po		
	Ser Series				drums.	15		11				1	
Calcium Cyanide	4	0	0	0	No special treatment	D	Separate from oxidizing materials.				X	3	
Calcium Hydroxide (Slacked Lime).	1	0	0	0	No special treatment	D	None				X	1–3	
Calcium Hypochlorite (Bleaching Powder).	2	4	2	Е	Protect against physical damage. Keep dry, store in unsprinklered space.	D	Separate from combustible materials by 3' aisles.						
Calcium Oxide (Quick Lime).	1	0	1	0	Store in dry place	D	None				X	1–3	
Calcium Sulfate	1	0	0	0	No special treatment	D	None				X	1-4	
Calibrating Fluid (F.P. 100° F.).	See la	bel		0	Store with class II flammables.	A	Separate from class I by 4' aisle.	Х				3-4	II
Calyx (See Calcium Oxide)					Regist III to the service of the ser								
Carbamic Nitrile (See Cyanamide)	-	95	100		Angel plant of the and	1077 - NO					eracion (gli Diaserce)co		
Carbolic Acid (See Phenol)			l all		Likum			-					
Carbon Dioxide (Gas)	1	0	0	0	Extinguishing agent	C	None		1.00	x		N/A	
Carbon Dioxide (Solid)		0	0	0	No special treatment		None				X	N/A	) II

Carbon Disulfide	2		3		0	Stored in end of building to aid fire fighting.	A	Separate from class II flammables by 4' aisle space.	Х	412			3-4	II
Carbon Removing	See	labe	el		0	No special handling	D	None				X	3-4	
Compound. Carbon Tetrachloride	-	1	0	0	0	Protect from physical damage.	A	None				X	N/A	
Catalyst	See	lab	el	1	0	Store with class II flammables.	A	Separate from class I flammables.	X				3/4	
Caustic Potash (See Potassium Hydroxide). Caustic Soda (See						Self-off removable supply								
Sodium Hydroxide). Celluloid (See Cellulose Nitrate).														
Cellulose Acetate (Dopes)	2		2	3	0	Protect against excess of heat or light.	A	Separate from class I flammables by 3' aisle space.	Х	-2			1	
Cellulose Nitrate (Dopes)	2		3	3	0	Store in end of building to aid fire fighting.	A	Separate from class II flammables by 3' aisle space.	X				1,3	
Cement, Rubber	See	lab			0	Store in end of building to aid in fire fighting.	A	3' aisle space from class II flammables.				Х	3-4	
Charcoal	. 0		2	0	0	Store away from oxidizing materials (subject to spontaneous heating).								
Charcoal (Activated)	. 0		2	0	0	Store away from oxidizing materials (subject to spontaneous heating).	D	3' aisle space				Х	1	1000
Chloride of Lime (See Calcium Hypochlorate). Chlorinated Lime (See Calcium Hypochlorate).														
Chlorine	3		0	1	D	Keep in separate building or separated from acetylene, ammonia hydrogen gases.	С	Solid wall compartments or separate building.			х	440	1	
Chlorobenzene (See Monochlorobenzene). Chlorobenzole (See Monochlorobenzene).										,		2		

# Table 5-5. Hazardous Materials Storage and Handling Criteria—Continued

		Hazard	Identity			Stor-		Тур	e of Stor	age Facili	ties	Portable	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Class Liquid
Chloroethane (See Ethyl Chloride).													
Chloroethene (See Vinyl Chloride).													
Chloroethylene (See Vinyl Chloride).													
Chloroform	-	0	0	0	No special treatment	D	None				X	N/A	
Chlorosulfonic Acid	3	0	2	N	Drums must be stored with plugs up. Drums must be	В	3' aisle space		X			N/A	
					vented once a week.								
Chromic Acid (See		-	-	el verse			March & Comment of the						
Chromium Trioxide).	market	a veller	-	District to	and the second second	(4 1	Part of the last o	in the second	Transition College	in a series	1	E 51	
Chromic Anhydride		A STATE OF	No.	THE SE	stanta typidhibolaty, save	estinge to h	mentions of the second	April 10 mg/d	St. Well-R	Friday St.	1000		
(See Chromium Trioxide).													
Chromium Trioxide	1	0	1	D	Do not store on wood	В	3' aisle space		X			1	
Cinnamene (See					floors or pallets.		The state of the s	ALC: THE PARK			Berryske in	Marine Company	
Styrene).	re la	7				SE SECTION		1		的特殊能量	Mary Told	firm made	
Cleaning Compound	See la	bel			Separate from class I	A	4' aisle space from	X		100	7500	5	IIIB
Solvent (F.P. 190° F.).					flammables.		class I flammables.	•			1000		шь
Cleaner and lubricant (See Methyl Chloroform).													
Cobaltus Nitrate	1	0	1	D	Do not store on wood floors or pallets.	D	Separate from combustible materials by 3' aisle				х	1	
			1211-111-1	-	the second secon		space.	900		A	an exam		
Collodion (See Cellulose Nitrate).		environes (	Na chus en	palutoga		la facupatria	Control Control Control	police de la constanti				Mary State of State o	
Copper Carbonate	1	0	0	0	No special handling	D ·	None				X	3	
opper Sulfideopper Sulphate.	1	0	0	E	No special handling	D	None				X	1–3	
Copper Nitrate	1	0	1	D	Do not store on wood floors or pallets.	D	Separate from combustible				Х	1	
	Carry of					water.	materials by 3' aisle space.						

September 1979

4145.19-R-1

Table 5-5. Hazardous Materials Storage and Handling Criteria—Continued

		Hazard	Identity			Stor-		Ту	oe of Stor	age Facili	ties	Portable	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Člass Liquid
Diamine (See Hydra- zine).							W						
Diborane (Gas)	3	4	3	Е	Separate from oxygen cylinders. (Gas will ignite spontaneously on contact with air.).	С	Separate building or solid compartment.			х		3-4	IA
Diboron Hexahydride (See Diborane).													
Dibutyl Ether	2	3	0	0	Store in end of build- ing to aid fire fight- ing.	A	4' space from class II flammable liquids.	х				3,4,5	IC
Dibutylperoxide (Tertiary).	2	3	4	D	Store in end of build- ing to aid fire fight- ing.	A	4' space from class II flammable liquids.	X			in the state	3,4,5	IB
Dichlorobenzene (Ortho)	2	2	0	0	Store with class II flammables.	A	4' aisle space from class I.	x				1,3,4,5	IIIA
Dichlorobutane	2	2	0	0	May be stored with class II flammable liquids.	A	Separate from class I flammables, 4' aisle	x				3,4,5	П
Dichlorodifuoromethane (Freon—12 Gas).	1	0	0	0	No special handling	С	Inert gas—may be stored with any			х		1	
Dichloro Ethane (See Ethylene Dichloride). Dichlorothylene (See Vinylidene Chloride).							other type gas.						
Diethyl Aluminum Chloride.	3	3	3	Е	Protect containers against shock and damage.	A	May be stored with class II flammables.	х				3-4	
Diethylamine Diethylene Dioxide (See Dioxane).	2	3	0	0			day our one to					2a,3,4	
Dioxane).  Diethylene Ether (See Dioxane).													
Diethyl Ether (See Ether). Diethyl Oxide (See Ether).													

Diethylenetriamine	3	1	0	0	Protect against physical damage.	A	May be stored with class II flammables.	X	 		2a-3-4	IIIB
Diethylene Glycol (F.P. 275° F.).		2	0	0	No special handling if in general purpose	A,D	4' aisle space if stored in flammable	х	 	X	3-4	IIIB
According to the second se				T.	warehouse.		building.	v			0.4	
Diethyl zinc	_	3	3	E	Protect against physical damage.	A	3' aisle space	Same	 		3-4	
Diisopropylamine	3	3	0	0	Protect against physical damage.	A	4' aisle space	X	 		2a-3-4	IB
DIISOPROPYL PEROXYDICAR- BONATE.	-	4	4	D	Special handling and facility. Max. 53° F.	E	100 miles (100 miles (					
Dimethylamine (See Methyl Amines). Dimethyl Benzene (See Xylene).	3	4	0	0								
Dimethylene Oxide (See Ethylene Oxide).				1-40	100							
Dimethyl Sulfide	4	4	0	0	Store in end of building to aid fire fighting.	A	Separate from class I flammables by 3' aisle space.	Х	 		3-4	
DINITROBENZENE (ORTHO).	3	1	4	0	Special handling and facility.	E	4' aisle space		 		1,3,4	IIIB
DINITROTOLUENE _	3	1	3	0	Special treatment and facility. Explosive hazard when involved in fire.	Е			 		1,3,4	
Dioxane Para	2	3	0	0	Store in end of building to aid in fire fighting.	A	Separate from class II flammables by 4' aisle space.	х	 		3-4	IB
Diphacinpariffin (See Rodenticide). Dopes (See Cellulose Nitrates and Cellulose					i i i i i i i i i i i i i i i i i i i							
Acetates). Drying Agent (Aerosol)	0	1	0	0	No special treatment _	D	None			x	3-4	
Dust Mop Treatment Compound.	See la	Marine Committee			No special treatment	D	None		 	X	3-4	
Dye Solutions (1 Qt. Bottles).	See la	abel			Store in end of building to aid in fire fighting.	A	Separate from class II flammables by 3' aisle space.	Х	 		3-4	
Dye, Xylene. Azo, Xylene.	0	3	0	0	Store in end of building to aid in fire fighting.	A	Separate from class II flammables by 3' aisle space.	Х	 		3-4	
Enamels (See Organic Coating Materials).			100									
Ether (Ethyl—Diethyl)	2	4	1	0	Store in end of building to aid in fire fighting.	A	Separate from class II flammables by 4' aisle space.	Х	 		3-4	IA

Table 5-5. Hazardous Materials Storage and Handling Criteria—Continued

		Hazard	Identity			Stor-		Тур	e of Stora	ge Facili	ties	Portable	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Class Liquid
Etherin (See Ethylene).	Total A												
Ethyl Acetate	1	3	3	0	Store with class I flammables.	A	Separate from class II flammables by 4' aisle space.	Х			6	3-4	IB
thylacetic Acid (See Butyric Acid).		100				100				4			
Ethyl Acrylate	2	3	2	0	Store with class I flammables.	A	Separate from class II flammables by 4' aisle space.	х				2,3,4	IB
Ethyl Alcohol	de des	4	0	0	Store with class I flammables.	A	Separate from class II flammables by 4' aisle space.	Х				1–3–4	IB
Ethylamine	3	4	0	0	and the second of the second o	House Hyper	Management and the second	N 1870	and the special	PERMIT	TOTAL CONTRACT	Element of the second	
Ethyl Benzene	3 2	3	0	0	Store with class I flammables.	A	Separate from class II flammables by 4' aisle space.	Х				3-4	IB
Ethyl Benzol (See Ethyl Benzene).			P. Len										
Ethyl Chloride	2	4	0	0	Store with class I flammables.	A	Separate from class II flammables by 4' aisle space.	х				3-4	IA
Ethyl Nitrate (Nitric	2	3	4	0	a from an arry		aisie space.						
Ether). Ethyl Ether (See Ether).				Par Caller		Certain 1							
Ethyl Nitrite (Nitrous Ether).	2	4	4	0	Store with class I flammables at end of building.	A	4' aisle space from class II.	Х				2,3,4	IA
Ethyl Oxide (See					the state of the state of		x - x						
Ether). Ethylene	1	4	2	0	Separate from oxygen, chlorine gases.	С	Separate building or solid compartment.			X	Х	3-4	
Ethylene Aldehyde (See Acrolein).				1 13	N <sub>1</sub>								The state of the s
Cthylene Chloride (See Ethylene Dichloride). Cthylene Dichloride	2	3	0	0	Store with class I flammables.	A	Separate from class II flammables.	x				3-4	IB
Ethylene Glycol Monobutyl (See "Butyl Cellosolve").				du uz.	A CONTRACTOR OF THE PARTY OF TH	No. of Contract	All the second s		A .	B-78677	e di co	and the same	in the second

Ethylene Oxide (Gas)	2	4	3	0	Store in separate shed or in gas building separate from	C	Solid compartment away from oxygen.	 		Х		3-4	
			1	134	oxygen.							2000	
Feric Chloride	2	0	0	Н	No special handling	D	Marie Comments				X	1-4-5	
Ferric Nitrate	0	1	0	D	No special handling	D					X	1-4	
Ferrous Sulphate	0	0	0	0	No special handling	D					X	1-4	
Fluorine	4	0	3	J	Separate storage or	C	Separate building or			X		Water	
	14				separate from oxygen.		solid compartment.					spray	
Formaldehyde Solution	2	2	0	0	Separate from combustible and oxidizing materials.								
Gas	2	4	0	0	Oxidizing materials.	D	At at the summer				x	3-4	****
	1 -	1	"	0		D	4' aisle space				A	3-4	IIIA
_rimag_	100	120				C		-					
Formalin (See			- 1	1				5.3					
Formaldehyde).													
Formic Acid	3	2	0	С	Separate from other acids.	В	4' aisle space		Х			1–3	IIIA
Formic Aldehyde (See Formaldehyde).													
Freon (See Dichloro- difluromethane).												1	
Glycerol (See Glycerin).		8 1		1.79									
Glycerin		1	0	0	No special treatment	D	4' aisle space				X	1-3	IIIB
Greases	0	1	0	0	No special treatment _	D	None				X	1-3-4	
Gum Preventive (Gasoline). Guncotton (See	-	3	0	0	Store in end of building.	A	3' aisle from class II flammables.	Х				3-4	
Cellulose).			3. 7	F- 1									
Helium	0	0	0	0	Inert gas	C	None	1200		x		N/A	- Resident
Helium and Methane	0	1	0	0	No special handling	C	None			x		N/A	
Helium and Nitrogen	0	0	0	0	Noncombustible gas	C	None			X		N/A	
Herbicides	See 1	abel	55		No special treatment	D	None				X	1-3	
Hexametaphosphate	0	0	0	0	No special treatment	D	None				X	1-3-4	
Hexamethylene (See Cyclohexane).	100					t T	ray at			- 4			
Hexone (See Methyl Isobutyl Ketone).													
Hydraulic Fluid	See l	ahel			No special handling	D	None	645			X	1-3-4	10 - 10 9
Hydrazine (Anhydrous)	3	3	2	C	Store in end of	A	Separate from class II	X				1-3-4	II
aryurumie (rimyurous)		0.4	-		building to aid in fire fighting.	Α	flammables by 4' aisle space.	A		Quil	7.46	1-3-4	
Hydrochloric Acid	3	0	0	C	Protect against physical damage.	В	3' aisle space		X			1-3-4	
Hydrocyanic Acid (See Hydrogen Cyanide).					March 10 and		To particular start						

15 September 1979

Table 5-5. Hazardous Materials Storage and Handling Criteria—Continued

		Hazard	Identity		Carrier of the other to the	Stor-		Тур	e of Stora	age Facilit	ties	Portable	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Class Liquid
Hydrofluoric Acid	4	0	0	С	Protect against physical damage.	В	3' aisle space		Х			1	
Hydrogen (Gas)	0	4	0	0	Storage in separate building or gas storage shed.	C	Solid partition from oxygen cylinders.	•		Х		3-4	
Hydrogen Chloride (See		Mary 1								0 2			
Hydrochloric Acid). Hydrogen Cyanide	4	4	2	0	Store in end of building to aid fire fighting.	A	4' aisle space from class II flammables.	Х			100	3-4	IA
Hydrogen Dioxide (See	r her			1000	Proposition that the proposition was	e to anal	in the same of the same of	0/40/59				in the second	
Hydrogen Peroxide). Hydrogen Fluoride (See Hydrofluoric Acid).						A contract				Milanigeri Mayoristi Mayoristi		the source of	
Hydrogen Peroxide	2	0	1	M	Do not store on wood pallets or dunnage.	В	10' space from other acids.		X			1	
over 52%	2	0	3	M	TO THE PERSON OF	SI COMPAGE	Marie Marie Mada in Printe vance	A section		No.	Married Co.	18-1-11-11-11-11-11-11-11-11-11-11-11-11	
Hydrogen Sulfate (See			-		Particular Committee of the Committee of						la Service	N. 19 1. 1	
Sulphuric Acid).  Hydrogen Sulfide	3	4	2	0	Separate building or in compressed gas shed, separate from	С	Solid partition from oxygen cylinders.			X		1–2–4 Spray	
Hydroxybenzene (See Phenol).					oxygen.								
Hydroxylamine	1	3	3	0	Separate from class I flammables.	A	4' aisle from class I flammables.	X				3	IIIB
Inhibitors (See Trisodium	0	2	0	0	No special handling	D	None			and the	·X	1–3	
Phosphate).					No amoial handling	D	None	200		100	X	1-3	
Insecticide (Chlordane) Insecticide (DDT)	3	0	0	0	No special handling	D	None				X	1-3	
Insecticide (DDT) Insecticide (DDT-	3	1	1	0	No special handling	D	None				X	1-3	
Aerosol).	F-1-87-722	A STATE OF	an Casto	1 10 5 24		Control	A SECURITY OF THE SECURITY OF	-	in the second	10	End of St		
Insecticide (Diazinon)	3	0	0	0	No special handling	D'	None	8 /			X	1-3	
Insecticide (Dialdrin)	3	0	0	0	No special handling	D	None				X	1-3	
Insecticide (Lindane)	3	0	0	0	No special handling	D	None	75.			X	1-3	
Insecticide (Malathion)	2	0	0	0	No special handling	D	None				X	1-3	
Insecticide (Pyrethrin)	2	1	0	0	No special handling	D	None			1	X	1-3	

Insect Repellent					No special handling	D	None		1		X	1-3	1	1
Inspection Penetrant Emulsifiers & Removers.	See 1	abel			Store with class II flammables.	A	3' aisle space from class I flammables.	X				3-4		
Insulating Varnish	See 1	abel			Store in end of	A	Separate from class II	X				3-4	IC	
					building to aid in fire fighting.		flammables by 4' aisle space.	*				-	l.C	
Isopropyl Formate	2	3	0	0	Store in end of building to aid in fire fighting.	A	3' aisle space from class II flammables.	х	7 N			3-4		
Isopropyl Methanoate (See Isopropyl Formate).							and a second							
Iodic Acid (Crystals)	0	2	1	D	Separate from other acids.	В	3' aisle space		х			3-4		
IodineIsoamyl Acetate (See Amyl Acetate).	2	0	0	D	No special handling	D	None				X	1,3,4		
Isobutyl Methyl Ketone	2	3	2	0	Store in end of building.	A	4' aisle space from class II flammables.	х				3-4	IC	
Isopropyl Alcohol	. 1	3	0	0	Store in end of building.	A	4' aisle space from class II flammables.	X				3-4	IB	
Kerosene (130° F.P.)	0	2	0	0	Store with class II flammables.	A	4' aisle space from class I flammables.	X				3-4	II	
Lacquers	See 1	abel			Store in end of building.	A	Separate from class II flammables.	Х				3-4	IC	
Lanthanum Nitrate	. 0	0	3	D	No special handling	D	3' aisle space				X	1-3-4		
LAUROYL PEROXIDE.	-	2	3	D	Special facility required for quantity storage.	Е	A No. 1							
Lead Nitrate	-	1	2	0	Store in end of building.	D	Separate from class II flammables.				X	1-3-4		
Lead Sulfocyanate	. 1	1	1	0	Separate from other items.	D	3' aisle space			-	X	1		
Lead Thiocyanate (See Lead Sulfocyanate). Lime (Unslaked) (See					All the second of the second o		Market Control of the			¥				
Calcium Oxide). LITHIUM	1	1	2	E	Special handling and storage required.	E	A STANDARD OF THE STANDARD OF					5		1
Lithium Aluminum Hydride.	3	1	2	E	No special handling	D					x	5		1
LITHIUM HYDRIDE	1	.4	2	Е	Special handling and facility required.	E						5		1
Lye (See Potassium Hydroxide).														-
MAGNESIUM (Including Alloys).	-	1	2	Е	Special handling and storage.	Е						5 Tale		
Magnesium Chloride		1	0	0	No special handling	D				/	X	1-3-4	1	1

Table 5-5. Hazardous Materials Storage and Handling Criteria

		Hazard	Identity			Stor-		Тур	e of Stora	ge Facilit	ties	Portable	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Class Liquid
Magnesium Nitrate	1	0	1	D	Protect from physical damage.	D	Separate from combustible items by 3' aisle space.				Х	3-4	
Magnesium Perchlorate	1	0	1	D	Protect from physical damage.	D	Separate from combustible items by 3' aisle space.				Х	3-4	
Maleic Anhydride (Crystals).	3	1	1	E	Store with class II flammables.	A	3' aisle space	X				3-4	
Mandelic Acid (Crystals).	1	0	0	0	No special handling	D	None				X	1–3–4	
Mannitol (Crystals)	1	1	0	0	Protect from physical damage.	D	Separate from combustible items by 3' aisle space.		in a second		X	3-4	
Mercury	3	0	0	0	No special handling	D					X	3-4	
Mesityl Oxide		3	0	0	Store in end of building to aid in fire fighting.	A	Separate from class II flammables by 4' aisle.		X			3-4	IC
Methacrylic Acid	3	2	2	0	Protect against physical damage.	В	3' aisle space		Х			3-4	IIIA
Methanel (See Formaldehyde).								leis la					
Methanol (See Methyl Alcohol).			pt.										
Methane Gas	1	4	0	0	Separate from oxygen cylinders.	C	Solid compartment or separate building.			Х		4	
Methyl Acrylate	2	4	2	0	Store in end of building.	A	Separate from class II flammables by 4' aisle.	X				3	IB
Methyl Alcohol	_	3	0	0	Store in end of building.	A	Separate from class II flammables by 4' aisle.	X				3-4	IB
Methylamines (Mono, di).	3	4	0	0	Store in end of building.	A	Separate from class II flammables by 4'	X				3-4	IA
(Tri). Methyl Benzene (See Toluene).	2	4	0	0	and the second s	1	aisle.		A CONTRACTOR	15.48	en entre		
Methyl Bromide	3	0	2	0	Non Flammable Gas	C	None			X		N/A	
Methyl Chloride Chloromethane.	3	4	0	0	Flammable Gas		Separate from Oxygen					Stop- flow of	

Methylene Chloride	2	10	1 0	10	Non Flammable Gas	C	None	1	1	X I		N/A	1 1
Methyl Chloroform Methyl Cyanide (See	2	0	0	0	No special handling	D	None	4 1.0			X	3-4	
Acetonitrile). Methyl Ethyl Ether	2	4	200	0	Store in end of building to aid in fire	A	Separate from class II flammables by 4'	x				3-4	IA
Methyl Ethyl Ketone	2	3	0	0	fighting. Store in end of building.	A	aisle. Separate from class II flammables by 4'	X			(L	3-4	IB
METHYL ETHYL KETONE PEROXIDE.	2	2	4	D	Special handling and storage.	E	aisle space.						
Methyl Formate	2	4	-	0	Store in end of building to aid fire fighting.	A	Separate from class II flammables by 4' aisle space.	X		( )		3-4	IA
Methyl Isobutyl Ketone	2	3	-	0	Store in end of building to aid fire fighting.	A	Separate from class II flammables by 4' aisle space.	X				3-4	IC
Methyl Methacrylate	2	3	2	0	Store in end of building to aid fire firefighting.	A	Separate from class II flammables by 4' aisle space.	X				3-4	IB
Methyl Phenol (See Cresol).							and space.					u.	1-1
Methylene Oxide (See Formaldehyde). Mineral Spirits (See													
Naphtha Aromatic).  Molybdenum Disulfide												100	
(See Molybdenum Sulfide).					in a second								
Molybdenum Sulfide	1	0	0	0	No special handling	D	None				x	3-4	
Monochlorobenzene (Chlorobenzene).	2	3	-	0	Store in end of building to aid fire fighting.	A	Separate from class II flammables by 4' aisles.	X				3-4	IC
Monochlorodifluoro- methane.	2	0	0	0	Separate from oxygen cylinders.	C	Separate building or solid compartment.			x		3-4	
Monoethanolamine (Ethanolamine).	2	4	0	0	Store in end of building to aid fire fighting.	A	Separate from class II flammables by 4' aisle.	X				3-4	IIIB
Muriatic Acid (See Hydrochloric Acid).	- T. W.				ngnung.		alsie.						1
Naphtha	See 1	abel		0	Store in end of building to aid fire fighting.	A	Separate from class II flammables.	х				3-4	
Naphtha Aliphatic	2	3	0	0	Store in end of building to aid in fire fighting.	A	Separate from class II flammables.	х				3-4	

		Hazard 1	dentity			Stor-		Тур	e of Stora	age Facilit	ies	Portable	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen- Pur- pose Whse	Extin- guisher Type	Class Liquid
Naphtha Aromatic	2	3	0	0	Separate from class II flammables.	A	3' aisle space	Х				3-4	
Naphthalene	2_	2	-	0	Separate from class I flammables.	A	4' aisle space	X				3-4	IIIA
Neatsfoot Oil	0	1	0	0	No special handling	D	4' aisle space				X	3-4	IIIB
Nickle Acetate	1	0	0	0	No special handling	D	None				X	3-4	
Nickel Chloride	1	0	0	0	No special handling	D	None				X	3-4	
Nickel Nitrate	î	0	1	D	Separate from other items.	D	3' aisle space				X	3-4	
Nickel Sulfate	1	0	0	K	No special handling	D	None			100,000	X	3-4	
Nitric Acid	2	0	2	K	Store with bungs up. Do not store on wood pallets or	В	3' aisle space		X			1	
					dunnage.		the state of the same of the same of						
Nitric Ether (See Ethyl													
Nitrate).	P (1)									A. Land			
Nitroaniline	3	1	1	0	Separate from other	D	4' aisle space				X	1-3	IIIB
	Section 2 to 100	-			items.				A CONTRACTOR			140	
Nitrobarite (See Barium				150	and the same residents as the same		the Special Statement of Course	Electric Self	-		1000000		
Nitrate).	100		PESOT VI		The life of the said		*	1 7 3	Barrier India		Section 18		
Nitric Oxide (See				-64	Addition of the second	to decide	and the second second second		Marile 1		43.16	4.00	
Nitrogen Tetroxide).				1									
Nitrous Ether (See					With the second second		THE PERSON NAMED IN			1			
Ethyl Nitrite).				1000				98.			200		
Nitrobenzene	3	2	Entra Age	0	Store with class II flammables.	A	4' aisle space from class I flammables.	X	200		al and by	1-3-4	111A
Nitrobenzol (See Nitrobenzene).								is jul			13.1		
Nitrocellulose (See	110	1761		1	BLUE BULLET THE		A 4			-	2198 7	100	
Cellulose Nitrate).		1	1	1100	Mesonaphia and the same and	the state of	and the second s	1		-			
Nitrochlorobenzene	3	1	1	0	Store with class II flammables.	A	4' aisle space from class I flammables.	X	Tr.			1-3-4	IIIB
Nitroethane	1	3	3	0	Store with class I flammables.	A	4' aisle space from class II and other class I flammables.	X				3-4	IC
Nituages (Car)	0	0	0	0	Nonflammehla sas	C		100		x	e set	N/A	
Nitrogen (Gas)	0	0	0	0	Nonflammable gas		None			A		N/A	
Nitrogen Peroxide (Gas)		3	1 6 6	100	The second secon	13.00		B	1 345	1		Total A	
(See Nitrogen	1 0		1 2	1			The second second	1	1		19.3		
Tetroxide).		1 518		1			After the second section of	1	1	1	1	1	



Nitrogen Tetroxide	3	0	1	D	Store away from oxygen cylinders.	C	Separate shed or solid compartment.			X		3-4	
Nitromethane	1	3	4	0	Store in end of	A	4' aisle from class II	x				3-4	IC
Nitropropanes	_	2	3	0	building Store in end of	A	flammables. 4' aisle from class II	x				3-4	II
		Sile in	The state of the s		building		flammables.						
Nitrous Ether (See Ethyl Nitrite).	2	4	4	0			Land of the						
Nitrous Oxide	2	0	1	0	Do not store with flammable gases.	C	Separate building or solid compartment.			x		N/A	4-11-2
Nitric Ether (See Ethyl Nitrate).					Manimatic gases.		sond compartment.		1	i i di ci			112,366
Organic Coating Materials (Oil Base	See lab	bel			Store in ends of bays or in areas offering	D	3' aisle space				X	2,3,4	
Paints, Enamels &	A seize				quick access to fire		and the second of the second			200		7 7085	g the state of
Aerosols).					department hose								
Oil of Vitriol (See					Streams.								
Sulphuric Acid).		1 Px											
Oils (Lubricating)	0	1	0	0	Store away from other items.	D	3' aisle space				X	3-4	production of
Oxalic Acid	-	0	0	0	No special handling	В	3' aisle space from other acids.		X			3-4	
Oxygen Gas	0	0	1	0	Do not store with flammable gases.	C	Separate building or solid compartments.			х		N/A	
Paints (Oil Base) (See Organic Coating Materials).				1									
Paints (Water Base)	See lab	pel			No special handling	D	None				X	1-3-4	The second second
Paraldehyde	2	3	1	0	Store with class I flammables.	A	Separate from class II flammables.	X				3-4	IC
Parathion	4	1	0	0	Separate from other items.	В	3' aisle space		x			1	
Penetrating Fluid (See Inspection					ivenis.		n			41.			
Penetrant).	3 / 100		14 . 5										
Peracetic Acid	3	2	4	0	Separate from other items.	В	4' aisle space	10 10 10	X			1	II
Perchloric Acid	3	0	3	K	Separate from other items. Protect	B	3' aisle space		X			3-4	
					against freezing— 4° F. Do not store			17,536.50		350			
Petroleum Ether		4		0	on wood pallets.								1000
(See Ether, also Benzine).													
Phenol (Carbolic Acid)	3	2	0	С	Separate from other items.	В	4' aisle space		X			3-4	IIIA
	12 m 12 m 19		124					0 ( 0 0 )	C 6	STATE OF STA		10 TO	100000000000000000000000000000000000000
Phenolphthalein	1	0	0	0	No special handling	D	None				X	3-4	A STATE OF THE PARTY OF THE PAR

15 September 1979

DOD 4145.19-R-1

Table 5-5. Hazardous Materials Storage and Handling Criteria—Continued

		Hazard	Identity			Stor-		Тур	e of Stora	ge Facilit	ties	Portable	
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Class Liquid
Phosphorus (White- Yellow).	3	3	1	0	Separate from other items.	A	3' aisle space	X				1	
Phosphorus Penta- Sulfide.	3	1	2	E	Separate from other items.	D	3' aisle space				X	3 Dry Sand	
Phosphorus Sesquisulfide.	2	1	1	0	Separate from class I flammables.	A	3' aisle space	X				T	
PHOSPHORUS TRICHLORIDE.	3	0	2	Н	Special facility	E	A				1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		
PICRIC ACID	2	4	4	D	Special facility	E	4' aisle space					14.8	IIIB
Pine Oil	1	2	0	0	Store with class II flammables.	A	4' space from class I flammables.	X				3-4	IIIA
POTASSIUM	3	1	2	E	Special facility and handling.	Е						PART SALES	
Potassium Bifluoride	1	0	0	0	No special handling	D	None				X	3-4	
Potassium Bromate	1	0	0	D	No special handling	D	None				X	3-4	
Potassium Carbonate	1	0	0	0	No special handling	D	None				X	3-4	
Potassium Chlorate	R (OBLISH) TH	0	2	D	Separate from other items.	D	3' aisle space				X	1	
Potassium Chromate	1	0	0	D	No special handling	D	None	and the same of	30.00		X	3-4	
Potassium Cyanide		0	0	0	Separate from other items.	S	3' aisle space				X	3	
Potassium Dichromate	2	0	0	D	Separate from other items.	D	3' aisle space				X	3-4	
Potassium Fluoride	1	0	0	0	No special handling	D	None				X	3-4	
Potassium Hydroxide (Lye).	3	0	1	В	Separate from other items.	D	3' aisle space				X	1	
Potassium Iodide	1	0	0	0	No special handling	D	None				X	3-4	
Potassium Nitrate	1	0	2	D	Separate from other items.	D	3' aisle space				X	1	
Potassium Perchlorate	1	0	2	D	Separate from other items.	D	3' aisle space				X	3-4	
Potassium Permanganate	0	0	1	D	Separate from other items.	D	3' aisle space				X	3-4	
Potassium Peroxide	3	0	2	D	Separate from other items.	D	3' aisle space				X	4	
Potassium Persulfate	1	0	1	D	Separate from other items.	D	3' aisle space				X	1	
Potassium Sodium Tartarate.	1	0	0	0	No special handling	D	None	25			x	3-4	

Potassium Sulfide	_ 2	1	0	0	Separate from other	D	3' aisle space				X	1	1	1
Propionaldehyde	2	4	1	0	items. Store in end of	A	4' aisle space from	x				3-4	IB	
(Propanal).					building.		group II flammables.					07	10	
Propionic Acid	_ 2	2	0	0	Separate from class I flammables.	A	4' aisle space from class I flammables.	X				1-3-4	II	
Propane Gas	. 1	4	0	0	Stored separated from	C	Separate building or			x		3-4		
Propane Torch Fuel (14 oz. containers) (See Soldering Torch Kit).	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				oxygen.		solid compartment.							
Prophlamine	. 3	3	0	0	Store in end of building.	A	3' aisle space from class II flammables.	x			580	3-4		
Propyl Nitrate	2	3	3	0	Store in end of building.	A	4' aisle space	x		4		3-4	IB	
Propylene (Gas)	. 1	4	1	0	Separate from oxygen cylinders.	C	Separate building or solid compartment.			х		3-4		
Prophlene Oxide	. 2	4	2	0	Store in end of building.	A	4' aisle space	x				3-4	IA	
Pyridine	. 2	3	0	0	Store in end of building.	A	4' aisle space	X				3-4	IB	
Pyrogallol Pyroxylin (See Cellulose Nitrate).		0	0	0	No special handling	D	None				x	3-4		
Que Bracho Quick Lime (See Calcium Oxide). Quick Silver (See	. 0	1	0	0	No special handling	D	None			*****	X	1-3-4		
Mercury). Rodenticide (Diphacinparaffin).	See la	abel		0	No special handling	D	None				x	1–3		1
Rosin	See le	abel		0	N	-		178-19	100	31. 9				1
Saltpeter (See Potassium or Sodium	See 1a	per		U	No special handling	D	None				Х	3-4		
Nitrate). Shellac (Liquid)	0	4	0	0		T. E.				1			1	1
Silicone Compound				U	No special handling	A	None				X	2,3,4		1
Silver Cyanide	1	0	0 1	0	No special handling	D	None				X	3-4		1
Silver Nitrate	1	0	1	D	Separate from other items.	D D	None3' aisle space				X	3-4 3-4		
Skin Protective Compound.	0	0	0	0	No special handling	D	None				x	3-4		
SODIÚM	3	1	2	E	Special handling and facility.	E	e de la companya de l La companya de la companya de	glemar a		70			A A	
Soldering Torch Kit (Portable Propane Torch, 14-oz. fuel cylinders).	1	4	1	0	Store in end of building to assist in fire fighting.	A	Separate from class II flammables by 3' aisle space.	х				3-4		
Sodium Acetate	0	0	0	0	No special handling	D	None			3022	x	3-4		1

Table 5-5. Hazardous Materials Storage and Handling Criteria—Continued

		20	Hazard	Identity			Stor-	outset the best of	Тур	e of Stora	ge Facilit	ties	Portable	
	Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Class Liquid
Zadium	Bicarbonate	0	0	0	0	None	D	None				X	N/A	
PROBLEMENT TO VICTOR	Bisulfate	3	0	0	E	None	D	None	0.0000000000000000000000000000000000000			X	3-4	
	Borate	0	0	0	0	None	D	None	0.000002500300707070433			X	3-4	
	Bromide	1	0	1	E	No special handling	D	None				X	1-3-4	
	Carbonate	0	0	0	0	None	D	None				X	3-4	
	Chlorate	-	0	2	D	Separate from other items.	D	3' aisle space			-	X	1	
odium	Chloride	-	1	2	D	Separate from other items.	D	3' aisle space				X	1	
odium	Cyanide	3	0	0	E	Separate from other items.	S	3' aisle space				Х	1	
odium	Hydrosulfite	3	1	2	E	Separate from other items.	D	3' aisle space	pieres de con			X	1-3-4	an ara
odium (Lye).	Hydroxide	3	0	1	В	Separate from other items.	D	3' aisle space				X	1	
	Hyperchlorite _	2	1	0	D	Separate from other items.	D	3' aisle space	Mar A various	discon an age	The same	X	1-3-4	
odium	Hypophosphite	2	2	0	0	Separate from other items.	D	3' aisle space				X	1-3-4	10 /0 p. 10 1
odium	Nitrate		0	2	D	Separate from other items.	D	3' aisle space	75770			X	1	
odium	Perchlorate	2	0	2	D	Separate from other items.	D	3' aisle space				X	1	
Sodium	Peroxide	3	0	2	J	Separate from other items.	D	3' aisle space				X	1-4	Se are been
Sodium	Phosphate	2	0	0	0	No special handling	D	None				X	1-3-4	
	M POTASSIUM	3	3	2	E	Special facility and handling.	E							
	Silicate	_	0	0	0	No special handling	D	None					N/A	d
	Sulfide		1	_	0	Separate from other items.	D	3' aisle space			magerio	X	1	
odium	Sulphate	0	0	0	0	No special handling	D	None					3-4	
	Sulphite		0	1	Н	No special handling	D	None				X	3-4	
	Fluid	2	4	1	0	Store in end of building.	A	3' aisle space from class II flammables.	X			-	1-3-4	
Stoddar	d Solvent (Dry	2	3	0	0	Store with class II flammables.	A	4' space from class I flammables.	X				3-4	II
	ım Nitrate	1	0	1	D	Do not store on wood pallets.	D	3' aisle space				X	1-3-4	up to

and the state of t													
Strontium Peroxide	1	0	1	D	Do not store on wood pallets.	D	3' aisle space				X	1-4	
Styrene (monomer)	2	3	2	0	Store in end of building.	A	4' aisle space from class II flammables.	X		A		3-4	IC
Sulfuric Ether (See	1 100				Capita Spinish Section 1		Minimum and the second	Marie Ta				1	AND THE PERSON
Ether).					The state of the s								700000
	2	1 .							Show Y				
Sulphur		1	0	0	Separate from other items.	D	3' aisle space				X	1	
Sulphur Dioxide	3	0	0	0	No combustible gas	C	Store with oxygen cylinders.			X		N/A	
Sulphuric Acid	3	0	1	K	Separate from other	В	3' aisle space		x				
Sulphuric rich	"	1	7,	1	acids.	ь	o aisie space		A			4	
		1						all all					
Talc	See la		1	0	No special handling	D	None			X		3-4	
Tannic Acid	0	1	0	0	Separate from other	В	3' aisle space		X		de la	3-4	en - watercom
Tar Camphor (See					items.		o disire space		A			3—4	
Naphthalene).								1					
				_		1			1				
Tetraethyl Lead (TEL	3	2	3	0	Store with class II	A	3' aisle space from	X				1-3-4	
Compound).	1.0				flammables.		class I flammables.						
Tetraethyl Lead (TML	3	3	3	0	Store in end of	A	3' aisle space	X				1-3-4	
Compound).	1000	1			building.	**	o aisie space	A				1-0-4	1 2 2
	2	3	1	0	Store in end of	1 .16				Marie S		Barrie Inches	
Tetra Hydrofuran	2	3	1	U		A	4' aisle space from	X				2a-2-4	IB
					building.		class II flammables.		100				
Tartaric Acid	0	1	0	0									
*Thorium Nitrate	1	0	-	D	Separate from other items.	D	3' aisle space				X	1	
Toluene	2	4		0									
		4	0	0	Store in end of building.	A	4'aisle space	X				2,3,4	IB
Toluene—Diisocyanate	2	1	2	E	Separate from class I flammables.	A	4' aisle space	X				3-4	IIIB
Toluene—Methyl Isobutyl Ketone.	2	3	0	0	Store in end of building.	A	3' aisle space	X				3-4	
Toluidines (Ortho, Para)	3	2		0				5		100			
	3	2		U	Separate from class I flammables.	A	4' aisle space	X				3-4	IIIA
Toluol (See Toluene).	150								1			9.5	
Triamylamine	2	1	0	0	Separate from class I flammables.	A	4' aisle space	x				3-4	IIIA
Tributylamine	2	2	0	0	Separate from class I flammables.	A	4' aisle space	x				3-4	IIIA
Trichloroethane	2	0	0	0	No special handling	D	N						
	_	100	0	-	No special handling		None				X	3-4	
Trichloroethylene		1		0	No special handling	D	None				X	3-4	and the same of the
Trichlorofluoromethane	2	0	0	0	No special handling	D	None				X	3-4	
Trichlorotrifluoroethane	2	0	0	0	No special handling	D	None				X	3-4	
Triethanolamine	1	1	1	0	No special handling	D	None				X	3-4	at the second
Triethylamine	2	3	0	0	No special handling	D	4' aisle space				X	3-4	IB
Triethelborane (See Diborane).	chieni com in				opecial managing	D	asse space				Λ	3-4	IB
	2	1	0	0	No appoint handling	-	1		1455				
Tricresyl Phosphate	1 2	1	0	0	No special handling	D	None				X	1,3,4	A- 1375 A- 1

Table 5-5. Hazardous Materials Storage and Handling Criteria—Continued

	1	Hazard l	Identity		4,30	Stor-		Тур	e of Stora	ge Facilit	ies	Portable	E ROY
Noun	Health	Flam- ma- bility	Reac- tivity	Spe- cific Haz- ard	Storage and Handling	age Comp Group	Separation Requirement	Flamm Stge Bldg	Acid Stge Bldg	Comp Gas Stge Bldg	Gen Pur- pose Whse	Fire Extin- guisher Type	Class Liquid
TRINITROBENZENE	2	4	4	0	Special facility and handling.	E							
TRINITROTOLUENE (TNT).	2	4	4	0	Special facility and handling.	E							
risodium Phosphate	2	0	0	0	No special handling	D	None				X	3-4	E. 303
Curpentine	1	3	0	0	Separate from class I flammables.	A	4' aisle space	X				3-4	IC
Inslaked Lime (See Calcium Oxide).					31-2-2-2								, ID
Jnsymmetrical Dimethylhydrazine.	3	4	1	0	Store in end of building.	A	4' aisle space from class II flammables.	X				3-4	IB
Uranium Nitrate	-	0	1	D	Separate from other items.	D	3' aisle space		in Maria	phones et à	X	1	A Sillingson
Uranyl Acetate	1 See la	bel	1	0	No special handling No special handling	D D	None				X	3-4 3-4	
Vinegar Acid (See Acetic Acid).	111.1 (156.110)	pira mile		-							PER SHEET	the factors of the factor of the	THE RESERVE
Vinyl Acetate	2	4	2	0	Store in end of building.	A	4' aisle space from class II flammables.	X				3-4	IB
Vinyl Benzene (See Styrene).			182 1				404		that dis		-5,2	100	100
Vinyl Chloride (Gas)			. 1	0	Separate from oxygen cylinders.	C	Separate building or solid compartment.			X			
Vinyl Ether (Divinyl Ether)	2	3	2	0	Store in end of building.	A	Separate from class II flammables by 4' aisle space.	X		basi -		3-4	IB
(Dichloethylene) Vinylidene Chloride	2	4	2	0	Store in end of building.	A	4' aisle space	X				3-4	IA
Xylenes (Ortho, Para Meta).	2 2	3 4	0	0	Store in end of building.	A	4' aisle space from class II flammables.	X				2-3-4	IC
Meta).  Xylol (See Xylene).  Water Glass (See  Sodium Silicate).	2				Seitung.			la contraction of	A STATE OF THE STATE OF		-		
Zinc (Powder)	-	1	1	0	Separate from other items.	D	3' aisle space	1300			X	5	September 1
Zinc Chlorate	. 2	0	2	D	Do not store on wood pallets.	D	3' aisle space					1–5	
Zinc Oxide	1	0	0	0	No special handling	D	None					3-4	
Zinc Sulfide		0	0	0	No special handling	D	None	0.60.40			X	3-4	-

Zirconium (Powder)	1	4	1	0	Separate from other items.	D	3' aisle sp	pace	 		X	5	
Zinc Diethyl (See Diethylzinc).							7952					to a species of	
Zinc Ethyide (See Diethylzinc).													
Zinc Ethyl (See Diethylzinc).					Line was the		P. Carlotte			1964 2 6 6		F 7 1	

#### Notes.

- 1. The following codes describe the health hazards. (A dash (-) means identity to be developed)
  - Code

    4 A few whiffs of the vapor could cause death, or the vapor or liquid could be fatal on penetrating the fire fighter's normal full protective clothing which is designed for resistance to heat. The normal full protective clothing available to the average fire department will not provide adequate protection against skin contact with these materials.
  - Materials extremely hazardous to health, but areas may be entered with extreme care. Full protective clothing, including selfcontained breathing apparatus, rubber gloves, boots and bands around legs, arms and waist should be provided. No skin surface should be exposed.
  - 2 Materials hazardous to health, but areas may be entered freely with selfcontained breathing apparatus.
  - 1 Materials only slightly hazardous to health. It may be desirable to wear selfcontained breathing apparatus.
  - Materials which on exposure under fire conditions would offer no health hazard beyond that of ordinary combustible material.
- 2. The following codes describe the flammability hazards.

Code Explanation

- Very flammable gases, very volatile flammable liquids, and materials that in the form of dusts or mists readily form explosive mixtures when dispersed in air. Shut off flow of gas or liquid and keep cooling water streams on exposed tanks or containers. Use water spray carefully in the vicinity of dusts so as not to create dust clouds.
- Liquids which can be ignited under almost all normal temperature conditions. Water may be effective on these liquids because of their low flash points. Solids which form coarse dusts, solids in shredded or fibrous form that create flash fires, solids that burn rapidly, usually because they contain their own oxygen, and any material that ignites spontaneously at normal temperatures in air.
- 2 Liquids which must be moderately heated before ignition will occur and solids that readily give off flammable vapors. Water spray may be used to extinguish the fire because the material can be cooled to below its flash point.
- Materials that must be preheated before ignition can occur. Water may cause frothing of liquids with this flammability rating number if it gets below the surface of the liquid and turns to steam.

  However, water spray gently applied to the surface will cause a frothing which will extinguish the fire. Most combustible solids have a flammability rating of 1.
- 0 Materials that will not burn.
- 3. The following codes describe the reactivity hazards. (A dash (—) means identity to be developed)

an advanced or massive fire, the area should be evacuated.

Code

4 Materials which are readily capable of detonation or of explosive decomposition or explosive reaction at normal temperatures and pressures. Includes materials which are sensitive to mechanical or localized thermal shock. If a chemical with this hazard rating is in

Code	Explanation
3	Materials which are capable of detonation or of explosive decomposition or of explosive reaction, but which require a strong initiating source or which must be heated under confinement before initiation. This includes materials which are sensitive to thermal or mechanical shock at elevated temperatures and pressures or which react explosively with water without requiring heat or confinement. Fire fighting should be done from a protected location.
2	Materials which are normally unstable and readily undergo violent chemical change but do not detonate. This includes materials which can undergo violent chemical change at elevated temperatures and pressures, and materials which may react violently with water or which may form potentially explosive mixtures with water. In advanced or massive fires, fire fighting should be done from a protected location.
1	Materials which are normally stable but which may become unstable at elevated temperatures and pressure or which may react with water with some release of energy, but not violently. Caution must be used in approaching the fire and applying water.
0	Materials which are normally stable even under fire exposure conditions and which are not reactive with water. Normal fire fighting procedures may be used.
	es describe the specific hazards.
Code A	Corrosive Acid (ACID)
В	Corrosive Alkali (ALK)
C	
	Corrosive material other than acid and alkali (COR)
D	Oxidizing Material (OXY)
E	Use No Water in Fire Fighting (W*)
F	Corrosive Acid; Use No Water in Fire Fighting (ACID W*)
G	Corrosive Alkali; use no water in fire fighting (ALK W*)
H	Corrosive material other than acid and alkali; use no water in fire fighting (COR W*)
J	Oxidizing material other than acid and alkali; use no water in fire fighting (OXY W*)
K	Oxidizing Acid (ACID OXY)
L	Oxidizing Alkali (ALK OXY)
M	Corrosive Oxidizing Material (COR OXY)
N	Corrosive Oxidizing Material; Use no water in fire fighting (COR OXY W*)
0	No specific hazard.
*This symbol w	ill include a dash on the identification label.
	es describe the storage compatibility group.
Code	Explanation

Items in this group will be stored in the flammable storage building with separation as indicated in the Table of Hazardous Materials. A

Items in this group will be stored in acid storage building, with separation as indicated in the Table of Hazardous Materials. В

C Items in this group will be stored in the compressed gas cylinder storage facility, with separation as indicated in the Table of Hazardous Materials.

	D	Items in this group may be stored in general purpose warehouse, with separation as indicated in the Table of Hazardous Materials.
	E	Items in this group require special facilities and handling. Consult the installation Fire and Safety Officers and other appropriate personnel of the respective service for specific storage and fire protection requirements.
	S	Items in this group shall be kept in a locked storage space accessible to authorized personnel only.
	w	Items in this group shall be stored in a non-sprinkler protected space.
6.	ng code Code 1	es describe the most suitable extinguishing agents in the form of portable extinguishers.  Extinguishing Agent  Water
	2	Foam
	2a	Alcohol Foam
	3	Carbon Dioxide
	4	Dry Chemical
	5	Dry Chemical for Metal Fires
7.	ing code Code IA	Explanation  Liquids having flashpoints below 73° F (22.8° C) and having a boiling point below 100° F (37.8° C).
	IB	Liquids having flashpoints below 73° F (22.8° C) and having a boiling point at or above 100° F (37.8° C).
	IC	Liquids having flashpoints at or above 73° F. (22.8° C) and below 100° F (37.8° C).
	II	Liquids with flashpoints at or above 100° F (37.8° C) and below 140° F (60 C) except any mixture having components with flashpoints of 200° F (93.3° C) or higher, the volume of which make up 99 percent or more of the mixture.
	III	Liquids with flashpoints at or above 140° F (60° C).
	IIIA	Liquids with flashpoints at or above 140° F (60° C) and below 200° F (93.3° C) except any mixture having components with flashpoints of 200° F (93.3° C) or higher, the total volume of which make up 99 percent or more of the total volume of the mixture.
	IIIB	Liquids with flashpoints at or above 200° F (93.3° C).

#### Section 5. SUBSISTENCE

	Paragraph
Perishable subsistence, chill and frozen storage	5-501
Semiperishable subsistence in dry storage	5-502

# 5-501. Perishable Subsistence, Chill and Frozen Storage

a. Prevention of deterioration.

(1) General. All chilled and frozen subsistence is highly perishable and subject to rapid deterioration when improperly stored. Storage at temperatures which are too high or too low, under unfavorable conditions of humidity, and in the absence of proper air circulation in unsanitary storerooms will result in rapid spoilage and eventual loss of the product. Most spoilage of chilled and frozen subsistence is caused by micro-organisms, particularly certain species of bacteria and fungi; the contamination spreads rapidly from the decayed items to the surrounding sound subsistence. Therefore, frequent inspection while in storage, followed by sorting and removal of the decayed items or portions thereof, is of basic importance in maintaining the products in top condition and in keeping losses and surveys to a minimum. All shipments should be segregated and marked in such a manner as will assure that the oldest lots are issued first, except when it may become necessary to issue a lot quickly to avoid loss by spoilage or when another lot of the same commodity is in a better condition for continued storage. Old lots of chilled or frozen subsistence should not be allowed to accumulate in storage rooms but should be issued promptly or surveyed if unfit for use. Frozen products will not be accepted in a partially thawed condition, nor will such products be refrozen after having been defrosted.

(2) Air circulation.

(a) General. Along with proper temperature and humidity, air circulation in a storage room is an important factor in the proper storage of chilled and frozen stored subsistence. This is facilitated by stacking the products on pallets in such a manner, that will provide a 4-inch wall clearance, 2-foot ceiling clearance and sufficient working aisleway.

(b) Fruits and vegetables. Containers should be raised off the floor by the use of pallets and individual lots should be stacked so as to permit free circulation of air. The use of a fan or duct system may be desirable in some cases to maintain proper circulation in all parts of the room. The introduction of outside air into cold storage rooms housing fruits and vegetables is not necessary. However, when fresh fruits and vegetables are stored in tight compartment at temperatures of 40° F or higher, the concentration of carbon dioxide produced by respiration may reach such a danger point that a match or candle will be extinguished. While this condition is not considered harmful to most products, personnel should not work in such rooms until a supply of fresh air has been introduced.

(c) Quick-frozen fruits and vegetables. Quickfrozen fruits and vegetables are highly perishable unless properly stored. Correct handling and proper storage of such foods are imperative in utilizing frozen foods to the best advantage. Upon delivery, quick-frozen fruits and vegetables should be transferred promptly to a low temperature storage space. Temperature of the load should be checked upon arrival by taking temperature readings of cartons selected from top layers inside of shipping cases. If the temperature of the product is higher than freezer room temperature, shipping cases should be scattered loosely about the room on handtrucks or upon pallets on the floor with adequate space between individual cases to permit rapid lowering of the product temperature to freezer room temperature. The use of a portable fan to create an air current over the products will hasten temperature equalization. When the temperature of the product has been lowered sufficiently, cases should be stacked compactly. If the product temperature upon delivery is the same as or below temperature of freezer room, the cases should be stacked compactly immediately.

(d) Meat, meat products and poultry. A prime factor in keeping the temperature in all parts of meat storage spaces at the recommended levels is proper circulation of the refrigerated air. Meat items will not be stored on the bare floor; pallets should be placed on the floor to allow free circulation of air under all items stored in the space. Generally, when the recommended temperature in all parts of the refrigerated space is uniform and is maintained within the stacks in the freezer space, the circulation of air may be considered to be adequate.

(e) Dairy products and eggs. To keep the air

in a cold storage room fresh, the room must be kept clean and the air must circulate slowly. Ordinarily, adequate air circulation can be provided by the use of pallets on the floor, and by proper stacking of the various lots. Egg cases should not be stacked more than five high to avoid pressure damage.

(3) Transport and Storage Compatibility of Fresh Fruits and Vegetables.

(a) General. Although it may be necessary to transport and store various fresh fruits and vegetables together, there are some products which should be separated whenever possible. Apples, pears, bananas, peaches, plums, cantaloupes, ripe honey dew melons, avocados, tomatoes and other ethylene producing fruits or vegetables should not be stored with lettuce (causes russeting), carrots (become bitter), cucumbers, green peppers, acorn or Hubbard squash (loss of green color). Odors from apples and citrus fruits are readily absorbed by meat, eggs and dairy products. Pears and apples acquire an unpleasant earthy taste and odor when stored with potatoes. Other combinations which should be avoided in storage rooms are apples or pears with celery, cabbage or onions, celery with onions or carrots, green peppers with pineapples and citrus fruit with any of the strongly scented vegetables. Green peppers can taint pineapples if the two are stored or shipped together. Onions, nuts, citrus fruit and potatoes should each be stored separately whenever possible.

(b) Perishable Subsistence Compatibility Groups. For transport and storage fresh fruits and vegetables have been divided into the following compatibility groups:

#### Group

Temperature: 32° to 34° F (1° to 1° C). Relative humidity: 90 to 95 percent.

Atmosphere: Normally used on berries and cherries only—10 to 20 percent CO<sub>2</sub>.

Ice: Never in contact with commodity.

Note. Most members of this group not compatible with Group 6a or 6b because ethylene production by Group 1 can be high, and thus harmful to members of Group 6a or 6b.

Apples (except those varieties listed in *Group 3*.) Apricots

Berries (except cranberries)

Cherries

Figs (not with apples, danger of odor transfer to figs; also see *Group 6a*)

Grapes (not fumigated with sulfur dioxide (SO<sub>2</sub>) in vehicle and no chemicals that release SO<sub>2</sub> should be included in packages.

Peaches Pears

Persimmons

Plums and prunes

**Pomegranates** 

Quinces

### Group 2

Temperature: 55° to 65° F (13° to 18° C).

Relative humidity: 85 to 95 percent.

Ice: Never in contact with commodity.

Avocados

Bananas

Eggplant (also see Group 5)

Grapefruit 1

Guava

Limes

Mangos

Muskmelons, other than cantaloupes

Casaba

Crenshaw

Honey Dew

Persian

Olive, fresh

Papayas

Pineapples (not with avocados, danger of avocados' odor absorption)

Tomatoes, green

Tomatoes, pink (also see Group 4)

Watermelons (also see Groups 4 and 5)

#### Group 3

Temperature: 36° to 41° F (2° to 5° C).

Relative humidity: 90 to 95 percent; cantaloupes

about 95 percent.

Ice: In contact only with cantaloupes.

Apples (Grimes Golden and Jonathan (both, certain areas), Yellow Newton (California) and Mc-Intosh.)

Cantaloupes

Cranberries

Lemons<sup>1</sup> (use 50 to 55° F for more than a month)

Lychees (also see Group 4)

Oranges<sup>1</sup> (Florida or Texas)

**Tangerines** 

#### Group 4

Temperature: 40° to 45° F (4° to 7° C); beans 38° to 42° F (3° to 6° C).

Relative humidity: About 95 percent. Ice: Never in contact with commodity.

Beans, snap

Lychees (also see Group 3)

Okra

Oranges<sup>1</sup> (California or Arizona) Peppers, green (not with beans)

Peppers, red (if with green peppers, temperature adjusted toward top of range)

Squash, summer

Tomatoes, pink (also see Group 2) Watermelons (also see Groups 2 and 5)

#### Group 5

Temperature: 50° to 55° F (10° to 13° C); giner not below 55 F.

Relative humidity: 85 to 90 percent. Ice: Never in contact with commodity.

Cucumbers

Eggplant (also see Group 2)

Ginger (not with eggplant, also see Group 7)

Potatoes (late crop)

Pumpkin and Squashes, winter

Watermelon (temperature adjusted for other members of group; also see Groups 2 and 4).

#### Group 6a

This group, except for figs, grapes and mushrooms, is compatible with Group 6b.

Temperature: 32° to 34° F (0° to 1° C). Relative humidity: 95 to 100 percent.

Ice: Never in contact with asparagus, figs, grapes, and mushrooms.

Artichokes

Asparagus

Beets, red

Carrots

Endive and escarole

Figs (also see Group 1)

Grapes (not fumigated with sulfur dioxide (SO2) in vehicle and no chemicals that release SO2 should be included in packages.

Greens

Leek (not with figs or grapes)

Lettuce Mushrooms

Parsley

Parsnips

Peas

Rhubarb

Salsify

Spinach

Sweet Corn

Watercress

### Group 6b

This group is compatible with Group 6a, except for

figs, grapes, and mushrooms.

Temperature: 32° to 34° F (0° to 1° C). Relative humidity: 95 to 100 percent.

Ice: Contact acceptable for all.

Broccoli

Brussels sprouts

Cabbage

Cauliflower

Celeriac

Celery

Horseradish

Kohlrabi

Onions, green (not with rhubarb, figs, or grapes; probably not with mushrooms or sweet corn).

Radishes

Rutabagas

Turnips

#### Group 7

Temperature: 55° to 65° F (13° to 18° C).

Relative humidity: 85 to 90 percent.

Ice: Never in contact with commodity.

Ginger (also see Group 5)

Potatoes, early crop (temperatures adjusted for others)

Sweetpotatoes

#### Group 8

Temperature: 32° to 34° F (0° to 1° C).

Relative humidity: 65 to 70 percent.

Ice: Never in contact with commodity.

Garlic

Onions, dry

Citrus fruits-Biphenyl fungicide may impart off odors to other commodities.

The above information was extracted from Lipton, W. J. and J. M. Harvey, Compatibility of Fruits and Vegetables During Transport in Mixed Loads, US Department of Agriculture, Agricultural Research Service, ARS 51-48 (September, 1972).

(c) Chill injuries to certain products. Although the shelf lives of many fruits and vegetables are significantly extended by storage at 32° F, there are some fruits and vegetables which are subject to chill injury when stored at low but nonfreezing temperatures.

	Approxi- mate lowest safe	
Commodity	tempera- ture F°	Character of injury when stored between 32° F and safe temperature
Apples Grimes Golden (certain areas) Jonathan (cer-	36–38	Internal browning, brown core, soggy breakdown, soft scald.
tain areas) Yellow Newton (certain areas) McIntosh		
Asparagus	36	Chill damage
Avocados	40–55	Grayish-brown discoloration of flesh.
Bananas, green or ripe	53–56	Dull color when ripened.
Beans (snap)	45	Pitting and russeting.
Cranberries	36	Rubbery texture, red flesh.
Cucumbers	45	Pitting, water-soaked spots, decay.
Eggplants	45	Surface scald, Alternaria rot.
Grapefruit	50	Scald, pitting, watery breakdown.
Lemons	52	Pitting, membranous staining, red blotch.
Limes	45-48	Pitting
Mangos	50–55	Grayish scaldlike discolor- ation of skin, uneven ripening.
Melons Cantaloupes	36	Pitting, surface decay
Honey Dew	45–50	Pitting, surface decay, failure to ripen.
Casaba	45–50	Pitting, surface decay, failure to ripen.
Crenshaw and Persian	45–50	Pitting, surface decay, failure to ripen.

	Approxi- mate lowest safe	
Commodity	tempera- ture F°	Character of injury when stored between 32° F and safe temperature
Watermelons	40	Pitting, objectionable flavor.
Okra	45	Discoloration, water- soaked areas, pitting, decay.
Olives, fresh	45	Internal browning
Oranges, Califor- nia and Arizona		Pitting, brown stain
Papayas	45	Pitting, failure to ripen, off flavor, decay.
Peppers, sweet	45	Sheet pitting, Alternaria rot on pods and calyxes.
Pineapples	45-50	Dull-green when ripened
Potatoes	38	Mahogany browning (Chippewa and Segao), sweetening.
Pumpkins and hardshell squashes	50	Decay, especially Alternaria rot.
Sweetpotatoes	55	Decay, pitting, internal discoloration.
Tomatoes		
Ripe	45–50	Watersoaking and soften- ing, decay.
Mature-green	55	Poor color when ripe; Alternaria rot.

(4) Recommended average storage period for frozen perishable subsistence.

(a) Temperature. Storage temperature for all frozen subsistence items shall not exceed  $0^{\circ}$  F. During shipment the temperature shall not be higher than  $10^{\circ}$  F. For ice cream the recommended temperature is  $-10^{\circ}$  F and in no case should the temperature exceed  $0^{\circ}$  F.

(b) Condition. The recommended average storage periods listed for frozen items are based on the assumption that products delivered to the Government were processed and procured in accordance with current specifications and were in good condition at time of delivery. Condition should be the deciding factor when determining if an item is suitable for shipment to an oversea area. Exception to this rule is listed in f below. In no case should

a product received in a thawed state be refrozen for storage. Thawing will reduce the average storage life of most frozen subsistence items below the desired economical storage period.

(c) Packaging. The nature and condition of the packages are important factors which influence storage life expectancy. Example: packaging materials permeable to water vapor or which are defective will permit dehydration by sublimation (freezer burn) or other defects and materially detract from the quality and appearance of the stored product. A program should be established to reseal or repackage all damaged frozen cargo before it is stored or transshipped.

(d) Detection of deterioration. Deterioration due to time in storage and/or variations in temperatures can be detected by organoleptic inspection for such defects as dehydration (freezer burn), undue softness or mealy texture, discoloration, off odor, evidence of weeping and evidence of rancidity and/or mold.

(e) Initial quality or grade. The initial quality of a product at time of receipt by the Government is an important factor which influences storage life expectancy. Initial quality of the product is determined by method of processing and handling, as well as the grade of the ingredients.

(f) Limitations. Frozen subsistence items with a recommended average storage life of 3 months or less should not be stored for shipment to overseas areas. Such items will have exceeded the recommended storage life prior to issue in overseas area. Prior to shipping frozen subsistence items with a recommended average life of less than 6 months, a careful inspection by veterinary personnel should be made with a view toward assuring that there is sufficient storage life remaining to enable routine issue within the overseas command.

(g) Approximate storage life. Storage life is the total elapsed time from date of pack to date of issue for immediate consumption. The approximat storage life given in tables below is the best estimate of expected life, based upon experience gained through subsistence procured and stored in accordance with the applicable specifications and regulations. Specific lots of subsistence may be expected to show signs of quality loss within  $\pm 20\%$  of the time listed. Therefore, procedures shall be established to provide surveillance from time of receipt until the subsistence is issued and consumed. The frequency of inspection should be established through actual experience with various products, and as prescribed in pertinent military publications.

Table 5-6. Storage life of frozen subsistence at 0° F or below.

	Approx. Storage Life (Months)
Apples	
Apple juice, concentrated	
Asparagus	12
Bacon: <sup>2,3</sup>	
prefried	9
slab, type I	5½
slab, type II	
sliced, type I	1½
sliced, type I, vacuum packed	3
sliced, type II	
sliced, type II, vacuum packed	
Canadian	6
Beans	
green	12
lima	14
wax	12

See footnotes at end of table.

Approx. Storage Life

#### Table 5-6-Continued

(Months) Beef:2 12 boneless, fabricated ..... 12 carcass, wholesale cuts 6 corned cutlets, boneless (restructured) \_\_\_\_\_ 9 diced and diced (restructured \_\_\_\_\_ 9 dried, sliced 12 ground \_\_\_\_\_ 9 ground patties \_\_\_\_\_ liver, whole or portion cut 4 tongue, fresh tongue, cured or smoked, type 1 tongue, cured or smoked, type 2 4 Blackberries 18 18 Blueberries Bologna:2,3 Lebanon ..... 50% beef ..... 3 - 460% beef 3-4 Boysenberries, dewberries, loganberries, youngberries ..... 18 Bread dough<sup>2</sup> Bread yeast raised (and rolls fresh)<sup>2</sup> 6 Broccoli ..... 14 Brussels sprouts ..... 12 6 Burritos Butter prints and patties<sup>2</sup> 18 Cakes, coffee, layer, loaf, cheese 12 Carrots 24 14 Cauliflower Cervelat:2,3 dry ..... soft (thuringer) 3-4 Cherries, RTP and dark, sweet, pitted ..... 24 Cheese, pizza blend, shredded ..... 12 Chicken:2 gizzards 8 parts, cut up, ready to cook ..... whole, ready to cook ..... 10 Chitterlings: raw \_\_\_\_\_ 3 precooked 6 Clams, shucked<sup>2</sup> Corn 24 Corn on the cob Crabs

## Table 5-6-Continued

(Mo	x. Storage Life onths)
Cranberry juice cocktail	24
Crawfish tail	8
Dates	12
Duck <sup>2</sup>	10
Egg roll	6
Eggs:	
whole (including table grade) <sup>2</sup>	12
whites <sup>2</sup>	12
yokes, sugared or salt added <sup>2</sup>	12
Enchiladas	6
Fish:	•
fish fillets, steaks <sup>2</sup>	
fatty (mackerel, salmon)	3
moderately fatty (halibut, perch, rockfish)	6
lean (cod, haddock, flounder)	11–12
fish sticks and portions	1-12 less
and bucks and portions	
Frankfurters—50 percent pork <sup>2,3</sup>	than above
type I, carton	1/
type I, flexible package	1/2
	1
type II, cartontype II, flexible package	21/2
type III flexible package	6
type III, flexible packagetype III, can with thaw indicator	12
Grane inice concentrated	15
Grape juice, concentrated	24
Grapefruit juice, concentrated	24
Grapefruit-orange juice, concentrated	24
Grapefruit sections	12
Greens, leafy	14
boneless, cooked	6
Ice cream, sherbets or ices	9
Ice cream, novelties	3
Lamb: <sup>2</sup>	
boneless, fabricated	12
carcass, wholesale cuts	12
cutlets, boneless (restructured)	9
slices, chops	9
telescoped	12
Lard	12
Lemon juice, concentrated	
Lemonade, concentrated	18
Lime juice, concentrated	18
Lime juice, single strength	18
Lobster tail <sup>2</sup>	18
Lobster tail <sup>2</sup> Lobster, whole <sup>2</sup>	8
addition, whole	8

See footnotes at end of table.

### Table 5-6-Continued

	(Mon	Storage Life ths)
Luncheon loaf <sup>2,3</sup>		3-4
Manicotti		6
Margarine, prints and patties <sup>2</sup>		12
Meal, precooked, (TV dinners, pot pies, etc.) <sup>1,6</sup>		6
Milk fat anhydrous <sup>2</sup>		12
Milk, pasteurized, homogenized <sup>2</sup>		1
Milk, aseptically processed and packaged <sup>2</sup>		1
Milk, whole, concentrated <sup>2,4</sup>		1
Okra		18
Onion rings, french fried and raw		14
Orange juice, concentrated		24
Oysters <sup>2</sup>		8
Pastrami		6
Peaches		18
Peas:		September 1
black eye		12
dehydrofrozen	E Marking	14
green		14
Peas and carrots		14
Pepperoni		6
		14
Peppers		
Pies, fruit, baked and unbaked: <sup>2</sup> cream filled		6
cream filled		12
fruit filled		12
Pineapple		24
Pineapple juice, concentrated		6
Pizza		ALCOHOLOGY CONTRACTOR
Pizza shells <sup>2</sup>		6
Pork: <sup>2</sup>		
barbecued		6
cutlets, boneless (restructured)		8
diced and diced (restructured)		8
hocks, feet		6
hocks, smoked		3
loin, boneless, fabricated		8
slices, chops		8
wholesale cuts		8
Potatoes:		
white, french fries, precooked rounds		12
white, hash brown		12
Rabbit: <sup>2</sup>		
ready-to-cook		8
ready-to-cook, cut up		8
Raspberries		18
Rhubarb		24
Ravioli		6

#### Table 5-6-Continued

Approx. Storage Life (Months) Salami:2,3 cooked dry Sausage:2,3 beef \_\_\_\_\_ liver \_\_\_\_\_ New England style pork, bulk style pork links: type I, carton type II, carton type III, carton type III, can pork, precooked, Polish, Italian 3-4 pork and beef, precooked \_\_\_\_\_ Scallops<sup>2</sup> Scrapple Shrimp:2,7 raw, peeled/unpeeled \_\_\_\_\_ raw, breaded, molded .... Soups<sup>5</sup> Spinach .... Spinach, chopped Squash, summer and fall, cooked Strawberries 15 Succotash 12 Sweet goods, yeast raised<sup>2</sup> 2 Tamales 6 Topping, dessert ..... 24 Tortillas, corn or wheat Turkey:2 key:"
boneless, cooked \_\_\_\_\_ boneless, raw 7 whole, ready-to-cook gizzards Veal:2 cutlets, boneless, breaded (restructured) diced, cutlets, breaded \_\_\_\_\_ boneless, fabricated ..... carcass, wholesale cuts \_\_\_\_\_\_12 semi-boneless Vegetables, mixed \_\_\_\_\_\_12

Waffles<sup>2</sup> 6

<sup>&</sup>lt;sup>1</sup> Any evidence that meal has been thawed is reason for discarding.

<sup>&</sup>lt;sup>2</sup> Many of the products listed herein are also storable under chill conditions (above  $32^{\circ}$  F). See a(4)

<sup>3</sup> These products suffer deteriorative changes as a result of freezing. If frozen storage is necessary, storage times indicated will tend to minimize rancidity development.

<sup>4</sup> Storage life above 0° F is 4 months.

<sup>5</sup> Cream style soups which have broken down during freezing will be satisfac-

tory when heated.

<sup>6</sup> These meals may be used for their intended purpose up to 9 months after date of pack provided surveillance inspections performed at least every 30 days subsequent to the 6 months period result in the product being accepted for consumption.

<sup>7</sup> The quality of frozen shrimp will deteriorate within 30 days if held between

14° and 18° F.

(5) Chill storage of perishable subsistence frezing point, storage temperature, relative humidity and storage life. The following table (table 5-7) is for the guidance of personnel in computing the storage life of subsistence held in chilled storage. Many of the considerations mentioned in paragraph a(1) above are applicable to chilled storage. The storage periods given are applicable only to products processed and procured in accordance with specifications.

(a) Temperature. Chill storage is generally within a temperature range of 32–35° F. For some items, better quality is maintained at temperatures higher or lower than these and are shown as accepted storage temperature. Some items are damaged by slow freezing; for these, the average freezing points are given.

(b) Humidity. Preferred relative humidities shown in the table are those which best inhibit the

gain or loss of moisture in the item. Storage at higher relative humidities may allow water to condense on or be absorbed in the item, while at lower relative humidities, the item may dry and shrink.

(c) Approximate storage life. Storage life is the total elapsed time from date of pack to date of issue for immediate consumption. The approximate storage life given in table 5-7 is the best estimate of expected life based upon experience for subsistence procured and stored in accordance with applicable specifications and regulations. Specific lots of subsistence may be expected to show signs of major quality loss within  $\pm 20\%$  of the time listed. Therefore, procedures shall be established to provide susurveillance from time of receipt until the subsistence is issued and consumed. The frequency of inspection should be established through actual experience with various products, and as prescribed in pertinent military publications.

Table 5-7. Chill storage of perishable subsistence.

Item	Average Freezing Point	Accepted Storage Temperature	Preferred Relative Humidity %	Approximate Storage Life (Days)
Artichokes, globe	30	32	95	14
Artichokes, Jerusalem	28	32	90-100	150
Apples <sup>2</sup>	29	32	90	See Note 2
Red delicious, Washington	30	32	90	See Note 2
Apricots <sup>3</sup>	30	32	90	7-21
Asparagus, fresh <sup>3,19</sup>	31	32	95	10
to prevent chill damage during extended storage		36	95	14–21
cold tolerant <sup>3</sup> Mexican & Guatemalan var. usually rough				and the
skinned	31	40–45	85–90	14–28
usually smooth skinned (summer months)	31	55	85–90	14

See footnotes at end of table

Table 5-7. Chill storage of perishable subsistence—Continued

Item	Freezing Point	Storage Temperature	Relative Humidity %	Approximat Storage Life (Days)
Bacon <sup>9</sup>			1 47 (4)	
slab, type I		32–35	85-90	42
slab, type II		32–35	85–90	
sliced, type I		32–35		70
sliced, type I, vacuum packed		32–35	85–90	14
			85–90	21
sliced, type II		32–35	85–90	21
sliced, type II, vacuum packed Banana;		32–35	85–90	35
green	31	56–58	90–95	7–10
ripeBeans:		56–58	85	2-4
green or waxed	31	45-50	95	7-10
lima, unshelled, shelled Beef:	31	32	95	7
carcass and wholesale cuts		32-35	85-90	10–14
corned		32–35	85–90	9–11
dried, sliced		32–35	00 40	28-42
ground		32–35	85–90	4
tongue, fresh		32–35	85–90	35-42
tongue, smoked		32–35		
Beets, bunch	91		85–90	35-42
Beets, topped <sup>11</sup>	31	32	95	10–14
	30	32	95–100	120–180
Berries, black, rasp, logan, boy-	01	20		
sen, young, dew	31	32	95	2–3
Berries, straw	31	32	90–95	5–7
Blueberries Bologna:9	30	32	90–95	14
Lebanon		32–35	85–90	60
50 percent beef		32–35	85–90	12
Broccoli <sup>3</sup>	31	32	95	10-14
Brussel sprouts	31	32	95	21-35
Butter, prints and patties		32–35	Less than 55	30
Cabbage:				
red	31.7	32	95–100	21-42
summer types	31	32	95–100	21-42
winter types	31	32	95–100	90-120
Chinese, table ready shredded Cantaloupe:	31	32–35		7–10
hard ripe <sup>6</sup>	30	36	90-95	15
fullslip Carrots: <sup>11,20</sup>	30	32–35	90–95	5–14
table ready, sliced	30	32-35		10–14
mature, topped	30	32	98–100	150-270
immature, topped	31	32	98–100	28-42
bunch	30	32	95–98	10-14
Casaba melon	30	45–50	90	28-42
boat, envelopes <sup>17</sup>		50	80-90	180
cup, foil pouch <sup>17</sup>		50	00-90	
Cauliflower <sup>11</sup>	31		05	365
	01	32	95	14-28

See footnotes at end of table

Table 5-7. Chill storage of perishable subsistence—Continued

	Freezing Point	Storage Temperature	Relative Humidity %	Storage Life (Days)
Celery:			The second secon	
northern grown <sup>11</sup>	31	32	95	30–60
California or Florida <sup>21</sup>	31	32	95	35-42
Cervelat:9				
dry <sup>10</sup>		32-35	75–80	45
soft (thuringer)		32-35	85-90	14
Cherries, sweet <sup>3,18</sup>	29	30-31	90-95	14-21
Chicory	30	32-34	85–95	10-30
Chives, potted	30	35-45	90-98	14
Cheese:			34 64	
blue veined, natural		32-35	70-75	180
cheddar, natural	25	30-34	65-70	540
cottage	30	32–35		14
cream (hot pack process)		32–35	70-75	120
cream (not pack process)		35	70-75	30
mozzerella, natural		00		
process American, piemento or	25	32–35	65–70	540
Swiss loaf	25	32–35	65–70	360
sliced		32–35	70–75	360
parmesan, natural		35	70–75	180
pizza blend		35	70-75	360
provolone, natural			70-75	360
Romano, natural		32–35		360
Swiss, natural	25	32–35	70–75	
Chocolate drink	29	32–35		7
Clams, shucked		32–35		4
Cookie dough		32		90
Corn on the cob, top-iced <sup>3</sup>	31	32	95	4–8
Cranberry:				40 100
fresh	30	36-40	90–95	60–120
sauce, cup <sup>17</sup>		50		180
Cream:	A STATE OF THE STA			ge Pilitin
half and half, including filled	31	32–35		7
sour, cultured	31	32–35		14
table, including filled	31	32–35		10
whipping		32-35		10
whipping, ultra-pasteurized				
(UP) <sup>23</sup>	31	35-45		84
Crenshaw melon	30	45-50	90-95	14
Cucumbers		50-55	90–95	10-14
Currants		31-32	90-95	10-14
Dasheens, (taro root)		45-47	98-100	60-120
Dates, pitted, cured:				
Dates, pitted, cured.	1 .	32	70-75	180
cane sugar types		32	75	180
invert sugar types		32-35		14
Eggnog		32-35		84
Eggnog (UP28)	20	02-00		
Eggs, shelled	07	29-31	80-85	150-180
fresh	27			150-180
oil processed Egg plant <sup>3,6</sup>	27	29–31 45–50	70–80 90–95	7–10

Table 5-7 Chill storage of perishable subsistence—Continued

Item	Average Freezing Point	Accepted Storage Temperature	Preferred Relative Humidity %	Approximate Storage Life (Days)
Elderberry	30	31–32	90–95	60–120
Fennel	30	32	90–98	60–120
Figs, fresh	27	32	85–90	7–10
Frankfurters, 50 percent beef, 50 percent pork:9		02	80-90	7-10
type I, carton		32–35	85-90	10
type I, flexible package		32–35	85-90	21
type II, carton		32–35	85-90	35
type II, flexible package		32-35	85-90	35
French dressing, cup, boat or en-				
velope	31	50	80–90	80-90
Fruitcake, fresh		40	50-60	300
Fruits, dried	22–26	32-40	50-60	180-360
Garlic, dry	30	32	65–70	180-210
Ginger, rhizomes		55	65	180
Gooseberries	30	31-32	90-95	14-28
Grapefruit <sup>16,17</sup>	30	50	85-90	28-42
Grapefruit, Florida September to February harvest <sup>16,17</sup> All Calif.				
& Arizona	30	58-60	85–90	28
Grapefruit, sections		35–45		540
American, types <sup>4</sup>	30	32	85	21–56
European, types	28	30	90–95	60–180
Greens:			0000	00-100
endives, escarole <sup>11</sup> collards, kale, rape, beet, mus-	31.9	32	95	14–21
tard turnip, <sup>5</sup> chicory Ham: <sup>9</sup>	31	32	95	10–14
cured, canned		32-35	60-65	270
boneless, cooked		32-35	85–90	28
smoked <sup>10</sup>		32-35	85–90	28
Honeyball, melon	31	45-90	90–95	21–28
Honeydew, melon	30	45-50	90-95	21–28
Horseradish, prepared	30	32		90
Horseradish, root	29	30–32	95–100	300–360
Huckleberries	29	32	80–85	7–10
Jams, jellies, preserves: boat, envelope <sup>17</sup>		F0	00.00	100
cup, foil pouch <sup>17</sup>		50	80–90	180
Kohlrabi <sup>3</sup>		50		365
Kumquats	30	32	95	14–28
Lamb, carcass, wholesale cuts <sup>9</sup>	29	33–35	85–90	60–120
Lard, service style		32–35	85	7–10
Leeks		45	90–95	120–240
Lettuce, iceberg, individually	31	32	95	30–90
wrapped in polystyrene film <sup>12</sup> .	32	32–34	95–100	14-21
Lettuce, leaf, romaine	32	32–34	95–100	5–8
Lettuce, table ready, whole or				
chopped	32	32–34		5–7
Lobster, live in water		33-50		7
Lemons <sup>5</sup>	30	55	85-90	30-90

See footnotes at end of table

Table 5-7 Chill storage of perishable subsistence—Continued

Item	Average Freezing Point	Accepted Storage Temperature	Preferred Relative Humidity %	Approximate Storage Life (Days)
Lemon juice, reconstituted, ind.				
serving, pkg	30	50		120
Limes	29	48-50	85-90	42–56
Luncheon, loaf		32-35	85-90	14
	30	55	85-90	14-21
Mangoes' Margarine, prints and patties <sup>1</sup>		32–35	40-70	60-90
Margarine, prints and patties		32	50	7 years
Meal, combat, individual		. 02		
Milk: buttermilk	31	32-35		14
	29	32–35		7
chocolate flavored				84
chocolate flavored (UP)23	29	35-45		6
concentrated	29	32–35		7
fluid, pasteurized, all types	30	32–35		
fluid, homogenized (UP)23	31	35-45		84
ice, mix, fresh, liquid	31	32–35		10
shake, mix, fresh, liquid	31	32–35		10
Mushrooms	30	32–34	90	3-4
Mustard:	20	50	80-90	90
boat, envelope <sup>17</sup>	30	50	00-50	270
cup, foil pouch <sup>17</sup>	30		90	14-28
Nectarines	30	31–32		7–10
Okra	29	45–50	90–95	28-42
Olives	29	45–50	85–90	20-42
Onions: 13			05 50	90.60
Bermuda, dry	31	32	65–70	30–60
globe, dry	30	32	65–70	180-240
green, top-iced	30.4	32	95	21–28
Spanish	31	32	65–70	90–180
peeled or green, table ready	31	32–35	65–70	5–7
Oranges:		40 44	05.00	28-42
California <sup>22</sup> Arizona	30	40-44	85–90	Control of the State of the Sta
Florida, Texas	30	32	85–90	56–84
Temple, Tangelos	30	38-40	90–95	14–28
sections	3-12-24	35-45		540
Orange juice	30	32		21
Oysters, shucked in ice		32-35		4
Papaya	30	55-60	85–90	7–21
Parsley	30	32	95	30-60
Parsnips	30	32	98–100	60-180
Peaches <sup>3</sup>	30	31-32	90	14-28
				1
Peanut butter:		50	80-90	180
boat, envelope		50	80-90	365
cup, foil pounch	29	29-31	90-95	See note
Pears <sup>3,7,8</sup>	77	32	95	7–14
Peas, unshelled	31	45-50	90–95	14-21
Peppers, sweet	31		60-70	180
Peppers, dry, chili		32–50		
Pepperoni, dry <sup>9</sup>		32–35	75–80	28
Persian melons	31	45–50	90–95	14
Persimmons	28	30	90	90–120
Pies.				
fruit, fresh		. 35	80-85	3
fried, fresh		. 35	80-90	5

Table 5-7. Chill storage of perishable subsistence—Continued

Item	Average Freezing Point	Accepted Storage Temperature	Preferred Relative Humidity %	Approximate Storage Life (Days)
Pingapple				
Pineapple:	00	100	07.00	
mature, green <sup>6</sup>	30	50–55	85–90	21–28
ripe <sup>8</sup>	30	45	85–90	14
Plums	30	32	90–95	21-28
Pomegranates	27	32	90	14-28
Pork, wholesale cuts <sup>9</sup>		32–35	85-90	5
Poultry, all forms	27	30	95-100	5
Potatoes, sweet (cured at 85° F) <sup>3,6</sup>	30	55–60	85–90	120-210
Potatoes, white:14			00 00	120-210
early crop, uncured	31	50	90	60
early crop, cured before storage	31	40	90	60
late crop	31	[ 44명 - 보이 기급했다. 12명했다		120-150
peeled, table ready	1 Sill 1 Sill 1 Sill 1	40	90	150-240
Potatoes, white, irradiated, LPPD	31	35	95	5–9
	30	40-45	85–90	360
Prunes, Italian	30	32	90–95	14-21
Pumpkins	31	50-55	70–75	60–90
Quinces	28	31–32	90	60–90
spring, topped, poly bag	31	32	95	21-28
spring, table ready	31	32	95	10-12
winter, topped	31	32	95–100	60–120
Rhubarb	31	32	95	14-28
Rolls, brown and serve		32	80–85	21
Rutabagas, topped	30	32	98–100	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1
Salad dressing, cup, boat, enve-				120–180
lope <sup>17</sup>	31	50	80–90	90
Salmon steaks		32–35	85–90	28
Salami:9,10				
dry		32–35	75-80	60
cooked		32-35	85-90	14
Salsify	30	32	98-100	60-120
Sausage:9		32–35	85–90	
New England style				14
pork links:		32–35	85–90	10
type I		32–35	85–90	14
type II and III		32–35	85–90	21
pork bulk		32-35	85–90	14
Scallops		32-35		4
ShallotsShortening compound, can, car-	31.7	32	95	21–28
ton, cube		32–35	less than 55	1800
Shrimp, unpeeled, in ice		32–35	iess than 55	14
Syrup, imitation maple, cup, boat				
or envelope <sup>17</sup>	01.7	50	80–90	365
Spinach <sup>8</sup>	31.5	32	95	10–14
Squash, fall and winter, Hubbard	30	50-55	70–75	180
acorn	30.5	50	70–75	35–56
butternut	30	50	50	60-90
summer	31	32-40	90	4-5
to prevent chill damage during extended storage		45–50	90	10–14
Swiss chard <sup>3</sup>	31		200 75000 10000	10–14
to prevent chill damage during extended storage	31	45–50 32	90 95	

See footnotes at end of table

Table 5-7. Chill storage of perishable subsistence—Continued

Item	Average Freezing Point	Accepted Storage Temperature	Preferred Relative Humidity %	Approximate Storage Life (Days)
Tangerines	30	32	85–90	14-28
Tomatoes:	10 Te		AND TO	
mature, green <sup>8,6</sup>	31	55-70	85-90	7–21
pink	31	50-55	85-90	3–5
firm, ripe	31	45-50	85-90	4-7
full color development	31	32-35	85–98	21 after de-
Tun Color up of the			A TO SEE SEE	velopment
			The second second	of full color
Trees, Christmas, cut		22-32	85	60
Turnips	30	32	95	120-150
Veal and calf sides, wholesale cuts <sup>9</sup>		32-35	85	6
Watercress	31	32–35	90-95	7
Watermelon <sup>3</sup>	31	40-50	85-90	14-21
Yeast, bakers;				
active, dry		30-39	60-70	180-360
compressed cake		30-32	80-90	30-90
Yogurt, plain or fruit flavored	30	30–35		30

Table 5-7. Footnotes

<sup>1</sup> Soybean oil margarine is considered by some authorities to be less stable than cottonseed oil margarine.

<sup>2</sup> The length of time apples can be held successfully in cold storage at 32° F, unless otherwise specified, will vary with the variety, with the district where grown, as well as with their condition when harvested. Controlled atmosphere can extend storage life an additional 2 to 4 months.

That has been a	Storage period (months)			Storage period (months	
Variety Normal	Normal	Maximum	Variety	Normal	Maximum
Baldwin	4 to 5	7	Northern Spy	4 to 5	8
Cortland	3 to 4	5	Rhode Island		
Delicious	4 to 5	8*	Greening	3 to 4	6
Golden Delicious	4 to 6	8*	Rome Beauty	4 to 5	7
Gravenstein	0 to 2	3	Stayman Winesap	4 to 5	6
Grimes Golden			Wealthy	0 to 2	3
(some areas 34–36° F)	2 to 3	4	Winesap	5–7	8
			Yellow Newton (Calif. 38–48° F)	5 to 6	8
Jonathan (some areas 35–36° F)	2 to 3	4	York Imperial	4 to 5	6
McIntosh (some areas 38° F)	2 to 4	5	The state of the s		400

\*Stored in polyethylene bag liners (unsealed)

<sup>3</sup> Commodities not recommended for export, but which are suitable for immediate use by shore activities and by ships in port or shortly after sailing.

<sup>4</sup> Not recommended for export since the European type of grape from California with better keeping quality is available during the same period.

# Table 5-7. Footnotes-Continued

<sup>5</sup> Foothill grown lemons stored better than coastal grown lemons, especially late picked; at Receiving Markets only "Strong" lots of lemons should be stored and frequently inspected.

<sup>6</sup> Damage will result if item is stored at lower temperature than indicated.

 $^7$  For best ripening, pears should be held at about  $65^\circ$  F. for 2 to 3 days prior to serving.

8 Pears—Length of safe storage for certain varieties of pairs.

Storage of Pear varieties at 30 to 31° F.	Length of Storage Period (months)
Stored immediately after harvest at 30° to 31° F.	
Anjou	4 to 6*
Bartlett, Comice, Hardy and Kieffer	2 to 3
Bosc and Seckel	3 to 4*
Packam	5 to 6
Winter Nelis	6 to 7

\* The storage life of Anjou, Bartlett, Bosc and Comice pears may be extended for an additional 1-2 months by packaging in polyethelene liners.

<sup>9</sup> Carcasses and cuts: Quarters, carcasses, and cuts of beef, lamb and veal should be hung or placed on racks when in chill space. If such items are in a solid frozen condition when received, stow compactly as possible in the freezer space. Frozen boneless beef should be stacked compactly. Veal carcasses or cuts, particularly of the lighter weights and lower grades, are subject to rapid deterioration. Holding time of such items in the chill space should be held to a minimum. Fresh chilled pork cuts should be treated as highly perishable.

Variety meats and sausage: Such items are highly perishable. Hold storage time to a minimum.

Cured and smoked meat: The keeping qualities of cured and smoked meats depend upon the type of cure, the length of smoking period, and the method of packaging. The storage life of such items is further influenced by the condition of the storeroom with regard to humidity, temperature and sanitation.

Growth of mold and development of rancidity in hams and bacon can be retarded by stowing such items in the chill space for current consumption and in freezer space for seasonal stocks. Since the growth of mold on cured and smoked meats is favored by the presence of condensed water, excessive humidity should be avoided. If the relative humidity is higher than recommended, it is essential that good circulation of air be maintained.

Hams and bacon which have been individually wrapped in one or more layers of paper have a tendency to retain upon the surface of the meat any moisture which may have come from the product after wrapping. This moisture, in a measure, stimulates mold and bacterial growth. If hams so wrapped are held at temperatures of 45° F or above for a considerable length of time, mold and slime will form on the surface of the meat. Surface slime and mold make the ham unattractive and unpleasant to handle, but do not necessarily indicate spoilage. Accordingly, such products should be carefully inspected to determine how far the mold has penetrated. In most cases, where only the surface is affected, the mold can be removed from the meat by brushing with a stiff-bristled brush, wiping with a clean cloth moistened with a vinegar or salt-water solution, and allowing to air dry. When the mold growth is heavy it may be trimmed away. If the ham does not have deep cracks or abrasions, the meat underneath the surface usually is found to be perfectly sound and wholesome. When mold growth

# Table 5-7. Footnotes-Continued

or spoilage is evidenced deeply between the muscles and around the bone, a survey is usually necessary.

10 Very susceptible to mold growth or surface. Inspect and wipe often.

<sup>11</sup> This item keeps better unwashed.

<sup>12</sup> Export pack only for ships and oversea shipments. Ice packed lettuce will encourage the growth of mold on other commodities. The storage life shown for lettuce is lengthened substantially by trimming closely and wrapping heads individually in polystyrene film.

18 This commodity should not be stored with items such as apples and grapefruit

since they will acquire an onion taste. Compartments should be kept dark.

<sup>14</sup> Early and intermediate crop potatoes may possess better or poorer keepings qualities than potatoes shown on the table. Many lots of early potatoes are too immature for export and some intermediate crop potatoes are not suitable for export because of poor quality and condition. Extreme care must be exercised in the selection of potatoes for export from the middle of May to the middle of August. The quality and condition of available supplies must govern the final choice between old and new crop stock for export during the first part of this period and such factors also must govern the choice of stocks of new crop potatoes for export later in this period.

15 Deleted

<sup>16</sup> The refrigerated storage of Florida grapefruit is not recommended for more than a limited period and then only if the fruit is inspected at intervals. Grapefruit is very susceptible to rind pitting and aging at comparatively low temperatures, especially at 38° F. (as compared with 32° F). At higher temperatures, such as 50° F the rapid development of decay is troublesome.

<sup>17</sup> Keeping time in uncontrolled storage (dry space) is less than 3 months

because of desiccation and because of swelling due to microbial activity.

<sup>18</sup> Sweet cherries packed in sealed polyethylene bag liners can be stored for up to 21 days.

19 Asparagus held too long at 32° F is subject to chill injury. The butts of

asparagus should be placed in absorbent material during storage.

<sup>20</sup> Carrots may become bitter if stored with fruits which give off ethylene, such as apples and pears. If carrots are bitter, they should be stored at room temperature for several days before use.

<sup>21</sup> Polyethylene liners will extend storage life an additional 7-14 days.

<sup>22</sup> California and Arizona varieties are more susceptible to low temperature rind disorders.

<sup>23</sup> Imperfect seals will reduce shelf life.

Much of the above information was extracted from Lutz, J.M. and R.E. Hardenburg, Agricultural Research Service, Agriculture Handbook No. 66 (October 1968). The Commerical Storage of Fruits, Vegtables & Florists & Nursery Stocks, and American Society of Heating, Refrigerating and Air Conditioning Engineers Handbook and Product Directory—1974 Applications.

# 5-502. Semiperishable Subsistence in Dry Storage

a. The product. The term seriperishable subsistence refers to food items that are canned, dried, dehydrated, or otherwise processed to the extent that such items may, under normal conditions, be stored in nonrefrigerated spaces. Semiperishable subsistence too often is regarded as nonperishable commodities which do not require care or protection in storage. While semiperishable subsistence is not nearly as susceptible to spoilage as perishable subsistence, spoilage can and will occur if the products

are mishandled, improperly stored, or stored for excessive periods of time. It is important to remember that the length of storage should be based on the date of packing and not on the date of receipt.

- b. Storage. Careful, correct storage methods not only prevent damage to items in storage but assure speed and efficiency in the receipt, handling and issue of such items. Shipments should be segregated and clearly marked so that the oldest lots, as packed and not as received, are issued first, unless the newer lots show evidence of deterioration or spoilage. The particular method used for storing each item depends on the nature of the container, the nature of the commodity, and the bursting or breaking strength of the bottom layers. For example: items packed in glass containers with cork stoppers should be inverted to prevent the drying out of the stoppers and subsequent leakages.
- (1) Storage precautions. Care should be taken that items are not stacked so high as to cause a bursting or crushing of the bottom layers; nor should items be stacked so high that the top layer is subject to the higher temperature more prevalent near the ceiling or overhead. Stacking in close proximity to steam or other heated pipes shall be avoided. Pallets are used to raise subsistence off the floor and individual lots piled in such a way as to permit the circulation of air around the lots. Bagged items and those requiring fumigation and insect control should not be stored in large masses in corners of the storeroom or directly against the walls; such storage leaves insufficient room for cleaning and inspecting. Palletized storage is used as this facilitates handling of the stores and reduces losses by breakage in handling. All items should be properly cross-stacked to keep the stack solid and prevent it from toppling.
- (2) Storage periods (keeping time). The safe storage period for dry subsistence items varies greatly, depending on such elements as temperature, humidity, care in handling, protection from weather, quality of the food when received and the packing. Safe storage periods become very uncertain at extremes of temperature and under combat conditions. The fact that subsistence has been on hand up to the limit of the "safe" storage period does not mean that the subsistence should be surveyed but should be consumed as soon as practicable. Subsistence which has been on hand beyond the safe storage period should be inspected care-

fully for spillage, leakage, or other damage and if still good issued as soon as possible; such items will be given priority of issue over newer stocks.

c. Causes of spoilage.

- (1) Age. All foodstuffs are subject to varying degrees of natural deterioration; this deterioration is inherent in the food itself. It should not, however, be confused with the action of micro-organisms, chemical agents, or other outside agents. Such facts compel an observance of the basic principle of storage that the oldest lots of the item always should be used first, except under conditions indicated in a(1) above.
- (2) Insects (roaches, flies, weevils, and moths). Insects can cause great damage to stored food; attacking both natural and manufactured food. Food stored at temperatures between 60° and 90° F is especially attractive to insects. Infested supplies must be segregated and if not too heavily infested may be "reconditioned" for use. Cornmeal, especially, is susceptible to insect infestation and rancidity. Insect repellents should be used carefully so as not to contaminate the foods or cause damage by the absorption, by the food, of the fumigant or insecticide flavor. Roaches and flies not only contaminate the foods buy may spread disease. (See chap. III, sect. 4 this regulation for information on pest management).
- (3) Rodents (rats and mice). Rodents not only physically destroy food by feeding, chewing and cutting the bags for nests or nesting material, but also contaminate food with their excreta and hairs. Rodents are carriers of filth and disease; the importance of controlling these pests is evident. The most effective method of control is to prevent entry of these animals.

(4) Physical environmental factors.

- (a) Freezing. Dry products such as grains, flour, sugar, starch, cereals and dehydrated foods, ordinarily are not injured by freezing. If foods containing relatively large amounts of water, such as canned products, are frozen, the usefulness and palatability of such products have not been harmed. However, the physical appearance may suffer due to change in consistency and texture (softening). Emulsions such as canned cheese and butter, prepared mustard, and mayonnaise may be broken (separated) by freezing although the food is not spoiled.
- (b) Heat (high temperatures). A high temperature over long periods of time is very detri-

mental to the keeping of almost all food products. High storage temperature encourages bacterial growth, mold growth and insect infestation and is particularly dangerous when accompanied by high humidity. Chemical action is accelerated, causing rancidity in many items; action of the food acids naturally present within the cans is accelerated, resulting in pinholing, blackening of the interior, and hydrogen swells. High temperature is the chief cause of accelerated spoilage in canned foods and should be controlled when possible by providing adequate ventilation. Flour and associated products (barley, cereals, cornmeal, cornstarch, cracker and biscuit, hominy, noodles, oats, rice, spaghetti and macaroni, tapioca, and uncooked wheat) are subject to insect infestation, particularly at high temperatures. Flour and cereals will absorb odors and should be kept away from subsistence or materials giving off distinctive odors. Cocoa will keep years under cool, dry storage conditions. The formation of a white "bloom" (described as a "whitening" or "graying" due to storage under fluctuating temperatures) has little or no effect on the flavor of cocoa. Long periods of storage at higher temperatures may cause mustiness or rancidity. Cocoa does absorb moisture and odors; cans, therefore, should be kept tightly closed. Roasted, ground coffee rapidly develops a weak and stale flavor. If coffee is not hermetically sealed it will absorb odors affecting the flavor.

(c) Moisture (humidity). High humidity is detrimental to stored subsistence in many respects; accelerating the growth of bacteria and molds promoting insect infestation and causing mustiness in flour, rice and similar foods. High humidity causes products which readily absorb moisture, such as sugar and salt, to cake and become hard. Tea will absorb odors and high humidity causes it to become musty and sour. It should be emphasized that dehydrated products are perishable and should not be handled or stored carelessly. Such products are subject to moisture absorption, insect infestation and mold. A loss of flavor and discoloration (darkening) will occur with age; this action is progressive and is accelerated at high temperatures. Dried vegetables and fruits are subject to insect infestation and molding (particularly fruits) and should be inspected at frequent intervals.

(d) Ventilation. Where sharply fluctuating temperatures and high humidity prevail, the lack of proper ventilation may cause excessively high

temperatures. Proper ventilation is one of the most important factors in protecting foods, particularly in tropical areas. In extreme cases, it may be necessary to open doors and use fans to induce circulation.

DOD 4145.19-R-1

(e) Light. Damage from light is restricted to products that are packed in glass or transparent containers. Exposure causes color changes and may affect the flavor of foods containing, or composed of, edible oils and fats.

d. Physical factors for canned products.

(1) Subject to spoilage. Canned products such as meats, fish, poultry, vegetables, fruits and juices are subject to several physical environmental factors causing spoilage.

(2) Spoilage factors.

(a) Rust. Rust, unless it actually penetrates the can causing leakage, will not injure the contents or render them inedible.

(b) Dents. Dents, unless so severe as to cause leakage, do not indicate that the contents are in an unsatisfactory condition.

(c) High temperature. High temperatures are detrimental to all canned provisions and reduce the storage life to a considerable degree.

(d) Freezing. Freezing causes loss in palatability and may cause breakdown of the texture. Alternate freezing and thawing may cause delamination of the protective enamel.

(3) Major defects.

(a) Quality change. Fading of color, loss of flavor, or softening of contents is due to chemical action and the natural aging process.

(b) Discoloration. Discoloration of contents on inside of can because of chemical action is found usually in products containing sulphur compounds, that is, corn, peas, and meat products.

(c) Swells. Swells, springers and flippers are caused either by chemical or bacterial action, or by overfilling. Regardless of the primary cause, cans enhibiting such defects should be discarded, or referred to a Medical or Veterinary officer for recommendation as to disposition.

(d) Pinholing. Pinholing is due to the chemical action of the food acids on the tin. Pinholing is more often found in enamel lined cans; brine-packed or vinegar-packed items, and in water-packed fruits.

(e) Flat sours. Flat sours are caused by bacterial action, causing changes in odor, color, or turbidity of the product, but not accompanied by gas production which would cause swelling of the can.

- e. Exterior can coating.
- (1) Purpose. Exterior can coatings are applied to protect the tin plate from external conditions promoting rusting and, depending on the coating specified, to camouflage the bright can surface.
- (2) Types of coating. Three types of exterior coatings are used. Specification TT-C-495, Coatings, Exterior, for Tinned Food Cans, lists these as follows:
- (a) Type I. Precoated camouflage (O.D. colored coating applied to tin plate before can fabrication). Precoated cans do not have the side seam area coated as manufactured. Depending on contract requirements, the side seam may or may not be striped with O.D. lacquer following filling and sealing.
- (b) Type II. Post-coated camouflage (O.D. colored coating applied to the cans sometime following filling and sealing).
- (c) Type III. Precoated unpigmented (clear lacquer applied before can fabrication—commonly called "gold coat").
- (3) Labeling of coated cans. Precoated cans will normally have completed label information lithographed on the body or one end of the cans. Post-coated cans will usually show only the name of the product or an abbreviation thereof since these cans have to be labeled after coating, and equipment for complete labeling is impractical for the packer to maintain. While it is intended that most postcoated cans will have as near as possible the full name stamped on the side or one end, there is the possibility that some cans will be embossed or im-

pressed on the end only with an abbreviated legend (See MIL-L-1497.)

- f. Storage periods.
- (1) General. Table 5-8 "Dry storage of semiperishable subsistence" should be used only as a guide. This table is based on the optimum rather than the maximum storage life.
- (2) Over-aged stock. Activities receiving a pack older than that indicated on the storage life table should not on this basis alone consider the product as unfit or undesirable. Subsistence stored for periods in excess of the storage life shown in the table, but at temperatures lower than those listed therein, should not be automatically considered as over-age stock.
- (3) Containers. Since the container is one of the factors in the overall keeping period of an item, the container should be considered if it markedly differs: that is, flour in bags vs. cans, coffee in bags vs. coffee in vacuumpacked tins. Thus supply officers should be guided by the appearance, odor, color and condition of the item.
- (4) Subsistence, table of safe keeping time for dry storage 1 of semiperishable subsistence.

Note. These products are not always subject to the same spoilage as are other foods. Their desirable properties of flavor, odor, and taste often depend upon very unstable or volatile components, and deterioration may result from a breakdown or loss of these constituents. However, excessive heat and moisture, contamination by insects, rodents and microorganisms, dirt and dust, and inadequate packaging and packing can be major factors contributing to deterioration.

Table 5-8. Dry storage of semiperishable subsistence.

	1.1	Keeping time in n	nonths (approximate	e)
Item	Packaging	40° F.	70° F.	90° F.
Almond paste	Can	36	9	3
ice	Bag	60	36	24
Regular pack	Can	48	24	12
Pie style, dehydrated	Can	48	36	18
Butter	Can/jar	36	18	9
Sauce	Can	48	24	12
Baby food, strained	Jar	36	18	9
Dehydrated (instant)	Can	48	24	12
Dietetic pack	Can	48	24	12
Junior food	Jar	36	18	9
Juice				
Dehydrated <sup>11</sup>	Can	72	36	18
Single strength	Can	36	18	9
Spiced, rings	Can	36	18	9

Table 5-8. Dry storage of semiperishable subsistence—Continued

	Kee	eping time in mo	onths (approximate)	CONTROL OF THE PROPERTY OF THE
Item	Packaging	40° F.	70° F.	90° F.
Apricots:				
Regular pack	Can	48	24	12
Baby food, strained	Jar	36	18	9
Baby 100d, strained	Can	36	18	9
Dietary pack		24	3	1
Dried	Carton		12	5
Freeze, dehydrated	Can	24	12	3
Apricot nectar:				10
Regular pack	Can	48	24	12
Freeze dehydrated	Can	24	12	5
Asparagus	Can	36	18	9
Asparagus	Can	24	12	6
Baby formula preparation	Call	7.		
Bacon:		40	24	12
Sliced	Can	48		12
Sliced, irradiated	Can	48	24	12
Sliced, prefried	Can/flexible			
	package	48	24	12
Bakery mixes, extended shelf life				
Bakery mixes, extended sher me				
except biscuit, cheese cake,				
cookie, corn bread or pie crust		70	36	9
mix, see specific item	Can	72		
Bakery mixes, commercial	Bag/carton	12	6	3
Baking powder	Can	24	12	6
Baking soda	Carton	indef	indef	inde
Barley, pearl	Bag/carton	60	48	24
Barley, pearl	Jar	24	12	6
Banana, baby food, strained	Jai			
Beans:		04	12	9
Drys <sup>12</sup>	Bag/carton	24		
Green, baby food, strained	Jar	36	18	9
Green, regular	Can (plain			
Green, regular	body)	36	18	9
	Can (enam-			
	eled)	48	24	12
		36	18	9
Green junior food	Jar			24
Green, dehydrated	Can	84	60	24
Green dehydrated, com-				
pressed	Can	84	60	24
Kidney	Can	72	36	18
Lima		72	36	18
		72	36	18
Pinto	Can	72	36	18
Lima, dehydrated	Can			12
Sprouts	. Can	48	24	12
Wax	Can (plain		No.	
	body)	36	18	9
	. Can (enam-			1 1 3
	eled)	48	24	12
		48	24	6
White, dehydrated	. Can		36	18
White with pork in sweet sauce	Can	72	30	10
White with pork in tomate	0			-
sauce	. Can	48	24	12
Bean refried	. Can	72	36	18
Beef, liver, pork, or veal:	Ton	36	18	9
Baby food, strained			APIN COLLA SECTION	9
Junior food	. Jar	36	18	
Reef:				
Broth, baby food, strained	Tor	36	18	

Table 5-8. Dry storage of semiperishable subsistence—Continued

		Keeping time in me	onths (approximat	te)
Item	Packaging	40° F.	70° F.	90° F.
Chunks with natural juices	Can	60	36	18
Corned	Can	60	36	18
Diced, raw, dehydrated Flakes and shaped, raw, de-	Can	72	36	18
hydrated	Can	72	36	18
With gravy	Can	72	36	18
Patties, dehydrated	Can	60	36	18
w/spiced sauce	Can	60	24	12
Beef steak, raw, dehydrated Beets:	Can	60	36	18
Baby food, strained	Jar	24	12	c
Junior food	Jar	24	12	6
Regular pack, Gulf states	Can	36	18	6
except Gulf states	Can	48		9
Berries; black, etc Beverage base:	Can	36	24 18	12 9
Cocoa, powder	Can	72	96	04
Imitation, liquid		24	36	24
Powder	Envelope		12	6
Beverage, base, liquid for post mix:	Dirvelope	48	24	12
fruit punch, lemon-lime, or-	Can	2	1	1/2
ange, root beer, ginger ale,				
grape	Can	18	8	3
Biscuit, mix	Can	36	18	6
Blueberries Bouillion, dried, cubes, beef or	Can	36	18	9
chicken	Can	48	24	12
Bread crumbs Cabbage:	Bag	8	4	2
Red, sweet, sour Raw, diced, dehydrated and	Can	48	24	12
dehydrated compressed Cake, fresh	Can	60	24	12
Layer, coffee		1/5 (2 days)		
Loaf		½ (4 days)		
Carmel	Box	12	9	4
Coated (bridge mix)	Box	24	12	4
	Can	72	36	18
Hard	Can	72	36	18
Starch jelly	Box	24	12	6
Baby food, strained	Jar	48	24	10
Junior food	Jar	48	24	12
Puree	Can	60	30	12
Regular pack	Can	60	30	15 15
pack	Can	36	18	9
Catsup:				
Regular pack	Bottle	48	24	12
D-1-1-1-1	Can	36	18	9
Dehydrated	Envelope/			
	can	72	24	6

See footnotes at end of table

Table 5-8. Dry storage of semiperishable subsistence—Continued

	, K	eeping time in me	Keeping time in months (approximate)				
Item	Packap'ng	40° F.	70° F.	90° F.			
Cereal:			The same of the sa				
Baby food, strained, barley .	Container	24	12	6			
Quick cooking	Carton	24	12	6			
Quick cooking	Can	48	24	12			
			12	6			
Ready to eat, rolled oats	Pkg	24					
Sugar, coated	Pkg	24	12	6			
Chalupa shells, corn	Container	12	6	3			
Cheese:							
Cheddar, processed	Can	48	24	12			
Cottage, dehydrated	Can	24	12	6			
Grated	Container	18	6	3			
Processed, American, dehy-							
drated	Can	36	18	9			
		12	6	3			
Cheese cake mix	Bag		,	, i			
Cherries:	Cam	49	24	12			
Dehydrated	Can	48					
Dietetic pack	Can	36	18	9			
Maraschino	Jar	36	18	9			
RTP (Red tart pitted)	Can	36	18	9			
Sweet, dark	Can	36	18	9			
Sweet, light	Can	36	18	9			
Chewing gum	Carton	9	4	2			
Chicken:	Carton						
Dehydrated	Can	60	36	18			
Regular pack	Can	60	36	18			
Baby food, strained	Jar	36	18	9			
Chili con carne:	_	40	200	15			
w/o beans	Can	48	30				
Dehydrated, w/beans	Can	72	36	12			
Chili sauce	Bottle	48	24	12			
Chives, dehydrated	Can	24	12	6			
Chocolate, cooking							
Semi-sweet chips <sup>16</sup>	Pkg	36	18	6			
Unsweetened <sup>16</sup>	Carton	48	24	12			
		72	36	18			
Chocolate sirup, beverage			24	12			
Chutney sauce		48		18			
Clams	Can	72	36				
Cocoa, natural		36	18	9			
Cocoanut, prepared	Can	72	36	18			
Sweetened	Can	36	18	6			
Sweetenea	Container	24	6	1			
Unsweetened		24	6	1			
Coffee			10				
Instant	Envelope	36	18	9			
	Jar	72	36	18			
Roasted and ground	Pouch	9	2	1			
Roasted and ground		18	12	5			
		36	18	9			
Cookie mix, chocolate & sugar		6	4	2			
Cookies	. Carton		The same of the sa	8			
Corn bread mix	. Can	24	12				
Corn, cream, and whole grain styles	Can	72	36	18			
Corn, dehydrated, uncooked, comp.	Can	48	24	12			
Corn, chips	. Pkg	1	1/2	1			

Table 5-8. Dry storage of semiperishable subsistence—Continued

		Keeping time in m	onths (approxima	ite)
Item	Packaging	40° F.	70° F.	90° F
Corn flake crumbs	Carton	24	12	6
Corn meal	Pkg	24	12	6
	Can	48	24	12
Crabapples, spiced		36	18	1 1
Crab	Can	72		9
Crackers: Graham		12	36	18
Other the state of	Carton	4	2	1
Other than graham		12	6	3
Crumbs	Bag	12	6	3
Cranberry sauce	Can	36	18	9
Cranberry juice cocktail Cream:	Can	30	12	3
Coffee type, aseptically proc-				
essed and packaged19		60	10	
			12	3
Whipping, aseptically proc-		12	6	1
essed and packaged <sup>7,19</sup>	Can	10	- A	
Substitute		12	6	1
Substitute	Can/enve-	1 4		
Whinning day	lope	48	24	12
Whipping, dry	Can	8	6	4
Cream of tartar	Container	indef	indef	indef
Cup, ice cream, edible	Box	24	12	6
Currants, dried Custard pudding, baby food,	Carton	24	12	6
strained Dessert powder:	Jar	24	12	6
Gelatin, base, all flavors <sup>14</sup>	Can Container/	72	36	18
	15 M 18 18 17 17 17 17 17 17 17 17 17 17 17 17 17	90	10	
Starch, base, all flavors <sup>14</sup>	pkg	36	18	9
	Container/	48	24	12
	pkg	36	18	9
Instant, all flavors <sup>14</sup>	Can	48	24	12
oughnuts	Carton	36	18	9
Cake	Pkg	1/10 (3 days)		5 24 1
Yeast	Pkg	1/30 (1 day)		1 18
ggnog (APP) <sup>19</sup>	Can	12		
gg mix, dehydrated	Can	IT SO THE PROPERTY OF THE PARTY	6	1
ggs, whole, dry	Can	60	36	18
nulsifier, bread and rolls	Dan	72	36	18
achiladae	bag/can	24	12	6
nchiladas		48	24	12
gssh, dehydrated:	Can	48	24	12
Squares	Can	60	36	18
avoring: Imitation maple or vanilla	Bottle			
Nonalcoholic, all flavors not		indef	indef	indef
listed	Bottle	24	18	6
Tablet, imitation maple or va-	Fiber drum	12	6	3
nilla our:	Bottle	indef	indef	indef
Rye <sup>18</sup>	Bag	24	12	6

See footnotes at end of table

Table 5-8. Dry storage of semiperishable subsistence—Continued

	K	eeping time in m	onths (approximat	e)
Item	Packaging	40° F.	70° F.	90° F.
Wheat, bread or general pur-		W 2		
pose	Can	36	18	9
pose	Bag	24	12	6
[4] : (1) [4] [1] : (1)	Bottle	indef	indef	indef
004 001011118)	Jar	48	24	12
ood cororme, have	Jai	40		1
Food packet:	Conton	10	24	12
In flight	Carton	48		6
Long-range patrol	Case	84	36	
Survival, abandon ship	Carton	84	84	72
Survival, aircraft, liferaft	Can	84	84	72
Survival, general purpose	Carton	60	48	24
Frankfurter	Can	60	36	18
Fruitcake	Box	12	6	1
Fruit, candied	Jar	12	6	3
Fruit cocktail	Can	48	24	12
Fruit mix, freeze dehydrated	Can	24	12	6
Fruit puree	Can	48	24	12
Fry mix, breading	Bag	36	18	9
	Dag	00	10	
Garlic:	Con	48	24	12
Dehydrated	Can		4	3
Dry	Box	5		
Gelatin, plain, edible	Container	72	36	18
Grape juice:				
Dehydrated <sup>11</sup>	Can	72	36	18
Single strength	Can	24	12	6
Grapefruit:				
Regular pack	Can	48	24	12
Juice, dehydrated (instant)11 .	Can	72	36	18
Juice, single strength	Can	48	24	12
Grapefruit-orange juice blend:				
	Can	48	24	12
Single strength	Can	10	T.	Tall I
Grapefruit-pineapple juice blend,	C	10	24	12
single strength	Can	48	36	18
Ham chunks	Can	60		
Hamburgers, without gravy	Can	60	36	18
Hash, corned beef or roast beef	Can	72	36	18
Hominy:	Ī			
Grits	Container	24	12	6
Whole	Can	72	36	18
Honey, extracted	Jar	48	24	12
Horseradish, dehydrated	Bottle	48	24	12
Ice cream mix and ice milk mix:		100		
Powder	Can	36	18	6
rowder		72	36	18
Icing mix	Bag	18	9	5
Inhibitor, mold, bread and rolls14.	Continu	36	18	9
Jam, fruit			12	6
		24	시장을 하시다가 시간하게 한번째 보고 그리	9
Jelly, fruit	Can/jar	36	18	
	Pkg	24	12	6
Lard, service style	Carton	12	6	3
Lemon juice, dehydrated <sup>11</sup>	Can	72	36	18
Lime juice, single strength	Can	24	12	6
Luncheon meat	Can	60	36	18
Macaroni <sup>14</sup>	Carton	72	36	18

Table 5-8. Dry storage of semiperishable subsistence—Continued

	Keeping time in months (approximate)			te)
Item	Packaging	40° F.	70° F.	90° F.
Malted cereal sirup	Can	48	24	12
Margarine	Can	36	18	9
Marmalade	Jar	36	18	9
Marshmallow	Container	12	9	1
Mayonnaise	Can/jar	12	6	3
Meal, combat, individual	Case	60	24	
Meat spread	Can	36		12
			18	9
Meringue powder Milk:	Can	48	24	1
Chocolate (cocoa flavored), dry	Envelope			
	(Vacuum)	40	20	10
***************************************	Envelope			- 41
	(No Vac-			
	uum)	24	12	6
Chocolate, aseptically proc-	THE WAR CO. LANS THE STREET		1	
essed & packaged	Can	12	C	9
	THE RESERVE OF THE RE		6	3
Dry, non-fat	Can	32	16	. 8
	Drum/bag/			4 5 4 4
	carton	24	12	3
Evaporated <sup>9</sup>	Can	24	12	6
Filled dry, including chocolate	Can	24	12	6
Ice and milk shake mix, dehy-				
drated	Can	24	12	6
Malted, dry	Can	48	24	9
Whole, dry	Can (zero	40	24	9
whole, dry				
	oxygen			
	pouch)	6	3	1
Whole, aseptically processed				
and packaged <sup>19</sup>	Can	12	6	1
Mincemeat	Can	48	24	12
Molasses	Can	48	24	12
Monosodium glutamate	Container	indef	indef	indef
Mustard, prepared	Can/jar	36	18	9
Mushrooms	Can	48	24	12
Noodles:	Can	40	24	12
Chow mein	Con	0		
	Can	8	4	2
Egg <sup>14</sup>	Carton	72	36	18
Nuts:				
Shelled, roasted	Can	60	24	12
Unshelled	Bag	24	12	6
Okra	Can	48	24	12
Olives:				
Green	Jar	48	24	12
Ripe	Can	48	24	12
Olive oil	Can	18	6	4
에게 보기들은 경기를 잃었다면 하는 것이 사용하는 것이라면 하는 것이라면 가게 되지 않고 있다면 하는 것이다면 하는데 하다 하다.	Jan	10	U	*
Onions, dehydrated and dehy-	C	40	0.4	10
drated compressed	Can	48	24	12
Onions, whole, acidified	Can	36	18	9
Orange juice:			7 3	
Dehydrated (instant) <sup>11</sup>	Can	72	36	18
Single strength	Can	48	24	12
Parsley, dehydrated	Can	30	24	12
Peaches:				
Baby food, strained	Jar	36	18	9
Dietetic pack	Can	48	24	12

See footnotes at end of table

Table 5-8. Dry storage of semiperishable subsistence—Continued

	Keeping time in months (approximate)			
Item	Packaging	40° F.	70° F.	90° F.
Regular pack	Can	48	24	12
Slices (freeze dehydrated)	Can	24	12	6
Peanut butter	Can/jar	36	18	9
Pears:				
	Jar	40	20	10
Dietetic pack	Can	36	18	9
Freeze dehydrated	Can	24	12	9
	Can	36	18	9
Regular pack	Can	50	10	
Peas:	Jar	40	20	10
Baby food, strained	Can	72	36	18
Blackeye			24	12
Dehydrated, compressed	Can	60	12	9
Drys <sup>12</sup>	Bag/carton	24		
Green	Can	72	36	18
Peas and carrots	Can	60	30	15
Peppers, green dehydrated	Can	60	24	12
Peppers, pickled, cherry	Jar	36	18	9
Peppers, jalapeno	Can	24	12	6
Peppers, red sweet	Can	48	24	12
Cucumber, cured	Jar	48	24	12
	Can	24	12	6
Cucumber, fresh pack	Jar	36	18	9
oucumber, fresh paes	Can	18	9	4
Mixed	Jar	48	24	12
그는 이번 전 경우를 가지 않는 것이 되는 것이라면 하지만 하게 되었다. 그 가장에 가지 않는 것이 없는 것이 없었다. 그는 것이라면 다른 것이다.	Can	24	12	6
D. V.1	Jar	48	24	12
Relish			12	6
	Can	24	18	6
Pie crust mix	Can	36	10	0
Pie filling, prepared fruit, apple,			10	
blueberry, cherry, peach, lemon15	Can	24	12	6
Pie shell, graham cracker	Container	8	4	2
Piementos	Can	48	24	12
Pineapple:				
Dietetic pack	Can	48	24	12
Freeze dehydrated	Can	24	12	6
Juice, dehydrated11	Can	72	36	18
Juice, single strength	Can	48	24	12
Regular pack	Can	48	24	12
Plums:				
Dietetic pack, red	Can	36	18	9
Dietetic pack, green	Can	48	24	12
	Can	36	18	9
Regular pack, red		48	24	12
Regular pack, green			36	18
Popcorn, unpopped		72		1
		2	1/4	100
	Cello bag	24	3	1
Pork chops, raw, dehydrated	Can	60	36	18
Potato:				1 7 1
Chips	Pkg	1	1/2	1 1
(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	Can, air	4	2	1
	Can, nitro-		1 1547	
	gen	24	12	(
	Can, vac-			1
	uum	12	6	1

Table 5-8. Dry storage of semiperishable subsistence—Continued

Sticks	Packaging Can	Keeping time in m	70° F.	90° F.
Sweet Sweet, instant, dehydrated White	Can			
Sweet, instant, dehydrated White		48	24	12
White	Can	48	24	12
White	Can	48	24	12
	Can	60	30	15
White, dehydrated, granules	. Can	60	36	
White, dehydrated, granules		00	30	18
8% H <sub>2</sub> O	. Can	94	10	
White, dehydrated, slices	Can	24	12	6
White, dehydrated, slices-89	6	36	18	9
H <sub>2</sub> O	6	16	18	4
H <sub>2</sub> O	. Kraft bag	12	6	3
Mix, dehydrated for french fries	Can	18	9	5
	. Bag	12	6	3
Prunes:	Ĭ	1 4.7	Ü	0
Baby food, strained	. Jar	18	9	
Dehydrated/pitted (low mois ture)	-		9	6
Dwied		24	12	5
Dried		36	18	9
Dried	Carton	18	9	5
Dried, soaked	. Can	36	18	9
Pumpkin	Can	48	24	12
Raisins, dried	Can	36	18	9
	Carton	18	9	5
Ration, supplement aid station	Case	72	36	3 3.5 を 202 編集 303.0
Ravioli w/meat sauce Rice:	Can	48	24	18 12
Instant <sup>14</sup>	Carton	36	10	
Milled <sup>14</sup>			18	9
Parboiled <sup>14</sup>	Container/	48	24	12
- 31 5 5 1 5 1 5 1 5 1 5 1 5 1 5 1 5 1 5		00		
Rolls, fresh	bag	30	20	10
Bagel	Di			
	Pkg	½0 (1 day)		
Sweet or finger		1/15 (2 days)		
English muffin	Pkg	1/4		
salad dressing, spoonable4		8	5	2
salad dressing, pourable4	Bottle	7	5	2
Salad oil <sup>9</sup>	Can	24	12	6
almon	Can	72	36	18
alt:				10
Celery, garlic, onion	Container	72	96	10
Substitute	Envelope	indef	36	18
Table <sup>5</sup>	Bag enve-	muei	indef	indef
	The state of the s			
auces, Hot, Kitchen, Meat, Soy or	lope	indef	indef	indef
Worcestershire	Bottle	60	30	15
auerkraut	Can	36	18	
ardines	Can	72		9
ardines in tomato sauce	Can	12 12	36	18
auce mix, brown gravy, spaghetti.			15	8
taco seasoning	Can	36	18	9
ausage, pork, linkhortening compound:10	Can	60	36	18
Bakery type <sup>9</sup>	Can/cube	48	24	10
Deep fry, cooking type, fluid .	Can	48	24	12 12

See footnotes at end of table

Table 5-8. Dry storage of semiperishable subsistence—Continued

	K	eeping time in n	nonths (approximat	e)
Item	Packaging	40° F.	70° F.	90° F.
Deep fry, cooking type, plastic	Can	48	24	12
General purpose regular General purposes, high stabil-	Can/cube	48	24	12
ity	Can/cube	60	30	15
nrimp	Can	72	36	18
	Can	60	36	18
nrimp, dehydrated	Can	00	30	10
rup:	Can	72	36	18
Blended		72	36	18
Maple sirup, imitation	Bottle/can	12	90	10
oup:		00	10	
Baby food, chicken, strained.	Jar	36	18	9
Beef, instant, dehydrated	Pkg	24	12	6
Beef, noodle, dehydrated	Pkg	24	12	6
Beef, vegetable, noodle, dehy-	and the second		2.00	4.25
drated	Can	36	18	9
Chicken, chunk, dehydrated	Pkg	24	12	6
Chicken or chicken flavored in-				1
stant dehydrated	Pkg	24	12	6
Chicken, noodle, dehydrated .	Can	60	30	15
	Pkg	24	12	6
Condensed <sup>13</sup>	Can	72	36	18
Cream of onion, instant, dehy-				
drated	Pkg	24	12	6
Cream of potato, instant, de-	18			
hydrated	Pkg	24	12	6
Green pea, simmer type, de-	1 ng			
	Can	60	30	12
hydrated		24	12	6
	Pkg			12
Onion, dehydrated	Can	60	30	The second second
	Pkg	24	12	6
Onion, instant, dehydrated	Pkg	24	12	6
Ready to serve	Can	48	24	12
Tomato-vegetable w/noodle,				
dehydrated	Can	48	24	9
Vegetable, dehydrated	Pkg	24	12	6
oup and gravy base:				4. 4
Beef flavored	Can/jar	60	30	15
F	Envelope	24	12	6
Chicken, flavored	Can/jar	60	30	15
		24	12	6
Ham flavored		60	30	15
		24	12	6
our cream sauce mix	Can	24	12	4
paghetti <sup>14</sup>	The state of the s	72	36	18
pices, seasoning, herbs <sup>6</sup>		48	24	12
		36	18	3
		36	18	9
	Bottle	90	10	J
pinach:	7	0.0	10	0
Baby food, strained		36	18	9
Dehydrated, compressed		60	24	12
Junior food		36	18	9
Regular pack	Can	48	24	12
Puree		48	24	12
Starch:	the sale?	- V - NE	2.63	
Corn, edible	Carton	96	48	24

Table 5-8. Dry storage of semiperishable subsistence—Continued

	Keeping time in months (approximate)				
Item	Packaging	40° F.	70° F.	90° F.	
Pregelatinized, edible <sup>14</sup>	Can/bag	96	48	24	
Sugar:			10		
Brown <sup>17</sup>	Carton/bag	36	18	4	
Confectioners <sup>17</sup>	Carton/bag	36	18	6	
Refined, granulated <sup>17</sup>		90	10	0	
Renned, granulated	Bag/can,				
	envelope	indef	indef	indef	
Sugar, substitute	Envelope	indef	indef	indef	
Tamales	Can	48	24	12	
Tapioca <sup>14</sup>	Carton	96	48	24	
Taco shells, corn	Container	12	6	3	
Tea:					
Black, bags or loose	Can/carton	36	18	9	
Instant	Envelope	36	18	9	
Tomato:					
Juice, concentrated 3+1	Can	36	18	9	
	THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TRANS	30	10	ð	
Juice, single strength	Can (plain	90	10		
	body)	36	18	9	
········	Can (enam-				
	eled)	48	24	12	
Paste, instant, dehydrated	Can	72	36	18	
Paste, regular pack	Can	36	18	9	
Puree	Can	48	24	12	
Regular pack	Can	48	24	12	
Tomatoes and okra	Can	48	24	12	
Topping, dessert:			7.5		
Prepared, ice cream, non acid			100		
[20] - C. (1) [	Con	72	36	10	
syrup	Can	12	30	18	
Prepared, ice cream, fruit acid	~		40		
syrup	Can	36	18	9	
Dehydrated	Can	36	24	6	
Tortillas, corn	Can	36	18	9	
Tuna:	74				
Dietetic water pack, no added	6 63 - 1				
salt	Can	72	36	18	
Oil pack	Can	72	36	18	
Water	Can	72	36	18	
Turkey			00	10	
Regular pack	Can	72	36	18	
Loaf			19th S 500 May 11st		
	Can	72	36	18	
Vegetable:	Ten	0.0			
Baby food, mixed strained		36	18	9	
Juice, single strength	Can	36	18	9	
Mix, dehydrated, compressed	Can	36	18	6	
Vinegar:			1 1 1		
Liquid	Bottle	60	80	15	
Synthetic, dry	Flexible bag	24	12	6	
Water	Can	120	60	30	
Wheat base <sup>2,14</sup>	Bag	48	36	12	
Yeast, bakers, active dry	Can	6	1	1/4	
Yeast food	Bag	48	24	12	
1 000 1000	Dag	40	24	12	

Table 5-8. Footnotes

<sup>&</sup>lt;sup>1</sup> In general, relative humidity 50-55 percent. Metal cans are susceptible to rust and most boxed or bagged food to mustiness or molding above r.h. 60 percent.

<sup>&</sup>lt;sup>2</sup> Flour should be stored under cool, dry conditions. The major problem is protection against dampness, insects and rodents. Low temperatures, 32–40° F, protect against

# Table 5-8. Footnotes-Continued

insects, relative humidity greater than 70 percent leads to mustiness. Best storage conditions are at temperatures below 50° F and approximately 60 percent relative humidity.

<sup>3</sup> Designed to be edible after one month at 140° F.

<sup>4</sup> Separates at high temperatures or after freezing.

<sup>5</sup> Humidity above 90 percent will cause caking. "Caked" salt is usable.

<sup>6</sup> Above 100° F there is complete loss of flavor in less than 6 months. "Whole" spices keep longer than "ground" spices.

<sup>7</sup> Guaranteed to whip only if stored below 50° F.

8 Cases should be turned every 30 to 60 days to prevent separation of butterfat. Separated or grainy milk can be used for cooking.

<sup>9</sup> When held below 32° F may show solid material which will disappear on warming.
<sup>10</sup> If held above 90° F changes may occur in texture unfavorable to normal creaming

<sup>11</sup> Store at cool temperatures below 75° F during the first 3 months.

12 High temperatures harden, high humidity causes molding.

13 Cream style soups break down on freezing, but are not spoiled.

14 Highly susceptible to damage by moisture.

<sup>15</sup> Freezing alters appearance of starch thickening. Baking restores desirable appearance.

16 Do not store near other material capable of imparting odor to chocolate.

<sup>17</sup> Keeping time based on relative humidity not more than 60 percent. For storage longer than 1 month, sugar should be covered with tarpaulins and not stored on damp or concrete floors or near cold walls.

<sup>18</sup> Rye flour loses its most delicate flavor after 2 months at 40° F, 1 month at 70° F, or 1 week at 90° F. After this time further flavor change is very slow. It is said that only experts can detect this first, subtle flavor change.

19 These items should be stored at temperatures below 72° F. For long holding, chill

storage is recommended. Do not freeze.

(5) Chill Storage of Selected B-ration components. The following guidance is provided for storage of selected canned B-ration components in commercial warehouses in refrigerated storage at temperatures between 31½° F and 34½° F and at a relative humidity of 55 percent or less.

Table 5-9. Selected B-Ration Components

	Approx.
	Storage life
Item	(months)
Apples, pie style, dehydrated	48
Applesauce, instant	48
Apricots, freeze dehydrated	36
Bacon, prefried	54
Beans, green, dehydrated	100
Reef chunks w/natural juices	60
Reef corned	60
Beef patties, dehydrated	60
Beefsteak, dehydrated	60
Cabbage, raw, diced, dehydrated & dehydrated compressed	72
Cherries, dehydrated	60
Cheese, processed, American, dehydrated	42
Chicken, boned	60
Chicken, dehydrated	60
Chili con carne, w/o beans	48
Egg mix dehydrated	60
Fish squares, dehydrated	60
Flour, wheat, bread	54

Table 5-9.	Selected	<b>B-Ration</b>	Components-	-Continued
------------	----------	-----------------	-------------	------------

Item.	Approx. torage life (months)
Frankfurters	60
Fruit mix, freeze dehydrated	
	36
Ham, chunks	60
Hamburgers w/o gravy	60
Luncheon meat	60
Onions, dehydrated	60
Parsley, dehydrated	30
Peaches, freeze dehydrated	36
Pears, freeze dehydrated	36
Peas, cooked, dehydrated	72
Peppers, green dehydrated	72
Pineapple, freeze dehydrated	36
Pork chops, dehydrated	60
Pork sausage	60
Potatoes, sweet, instant	
Detailes, sweet, instant	60
Potatoes, white, granules dehydrated	60
Potatoes, white, slices, dehydrated	54
Prunes, low moisture	36
Rice, parboiled	30
Shortening compound, general purpose	60
Shrimp, dehydrated	60
Chinal palad debalantal	
Spinach, cooked, dehydrated	60
Tomato paste, instant	72
Vinegar, dry, synthetic (can ad flex-pack)	30
Section 6. MISCELLANEOUS COMMODITIES	Paragraph
General	5-601
Batteries	
Electronic material	
Photosensitized materials (film and paper) and flash bulbs	5-604
Self-sealing fuel cells	5-605
Internal combustion engines	
Lubricating oils and greases	5-607
Paints	
Life floats	
Linoleum	5-610
Fiber rope	5-611
Wire rope	
Clay targets	
Cement	
Navigation timepieces	5-615
Machine tools and production equipment	
Tires, tubes, and rubber products	
Abrasive or grinding wheels	
Glass	
Miscellaneous chemicals	
Musical instruments	
Strategic and critical materials	5-622
Brushes; feather, wool, bristle, and hair	
Flight clothing Polyvinyl chloride (PVC) plastic pipe	5 605
Radioactive material	5_626

#### 5-601. General

This section includes some of the more common miscellaneous commodities stored in military installations but is not intended as a complete list. This section prescribes the approved methods and practices for storing and handling the listed materials. Storage and handling methods that are to be observed with respect to other commodities will be in accordance with the principles and practices included in the other chapters and sections of this regulation or as may be prescribed by the appropriate military service.

### 5-602. Batteries

This paragraph deals with primary batteries (mercury, silver-oxide, manganese-dioxide, carbon-zinc (flashlight), and other dry or reserve batteries) and secondary batteries (lead-acid, nickel-iron alkaline, nickel-cadmium, and silver-zinc). Primary batteries cannot be recharged efficiently (a flashlight battery) and are of two types, dry and reserve. A dry battery is commonly referred to as a dry cell battery and a reserve battery is one that must be activated by the addition of a fluid, usually water. A secondary battery is one that can be recharged repeatedly (an automobile battery is a good example of such a battery) and activated by the addition of electrolyte. Buildings with metal roofs must not be used for storage of batteries, since these types absorb and conduct heat to a high degree. Likewise, batteries will not be stored in direct sunlight. Batteries can be stored on pallets, in bins or racks, depending on the quantity and type to be stored. "This Side Up" batteries will remain in their original containers until ready for issue or use. Batteries removed from original containers must never come in contact with steel, steel shelving, or other metal objects which can cause short circuits or discharging. Small cell batteries must be stored in a cool well-ventilated area. It is the responsibility of the storage supervisor to ensure that batteries are segregated by type, properly tagged, and stored in such a manner that the oldest stock is issued first. The expiration date will be annotated on the document when the issue is made. The expiration date will be ascertained in accordance with pertinent tables which indicate the allowable storage life in months depending upon how long the battery has been in storage and the climatic zone to which the battery will be shipped. Specific details for the Department of the Army will be found in SB 11-30 and TM 11-415; for the Department of Air Force, T.O. 00-25-213; for the Department of the Navy and the US Marine Corps, the Electronic Supply Office instruction (ESOINST 4440.85, Dry Cell Battery Procedures). At the time the exterior container is opened, each intermediate or unit pack will be appropriately marked with the expiration date.

a. Primary batteries. The deterioration of all primary batteries during storage, standby, or when in service is caused by chemical action within the cells or from the loss of moisture through the sealing material. Proper storage conditions reduce this chemical activity to a minimum, resulting in extended battery life. It is recommended that batteries of the reserve type be shipped and stored in a completely dry state, as they do not deteriorate if kept completely dry.

(1) Storage temperatures. Primary batteries are perishable commodities and, when possible, will be stored in refrigerated space or in warehouses having constant or controlled temperature, as temperature is the most important factor to be considered in the storage of primary batteries. The chemical activity which causes battery deterioration is lessened considerably as the storage temperature is lowered. Primary batteries will be stored in the coolest practicable dry, ventilated storage space. Storage space temperature within the range -30° F to 35° F is recommended. This temperature range is preferable, provided such cold storage facilities are available without appreciable cost; however, the usual refrigerated storage space available in the supply system at this time provides temperatures between 35° F and 50° F with relative humidity of 50 percent to 80 percent. This is satisfactory for normally moving stocks. For long term storage, however, dry batteries will be stored in areas having temperatures as close as possible to -30° F but not lower than this and, if possible, will never be stored where temperatures exceed 50° F. Nonrefrigerated storage areas for dry batteries must have as constant a temperature as possible, since wide temperature variations are as damaging as high temperatures. To prevent shortcircuiting in the voltage socket terminals as a result of "sweating," dry batteries, when removed from refrigerated storage, will not be removed from the polyethylene bags in which they are packaged until they have warmed up to an ambient temperature. Exceptions to refrigerated storage requirements will be as directed by the individual DOD component.

- (2) Ventilation. Some dry batteries generate small quantities of gas, particularly during the first few months after manufacture. To avoid the possibility of an accumulation of gas, adequate ventilation in the storage area will be provided.
- (3) Testing. Maintenance during storage consists largely of testing stored dry batteries at periodic intervals in order to maintain depot stocks at a high level of reliability. Periodic tests are not made on reserve batteries because they are stored in a dry, inert condition, with a desiccant, in airtight cans or metallic bags. The test of a battery consists of taking a voltage reading across a specific load resistance for each battery.
- b. Secondary batteries. Secondary batteries will never be piled on top of one another, rather, they will be stored on storage racks. These racks will be made of loose, flat boards—nails not being required. The uprights will be about 10 inches high and 12 inches wide. Shelf boards can be of any convenient size. The rack is assembled with batteries sitting on the shelves and on either side of the uprights. The batteries must be close enough together to hold the upright rigid.
  - (1) Lead-acid batteries.
- (a) Charged and wet. When received charged and wet, the cells are completely assembled, contain electrolyte, are fully charged, and ready for use. The batteries will be stored in a fully charged condition and care must be exercised in handling. When stored in this manner, batteries must be kept fully charged either by continuous application of a trickle charge, or by a periodic recharge once each month in temperatures below 80° F. When charging batteries, the vent caps will be kept in place to avoid electrolyte spray. Care will be taken to assure that vent caps are functioning. It should always be assumed that an explosive mixture of gases exists in and around charging batteries, unless positive steps have been taken to eliminate them. For this reason, anything that could ignite these gases such as an open flame, a spark or smoking should be prohibited. Water will be added and specific gravity checked every week. Because equalizing charges are given, generally, at 30-day intervals, the batteries will be stored in a readily accessible place. As the temperatures of the storage area or zone and the age of the battery have a direct bearing on the frequency at which equalizing charges must be

given, the individual activity storing batteries will determine the schedule of equalizing charges. Batteries may be stored several months in this manner and are available for use at any time. New batteries that have electrolyte in them and that have been given their first charge, or batteries that have been in service and are not worn out, must be stored in as cool a location as possible, namely, between 60° F and 80° F. Wet charged batteries should not be stored directly on a concrete floor. Lead-acid batteries, depending on the quantity and size, will be stored in racks or bins in an upright position to prevent spillage or leakage of electrolyte.

- (b) Charged and dry. Batteries may be stored dry indefinitely. The plates are fully charged, dried and stored either in their containers or separately. Rubber insulators may be stored dry, but wood separators must be stored in water or in a very weak electrolyte solution in a sealed container. This method is not generally used except for new batteries which are shipped dry by the manufacturers. Batteries received charged and dry will be kept closed tightly to prevent breathing. The batteries can be palletized or stored in bins or racks depending on the quantity and size of the batteries.
- (c) Uncharged and dry or moist. Uncharged and dry or moist batteries will be stored and handled in the same manner as charged and dry batteries.
- (d) Charged and moist. For moist storage, batteries are fully charged and the electrolyte then removed and stored separately. The batteries will be sealed with paraffin wax or battery sealing compound. When batteries are stored in this manner, the seals must not be disturbed until the batteries are ready to be used. This method is least desirable since plates and separators are subject to damage.
- (2) Nickel-iron alkaline batteries. Wet discharged nickel-iron alkaline batteries may be stored for temporary periods in any state of charge without deterioration. Where prolonged storage is anticipated, the battery will be discharged to zero voltage and short circuited in trays of five or six cells each. Store in a clean, dry area with the solution at the prescribed level. Make certain the filler caps are in a closed position. Nickel-iron alkaline batteries are shipped dry only for oversea shipment. Electrolyte accompanies the battery in a separate container, along with specific instructions for filling and charging the battery.
  - (3) Nickel-cadmium batteries. Wet batteries

will not be stored with intertray connectors attached. In addition, cell tops will be protected with petroleum jelly to protect the metals. Batteries will be stored in a cool place which is free from dust and moisture. A cool dry place is defined as 60° F to 80° F and less than 60 percent humidity.

(4) Silver-zinc batteries. Silver-zinc batteries,

uncharged-dry, may be stored indefinitely.

(a) Dry batteries which are shipped in a dry condition and which will not be placed in service for 30 days or more will be stored in the dry condition at a temperature not to exceed 60° C (150° F).

(b) Wet batteries stored for 30 days or longer, must be discharged. Tape all cell vent valves

with cellophane tape.

- (c) Wet batteries may be safely stored at temperature from 0° to 110° F. However, the lower temperatures within this range are more satisfactory for storage.
  - (5) Safety measures.
- (a) Face shields, aprons and rubber gloves will be provided for personnel handling caustic materials.
- (b) Facility for quick drenching of the eyes and body will be provided within 25 feet of the work area for emergency use.
- (c) Facilities will be provided for flushing and neutralizing spilled electrolyte, for fire protection and for adequate ventilation of battery charging areas to prevent a build-up of explosive gas-air mixture.

### 5-603. Electronic Material

Tubes will be stored in racks or bins with sufficient shelving to prevent crushing. Tubes will be stored in original cartons if possible. Special storage instructions on the outside of the tube shipping containers will be complied with as appropriate. When moving tubes, sufficient protective shock absorbing material will be used to prevent damage.

a. Radioactive material. See paragraph 5-626 for

guidance on this type material.

- b. Photo tubes. Strong light levels and high temperatures contribute to the deterioration of photo tubes. Photo tubes must be stored out of the direct light and away from high temperature areas as heaters, etc.
- c. Crystals. Crystals, when in storage, will not be stored adjacent to electrical wiring. Protection can be afforded, if necessary, by storing each crys-

tal in a metal container or wrapping each crystal in metal foil.

- d. Magnetrons, klystrons, traveling-wave tubes, backward-wave oscillators (carcinatron). These items must be stored away from magnetic fields which may be generated by adjacent equipment or wires. Interaction of magnets must also be avoided; therefore, these items must never be stored bare or without both an inner and outer container.
  - e. Tubes.
- (1) Large glass tubes will be stored with extreme care to ensure maximum safety of personnel as well as for maximum tube protection.
- (2) When storing tubes with fins, care must be exercised to prevent fin damage. If fins are crooked or bent, attempts to realign them may affect tube properties.
- (3) Shipping guards or dust covers are commonly used to protect critical or fragile elements from damage. These protective items must remain in place during storage.

f. Other electronic material.

- (1) Storage. Electronic equipment and bulk boxes of maintenance repair parts and components will be palletized wherever practicable. Components can be stored on frame pallets, depending on the quantity, size, and shape of components to be stored. Long heavy boxes of items such as wave guides and antennas should be kept in racks, preferably on rollers.
- (2) Temperature control. Because the precision components of electronic equipment are susceptible to corrosion, mold, and fungus growth, temperature control is desirable in all warehouses where this material is stored. A dry warehouse is essential. At certain activities, temperature variance is so slight that mechanical controls need not be installed. A good temperature for the storage of electronic material is 70° F.
- (3) Humidity control. Because it is impractical to apply preservatives to all types and parts of electronic equipment, control of relative humidity in storage areas is desirable for long term storage. Fluctuating humidity and temperature causes condensation within the equipment, which results in rust. By the use of dehumidified storage space, the life expectancy of the equipment is increased considerably and additional preservation is reduced to a minimum. Controlled humidity storage space is particularly desirable in areas having high humidity and where long term storage is intended. Electronic

material stored in dehumidified warehouses ordinarily will not require additional preservation. In dehumidified storage, open-framework packing cases can be used to provide complete ventilation.

(4) Assembly of complete units. To facilitate stock control, issue, and inventory, complete equipment will be stored as a unit. This is recommended also for the storage of complete sets of spare parts. In some instances, wave guides, antennas, and hoists mechanisms are too bulky to be stored with other components, but will be conveniently located so that such items will not be overlooked when the equipment is assembled for issue.

(5) Stock issue. Electronic material should be stored in issuable condition and in such a manner to allow issue of older material first, to the extent practicable. An effective method is to position new receipts and stocks being rewarehoused in a fashion to permit ready access to older material by stock selection personnel. Storage managers should periodically monitor stock issue procedures to ensure compliance at the warehouse level.

# 5-604. Photosensitized Materials (Film and Paper) and Flash Bulbs.

- a. Sensitized materials. Unexposed photosensitized materials are perishable and deteriorate with age. Improper storage results in loss of emulsion sensitivity, increased fog, inferior tone reproduction, and other defects that may render the material useless. The presence in the storage area of heat, moisture, X-rays, radioactive material, atomic fission radiation, and certain gases accelerate deterioration. Careless handling damages the package and ruins the contents. Assets and consumption reporting on a quarterly basis, rapid turnover, and careful handling will maximize the usage of this commodity.
- b. Relative humidity control. The required relative humidity for sensitized materials ranges from 30 to 60 percent with 50 percent considered as ideal. A constant relative humidity will be maintained.
- c. Temperature control. Photosensitized materials will be stored at temperatures of 50° F or lower. A constant temperature will be maintained. Regardless of how photosensitized materials are packaged, temperatures should be controlled in the storage areas.
- d. Refrigeration. Refrigerated space always should be utilized for proper storage of photosensitized materials. The required condition within the re-

frigerated space will be a maximum temperature of 50° F and constant relative humidity within the range of 30 to 60 percent. Leakage of moist air from the outside should be reduced by using an air lock at the door. If the relative humidity cannot be held as required, the sensitized material should be placed in vaportight containers inside the refrigerators.

#### e. Hazards.

- (1) Harmful gases. Sensitized materials will be protected against harmful gases. High concentration of formaldehyde, hydrogen sulphide, ammonia, illuminating gas, mercury vapor, industrial gases, exhaust from engines, vapors of solvents, cleaners, and turpentine can damage photographic emulsions.
- (2) X-rays, radioactive and atomic fission radiation. When storage of packaged photosensitized materials near X-ray machines, radar, radioactive, or atomic fission radiation cannot be avoided, the material will be placed in facilities shielded with an adequate thickness of lead or other suitable barriers.

## f. Operations.

- (1) Storage. Immediately upon receipt, photosensitized material will be stored under specified optimum conditions. These optimum conditions will be utilized at storage or holding points within the limits of resources available. Deviation from the optimum storage conditions for storage of photosensitized materials is authorized whenever prescribed storage facilities (refrigerated) are unavailable and the expenditure of resources to modify existing or construct new facilities for such purpose cannot be economically justified. Photosensitized material will be placed on shelves, dunnage, or pallets allowing sufficient space between packages for adequate circulation of air. Refrigerators utilized for photosensitized material will not be used for the storage of food or water in any form. Likewise, these materials regardless of level of preservation and packaging will not be stored in damp basements, on damp ground, near escaping steam, steam pipes, boiler rooms, windows, on top floors of uninsulated buildings, or near other sources of heat. Each lot of material will be stored according to the expiration date that is placed on the package by the manufacturer.
- (2) Handling. Photosensitized materials should be moved to refrigerated storage immediately upon receipt at all points of destination. These materials

will never be permitted to stand on docks, loading platforms, loading ramps, etc. The material should be moved by refrigerated carriers and unloaded directly into refrigerated storage. In other words, all photosensitized materials should be maintained under optimum temperature and relative humidity condition from time of shipment from the manufacturer's plant until placed in use by the using activity to assure preservation in the best condition for the longest period of time.

(3) Turnover. The objective should be to have as rapid turnover as is economically possible and to use photosensitized materials before the expiration date. All packages of the photosentized materials are stamped by the manufacturer with an expiration date (month and year). This date gives the life expectancy of the sensitized materials under normal nonrefrigerated storage conditions. Improper storage conditions can render these materials useless long before the expiration date is reached. Photosensitized material will be issued according to the "Expiration Date" shown on the package. That is to say, the package with earliest expiration date will be issued first. Sensitized material stored under the optimum conditions specified herein will be issued for the following period after the stamped expiration date:

	Materials	Domestic	Overseas
(a)	Black and white	12 months	6 months.
	Graded paper		
	Variable contrast paper		
	Color, camouflage detec- tion, and infrared film.		
(e)	Polaroid type material	No extension.	

Photosensitized materials will be tested in accordance with the procedures and schedule as set forth in service/agency Quality Control Standards. Materials which have not been used within this time period or are suspected of damage in storage or handling will not be discarded without being tested. Often only partial impairment of speed and contrast will have taken place and the material will still serve adequately for training or noncritical use.

g. Storage of photographic chemicals.

(1) The optimum storage conditions for all photographic chemicals are at temperatures between 70° and 75° F and at a relative humidity between 20 and 40 percent.

(2) The recommended storage conditions for specific types of photographic chemicals are as follows: (a) Dry chemicals in hermetically sealed containers at temperatures up to 90° F and relative humidity.

*Note.* Sealed metal containers do not require special protection except where conditions could cause container corrosion or deterioration

- (b) Dry chemicals in containers with moisture barriers at temperatures up to 90° F. and at relative humidity up to 50 percent.
- (c) Liquid chemicals in hermetically sealed containers at a temperature between 70° and 80° F and any relative humidity.
- (d) High humidities will be avoided where possible to prevent deterioration of fiberboard packing cartons.
- (e) These instructions are applicable to those photographic chemicals discussed. Where the manufacturer specifies special considerations, the manufacturer's instructions will be followed.
- h. Flash bulbs. Personnel who store, handle, and ship flash bulbs should be cautioned about the fire hazard which exists from unpackaged or improperly packaged bulbs being fired or exploded by radar beams. Normally, flash bulbs should be shipped in full case lots. If not possible to ship in full case lots, broken case lots will be packed in accordance with Federal Specifications W–L–122. Bulbs will not be stored near sources of radiated energy unless suitably protected by containers which are impervious to such radiation.

# 5-605. Self-Sealing Fuel Cells

- a. Deterioration. All self-sealing fuel cells deteriorate with exposure to light, heat, and improper handling.
- b. Precautions to be taken. When handling and storing self-sealing fuel cells the following precautions should be observed.
- (1) Store cells in clean, dry, dark and cool warehouses.
- (2) Store in shipping container, if available, and do not remove cell from shipping container until needed. Save empty containers for storing used cells.
- (3) Use frames or vertical dunnage to prevent crushing or distorting when more than four containers of cells are stacked.
- (4) Uncrated cells should never be stacked but should be stored in contoured racks, resting on the widest side where there are no fittings.

- (5) For the support of uncrated cells, the use of paper tubes inserted within the cell is recommended.
- (6) The cell should never be allowed to rest on protruding fittings. When crated, the proper position will be indicated on the container by arrows.

(7) While in storage, all openings will be covered to prevent the entrance of foreign materials.

(8) Internal support will be installed in all semiflexible cells to prevent distortion.

(9) Cells with external supports will not be stored without these supports.

(10) Never roll or drag a cell.

## 5-606. Internal Combustion Engines

- a. Other than aircraft. When storing internal combustion engines, the following precautions should be observed:
- (1) Engines should be stored in a clean, dry area which is not subject to extreme variations in temperature.
- (2) Engines should be stored on dunnage, pallets, skids, or in racks depending on the size, type of engine, method of pack, and quantity to be stored.
- (3) Engines are not to be turned over or cranked while in storage because of the danger of damaging the coating of preservative compound on the cylinder walls and on all moving parts.

(4) Engines in storage, other than dehumidified storage, should be treated periodically with preservative compounds.

- (5) In nondehumidified storage, periodic spot checks on 5 percent of the engines on hand should be made at intervals of approximately 6 months. If deterioration is apparent, a complete check of all engines should be made and engines showing deterioration should be represerved.
- (6) In dehumidified storage, normally, engines do not require as much attention; an annual check of 1 percent of the engines in stock should be sufficient to insure the engines being operable when required.

(7) A different group of engines should be selected for each spot check.

b. Aircraft. Storage of aircraft engines will conform to specific instructions of the appropriate military service.

## 5-607. Lubricating Oils and Greases

When storing oils and greases the following precautions should be observed.:

- a. Store in fire resistant, sprinklered buildings or warehouses.
- b. If a general warehouse is used, storage should be in end zones with immediate access to exterior doors.
- c. Oils and greases should be separated from blocks of other materials by aisles not less than 3 feet wide.
- d. Oils and greases should be segregated from highly combustible supplies.
- e. Exteriors of containers should be free of oil and grease.
- f. Containers should be inspected before being placed in storage and periodically thereafter. Containers which show signs of leakage, excessive corrosion, or are otherwise unfit, should be removed from storage and contents should be transferred to satisfactory containers.
- g. Oils and greases in bulk storage should be palletized.
- h. The height of stacks and the size of blocks should comply with regulations governing floor load capacities and ceiling heights.

### 5-608. Paints

Paints, varnish, lacquers, shellac, and thinners should be stored as follows:

- a. Where facilities are available, paint and paint materials will be stored in fire resistant storage buildings.
- b. If such space is limited, supplies bearing Interstate Commerce Commission red labels (flammable types) will be given preference.
- c. If a general storage warehouse is used, storage will be in end zone with immediate access to exterior doors.
- d. Containers of paints will be segregated from highly combustible supplies.
- e. Before placing in storage, containers will be inspected for leaks.
  - f. Good ventilation will be provided.
- g. Containers of paint should be palletized before storing.
- h. Containers of paint should be located so as to facilitate issue on first in, first out basis.
- i. Paints, in general, should be stored in a cool dry place with the exception of bituminous camouflage, water emulsion, and latex-type paints. In colder climates these types should be stored in heated buildings to prevent freezing.

#### **MEMORANDUM** OF CALL




Previous editions usable

TO:	
YOU WERE CALLED BY-	YOU WERE VISITED BY-
OF (Organization)	
PLEASE PHONE ▶	FTS AUTOVON
WILL CALL AGAIN	IS WAITING TO SEE YOU

RECEIVED BY DATE TIME

STANDARD FORM 63 (Rev. 8-81) Prescribed by GSA FPMR (41 CFR) 101—11.6 63-110 NSN 7540-00-634-4018

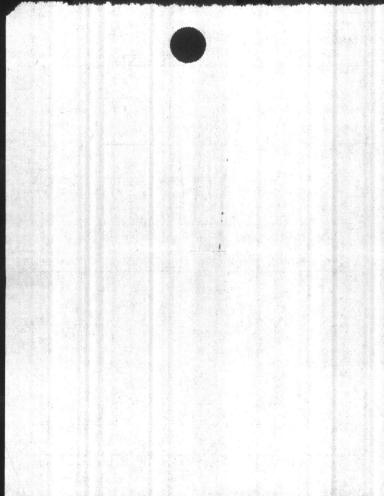

j. Store in nonfireresistive, unsprinklered warehouse as a last resort only.

### 5-609. Life Floats

Life floats should be stored in clean, dry, and covered area; should not be exposed to the direct rays of the sun or extreme heat; and should be stored with caution against moisture accumulation in webbing and ropes; floats should be reversed or turned periodically. When handling life floats, care should be taken to prevent damage to cork floats and webbing.

#### 5-610. Linoleum

When storing and handling linoleum the following precautions should be observed:

a. Linoleum should be stored in a vertical position and in the original shipping container.

- b. Heated or unheated storage of linoleum is satisfactory; temperature from 0° to 120° F will not harm it.
- c. At low degrees, linoleum should be handled carefully as it will crack if dropped.
- d. When removing linoleum from trucks and boxcars do not drop crates over stringers.

# 5-611. Fiber Rope

When storing fiber rope, the following precautions should be observed:

- a. Fiber rope will always be stored in a cool, dry, and covered space as heat and moisture cause deterioration.
- b. When manufactured, fiber rope is impregnated with oil which adds 10 percent to the weight. The rope deteriorates as the oil leaves the rope.
- c. Rope will be protected from the direct rays of the sun.
- d. Adequate ventilation will be maintained in rope storage areas at all times.
- e. When properly stored, rope loses its strength because of age at about 2 percent per year; life of rope will be shortened by presence of mold, acid, or water.
- f. Rope will not be stored near acid, batteries, chemicals, or alkalies and will be removed from all danger of fumes from such materials.
- g. Rope up to 2 inches in circumference will be wrapped in burlap or waterproof paper.
  - h. Rope will never be put into storage while wet

or covered in a manner that will cause it to retain moisture.

- i. Coverings will be left on the outside of rope coils; lashings will be cut from the inside of the eye leaving the covering intact.
- j. Rope will be inspected to locate the inside end which is in the eye (opening in center of coil) when opening a coil; all stock should be taken from this end.
- k. Before cutting rope, whipping of yarn should be applied on both sides of the proposed cut to prevent the strands from becoming unlayed.
- l. Rope will be stored on reels, in bins or racks, or on pallets according to the quantity and size to be stored.

## 5-612. Wire Rope

- a. Storage. Wire rope should be stored in a cool, dry place away from fumes, chemicals, heat, or dampness and should be kept on the reel or spool until used. If it is to be stored for a long period of time, the full length of the rope should be coated with a preservative (MIL-C-16173, grade 1). In the manufacture of wire rope, a lubricant is applied to the hemp center which acts as a storage medium for the oil. Wire rope should be kept away from all chemicals such as acids which attack the metal and alkali which will destroy the internal lubrication. Damage by chemicals is not always noticeable and the concealed weakness makes the cable dangerous to use.
- b. Corrosion. Corrosion or rust weakens a rope but it is almost impossible to ascertain the loss in strength. Exterior loops of the rope should be examined frequently for signs of rust or corrosion.
- c. Unwinding. When removing wire rope from a reel, the reel must be rotated on a spindle resting on a cradle (fig. 5–48), or a turntable, or by rolling the reels along the floor. A surplus race from a gun mount may be used as a turntable (fig. 5–49). Wire rope should never be taken from one side of the reel as each wrap on the reel produces a kink in the rope which makes it unsafe for use. A short, angular bend, known as a "dog leg," resulting from a partial kink will chafe on the flanges of the sheave and wear the rope prematurely at that spot.
- d. Cutting. Before cutting any wire rope (including preformed rope), apply three seizings on each side of the proposed cut. If cutting is done by an acetylene torch the seizing can be omitted as the wires and strands will be welded together.

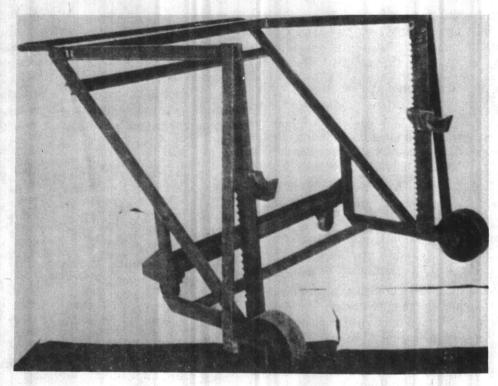


Figure 5-48. Cradle for handling reels.

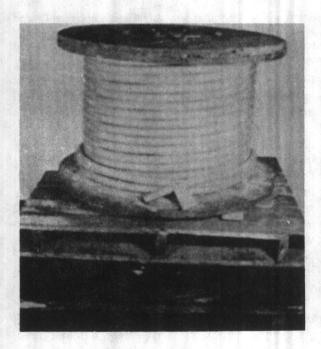


Figure 5-49. Wire rope dispensing turntable.

## 5-613. Clay Targets

Clay targets are fragile items and the handler, always, will comply with the marking "this end up." Clay targets should be palletized and stored in storage racks or pallets and pallet support sets.

### 5-614. Cement

- a. Cause of deterioration. Causes of deterioration of cement are as follows:
  - (1) Moisture.
  - (2) Movement or circulation of air.
- (3) Failure to observe first-in-first-out issue procedure.
- (4) Warehouse pack (packing of lower sacks of cement when stacked too high for a long period of time).
- b. Method of storage. Cement will be stored in dry covered storage areas. The circulation of air should be held to a minimum as air carries moisture. Cement will be stacked away from walls to avoid condensation or moisture.
- c. Pallet storage. Cement will be palletized not to exceed four courses high per pallet. Pallet loads

will not be stacked more than two high unless aids are used to support the weight of superimposed pallet loads. Cement put into storage will not be disturbed until it is issued. Restacking or shifting (to avoid warehouse pack) exposes the cement to air circulation which increases the absorption of moisture.

# 5-615. Navigation Timepieces

- a. Security. Timepieces should be stored in a room which has adequate security facilities. This room should be located away from the shock and vibration of machinery; also should be air conditioned and free of dust.
- b. Temperature. The controlled temperature should be maintained near  $70^{\circ}$  F.  $(+5^{\circ})$ , with a relative humidity of not more than 50 percent.
- c. Unpacking. When received from the observatory, the timepieces should be unpacked, wound, uncorked or unlocked, started and set to Greenwich Central Time and given a 10-day run with daily winding and rating prior to storage. After the 10-day run, the timepieces should be allowed to run 48 hours more, then stopped and corked or locked, and stored.
- d. Storage. When not running, all navigational timepieces should be inverted every 30 days to redistribute the oil on lubricated surfaces. When the timepieces have been in storage 6 months, and not more than 8 months, wind, start, and allow to run for 5 days with daily winding; after the timepieces have operated for a period of 2 days, should be rated for 3 days. At the conclusion of this 5-day trial period, the timepieces should be stopped and returned to storage. Suitable shelving or cabinets should be provided for all timepieces.

# 5-616. Machine Tools and Production Equipment

- a. Reference. Detailed information concerning the preparation of machine tools and similar equipment for extended storage will be found in MIL-STD-107 and in Joint Publication TM 38-260, NAV-SUP Pub 523, AFR 71-18, MCO 4870.62, DLAM 4145.9, Preparation of Industrial Plant Equipment for Storage or Shipment.
- b. General. Most machine tools are large, bulky, and heavy; this fact should be considered in laying out space. Large, unwieldy pieces of equipment and unusually heavy items should be stored as close to

- removal aisles as possible. Machine tools vary considerably in weight, shape, and size, but this does not mean that the tools can be placed haphazardly in the storage warehouse. Machine tools should be lined up by type and arranged so that adequate aisle space is provided, not only to facilitate inspection but also to provide easy removal without disturbing other units. This equipment can be block stacked, providing it is composed of similar units.
- c. Crating. Most crating of machine tools is unnecessary and costly. Crating should be used only when the individual tool is adaptable for tiering. Tiering of machine tools should be limited to such tools with solid bases, rectangular columns, and circular pedestals. Only such tools weighing less than 10,000 pounds should be tiered. The use of bolts in place of nails for such crating is permissible. Consideration also should be given to floor load capacity and accessibility. Block stacking should be determined by qualified personnel at each activity (fig. 5–50).
- d. Storage. The areas directly under craneways are to be utilized, so far as practicable, for the heaviest units. This is the most expensive storage space and will require a limited number of removal or access aisles, since the direction of storage is upward. In order to facilitate inspection and removal, units should be placed so that inspection and removal space is provided. The size of removal aisles will be governed by the size of the units, but should not exceed the width necessary to furnish convenient passage for handling equipment. Where practicable, the aisles should be continuous and provide straight movement (fig. 5-51). For space conservation, it may not always be practicable to store units immediately adjacent to removal aisles; in this event inspection aisles should be widened to provide enough space to move individual units through to the removal aisles. Steel rollers, overhead cranes, forklift trucks, dollies, lift jacks or other suitable handling equipment can be used to move any unit from storage, provided care is taken to determine the center of balance and position of pedestal and bases. In order not to disturb the protective coating and preservatives, the material should be moved only for inspections, in emergencies, or when ordered for issue. Platforms and racks should be used when within the limits of floor load capacities and available air rights. When a unit is moved, the nuts of all holddown bolts should be tightened securely.

DOD 4145.19-R-1 15 September 1979

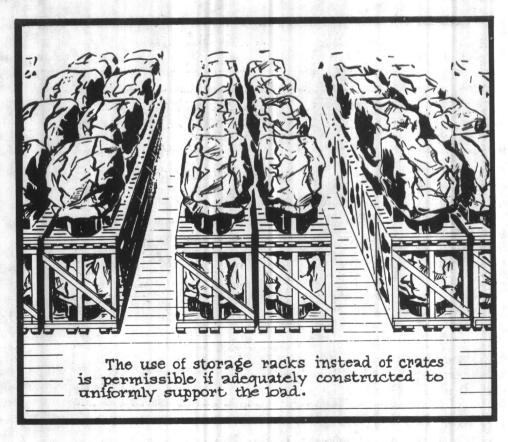


Figure 5-50. Tiering of machine tools.

e. Use of skids. All units should be skidded when stored to protect the machinery during handling. It is recommended that the skids remain attached to the machine while in storage. Guidance is provided in MIL-HDBK-701. However, at activities where leveling jacks are available and personnel are familiar with the storage of machine tools and production equipment, skids can be removed. When skids remain on the units, units should be leveled properly before storing. If the floor is too irregular to use shims, the skidded unit should be placed on wooden strips, 1 to 2 inches in thickness. To ensure proper distribution of weight and to maintain the unit level at all times, the strips should be placed at right angles directly under the bolt heads. The strips not only prevent the unit from warping and distorting, but also will protect the skids and facilitate movement of the units. In storage, the nuts will be backed off 11/2 to 2 inches from the top of the skid. The bolts and nuts should be protected with a preservative. All machine tools in storage

should be tagged with the following information (red tags preferably): "CAUTION: TIGHTEN ALL HOLDDOWN BOLTS BEFORE REMOVING THIS MACHINE FROM STORAGE."

f. Accessories. Accessories should be boxed or crated and placed on the skid or platform of the unit from which removed. Precautions should be taken so that the wood of the boxes or crates does not come in contact with the preserved machine surfaces. When it is not possible to place accessories on the skid, such accessories should be stored adjacent to, or in the vicinity of, the machine tool; proper identification should indicate clearly the unit to which the crated accessories belong.

g. Tiering. Where it is necessary to use tiering methods to conserve storage space, care should be taken in selecting machines to be tiered. Machines of long bed design, with leg type, end frame, or multiple column bases, or weighing more than 10,000 pounds should rest on a solid base and not be placed on top of other machines.

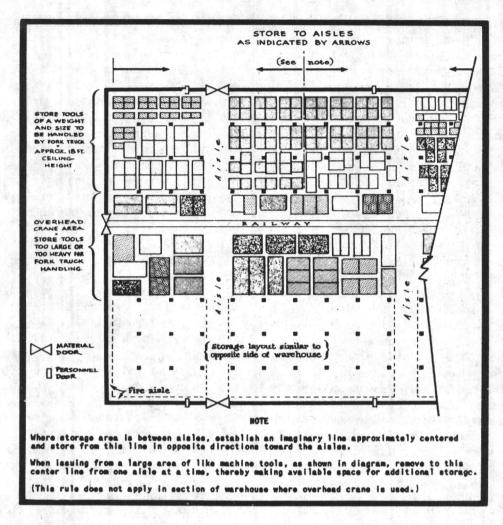


Figure 5-51. Typical storage layout of machine tools.

h. Machines weighing more than 10,000 pounds. Tiering of machines tools, such as lathes with long beds or other units with extended legs, long tables, or double columns may distort or warp the tools beyond reasonable repair. Small machines that have rectangular columns of circular pedestal bases can be tiered, provided suitable crating or dunnage is inserted between the machines to bear the load. To avoid permanent distortion of frame members by undue stresses or strains, all machines should be leveled and supported. Machine tools may be tiered two tiers high, but there are some types of industrial equipment that can be tiered higher when crated such as welders, furnaces, heat treatment equipment, and washing machines.

### 5-617. Tires, Tubes, and Rubber Products

- a. Selection of warehouses. Warehouses in which tires are stored must provide the maximum safety and protection to the tires housed. Buildings used for tires storage should—
- (1) Provide maximum protection against fire and reduce fire hazards to a minimum.
  - (2) Provide protection from light.
  - (3) Provide a uniformly cool temperature.
- (4) Be free of operating electrical equipment which generates ozone.
- (5) Provide protection against drafts or air movement since air currents increase rubber deteriorating oxygen in the air and aid combustion in case of fire.

b. Aircraft tires and tubes.

(1) The age limits for aircraft tires and aircraft inner tubes are based on the date of manufacture. Retreaded tire age limits are also from the date of tire manufacture, not the date of retreading. Aircraft tire manufacturing dates are included in the serial number of tires. The serial number consists of a maximum of ten positions, alpha and/or numeric. The first four positions are the date of manufacture in the form of a Julian date (last digit of the year followed by the day of the year i.e., 23 May 1968 is written 8144). Manufacturing dates shown previous to this method are identified by month and year (such as 10-68/October 1968). Inner tubes have the date applied to the tube by decal or stamped on the surface. The outside of the tube cartons are also date stamped. Proper control and rotation of stock procedures will be implemented to assure that the oldest age dated items are issued first. Color tape is used on aircraft tires manufactured in 1962 and subsequent years to aid in age identification of the tires while in storage at depots, storage sites, air bases, etc. Tires manufactured in 1962 and subsequent years are color coded with one circumferential band of 1-inch wide tape, completely around and approximately centered on the tread. This paragraph is intended as information only, and is not used as authority to require tape markings of tires currently in storage. New tires will be color coded by the manufacturer before delivery.

# \*Tape Color Identification Data

	맛이 보이면 어떻게 하셨어요? 이번 이번 이번 때문에
Year	Tape color
1962	White
1963/1970	Silver or gray
1964/1971	Green
1965/1972	Blue
1966/1973	Orange
1967/1974	Yellow
1968/1975	Magenta
1969/1976	Red

\*Tires manufactured after 1971 have the year printed on the following colored tape.

Year	Tape Color
1971/1974/1977	Green
1972/1975/1978	Blue
1973/1976/1979	Orange

(2) Serviceable aircraft tires will be placed into suitable tire racks so that tires will be held in a vertical position and with each tire holding its own weight only. The rack will provide a flat or covered

surface for the tire rather than a round surface such as pipe or tubing. If this procedure is not followed, particularly in the case of tubeless tires, it may be impossible to mount the tire without the aid of additional equipment. The flat spots on the tread which may develop from storing tires vertically are not harmful. Such flat spots will disappear when the tire is mounted and inflated.

- (3) Reparable aircraft tires may be stored in a vertical or horizontal position. Flat spots caused by storage in either position are corrected during the retreading process. Tires stored in a horizontal position will not exceed the stacking limits specified below.
- (4) Reparable aircraft tires with a normal cross section width of 10 inches and above will not be stacked more than 10 tires high.
- (5) Reparable aircraft tires with a normal cross section width of less than 10 inches will not be stacked more than 15 tires high.
- (6) Aircraft inner tubes will be stored to avoid creasing. Innertubes will not be completely deflated and will be dusted with tire talc to prevent the tubes from sticking together. Whenever possible, innertubes will be packed in fiberboard boxes. If fiberboard boxes are not available, tubes will be wrapped in heavy paper and stored in a dark room. Packages will be plainly marked to indicate contents and will state size, type of tube, date of manufacture, and stock number.
- (7) Tires and tubes should not be stored in the vicinity of electrical discharges from the operation of electric motors, generators, welders or other electrical devices.
- c. Over the road and industrial vehicular tires and tubes.
- (1) The preferred method of storing pneumatic rubber tires, mounted and unmounted, tube and tubeless, new, used, and reconditioned, is in a vertical position. Horizontal storage is not as satisfactory because of the necessity for reversing at 6-month intervals. However, where small quantities of tires are involved, horizontal stacking is economical. When horizontal pallet storage is used, the quantity of tires to be stacked on each pallet should not exceed the following limits.

Maximum number of tires to be stacked

Tire size	one upon another
600 × 16	15 each
650 × 20	14 each
$750 \times 16$	12 each

# MEMORANDUM OF CALL

		١
and a	12114	

то:	
YOU WERE CALLED BY-	YOU WERE VISITED BY-
OF (Organization)	
PLEASE CALL → PHONE NO. CODE/EXT.	FTS
WILL CALL AGAIN	IS WAITING TO SEE YOU
RETURNED YOUR CALL	WISHES AN APPOINTMENT
MESSAGE	

RECEIVED BY


DATE

TIME

63-109

**♥U.S. G.P.O.** 1979-281-184/2

STANDARD FORM 63 (Rev. 8-76) Prescribed by GSA FPMR (41 CFR) 101-11.6

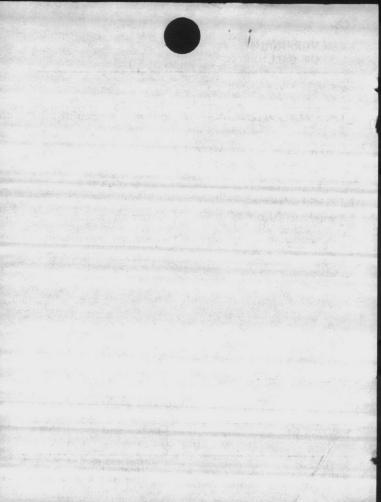

	Maximum number of tires to be stacked
Tire size	one upon another
$700 \times 20$	12 each
$900 \times 16$	8 each
$1,000 \times 20$	6 each
$1,200 \times 24$	6 each
$1,300 \times 20$	6 each
$1.400 \times 20$	5 each

If the indicated limit is exceeded, the bottom tire is in danger of permanent damage. This limit also applies to placing one pallet on top of another, when intervening supports are not provided between the pallets. If tires stored horizontally remain in storage for over 6 months, each stack should be reversed so that the bottom tire is on top.

(2) Vertical storage of tires eliminates the necessity for periodic rewarehousing which is required when tires are stored horizontally.

- (a) Tires (tube or tubeless type) stored in a vertical position should be grouped by size on standard 40-by 48-inch pallets combined with appropriate size standard pallet support sets, to form a tire storage unit (fig. 5–52). As an alternate method, pallet racks may be used if they are more readily available. Suitable wood racks, steel racks or slotted-angle receptacles and nonstandard pallet support sets, now in use, are acceptable pending normal replacement action.
- (b) Unmounted tube type tires may be stored in pyramidal fashion as depicted in figures 5–53 and 5–54. This method permits the attainment of adequate storage heights with a minimum requirement for storage aids. Tires elected to be stacked in pyramidal fashion should be bundled as follows.
- 1. Tire sizes 14 inches (OD) up to a size less than 26 inches OD should be bundled utilizing four evenly spaced ½-inch × .020-inch, QQ-S-781, flat steel straps. The compression of the bundled load should amount to 15 percent of the bundled height. Compressed bundle of these sizes should not exceed 43 inches in height. When compressed bundles do not exceed 43 inches, two bundles will adequately fit (horizontally) side by side when shipment is by MILVAN or SEAVAN.
- 2. Tire sizes 26 inches OD up to 48 inches OD should be bundled utilizing four evenly spaced  $^{3}$ 4-inch  $\times$  .023-inch, QQ-S-781, flat steel straps. Compressed bundles of these sizes should also not exceed 43 inches in height.
  - 3. As long as the tire bundles on the bottom

layer are chocked with a  $2\times4$  or  $4\times4$ , tires can be safely stacked four bundles high.

- 4. An exception to the above are tires size  $11.00 \times 15$  which can by pyramidal stacked five bundles high (fig. 5–53). The fifth layer should be offset from front to rear to tie the stack of tires together to provide more stability to the block stack.
- 5. Tires can also be pyramidal stacked atop a base layer of tires stored in pallets and support sets as illustrated in figure 5–54. In addition to greater space utilization through achievement of higher stacking, this method provides better stack stability to the tires being stored.
- 6. Two or more tire sizes should not be piled in the same stack.
- (c) Tires in storage can deteriorate in time to an unuseable state. Stock rotation is necessary in order to prevent such loss. To ensure maximum protection against loss from deterioration, a strict policy of issuing oldest stock first will be practiced. When tires or tubes are received for storage, the month and year of manufacture or retread will be indicated on the pallet placard. This will aid in selecting the oldest stock first.
- (3) Care must be used at all times in handling of tires, tubes, and rubber products. They must not come in contact with gasoline, oil, or other petroleum products. (If such contact is unavoidable, wash immediately with vegetable oil, soap and water.) Cutting, scuffing, or scraping of tires during handling must be avoided.
- (4) Unmounted tires and tubes must not be stored in the open. Where closed warehouses are not available for storage of unmounted tires, or where it is necessary to store tires mounted on vehicles in open storage for periods exceeding 90 days, pending removal to covered space, they should be protected in accordance with MIL-T-46755. Tires manufactured or reprocessed with anti-ozonant "OZ" compounds do not require additional protection until 2 years from date of manufacture.

Note. Date of manufacture and "OZ" marking are normally imprinted on the tire sidewall. Date of reprocessing is normally imprinted on a reconditioned tire sidewall.

(5) Used serviceable tires will not be placed in storage until they have been cleaned, inspected, and had all foreign material removed. Serviceable used tires, including those reconditioned, will be stored and handled the same as new tires.

Figure 5-52. Typical storage in pallet support sets.

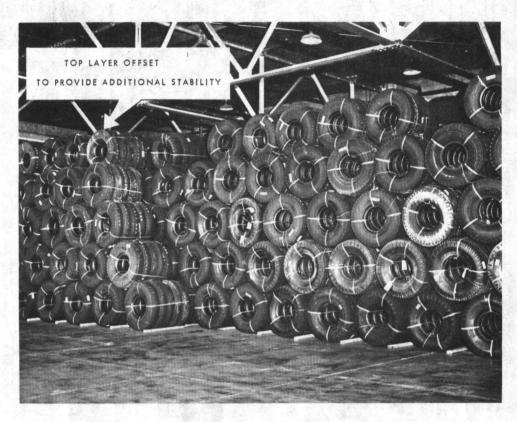


Figure 5-53. Block stack of 11.00x15 tires.

- (6) Tubes must be handled with care equal to that given to tires.
- (a) New tubes should be stored in the original package and protected as outlined for tires.
- (b) Used serviceable tubes should be completely deflated by removing the valve core. They can be folded and stored.
- (c) Tubes will be placed in storage grouped according to size and type. Removal from storage will be on the basis of oldest stock first.
- (d) Self-sealing tubes must be inflated enough to retain full molded size. Storage aids (e.g., pallet support sets) will be used to assure retention of shape and size.
- d. Solid rubber tires and track components. Solid rubber tires, rubber components of combat vehicle track, track support rollers, and track idler wheels will be protected as outlined in c above.
- e. Rubber cements. Rubber cements must be kept within 32° to 90° F. and all containers must be kept tightly closed at all times. Rubber cements, de-

pendent upon flash point, are either flammable liquids or combustible liquids and must be considered for storage in light of their flammability properties.

## 5-618. Abrasive or Grinding Wheels

- a. General. All grinding wheels are fragile, and should be handled and stored carefully to prevent breakage and chipping.
- b. Location. Wheels should be stored in covered, dry areas, and should not be exposed to extreme temperature changes. Escaping steam and rain will seriously affect grinding wheels, consequently, such wheels should be away from radiators and open windows.
- c. Storage. Generally, grinding wheels are stored in bins and racks. Smaller sizes are often carried in bin drawers. The bins, racks, or drawers should be built to accommodate wheels of various sizes. Separate sections of storage racks should be constructed within standard shelving to prevent the wheels from rolling off (fig. 5–55). Wheels of the

DOD 4145.19-R-1 15 September 1979



Figure 5-54. Tires stacked atop a base layer of pallets and support sets. Note the 6-inch extension on the support set uprights.

me size, type, and specification should be stored ogether and should be arranged, so far as possible, o facilitate issue on the basis of first in, first out (fig. 5–56).

- d. Straight and tapered wheels. Most straight and tapered wheels should be stored on edge in racks. The racks should provide two point cradle support for the wheels to prevent rolling. A sufficient number of partitions to prevent wheels from tipping over should be provided. An individual section is recommended for each wheel of unusual shape.
- e. Thin organic bonded wheels. Thin organic bonded wheels should be stored on a flat surface away from excessive heat. A heavy steel plate or thick vitrified wheel makes a good foundation for

stacking, and similar plate or wheel placed on the top of the stack will help prevent warpage.

- f. Cylinder, cup, and saucer wheels. Cylinder wheels and large straight cup wheels can be stacked on the flat side with corrugated paper or other cushioning material between the wheels, or can be stored in racks similar to the racks used for storing straight wheels. Large flaring cup wheels should be placed flat on a horizontal shelf, alternating the position so wheels are stacked base against base and face against face. Small saucer, cup, and dish wheels, without thin, easily damaged edges or rims, can be stored on edge.
- g. Cloth-backed thin discs. Cloth-backed thin discs should be supported and weighted the same

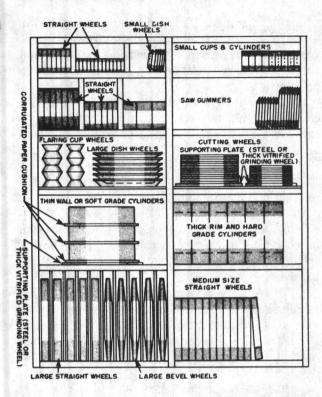


Figure 5-55. Bin storage of grinding wheels.

as bonded wheels, and should be stacked cloth to cloth and grain to grain to avoid damage to the cloth backing. Also, this method of stacking will help to prevent warpage.

h. Small shaped wheels, Small shaped wheels, such as plugs and cones, should be stored in boxes, bins, or drawers.

### 5-619. Glass

a. Storage. The relative humidity in glass storage areas should not exceed 65 to 70 percent, because moisture and dampness have a tendency to etch glass when it is stored for long periods of time. Glass should be stored in original containers until ready for issue. If glass is removed from original containers, the three types of storage racks generally used for storage are the "A" type, pocket type, and slotted type. Because of its fragility, glass should be handled with extreme care. Persons handling large sheets of glass should use rubber grips or pads.

b. Small size glass. Window glass and other small size glass should be stored in pocket type storage racks if removed from original containers. If pos-

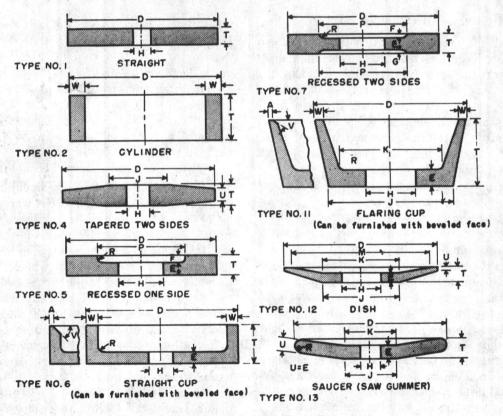


Figure 5-56. Typical types of grinding wheels.

sible, the racks should be constructed from redwood because this lumber is free from knots and gives added protection to the edges of the glass. Glass stored in pocket racks should have an absorbent type of paper between each sheet of glass. Bulk storage of small size will be palletized if the quantity is large enough.

c. Plate glass. Medium size plate glass, if removed from original containers, should be stored in slotted type storage racks. The slotted rack should be constructed from stock lumber with the slots made of maple, if available. The maple should be three-eights of an inch milled and three-eights of an inch routed to form the slots, and the separators at the top of the racks should be constructed of various thickness of masonite. Plate glass in original containers should be stored on edge.

d. Extra large sizes. Glass of extra large or special sizes should be stored on "A" type racks.

e. Handling block. A wedge-shaped handling block is used for handling plate and large size sheets of glass. This wedge-shaped block is constructed from stock lumber and is covered with carpet. The carpet protects the edge of the glass and permits easy removal from the racks.

## 5-620. Miscellaneous Chemicals

- a. Handling precautions. Although some chemicals are not hazardous materials, a certain amount of care is required in storage and shipment. All chemicals should be placed in containers that will prevent breakage during transit. Before making shipments of any chemicals, the sending activity should consult Interstate Commerce Commission regulations to determine whether special requirements are necessary.
- b. Example chemicals requiring special considerations for storage and shipment.
- (1) Aluminum chloride (anhydrous). Aluminum chloride should be stored in airtight drums or sealed glass containers. Exposure to moisture or air makes it unfit for most uses. Packs should be examined frequently to make certain that the airtight seal is in perfect condition. It is nonexplosive and not a fire hazard.
- (2) Antimony sulfide. Antimony sulfide should be stored in tight barrels, steel drums, kegs, multiwall sacks, or boxes. If necessary, the containers should be lined with paper to prevent leakage. Antimony sulfide should be stored away from corrosive fumes and kept dry. It is not a fire hazard.

- (3) Boric acid. Boric acid should be stored in a dry place, in wooden barrels, multiwall sacks, kegs, boxes, or burlap bags. It is nonexplosive and not a fire hazard. Containers should be lined to prevent leakage.
- (4) Calcium chloride (anhydrous). Calcium chloride should be stored in sealed steel drums, cans, or jars. Because it absorbs water, it should be kept away from air and moisture.
- (5) Copper oxide. Copper oxide should be stored in wooden barrels, kegs, fiber drums, multiwall sacks, or boxes, and should be kept dry. It is not a fire hazard.
- (6) Dextrin. Dextrin should be stored in wooden barrels, fiber drums, multiwall sacks, kegs, boxes, or bags, and should be kept dry. It is not a fire hazard.
- (7) *Iron (reduced)*. Reduced iron should be stored in sealed cans and bottles and should not be exposed to air and moisture.
- (8) Kaolin. Kaolin should be stored in wooden barrels, kegs, boxes, or bags, and should be kept dry.
- (9) Lime (hydrated). Lime should be stored in tight barrels or multiwall sacks and should be kept dry.
- (10) Potassium iodide. Potassium iodide should be stored in barrels, kegs, bottles, or boxes in a dry area.
- (11) Silica gel. Silica gel should be stored in sealed water and airtight drums, pails, and cans, and should be kept dry. It is not a fire hazard.
- (12) Soda lime. Soda lime should be stored in airtight glass or metal containers and should not be exposed to air or moisture.
- (13) Sodium bichromate. Sodium bichromate should be stored in barrels, kegs, multiwall sacks, or boxes. It is an oxidizing material and should be stored away from acids and combustible materials. Containers should be lined to prevent leakage.
- (14) Sodium bisulfite. Sodium bisulfite should be stored in barrels, drums, kegs, or boxes and should be kept dry. Containers should be lined to prevent leakage.
- (15) Sodium hypochlorite (solid). Sodium hypochlorite is unstable in the air and should be stored in a solution in carboys or bottles and kept in a cool place.
- (16) Sodium hyposulfite. Sodium hyposulfite should be stored in wooden barrels, kegs, metal drums, multiwall sacks, or boxes in a dry area.

Containers should be lined to prevent leakage. It is not a fire hazard.

### 5-621. Musical Instruments

- a. Woodwinds and brass. The following instructions pertain to the storage of woodwinds and brass instruments:
- (1) Instruments should be kept in cases when in storage.
- (2) Each case should contain a 1-ounce block of camphor to reduce humidity, prevent tarnish, and act as a moth repellent for the plush lining of the case.
- (3) Instruments should be inspected, cleaned, and repaired, if necessary, before being placed in storage.
- (4) Woodwinds and brass should never be stored in damp areas or in extreme heat as heat and dampness cause corrosion and tarnish.
- (5) Woodwinds should be oiled twice yearly while in storage; bore oil is preferred.
- (6) A desirable temperature for woodwinds and brass is between 65° and 75° F.
- (7) Small instruments should be packed in containers and palletized.
- (8) Large instruments should be packed in containers and crated with a skeleton frame strong enough to sustain the weight of stacking.
- b. String instruments. The following instructions pertain to the storage of string instruments:
- (1) String instruments should be kept in carrying cases, with a 1-ounce block of camphor to reduce humidity.
- (2) String tension should be released before the instruments are placed in storage. Sound posts must not be allowed to become loose.
- (3) Before being placed in storage, instruments should be cleaned, inspected, and repaired, if necessary.
- (4) A desirable temperature for the storage of string instruments is between 65° and 70° F. Temperature should be kept as constant as possible.
- (5) Open containers of water should be kept near large string instruments, such as the violin, cello, and brass.
- (6) Bass violins and violin cellos should be suspended in an upright position while in storage, with the bottoms of the instruments fastened to prevent swinging and bumping each other.
  - (7) Small string instruments should be packed

in containers and palletized or placed in bins or racks, depending on the quantity to be stored.

- c. Drums. When storing drums the following precautions should be observed:
- (1) Drums should be kept in cases while in storage.
- (2) Tension on drum heads should be released before drums are placed in storage.
- (3) A desirable temperature for the storage of drums is between 65° and 70° F.
- (4) Drums should be packed in containers and palletized.
- d. Pianos. Excessive heat and dampness can damage a piano in a very short time. A temperature variance of 18° F is the maximum permitted in areas where pianos are stored. Pianos can be stored in nonheated warehouses, but should not be placed near an open window or in extremely dry spaces because of the large amount of glue used in the case and action. If a piano is not stored at a constant temperature of 68° F, a small package of unslacked lime should be put inside the case to prevent rusting of the strings. The heat from a lighted 15-watt light bulb attached to the base of a keyboard instrument will act as a dehumidifier. Because of the large amount of felt in a piano, it is recommended that a suitable moth repellent be kept in the case at all times. For long term storage, grand pianos will be stored flat.
- e. Instrument accessories. Generally, accessories are bin storage items. Reeds should not be stored in dry, overheated places that will cause the reeds to split, crack, or lose the vibrating qualities. Also, reeds have a tendency to mold or mildew when exposed to air. Gut should be stored in a refrigerated unit with a quart of water containing 2 teaspoonsful of formaldehyde placed near by.

# 5-622. Strategic and Critical Materials

See Chapter VI.

# 5-623. Brushes; Feather, Wool, Bristle, and Hair

- a. General. The two hazards encountered in the storage of brushes manufactured from keratinous materials such as feathers, wool, bristle, and hair, are—infestation of the brush by various beetles, mold or mildew and rot due to humid atmospheric conditions.
- (1) Beetle infestation. Four types of beetles which cause damage to the keratinous part of the brush are commonly known as the black carpet bee-

tle, the furniture beetle, the varied carpet beetle, and the buffalo or moth beetle. (See figs. 3–10, 3–11 and 3–12, chap. III, sec 4.) There is also the lyctus powder post beetle which attacks all types of hardwoods generally used for handles.

(2) Climatic hazards. During long term storage in humid climates, the keratinous part of the brush

may develop mildew, mold, or rot.

- b. Precautions prior to storage. Usually, Federal specifications require manufacturers to enclose insect repellent with brushes; normally, this is accomplished by placing naphthalene balls in each pack or container. Receipts that have not been afforded the necessary protection will be inspected for infestation, and, subsequently, properly packaged for storage. Particular attention should be given to rollback, salvage, or surplus stock.
- c. Precautions in storage. Brushes made of keratinous materials will always be protected from infestation by including naphthalene flake or balls or paradichlorobenzene flake or powder in each pack. Since these repellents tend to evaporate, care should be taken to replenish as required.
- (1) Bulk lot storage. Bulk lots will be stored in original containers; if material is repackaged locally, a small amount of repellent should be added to each container which should be kept sealed.
- (2) Bin storage. Brushes stored in bin boxes or openings should be kept in the unit pack. When the size of the smallest unit pack precludes shelf or bin storage, bin stocks may be placed in a protective wrap with a small amount of repellent.
- (3) Controlled humidity or temperature. To prevent mildew, mold, or rot, especially in high humidity areas, material should be stored in controlled humidity or temperature storehouses.
- (4) Inspection of material in storage. Sample quantities of stocks should be regularly inspected for signs of insect infestation, mildew, mold, and rot. The frequency and scope of these inspections should be established by the military service/agency concerned and should be predicated on local conditions.
- (5) Housekeeping. Good housekeeping is the best additional preventive measure to be taken against infestation.
- (6) Safety. Contact with insect repellent such as naphthalene and paradichlorobenzene can cause skin irritations. The fumes thereof, in heavy concentrations, are toxic. Personnel concerned will take the necessary precautions such as the use of

goggles, rubber gloves, and half mask respirators. Conditions permitting, storage areas should be well-ventilated.

(7) Damaged stock. Material found to be damaged by infestation, mildew, mold, or rot should be disposed of in accordance with procedures set forth by the service/agency concerned.

### 5-624. Flight Clothing

a. Preparation of clothing for storage.

- (1) Inspection of new material. All containers will be visually inspected for shipping and/or water damage. Damaged containers will be opened and the clothing inspected. All damaged or mildewed clothing will be reconditioned in accordance with applicable instructions.
- (2) Cleaning and reconditioning. All clothing which has been worn will be cleaned and reconditioned by appropriate procedure specified in applicable specifications prior to storage for reissue.
- b. Marking. The garments will be examined to determine that the proper identification markings are not missing and are legible. Where markings are not legible or are missing, markings as required by the applicable specification for the garment will be added. Markings not required by the applicable specification will be removed and obliterated in such a manner as to not adversely affect the garment's appearance.

### c. Storage

- (1) Precautions. Shelves, racks, bins, and all storage aids will be free from protruding nails, sharp slivers of wood, rough edges, burrs, or other defects that might tear or puncture any part of the clothing or which might chafe the surfaces. The storage area will be maintained free of rodents, insects, plant life, or other damaging influences.
- (2) Storage arrangements. Oil, grease and dirt will be removed from rubber surfaces with a solution of vegetable soap and water. Omnienvironment full pressure suits are issued with a carrying case and should be received packed in this original container. The anti-G, antiexposure, and omnienvironment full pressure suits will be stored on hangers with the items hanging free. The antiblackout suit bladder will not be folded. Carrying cases should be stored in an area adjacent to the suits whenever possible. Summer and winter flying suits and other flight clothing will be stored in their original containers, if received. Otherwise these items will be stored in bins, shelves, or on hangers as applicable.

d. Storage conditions.

- (1) Killing larvae. If clothing is suspected of containing moth larvae, the larvae can be killed either by fumigation or reduction of the clothing temperature to 17° F, for a period of 36 hours. Fumigation is considered the more practicable method since it would be necessary to spread out each garment in order to reduce the garment temperature to the required 17° F.
- (2) Storage temperature. All flight clothing should be stored at a temperature not greater than 42° F.
- (3) Storage humidity. All flight clothing should be stored at a relative humidity of between 35 and 50 percent.
- (4) Atmosphere. The storage area will be protected at all times from direct sunlight, and the atmosphere should be free from sulphur dioxide, ammonia fumes, and from ozone produced by electrical equipment.
- (5) Paradichlorobenzene crystals. Paradichlorobenzene crystals will be kept in open containers in the storage room. If these crystals are used for packaging purposes, asphalt laminated paper will not be used inasmuch as the asphalt is soluble in the vapor and will cause bleeding on the articles packed.
- (6) Leather. Leather flight gear will be inspected for mildew and deterioration. It will be treated periodically with suitable leather preservative. Store in cool dry area.

# 5-625. Polyvinyl Chloride (PVC) Plastic Pipe

Although polyvinyl chloride (PVC) plastic pipe will withstand some abusive handling conditions, there are limits. Establishing the limits is a subjective process since the physical properties of PVC compounds cover a rather broad range. In addition, some of the properties are affected by temperature. The following are basic precautions and care guidances for handling and storing this commodity.

a. Loading PVC Pipe

- (1) Care should be used when loading and unloading PVC pipe with mechanical equipment such as forklifts. Dragging or jamming by said equipment can and will damage the pipe.
- (2) Bundles of pipe should be loaded in such a manner as to prevent unnecessary loads on the lower bundles.
- (3) When nesting PVC pipe, chicken wire, plywood or other suitable material should be used to

keep the pipe within the pipe from sliding out during shipping. It is recommended that heavy wall pipe not be nested in thin wall pipe. Pipe should be free of dirt or caked mud since this can cause excessive scratching and abrading as the pipe is nested or denested.

- (4) Straps or ropes should be used to tie loads down. Chains and binders that could gouge the pipe should be avoided. If chains and binder cable are used, adequate protection should be used where possible damage may occur, e.g. on edges, etc.
- (5) Large diameter pipe should be loaded on top. This will allow tighter cinching of pipe, keep the pipe from crushing and prevent bundles from shifting. When the lengths vary, the shorter lengths should be on top.
- (6) To prevent shifting that may occur during shipping, interbanding of the bundles in the load is recommended. This requires banding the top half of the load and the bottom half of the load into two modules then banding the top and bottom modules together. Alternately, separate bundles may be laid side by side and then secured to the bed by straps.
- (7) Pipe lengths should not overhang the truck bed more than two feet.
- (8) Extra care should be used in handling PVC pipe as the temperature drops below freezing since flexibility and impact resistance decrease with lower temperatures. Also moisture that accumulates on the pipe freezes, creating a slippery surface and enhancing the chances of the pipe sliding off fork lifts or shifting on the truck. (Refer to para g(6)).
- (9) Pipe may be distorted if stacked too high or heavily loaded when temperatures exceed 100° F.
- (10) Adequate protection should be provided so that PVC pipe will not be exposed to engine exhaust.
  - b. Receiving and Handling PVC Pipe
- (1) Inspection. Each pipe shipment should be carefully inspected on its arrival. Pipe should be examined for cuts, scratches, gouges, holes and other imperfections before use. Any imperfections in the pipe that will adversely affect serviceability should be cause for rejection.
  - (2) Unloading Precautions.
- (a) The same precautions observed when loading pipe should also be observed while unloading.
- (b) PVC pipe may be unloaded from trucks by sliding over other plastic pipes, but care should

be taken not to slide the pipe over rough or abrasive surfaces.

- (c) PVC pipe should not be dropped or thrown off a truck nor should the ends of the pipe be allowed to dig into the ground after sliding off a truck.
  - c. Storage.
- (1) Pipe stored outside for long periods of time should be covered to protect it from prolonged exposure to direct or reflected sunlight. The cover may be canvas or an opaque material as long as adequate air circulation is provided under the cover to avoid overheating.
- (2) Pipe stored on uneven surfaces may, in time assume the contour of this uneven surface. This is accelerated by the weight of the stack and/or by temperature above 100° F.
- (3) PVC pipe at the bottom of a stack may become out-of-round due to the weight of the material above. At moderate temperatures this corrects itself soon after the load is removed while at low temperatures several hours may be required for recovery. Caution: Long times or heavy loads may cause permanent out-of-roundness.
- (4) Bundles of PVC pipe should have the belled ends or couplings alternated at each end of the bundle and extended beyond the other pipe ends. Alternately, bundles may be constructed in any manner that does not stress the bells and couplings.
- (5) Store single lengths of PVC pipe on a flat surface so as to support the barrel evenly. If the

pipe is to be placed in racks, support the pipe at least every three feet. Contact areas should be padded to prevent abrasive damage.

(6) Keep PVC pipe away from hot objects, pipelines, heaters, etc.

- d. Loading Transfer Trucks.
- (1) Use trucks with long bodies making certain the truck bed is smooth, without cross-strips, bolt heads, or other protrusions that could cause damage.
- (2) The first layer should allow couplings and belled ends to overhang the bed with each successive layer overhanging the layer below. Alternately, bundles may be constructed in any manner that does not stress the bells and couplings.
- (3) Short body trucks may be used if fitted with racks that properly support the pipe in a horizontal position.

### 5-626. Radioactive Material

Many commodities employed by the Federal services incorporate a radioisotope (ionizing radiation) as a functional component. Since ionizing radiation presents a significant potential hazard, rigid controls are imposed on handling and storage of radioactive material by Title 10, Code of Federal Regulations. These controls are stated in a general way in DLAM 4145.8/AR 700–64/NAVSUPINST 4000.34/AFM 67–8/MCO P4400.105A Radioactive Commodities in the DOD Supply System and in OSHA 1910.96.

# Section 7. PACKAGED PETROLEUM PRODUCTS

		Paragraph
General		5-701
Use of drums		5-702
Location		204 800 7 13 19
Standards for storage of 55-gallon drum	mod notroloum musdants	5–703
Standards for storage of 5 11 11'	med petroleum products	5-704
Standards for storage of 5-gallon militar	y gasoline containers (Blitz)	5-705
Standards for storage of packaged fuels,	, lubricants and greases	5-706
Storage of empty containers		5-707
Handling procedure		5_708
Quality surveillance		5-709
Inspection		5-709
Safety measures		5-710
Datety measures		5-711

### 5-701. General

- a. The storage of packaged petroleum fuels and lubricants (not including special fuel combinations or guided missile propellants unless specifically classified in this category) in standard containers involves nearly all the fire hazards encountered in
- the final use. In recognition of these inherent hazards, minimum safeguards must be established to avoid serious fires.
- b. The procedures and instructions for the storage of packaged petroleum products are contained in MIL HDBK-201, Petroleum Operations.

MESSAGE

RECEIVED BY DATE TIME
63-110 NSN 7540-00-634-4018 STANDARD FORM 63 (Rev. 8-81)



- c. Special markings of packaged petroleum products are conatined in MIL STD-290, Packaging, Packing, and Marking of Petroleum and Related Products.
- d. Application of the appropriate storage principles set forth herein is a responsibility of the installation commander. It is recognized that under certain local conditions strict adherence to the prescribed storage practices will not be practicable. The following factors will be evaluated by the installation commander in consultation with petroleum, safety and fire prevention specialists before deviation from the prescribed practices is authorized:
  - (1) Type of product stored.
  - (2) Cost.
  - (3) Type and condition of drums.
- (4) Availability of storage space and handling equipment.
  - (5) Terrain features.
  - (6) Climate.
- (7) Proximity and type of structures, source of ignition.
  - (8) Other pertinent information.

### 5-702. Use of Drums

- a. As a general policy, storage of filled drums should be held to the absolute minimum needed to meet ordinary requirements. When bulk facilities are available, it is safer and more economical to store empty drums (see para 5–707), provide adequate drum-filling equipment, and store only enough filled drums to meet immediate requirements while the filling plant is in process of reaching full capacity, then to store large quantities of filled drums. Quality surveillance of product is more easily maintained in bulk quantities.
- b. The practices covered below apply to large amounts of drummed products stored outside buildings, not to the storage of station supplies presently accommodated in standard flammable storage warehouses with the proper installed fire protection equipment.

### 5-703. Location

A level site should be selected that is not in or adjacent to a congested area, with the contour of terrain being such that an immediate runoff of surface water is possible through a system of open ditches. DRAINAGE INTO ANY SEWER SYSTEM IS PROHIBITED. An area with a cinder

base, marsh, or wasteland overlaid with peat and usually more or less wet will not be used when other terrain is available. Consideration will also be given to direction of flow with the main outlets so located that flow is away from a congested area and toward a harmless area where fire extinguishing agents can be applied en route or at destination. An adequate supply of water for fire fighting purposes should be taken into consideration in the selection of this site. The drum storage area should be located or arranged so that escaping flammable vapors normally flow away from operational areas and sources of ignition. Depressed areas should be avoided because hazardous vapors tend to remain in them. Gasoline vapors are heavier-than-air, and tend to lie in a stratum less than 4 feet above grade and flow toward lower ground much as liquid flows to a lower level.

### 5-704. Standards for Storage of 55-Gallon Drummed Petroleum Products

- a. General. The fire hazard involved in the storage of petroleum products is dependent, to a great degree, upon the flash point (see para 5-404 and chap. 2, MIL HDBK-201) of the product and to the gross amount stored.
- b. Covered Storage. Covered storage will be as outlined in chapter II of this regulation.
  - c. Outdoor Storage.
    - (1) Stacking.
- (a) The drums will be placed horizonatally (on sides) in double rows, but to butt, with closures (bungs and vents) facing outward. Drum closures should be placed at the 3 and 9 o'clock positions to ensure product inside drum will keep gaskets from drying out. If stored on ends, the drums collect rain water, which rusts the tops of the containers and may seep through and contaminate contents. Corrosion and oxidation are also greatly diminished by laying drums on their sides. The closures are turned outward to facilitate the detection of leaks and prevent a leaky drum being shipped.
- (b) Spacing of rows is necessary to permit efficient operation of drum handling attachments, or inspection of drums such as butts and chimes. Spacing will conform to table 3 of chapter V section 4. Areas of high humidity and salty atmosphere accelerate corrosion, and drums stored in such areas will require more frequent inspection than low humidity areas.
  - (c) For low flash products the rows of drums

will not be more than 35 drums long. The drums of each superimposed tier of drums will be nested between drums of the supporting tier. The second tier will contain 34 drums and the third tier 33 drums; thus, the double row, or unit, will contain a total of 204 drums.

- (d) For high flash products the quantity of drums in a major storage division can be doubled either by increasing the number of sections or the height of the stack to six.
- (e) To ensure drums against damage from rolling, cross blocking every fifth drum will be required and, in addition, the ends of the bottom tiers will be braced.
- (f) The bottom tier of drums will be placed on not less than 2 by 6 inches of lumber or other comparable dunnage running parallel to the length of the rows.
- (2) Palletized stacking. Occasionally drums may be placed on special drum pallets, which allow four 55-gallon drums to be placed on their sides on each pallet. Pallets will be constructed to prevent drums from rolling. Stack pallets one over the other with drum closures toward aisles. No end braces are necessary for palletized stacks.
- (3) Aisles. Aisles should be provided so that no container is more than 12 feet from an aisle. Main aisles shall be at least 8 feet wide and side aisles at least 4 feet wide (OSHA 1910.106).
- (4) *Physical layout*. The physical layout of the storage area within the limitations specified in this section will be as prescribed by chapter III, section 3, this regulation.
  - (5) Dikes (berms).
- (a) A recommended procedure for a major storage area containing products with a flash point of 80° F or below is to surround such an area by a dike at least 18 inches high, assuming the terrain to be practically level. This will prevent burning liquids from flowing to adjacent divisions, buildings, storage areas, or waterways. In any case, the dikes should be sufficient to retain all of the liquid contents of drums stored in the division and provide for a free board of not less than 6 inches.
- (b) Access roads will be provided with ramps or graded to allow entrance of materials handling equipment into the diked area.
- (c) Drainage will be accomplished by use of clay or metal pipe of sufficient size placed through the dike at the lowest point to ensure an immediate runoff of surface water. The aperture will remain

closed except when it is necessary to remove surface water.

# 5-705. Standards for Storage of 5-Gallon Military Gasoline Containers (Blitz)

- a. General. Observe the following precautions when storing filled containers:
- (1) Inspect all containers for leakage. If a container shows evidence of leaking, transfer contents to another suitable container, taking all precautions to prevent contamination during transfer.
- (2) Make sure all containers are properly marked before stacking. Check date of filling and store products so that the oldest product can be issued first.
- (3) Visually inspect closures for leakage. Tighten, if necessary.
  - b. Stacking.
- (1) Pyramidal stacking. To conserve space and to provide stability of stacks, filled 5-gallon gasoline cans should be stacked in pyramids, unless cans are palletized. (See (2) below for method of stacking palletized cans.) To stack cans in pyramids, proceed as follows:
  - (a) Lay out a 50-foot square.
- (b) Build a partial flooring for first tier of cans by laying out rows of 2- by 6-inch lumber or other comparable dunnage and tying in with wooden strips or boards. No dunnage is necessary between tiers.
- (c) Beginning at one corner of the square, place six cans side by side along one side of the square. Place cans 6 inches from edge of dunnage and allow 1/4-inch expansion space between the cans.
- (d) Place a row of six cans side by side, with backs facing aisle, along adjacent side of square to form an L.
  - (e) Place three rows of can within the L.
- (f) Place a second tier of cans on top of the first. Indent the second tier on both sides approximately 3 1/3 inches so that each can in the tier rests on three or four cans.
- (g) Place a third and fourth tier on the stack, indent each tier as described in (f) above. Do not stack cans more than four tiers high.
- (h) Continue building the pyramid outward until the entire 50-foot square is completed. Turn cans at the end of each row so that backs of all outside cans in a pyramid face aisle. The first tier should contain 3,528 cans, the second tier 3,403

DOD 4145.19-R-1



cans, the third tier 3,280 cans, and the fourth tier 3,159 cans, totaling 13,370 cans in the section.

(2) Vertical stacking. Filled 5-gallon cans may be stacked vertically when cans are palletized and forklift trucks or cranes are used. To stack palletized cans vertically, proceed as follows:

(a) Lay out 50-foot-square sections; if necessary, adjust size of section to accommodate a definite number of pallets. It is not necessary to construct a floor for the containers; however, a suitable foundation material should be used.

(b) Place cans upright on pallet and group them close together allowing an even border around pallet. Terrain and equipment limitations must govern the number of tiers of cans on pallets. Size of the pallet will determine the number of cans to be included in the tiers.

(c) Start at one corner of the section and place several pallets of containers along adjacent sides of the section. Pallets should be as close together as possible.

(d) Place additional pallets of containers directly over the first tier until the desired number of tiers is reached. Palletized cans may be stacked higher than single cans, but available handling equipment and stability of stacks must determine the number of tiers.

(e) Continue building stacks until the section is completed. Each stack must be completed to the desired height before the next stack is begun to avoid obstructing the range of the truck or crane.

### 5-706. Standards for Storage of Packaged Fuels, Lubricants and Greases

a. Covered storage.

(1) General. All packaged lubricants and greases should be under covered storage, wherever possible. See section 1, chapter II, this regulation, regarding types of facilities and section 6, chapter V for details in storage of lubricating oils, greases, and paints. Packaging fuels, paint thinner and other low flash products may be stored in buildings provided adequate dispersion and ventilation are obtained and the buildings which are used meet the requirements of the current edition of Flammable Liquids Code No. 30 published by National Fire Protection Association, 470 Atlantic Avenue, Boston, MA 02110.

(2) Stacking containers. Layout of sections and stacking height depend upon warehouse design, available storage space, load capacity of floor, and available materials handling equipment. The primary objective in the arrangement of containers is to store the maximum quantity of products in a limited space while maintaining fire control and providing ease and safety in handling the containers.

(3) Safety precautions.

(a) Uncased containers' exteriors will be free of grease and oil before being placed in storage.

(b) Follow inspection procedures described in c(1) below.

(c) Additional safety information is to be found in chapter VI.

b. Outdoor storage.

(1) General. Although packaged lubricating oils and greases are normally stored under cover, they may be stored outdoors when storage buildings are unavailable and containers are protected from water and heat of sun by fire retardant tarpaulins. The stacking area should be laid out to provide for segregation of products into sections. The lubricants may be stacked on pallets or adequate dunnage.

(2) *Precautions*. Observe precautions described in paragraph 5–705.

(3) Methods of stacking. Place necessary dunnage between ground and first tier, and stack containers as follows:

(a) Stack uncovered cylindrical 5-gallon oil cans in an inverted position, with closures on the bottom. Cans may be stacked vertically or in pyramids (para 5-705).

 $\rightarrow$  (b) Stack 55-gallon drums as described in paragarph 5–704.

(c) Stack all containers other than 55-gallon drums upright.

(d) When containers are packed in cases, stack cases on pallets or adequate dunnage.

c. Inspection.

(1) Inspect stacks periodically for evidence of leakage, abnormal swelling or corrosion of containers, and for stability of stacks. If leakage is apparent, locate leaking containers and remove from the stack immediately. See that all containers requiring shelter are properly covered with fire retardant tarpaulins or other suitable materials and adequate ventilation provided.

(2) Examine markings frequently to see that they are legible. If illegible and it is economically feasible to identify the contents of the container, obliterated markings should be restored.

# 5-707. Storage of Empty Containers

a. General. Empty containers may be stored in open storage. These containers will be protected from mechanical damage and from contamination of interiors by dirt, water, and other extraneous matter. Tightly closed containers will retard interior corrosion to a great degree. New or reconditioned containers received for storage will have no product markings thereon. These containers require inspection periodically to ensure their usability at all times. Containers evidencing interior or exterior corrosion should be removed for reclamation. Empty containers previously containing products should be treated as explosion hazards and handled accordingly piror to reconditioning. Closures should be tightly closed as an open bung or vent emits hazardous vapors for some time after removal of product. Uneconomically reparable containers will be salvaged.

b. Stacking empty 55-gallon drums. Normally, empty drums will be stacked in the same manner as filled drums or by the method prescribed by each military service.

c. Stacking empty 5-gallon cans. Empty 5-gallon gasoline cans may be stacked by either method described in paragraph 5-705 without regard to height. Occasionally, empty 5-gallon gasoline cans are strapped side by side in groups of five. Those groups may be placed on pallets with cans resting on their bases or their sides. Cans strapped into groups may be stacked vertically without the use of pallets; but dunnage must always be used between the bottom tier and the ground, and containers should not be stacked so high as containers stacked by other methods, unless shoring is placed at ends of each row to prevent stacks from slipping. Filler plugs must be tightened before cans are stacked.

### 5-708. Handling Procedure.

a. General. Personnel charged with the responsibility of loading, unloading, and storage of filled containers will instruct workmen as to the proper method of handling. Tearing down a pile by pushing, pulling, manually or by the use of powered ground equipment or dropping a container from either a pile or load will not be permitted. When skids are used to ease or expedite unloading, the container will be slid down with the plain end first. Care should be exercised to see that a container is

not allowed to strike against another because of possible damage and the creation of a percussion spark which might result in an immediate fire.

- b. Handling equipment. When storing petroleum products, the types and quantities of handling equipment is determined by the quantity of product stored, location and arrangement of storage areas, and the height to which drums may be stacked. Typical equipment used in storing petroleum drums include—
- (1) Forklift trucks (see OSHA CFR 29 1910.178(b)).
  - (2) Skids.
  - (3) Cranes.
  - (4) A-frames.
  - (5) Conveyors.
  - (6) Empty drum track.

c. Drums handling attachments, forklift truck.

(1) Standard types of attachments. The standard types of attachments used with forklift trucks for the handling and storing of commodities in 55-gallon drums are shown in section 2, chapter IV.

- (2) Construction of attachments. The drum handling attachments for use with forklift trucks will be constructed in accordance with current Military Specification MIL-D-11303. The attachments, when constructed to this specification, will incorporate the basic operating and safety features necessary for efficient handling of drummed liquids or semiliquids in 55-gallon drums by supply facilities.
- (3) Utilization. The drum handling attachment is used for placing 55-gallon drums into or removing from storage. The drums will be picked up from the horizontal position (drums placed on sides). The drums are transported to and from shipping or hauling vehicles by the forklift truck in combination with the attachments when the distances are approximately 400 feet; or are placed on large warehouse trailers for transporting between carriers and storage location when distances are greater than 400 feet.

## 5-709. Quality Surveillance

a. Quality surveillance as used herein is the aggregate of measures to be applied to maintain the quality of petroleum products in order that these products may be in a condition suitable for immediate use. The petroleum industry and the military procurement activities make every effort to provide clean and on-specification products. A vigilant qual-

ity surveillance program is necessary to ensure the supply of clean and on-specification products to the using field units. Good housekeeping practices will ensure order and cleanliness, as well as promote safety.

b. Many things can happen to petroleum products to affect their quality and performance value after delivery and during their handling, storage, and dispensing in the depot. For example, careless handling, contamination, exposure to abnormal temperatures, confusion of markings or inefficient control of stock can cause leakage and spoilage, resulting in damage to, and excessive maintenance of equipment.

c. Water is a common source of contamination which can render petroleum products useless for service. Many petroleum products contain various types of additives and the seepage of water into the containers may remove these additives or cause emulsions. The use of such products may result in damage to equipment. Water contamination may result from rough handling, or from improper application of plugs and gaskets, which permits breathing and subsequent condensation of water vapor. Storage of drums on their sides with proper blocking and shoring will avoid the trapping of water on the heads within the chimes.

d. Packaged products opened for "spot" checking or quality surveillance tests should be consumed as soon as possible. When this cannot be done, the container should be reclosed tightly and marked as having been previously opened.

e. Inefficient supply control of products in a depot can result in spoilage and loss. The practice of "first in—first out" will reduce spoilage caused by long storage. Check date of filling and store products so that the oldest is issued first.

# 5-710. Inspection

All filled drums will be carefully inspected for condition and proper marking before being put in the storage area. During initial storage of filled drums, semiweekly inspection for leakers will be made of stored drums. After group storage has been completed, periodic inspection should be adequate under normal conditions. If a drum leaks at the closure, it should be tightened, and the gasket replaced if necessary. Drums which show signs of leakage or excessive corrosion or appear otherwise unfit for storage will be removed immediately from

the area and the contents transferred to satisfactory containers.

## 5-711. Safety Measures

- a. General. Instructions relative to safety measures and fire protection are covered in chapter VI.
- b. Cause of petroleum fires. Fires in packaged petroleum storage areas may be caused by the following:
- (1) Sparks and open flames can produce explosions and subsequent fires in flammable vapors.
- (2) Static electricity can be generated by the passage of fluid through a hose, by agitation of a fluid in a container, by the movement of a truck over the highway and by other means. In the presence of readily falmmable vapors, such an electrical charge constitutes a definite hazard.
- (3) Lightning discharge frequently causes petroleum fires.
- (4) Leaks not only waste product but also constitute fire hazards.
- (5) Smoking is a common hazard and will not be tolerated in petroleum storage areas.
  - c. Fire plan.
- (1) Every petroleum storage area will have a definite fire plan, with regulations on fire prevention and instructions on fire fighting.
- (2) All personnel handling petroleum will be made conscious of the constant danger from fires and of the precautions required.
- (3) Proper equipment for fighting fires must be provided in accordance with section II, chapter 7, MIL-HDBK-201.
- (4) Clearance. The distance from filled drum storage to structures, drum filling plants, operational buildings, and sources of ignition must not be less than 500 feet for low flash products and 200 feet for high flash products. Storage areas for drummed petroleum products must be far enough away from overhead electric lines so that no part of a broken wire can fall upon the drums.
- (5) Arrestors. Flame and spark arrestors must be provided for all equipment within and adjacent to drum storage areas containing filled drums.
- (6) Electrical equipment. All electrical equipment and installations in drum storage areas containing petroleum products and within 10 feet of grade must be in accordance with requirements outlined in the current edition of the National Fire Protection Association Codes, volume 5, class 1, division 2, National Electric Code.

- (7) Vegetation. Vegetation must be eliminated in outside drum storage areas, and must be kept short on dikes (berms) by frequent cutting. All cuttings or dry vegetation must be removed immediately. A strip 50 feet wide around the outside of the storage area must be free of vegetation and combustible material.
- (8) *Drainage*. The drainage system for removing surface water from the storage area must be provided with a means of retaining and removing any petroleum product that may leak into the area.
- (9) Access roads. All-weather access roads should be provided either outside or on the dike,

to include the drummed storage groups. Access roads will be provided with ramps or graded to allow entrance of materials handling equipment into the diked areas.

(10) Portable explosion proof extension lights. The portable explosion proof extension light, constructed in accordance with Military Sepcification MIL—L—83762 (USAF), will be utilized in the inspection of interiors of empty or partially filled drums or any drums, cans, fuel cells, and other containers having contained or containing liquids or semiliquids which could result in the presence of explosive vapors therein.

### Section 8. METAL PRODUCTS

1. [10] [10] [10] [10] [10] [10] [10] [10]	Paragraph
General	5-801
Item identification	5-802
Storage space	5-803
Storage aids	5-804
Handling equipment	5-805
Handling methods	5-806
Safety	5-807
Preservation	

### 5-801. General

The importance of metal to the Department of Defense requires that storage and materials handling methods used will result in metal products being maintained in a ready-for-issue condition at all times. This section establishes standard methods for the storage and handling of metal products such as pipe, bars, steel beams, strip and sheet metal and armor plate. In establishing these methods, it is realized that in some instances, circumstances will determine the method used. The methods and practices outlined herein provide effective means of storing large quantities of metal in a safe accessible manner, permit maximum utilization of storage space with a minimum expediture of manpower, but do not preclude variances and/or substitutions peculiar to a specific problem area or condition.

### 5-802. Item identification

Identification of metal products in accordance with current directives of the military services concerned must be maintained to facilitate receipts, issues and inventory. Proper identification is necessary to minimize losses or the expense incurred when physical and chemical analysis is necessary for re-identification when identity of the metal has

been lost. It is also essential for the effective utilization of metal products.

# 5-803. Storage Space

- a. Warehouse space. Installations having warehouses equipped with overhead bridge cranes should utilize such facilities for the loading, unloading, and handling of heavy or large quantities of metal products. In the absence of such warehouses conventional warehouses and standard forklift equipment should be used for the storage of metal products. Appropriate metal storage racks should be utilized to the maximum extent practicable in order to make full use of cubic storage space.
- b. Shed space. Shed storage of metal products will provide protection against rain, snow, and sun. However, this type of metal storage is generally limited to the storage of lightweight products such as pipe, tubing, and angles that can be normally handled by hand. Use of pigeonhole type racks and/or horizontal dunnage in these sheds permits maximum utilization of cubic storage while maintaining accessibility.
- c. Open space. Open area surfaces utilized for the storage of metal products will have sufficient bearing strength to support the materials to be stored at the height desired. Advance planning is a prime

requisite for effective utilization of open storage space for metal products.

### 5-804. Storage Aids

- a. Dunnage. Dunnage is particularly important for the storage of metal products. Dunnage provides clearance for forks of the fork truck and allows crane hooks or slings to be placed underneath a load. Additionally, dunnage is used to stabilize stacks and keep the metal off the floor or ground or separated from other contaminating materials or objects. The storage of heavy metal products on inadequate dunnage could result in stacks collapsing when ground softens due to thawing, or errosion. Also stacks may collapse on surfaces such as asphalt when the surface softens due to hot weather. Wooden, masonry, or concrete dunnage, as appropriate, should be used as beaming surfaces or for pile stabilization.
- b. Pallets. Pallets are utilized for the storage of small metal products such as welding rods, tin, and lead solder.
  - c. Storage racks for metal products.
- (1) The following types of racks are utilized for the storage of bar, pipe, tubing, angles, and other elongated types of metal products:
  - (a) Fixed pigeonhole type (fig. 5-57).
- (b) Nesting type with automatic grab hook attachment (fig. 5-58).
  - (c) Tree frame racks (fig. 5-59).
- (d) Lightweight sheet or strip racks (fig. 5-60).
- (e) Concrete forms, timber foundations with special fittings, and uprights imbedded in concrete (fig. 5–61).
- (2) Selection of the appropriate rack depends upon the quantity, weight, and issue requirements of the items to be stored.

# 5-805. Handling Equipment

- a. Selection of the proper equipment depends upon the size, quantity and weight of the material, type of storage, and the distance material must be transported.
- b. Examples of handling devices, gear and equipment used for the effective handling of metal products are as follows:
- (1) Swivel bolsters mounted on warehouse trailers and trailers hooked in tandem.
- (2) Tree frame racks mounted on warehouse trailers (fig. 5-62).

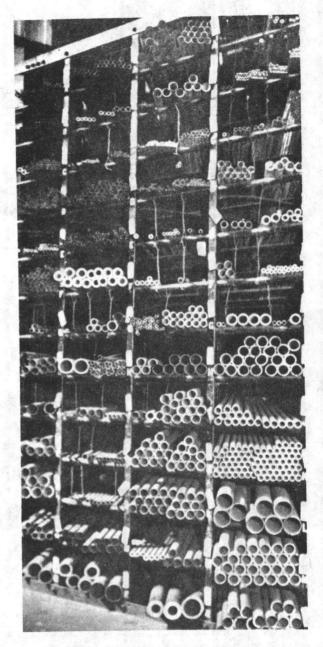


Figure 5-57. Pigeonhole type metal storage racks.

- (3) Dollies equipped with cradles or frames (fig. 5–63).
- (4) Automatic grab hooks and spreader beams (fig. 5-64).
- (5) Overhead bridge cranes, warehouses cranes and forklift trucks (used in covered storage areas).
- (6) Locomotive, mobile, gantry and warehouse cranes or forklift trucks (used in open storage areas).

DOD 4145.19-R-1

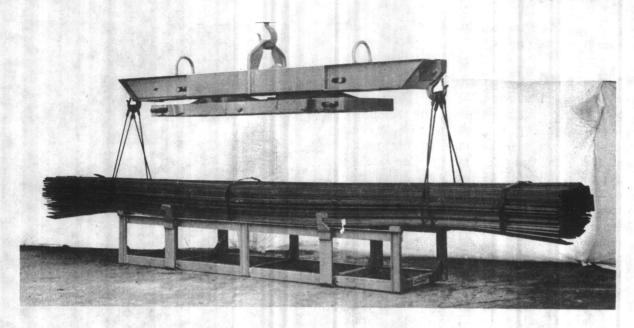


Figure 5-58. Nesting type rack with automatic grab hook attachment.

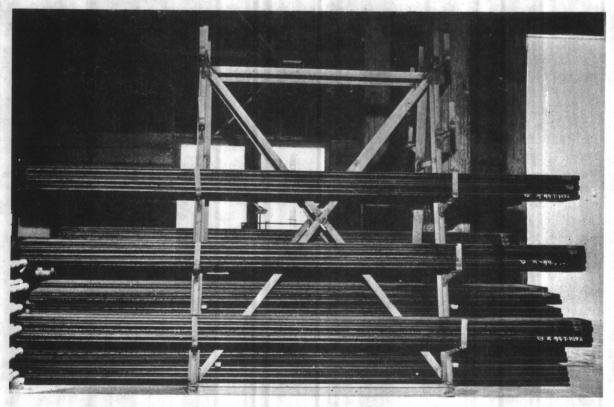


Figure 5-59. Tree frame rack.

15 September 1979 DOD 4145.19-R-1



Figure 5-60. Lightweight sheet or strip racks.

DOD 4145.19-R-1



Figure 5-61. Storage of heavy plate and structural shapes.

15 September 1979 DOD 4145.19-R-1

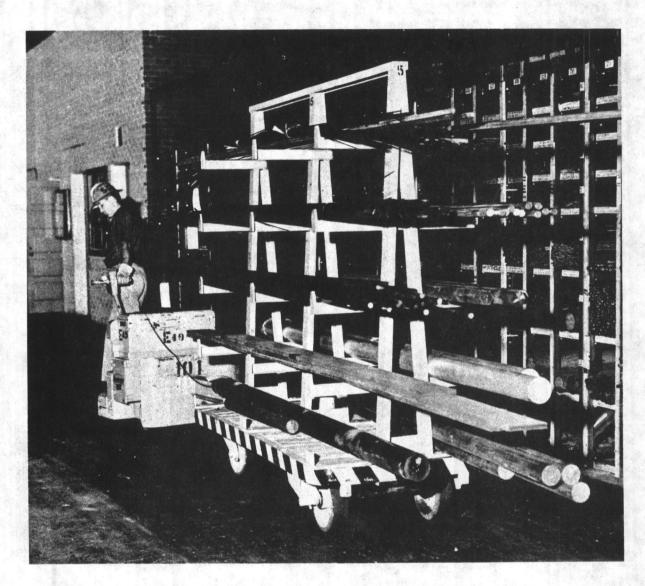


Figure 5-62. Tree frame racks mounted on warehouse trailer.

DOD 4145.19-R-1 15 September 1979

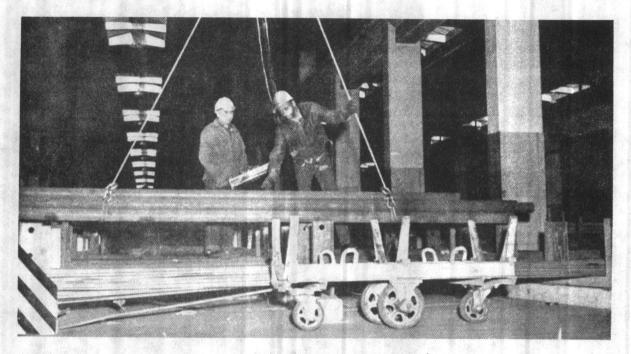


Figure 5-63. Dolly equipped with cradle.

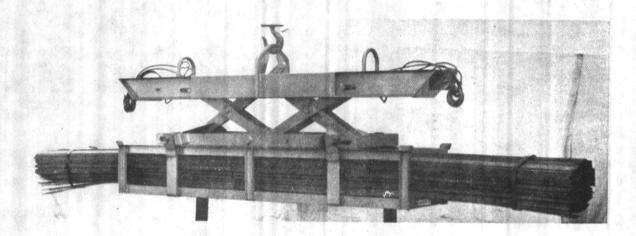


Figure 5-64. Automatic grab hook and spreader beam.

15 September 1979 DOD 4145.19-R-1

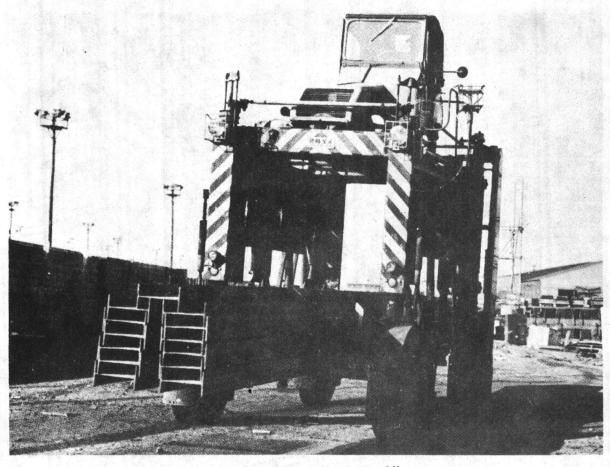


Figure 5-65. Truck, straddle carry.

- (7) Truck, straddle carry used in conjunction with platforms or racks (fig. 5-65).
- (8) Tractor trailer trains, rail cars, trucks and trailers.
- (9) Hooks, shackles, slings, clamps, plate grabs and tongs.

### 5-806. Handling Methods

The methods outlined and illustrated herein are representative of several types currently approved for use by the military services. However, this does not preclude the continuous use or adoption of new storage and handling methods that will produce equal or better results in a more economical or feasible manner.

- a. Bar stock, angles, pipe, tubing, and other similar types of elongated metal products.
- (1) Replenishments and issues in and out of pigeonhole type racks are usually hand operations; however, dollies equipped with cradles or frames may be used as a handling aid in servicing this type

rack. Also cranes may be used for the movement of heavy items on top of the racks. When sufficient room is not available on top of the racks, or when the use of cranes is not practical, the heavier items should be stored in the extreme lower openings of the racks to facilitate handling (fig. 5–66). Generally, movement of this type of material, other than in and out of racks, is accomplished by crane, side carrying fork truck, truck, straddle carrying, swivel bolsters mounted on warehouse trailers and trailers hooked in tandem, tree frame racks mounted on warehouse trailers, dollies with cradles or frames, or any other combination of such equipment as appropriate.


(2) The use of nesting type metal storage racks equipped for use with the automatic grab hook and spreader bar is limited to areas where equipment such as overhead or mobile cranes can be utilized (figs. 5–67, 5–68 and 5–69). Materials may be loaded or unloaded directly from the racks, open rail cars, or trucks. Each rack is a separate unit that will nest



Figure 5-66. Storage of materials in pigeonhole type racks.

securely and safely on top of the rack beneath. Care should be exercised when loading the nesting type racks to ensure that the material is "weight centered" lengthwise in the racks. This will improve the safety factor and reduce the swaying of the load when hoisted.

(3) Heavy items and large quantities of bar, pipe, and tubing stock may be stored in warehouses, sheds, or open areas. Materials received in bundles, crates, or other type unit loads will be stored in the unit as received, whenever practical. Dunnage should be placed between each layer of material when stacked and, where necessary, binding cleats or stops will be secured at each end of the dunnage to prevent shifting or rolling of materials (figs. 5–70, 5–71, and 5–72). Stacking height will be governed by safety factors, floor load limits, and types of handling equipment utilized. Handling materials in this type of storage may be accomplished by fork trucks or cranes with appropriate accessory devices, such as bridles, straps, clamps, or hooks.

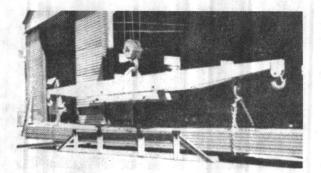

15 September 1979

Figure 5-67. Combination of crane, automatic grab hook, spreader bar, and nesting rack.

- b. Quantities of small metal products which are issued often, such as drill rod, welding rod, and shim metal, should be stored in pallet racks or bins (fig. 5–73).
- c. Strip and sheet metal products should be provided covered storage space when possible. Retail issue quantities are stored in special types of storage racks designed to meet local requirements (fig. 5–60). Handling of these in and out of the racks is normally a hand operation. Appropriate materials handling/transporting equipment is used for other movement. Unit loads (strapped bundles or crates) are block stored on appropriate dunnage to facilitate handling. When covered storage is not available, open storage may be utilized if adequate protection for deterioration is provided (fig. 5–74).
- d. Heavy plate and other heavy metal sheets may be stored in covered or open storage depending on space availability and handling facilities. Usually, these items are stored between uprights imbedded in concrete stringer type footings (fig. 5–61). When storage of heavy plate or sheets is utilized, horizontal dunnage will be placed between each layer of material to facilitate handling and to assure a level stack (fig. 5–75). Handling is accomplished by crane with appropriate handling gear such as clamps, slings, and straps.
- e. Special metal shapes and structural steel, such as angles, beams, and channels, may be stored in the same manner as metal bars, pipe, or tubing.

DOD 4145.19-R-1

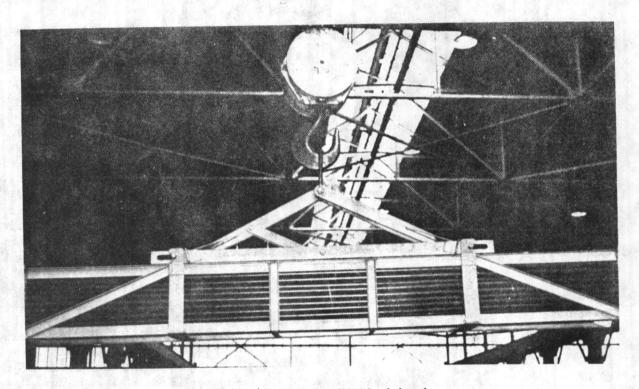


Figure 5-68. Crane handling loaded rack.



Figure 5-69. Crane positioning rack into storage.

15 September 1979 DOD 4145.19-R-1



Figure 5-70. Fork truck operation in open storage.


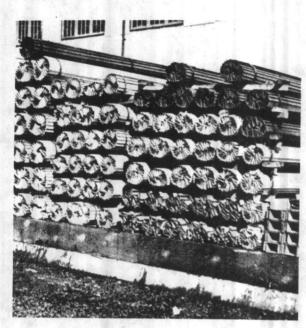


Figure 5-71. Open storage area.

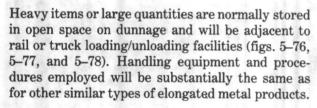

### 5-807. Safety

Due to the weight, size, shape, handling and transportation requirements peculiar to metal products, safety must be given prime consideration. Appropriate safety precautions of chapter VI, this regulation, and of the military service concerned will be carried out with emphasis on the following:

- a. Authorized safety toe footwear will be worn by personnel.
- b. Metal studded leather palm gloves should be worn when handling metal as a protection against cuts from sharp edges.
- c. Standard hand signals will be used when directing lifting, lowering or movement of materials. Such signals will be given by only one person in an area regardless of the number of personnel engaged in the operation.
- d. Supervisors should assure that all personnel engaged in physical lifting have been instructed in the proper techniques.

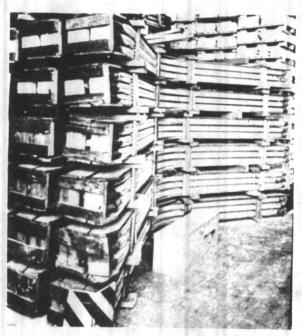


Figure 5-72. Storage of odd shapes.

- e. Precautions should be taken to prevent overloading of handling equipment.
- f. Special materials handling equipment attachments will not be used without prior approval of the military service concerned.
- g. Rail cars, trailers, and trucks will be properly braked and blocked to prevent movement during loading and unloading operations.
  - h. Floor load limitations must not be exceeded.

### 5-808. Preservation

Preservation of metal products will be conducted in accordance with current directions of the respective military service. In the absence of specific instructions, MIL-STD-163 establishes the basic requirement for the preservation of steel products. MIL-HDBK-721, Corrosion and Corrosion Protection of Metals, provides useful data for prevention of corrosion. Condensation of atmospheric moisture on metal surfaces is a common cause of corrosion. It is not necessary for bare metal surfaces to be exposed for corrosion reaction to take place. Nonwaterproof coatings, wrappings, and such can absorb sufficient moisture to support a corrosive

15 September 1979 DOD 4145.19-R-1

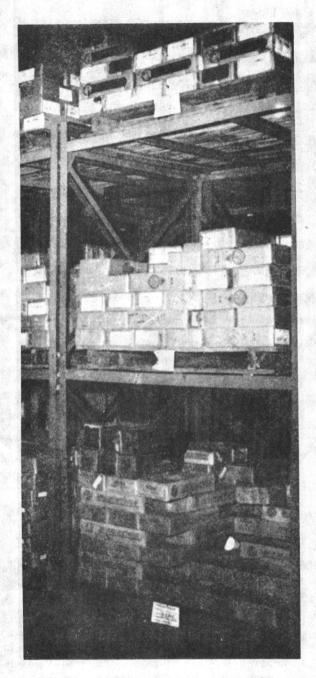


Figure 5-73. Storage in pallet racks.

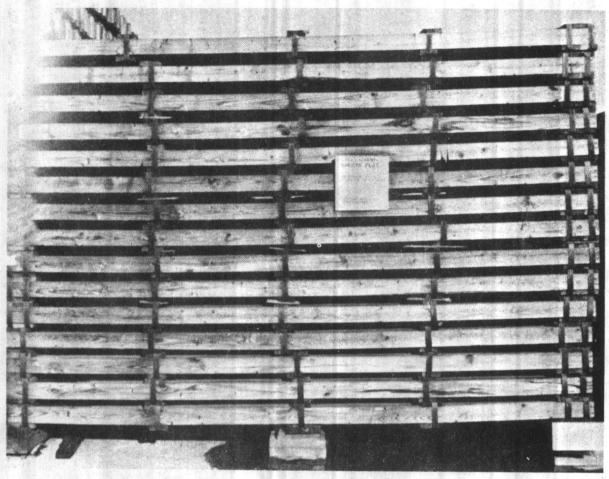


Figure 5-74. Strapped bundles of steel in open storage.

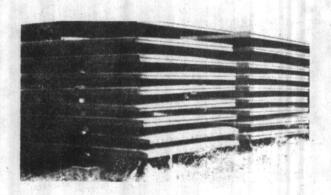


Figure 5-75. Use of horizontal dunnage in flat storage of armor.

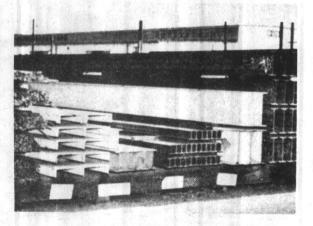


Figure 5-76. Open storage of metal shapes.

15 September 1979 DOD 4145.19-R-1

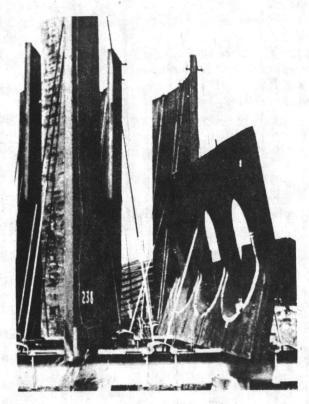


Figure 5-77. Storage of large and heavy items.

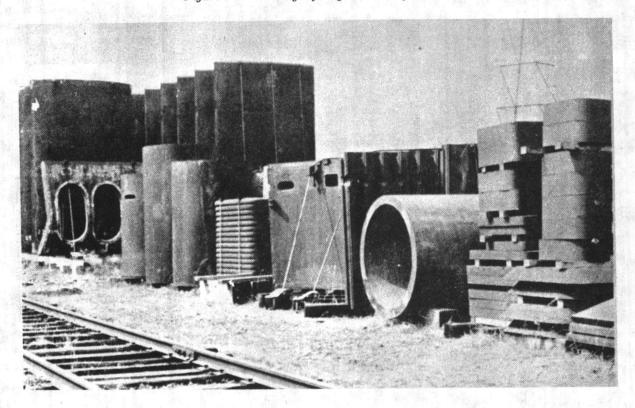


Figure 5-78. Open storage adjacent to rails.

DOD 4145.19-R-1 15 September 1979

reaction. The prime causes of corrosion are the nature of the materials and unfavorable storage environments. Metal products are more susceptible to corrosion in areas having higher relative humidity than in dry, arid areas. Metal with a polished surface should always be handled with gloved hands to protect the metal from acid stains caused by perspiration. When preservatives are to be applied to metal products, the surface to be coated will be dry,

clean, and free from mill scale, dirt, and corrosion. It is essential that materials which have been treated with a preservative are not unduly handled, especially during the setting of the coating. Scheduled surveillance inspections are required to evaluate the continuous effectiveness of the preservative. Metal products stored in open areas for long periods of time may require repeated application of preservative.

## Section 9. CABLE STORAGE AND HANDLING

그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그	Paragraph
General	5-901
Storage	5–902
Handling of cable	5–903
Cable rereeling	5–904
Protection of cable ends	5–905

### 5-901. General

Cable and wire products are wound on spools and reels to facilitate storage and handling. Spools containing wire range in diameter up to 12 inches and the weight usually does not exceed 25 pounds. Reels will range in diameter from 12 inches up to 108 inches, and in weight from about 50 pounds up to approximately 5 tons. This wide range of weight and cube necessitates the use of careful storage and handling practices.

# 5-902. Storage

- a. Cable should be stored indoors in a cool dry location. When indoor storage is not possible, lead covered, jute-protected, and tape armored cables may be stored in an open shed or in the open, provided the cable and cable reel are protected against moisture absorption from the ground. This can be accomplished by placing the reels on a raised platform or on planks which will provide air circulation under the reels. Cable will not be stored in close proximity to oils, acids, or chemicals.
- b. Because most heavy or large diameter cable is wound on the reel with few layers (normally five to eight), but with the number of turns three to four times the number of layers, it is best to store a loaded reel in the vertical position, so that the inner layer on the top of the barrel will have the weight of only four to seven layers on top of it. If the same reel were stored on the side (horizontal) position, the cable turn next to the bottom flange

would be subjected to the weight of all turns above it and be more susceptible to damage.

- c. Quantities of cable with the same stock number may be pyramided as shown in figure 5–79. The storage area should have crane service available to facilitate the storage and issue of reels. Storage areas with low ceilings should be utilized to the greatest extent possible for vertical storage of single lot items to reduce the loss of cube space.
- d. Small reels, less than 36 inches in diameter, of electrical or wire cable on reels without wood lagging may be stored horizontally but they should be handled carefully, especially when being tiered.
- (1) Dunnage required for horizontal storage is usually 3 by 3 inches and of sufficient length to adequately support the reel of cable being stored (fig. 5-80). However, dunnage thickness requirements will be determined to a great extent by the weight of the reels being stored and the distance the hub assembly protrudes from the reel flange surface. Sufficient space must be maintained between reels to permit the entrance of the forks of materials handling equipment. Two parallel pieces of dunnage should extend completely across each reel in the stack and between the base reel and the floor. The dunnage should be placed vertically in line in order to distribute the weight of superimposed reels over as much of the surface of the lower reels as possible, thereby providing maximum stack stability.

15 September 1979 DOD 4145.19-R-1

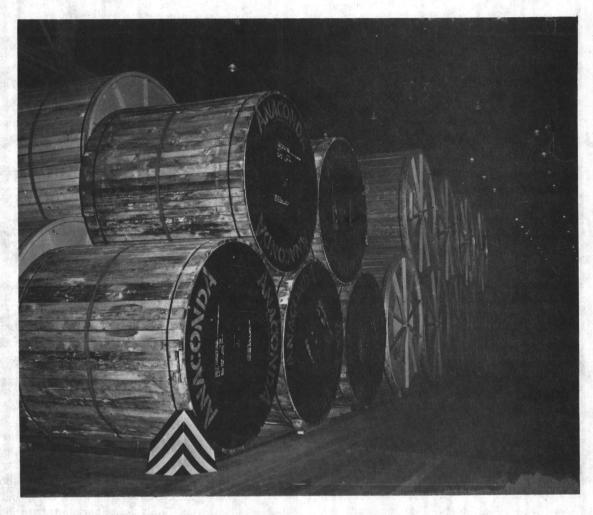


Figure 5-79. Pyramid stacking of cable reels.

(2) Many small reels of cable and wire products, due to their size, should be stored in bin or pallet racks. This is especially true of small spools of wire or small lot quantities of cable or wire which are received in cartons or coil quantities. Generally, these items will be located in the bin issue area and the back-up stock stored in pallet racks.

## 5-903. Handling of Cable

a. Cable reels are usually well constructed and capable of withstanding considerable abuse. However, serious damage can be incurred through improper handling. It is therefore necessary that care

be exercised in the movement and handling to avoid damage to the reel or its contents.

b. When handling cable reels by crane, a spreader bar should be used to prevent the sling from crushing the reel (fig. 5–81). Unless reels are handled with a spreader bar, the inward thrust of the sling may severely damage the reel flange and cable. Therefore, activities storing and handling cable on reels should provide spreader bars for use in crane handling operations. Slings should be attached to a bar running through the hub of the cable reel and not by placing the sling over the lagging around the circumference of the reel. Placing the sling around

DOD 4145.19-R-1



Figure 5-80. Small cable reels properly dunnaged for safe efficient stacking.

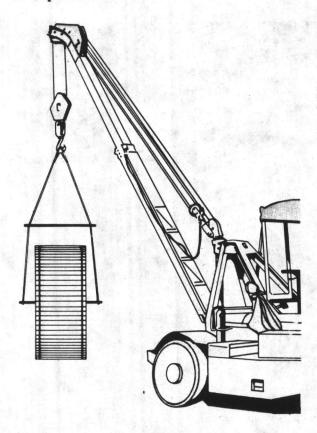


Figure 5-81. Handling cable reels by crane with spreader bar.

the circumference of the reel may result in damage to lagging and cable and require extensive repairs.

c. The fork truck is commonly utilized in the storage and handling of cable, especially where the reels are stored on their side. When handling reels with a fork truck, a crane should be used to place reels in a horizontal position. Reels should not be tipped and allowed to fall to a horizontal position, as the impact may damage the reel or cable. To further facilitate storage operations, it is good practice to place on each reel, prior to being stored, necessary dunnage to support the reel of cable to be superimposed on the stack.

#### 5-904. Cable Rereeling

At most military activities, cable rereeling is not required to the extent that special reeling equipment is necessary. Most storage activities issue only full reel quantities of cable. There is, however, a demand for less than full reel quantities at some activities where cable is issued for use. Reeling of all types of cable is required to fill retail quantity requirements. Activities which are required to issue electric cable in retail lots should provide personnel with cable reeling equipment, which will permit economical and safe operation.

- a. Basic factors to determine need of cable rereeling equipment.
  - (1) Cost of equipment.
  - (2) Availability of empty reels.
  - (3) Cost of additional manhours required.
  - (4) Savings of manhours when making issues.
  - (5) Number of less than full reel issues.
  - b. Methods and equipment.
- (1) Reeling equipment required. The reeling equipment required should be determined by the quantity of cable issued in less than full reel quantities. At activities where small quantity issues are infrequent, hand reeling equipment as shown in figure 5–82, should be utilized. However, if large quantities of less than full reel quantity issues are made, powered reeling equipment will be more economical.
- (2) Cable reeling dispenser. Two methods of supporting the full cable reel during reeling operations which have proven very satisfactory are:
- (a) To support the reel from which the cable is to be removed on a horizontal roller bearing support turntable (fig. 5–83).
- (b) To insert a shaft through the axis of the reel and support the shaft with cable reel jacks (fig. 5-84).
- c. Measuring device. A measuring device should be utilized in all rereeling operations. This device should be located between the reeling equipment and reel dispenser and so positioned that the footage indicator for cable transferred between reels can be easily seen by the operator (fig. 5–82).
- d. Cable cutter. Cable cutting devices should be utilized for cutting cable. Multicircuit cable should be cut with circular cutters only. Straight shearing action cutters distort the ends of the circuit wires within the sheathing and make splicing or use of the cable difficult.

#### 5-905. Protection of Cable Ends

When cut, certain types of cable will absorb moisture from the atmosphere or other sources rendering the cable useless for the purpose intended. It

DOD 4145.19-R-1 15 September 1979

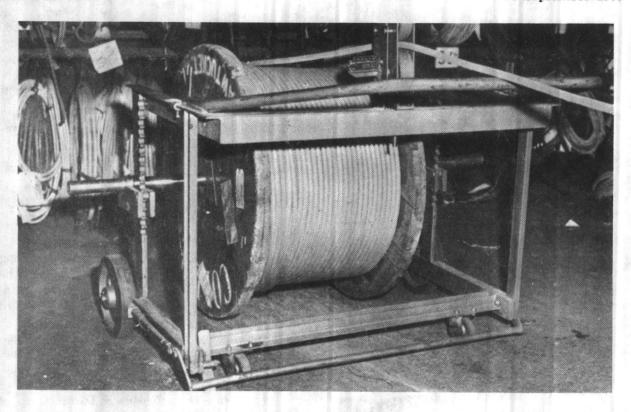


Figure 5-82. Hand operated cable reeling unit and measuring device.



Figure 5-83. Cable dispensing turntable.

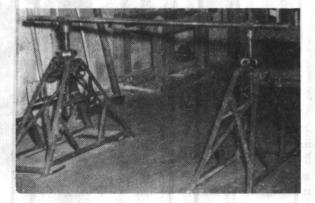


Figure 5-84. Cable dispensing bar and jacks.

is mandatory, therefore, that immediately following cutting of this type of electrical cable, each of the severed ends must be sealed in accordance with Military Specification MIL-C-12000. Cable which has not been end-wrapped after cutting must be checked for moisture penetration prior to issuing.

## CHAPTER 6

## SAFETY

	Paragraph
Policy	6-101
Accident costs	6-102
Training personnel to avoid accidents	6-103
Accident prevention program	6-104
Safety equipment and clothing	6-105
Fire protection	6-106
Fire suppression equipment (portable fire extinguishers)	6-107
Housekeeping as related to general storage	6-108
Rules for safe storage	6-109
Size of storage blocks, clearances, heights, and limitations	6-110
Signs and color code markings, in relation to safety in storage	6-111
Safety practices for powered materials handling equipment	6-112
Safety practices for nonpowered materials handling equipment	6-113
Manual handling	6-114
Safety in loading and unloading railroad cars/trucks and trailers	6-115
Buildings and physical equipment	
Flammable materials	6-117
Poisonous, toxic and radioactive materials	6-118
Corrosive materials	6-119
Certain other hazardous commodities	6-120
Safety in acid storage	6-121
Petroleum products—safety precautions	
Safety precautions for solid fuels in storage	6-123
Lumber yard—fire precautions	6-124
Strategic and critical material	6-125

### 6-101. Policy

- a. Provisions of this chapter apply to general industrial and operational safety for storage and handling of military supplies.
- (1) Occupational safety and health requirements set forth in this regulation are based in part on the DOD occupational safety and health standards established by DOD instruction 6055.1.
- (2) Selected Department of Labor (OSHA) standards are cited in this regulation as a ready reference.
- (3) Specific safety requirements for storage and handling of ammunition and explosives are established by DOD standards and military service directives.
- (4) In the event of a conflict between the requirements set forth in this regulation and a specific OSHA standard, the issue will be referred to component headquarters for resolution.

b. A safety program will be established for storage operations at major supply installations and separate storage activities in the continental United States and overseas. Safety will be included in and made an integral part of storage operations. It is the responsibility of each official in charge of storage at these installations to institute a suitable program, utilizing the technical services of the installation safety director or safety engineer in all matters dealing with accident prevention. Installations and separate storage activities commanders will take steps to assure that the accident prevention program in storage operations is effectively enforced at all levels of supervision under their jurisdiction.

### 6-102. Accident Costs

a. Manhours. Accidents involving personnel can have an adverse effect on productive manhours and

DOD 4145.19-R-1 15 September 1979

planned production schedules. Productive manhours lost through accidents cannot normally be recouped immediately since replacement personnel, or required skills, are not readily available.

b. Damaged or destroyed material. When material is damaged or destroyed by accident, costs are incurred to accomplish necessary repairs and/or replacement of material. Other consequences include production delays and a possible shortage of critical material.

## 6-103. Training Personnel to Avoid Accidents

- a. Safety knowledge and training. Operating personnel must be given proper instruction and training concerning potential dangers associated with their daily tasks. An awareness of apparent or potential dangers and training to avoid such hazards will assist in reducing accidents while performing normal tasks.
- b. Knowledge of hazardous material. Certain items, such as explosives, flammable material, chemicals, acids, etc., obviously require more care and attention than other items. The characteristics of the material being stored or handled dictate the care and attention necessary to avoid risks and potential hazards. Personnel handling hazardous material must possess a knowledge of all potential hazards concerning the commodities under their control.
  - c. Knowledge of equipment.
- (1) Design. Equipment is generally designed to perform a specific function. For example, MHE will safely handle a specified maximum load, travel at a maximum, speed, ascend or descend a maximum grade, and operate safely under specified conditions. A potential hazard can be created when equipment is selected for use in operations beyond the rated capacity or for other than the purpose designated.
- (2) Use. Equipment must be used only for the purpose for which designed. For example, use of electric powered spark enclosed equipment is required when handling flammable gases. All equipment must be checked to determine suitability for the task and if any doubt exists as to suitability, qualified personnel must be consulted.
- (3) Special attachments. In areas where flammable materials are stored and handled, the use of spark enclosed equipment and special attachments thereto will reduce operating hazards. When front end attachments are used which are not factory

installed, the user shall request that the truck be marked to identify the attachment and show the approximate weight of the truck and attachment combination at maximum load elevation with load laterally centered.

- (4) Maintenance. Equipment which is not in proper operating condition constitutes a hazard. Operator will not operate equipment that appears to be mechanically unsafe. They will not attempt to repair such equipment but will report unsafe equipment to their supervisor for appropriate corrective action or replacement.
- d. Methods. Personnel will be trained in the proper methods of operating equipment. Training information or programs may be found in chapter IV, section 5 of this regulation or in the National Safety Council Drivers Training Course.
- e. Layout. Familiarity of the storage layout or area is an important factor for the prevention of accidents. The following conditions must be considered:
- (1) Distance. The greater the distance traveled, the greater the potential for accidents.
- (2) *Terrain*. The rougher the terrain the greater potential for accidents.
- (3) Elevation changes. Changes in elevation can constitute a hazard. Elevation changes can involve extra handling and increase the potential for accidents.
- (4) Aisles. Narrow aisles, turns and jogs in aisles, bumps or protruding objects constitute hazards.

### 6-104. Accident Prevention Program

- a. Analysis of operation. Each physical operation will be analyzed by supervisory or safety personnel to predetermine inherent and manmade hazards. Operating procedures will then be developed which either remove or control the hazards identified. Methods of control include substitution with safer equipment or procedures, isolation of hazardous operations, mechanical guarding, redesign of facility and/or equipment layout, and others. Installation safety specialists can be of great assistance in developing hazard controls to satisfy specific safety requirements.
- b. Training of personnel. At each facility, safety training programs will be developed for supervisors and employees. Formal safety training, fire prevention training, or other required instruction will be performed by supervisors with assistance from

installation safety, fire prevention, and health activities.

c. Reports. All accidents will be investigated and reported in accordance with existing procedures of the appropriate military department.

## 6-105. Safety Equipment and Clothing

- a. Use. When a hazard still exists after all practical control methods have been taken, workers must be given further protection through protective equipment or clothing. The type of equipment and/or clothing required will depend upon the nature of the hazards involved. This equipment will not be used as a substitute for the elimination or control of unsafe acts and conditions, but rather as a supplemental safety measure.
  - b. Types of protective clothing and equipment.
- (1) Synthetic rubber gloves. Synthetic rubber gloves will be worn for protection when handling ordinary commercial concentrations of harmful chemicals, petroleum products, or chlorinated solvents.
- (2) Natural rubber gloves. Natural rubber gloves will be worn for protection when handling high concentrations of acids and alkalis, organic solvents, and other chemicals which are highly toxic or corrosive or which probably will injure the skin or induce dermatitis. Natural rubber gloves will not be used for protection against petroleum products and chlorinated solvents.
- (3) General purpose workmen's gloves. When performing general labor work and when sharp or rough material is being handled general purpose workmen's gloves will be worn for portection of hands from cuts and abrasions. The glove palm, thumb, and index finger are covered with leather. When glass is handled, gloves with suction cups or leather palms will be worn. When gloves with leather parts are used, care must be taken that the leather parts do not become greasy.
- (4) Hoods, aprons, sleeves and suits. Hoods, aprons, sleeves, or suits made from natural or synthetic rubber or acid resisting rubberized cloth will be worn for protection when filling open vessels with acid or when handling individual containers of acid to protect personnel from possible leakage or breakage of containers.
- (5) Rubber framed goggles (29 CFR 1910.133). Rubber-framed goggles will be worn for protection of the eyes against smoke, gas, fine dust, mists,

and sprays or splashes of liquid or other substances, including acids and alkali solutions.

- (6) Spectacle goggles (29 CFR 1910.133). Spectacle goggles with side shields will be worn for eye protection against flying particles of dust, chips, and machine cuttings. Spectacle goggles without side shields will be worn for other operations requiring eye protection.
- (7) Protective hat (helmet) (29 CFR 1910.135) (ANSI Z89.1).
- (a) A protective hat will be worn for head protection against falling or flying objects or from bumping head when working in cramped places. A protective hat will always be worn when in yards or areas when material is being lifted or hoisted or where ends of slings or other gear could swing against the head.
- (b) Bump caps are of a thin shelled light weight plastic construction and do not meet the specifications of ANSI Z89.1 for inpact flying particle and electric shock protection. Bump caps are not to be substituted for protective hard hat and their use should be limited to exposures where bumping of the head is the only consideration.
- (8) Protective headgear (cap or beret type). Protective headgear will be worn to confine long hair and prevent entanglement with moving or rotating machinery, open flames, or dust accumulation.
- (9) Welders gloves, goggles, mitts, helmet, and jacket (29 CFR 1910.252(e)). Welders gloves, goggles, mitts, helmets and jackets will be worn for protection of hands, face, eyes, and body against sparks, chips, and flame resulting from welding or cutting processes.
- (10) Safety toe shoes and foot or toe guards. Authorized safety toe footwear or approved foot and/or toe guards will be worn while working in areas, or while performing operations designated by the appropriate authority as hazardous to feet or toes of the workers. Safety toe shoes will meet standards as set forth in 29 CFR 1910.136 and ANSI Z41.1 for occupational footwear. The activity will provide advice and instructions on procurement of safety toe footwear and toe or foot guards.
- (11) Sparkproof safety shoes. The friction and shock of shoes on explosive materials and sparks from metal parts in shoes are potential hazards with all explosive materials. Conductive sparkproof shoes shall be worn in the vicinity of exposed explosives which are susceptible to static spark of the energy that can be discharged from a person. The construc-

tion of nonspark-producing or explosives operation shoes should be in accordance with the latest United States of America Safety Standard. Shoes with soles and heels of leather, rubber, or synthetic compositions (neolite, Neoprene and similar compositions) may be used provided the soles and heels contain no exposed nails or holes. The shoes shall have a fully enclosed safety toe cap. Periodic inspections shall be made to detect and eliminate any shoes with exposed metal. The soles and heels of shoes must be cleaned free from sand and dirt before entering a building containing explosives. Conductive shoes meeting the requirements for explosives operations (nonspark-producing shoes) may be substituted for them if desired.

(12) Respiratory protection (29 CFR 1910.134). An effective respiratory protection program should include the following:

- (a) Written standard operating procedures.
- (b) Instruction and training in the proper selection and use of respirators.
- (c) Assignment of respirators to individual users, when practicable.
- (d) Cleaning and disinfection procedures for respirators.
- (e) Proper techniques for storage of respirators.
  - (f) Criteria for inspection of respirators.
- (g) Surveillance of work conditions to determine respirator needs.
- (h) Determination of fitness of workers to wear respirators.
  - (i) Periodic program evaluation.
- (13) General purpose gas mask. The general purpose gas mask is used for respiratory protection in an area in which there is a minimum concentration of toxic gases or vapors. This mask cannot be used safely in an area in which the vapors are concentrated to the extent that the flame of a safety lamp would be extinguished. This mask affords protection, for a limited time, against concentrations up to 20,000 parts per million parts of air. Protection is afforded against organic vapors and gases, carbon monoxide, toxic dust, fumes, mists, fogs, and smoke. However, the mask is not used for dayafter-day protection in routine work as are various other types of respirators.
- (14) Special purpose gas mask. The special purpose gas mask is used for respiratory protection in areas in which there is a minimum or moderately high concentration of toxic gases or vapors. This

mask cannot be used safely in an area in which the vapors are concentrated to the extent that the flame of a safety lamp would be extinguished. Specific types of canister refills used in the mask afford protection against specific types of contaminants. It is extremely important to know or determine what classes of contaminants are likely to be present, and equally important to know what contaminants a given canister will protect against. The mask is available with a wide selection of canisters, providing respiratory protection against all the poisonous gases except carbon monoxide and other gas mixtures containing carbon monoxide, such as coal gas. Generally, the mask is used when entering confined spaces containing dangerous atmospheres, to rescue others who have been overcome, and for doing necessary work of an emergency nature. The mask is not used for day-after-day protection in routine work as are various types of respirators. The difference between the use of the special purpose mask and the general purpose mask is that the special purpose mask is used to protect against specific classes of gases and vapors and the general purpose mask is used to protect against all classes of toxic gases, including carbon monoxide. The exact difference is in the canisters used, and that the general purpose mask has a timing device while a timing device is not provided in the special purpose mask. See references to documents of appropriate military department in appendix A, for sources of organic vapors and acid gases, and for the type of canister to use in relation to type of contamination for which protection is required. All tank cleaning operations will be performed in strict conformance with the provisions of the publications of the appropriate military department.

Note. Warning: Never use a gas mask without carefully assessing exposure conditions. Use suitable instruments (para (16) below) to determine concentration of oxygen and air contaminants, if possible. If in doubt about exposure conditions use self-contained breathing apparatus only. Always use strictly in accordance with canister labels, gas mask instructions, and limitations. Do not use gas masks for firefighting.

(15) Self-contained breathing apparatus. The purpose of this apparatus is for protection in areas where general purpose gas mask or special purpose gas mask is not applicable. Training of personnel in the use of the breathing apparatus and inspection for operational capability will be the responsibility

of the installation fire department or appropriate personnel of the respective service.

- (16) Combustible gas and oxygen indicator. The purpose of this dual purpose instrument is to monitor areas for buildup of potentially hazardous combustible gases, and/or oxygen deficiency. Typically such areas include vaults, tunnels, sewers, ship holds, and areas where combustible fluids are used or stored.
- (17) Portable combustible gas indicating detectors. Portable combustible gas indicating detectors are available for use as follows:
- (a) For detection of miscellaneous flammable gases (including hydrogen) and vapors.
- (b) For indication of the concentration of hydrogen in mixtures with air or oxygen.
- (c) For detecting combustible gases or vapors associated with fuel oils, gasoline, and paints.
- (d) For detecting concentrations of one or more specific combustible gases in mixture with air or oxygen.

(18) Safety hand tools.

- (a) Safety hand tools are constructed of wood or other nonsparking or spark resistant materials such as bronze, lead, beryllium alloys, and "K" Monel metal which, under normal conditions of use, will not produce sparks. Properly maintained, nonferrous hand tools shall be used for work in locations which contain exposed explosives or hazardous concentrations of flammable dusts, gases or vapors. Hand tools or other implements used in the vicinity of hazardous materials must be handled carefully and kept clean. All tools should be checked out before beginning work and checked in at its completion.
- (b) Metal hand tools determined to be spark resistant by tests conducted in accordance with paragraph 4.6.3, MIL-W-19928A, dated 15 February 1967, may also be used as in (a) above.
- (c) If the use of ferrous metal hand tools, not in accordance with (b) above, is required because of strength characteristics, the immediate area should be free from exposed explosives and other highly combustible materials except in specific operations approved by the service/agency concerned.
- (19) Safety treads. Safety treads should be installed on ladders, stairs, and floor surfaces to prevent slipping. Several types of safety treads are available.
  - (20) Knee pads. Knee pads will provide for pro-

tection of knees of carpenters, riggers, or mechanics who must kneel while working.

- (21) Carboy tilter. Carboy tilters will be used for safe removal of dangerous liquids, such as acids, from carboys.
- (22) Special bung fittings and automatic faucets. Special bung fittings and automatic faucets will be used on drums for dispensing and storing of dangerous liquids. (Ref NFPA Code 30)
- (23) Special gas fill caps and metal sediment bowls. Special gas fill caps and metal sediment bowls will be used on powered materials handling equipment for safety in replenishment of fuel.

## 6-106. Fire Protection (29 CFR 1910.156)

- a. Classification of fires.
- (1) Class A fires are fires in ordinary combustible materials, such as wood, cloth, paper, and rubber.
- (2) Class B fires are fires in flammable liquids, gases, and greases.
- (3) Class C fires are fires which involve energized electrical equipment where the electrical nonconductivity of the extinguishing media is of importance. (When electrical equipment is de-energized, extinguishers for Class A or B fires may be used safely.)
- (4) Class D fires are fires in combustible metals, such as magnesium, titanium, zirconium, sodium, and potassium.
  - b. Classification of portable extinguishers.
- (1) Portable fire extinguishers are classified for use on certain classes of fires and rated for relative extinguishing effectiveness at a temperature of plus 70° F by nationally recognized testing laboratories. This is based upon the preceding classification of fires and the fire extinguishment potentials as determined by fire tests.
- (2) The classification and rating system described in this section is that used by Underwriters' Laboratories, Inc. and Underwriters Laboratories of Canada and is based on extinguishing preplanned fires of determined size and description as follows:
- (a) Class A rating—Wood and excelsior fires excluding deep-seated conditions.
- (b) Class B rating—Two-inch depth gasoline fires in square pans.
- (c) Class C rating—No fire test. Agent must be a nonconductor of electricity.
- (d) Class D rating—Special tests on specific combustible metal fires.

c. Classification of hazards.

(1) A light hazard is a situation where the amount of combustibles or flammable liquids present is such that fires of small size may be expected. These may include offices, schoolrooms, churches, assembly halls, telephone exchanges, etc.

(2) An ordinary hazard is a situation where the amount of combustibles or flammable liquids present is such that fires of moderate size may be expected. These may include mercantile storage and display, auto showrooms, parking garages, light manufacturing, warehouses not classified as extra hazard, school shop areas, etc.

(3) An extra hazard is a situation where the amount of combustibles or flammable liquids present is such that fires of severe magnitude may be expected. These may include woodworking, auto repair, aircraft servicing, warehouses with high-piled (14 feet or higher) combustibles, and processes such as flammable liquid handling, painting, dip-

ping, etc.

d. Sprinkler system. A sprinkler system, for fire protection purposes, is an integrated system of underground and overhead piping designed in accordance with fire protection engineering standards. The system includes a suitable water supply, such as a gravity tank, fire pump, reservoir, or pressure tank and/or connection by underground piping to a city main. The portion of the sprinkler system above ground is a network of specially sized or hydraulically designed piping installed in a building, structure or area, generally overhead, and to which sprinklers are connected in a systematic pattern. The system includes a controlling valve and a device for actuating an alarm when the system is in operation. The system is usually activated by heat from a fire and discharges water over the fire area.

Note. The design and installation of water supply facilities such as gravity tanks, fire pumps, reservoirs, or pressure tanks, and underground piping are covered by NFPA Standards No. 22–1970, Water Tanks For Private Fire Protection; No. 20–1970, Installation of Centrifugal Fire Pumps; and No. 24–1970, Outside Protection.

- e. Sprinkler alarms. A sprinkler alarm unit is an assembly of apparatus approved for the service and so constructed and installed that any flow of water from a sprinkler system equal to or greater than that from a single automatic sprinkler will result in an audible alarm signal on the premises.
  - f. Class of service—standpipe systems.
    - (1) Standpipe systems are grouped into three

general classes of service for the intended uses in the extinguishment of fire.

(a) Class I—For use by fire departments and those trained in handling heavy fire streams (2½-inch hose). The system is capable of furnishing the effective fire streams required during the more advanced stages of fire on the inside of buildings or for exposure fire.

(b) Class II—For use primarily by the building occupants until the arrival of the fire department (small hose). The system affords a ready means for the control of incipient fires by the occupants of buildings during working hours and by watchmen and those present during the night time and holidays.

(c) Class III—For use by either fire departments and those trained in handling heavy hose streams or by the building occupants. The system is capable of furnishing the effective fire streams required during the more advanced stages of fire on the inside of buildings as well as providing a ready means for the control of fires by the occupants of the building.

(2) Standpipe systems are usually of the fol-

lowing types:

(a) A wet standpipe system having a supply valve open and water pressure maintained at all times.

(b) A standpipe system so arranged through the use of approved devices as to admit water to the system automatically by opening a hose valve.

- (c) A standpipe system arranged to admit water to the system through manual operation of approved remote control devices located at each hose station.
- (d) Dry standpipe having no permanent water supply.

(Note. See 29 CFR 1910.158 for specific design and requirements for standpipe and hose systems.)

g. Types of storage (in relation to fire protection).

(1) Type I storage. Type I storage is that in which combustible commodities or noncombustible commmodities involving combustible packaging or storage aids are stored over 15 feet but not more than 21-feet high in solid piles or over 12 feet but not more than 21-feet high in piles that contain horizontal channels. Minor quantities of commodities of hazard greater than ordinary combustibles may be included without affecting this general classification.

- (2) Type II storage. Type II storage is that in which combustible commodities or noncombustible commodities involving combustible packaging or storage aids are stored not over 15 feet-high in solid piles or not over 12 feet high in piles that contain horizontal channels. Minor quantities of commodities of hazard greater than ordinary combustibles may be included without affecting this general classification.
- (3) Type II storage. Type III storage is that in which the stored commodities, packaging, and storage aids are noncombustible or contain only a small concentration of combustibles which are incapable of producing a fire that would cause appreciable damage to the commodities stored or to noncombustible wall, floor, or roof construction. Ordinary combustible commodities in completely sealed noncombustible containers may qualify in this classification. General commodity storage that is subject to frequent changing and storage of combustible packaging and storage aids is excluded from this category.

# 6-107. Fire Suppression Equipment (Portable Fire Extinguishers, 29 CFR 1910.157)

- a. Operable condition. Portable extinguishers will be maintained in a fully charged and operable condition, and kept in their designated places at all times when they are not being used.
- b. Location. Extinguishers will be conspicuously located where they will be readily accessible and immediately available in the event of fire. They will be located along normal paths of travel.
- c. Marking of location. Extinguishers will not be obstructed or obscured from view. In large rooms, and in certain locations where visual obstruction cannot be completely avoided, means will be provided to indicate the location and intended use of extinguishers conspicuously.
- d. Marking of extinguishers. If extinguishers intended for different classes of fire are grouped, their intended use will be marked conspicuously to ensure choice of the proper extinguisher at the time of a fire.
- e. Mounting of extinguishers. Extinguishers will be installed on the hangers or in the brackets supplied, mounted in cabinets, or set on shelves unless the extinguishers are of the wheel type.
- f. Height of mounting. Extinguishers having a gross weight not exceeding 40 pounds will be installed so that the top of the extinguisher is not

- more than 5 feet above the floor. Extinguishers having a gross weight greater than 40 pounds (except wheeled types) will be so installed that the top of the extinguisher is not more than 3½ feet above the floor.
- g. Cabinet mounting. Extinguishers mounted in cabinets or wall recesses or set on shelves will be placed in a manner such that the extinguisher operating instructions face outward. The location of such extinguishers will be marked conspicuously.
- h. Vibrating locations. Extinguishers installed under conditions where they are subject to severe vibration will be installed in brackets specifically designed to cope with this vibration.
- i. Temperature range. Extinguishers will be suitable for use within a temperature range of at least plus 40° F to 120° F.
- j. Extreme temperature exposure. When extinguishers are installed in locations subjected to temperatures outside the range prescribed in this subparagraph, they will be of a type approved or listed for the temperature to which they will be exposed, or placed in an enclosure capable of maintaining the temperature within the range prescribed in this subparagraph.
- k. Selection of extinguishers. The selection of extinguishers for a given situation will depend upon the character of the fires anticipated, the construction and occupancy of the individual property, the vehicle or hazard to be protected, ambient temperature conditions, and other factors. The number of extinguishers required will be determined by reference to paragraph m below of this section. Approved fire extinguishers will be used to meet the requirements of this section.

Note. Approved means listed or approved by (1) At least one of the following nationally recognized testing laboratories: Factory Mutual Engineering Corp; Underwriters' Laboratories, Inc., or (2) Federal agencies such as Bureau of Mines, Department of the Interior; Department of Transportation, or US Coast Guard, which issue approvals for such equipment.

- l. Selection by hazard. Extinguishers will be selected for the specific class or classes of hazards to be protected in accordance with the following:
- (1) Extinguishers for protecting Class A hazards will be selected from among the following: foam, loaded stream, multipurpose dry chemical, and water types. Certain smaller extinguishers which are charged with multipurpose dry chemical are rated on Class B and Class C fires, but have

insufficient effectiveness to earn the minimum 1–A rating even though they have value in extinguishing smaller Class A fires. Such smaller extinguishers will not be used to meet the requirements of paragraph m below of this section.

- (2) Extinguishers for protection of Class B hazards will be selected from the following: bromotrifluoromethane, carbon dioxide, dry chemical, foam, loaded stream, and multipurpose dry chemical. Extinguishers with ratings less than 1-B shall not be considered in determining suitability.
- (3) Extinguishers for protection of Class C hazards will be selected from the following: bromotrifluoromethane, carbon dioxide, dry chemical, and multipurpose dry chemical.

Note. Carbon dioxide extinguishers equipped with metal horns are not considered safe for use on fires in energized electrical equipment and, therefore, are not classified for use on Class C hazards.

- (4) Extinguishers and extinguishing agents for the protection of Class D hazards will be approved for use on the specific combustible metal hazard.
  - m. Distribution of portable fire extinguishers.
- (1) The number of fire extinguishers needed to protect a property will be determined as prescribed herein, considering the area and arrangement of the building or occupancy, the severity of the hazard, the anticipated classes of fires, and the distances to be traveled to reach extinguishers.
- (2) Fire extinguishers will be provided for the protection of both the building structure, if combustible, and the occupancy hazards contained therein.
- (3) Required building protection will be provided by fire extinguishers suitable for Class A fires.

- (4) Occupancy hazard protection will be provided by fire extinguishers suitable for such Class A, B, C, or D fire potentials as may be present.
- (5) Extinguishers provided for building protection may be considered also for the protection of occupancies having a Class A fire potential.
- (6) Combustible buildings having an occupancy hazard subject to Class B, and/or Class C fires, will have a standard complement of Class A fire extinguishers as required by table 1 for building protection, plus additional Class B and/or Class C extinguishers. Where fire extinguishers have more than one letter classification (such as 2–A; 20–B; C), they may be considered to satisfy the requirements of each letter class.
- (7) Rooms or areas will be graded generally as light hazard, ordinary hazard, or extra hazard. Limited areas of greater or lesser hazard will be protected as required.
- n. Fire extinguisher size and placement for Class A hazards.
- (1) Minimal sizes of fire extinguishers for the listed grades of hazard will be provided on the basis of table 6–1. Extinguishers will be located so that the maximum travel distances will not exceed those specified in table 6–1.
- (2) The protection requirements specified in table 6–1 may be fulfilled by several extinguishers of lower ratings for ordinary or extra hazard occupancies.
- (3) Where the floor area of a building is less than that specified in table 6-1, at least one extinguisher of the minimum size recommended will be provided.
- (4) The protection requirements may be fulfilled with extinguishers of higher rating provided

## Table 6-1.

16	Areas to	o be protected per es	xtinguisher
distances to ex- tinguishers (feet)	Light hazard occupancy (square feet)	Ordinary hazard occupancy (square feet)	Extra hazard occupancy (square feet)
75	3,000	Note 1	Note 1
75	6,000	3,000	Note 1
75	9,000	4,500	3,000
75	11,250	6,000	4,000
75	11,250	9,000	6,000
	distances to ex- tinguishers (feet) 75 75 75	Maximum travel distances to extinguishers (feet) (square feet) 75 3,000 75 6,000 75 9,000 75 11,250	distances to extinguishers         Light hazard occupancy occupancy (square feet)         Ordinary hazard occupancy (square feet)           75         3,000         Note 1           75         6,000         3,000           75         9,000         4,500           75         11,250         6,000

*Note 1.* Not permitted except as specified in n(2) below.

Table 6-2

Type of hazard	Basic minimum extinguisher rating	Maximum travel distance to extinguishers (feet)
Light	4B	50
Ordinary	8B	50
Extra	12B	50

Note. Where this section calls for minimum extinguisher ratings of 4B, 8B, or 12B, the requirements may be met by existing extinguishers of multiple foam extinguishers as allowed by o(2) above. However, if a single extinguisher must be purchased to fulfill such requirements, the next higher rating will be used.

the travel distance to such larger extinguishers will not exceed 75 feet.

o. Fire extinguisher size and placement for Class B fires other than for fires in flammable liquids of appreciable depth.

(1) Minimal sizes of fire extinguishers for the listed grades of hazard will be provided on the basis of table 6–2. Extinguishers will be located so that the maximum travel distances will not exceed those specified in table 6–2.

(2) Two or more extinguishers of lower rating, except for foam extinguishers, will not be used to fulfill the protection requirements of table 6–2. Up to three foam extinguishers may be used to fulfill these requirements.

(3) The protection requirements may be fulfilled with extinguishers of higher ratings provided the travel distance to such larger extinguishers shall not exceed 50 feet.

p. Fire extinguisher size and placement for Class B fires in flammable liquids of appreciable depth.

(1) For flammable liquid hazards of appreciable depth (Class B), such as in dip or quench tanks, Class B fire extinguishers will be provided on the basis of one numerical unit of Class B extinguishing potential per square foot of flammable liquid surface of the largest tank hazard within the area.

Note. Appreciable depth is defined as a depth of a liquid greater than one-quarter inch.

(2) Two or more extinguishers of lower ratings, except for foam extinguishers, will not be used in lieu of the extinguisher required for the largest tank. Up to three foam extinguishers may be used to fulfill these requirements.

(3) Scattered or widely separated hazards will

be individually protected if the specified travel distances in o(1) and o(3) above are exceeded. Likewise, extinguishers in the proximity of a hazard will be carefully located so as to be accessible in the presence of a fire without undue danger to the operator.

q. Fire extinguisher size and placement for Class C hazards.

Extinguishers with Class C ratings will be required where energized electrical equipment may be encountered which would require a nonconducting extinguishing media. This will include fire either directly involving or surrounding electrical equipment. Since the fire itself is a Class A or Class B hazard the extinguishers are sized and located on the basis of the anticipated Class A or B hazard.

- r. Inspection, maintenance, and hydrostatic tests.
- (1) General. For details of conducting needed inspections, proper maintenance operations, and required tests, see NFPA No. 10A-1970, Maintenance and Use of Portable Fire Extinguishers.

(2) Inspection.

- (a) Extinguishers will be inspected monthly, or at more frequent intervals when circumstances require, to ensure they are in their designated places, to ensure they have not been actuated or tampered with, and to detect any obvious physical damage, corrosion, or other impairments.
- (b) Any extinguishers showing defects will be given a complete maintenance check.
  - (3) Maintenance.
- (a) At regular intervals, not more than 1 year apart, or when specifically indicated by an inspection, extinguishers will be thoroughly examined

DOD 4145.19-R-1 15 September 1979

and/or recharged or repaired to ensure operability and safety, or replaced as needed.

- (b) Extinguishers removed from the premises to be recharged will be replaced by spare extinguishers during the period they are gone.
- (c) Pails or drums of powder-extinguishing agents for scoop or shovel application to metal fires will be kept full at all times.
- (d) Each extinguisher will have a durable tag securely attached to show the maintenance or recharge date and the initials or signature of the person who performs this service.
  - (4) Hydrostatic tests.
- (a) If, at any time, an extinguisher shows evidence of corrosion or mechanical injury, it will be subjected to a hydrostatic pressure test, or replaced.
- (b) For evaluating the condition of extinguisher cylinders made to Department of Transportation specifications (49 CFR, chap. 1), see the Standard for Visual Inspection of Compressed Gas Cylinders (CGA C-6), published by the Compressed Gas Association, 500 Fifth Avenue, New York, NY 10036.
- (c) At intervals not exceeding those specified in table 6-3 and (d) of this subparagraph, extinguishers will be hydrostatically tested. The first

hydrostatic retest may be conducted between the fifth and sixth years for those with a designated test interval of 5 years.

- (d) Nitrogen cylinders (or other cylinders used for inert-gas storage), such as found on wheeled extinguishers, will be tested at a 5-year interval.
- (e) On those extinguishers which are equipped with a shutoff nozzle at the outlet end of the hose, a hydrostatic test will be performed on the hose with its couplings (but without the discharge nozzle) at the test interval specified for the unit on which the hose is installed.
- (f) The test pressure for dry chemical and dry powder hose assemblies requiring a hydrostatic test will be at a test pressure of 300 pounds per square inch for a 1-minute period. Carbon dioxide hose assemblies requiring a hydrostatic test will be at test pressure of 1,250 psi for a 1-minute period.
- (g) Hydrostatic tests are not required on fire pails, pump-type water and/or antifreeze extinguishers, and factory-sealed disposable (nonrefillable) containers. If such an extinguisher or water pail shows evidence of corrosion or mechanical injury, it may be unsafe or unsuitable for further use and will be replaced with a new unit.
  - (h) The hydrostatic test date will be recorded

Table 6-3. Hydrostatic test interval for extinguishers

Extinguisher type:	Test interval year
Cartridge-operated water and/or antifreeze	5
Stored-pressure water and/or antifreeze	5
Wetting agent	5
Foam	5
Loaded stream	5
Dry chemical extinguishers with stainless steel shells, or soldered-brass shells	5
Carbon dioxide extinguishers	5
Dry chemical extinguishers with brazed brass shells, mild steel shell, or aluminum shells	12
Bromotrifluoromethane	12
Dry powder extinguishers for metal fires	12

Note. Cylinders under jurisdiction of the US Department of Transportation (formerly Interstate Commerce Commission) may require hydrostatic testing at more frequent periods.

on a record tag of metal or equally durable material, or a suitable metallized decal which will be affixed (by a heatless process) to the shell of an extinguisher which favorably passes the hydrostatic test. The record tag will contain the following information: date of test, test pressure, and name or initials of person or agency making the test.

(i) For extinguishers subjected to an original factory test pressure of 350 psi or greater, the test pressure will be 75 percent of the factory test pressure (as noted on the extinguisher nameplate), but in no case less than 300 psi, see table 6–4. For extinguishers subjected to an original factory test pressure of less than 350 psi, the test pressure will be 75 percent of the factory test pressure; see table 6–4. Pressure will be applied at a rate of rise to reach the test pressure in approximately 1 minute, and the pressure will be held for 1 minute, after which it will be released.

- (j) Carbon dioxide extinguishers, nitrogen cylinders, and other cylinders or cartridges used for the storage of inert, compressed gases will be hydrostatically tested in accordance with the requirements of the US Department of Transportation (formerly Interstate Commerce Commission); see 49 CFR Parts 171–190.
- (k) Extinguisher shells, cartridges, or cylinders which show leakage or permanent distortion in excess of specified limits, or which rupture, will be removed from service.
- (5) Characteristics of fire extinguishers. The characteristics of fire extinguishers are summarized in table 6–5. The table is designed to familiarize one with the various types of extinguishers in use. The table may also be used as an aid in selecting fire extinguishers.

Table 6-4. Hydrostatic test pressure requirements—non-ICC shells, shells not specified in US Department of Transportation regulations, (formerly Interstate Commerce Commission)

Extinguisher type	Original factory test pressure	Requires hydrostatic test pressure
All dry chemical and dry powder	400 psi or greater	75% of factory test pressure
	350–399 psi below 350 psi	300 psi 75% of factory test pressure
Foam—500 psi factory test	500	375
Foam—350 psi factory test	350	300
Stored-pressure or cartridge- operated water-typed (including	400 psi or greater	75% of factory test pressure
antifreeze and loaded stream)	350–399 psi below 350	300 psi 75% of factory test pressure

Table 6-5. Characteristics of extinguishers

Extinguishing Agent	Method of operation	Capacity	Horizontal range of stream	Approximate time of discharge	Hydrostatic test interval	Protection required below 40° F	UL or ULC classifications*
Water	Stored Pressure	2½ gal.	30–40 ft.	1 min.	5 yr.	Yes	2-A
Water	Pump	1½ gal.	30–40 ft.	45 sec.	<u>-</u>	Yes	1-A
	Pump	2½ gal.	30-40 ft.	1 min.	_	Yes	2-A

Table 6-5. Characteristics of extinguishers—Continued

Extinguishing Agent	Method of operation	Capacity	Horizontal range of stream	Approximate time of discharge	Hydrostatic test interval	Protection required below 40° F	UL or ULC classifications*
	Pump	4 gal.	30–40 ft.	2 min.	_	Yes	3–A
	Pump	5 gal.	30–40 ft.	2–3 min.	- <del>- 1</del>	Yes	4-A
Water (Antifreeze	Cartridge & Stored Pressure	1¼, 1½ gal.	30–40 ft.	30 sec.	5 yr.	No	1-A
Calcium Chloride)	Cartridge & Stored Pressure	2½ gal.	30–40 ft.	1 min.	5 yr.	No	2-A
	Cartridge & Stored Pressure	33 gal. (wheeled)	50 ft.	3 min.	5 yr.	No	20-A
Water (Wetting	Cartridge & Stored Pressure	25 gal. (wheeled)	35 ft.	1½ min.	5 yr.	Yes	10-A
Agent)	Cartridge & Stored Pressure	45 gal. (wheeled)	35 ft.	2 min.	5 yr.	Yes	20-A
Water (Soda Acid)	Chemically generated expellent	1¼, 1½ gal.	30–40 ft.	30 sec.	5 yr.	Yes	1–A
	Chemically generated expellent	2½ gal.	30–40 ft.	1 min.	5 yr.	Yes	2–A
	Chemically generated expellent	17 gal. (wheeled)	50 ft.	3 min.	5 yr.	Yes	10-A
	Chemically generated expellent	33 gal. (wheeled)	50 ft.	3 min.	5 yr.	Yes	20-A
Loaded Stream	Stored Pressure	2½ gal.	30–40 ft.	1 min.	5 yr.	No	2 to 3–A and 1–B
	Cartridge and Stored Pressure	33 gal. (wheeled)	50 ft.	3 min.	5 yr.	No	20-A
Dry Chemical (Foam Com-	Cartridge and Stored Pressure	4¾ to 9 lbs.	5–20 ft.	8 to 10 sec.	5 or 12 yrs.	No	10 to 20–B:C
patible)‡	Cartridge and Stored Pressure	9 to 27 lbs.	5–20 ft.	10 to 25 sec.	5 or 12 yrs.	No	20 to 30–B:C
	Cartridge and Stored Pressure	18 to 30 lbs.	5–20 ft.	10 to 25 sec.	5 or 12 yrs.	No	40 to 60–B:C
	Nitrogen cylinder and Stored Pressure	lbs. (wheeled)		20 to 150 sec.	5 or 12 yrs.	No	80 to 240– B:C
Dry Chemical (Foam Compatible) (Potassium Chloride)‡‡	Cartridge and Stored Pressure	2½ to 5 lbs.	5–12 ft.	8 to 10 sec.	5 or 12 yrs.	No	10 to 20-B:C
	Cartridge and Stored Pressure	9½ to 20 lbs.	5–20 ft.	8 to 25 sec.	5 or 12 yrs.	No	40 to 60-B:C
Omoriue)++	Cartridge and Stored Pressure	19½ to 30 lbs.	5–20 ft.	10 to 25 sec.	5 or 12 yrs.	No	60 to 80–B:C
	Nitrogen cylinder and Stored Pressure	50 lbs. (wheeled)	15–45 ft.	30 sec.	5 or 12 yrs.	No	120-B:C
	200104 2 4 00044 0	,,					

Table 6-5. Characteristics of extinghishers—Continued

Extinguishing Agent	Method of operation	Capacity	Horizontal range of stream	Approximate time of discharge	Hydrostatic test interval	Protection required below 40° F	UL or ULC classifications*
Dry Chemical (Foam Compatible)	Stored Pressure	5 to 11 lbs.	11–22 ft.	13 to 18 secs.	12 yrs.	No	40 to 80–B:C
(Potassium Bicarbonate	Stored Pressure	17 to 19 lbs.	15–30 ft.	26 to 30 secs.	12 yrs.	No	120-B:C
Urea based)††		175 lbs. (wheeled)	70 ft.	62 secs.	12 yrs.	No	480-B:C
Bromotrifluo-	Self Expellent	21/2 lbs.	4-6 ft.	8 to 10 secs.	12 yrs.	No	2-B:C
romethane	Stored Pressure	4½ lbs.	6–10 ft.	8 to 10 secs.	12 yrs.	No	5–B:C
Bromochloro-	Stored Pressure	2 to 4 lbs.	8–12 ft.	8 to 12 secs.	12 yrs.	No	2 to 5-B:C
difluoro- methane		5½ to 9 lbs.	9–15 ft.	8 to 15 secs.	12 yrs.	No	10-B:C
Foam	Pressurized	21 oz.	4-6 ft.	24 sec.		Yes	1-B
Foam	Chemically generated expellent	11/4, 11/2 gal.	30–40 ft.	40 sec.	5 yr.	Yes	1-A; 2-B
	Chemically generated expellent	2½ gal.	30–40 ft.	1½ min.	5 yr.	Yes	2-A:4-B to 2-A:6-B
	Chemically generated expellent	5 gal.	30–40 ft.	2 min.	5 yr.	Yes	4-A:6-B
	Chemically generated expellent	17 gal. (wheeled)	50 ft.	3 min.	5 yr.	Yes	10-A: 10-B to 10-A:12- B
	Chemically generated expellent	33 gal. (wheeled)	50 ft.	3 min.	5 yr.	Yes	20-A: 20-B to 20-A: 40- B
	Self Expellent	2½ to 5 lb.	3–8 ft.	8 to 30 sec.	5 yr.	No	1 to 5-B:C
ide**		10 to 15 lb.	3-8 ft.	8 to 30 sec.	5 yr.	No	2 to 10-B:C
		20 lb.	3–8 ft.	10 to 30 sec.	5 yr.	No	10-B:C
		50 to 100 lb. (wheeled)	3–10 ft.	10 to 30 sec.	5 yr.	No	10 to 40-B:C
Dry Chemical (Sodium Bi- carbonate)††	Stored Pressure	1 lb.	5–8 ft.	8 to 10 sec.	5 or 12 yrs.	No	1-B:C
	Stored Pressure	1½ to 2½ lb.	5–8 ft.	8 to 12 sec.	5 or 12 yrs.	No	2 to 5-B:C
	Cartridge and Stored Pressure	23/4 to 51/2 lb.	5–20 ft.	8 to 20 sec.	5 or 12 yrs.	No	5 to 10-B:C
	Cartridge and Stored Pressure	7½ to 30 lb.	5–20 ft.	10 to 25 sec.	5 or 12 yrs.	No	10 to 60-B:C
	Nitrogen cylinder or Stored Pressure	75 to 350 lb. (wheeled)	15–45 ft.	20 to 105 sec.	5 or 12 yrs.	No	40 to 240- B:C

Table 6-5. Characteristics of extinguishers—Continued

Extinguishing Agent	Method of operation	Capacity	Horizontal range of stream	Approximate time of discharge	Hydrostatic test interval	Protection required below 40° F	UL or ULC classifications*
Dry Chemical (Potassium	Stored Pressure	1 to 2 lb.	5–8 ft.	8 to 10 sec.	5 yrs.	No	1 to 5-B:C
Bicarbonate)	Stored Pressure	21/4 to 5 lb.	5–12 ft.	8 to 10 sec.	5 or 12 yrs.	No	5 to 20-B:C
	Cartridge or Stored Pressure	5½ to 10 lbs.	5–20 ft.	8 to 20 sec.	5 or 12 yrs.	No	10 to 60–B:C
	Cartridge or Stored Pressure	16 to 30 lbs.	10–20 ft.	8 to 25 sec.	5 or 12 yrs.	No	40 to 80-B:C
Kanada da sada	Nitrogen cylinder or Stored Pressure	125 to 300 lbs. (wheeled)	15–45 ft.	30 to 60 sec.	5 or 12 yrs.	No	80 to 320– B:C
(Potassium	Stored Pressure	2 to 2½ lbs.	5–8 ft.	8 to 10 sec.	5 or 12 yrs.	No	5 to 10-B:C
chloride)††	Cartridge or Stored Pressure	5 to 10 lbs.	5–20 ft.	8 to 25 sec.	5 or 12 yrs.	No	20 to 40-B:C
	Cartridge or Stored Pressure	19½ to 30 lbs.	15–45 ft.	8 to 25 sec.	5 or 12 yrs.	No	60 to 80-B:C
	Nitrogen cylinder or Stored Pressure	50 to 160 lbs. (wheeled)	15–45 ft.	30 to 60 sec.	5 or 12 yrs.	No	120 to 160– B:C
Dry Chemical (Ammonium phosphate)‡	Stored Pressure†	1 to 5 lbs.	5–12 ft.	8 to 10 sec.	5 or 12 yrs.	No	2 to 10-B:C
Dry Chemical (Ammonium phosphate)‡	Stored Pressure or Cartridge	2½ to 8½ lbs.	5–12 ft.	8 to 12 sec.	5 or 12 yrs.	No	1 to 3–A and 10 to 40– B:C
	Stored Pressure or Car- tridge	9 to 17 lbs.	5–20 ft.	10 to 25 sec.	5 or 12 yrs	No	2 to 4–A and 10 to 60– B:C
	Stored Pressure or Car- tridge	17 to 30 lbs.	5–20 ft.	10 to 25 sec.	5 or 12 yrs.		3 to 20 A and 30 to 80–B:C
	Nitrogen Cylinder or Stored Pressure	50 to 300 lbs.	15–45 ft.	30 to 60 sec.	5 or 12 yrs.		20 to 40–A and 60 to 240–B:C

## Notes.

# 6-108. Housekeeping as related to General Storage (29 CFR 1910.141)

a. General. Good housekeeping practices are es-

sential to safety as well as to efficient storage operations. Many potential accidents and fires are prevented when warehouses, storerooms, and out-

<sup>\*</sup>UL and ULC ratings as of December 27, 1974.

<sup>\*\*</sup>Carbon Dioxide extinguishers with metallic horns do not carry a "C" classification.

<sup>†</sup> Some small extinguishers containing ammonium phosphate dry chemical do not carry an "A" classification.

<sup>‡</sup> Certain pressurized types have special requirements for hydrotesting to comply with regulations of the US Department of Transportation.

Ci -10 10!

side storage areas are maintained in a clean and orderly condition.

- b. For all areas of storage. All areas of storage space will have the following housekeeping rules enforced:
  - (1) Provide adequate lighting.
- (2) Keep machines, equipment, and working surfaces clean and orderly.
- (3) Provide adequate tool storage and maintain in neat order.
- (4) Provide approved waste containers in sufficient number.
- (5) Remove and dispose of scrap and waste systematically.
- (6) Clean up work areas as soon as work is completed. Remove hazardous objects from floor or ground areas during work.
- (7) Remove broken straps, exposed nails, or wire from containers or unit loads.
  - (8) Allow eating only in authorized places.
- (9) Keep offices and rest rooms in orderly condition.
  - (10) Clean up immediately any spilled flam-

network and the plant to offer a sufficient

the state of the state of the second state of

an empty of vision on the most of that and use

- mable liquids, greases, or other dangerous or slippery substances from working floors or paved areas (fig. 6-1).
- (11) Use containers, pallets, and units of sound construction only.
- (12) Maintain proper and safe storage of hazardous packing materials such as excelsior, sawdust, wood cellulose, preservative liquids, and chemicals.
- (13) Provide ample space in aisles and work areas and avoid congestion.
- (14) Eliminate tripping hazards such as telephone, light, and power cables.
- (15) Place flammable waste (such as oily rags, steel wool, and sweepings of excelsior) in special covered metal containers and dispose of regularly. Ashes will be placed in noncombustible containers.
- (16) Store dunnage material in an orderly manner.
- (17) Provide regular inspections by supervisory personnel for unsafe conditions, unsafe acts, and cleanliness.

DOD 4145.19-R-1 15 September 1979



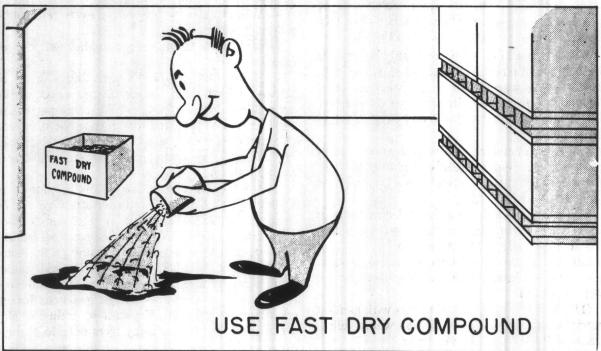


Figure 6-1. Maintain safe working areas.

(18) Maintain adequate emergency fire fighting equipment and access thereto.

(19) Remove ice, snow, or sleet from outside walkways, ramps, docks, and stairways, or spread sand, fine gravel, or fine cinders to prevent slipping. Usually ice is treated first with calcium chloride or sodium chloride to prevent the sand from blowing off.

c. For inside storage areas (additional precautions). The following precautions will be enforced for inside storage areas:

(1) All doors and windows in warehouses should be kept closed and locked when work is not being done near them or when not required to be open for ventilation.

(2) Except when authorized in offices or rest rooms, do not allow smoking within warehouses. Assure that "No Smoking" signs are posted in locations where smoking is not permitted.

(3) Maintain, as required, proper clearances at fire doors, near overhead sprinklers, and bulk-

heads.

(4) Floors should be kept dry.

(5) Keep hose, cable, and wire off floors and remove from walkways and work areas.

- (6) Parking of powered materials handling equipment in warehouses will be in accordance with the provisions of paragraph 6-112b(8)(b).
- (7) Store gasoline or other highly flammable liquids, in small quantities for station use only, in flammable type warehouses or in special nonflammable small structures, only when safe containers are used and in locations approved by the fire chief or safety officer.
- (8) Prohibit smoking near warehouse doors and entrances to prevent a discarded lighted cigarette or cigar being blown in through open doorways or under closed doors.
- (9) Use soap and hot water to clean decks and floors. Gasoline, naphtha, thinners, or other highly flammable materials will not be used.
- (10) Assure that floor elevation differences and other fixed stumbling and tripping hazards are clearly indicated.
- (11) Park two-wheel hand trucks with handles in upright position and in a location where fellow workers will not stumble over them.
- (12) Do not block or otherwise make established fire doors inoperative.
  - d. Wash and locker rooms. The following good

housekeeping conditions should be enforced for wash and locker rooms:

(1) Clean rooms regularly.

- (2) When a disinfectant is used, add directly to the wash water. A germicidal type disinfectant may be used in addition to, and not in place of, soap and water.
- (3) Clean floors and fixtures daily using soap and hot water. After cleaning, remove all soapy water from the floors.
- (4) Where salt water is used in closets and urinals, or where the water supply is likely to contain grit, a strainer should be connected to the supply line to prevent grit or dirt from reaching the valves. Clean the strainers regularly.

Note. TM 5-506, NAV FAC MO-125, AFM 91-2 give further guidance in wash and locker room care.

- e. Lockers. The following restrictions will be enforced for lockers:
- (1) Provide two lockers for each employee working with open containers of lead compounds or other poisonous or toxic materials, one for street clothes and the other for work clothes.
- (2) Old clothes and miscellaneous articles will not be stored on top of lockers.
- (3) Oil soaked or badly soiled cloths will not be stored in lockers.
- f. For outside storage areas (additional precautions).
- (1) Smoking prohibited. Smoking will not be allowed in immediate outside storage areas; within areas where lumber, gasoline, and other petroleum products are stored; and within specified distances of boundaries of such areas. Assure that "No Smoking" signs are posted in locations where smoking is not permitted.
- (2) Frequent inspections will be conducted in all open storage areas. Particular attention will be focused on stability of stacks of steel and lumber, potential causes of fire in lumber storage, leaking solvent, paint or petroleum product containers, bulging drums due to expansion of liquids under high temperatures, and other similar unsafe conditions. The storage area will be inspected for encroaching vegetation. Vegetation, including dry weeds, will be cleared away from outside storage area.
- (3) Life preservers at docks and piers. At docks and piers where depth of water is a possible hazard, should personnel fall overboard, life preservers will

be maintained at 200-foot intervals at all times. Life preservers and belts will be provided at work areas where personnel work over water.

## 6-109. Rules for Safe Storage

#### a. General.

- (1) All materials. All materials (palletized or unpalletized) will be placed and secured in a safe manner.
- (2) Pallet loads. All pallet loads will be squared to achieve a four-point level top. Superimposed loads will be set squarely and firmly to preclude rocking or tipping. When loads have voids, the perimeter units will be placed at or near pallet edges. (A four-point load is one which provides four points of contact, level with each other at top, at or near the four sides of pallet.)
- (3) Partially loaded pallets. Partially loaded pallets will be stored in pallet racks or at top of stacks. A full load will not be superimposed on a partial load and a large load will not be superimposed on a small load. Heavy loads will not be stored on top of a light load or on material which could be broken or damaged.
- (4) Nonsecured top loads. Nonsecured top loads of tall cylindrical units stacked on end, or any type of unit which has a tendency to lean or settle outwards, will be tied with cord or tape; or, in multiple course top loads, a piece of fiberboard or wrapping paper should be laid horizontally between the two upper courses of units. When stacked vertically, loads with cylinders of compressed gas will be strapped and collared.
- (5) Unusable pallets. Broken or damaged pallets will be replaced with pallets in safe condition.
- (6) Use of dunnage. Where it is necessary to stack heavy materials in open storage on muddy or soft ground or on asphalt-type paved surfaces that soften in hot weather, sufficient base dunnage of broad dimensions will be provided to preclude later tipping or settling of such material.
- (7) Tying load. In regions where strong winds prevail, noncapped or nonstrapped stacks of lumber or empty drums in open storage will be tied to prevent top units from being blown off.
- (8) Stacking clearance. Pallet loads will be stacked with 2 inches of clearance on all sides to prevent dislocation of adjacent units.
- (9) Storing of crushable containers. Crushable containers will have vertical supports placed in such a manner that weight of material stored above will

not be supported entirely by the containers. Unstable or odd-shaped units such as brooms; swabs, bales of rags, cloth, and oakum; coils of rope; or any item which may settle slowly in prolonged storage will have the top loads in proximity to each other in parallel rows. Each load will contact parts of four vertical columns or stacks of loads so that the containers may be tied at the top to prevent outward leaning of the stacks.

(10) Moving or lifting unstable units. To move and lift tall or unstable units on pallets, especially when heavy units could cause outward bowing of the pallet, the forks of the forklift truck will be spread as wide as possible and, when necessary, the units will be tied to prevent perimeter units from falling off the pallet.

(11) Securing loads placed on trailers. Loads of material placed on warehouse trailers for movement within the warehouse, between warehouses, to docks, piers, and loading platforms will be secured and tied, if necessary, to prevent material from falling off when turns are being made, when moving up or down ramps, or when crossing rail-road tracks or unlevel surfaces.

(12) Storing of cylindrical units. Cylindrical units stored in horizontal position will be blocked, nested, or separated by notched horizontal spacers, as applicable.

- (13) Corner markers. In bulk storage the use of corner markers at main and cross aisle intersections will be based upon necessity through local determination. The need for corner markers at main and cross aisle intersection should be limited to those intersections where operating materials handling equipment may damage containers or material in storage. Corner markers are not required at the main and cross aisle intersections where storage racks or bins are erected. Suggested corner marker construction is as follows and may be locally constructed:
- (a) Plywood of ½ to ¾ inch thickness is a good material for corner markers. If markers are for outside storage areas, exterior-type plywood should be used. Other products, such as sheet metal, hardboard, or particle board can be considered if cost effective under local conditions. The use of hinges to join the two wings of the corner markers will make it easier to move and store the markers when necessary.
- (b) Corner markers may be triangular, square, or rectangular. Triangular shapes are the most eas-

Shop 71 1105

ily identified shapes to denote corner markers, and are the most economical to construct. However, square or rectangular shapes offer more surface area for visual attention and physical protection against MHE and should be considered for use in bulk storage areas.

(c) Markers should not be less than 30 inches high or 24 inches wide (along one wing). No maximum size is established, but a square marker that measured 48 inches along each side would be considered a large size.

Note. Two or three inches could be removed from each sharp point to reduce splintering.

(d) Alternating yellow and black diagonal stripes 3–5 inches wide will be painted on each wing of the corner marker. The yellow should be color number 13538 or 13655, and should be the predominant color on the marker, i.e., if there is room for seven stripes, four stripes will be yellow and three stripes will be black. If corner markers are also used as row markers, it is permissible to have a suitable area on the markers reserved for a numbering system.

(14) Loose straps and protruding nails. Remove all loose straps or wire from units and loads in storage to prevent future injury of personnel when handling. All nails protruding from units, dunnage, or boards will be pounded level or removed.

(15) Storing of flammable packing materials. Provide closed bins for storing flammable packing materials pending use by the packing section.

(16) Clear aisles and exits. Keep aisles and exits clear at all times.

b. Floor load limits. Floor load limits will be observed whether a warehouse is of single or multistory construction. It is the Activity Civil Engineering Officer's duty to see that floor capacities are determined and signs posted in conspicuous places stating the capacity of all floors in that area. For safety standards concerning floor loads, refer to 29 CFR 1910.22, (d) (1).

c. Spontaneous combustion. Under special conditions, certain materials generate enough heat to ignite spontaneously. Oils, lubricants, and fats when absorbed by fibrous materials such as rags, waste, and paper are particularly dangerous. Other such items are coal, brooms, oakum, jute, hemp, green fiber, sisal, skins, rubber, metal dross and turnings, leather scrap, and items containing a ni-

trocellulose base. The chief cause of fire is poor housekeeping. Paper, scrap, excelsior, and other combustible packing materials must be placed in approved containers or structures. To combat combustion, proper ventilation must be provided at all times. Spontaneously combustible materials will be segregated from each other and from other flammable materials.

d. Adequate illumination in storage areas. Adequate lighting in storage areas decreases hazard of accidents and enhances workers' health and morale. Adequate lighting minimizes sight weaknesses and conserves manpower. Adequate lighting will be maintained at all times in working areas and traversed spaces. Such lighting will be free from glare caused by exposed bulbs or reflection from highly polished surfaces. Provision will be made for an adequate number of globes and reflectors to prevent glare. Lamps of proper voltage, wattage, and type for the area will be provided. Burned out globes will be replaced promptly. Globes, reflectors, and walls effecting the lighting should be kept clean at all times. Where painted areas are too dark to allow proper reflection, the walls should be painted a light shade. Lighting should be at recommended levels (see reference to documents of appropriate military department). Some types of fluorescent lamps are now approved for Class 1, Group D locations of National Fire Code (NFPA). Fluorescent lighting will never be used in flammable storage areas unless approved by Underwriters Laboratories for Class 1, Group D locations. Translucent roof panels may be used in single story buildings to aid in lighting and reduce lighting costs.

e. Safe handling and disposal of fluorescent lamps. The principal consideration in handling discarded fluorescent lamps is the need to minimize breakage. Lamps must be handled with care and whenever possible, used lamps should be stored in lamp cartons. Employees should not intentionally shatter lamps. This policy will prevent employee exposure to glass fragments and will preclude unnecessary contamination from the mercury contained in the lamps. In regard to the environment aspects of the disposal of fluorescent lamps, small quantities can routinely be disposed of in sanitary landfills. If disposal quantities exceed 200 lamps per week, specific disposal instructions should be requested from the appropriate military department.

# 6-110. Size of Storage Blocks, Clearances, Heights, and Limitations

- a. Floor area. The floor area or individual storage blocks for the combustible materials will not be limited except as indicated in chapter V, section 4.
  - b. Height of stacks.
- (1) General. Height of stacks should not be limited except as may be required for operations stability and to maintain clearances and floor load limits.
- (2) Below automatic sprinkler deflectors. The height of the stack below automatic sprinkler deflectors will be limited as follows:
- (a) When stack heights do not exceed 15 feet, 18-inch clearance will be maintained (A, fig. 6-2).
- (b) When stack heights exceed 15 feet, 36-inch clearance will be maintained (B, fig. 6-2).
- (c) When hazardous commodities are involved, regardless of stack height, 36-inch clearance will be maintained.
- (3) Below joists, rafters, beams, and roof trusses. The height of the stack below joists, rafters, beams, and roof trusses will be limited as follows (fig. 6-3).
- (a) When stack heights do not exceed 15 feet, 18-inch clearance will be maintained.
- (b) When stack heights exceed 15 feet, 36-inch clearance will be maintained.
- (c) Regardless of their height, stacks in nonsprinkled buildings will have a 36-inch clearance, except that reclaimed metal drums may be stacked within 14 to 20 inches from metal joists, rafters, beams, and roof trusses in nonsprinkled buildings of all metal construction and without electrical wiring.
- (4) Light or heating fixtures. Around light or heating fixtures, 18-inch clearance will be maintained.
- (5) Above level of roof truss. When supplies are stacked above the horizontal level of lower roof trusts members or beams, horizontal clearance between supplies and structural members or other installed devices will be 18 inches (fig. 6–3).
  - c. Clearances.
- (1) General. Clearances between stored materials and walls will not be maintained except as follows:
- (a) Substandard fire walls (less than 4-hour rating) clearance of 24 inches will be maintained (fig. 6-4).

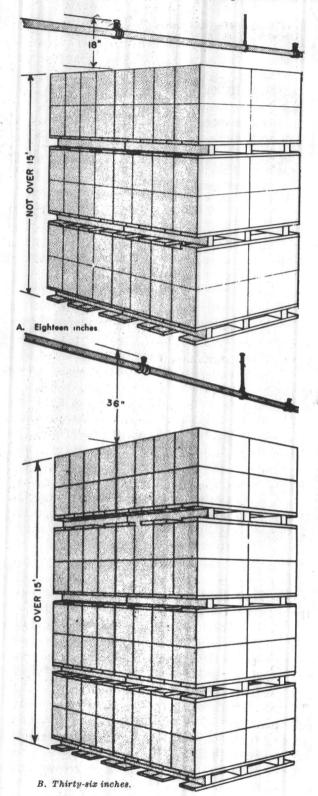


Figure 6-2. Overhead stack clearance at sprinkler head.

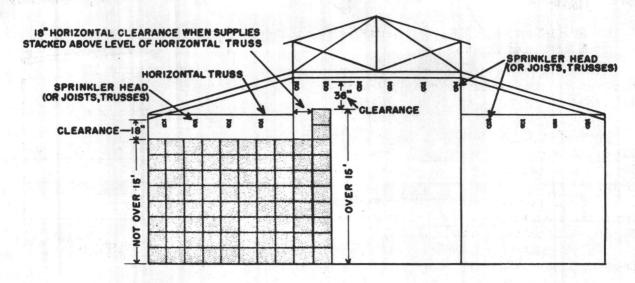


Figure 6-3. Clearance of material from sprinkler heads and trusses.

(b) When hazardous materials are stored in general purpose storage buildings, 24-inch clearance will be maintained (fig. 6-5).

(c) When nonhazardous materials are stored in general purpose storage buildings, except for personnel door or fire aisle, none (fig. 6-6).

(d) When materials stored are subject to excessive swelling, clearance usually not exceeding 12 inches (fig. 6-7).

(2) Clearance to maintain storage block limitations. When clearances are found necessary to maintain storage block limitations, such clearance between stacks will not be more than 4 feet in width for 2,000-square foot blocks or 6 feet for 8,000-square foot blocks.

(3) Clearance around fire doors. A 24-inch clearance will be maintained between stock and the fire door except for the portion of the fire door near the aisle. For this portion of the fire door, a 36-inch clearance will be maintained between stock and the fire door (fig. 6–8). Where a protective barricade is provided for the fire door, no clearance between stock and barricade is required.

d. Action in relation to storage of combustibles. The instructions will not be construed as directing the instigation of major rewarehousing programs to meet the requirements herein. As a general rule, compliance with these instructions will be effected in the course of normal warehousing/rewarehousing or attrition of stocks.

e. Aisles. Aisles will not be maintained for access to electrical equipment, fire fighting equipment, or

sprinkler valves, except where such equipment cannot conveniently be moved to a more accessible location.

f. Exceptions. Exceptions to the requirements may be authorized where such exceptions will result in increasing space utilization without materially increasing the fire risk. Requests for such exceptions, with adequate justification, will be submitted to the appropriate military department for review and approval. These requirements do not apply to materials stored in public warehouses under service contracts.

# 6-111. Signs and Color Code Markings in Relation to Safety in Storage

a. Posting of "No Smoking" signs. "No Smoking" signs of sufficient size to be seen from the far end of a normal size storage room or for a considerable distance in outside storage areas will be posted. The signs will be of adequate quantity and posted in storage areas at the following locations:

(1) Over doorways, on each side of fire walls.

(2) In center of each crossaisle in each storeroom, hanging double sided signs.

(3) In aisleway or lobby, hanging to face each passenger and each freight elevator entrance to warehouse.

(4) In addition, in "flammable storage" warehouses, on outside of building at each entrance, one at each end of building, and on each side of the building where there are no entrances.

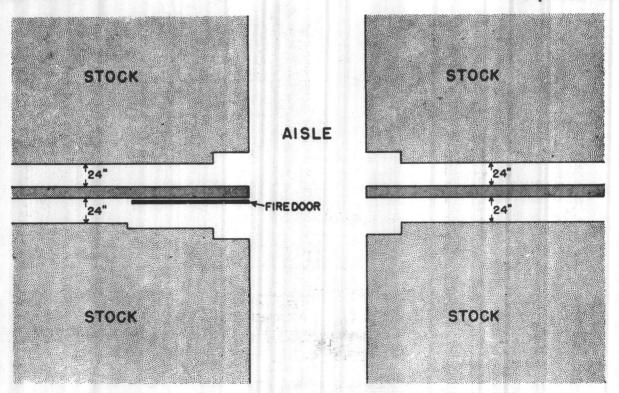


Figure 6-4. Stack clearance of substandard fire walls.

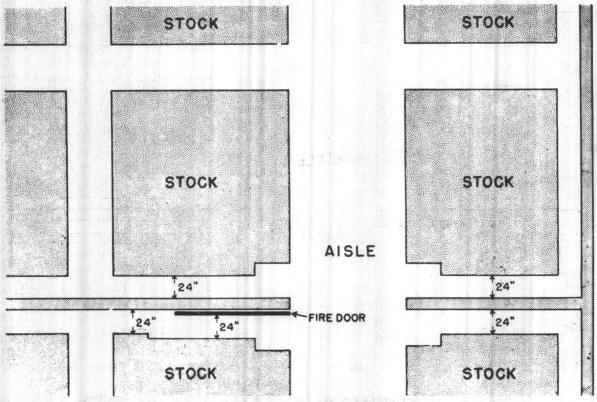


Figure 6-5. Stack clearance for hazardous materials.

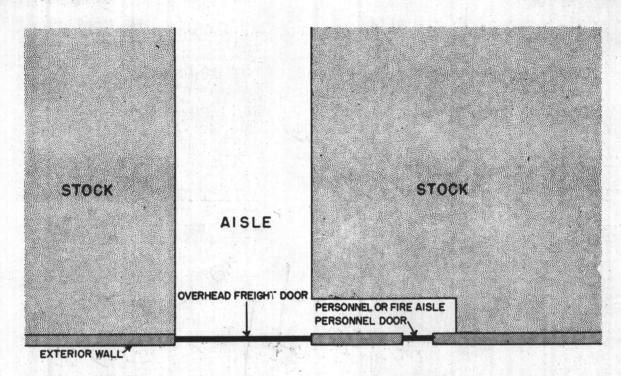


Figure 6-6. Stack clearance at exterior walls (nonhazardous materials).

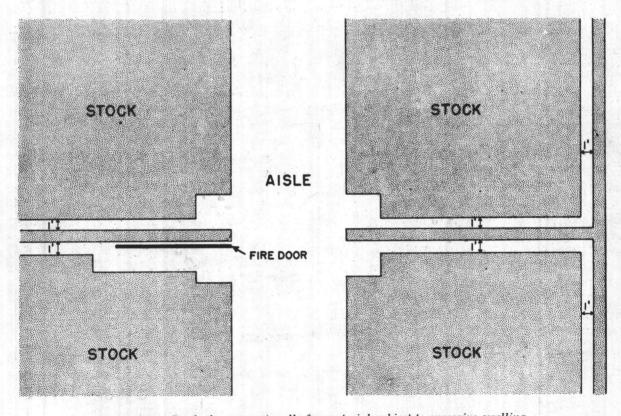


Figure 6-7. Stack clearance at walls for material subject to excessive swelling.

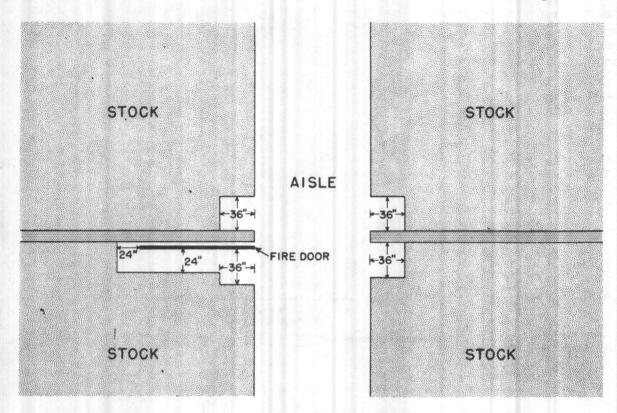


Figure 6-8. Stack clearance at standard fire walls and at fire doors (nonhazardous materials).

- (5) Unusually long or wide "flammable storage" buildings will have signs posted at the ends of side and the ends of building.
- (6) In aisleways of lumber yards, affixed to standards, posts or corners of stacks; in such quantity and manner as to be discernible from any direction of approach.
- (7) Outside areas for highly flammable materials, affixed to standards, posts or corners in aisleways so as to be discernible from any approach (areas where stores of gasoline, oils, compressed gases, acids, or materials which could prove dangerous if fire causes breakage or damage with subsequent exposure to other types of hazards, such as to danger of contact with acids and corrosives).
- (8) In all outside locations, in adequate quantity where any material not especially of fire hazard is stored.

Note. Specifications for "No Smoking" signs, other warning signs, and directional arrows are found in 29 CFR 1910.144 and 1910.145.

b. Directional arrows (OSHA 1910.145). Directional arrows will be placed in storehouses, in aisle-

ways, where fire extinguishers or other firefighting emergency equipment is not easily discernible from a reasonable distance in the aisleway. Directional arrows, indicating placement of firefighting equipment, will be adequate size to be seen from far ends of the aisles. Also, if required, such signs will be used in outside storage areas. Directional arrows indicating the location of fire exits which are not easily discernible will be similarly posted. In this instance, the lower portion of the sign will read "FIRE EXIT."

- c. Color code markings. The following color codes will be used except at oversea installations when such colors are not deemed feasible.
- (1) White markings. All floor markings which do not involve caution or hazardous areas will, when required, be painted white.
  - (2) Yellow markings.
- (a) All floor markings which involve caution areas or physical hazards will be painted yellow of color chip No. 13538 or 13655, FED-STD-595.
- (b) All materials handling equipment illustrated in paragraphs 4-201 through 4-214 (other

than storage aids) will be painted yellow color chip No. 13528 or 13655 except combat operational equipment which will be painted the color prescribed by the appropriate military service.

(c) Guard railings top and bottom stair risers will be painted with a 3-inch yellow stripe of color chip No. 13538 or 13655 under the nosing of each

tread.

- (3) Yellow and black striping. Yellow color chip No. 13538 or 13655 used with black paint to form stripes will be used to highlight particular hazardous environment by providing contrasting background as in the following examples:
  - (a) Large machinery and moving parts thereof.

(b) Pit and platform edges.

(c) Obstructions, dead ends, barricades and curbings.

- (d) Corner markers for stacks of stored materials striped in such a way as to form an inverted V (para 6-109a(13)).
- (4) Yellow and black checkerboard symbol. Eye hazardous areas will be marked by permanent screens, door jambs, and floor markings or by portable signs and screens. All of these will display a black and yellow checkerboard symbol and the phrase "Eye Hazard." Portable signs should be used to warn personnel of eye hazardous operations such as welding, acid handling, and other operations which generate flying particles.

(5) Yellow with black lettering. Small containers for flammable liquids will be painted red with the contents indicated in yellow lettering. The contents of fixed tanks will be identified with black lettering on background of yellow color chip No. 13538 or 13655. These liquids include gasoline,

naphtha, kerosene, alcohol, and solvents.

(6) Red. The locations of fire extinguisher and other emergency firefighting equipment and accessories will be identified by painting walls behind and floor below such equipment with paint color chip No. 11105, red, of FED-STD-595. Emergency stop devices or hazardous machinery or tools will be painted red for easy and immediate recognition.

(7) Exit Identification. Types and locations of exit identification media, when required, will be

prescribed by 29 CFR 1910.35, 36, 37.

(8) Special purple and yellow. Areas used for storage of items containing radioactive materials will be conspicuously marked with special purple (magenta) and yellow as indicated in Military Standard MIL—STD—1458. Placards bearing the standard

radiation symbol will be placed at each entrance to a radioactive storage area and around the perimeter so that at least one placard is clearly visible from any direction of approach, as shown in "Radioactive Commodities in The DOD Supply Systems" (DLAM 4145.8/AR 700–64/NAVSUP PUB 5012/AFM 67–8/MCO P4400.105).

# 6-112. Safety Practices for Powered Materials Handling Equipment (29 CFR 1910.176; 1910.178; 1910.179; 1910.180; 1910.181)

a. General. Safety practices for powered materials handling equipment will be followed and the operators will be trained in the use of equipment. The following regulations will be established:

(1) Operators will be trained under the prescribed training program established for the operation of such equipment and will pass all physical

and aptitude examinations required.

(2) The proper type of equipment will be used

for the specific job involved.

(3) Equipment will be of the correct rated load capacity for the weight of material to be handled.

- (4) Equipment will be properly serviced and maintained at all times to assure maximum safety and efficiency in its operation.
  - b. Operating safety rules.
- (1) Spark enclosed electric equipment (29 CFR 1910.178). Battery powered, EE type (spark enclosed) equipment will be used for handling and storing flammable liquids with a flash point of 100° F or lower in sealed containers. This type of equipment should also be used for handling other flammable liquids with flash points higher than 100° F as determined by the safety and fire prevention authorities. The need for an EX type of explosion-proof truck will be determined by the safety and fire prevention authorities of the individual military services.

(2) Equipment to be kept free of grease. Steering columns and electrical wiring on diesel, gasoline, or electric powered equipment must be kept free of excessive grease accumulation at all times.

- (3) Special protective equipment. Special protective equipment as cleared by the appropriate military department will be used when work involves explosives and ammunition.
  - (4) Fire prevention devices.
- (a) Sediment bowls and gas caps. Gasoline and gas-electric powered materials handling equip-

ment will be equipped with metal sediment bowls and gas filler caps with special safety features.

(b) Spark or flame arrestor. Internal combustion engine powered materials handling equipment with built-in devices to provide adequate safeguards against spark or flame will be used, when available, to handle, or to operate in storage areas containing readily ignitible materials such as cotton, jute, sisal, coca fibre or excelsior. When such MHE with built-in devices is not available, a spark or flame arrestor device, conforming to the requirements of military specification MIL-A-27302, may be attached to the muffler tail pipe. These devices require periodic inspection for accumulation of carbon deposits and, when necessary, will be removed for cleaning. Intervals between servicing of arrestors will vary with the condition of the engine and the type of operations performed. Other types of spark arrestors-devices may be used when authorized by the military service concerned.

(c) Fire extinguishers. The installation of fire extinguishers on powered materials handling equipment will be as prescribed by the military service concerned. Requirement considerations should include criteria described in paragraph 6-107.

(5) Overhead guards (29 CFR 1910.178). Forklift trucks of all types will be equipped with an overhead safety guard fabricated from steel. Exceptions are permitted only for forklift trucks where height of the overhead guard would deny entry of truck into work locations such as entry into vehicles being loaded or unloaded in receiving or shipping operations. In such cases, the forklift truck will be fitted with blocking devices that will not permit the forks to elevate the load higher than the operator's head. Guards and means of attachment will not interfere with the operation of the forklift truck and will not impede the operator in mounting and dismounting the truck.

(6) Area to be free of spilled gasoline. All spilled gasoline will be cleaned up before starting an engine. Gasoline will not be flushed down a drain unless a special drain designated for this purpose is provided. Gasoline may be flushed away in an outdoor area if temperature is above freezing and an ample supply of water is readily available and water does not create a possible hazard. If flushing is not possible or practicable, then approved absorbent material will be used to clean up the gasoline. Sawdust, wood shavings, or rags will not be used to clean up the spilled gasoline. Metal shovel, metal

grid, or other spark producing tools will not be used in the immediate area. When cleaning up spilled gasoline in excess of 1 pint, one person will stand by with a fire extinguisher while another person does the cleaning.

(7) Safety precautions by the operator. The following safety precautions are applicable for the op-

erator of materials handling equipment:

(a) The operator, as soon as he/she goes on duty, will inspect brakes, steering apparatus, horn, oil, gas, and water. Any defects noted will be reported immediately to the supervisor.

(b) The operator will refuse to use an improperly loaded machine or one which is not in safe

mechanical condition.

- (c) The operator will stop the engine and set the brake before getting off the machine, except when picking stock, in which case the brake will be set and the engine permitted to idle provided the operator remains in the immediate area of the vehicle.
- (d) Only licensed operators will be permitted to operate equipment (fig. 6-9).
- (e) The operator will inspect all loads to be moved; will not overload; will not move an unstable load; will avoid moving loose material; and will refuse to move an unsafe load or unload from an unblocked truck or trailer.
- (f) Operator will be trained in the use of all types of fire extinguishers and will ascertain their locations in the areas in which they are working.

(g) Operators will keep three truck or tractor lengths behind other vehicles.

- (h) The operator will face in the direction he/ she is traveling; will not back without facing in that direction.
- (i) The operator will slow down and sound the horn or gong before proceeding at cross aisle intersections, and when vision is obstructed by doors, corners, and elevators.
- (j) The operators will not attempt to repair or adjust any mechanical part of any materials handling equipment but will immediately report defects to the supervisors.
- (8) All equipment. The following safety operating rules are applicable to all materials handling equipment:
- (a) Fuel tanks on gasoline or diesel-powered equipment will not be refueled within warehouses or while the engine is running. Refueling of this equipment will be accomplished in a designated out-

side area at least 20 feet from the warehouse. The individual in charge of fueling operations will be responsible for ensuring that spilled fuel is thoroughly cleaned from the equipment before being driven into the warehouse. Any spilled fuel will be disposed of in accordance with (6) above.

(b) Powered materials handling equipment, not in excess of those assigned to the warehouse for normal operations, may be parked on covered truck or rail platforms or in warehouses under conditions as set forth below. The selection of either place, or some combination of the two, will be the responsibility of the installation commander.

1. In general purpose (nonflammable storage) warehouses, powered materials handling equipment may be parked in designated locations such as vacant space in receiving or shipping areas or any large vacant area that will provide the following suitable clearances:

- a. Minimum clearance of 10 feet will be maintained between the parked equipment and easily ignitible material such as loose combustible fibers in bales or crates.
- b. A minimum 5-foot clearance will be maintained between parked equipment and boxed items or other combustible material.
- 2. Aisles will not be used for parking materials handling equipment during nonworking hours. This equipment will not be parked where main, cross, or fire aisles, firefighting equipment, fire alarm boxes, stairways, elevators, or fire exits will be blocked or that firefighting operations would be hampered.
- 3. Warehouse areas used for parking materials handling equipment must be approved by local fire and safety personnel.
- 4. An oil absorbent compound, Federal Specification P-S-863 or equal, will be used under each piece of equipment parked, to absorb oil and grease drippings from leaks or other sources. A metal pan may be used in conjunction with the compound. Corrective action will be taken on equipment evidencing leakage.
- 5. Materials handling equipment may be parked in multistory buildings; however, gasoline or diesel-powered equipment must be parked on the

first floor and the provisions of 1 through 4 above apply.

6. Only spark enclosed or explosion-proof equipment may be parked in flammable storage buildings and the provisions of 1 through 4 above apply.

7. Gasoline or diesel-powered equipment should not be "warmed up" inside the building. After starting the engine, such equipment should be driven outside the building for the "warm up" period to minimize fumes and carbon monoxide.

8. Scheduled inspections must be made to ensure that powered materials handling equipment is parked in proper locations; that the equipment is free from accumulations of excess grease and lint; and that gasoline lines, tanks, oil seals, etc., are not leaking.

(c) A gasoline or diesel-driven machine will not be used in a building, unless the building is properly ventilated, or when air conditions create excessive concentrations of carbon monoxide (q be-

low).

(d) Forklift trucks or other materials handling equipment will not be equipped with a steering knob or extension to the gear shift lever.

(e) All powered materials handling equipment will be painted as prescribed in paragraph 6-

111c(2)(b).

c. Forklift truck safety rules (29 CFR 1910.178). The following safety rules are applicable to forklift truck operations (See figs. 6-9 and 6-10).

(1) Forklift truck operators will slow down at all cross aisles and other passageways; when entering or leaving buildings or warehouses, the operator will come to a complete stop at the entrance, sound horn, and proceed only when the way is clear.

(2) Under all travel conditions the truck shall be operated at a speed that will permit it to be brought to a stop in a safe manner (29 CFR 1910.178

(N) (8)).

- (3) Forklift trucks will not travel with the forks elevated more than 4 inches above the floor or ground but when parked the forks will be lowered and rest on the floor.
- (4) Stacks will not be bumped or pushed with the forklift trucks to straighten or move the stack.

Constituted by the analysis of the second second



Never permit unauthorized persons to operate fork trucks.




Sound horns or warning gongs at all blind intersections.



Don't <u>overload</u> your truck . . . lighten loads instead of counterweighting.



Don't descend ramps with load in front ... drive down backwards at slow speed.



Drive s-l-o-w-l-y over railroad tracks and rough surfaces.



Watch overhead clearance at doorway and cross beams...



Make sure brakes are holding before leaving your fork truck.



Check floor strengths carefully... don't risk fark trucks on weak floors.



Don't cut corners . . . watch your turns and prevent accidents.



Check bridge plates frequently . . . be sure they're secure.



Don't "jam" your brakes . . . skid marks are signs of bad driving.



Don't attempt "minor" repairs . . call a qualified repairman.



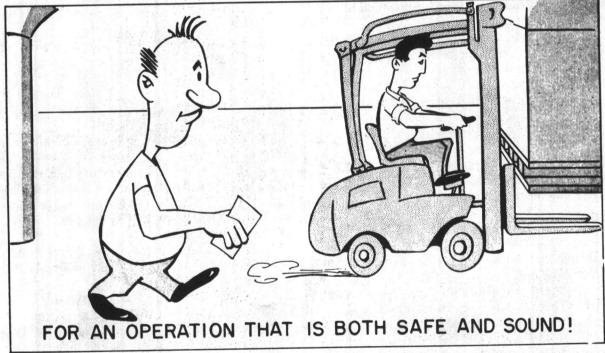


Figure 6-10. Only the operator should ride forklift trucks.

- (5) The load capacity plus the gross weight of each truck will be placed on the machine at a place that is visible at all times. The capacity will not be exceeded and counter-weighting of the trucks to increase lifting capacity is prohibited. Modifications which affect truck capacity or safe operations will not be performed without the approval of appropriate installation officials.
- (6) Personnel will not stand under the loads being hoisted or lowered.
- (7) Forklift trucks will be driven forward when transporting cargo up ramps or other grades and will be driven in reverse on downgrades.

(8) The mast will be tipped back when loads are transported.

(9) Forklift trucks will not be lifted by the overhead guard; lifting pads will be installed when required.

(10) For operations involving more than one fork truck, vehicles will be 20 feet apart, unless two

vehicles are transporting the same load.

- (11) Forklift trucks will not be used to elevate personnel, unless authorized by the supervisor. When lifting is authorized, a safety pallet will be used; the truck will not be moved; and the person being lifted will face away from the mast and remain clear of the hoisting mechanism.
- (12) Personnel will not be allowed to ride forks, machine, or load when the forklift truck is moving.

(13) Forklift trucks will be driven slowly over railroad or rough surfaces.

- (14) Standard load back rests (vertical package guard) will not be removed during operations except when facility characteristics, such as curved roofs, prevent use of the load back rest. Stacking of loads on the forklift truck lines will be controlled so that no more than one-third of the height of the top tier extends above the load back rest.
- (15) Overhead doorways and cross beams will be cleared by the forklift truck.
- (16) When the operator parks a forklift truck, he/she must check the brake to be sure the truck will not move.

(17) Operators of forklift trucks must not cut corners. This practice may result in upset loads, damaged goods, and serious injury to personnel.

(18) Bridge plates will be secured in position, either by being anchored or equipped with devices which will prevent their slipping and have sufficient strength to support fork trucks (See para h(2)(h) below).

- (19) Freight cars will not be towed or pushed with forklift trucks.
  - (20) Do not jam on the brakes or stop suddenly.
- (21) Operators will not attempt to repair fork trucks. Notify supervisors and request a qualified repairman to make repairs.
- (22) Do not allow personnel to counterbalance a load on a forklift truck by riding rear of machine, use a truck of greater capacity.

(23) Do not extend hand or arm through mast while in operation.

(24) Forklift trucks will be equipped with overhead guards.

d. Truck straddle carry safety rules. The following safety rules are applicable to truck straddle carry operation:

(1) Before starting daily operations, each truck straddle carry operator will check the vehicle thor-

oughly. (See chap IV sec 5).

(2) All loads placed on trucks straddle carry will be blocked sufficiently to prevent any part of the cargo coming in contact with the surface over which the cargo is being transported.

(3) In the vicinity of personnel, operators will

sound horn or other noise making device.

(4) All approved guards and safety devices will be kept in proper repair at all times.

- (5) Trucks straddle carry operated on public streets or highways will be equipped with all safety devices required by state laws.
- e. Tractor-trailer train safety rules. The following safety rules are applicable to tractor-trailer train operations:
- (1) Tractor operators will obey all traffic regulations at all times.
- (2) Trailers will be firmly coupled to each other and to the tractor before starting operations. The couplers will be inspected at each time of coupling. Safety chains will be attached when directed by the service agency concerned.
- (3) The maximum number of trailers permitted by the individual activity will not be expected in each train.
- (4) Loads being transported by tractor-trailer trains will be lashed, if necessary, to prevent material from falling. Operator will inspect all loads before moving the tractor-trailer train.
- (5) The trailer immediately behind the tractor will not have a load of such height as to obstruct the operator's view when he/she looks back to observe if the loads are riding safely.

(6) The speed limit of tractor-trailer trains within warehouses is 5 miles per hour and in outside areas in accordance with installation directives.

(7) When leaving or entering buildings, operators will come to a complete stop, sound horn, and

proceed only when the way is clear.

(8) Railroad tracks and unlevel roadways will be traversed at reduced speed, to reduce jarring of material, and at an angle (fig. 6–11).

(9) Tractors will not be used to push or pull rail

cars.

- f. Warehouse cranes safety rules. The following safety rules are applicable to warehouse crane operations: (29 CFR 1910.180)
- (1) When entering or leaving warehouse, crane boom must be lowered to clear doorways and other overhead obstructions.
- (2) The weight of crane and load must not exceed floor load limits.
- (3) Prior to actual turning of the crane, operator must use extreme caution to swing the crane boom sufficiently to avoid posts and stacked material.
- (4) Aisles must be free of refuse; obstructions which suddenly raise one side of crane will cause the suspended crane load to swing, endangering material.
- (5) Suspended loads will be carried as high as possible on the crane line, without fouling topping gear, in order to reduce swinging of load. Boom will be as near perpendicular as possible.

(6) Before moving or lifting the load, the operator will ascertain the approximate weight of load to be moved in relation to crane capacity.

- (7) Before moving the load the operator will determine what is to be done, where load is to go, and route to be traversed.
- (8) When operator leaves the crane, a crane load will never be left suspended.
- (9) Sling lines will be securely attached, spread, and centered in relation to the load and, if necessary, properly padded at edge crossings to assure safety and protection to material.
- (10) Ditches, railroad tracks, and other recessed or raised crossings will be crossed at right angles to prevent undue swing of load.

g. Carbon monoxide.

(1) Characteristics. Carbon monoxide, a colorless, odorless, toxic gas, is contained in varying amounts in the exhausts of almost all internal combustion engines. An engine with a rich mixture pro-

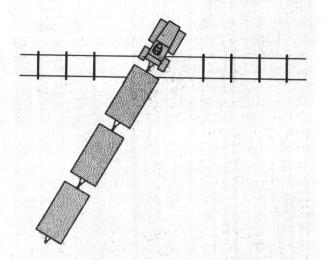


Figure 6-11. Drive slowly over railroad crossings.

duces far more carbon monoxide than an engine with a lean mixture. When a cold engine is fired, the development of carbon monoxide is much greater than when firing an engine that is warm. Carbon monoxide replaces the oxygen in the blood stream, in proportion to the amount being breathed; until the concentration has built up to a considerable amount, ill effects are not experienced. Most persons may breathe each working day, without harm, air in which the concentration increases to 50 parts of carbon monoxide per million parts of air (time weighted average). Above that level, headaches start, and at higher concentrations, dizziness, lassitude, and general weakness are experienced. Extreme concentrations of carbon monoxide are fatal.

(2) Ventilation. When gasoline-driven equipment is used in confined areas where adequate natural ventilation is not available, artificial ventilation must be supplied to prevent the average concentration in any space exceeding 50 parts of carbon monoxide per million parts of air (time weighted average). Such ventilation may be obtained from ventilating systems, by portable blowers, or both.

(3) Rate of development. The amount of carbon monoxide developed by gasoline-driven trucks is dependent on the size of the engine, the adjustment of the carburetor, the condition of the spark plugs, and timing of the distributor. An average engine in normal operation will give off 1 cubic foot of carbon monoxide per hour per horsepower.

(4) Atmosphere tests. Since the value of 1 cubic foot of carbon monoxide generated per hour per horsepower is only approximate, decisions on the

amount of ventilation required for various operations should be determined by tests in working areas with appropriate carbon monoxide detectors. Such tests should be made regularly, since conditions of engines may change, and it is difficult to determine the actual amount of ventilation being furnished, particularly where natural ventilation is used.

(5) Safety precautions. Gasoline engines in trucks should be turned off when not in use. Gasoline engines should not be permitted to idle in standby service for longer than 30 seconds except as provided in b(8)(c) above. Gasoline engines should be checked at frequent intervals with a motor analyzer and readjusted for maximum performance and minimum carbon monoxide generation. Personnel will not be permitted to work in buildings where concentration of carbon monoxide is greater than 50 parts per million parts of air (time weighted average).

h. Auxiliary equipment.

(1) Exhaust gas purification devices. Exhaust gas purification devices of various types, designs and effectiveness are available from commercial sources as a component of an exhaust pipe or as a muffler for attachment to petroleum-fueled powered materials handling equipment and vehicles. These devices are designed, when properly attached and maintained, to prevent accumulation of lethal, toxic, and irritating exhaust gases in excess of the permissible limits established by the American Standards Association Code for Allowable Concentration of Carbon Monoxide. Normal control measures to protect health of personnel against such gases will not be relaxed when materials handling equipment, with exhaust gas purification devices attached thereto, are operated within enclosed and unventilated areas. Carbon monoxide detector tubes or direct reading instrumentation should be obtained and used by trained personnel to measure carbon monoxide levels. Use of petroleum fueled MHE with exhaust gas purification devices is warranted in high density confined operations only when carbon monoxide poisoning is a hazard and when battery-powered type is not available. When high density operations are performed, in closed warehouses using petroleum fueled MHE, carbon monoxide constant measuring instruments or indicators, fixed to area walls or mounted on mobile equipment, will be used in addition to the Detector Kit and Indicator Tube. Exhaust gas purification

device(s) will be procured and used only when authorized by the appropriate authority of the military service having jurisdiction.

(2) Bridge plates. Information on bridge plates (dockboards) is contained in 29 CFR 1910.30 and 1910.178. A bridge plate must be strong enough to support the equipment and load which traverses it and long enough to bridge the gap it spans with adequate support area at both ends. The length, especially, is important when the floor of the platform is lower or higher than the floor of the car or vice versa. Drive slowly when mounting or driving over the bridge plates in rainy weather, or when icy. Bridge plates will be—

(a) Equipped with stops at both ends near the edges of the platform or the car or truck to

prevent plate from sliding.

(b) Equipped with adjustable stops of different lengths permanently located in channels or slots. Use of steel pins as stops is not authorized.

(c) Of sufficient length to provide support of

approximately 8 inches at all times.

- (d) So constructed to provide handloads for manually lifting or other means for lifting by fork truck.
- (e) Constructed with a rough or checkered surface to reduce skidding or slipping.
- (f) Equipped with safety curbs to prevent fork truck runoff.
  - (g) Marked to indicate the load capacity.
- (h) Checked frequently during lengthy loading/unloading operations.

# 6-113. Safety practices for Nonpowered Materials Handling Equipment

a. Hand trucks.

(1) Two-wheel hand truck. The two-wheeled hand truck will not be used to transport units of material heavy enough to cause undue strain or risk to personnel.

(2) Barrel hand truck. Barrel-type hand trucks should be provided for personnel to move drums, large kegs of material, or other cylindrical units to prevent rolling or slipping of the material causing possible damage to material or injury to personnel.

(3) Hand trucks with sparkproof wheels or rims. Hand trucks with sparkproof wheels or rims will be used, only for work requiring such equipment, in areas or rooms where materials of highly flammable, combustible, or explosive nature are stored or handled.

(4) Nonpowered hand pallet truck. Nonpowered hand pallet trucks will not be used to move heavy loads.

b. Use of crowbar. In areas or rooms where highly flammable, combustible, or explosive materials are stored, a crowbar or pinch bar will not be used to pry or move material as sparks may cause fire or explosion.

c. Standard safety pallet (29 CFR 1910.178). The standard safety pallet (described in para 4-214) and not the ordinary pallet will be used with forklift

trucks in the following operations:

(1) To elevate personnel to a sufficient height above the floor of the warehouse for the purpose of storing material on an elevated pallet or when removing individual items from elevated pallets.

(2) To elevate personnel performing maintenance work on the inside or outside of warehouses. Personnel will not be elevated on the forks of the forklift truck without the use of the safety pallet.

- (3) Whenever a truck is equipped with vertical only, or vertical and horizontal controls elevatable with the lifting carriage or forks for lifting personnel, the following additional precautions shall be taken for the protection of personnel being elevated:
- (a) Use of a safety platform firmly secured to the lifting carriage and/or forks.
- (b) Means shall be provided whereby personnel on the platform can shut off power to the truck.
- (c) Such protection from falling objects as indicated necessary by the operating conditions shall be provided.
- d. Fork extension. The fork extension added to forklift trucks may reduce the load carrying capacity of a truck rated at 24-inches load center ap-

proximately 20 percent when handling 60-inch long loads (chap. IV). The fork extension should be used only in handling loads of relatively light weight.

e. Ladders. (29 CFR 1910.25; 1910.26; 1910.27;

1920.29)

(1) Construction. The regular rung-type ladder will have the bottoms of side rails sheathed or covered with safety nonskid pads of corrugated or skidproof rubber, duck, or other skidproof material. Nails or screws securing such pads will be countersunk. The pads should be inspected often and replaced when considered unsafe. The regular rungtype ladder must be constructed so that the rung ends set into notches in the rails. Only stepladders with safety hand and guard rails should be used when such ladders are necessary. Three sides of the top step of platform-type stepladders will be protected with guard rails. Stepladders should have only two wheels to preclude unsafe movement of such a ladder when in use. Wheels should be attached to back legs.

(2) Use.

(a) Position. For safe use, the ladder must set on a firm, solid, and level base with the top end resting squarely against the wall or other support. The distance of the foot of the ladder from the base of the wall support should be approximately one-fourth of the length of the ladder.

(b) Defective ladders. Ladders with cracked rungs or defective or cracked rails will not be used.

(c) In front of doors. A ladder will not be placed in front of a door unless the door is locked, or otherwise blocked, barricaded, or guarded.

(d) Stock picking or storing. Ladders should not be used when stock picking or storing in bin racks; the stock pickers cart described in chapter IV will be used (fig. 6-12).

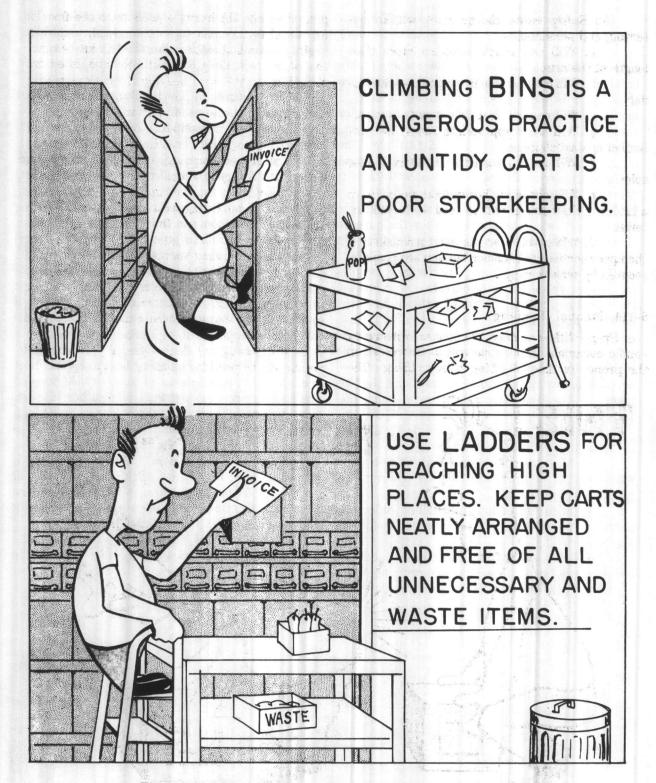


Figure 6-12. Use ladders for climbing. Keep stock picking cart neat.

soles.

(e) Safety rules. Safety rules will be observed, and personnel—

1. Will not reach sidewise more than length of the arm.

2. Will climb down and reposition the ladder.

3. Will position feet firmly on the rungs.

4. Will wear appropriate shoes, for protection against slipping.

5. Will clean all grease or oil from shoe

 Will not carry heavy units up or down a ladder; forklift trucks will be used to elevate material.

7. Will assure that the bottom brackets of the upper section of extension ladders are properly secured by pins or rungs.

## 6-114. Manual Handling

a. Proper lifting method. Persons who manually handle materials of any type will be instructed in the proper method of lifting heavy objects. The

proper way to lift heavy objects from the floor is for the lifter to stand close to the load, with feet slightly apart and solidly placed. With knees bent, the object will be grasped firmly and lifted by straightening the legs, keeping the back as nearly vertical as possible (fig. 6-13). When lifting from an elevated surface, the object will be brought as close to the body as possible to avoid an unbalanced position. With straight back the lifter will keep the load close to the body and will avoid carrying a heavy load a long distance without resting. Load will be carried in such a manner that full view is permitted. When lifting with another person, both persons should start and finish the lift simultaneously to prevent undue strain on either person. Persons with existing hernias, or those who have a history of previous back strains, will be assigned to duties that do not require heavy lifting. Lifting or lowering operations performed by several persons will be done on signal from one individual, and only after everyone's feet, hands, and other portions of the body are clear. Generally, mechanical means will be used for handling heavy objects.

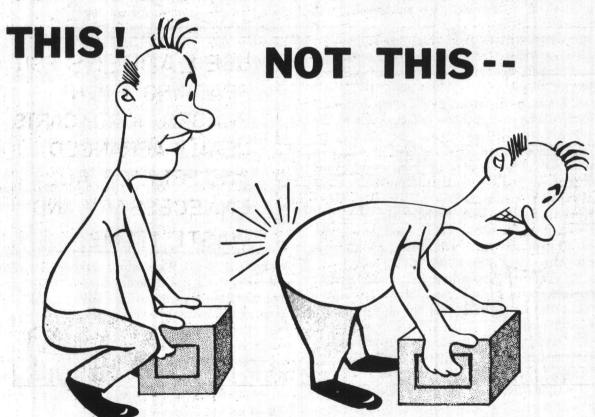


Figure 6-13. Manual lifting and carrying.

b. Precautions for manual handling. Safety precautions which apply to manual handling of materials include the following:

(1) Protective clothing or accessories, including gloves, face shields, goggles, and safety shoes will be worn as prescribed in paragraph 6–105.

(2) Finger rings will not be worn.

- (3) Material will be examined for sharp edges, protruding points, weakened places of ropes, or other factors which may cause injury to personnel. These defects should be corrected before proceeding.
- (4) All stacked cargo and materials will be arranged in an orderly manner for convenient and safe handling.
- (5) Defective or broken strapping on cargo will be removed, repaired, or replaced. Face shield or goggles and proper gloves will be worn when cutting steel strapping, and personnel will stand out of the way of a snapping line of cut strapping.

(6) Drums will be rolled by pushing with the hands, not the feet.

nands, not the feet.

- (7) Material will not be thrown from elevated places to the floor or ground. Use suitable lowering equipment.
- (8) Wheelbarrows, hand trucks, and other similar devices will not be overloaded. These devices will be pushed, not pulled except when going up inclines.
- (9) Ropes, used for carrying, towing, or for life or scaffold lines which have defects, will be replaced.
- (10) Chisels, hammer faces, and pliers which have burred, chipped, or badly worn working surfaces or edges will be replaced to prevent serious injury to eyes, hands, or face.
- (11) Appropriate tools will be used for each job. For example, nail pullers will be used for opening boxes, strap or wire cutters for cutting metal strapping or wire, and hammers for driving nails.

(12) Plugs will be disconnected when electrical power tools are not in use.

- (13) Sharp edge tools will not be carried unshielded in pockets.
- (14) Hand operated trucks, dollies, and similar equipment will not be parked in traffic lanes or roadways.
- (15) Cylindrical objects will be blocked to prevent rolling.
  - (16) When working at high elevations a lifeline

and safety belt will be worn if other safeguards are impractical.

(17) Personnel will not reach around, over, or under the moving part of any machine.

## 6-115. Safety in Loading and Unloading Railroad Cars/Trucks and Trailers

a. Railroad cars. (Reference 29 CFR 1910.178)

(1) Opening doors. Boxcar doors should be opened with a car door opener to prevent backstrains and injuries to personnel. Also, this will prevent material loosened in transit from falling and striking personnel.

(2) Checking contents. Check contents of railroad cars for unsafe loads before starting to unload. Check empty railroad cars for weak or broken floor boards and have repaired. Lay steel plate in doorway area while loading with materials handling equipment. When unloading cars, steel plate will be used over weak or broken floors.

(3) Gondola cars. When loading or unloading gondola cars with cranes, all persons must be removed from the immediate area before the lift is made. Unless required for rigging purposes, personnel should not be permitted to stand on top of the car while the load is being raised, lowered, or swung into position.

(4) Hopper bottom cars. Personnel will not be permitted to work inside hopper bottom cars while material is being unloaded. Personnel will use a hopper car safety wrench to open and close hopper car doors to prevent backstrains and injuries from falling materials.

(5) Bridge plates. Bridge plates between platforms and boxcars will be secured in position, either by being anchored or equipped with devices which

will prevent slipping.

- (6) Moving rail cars. Rail cars will not be pushed or pulled with fork trucks or warehouse tractors (fig. 6–14). Wheel stops or other recognized positive protection shall be provided to prevent railroad cars from moving during loading or unloading operations. Positive protection shall be provided to prevent railroad cars from being moved while dockboards or bridge plates are in position.
  - b. Trucks/trailers (Reference 29 CFR 1910.178).
- (1) Check flooring. Check flooring for breaks and weakness before they are driven onto with fork truck.
  - (2) Wheel chocks. Ensure that wheel chocks are



Figure 6-14. Fork truck safety tip (towing freight car).

positioned at the rear wheels of the truck or trailer to prevent them from rolling while being boarded with fork truck.

(3) Bridge plates. See paragraph a(5) for rail car loading/unloading.

(4) Trailer safety jacks. Safety jacks may be necessary to support a semitrailer to prevent upending during the loading or unloading when the trailer is not coupled to a tractor.

## 6-116. Buildings and Physical Equipment

a. Safety related to stairways (29 CFR 1910.23). Safety precautions which apply to stairways include the following:

(1) Unless steps in stairways are made of wood,

the steps will have antislip treads.

(2) Stairways over 88 inches wide will have an auxiliary handrail in center and one on each side; over 44 inches wide but less than 88 inches will have a handrail on each side; or 22 inches to 44 inches wide will have at least one handrail.

(3) Stairway openings will be guarded with railings which measure 42 inches from floor to top of

railing.

- (4) Stairway handrails will be not less than 30 inches nor more than 34 inches from top of railing to surface of the tread at the face of the riser. Intermediate railings or suitable screening will be provided from top of handrails and guard rails to floor or treads.
- (5) Stairways will be well lighted and maintained clean, dry, and free of slippery substances, refuse, or stored material.
- (6) Personnel will walk, not run, up or down stairways and will use handrail.

b. Safety concerning doors in warehouses. Safety precautions which apply to doors include the following:

(1) Doors will be opened slowly. When opened suddenly, a door can cause serious injury to personnel near to or approaching from the opposite

side.

(2) Clear vision panels of average eye-level height are desirable in solid doors; especially doors which are used considerably.

(3) Loose doorstops will be kept in a safe place

when not in use.

(4) Door spring or patented door closers will be properly tensioned or adjusted to prevent door closing too rapidly.

(5) Only one person will enter a section of a

revolving door.

(6) Door hardware must be kept in good repair.

- (7) Safe and vault doors must be closed carefully. Do not lock a vault door nor spin the combination lock until assured that no one is inside.
  - c. Safety concerning elevators.

(1) Passenger. Safety precautions which apply to passenger elevators include the following:

(a) Qualified inspectors will inspect passen-

ger elevators quarterly.

(b) Any elevator found defective will be

plainly tagged and not used until repaired.

- (c) All elevators will have signs posted indicating the carrying capacity. The safe capacity for passenger elevators will be expressed in terms of maximum number of passengers to be carried.
- (d) Rated capacity of elevators will not be exceeded.
- (e) Elevators will be operated only by trained operators.
- (f) Caution will be exercised by anyone entering or leaving elevators, by watching their step, and by not boarding or debarking while elevator is in motion.
- (g) Passengers will not be permitted in an elevator unless it is specifically authorized as a passenger-carrying elevator.

(h) An elevator which is not authorized for

passengers will be posted to that effect.

(i) A self-service elevator must be in proper position to board or debark. Do not enter or leave until doors are opened fully.

(j) Smoking will not be permitted in any el-

evator. Signs to that effect will be posted.

(2) Elevator operators. Safety precautions which

apply to elevator operators include the following:

(a) Operators will not converse with passengers except for business reasons.

(b) Operator will not eat or read while on duty.

(c) Operator will keep clear of shaft way.

(d) Operator will assure that shaft way doors or gates are closed and locked before car starts and that car gates are closed while running.

(e) Operator will keep passengers away from open edge of platform if car gates are not provided.

(f) Operator will assure that car has completely stopped at the landing level before doors and gates are opened.

(a) When an elevator is taken off duty or service is suspended during normal working hours, a sign stating "Car not working" will be displayed.

- (h) If car will not start it may be overloaded, in which instance operator will remove the load. If elevator still will not move the person in charge will be notified.
- (i) If car will not stop, operator will not attempt to jump off.
- (j) If car stops suddenly between floors operator will call for the person in charge and operate car only at his/her direction.
- (3) Freight elevators. Freight elevators which are not authorized to carry passengers will be marked to that effect. Freight elevators will be inspected semiannually by qualified inspectors. The safe capacity of freight elevators will be expressed in pounds. Operator will assure that the locking device and hoisting attachments are in place before any heavy, concentrated load (such as a safe) is moved on or off the platform. The operator will not raise the car more than a few inches at a time until the locking device has been withdrawn. Safes or other heavy objects, near the capacity of the elevator in weight, will be loaded in center of car and extreme caution will be exercised. Only the operator will be allowed in the car during such procedure.
- (4) Adjustable platform ramps. Where adjustable ramps (either power or mechanically operated) are installed in loading and unloading platforms, such ramps will be equipped with a safety device which can securely lock the ramp in a fixed position. The safety device so used will be of such design that the load capacity of the ramp when in the locked position will be sufficient to support the specified capacity of the ramp or platform. Such ramps or

platforms will be periodically inspected by competent personnel.

## 6-117. Flammable Materials

a. General.

(1) Classification. (See chap. V, Sec. 4.)

(2) Storage in fire resistant buildings. All safety precautions and procedures will be in accordance with the publications of the appropriate military department. Materials having a flash point between 100° F and 200° F (excluding drummed petroleum products in larger amounts than those stored as station supplies) are best protected when placed in a special fire resistant building with additional firefighting equipment and fire walls.

(3) Storage in general warehouses. Rules applicable for storage in general warehouses are as

follows:

(a) Use end bays when possible.

- (b) Handle containers carefully to avoid breakage.
  - (c) Remove and destroy leaky containers.
- (d) Maintain accessibility to stack interior for fire fighting purposes.
- (e) Assure that proper ventilation is maintained for materials which give off flammable vapors.
- (f) Avoid any location where spilled liquids may come in contact with sparks or flames.
- (g) Use spark enclosed electric materials handling equipment.
- (h) Consult catalogs of appropriate military departments or directives, as necessary, for items of high flash point or items which are fire hazards.

(i) Post "No Smoking" signs and strictly enforce no smoking regulations.

- b. Flammable liquids with low flash point (below 100° F).
- (1) Types. Flammable liquids with low flash point (below 100° F.) include-
- (a) Gasoline and other petroleum products including xylene.
- (b) Certain solvents, including benzine or benzol and other solvent cleaners.
  - (c) Certain chemicals.
  - (d) Diluents.
- (e) Stencil paints, marking inks, and printers ink.
- (f) Certain thinners, primers, compounds, varnishes, lacquers, liquid cement, and wax, acetone, alcohol, ether and naphtha. These materials

will be stored in fireproof buildings or in open sheds.

(2) Safety precautions if stored in standard flammable storage buildings. Safety precautions when materials are stored in standard flammable storage buildings are as follows:

(a) Sections of the buildings will be separated

by fire walls.

- (b) All doors and windows that will assist ventilation will be kept open during work operations therein.
- (c) Unauthorized persons will not be granted admittance.
- (d) Any noticeable odor of an unusual nature must be investigated at once.
- (e) Combustible gas indicator of proper type must be used where gases or flammable materials are stored when spills, leaks, or vapors occur, to determine if the area is safe for workmen.

(f) Suitable firefighting equipment must be

available and in working condition.

(g) Spark inclosed materials handling equipment only will be used for handling purposes where

powered equipment is required.

(h) Only explosion proof switches, motors, relays, and electric lights are to be used. Fluorescent lights, unless approved for Class I, Group D locations, will not be used in buildings or areas where flammable materials are stored. In the vicinity of gasoline and gases, portable lights of all

kinds, including flashlights, will be explosion proof. In areas in the vicinity of fluid oils such lights will be vaporproof.

- (i) "No Smoking" rules must be enforced within and in the immediate vicinity of flammable buildings. "No Smoking" signs will be posted within and on the outside of the buildings.
- (j) Containers will be handled carefully in such buildings.
- (k) Leaky containers will be removed and repaired or destroyed.
- (l) Oxygen gas will be stored in separate rooms from other compressed gases and other highly flammable material (fig. 6-15).
- (m) Certain compressed gases in cylinders such as acetylene, chlorine, sulfur dioxide, and liquified petroleum or fuel gases (excluding ammonia) will be stored upright to prevent damage to valves and to prevent danger when gas is used.
- (n) Valves on all cylinders containing compressed gases will be closed tightly. Cylinders on which valves cannot be closed to prevent leaking of gas will be removed to outside storage and tagged for subsequent repair (see A–F, fig. 6–16, for additional precautions).
- (o) Cylinders, valves, regulators, and filters on cylinders of oxygen gas will be kept free from oil and grease; never lubricate (C, fig. 6–16).

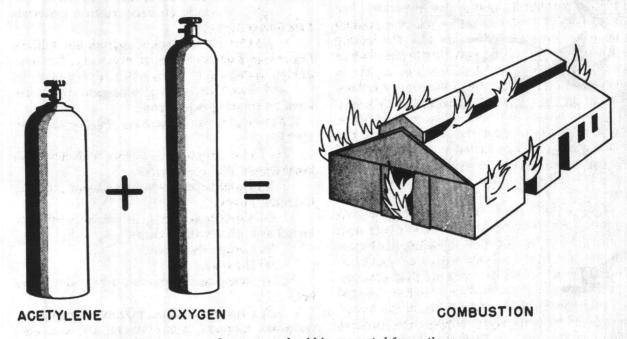



Figure 6-15. Oxygen gas should be separated from other gases.



A. Thaw out frozen cylinder valves in a warm room.




B. Never use oxygen as substitute for compressed air.

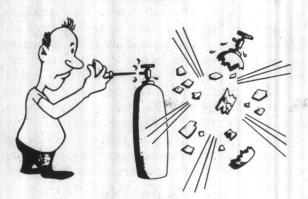

C. Do not oil or grease cylinder valves or regulators.



D. Guard against leaking valves on gas cylinders.

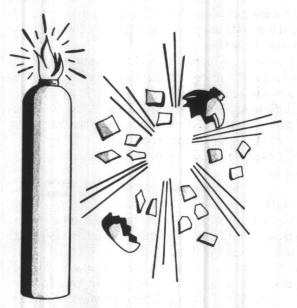

E. Store oxygen gas separately from a combustible gas or flammable material.

Figure 6-16. Cylinders.

- (p) Self-closing metal receptacles will be provided for all discarded oily waste, rags, or mechanics clothing.
- (q) Never use oxygen, compressed air, or any other compressed gas for blowing dust off the body or clothes.
  - c. Drummed petroleum products.
- (1) Description. For description of the characteristics of drummed petroleum products see MIL-HDBK-201.
  - (2) Precautions.
- (a) Spark inclosed electric equipment. Spark inclosed electric materials handling equipment will be used for handling aviation and automotive gasoline. MHE used for this purpose will conform to criteria in 29 CFR 1910.178.
- (b) Gasoline-powered equipment. Gasoline-powered equipment when used in handling drummed petroleum products will be equipped with such fire prevention devices as prescribed in paragraph 6–112b(4) and 29 CFR 1910.178.
- (c) All equipment. Steering columns and electric wiring of powered materials handling equipment will be kept free from excessive grease accumulations.
- (d) Posting of signs. "No Smoking" signs must be posted and smoking prohibited in or around the area.
- d. Buildings containing flammables. Buildings or areas containing flammables will be provided with appropriate portable fire extinguishers in adequate quantities placed at strategic locations for emergency action.
- e. Loading of containers. All containers of flammable gases and liquids will be affixed with appropriate diamond shaped red labels, in accordance with Title 49 CFR, section 173.404 at the time container, cylinder, or drum is filled or when labels are missing from shipments received.
- f. Other flammable material constituting a fire hazard.
- (1) Solid flammable materials. Solid flammable materials such as paper, textiles, rubber hose, gaskets, or other rubber products including rubber packing, rope, oakum, fiber, special lumber, and other nonliquid flammable items will, when possible, be stored in a sprinklered warehouse with adequate fire protection such as the provision of appropriate fire extinguishers in adequate quantities, the provision of fire aisles, where necessary, the installing of "No Smoking" signs in conspicuous



F. Do not expose to open flames of any type.

Figure 6-16. Cylinders—Continued.

places, the strict conformance to no smoking regulations by personnel, proper ventilation, and the use of appropriate types of powered materials handling equipment.

- (2) Liquid flammables. Liquid flammables such as acids, flammable chemicals, preservation liquids of flammable nature, which when subjected to water or flames become fire hazards, will be stored separately in small buildings or areas; or in special containers when required; and as designated herein, on the containers, in special instructions, or in directives.
- (3) Flammable scrap and rubbish. Flammable scrap materials will be stored in open storage areas. Rubbish will be burned in special outside areas, in incinerators, or disposed of otherwise.
- g. Certain fire hazardous materials. Certain acids, chemicals, and other compounds, although not flammable when sealed or kept in tightly closed containers, constitute a definite hazard when stored near flammable materials where the containers could be accidentally broken open or become unsealed; or when stored in small quantities in packing rooms and shops for intermittent use and only opened from time to time. Such materials will be stored in separate small buildings or areas, when practicable. The materials will be isolated when stored in the vicinity of flammable materials. Special care must be taken to reduce possibility of breakage, accidental opening, or careless covering or stoppering of the containers. Many fire hazardous materials must be kept in cool dry places, or in special containers such as glass, or earthenware, or lead. Such materials include-

- (1) Chromic, nitric, and sulfuric acids.
- (2) Oxygen gas (store in separate room or compartment).
- (3) Calcium carbide (dangerous fire hazard if not kept dry).
  - (4) DDT insecticide solution.
  - (5) Chlordane liquid insecticide.
- (6) Ammonium nitrate (store in isolated spaces or in ammunition depots).
  - (7) Calcium phosphide (keep cool and dry).
  - (8) Sulfur flour.
- (9) Toluene (toluol) (handle with care and maintain ventilation).
- (10) Water-repellent wood preservative compound (store and use outdoors or in well ventilated and protected rooms).
- h. Flammable packing materials and preservation compounds.
- (1) Care in storage. Packing materials such as rubber sheeting and strips and barrier material will be accorded the usual safety precautions and will be stored in sprinklered warehouses. Preservation compounds such as carton adhesive, composed of reclaimed rubber and naphtha, and wood preservation compounds also will be stored and handled as flammable materials.

- (2) Storage in fire-resistant buildings. Shredded paper packing and excelsior will be stored in separate ventilated fire-resistant buildings (small size preferable) or in buildings which are not flammable such as buildings having corrugated steel bulkheads and roof.
- (3) Requisition in small quantities. Shredded paper, excelsior, and flammable preservation compounds should be requisitioned by the packing sections in small quantities and any unused portion of such materials will be stored in small ventilated fireproof rooms or fireproof closed bins. Sweepings of such materials will be placed in metal receptacles having self-closing lids or covers (fig. 6–17).
- i. Safe storage of metal shavings and metal scrap borings or turnings. Scrap materials such as metal shavings, borings, or turnings, because of the cutting oils used, the finely divided state, and in the case of some metals such as magnesium, the ready combustibility, are highly flammable. Such scrap metal will be stored outside in bins having three sides and deck made of concrete with the top and front open. The size should be adequate to contain the normal amount of such scrap, usually, approximately 12 feet in width, 12 feet in length, and 10 feet in depth.

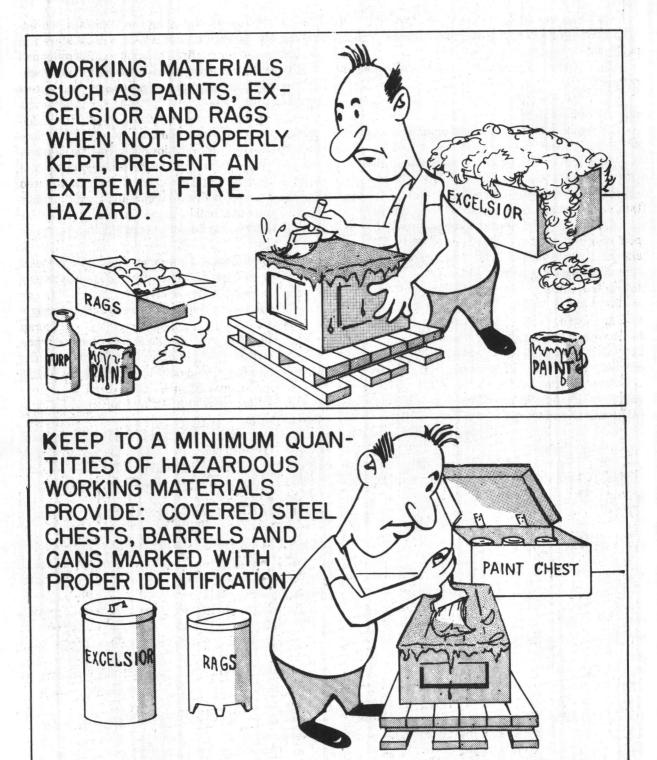


Figure 6-17. Keep packing materials in fireproof or sparkproof receptacles.

j. Safety in handling compressed gases and cylinders. Safety precautions for handling compressed gases and cylinders will be as follows:

(1) Cylinder valves will be closed before moving

cylinder.

- (2) Valve caps will not be used for lifting cylinders from one vertical position to another.
- (3) Suitable materials handling equipment will be used for lifting and transporting cylinders.
- (4) Suitable hand trucks should be provided for conveying cylinders; cylinders moved on hand truck must be held securely in position.

(5) Cylinders to be transported in trucks, rail cars, or ships will be braced securely to avoid over-

turning or moving.

- (6) When suitable hand trucks are not available, cylinders will be moved by tilting and rolling on the bottom edge. Do not drag or slide the cylinders.
- (7) Cylinders will not be dropped or permitted to strike against each other violently.
- (8) Pipelines and cylinders will be marked in accordance with Military Standard MIL-STD-101.
- (9) Any cylinder of compressed gas which is not definitely identifiable as to contents will not be issued until the content is identified.
- (10) Explosionproof lights only will be used in compressed gas storage areas.
- (11) For safety in cutting and welding, see reference documents of the appropriate military department in the appendix.

# 6-118. Poisonous or toxic and Radioactive Materials

a. Safety precautions. Many liquids, chemicals, and compounds are, in addition to being flammable or dangerous in other ways, poisonous when contacted or inhaled. Therefore, this material requires special care in storing and handling to prevent injury or death to operating personnel. Such materials will be isolated or placed in areas which can be well ventilated, while personnel are working in the area, or stored outside. Care will be taken to prevent breakage or leakage of any kind. Personnel must be protected to preclude excessive inhalation of vapors, contact with skin, or danger to eyes when this material is stored in regular storage or when stored in shops. Personnel working in such areas and with such materials will have proper safety clothing and equipment at all times (paras 6-105 and 6-121).

b. Highly poisonous or toxic materials. The following are examples:

- (1) Leaded gasoline. Gasoline containing tetraethyllead must be stored outside. Exposure to its vapors must be kept to a minimum. It is not to be used for cleaning, cooking, and heating except where specified.
- (2) Sodium monofluoracetate. Sodium monofluoracetate is extremely poisonous to both man and animals and will be kept in locked rooms inaccessible to unauthorized personnel. This chemical must be kept dry and must not be allowed to contaminate food or water.
- (3) Cuprous cyanide. Cuprous cyanide must be kept sealed.
- (4) Other highly poisonous or toxic materials. Potassium cyanide and sodium cyanide must not be handled without protective gloves.
- (5) Mercuric oxide pigment is also a poisonous substance.
- c. Radioactive materials. Radioactive materials will be handled and stored in accordance with DLAM 4145.8/AR700–64/NAVSUP PUB 5012/AFM 67–8/MCO P4400.105 and 29 CFR 1910.96.
- d. Ionizing radiation (29 CFR 1910.96). Ionizing radiation cannot be detected by the human senses. Special instrumentation is required to detect and evaluate radiation hazards. Any damage to radioactive commodities or containers of these materials should be reported to the Radiological Protection Officer.
  - e. Other toxic materials
- (1) *Acids*. For detailed instructions for storage of acids see paragraph 6–121.
- (2) Certain gases. Certain compressed gases, such as chlorine and sulfur dioxide are very toxic when inhaled.
- (3) Cleaners, solvents, and preserving materials. Many cleaners and solvents are hazardous if improperly used. Benzene (benzol) and carbon tetrachloride will not be used as cleaners or solvents. Follow the manufacturer's label and consult the material safety data sheet for procedures and safety precautions.
- (4) Other categories. Other categories of poisonous materials are insecticides, rodenticides; metal plating chemicals; metal treatment chemicals: reagents; photographic and lithographic chemicals (including formaldehyde solution and duplicating liquid); tetrachloroethane (toxic); tricresyl phosphate; amyl acetate; and aromatic petroleum naph-

tha (poisons). Certain coatings such as paint thinners, solvents, thinners, diluents, primers and sealers, and rubber paint are toxic. Methyl bromide is a poison.

### 6-119. Corrosive Materials

a. Corrosive qualities. Certain materials are injurious to personnel because of the corrosive qualities. Care must be taken to prevent any spillage or container breakage which could permit contact to skin, eyes, or inhalation into the lungs of personnel working with such materials.

b. Precautions in handling. Personal protective clothing and equipment designed for the specific exposure will be worn when handling corrosive materials. Approved respiratory devices will be worn when handling caustic materials, e.g. sodium hydroxide (caustic soda).

c. Materials of corrosive nature.

(1) Acids. Almost all acids are corrosive in nature. Acids must be kept well sealed or stoppered. Protective gloves will be worn when filling containers or if there is any evidence of leakage at the stopper. A dust mask must be worn by all personnel when handling flakes of chromic acid.

(2) Caustic soda or sodium hydroxide pellets. Caustic soda or sodium hydroxide pellets are extremely corrosive and must not be handled without protective gloves or allowed to come into contact with the skin. Containers must be kept well sealed and stoppered.

(3) Hydrogen peroxide. Rubber gloves and goggles must be worn when handling hydrogen peroxide. Guard against any contact with skin or eyes.

(4) Potassium hydroxide. Containers must be kept sealed tightly.

#### 6-120. Certain Other Hazardous Commodities

a. Anhydrous ammonia. Anhydrous ammonia is highly irritant and causes burns to skin. Guard against leakage. Isolate from others, store in a cool place. Store cylinders on side.

b. Water treatment compound (briquette). Water treatment compound positively must be prevented from mixing with any water to be used for drinking purposes.

c. Ammunition, explosives, and ordnance. Ammunition, explosives, and ordnance are handled and stored in accordance with existing regulations and directives for handling and storing such materials.

d. Miscellaneous hazardous commodities. Many

other commodities require special care in storage. Helpful instructions for the handling and storing can be found for many commodities in the "Chemical Safety Data Sheets" (published by the Manufacturing Chemists Association, Inc., 246 Woodward Bldg., 15th & H St. N. W., WASH DC 20005) and "Handbook of Dangerous Materials" (published by Reinhold Publishing Corporation, New York Book Division, 330 W. 42nd St., New York, NY 10836). Activities which require these publications should effect procurement in accordance with procurement regulations of the appropriate departments. Containers of hazardous commodities will be inspected frequently to assure that the containers have not deteriorated sufficiently to cause rejection of shipment in interstate commerce or would be an accident hazard on arrival at destination.

## 6-121. Safety in Acid Storage

a. Acids in containers. Acid in carboys, drums, and tanks will be handled, transported, and stored in accordance with specific instructions provided for each type of acid in the "Chemical Safety Data Sheets" as described in paragraph 6–120d. Certain other acids (such as oxalic acid) in small bottles, not listed in this publication, will be accorded, in relation to the type of hazard involved, the same care in storage as for acids listed.

b. Isolation of acids. All acids will be stored in isolated inside areas if practicable and, if possible, flammable warehouses. Acids may be stored outside but must be protected from direct rays of the sun in covered sheds or covered with tarps. Acids will be protected against freezing, whether inside or out, to preclude breakage of containers. Hydrochloric acid (see Chemical Safety Data Sheet SD-39) should be stored outside unless an isolated area is available in special buildings. If necessary to prevent freezing, store in heated buildings. Drums will be stored with bungs up. Isolation of acids from materials such as paper, excelsior, sawdust, wood scrap or cellulose, shavings, cloth, textiles, or flammable liquids will be maintained to preclude fire hazards and damage to such materials. Because some acids are explosive when certain gases (such as hydrogen) develop in drums containing the acid, the acid drums will be isolated from drums containing other chemicals, such as hydrogen sulfide, turpentine, carbides, metallic powders, and combustible materials.

DOD 4145.19-R-1 15 September 1979

c. Access to water. Acids, when stored, should be within easy access to large quantities of water under moderate pressure, for emergency action in the event a person has contacted the acid and for flushing purposes to cleanse the areas where spillage has occurred. Provide deluge-type safety showers and eye baths near acid storage and near locations where acids are opened, packed, or handled. Special safety clothing and safety accessories will be provided for personnel handling acids, working in or near tanks, acid storage rooms, or inside tank cars. including gas-tight chemical safety goggles, rubber gloves and aprons, brimmed felt hats or treated fiber hats, and safety shoes. Additional safety apparatus will be provided, including gas masks, breathing apparatus, and other safety aids.

d. Ventilation. All rooms and inside areas should be well ventilated or be ventilated thoroughly before allowing personnel to enter. Good ventilation will be maintained constantly while personnel are working in acid storage areas. If leakage, breakage, or spillage of acid occurs, the areas will be well flushed with large quantities of water. Cloths, sawdust, or any other organic material will not be used for swabbing or sweeping areas where spillage has occurred. If water is not immediately available, use clean dry sand, ashes, or gravel to cover the spillage. Smoking will not be allowed in or near acid storage areas. As most acids give off highly corrosive vapors, electrical wiring in buildings will be of vapor proof type and should be in tight, rigid metal conduit. Because of the corrosive action of the vapors, acids will be stored away from metal material which could be damaged.

e. Explosionproof lights and switches. Because of possible explosion, especially in nitric acid, spark and explosionproof lights and switches will be used on electrical equipment and wiring in storage or in and around tanks or tank cars. Fluorescent lights, unless approved for Class 1, Group D locations of National Fire Code (NFPA) will not be used.

f. Venting of drums. Drums of acid in storage will be vented weekly or more often in hot weather to release the pressures that may have built up. Extreme caution will be practiced when plugs in drums are being loosened; a long-handled pipe or plug wrench will be used. Personnel will face away from the plug and turn the plug only one turn until the pressure has equalized to atmospheric pressure. Drums will be handled carefully, especially in warm weather, to prevent bumping sharply against each

other. Tools must not be permitted to strike the drums or plugs sharply and cause sparking. Open or naked flames must not be permitted to contact drums or tanks. Sulfuric acid storage must be especially well ventilated to prevent vapor accumulation.

g. Mixing with water. Never add water or caustic solutions to sulfuric acid as violent reactions may occur. If it is necessary to mix acid and water, always add the acid cautiously to the water; never add water to strong acid.

h. Inspection of containers. Upon receipt, inspect all carboys and drums of acid carefully for possible leakers. Set aside leakers or damaged containers for special handling. Do not walk a carboy on the edges of its box, use trailers or specially designed hand trucks. Do not handle carboys by the neck. Never attempt to remove carboy stopper wire by twisting or prying; use wire cutter. Be sure closures on filled or empty carboys are fastened securely before moving. Unwashed empty carboys must be handled as carefully as filled containers.

## 6-122. Petroleum Products-Safety Precautions

a. Petroleum products having a flash point in excess of 100° F. Petroleum products having a flash point in excess of 100° F include: diesel fuel oils, lubrication oils, kerosene, naptha cleaners, and paint and varnish thinners. As petroleum products are dangerous when the temperature is raised to the flash point, extreme caution must be observed as to smoking, firefighting equipment, leakage, and vapors.

b. Gasoline and JP—4 jet fuels. Gasoline and JP—4 jet fuels have a normal flash point of a -75° F or a Reid Vapor Pressure of less than 14 pounds per square inch. Careless handling and storing of gasoline is extremely hazardous because all gasolines give off flammable vapors at any temperature, even in subzero weather; and gasoline vapors are heavier than air and consequently will seek low areas and follow air currents to great distances from source. This means that great danger exists in wide areas where leakage occurs. (For special precautions concerning JP—4, see MIL—HDBK—201.)

c. Gasoline storage safety precautions. Safety precaution rules for the storage of gasoline will be as follows:

(1) Smoking will not be allowed in the vicinity of gasoline storage, storage tanks, gasoline pump houses, loading racks, truck storage, or other dan-

ger areas. Personnel will not carry "strike anywhere" matches or mechanical lighters in a danger zone.

- (2) Leaks from tanks, pipe lines, pumps, and at loading racks must be prevented.
- (3) Personnel handling and storing gasoline must be familiar with the hazardous characteristics of gasoline.
- (4) When gasoline has been spilled, all sources of ignition must be eliminated from the surrounding area until such time as air currents have dissipated the gasoline vapors.
- (5) Persons working where gasoline vapors may be present must not wear shoes that have metal plates, hob nails, or other exposed nails, which may produce sparks.
- (6) Only explosion proof switches, motors, relays, electric lights, and portable lights (including flashlights) will be used where gasoline vapors may be present. Fluorescent lights will not be used unless approved for Class 1, Group D locations of National Fire Code (NFPA).
- (7) Gasoline must not be transferred from one container to another unless the containers are connected securely with an electric bonding cable. The bonding cable equalizes the static electricity charge of the containers and eliminates the possibility of a spark of static electricity which may ignite gasoline vapors.
- (8) Gasoline must not be used to clean floors, automotive parts, clothing, or similar items. Products with a higher flashpoint should be used for this purpose such as stoddard solvent.
- (9) Fire-extinguishing equipment (foam or carbon dioxide, not water) must be provided in adequate quantities. All personnel must know the location and how to operate the extinguishers.
- (10) Self-closing metal receptacles will be provided for all discarded oily waste, rags, or mechanics' clothing.
- d. Other liquified fuels. Butane and propane nave normal flash points of  $-75^{\circ}$  F or a Reid Vapor Pressure in excess of 14 pounds per square inch. The fuels are shipped by bulk or in tanks. The following special precautions must be observed to handle these products safely:
- (1) In the event of leaks, work procedures will guard against danger of explosion or fire.
- (2) Acute fire hazards and open flames will be kept away from areas in which these materials are stored.

- (3) Only explosion proof portable and permanent lights will be used in the storing areas.
- (4) When handling these liquids, eyes must be protected carefully.
- e. Gasoline vapors. Gasoline vapors, even in concentrations of less than 1 percent, will cause nausea and headache if inhaled for any length of time. Inhalation of high concentrations may cause unconsciousness or death.
- f. Tetraethyllead. Most gasoline contains tetraethyllead to increase the octane rating. Tetraethyllead is absorbed through the intact human skin and, therefore, should not come in contact with any portion of the human body.
- g. Empty drums previously used for flammable liquids.
- (1) Precautions for storage. Empty drums which have contained highly flammable liquids and which have not been thoroughly cleaned will not be stored inside a building. Uncleaned empty drums are more hazardous than filled drums.
- (2) Affixing labels. All drums that formerly contained flammable liquids, but which have not been purged to remove explosive vapors, will have affixed to the head a red diamond-shaped label as specified in Title 49 CFR Section 173.409.
- (3) Drums not to be used for other substances. Substances, other than gasoline or preservative, will not be placed in a drum or barrel formerly containing gasoline unless the drum or barrel has been reconditioned. Containers unfit for storage of gasoline will not be transferred from one activity to another except for the express purpose of cleaning or repairing and then only after approval by the appropriate military department.

# 6-123. Safety Precautions for Solid Fuels in Storage

- a. General. When exposed to the air, some solid fuels, such as coal, are subject to oxidation which is similar to combustion or burning, but is much slower and is unaccompanied by flame. The oxidizing process generates heat and, if uncontrolled, results in spontaneous combustion. Because of different characteristics, some coals ignite spontaneously more quickly than others.
- b. Storage area. The storage area should be firm, not covered with planking or porous material such as gravel and cinders; should be well drained; should be free from steam pipes or other outside sources

DOD 4145.19-R-1 15 September 1979

of heat; and must be free of oily waste, wood, or other flammable material.

- c. Spontaneous combustion in solid fuel.
- (1) Cause. Large pieces of coal tend to become separated from the fine coal and dust. In ordinary dumping the fine coal rolls to the edges and sides of the pit, and as the coal is used, the fine coal forms a core, surrounded at the bottom and the outside edges by coarse coal. Between the fine and the coarse masses of coal there is a zone of mixed fine and coarse coal gradually varying in proportions. In this zone the air will trickle and cause oxidation but will not escape fast enough to carry away the heat generated, resulting in spontaneous combustion. Usually, such hot spots are 3 to 8 feet below the surface of the pile.
- (2) Prevention. The danger of combustion can be minimized by mixing the fine and coarse sizes of coal evenly through the pile so that the lumps are well buried in the fine coal and thus exclude air. This is done by spreading the coal in comparatively thin layers (approx 2 feet thick) and packing each layer with a bulldozer.
- (3) Combating heat. Coal piles will be inspected frequently and if the temperature reaches 180° F or above, or if the coal has already fired, the contents of the pile will be used or moved. Water can penetrate only a few feet into a coal pile and is ineffective in reducing the temperature. Pipes, with a thermometer lowered in each pipe to take a reading of the temperature, should be inserted in the pile extending from a point near the bottom to 3 feet above the top.

#### 6-124. Lumber Yard-Fire Precautions

Water supply will be accessible and adequate for

all emergencies. Fire hydrants and appropriate fire extinguishers will be provided at strategic locations. Smoking will be prohibited in and near the yard and "No Smoking" signs will be posed conspicuously at strategic locations.

## 6-125. Strategic and Critical Material

- a. General. Certain commodities are categorized as national stockpile material from time to time as dictated by availability conditions in relation to potential national emergencies. Some materials so segregated require special consideration for safety while in storage. So far as is consistent with the provisions of this regulation such material will be handled and stored in accordance with the Strategic and Critical Materials Storage Manual published by General Services Administration (GSA) and available through the individual departments. Safety precautions as directed in this regulation will be followed. Proposed deviations in methods to be employed in the storage of national stockpile material or required clarification concerning safe storage will be referred to the appropriate military department.
- b. Fire protection. Generally, the normal fire prevention and protection measures established at military activities, and as herein covered, are considered adequate for national stockpile material. However, when special precautions are outlined in the specifications furnished in connection with the storage of material of a combustible or flammable nature, additional fire prevention and protection measures in accordance therewith will be established. When such measures result in additional costs, prior approval of the appropriate military department must be obtained.

## CHAPTER 7

## STORAGE MANAGEMENT TECHNIQUES

	Paragraph
General	7-101
Manpower and equipment	7-102
Production	7-103
Use of charts	7-104
Analysis of methods	7-105
Use of Incentive Awards Program	
On-site reviews and checks	7-107

## 7-101. General

- a. Management. In storage and materials handling operations, management encompasses four principal areas of responsibility: people, workload, space and equipment. This chapter treats those essential management techniques which are particularly appropriate to storage and materials handling operations and which experience has proven to be the most effective.
- b. Importance of management. Managers/directors at major military supply installations are business executives with broad responsibilities. Organization is the structure by which these responsibilities are effected. Management is the planning, organizing, directing, coordinating and controlling mechanism by which the organization is made to function. Thus, there is a continuing cycle in which good managerial techniques are made effective through proper organizational structure as the structure itself produces good managers.
- (1) There are certain basic principles that apply to effective organization and leadership. As a manager, basic leadership principles enumerated below, judiciously applied, will result in a beneficial return.
- (a) Encourage employees to do a better job by example, and by inspiring them to innovate and suggest improvements.
- (b) Maintain the "open door" policy so subordinates will feel free to approach you. One good idea from them may revolutionize your operation.
- (c) Make no commitments that cannot be kept. Build confidence by becoming known as one who keeps a promise.

- (d) Nourish the morale of your organization. Believe in your fellow employees.
- (e) Instill confidence that your instructions will be complied with, that your suggestions will be heeded, and that your orders will be carried out.
- (f) Cultivate the art of delegating responsibility. Promote teamwork by developing leadership qualities.
- (g) Make such things as promotions, citation for meritorious service, retirements, and bonus awards a special event.
- (h) Recognize that years pass quickly and assure that there is someone capable and trained to carry the major part of the load when the need arises.
- (i) Encourage all personnel in supervisory positions to have and maintain an updated managers handbook.
- (2) These principles, coupled with the application of sound management techniques, will contribute immeasurably to achieving maximum efficiency and economy in storage operations.
  - c. The storage and materials handling manager.
- (1) A good manager establishes objectives within the framework of the mission of the organization and operates according to the capabilities of the work force and the facilities placed at their disposal. The manager knows the "how" and "why" of what he/she is asking and is able to evaluate results. Above all, the work force is led to understand his/her directions in order to obtain the desired objectives.
  - (2) Complete and common understanding be-

tween the storage and materials handling manager and operators requires the preparation of standard operating procedures, the training of personnel in those procedures and the maintenance of a continuing program to restudy procedures and retrain personnel. The manager encourages recommendations for improvement in operations and, where indicated, effects revision and refinement of operating procedures.

- (3) The successful manager operates with a high degree of flexibility. Through the organizational structure he/she meets sudden and large impacts on one activity by shifting personnel and equipment from another engaged in tasks of lesser priority, including delegation of authority where practicable. Tasks of lesser priority are maintained as standby projects to be accomplished during periods of nonpeak workload. This balancing of workload, people, and materials, begins with the smallest operation and ends with the total production from the entire activity.
- (4) No matter how powerful a combination of resources the storage and materials handling manager may have, he/she cannot succeed without a team of willing, thinking, and articulate people to guide that combination. The manager has a job to create, develop, and maintain voluntary cooperation and initiative among the people supervised.

#### d. Planning.

- (1) Planning is the deliberate consideration of a problem or an operation with a view to determining, in advance, the most effective means of accomplishing a desired result with the least expenditure of manpower, time, and material. Planning involves the determination and visualization of what should be done, where, when, how, why and by whom it should be done, and how long it should take (how many manhours are required, i.e., work standard).
- (2) Once a recurring problem or operation has been defined, a procedure or system should be established for handling the situation. Establishment of a system reduces everyday work to routine and the recurring problems or operations can be handled by less experienced personnel. Additionally, personnel at the top echelon are relieved for the more important work of planning for any new or broader problems and for directing, controlling, and coordinating the organization's total effort.

#### e. Directing.

(1) Once a plan has been developed, it then

becomes necessary to issue appropriate instructions for implementation. Instructions should be in sufficient detail to assure that the recipient has a clear understanding of what, when, and how the job should be done. On the other hand, except for uniform recurring procedures and methods, which should be reduced to written documents, the instructions should not be in such defined detail that the recipient has nothing left to his judgment. Too much detail can destroy the initiative of the recipient and waste the time of top echelon officials in its preparation.

- (2) The potential of the most effective planning or the most productive system in existence can never be reached without motivation of the people involved. To be successful, management must operate with recognition of abilities and unique desires of people. For example, when a person is involved through contribution of ideas and energies to a group goal, the enthusiasm to give his/her best runs deep. To be still more specific, whenever changing to new procedures or techniques, employees meet goals better when those aims take on a personal meaning gained through understanding of the goals and recognition of their ideas.
- f. Coordination. Two of the more noticeable features of a major military supply installation are specialization and large scale operations. Specialization provides expert attention to related but limited subjects. Specialization also intensifies the need for coordinating the various specialized activities into a composite, well-balanced operation. One of the chief functions of the storage manager is to coordinate activities within his/her area of responsibility, whether that area be the installation as a whole or an organizational element of the installation.

## g. Control.

(1) A plan having been developed, its execution directed and coordinated, a last and very important step is to determine the status of the resulting operation during its various stages of accomplishment. Proper controls permit timely corrective action if the operation is not being effectively executed or proves to be defective. Control founded on comprehensive and accurate information takes the guesswork out of management and forms a sound basis for decisions and planning. However, reports and charts do not in themselves provide solutions to management problems. They merely serve to highlight areas of deficiency which must

15 September 1979 DOD 4145.19-R-1

then be subjected to further planning, direction, and coordination.

- (2) The use of automatic data processing (ADP) equipment and techniques to their maximum potential usefulness must be exploited. The astute manager will be constantly aware of the possible improvements to the organization as a result of the modern management techniques made possible by computers.
- (a) Daily progress or status registers are easily maintained by computer program. Voluminous printouts, however, are to be avoided. The manager must be ever mindful of the cost of preparation and distribution of ADP reports, hence, reports should be keyed to the exceptional items or out of tolerance conditions which warrant immediate attention. Ideas for new or improved reporting techniques, as well as elimination of those reports which are no longer useful, contribute to a higher overall effectiveness and therefore are actively solicited.
- (b) Toward this end, consideration should be given to the installation of peripheral input/output devices in the executive office(s). Several of the newer high speed terminals such as the cathode ray tubes or thermal printers are fast and totally silent, thereby lending themselves to the office environment. In this way, required information is available in the form of graphics or text for display on a real-time basis, at a touch of the finger.
- (3) Those installations which do not have extensive central computer facilities should consider the availability of time shared terminals. Many commercial terminals are available on a rental basis with installation as simple as replacing an office typewriter. The only additional requirement is the availability of a standard telephone to accomplish the computer to terminal link.
- (4) While most of the storage applications program will require special purpose software, there exists an extensive variety of "canned" programs available in the industry at minimal or no cost to the Government. Frequently these simulation-type models can be employed in the decision making processes where heretofore only best guesses were possible.
- (5) One area in the field of ADP storage where substantial savings are possible, and therefore of obvious concern to the storage manager, is the generation of source data. Older methods of handscribing with subsequent keypunch card generation are

giving way to original preparation of information in a machine-readable form. At the present time, mark-sense cards offer the best known approach, but optical character readers are playing an ever increasing role in source data automation.

(6) The use of standard terms, symbols, documents, etc., will provide a level of uniformity and compatibility and permit operation of systems designed at one activity to function at multiple locations. All information requirements, internal and external, should be derived from common use data to the maximum extent feasible.

## 7-102. Manpower and Equipment

- a. Manpower. Manpower is one of the primary resources of a supply installation. It is also the greatest item of expense. As such, it must be properly utilized, assigned, and directed. Economical and proper personnel/labor assignment depends on thorough planning during consideration of scheduled assignments. General personnel labor problems should be openly discussed among staff members and heads of component units of the activity. By this means every individual performing management duties will be fully informed of the overall labor situation and made cognizant of his own responsibilities toward the efficient employment of the forces assigned to his charge.
  - b. Labor and equipment pools.
- (1) This section not applicable to ammunition operations.
- (2) Labor. Operational requirements in warehouses or other component elements of depots and other major supply installations can and do vary extensively from day to day. In view of this, the assignment of laborers and equipment to subdivisions of such activities on a permanent basis can become an uneconomical practice. Consistent with mission and organization of the activity, it is more economical to permanently assign to a unit that amount of laborers and equipment needed to perform no more than 75 percent of the average work load. All other labor and equipment can be assigned to a Central Labor and Equipment Pool from which they may be dispatched, as required, to those components of the storage activity confronted with peak or heavy work requirements exceeding the capabilities of the permanently assigned minimum work force.
- (a) The pooling and assignment of manpower and equipment according to priority workload,

DOD 4145.19-R-1 15 September 1979

proves successful only when such assignment is conducted on an absolutely impartial basis. Personnel and equipment pools must be operated for the benefit of all elements concerned, based purely on needs generated by work load or the purpose of the Labor and Equipment Pool will be defeated. For this reason, organizational placement of the Labor and Equipment Pool should be given careful consideration. This can best be accomplished when such assignments are directed by a Production Planning and Control activity. This will assure maximum utilization of facilities and manpower by the application of work measurement standards (where feasible) in the planning, scheduling, and control of workload and manpower distribution.

- (b) Notwithstanding the overall management and distribution of men and equipment based on work standards, instances often arise in actual floor situations where the workload increases in several areas of an activity simultaneously and the combined labor requirement exceeds the capabilities of the forces available. When this occurs, a decision as to equitable use of available pooled resources should be made by the chief of each activity involved, with prime consideration given to the higher priority workloads. When this management effort is not sufficient to cope with the volume of priority workload in a given operation or function, the decision on realignment of priorities should move up the echelons of management/command to the necessary level.
- (c) Separately trained elements may be developed in the pool so long as flexibility is not impaired. Personnel and squads should be assigned to like jobs whenever possible; that is, warehousing, shipping, receiving, etc. Overspecialization should be avoided since it defeats the purpose of a labor pool.
- (d) Effective management of pooled resources requires constant consideration of the time factor involved in any movement of labor and equipment from one assignment to another. Assignments/reassignments should be closely studied before being placed into effect otherwise an excessive amount of the working day can be lost in traveling from one work site to another.
- (e) The ideal situation exists when the workload is sufficiently large to permit the assignment of a squad or crew to a given job or area for an entire working day. In instances where this is not possible, and transfer from one area or warehouse

to another throughout the day becomes necessary, good management and planning will assure labor assignments to jobs which are located in proximity to each other.

(3) Equipment.

- (a) Equipment dispatched from the Labor and Equipment Pool should be in balance with the assignment of labor. Materials handling equipment on hand should be categorized (i.e. powered, non-powered, age, size, capabilities, and capacity). Managing the use of equipment to achieve maximum economy in its utilization should be a prime management objective.
- (b) Where it is practicable, operators of motorized equipment operating from pools should be assigned permanently to a given vehicle.

## 7-103. Production

- a. Criteria. Productivity of an operation is contingent upon the establishment of a standard performance. Achievement of maximum productivity comes about through informed workers, practical production standards, use of standard methods, and by reducing as many operations as practicable to routine tasks.
- b. Production records. Records of production are beneficial as management tools in that they provide a means of planning and distributing resources. Depending upon the echelon of management, the production unit(s) selected should be broad units (e.g., mixed trucks received) which most typifies the work to be accomplished. A production record should consist of substantially the following types of information.
- (1) The number of production units on hand at the beginning of the report period (day, week, etc.).
- (2) The number of production units received during the period.
- (3) The number of production units processed and the average processing time per unit. Average processing time may be determined from a frequency analysis of the occurrence of the various elements of the operation and their time standards.
- (4) The number of manhours required to accomplish this work.
- c. Analysis. To determine the efficiency of current operations, production records should be analyzed periodically. The frequency and depth of such analysis will depend upon the degree of management impact at the various echelons of review. Analysis should answer such questions as—

- (1) Where do backlogs or bottlenecks exist?
- (2) Where is the workload light or heavy in terms of assigned personnel?
- (3) What organizational element(s) are failing to meet production standards?
- (4) When did the element(s) start to fall behind schedule; were required management actions taken to correct the situation?
- d. Cause of deficiencies. Disclosure of the existence of deficiencies enables the manager/supervisor to find the cause. These may be traceable to—
  - (1) Poor or inadequate supervision.
  - (2) Low morale.
- (3) New and inexperienced labor, or poorly trained labor.
- (4) Breakdown of tools or equipment, or inadequate or poorly utilized tools and equipment.
  - (5) Careless or poorly organized work methods.
  - (6) Excessive absenteeism.
- (7) Personnel not assigned to units in proportion to work load.


#### 7-104. Use of Charts

a. Charts to record daily cumulative performance data are excellent management tools for improving operations. Such charts reflect trends and establish a factual basis for needed indepth evaluation of operating efficiency and productivity. They also provide an opportunity to identify and correct

weaknesses before they assume dangerous or serious proportions.

- b. Suggested examples for development and maintenance of charts reflecting such performance data as receiving and shipping records are shown in figures 7-1A and 7-1B.
- c. Examples for charts reflecting tons of material handled and units inspected are shown in figures 7-2A and 7-2B.
- d. A continuing chart record of receiving and shipping performance would show as a minimum.
- (1) Productivity to date as better or worse and its plus or minus relationship to the record of the previous day or week.
- (2) Current productivity comparison with that of the previous month or year.
- e. Charts may be kept on a daily, weekly, or monthly basis according to type data presented.
- f. In preparing charts, the first step is identification and insertion of the acceptable performance standard.
- g. Next apply horizontal lines above and below the identified standard. As shown in figures 7-1A and 7-1B one line is drawn at 20 percent above the standard and another drawn 20 percent below standard.

*Note.* The 20 percent line above and below standard is for illustration purposes and is not intended to mean that the 20 per cent tolerance range is accepted practice.

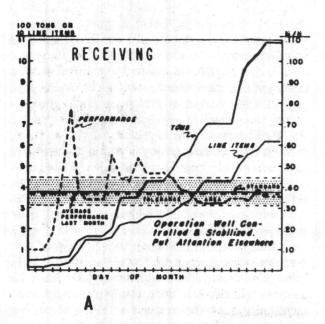

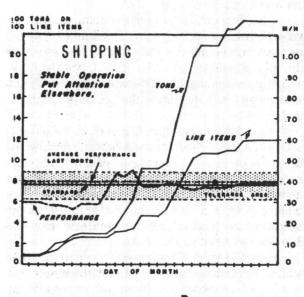


Figure 7-1. This type chart shows where you have been, where you are and where you are heading.

DOD 4145.19-R-1 15 September 1979

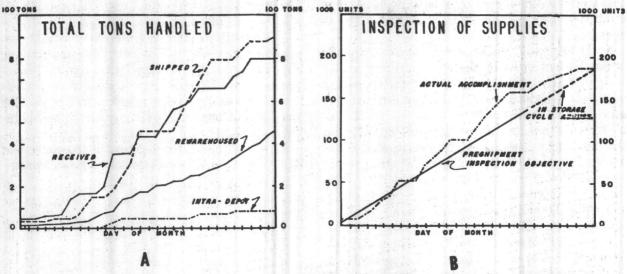


Figure 7-2. Charts can take different forms.

These two lines provide for a "tolerance area" within which performance will be considered "satisfactory." The next step is to insert the average performance achieved during the previous month.

h. An activity is rarely able to judge its progress overall by how many units are processed on a given day but rather by how many units were processed through a given date in a period of time. An acceptable means of accomplishing this is if, beginning with the first day of the month, the performance units per production manhour are inserted for that day. On the second day, the first and second day's performance is added. Average the two and insert the figure, and so on.

i. Charts should be large enough to be easily read and placed in a conspicuous location to command attention of personnel employed in the activity.

j. Payload tonnage (fig. 7–2A) handled by an activity is normally the sum of tons received and tons shipped. A rise in handling intra-installation tonnage or a continual and significant increase in intra-installation tonnage bears investigation because a number of deficiencies may be entering the operation. Some of these may be cross-hauling that could be reduced or eliminated, the use of inefficient or improper vehicular equipment, or lack of proper planning or supervision. Generally speaking, the less the intra-installation material movement and handling and the more the tonnage handled in and out, the healthier the situation.

k. Figure 7-2B shows the material inspection

(quality control) objective(s) for a given period. In the example, the number of units anticipated for preshipment inspection is shown together with an estimate of in-storage or in-process inspections planned or scheduled which, in the main, would have negated the need for preshipment inspection. The dotted line shows how close to attainment of the objective was the accomplishment.

## 7-105. Analysis of Methods

a. Analysis to precede equipment selection. Materials handling equipment and tools should not be selected or requisitioned for an operation until after a thorough analysis has been made of the materials to be handled, the conditions and environment in which the work will be performed, and the method to be employed.

b. Operation lists. In any handling problem there will be several specific operations which must be performed. Listing these operations, in the sequence performed, may be sufficient to indicate the method to be employed and, in any case, should serve as a valuable guide and check to more detailed analyses which may be made at a later date.

c. Work simplification. The purpose of work simplification is to eliminate unnecessary work elements and develop or find simpler methods of accomplishing necessary work. This can be accomplished by questioning each step in the process (what and where, when and how, why and who),

changing the sequence of operations as necessary, combining some operations, or eliminating some job elements.

d. Motion study. Motion study refers to the study of the motions made by the worker in performing assigned tasks. This study may be merely visual observation of the worker. Important things to observe include the distance the operator reaches for his tools and supplies, the number of steps he takes, the repetition of tasks, and the smoothness of the motion pattern. Often, merely by listing the specific tasks carried out by a worker in connection with the performance of an operation, unnecessary steps and excessive movements can be eliminated.

e. Flow chart diagram. The flow chart and the flow diagram are used for the study of material flow from one work area to another. A completed chart or diagram graphically depicts an operation. Included in the chart are distances, physical conditions affecting the operation, and the number of times procedures and tasks are repeated.

f. Methods study/work standards. This is a systematic analysis of an operation utilizing industrial engineering techniques to determine the optimum method or procedure to accomplish an operation and the time it should take. The operation must be segmented by the analyst into elements appropriate for timing. This is not to be construed as physical revision to the production process unless this is an obvious and necessary recourse. The actual timing of each performance is relatively simple. Assuring that the time reflects normal operations under normal conditions is more difficult and requires an estimate of the pace of a worker by a skilled analyst or technician. Time standards are valid as long as changes are not made in the operation, system, method, condition or type of operating equipment or the number of personnel assigned to perform the work. Time standards include a time allowance for personnel needs, normal worker fatigue, and avoidable delays of short duration. Changes made to work under time standards should be the result of methods analysis, change in product, equipment work content, or economic factors. Time standards provide a valuable tool for planning and controlling work, as a means for measuring the efficiency of operations, and for determining the amount of manpower resources required.

## 7-106. Use of Incentive Awards Program

a. The awarding of cash and/or commendations

for new and acceptable suggestions has become one of management's most important tools. The use of an Incentive Awards Program has two basic advantages, one of which is that it encourages new ideas. Experience has shown that top level management has no monopoly on originality. New ideas can flow up as well as down, and very often do. The individual actually performing a warehouse operation is perhaps in the best position to recognize the need or desirability for a change in procedure and to develop scientific methods for its improvement.

b. The other advantage of this program is that it stimulates interest and encourages employee participation in management. It serves as a means of according due recognition to suggesters. By inviting the attention of supervisors to those employees who are striving to improve the efficiency of their organization, it is a morale builder of major importance.

## 7-107. Onsite Reviews and Checks

## a. General.

- (1) Periodic onsite reviews are another indispensable tool of management. By this means managers can determine the extent to which instructions, regulations, and operational procedures are being carried out.
- (2) The manager should make a daily review of at least one phase or segment of the operation. These reviews should be planned on a cycle basis so that at the end of a specific period they will have covered all phases of the operations. In turn, key and line supervisors should also make frequent checks of their particular activity.
- (3) Reviews made by management personnel should include all administrative and operational functions bearing directly or indirectly on operations. More specifically, they should include the following:
- (a) Application of established operational policies, procedures, and instructions.

(b) Application of the most economical administrative and technical methods for the utilization of personnel, equipment, and storage space.

- (c) Suitability of space, materials handling equipment, and operational methods, as applied to a specific facility and the type of material stored or handled therein.
  - (d) Training of personnel.

- (e) Information with respect to methods and procedures which do not conform to agency regulations.
- (f) Labor difficulties being experienced either within the operation or from outside sources.
- (g) Excessive operational costs pertaining to personnel, space, equipment and storage.
  - (h) Inaccurate, superfluous, or insufficient

documentation for required recording and accomplishment of operations.

b. Supervisory checks. Checks made by supervisors should normally be more frequent and more detailed than those made by the manager. To ensure that any deficiencies on reviews are speedily corrected, appropriate followup action must always be taken.

## **CHAPTER VIII**

## ON-THE-JOB TRAINING FOR STORAGE PERSONNEL

## Section 1. TRAINING PLAN

그런데 [[12] [12] 그는 그렇게 되는 것이 그렇지 않는데 되었다. 이렇게 되었다면 하는데 그렇게 하는데 그렇게 되었다면 되었다면 되었다면 되었다면 되었다면 되었다면 되었다면 되었다면	Paragrap
Introduction	8-101
Purpose of training	8-102
Responsibility for training	8-103
Support by storage managers	8_104
Survey of need for training	8 105
The three phases of instruction	9 106
Understudies	0-100
Qualifications of trainers	0-107
Training administrator (specialists)	8-108
Coordination with other installation activities	8-109
costaniation with other installation activities	8-110
Section 2. TRAINING PROGRAM	
What is storage and materials handling training?	0 111
What is included in storage or warehouse operations and materials handling	9-111
training?	8-112
The requirements for a successful storage and materials handling training pro-	
gram	8–113
How to use the conference leader's guide	8–114
Section 3. CONFERENCE LEADER	
	· John S.
Foreword for the conference leader	8_115
Key ideas and questions	8-116
Part II. DETAILED TRAINING OUTLINE	
Layout and allocation of space	0 115
Facility characteristics	8-117
Commodity characteristics	8-118
Commodity characteristics	8–119
Aisles Stark leaster	8–120
Stock locator	8-121
Summary and check list	8–122
Part III. STORAGE OF MATERIALS	
Review	8-123
Objectives	8 194
Types of stacks and their use	8 125
Honeycombing	8 196
Storage aids	9 197
Summary for storage aids	0-127
	0-128
Part IV. Principles of Materials Handling	
Review	8_129
Materials handling efficiency	8-130

	Paragraph
Various types of and advantages in using mechanical equipment	8-131
Movement factors	8-132
Principles of materials handling	8-133
Summary	8-134

## Section 1. TRAINING PLAN

#### 8-101. Introduction

In an ideal situation every person in any organization is thoroughly trained in his or her duties. In addition they have been made aware of the value of their individual job to the entire operation and just exactly how and where their position fits into the complete organization. Attainment of this goal in today's complicated and complex storage and materials handling operations is very difficult, yet it is one which must be constantly striven for if we are to have efficient, economical, and quickly expandable and flexible storage and materials handling. If left to one's own devices, each person learns something each day and develops a little more in the abilities required to do the job; however, this learning by "chance" or development by trial and error is costly both in time and mistakes made. Systematic training organizes the learning and developing processes and takes the mistakes out of them. It reduces learning time, accidents, and wasted material.

## 8-102. Purpose of Training

Training must have as its primary purpose and goal: trained and competent personnel, adequate and properly maintained equipment, intelligent job planning, alert supervision, and satisfactory organization morale.

## 8-103. Responsibility for Training

Every storage and materials handling activity must assume direct responsibility for initiating, directing, supervising, and conducting all training pertaining to its operation. Training is more effective when it is made a part of operations and is not considered as being disconnected from the job. Personnel responsible for operations must have a thorough knowledge of their work and have the confidence of their associates and subordinates. Training must be considered by operating supervisors as an integral part of the daily workload.

## 8-104. Support by Storage Managers

Since training is part of the daily workload, storage managers must strongly support and participate in the program. Such support and participation should ensure the necessary balance between operations and training, with the training program receiving proper emphasis. It is important that this training should be a continuous program and not an isolated, temporary interest.

## 8-105. Survey of Need for Training

The first step in installing a training program is instituting an overall survey to determine areas in which training is needed. In-service training cannot be justified unless definite need exists. Conversely, it is not justifiable to stop training until the need has been met. A typical preliminary "check sheet" developed as a means of determining possible areas in which training may be needed and groups of personnel which might need the various types of training is shown in figure 8-1. Since it is possible that training may be needed in many or all of the indicated areas, priorities must be assigned so as to meet needs on the basis of urgency. An important point to remember is that too much training attempted at one time will interfere with operations and decrease training benefits. Thus, a well thoughtout and balanced plan, increasing or decreasing in intensity and scope as the conditions require, is essential to the success of a training program.

## 8-106. The Three Phases of Instruction

a. Study of principles. The first phase of the program should center around the principles and fundamental facts basic to operations of which supervisors and key personnel should have an understanding.

(1) Text. The material in the Conference Leader's Guide, section 3, Storage and Materials Handling Training Program for Supervisors, will be used as the basic guide for the first phase of the program. The three parts, covering Detailed Training Out-

line, Storage of Materials, and Principles of Materials Handling can be adapted to the needs of the installation or activity.

(2) Classes. All key personnel, military and civilian, should be included in this phase. Experience has indicated that a minimum of 8 to 10 hours will be required to complete this portion of the training program. Ordinarily, classes should be arranged and scheduled so that no less than 10 or more than 14 persons will be in attendance.

(3) Leader. The leader of these sessions will be a qualified representative of top storage management who has authority to act upon or obtain action upon suggestions and problems which arise as a result of discussions held during the training period.

b. Study of organization and procedures. The second phase of the overall program should concentrate on specific organization, operating procedures, and standard practices of which the supervisors and key personnel should have a complete working knowledge.

(1) Source material. The material to be used in this phase of the program must be adapted from the actual organization charts, duties and responsibilities sheets, written operating procedures, and standard storage and materials handling practices already developed.

(2) Coverage. In addition to organization and functions, general operational procedures and standard practices of prime importance to the activity will be covered. Examples of such procedures and standard practices are:

Receiving
Shipping
Inventory
Warehousing
Care of Supplies in Storage
Materials Handling Operations
Assembly/Disassembly Operations
Packing and Crating Operations

(3) Kind of training. All key personnel should receive general training in all procedures and standard practices, in addition, they must receive detailed instructions in those with which they are specifically concerned. The amount of time devoted to training in each functional item as well as operational procedure should be determined according to the complexity of the job and the detail required for the training.

(4) Method of training. A modified conference

method, in which group participation and discussion, within the bounds of the training objective and under the guidance and control of the session leader, should be used in presenting material in the first two phases. The leader of each session should be the top supervisor or manager of the operation concerned.

c. Job instruction. The third phase of the training program will concentrate on actual job instruction for nonsupervisors. Included in this phase (but not confined to) will be on-the-job instruction and step by step demonstrations through the use of working models, films, charts, diagrams, and by the training leader or an assistant actually performing the job. Jobs covered in this phase will consist of those involved in such activities as equipment operation, checking, packing, palletizing, recording stock locations, and other duties, as necessary. Training in safety practices should be an inherent factor in this type of training. Followup also must be an integral part of this program.

(1) Responsibility of supervisors. For purposes of expediency, an adequate number of supervisor-trainers will be delegated the responsibility of carrying on this training under the person responsible for directing and/or coordinating training activities. Ultimately, each supervisor should be prepared for and responsible for training workers in on-the-job instruction.

(2) Benefit to new and old employees. The training in this third phase is necessary if new employees are to be raised to the highest point of productivity in the shortest possible time. Old employees should be kept abreast of any and all changes in the job processes in which they are engaged through whatever medium of training is applicable; however, a survey, made to determine the amount of benefit old employees could obtain from the type of organized training defined in this third phase will be beneficial and should be made.

#### 8-107. Understudies

In addition to the training given for the performance of their assigned jobs, selected personnel will be trained as understudies for all employees in key positions.

## 8-108. Qualifications of Trainers

The following qualifications should be considered in selecting personnel to act as trainers:

a. Experience in storage and materials handling operations.

# CHECK SHEET FOR STORAGE AND MATERIALS TRAINING PROGRAM

	Military Personnel	Storage Officer or Chief Assistant Chief	Staff	Unit Supervisors	Warehousemen	Labor Foremen	Laborers	Checkers	Forklift Operators	Packer Foreman	Packers	Clerks	Inspectors-Classifiers	Processors
LAYOUT OF STORAGE SPACE: Policies and MethodsSTORAGE OF MATE-	(X)	(X)	(X)	(X)	(X)	х								
RIALS: Policies and Methods	(X)	(X)	(X)	( <b>X</b> )	(X)	x			(X)				(X)	
ORGANIZATION: Duties and Responsibilities LABOR AND EQUIP-	(X)	(X)	(X)	(X)	x	(X)				(X)		х	(X)	
MENT POOLS: Organ- isation and Operation RECEIVING AND SHIPPING PROCE-	(X)	(X)	х	(X)	x	(X)				X				
DURES	(X)	(X)	(X)	(X)	(X)	х		(X)	х			(X)	х	
pilation and Interpreta-	(X)	(X)	(X)	x	x	x				X		(X)		
INVENTORY: Proce- dures and Methods	x	(X)	x	(X)	(X)			x				x	X	
and Methods	x	(X)	x	(X)	(X)			(X)	х			х	X	
CARE OF HAZARDOUS COMMODITIES BLOCKING, BRACING,	X	(X)	х	(X)	(X)	X								
DUNNAGING OF RAILROAD CARS PACKING AND CRAT-	x	(X)	х	x	x	x	x							
Specifications	x	(X)	x	(X)	(X)					(X)	(X)			(X
FORK TRUCK OPERA-	X	(X)	X	(X)	X	(X)			(X)					
TIONTRACTOR OPERATION.	X	(X) (X)	X	(X) X	X	(X) (X)			(X) (X)					-

X To be trained.
(X) Have been trained.

Figure 8.1

- b. Aptitude for imparting instruction to others in an effective manner.
- c. Probability of being able to remain on the trainer assignment until program is completed.
  - d. Interest in doing a training job.
- e. Patience and consideration for the feelings of others.

## 8-109. Training Administrator (Specialist)

A specialist in training, responsible for planning and initiating the training program, should be a member of the top storage managers staff or available from installation management as determined by the military service. Responsibilities of this position will relate primarily to:

- a. Determining needs as well as points of weakness in operations and training.
- b. Advising the staff as to whether training can assist in solving specific operating problems as they arise.
- c. Obtaining information concerning current changes which might affect training already in progress.

# 8-110. Coordination With Other Installation Activities

Coordination should be maintained between the

storage and materials handling training administrator and other affecting elements of the installation, for example: the installation personnel office and management offices. In this manner, the overall policies and objectives of the installation can be injected in the specific training programs of the separate activities or operations being trained. Where a training coordinator or staff is employed as a part of the overall civilian personnel placement and utilization program, the services and/or knowledge of this element should be utilized by the training administrator of the storage and materials handling activity to:

- a. Instruct trainees in the techniques of presenting material to others.
- b. Develop methods and devices for measuring and testing; also instruct trainees in their usages.
- c. Utilize existing training materials and adapt them to the needs of the storage and materials handling program.
- d. Train supervisors in the techniques for analyzing their jobs and the jobs of their subordinate employees.
- e. Assist in setting up necessary training records and schedules.
- f. Assist in setting up and/or providing necessary physical facilities for training purposes.

#### Section 2. TRAINING PROGRAM

# 8-111. What Is Storage and Materials Handling Training?

- a. The main reason for having the military storage installations is to receive, store, and move military supplies. The actual operations within the installation directly related to these activities may be called warehousing and materials handling. Training in this field must cover many specific jobs which require the use of a great deal of knowledge of warehousing principles, procedures, storage methods, and warehousing and materials handling management problems.
- b. Training in warehousing and materials handling should be carried on by two methods:
- (1) A series of planned conferences in which warehouse supervisors, military and civilian, have an opportunity to *think through*, step by step, and in a logical and organized way, the many points that go into making or breaking an efficient operation.
  - (2) On-the-job training in which specific oper-

- ations are taught individually to men and women whose main duty is centered on one or two segments of the whole operation.
- c. Too often training in warehousing and materials handling has been called "on-the-job training." This may mean anything from no training at all; training given by many different people who may or may not be in agreement on what they are teaching; or all the way to planned, organized, and practical on-the-job training. We need not choose between group or individual on-the-job training; both are essential. The purpose of this training program is to give warehouse supervisors an understanding of the basic fundamentals and management policies of storage operations and materials handling.

## 8-112. What Is Included in Storage or Warehouse Operations and Materials Handling Training?

a. This regulation will be considered the textbook

for training in these fields. Instructors should ensure that all students have a working knowledge of the regulation and a detailed knowledge of the portion that affects their specific jobs.

b. The Conference Leader's Guide places emphasis on:

(1) Proper methods of laying out and allocating space.

(2) Accepted ways of storing and stacking the many different items handled, so that space can be utilized to the best advantage.

(3) Efficient and speedy methods of handling materials in order to save manpower, equipment, and time; this is known as materials handling.

(4) Need for training the best qualified employees in the installation to carry on this program under the direction of the storage manager.

(5) Improvement of training already being done to make sure that each employee is receiving the fullest benefits from training being given and in turn to assure that training "pays its way" through increased employee productivity.

## 8-113. The Requirements for a Successful Storage and Materials Handling Training Program

Although the following points do not necessarily guarantee the success of this training program, they are fundamental and important:

a. Management support. The backing and interest of installation officials, the commander, staff, and all key personnel of the storage and materials handling function is essential.

b. Working relationships. Close working relationship between the storage operation and other affecting elements of the installations includes an appreciation of each other's responsibility and contribution and a willingness to pull together to put the job over.

c. Competent leadership. A prime requisite for competent leadership is the qualification of personnel to conduct training effectively and is the key to the success of the storage and materials handling program. Such leaders may be chosen from either of the following two sources:

(1) From any point within the installation—an individual with teaching background and experience who has or can prepare by: reading about the fundamental principles and practices of storage and materials handling, learning storage policies, observing operations and storage procedures, studying first hand and "living with" the actual work going on in the various storage operations, and knowing personally the supervisors of these operations.

(2) From the storage activity—an individual with warehousing background and experience should have the benefit of any supervisory courses given at the installation and should work closely with the person responsible for training to prepare himself in teaching and conference leadership techniques.

d. Adequate conference rooms. No compromise should be made in securing a comfortable, welllighted and aired, quiet, and easily accessible space for conferences.

e. Continuous training. The turnover of warehouse personnel, changes in procedure, improvements in methods, and changes in commodities all point to the absolute necessity of a continuous training program.

## 8-114. How To Use the Conference Leader's Guide

a. To aid in the presentation of a training program in warehousing and materials handling, sectionalized guide material has been prepared. As many sections as logical, or as many as time permits may be covered in one session. There is no intent that this outline be followed word for word; however, its intent and scope should be followed very closely, particularly as to the order of presentation of topics and key points within the topics.

(1) This presentation has been built along organized lines, in logical sequence, that can be used effectively to give those concerned a thorough knowledge of the "ABCs" of warehousing and materials handling in the shortest possible time. The conference leader by prior knowledge of local problems and groups of trainees must fit this guide to

installation requirements.

(2) The established outline should be followed but not read. There is nothing more deadly to a group than continuous reading. The guide has been designed so that it can be followed with an occasional glance. The discussion should be kept running smoothly. In this outline are included: key ideas and questions, suggestions for group discussion, suggestions for illustration, and group answers to key questions.

b. Key points or questions are preceded by a hyphen and are included in quotation marks. Important words therein are capitalized. These key points or questions are the basis for conference discussion—they need not be quoted as written, but should be expressed in a manner which puts the points across. For example:

- -- "keep your STOCK LOCATOR SYSTEM as SIMPLE as POSSIBLE."
- —"what do we MEAN by ORDERLY STACK-ING?"
- c. Suggestions for group discussion are indicated by instructions with such introductory words as: DISCUSS or ASK; these introductory words are in capital letters.

DISCUSS with the group BULK STORAGE as it occurs in their warehouses.

d. Suggestions for illustrations are always inclosed in parentheses. In cases where blackboard illustration is suggested, the material to be put on the board is inclosed in a rectangle.

(WRITE following points on blackboards, charts, or other visual aids)

CONSERVE SPACE
ASSURE SPEED OF MOVEMENT
ASSURE STABILITY
HAVE ORDER IN FORMING STACKS

e. Group answers to key questions are shown in the guide in capital letters and are inclosed in brack-

ets and should be used as a check list. Answers should not be given by the leader unless they have been overlooked by the group. If the answers are given by the leader, they should be brought out in some indirect manner, such as: "Do you think \_\_\_\_ is important?" The leader should never give the impression that he/she knows all the answers. Answers should be drawn out from the group.

-- "HOW can we ASSURE RAPID AVAILA-BILITY?"

AISLES WIDE ENOUGH LOCATION OF FAST MOVING ITEMS TYPE OF STACKING, AND MECHANI-CAL EQUIPMENT

f. The outline and discussion comments have been developed in a manner to give the attending groups the "ABCs" of storage and materials handling. Many questions and points of discussion will arise regarding methods and practices for handling specific problems and conditions peculiar to the installation or to a specific commodity. The conference leader therefore, should be thoroughly familiar with the contents of this regulation, as well as with the various storage and handling conditions within the installation in order that they may be measured against the criteria defined in the regulation. The regulation should be used both in and out of the classroom as a basic text and reference book by those attending as well as the instructor.

## Section 3. CONFERENCE LEADER

#### Part I. INTRODUCTION

## 8-115. Foreword for the Conference Leader

- a. Things you should do BEFORE you meet the group:
  - (1) Plan your work carefully.
- (2) Have an enthusiastic beginning to the conference.
- (3) Collect enough examples from your own depot experience.
- (4) Plan to arrive at the conference room 15 minutes before the scheduled starting time.
  - (5) Check the conference room equipment: Is

- the room in order? Are there enough chairs, sufficient tables and writing space, chalk, eraser, notebooks for the group, pencils, ash trays (where smoking is permitted)?
- (6) Arrange the room so that each person can see everyone in the group, the blackboard, charts, or other visual aids.
- (7) Have sufficient copies of handouts (Figs. 8–3, 8–4 and 8–5 can be reproduced and usd as handouts.)
  - (8) Begin on time—end on time!

b. Purpose of session.	EXPLAIN PURPOSE AND PROCEDURE OF SESSIONS  "To give the LESS EXPERIENCED people an OPPORTUNITY to THINK THROUGH the BASIC PROBLEMS of WAREHOUSING and MATERIALS HANDLING."  "To give you MORE EXPERIENCED people an OPPORTUNITY to REFRESH YOUR KNOWLEDGE of the BASIC PROBLEMS and DISCUSS SPECIFIC PROBLEMS."  "To EXCHANGE IDEAS so that:  we are AWARE of EACH OTHER'S PROBLEMS; we can AID in the SOLUTION of THESE PROBLEMS; we can INCREASE the EFFICIENCY and PRODUCTION."							
c. Why members of group were selected.	"YOU ARE RESPONSIBLE FOR ACTUAL OPERATIONS." "YOU KNOW the PROBLEMS." "YOU CAN INCREASE the EFFICIENCY and REDUCE the COST of OPERATIONS." "YOU MUST TEACH OTHERS to DO THEIR JOBS—YOU MUST KNOW the WHOLE PICTURE."							
d. Discussion procedure.	—"This is a special kind of school," —"All of us should ENTER into the DISCUSSION—ONE AT A TIME." —"Address your ideas and questions to the GROUP—NOT TO ME." —"You will benefit by taking notes—they make things STICK." —"Keep your notes and the mimeographed material that will be given you—in this way you can compile a reference book which you can USE ON THE JOB."							
e. Content of program.	(WRITE the TOPICS on the blackboard and GIVE a BRIEF DESCRIPTION of what each section of the program will consist of.)  WAREHOUSE LAYOUT STORAGE OF MATERIALS Storage Principles Storage Standard Practices PRINCIPLES OF MATERIALS HANDLING							

## 8-116. Key Ideas and Questions

- a. Warehouse layout and allocation of space. This will include a discussion of the problems and knowledge needed in planning a storage area for the receipt, storage and shipment of materials; efficient methods of meeting these problems, as well as systems of space and location control. Planographs, or other visual aids should be utilized.
- b. Storage principles. This will include a discussion on the basic principles of stacking and storing and the accepted practical methods for doing this job. The members of the group will be asked to present some of their specific problems.
- c. Storage standard practices. This will include a discussion of standard practices of storing materials developed within the Department of Defense. The adaptation and application of these practices will be covered as well as the development of standard methods.
- d. Principles of materials handling. This will include a discussion of the advantages to be gained by the proper use of materials handling equipment; existing physical conditions which determine and limit the type of operation; and basic principles of materials handling, stressing the importance of a balanced operation.

## Part II. DETAILED TRAINING OUTLINE

## 8-117. Layout and Allocation of Space

a. Definition of warehousing.

DEFINE "WAREHOUSING"

—"Before discussing the problems in warehousing we should all UNDER-STAND what we mean by 'warehousing' and just what we are trying to prove."

(WRITE the DEFINITION across the top of the blackboard.)

Warehousing—the SCIENTIFIC and ECONOMICAL

RECEIPT STORAGE ISSUE

of materials for their BEST SAFEKEEPING and RAPID AVAILABILITY

— {"UNLESS this job of warehousing is done in a SCIENTIFIC manner } it is NOT ECONOMICAL."

—"To be ECONOMICAL—WHAT THINGS or in WHAT WAYS can we save in our warehouse operations?

SPACE \_\_\_\_\_\_ in terms of cubic feet LABOR \_\_\_\_\_ in terms of MAN-HOURS

EQUIPMENT ..... in terms of EQUIPMENT HOURS and EQUIPMENT TYPES

DAMAGES

ACCIDENTS

ELIMINATION OF WASTE ..... in every form"

—"The definition mentions BEST SAFEKEEPING—by that is meant: we must PROTECT THE MATERIALS.

PROTECT AGAINST WHAT?"

THEFT FIRE

DETERIORATION—damage by:

weather

careless handling

poor stacking conditions

- —"The final statement in the definition of warehousing RAPID AVAILA-BILITY—is ALWAYS IMPORTANT."
- —"To do an efficient job of warehousing we must lay out our warehouses so that the MATERIALS are EASILY ACCESSIBLE."
- —"In these discussions—and more important, in doing your jobs in the ware-houses—we must NEVER OVERLOOK or FORGET these POINTS:
- "We must constantly check to make sure that we are effecting SAVINGS in SPACE, LABOR, and EQUIPMENT; REDUCING DAMAGES and ACCIDENTS; PROTECTING the materials AGAINST THEFT, FIRE, and DETERIORATION; and storing our MATERIAL SO WE CAN GET TO IT IN A HURRY."
- —"How we are going to do all this, and WHAT WE HAVE TO KNOW to accomplish it, are the things we want to discuss."
- -"And we want to discuss them in a logical order-FIRST THINGS FIRST."

- b. Discussion guide for definition of warehousing.
- (1) General. The main purpose in developing the definition of warehousing is to start the group thinking about the objectives of their jobs, to make them critical of whether or not they are accomplishing their work along the lines set forth in the definition. Each of the main points in the definition should be carefully developed.
  - (2) Ways in which we can save in a warehouse.
- (a) Space. Space is the basic resource in the warehousing operation. The entire storage operation hinges upon the efficient utilization of space. Space is emphasized in terms of CUBIC FEET. Too often operators think in terms of "square feet." Except where floor load capacities limit full use of cubage, material must be stacked as high as features of pack, facilities, and handling equipment

permit in order to take full advantage of cubage and thereby save in square feet.

- (b) Labor. Labor must be conserved in every job. The amount and use of labor should be thought of in terms of MAN-HOURS rather than just in terms of number of men. We must get the most efficient use out of each hour paid to labor, in so doing, we can increase production and reduce cost.
- (c) Equipment. The proper use of mechanical equipment helps to conserve labor. Every effort must be made to conserve the amount of equipment used and, as in the case of labor, its efficient use should be considered in terms of equipment hours. Care must also be given to its mechanical maintenance.
- (d) Accidents and damages. By reducing accidents and damages in the warehouses, it is evident that cost is reduced, materials saved, and manhours reduced.

# 8-118. Facility Characteristics

a. Detailed planning.	STRESS NEED FOR PLANNING  —"Before we can actually STORE materials we must PLAN."  —"In order to PLAN there are certain FACTS we must know."	
b. Facts about the warehouse.	DEVELOP FACTS ABOUT THE WAREHOUSE  —"What must we know ABOUT the WAREHOUSES?"  (Try to get the following points from the group and list them on the bla board as they are given:)	
	TYPE OF BUILDING SIZE. HOW MANY? SHIPPING AND RECEIVING PLATFORMS DOORWAYS AND ENTRANCES PILLARS, POSTS OR COLUMNS WINDOWS FLOOR LOADS ELEVATORS—in multistory buildings	

- (1) Two prime factors influence the storage manager layout of available space; the characteristics of the storage area—THE CAPACITY FACTOR; and the characteristics of the supplies to be stored—THE COMMODITY FACTOR which will be discussed later.
- (2) These factors cannot be separated; the one influences the other all through the storage operation. It must be realized that before we can actually store materials, there must be planning—WHERE and HOW we are going to store it. Unfortunately, many of our buildings were not de-
- signed primarily for the type of warehousing we must do. We must, therefore, in some cases, make the best of physical difficulties.
- (3) In the planning of warehouse operations, we are mainly interested in the actual physical layout and size of the platforms, doors, columns, and windows. In multistory buildings particularly, we are concerned with floor load capacities and elevators. Without a thorough knowledge of all of these factors, we cannot efficiently start to do the job.

DISCUSS each in detail and in the order followed below:

—"There are two main types—SINGLE-STORY and MULTISTORY."

—"The SINGLE-STORY BUILDING has MANY ADVANTAGES:

NO ELEVATORS

FEWER POSTS AND COLUMNS

DIRECT CONTACT WITH SHIPPING AND RECEIVING DOCKS

GREATER FLOOR LOAD LIMITS

BETTER TRANSPORTATION FACILITIES"

—"The MULTISTORY BUILDING has TWO ADVANTAGES:

COVERS LESS GROUND AREA

CAN BE LOCATED IN METROPOLITAN AREA."

(1) In a majority of our storage installations, particularly in the newer ones, we find single-story buildings constructed along similar lines.

(2) Storage installations vary in size from one or two to any number of these single-story buildings. Each building is usually divided into several sections. There is no typical multistory warehouse.

d. Size of building.

—"What primary facts must we know in order to determine our storage space in each warehouse?"

LENGTH WIDTH HEIGHT

—"Remember, in all buildings we must think in TERMS OF CUBAGE."

(1) To know how much storage space is available, we must know the size of our warehouse, the size of each section; and in the multistory buildings, the size of each floor.

(2) We must consider size in terms of length, width, and height—in other words—in terms of

CUBIC FEET. We can use our square feet to fullest capacity and at the same time waste a great part of our full storage capacity by not stacking high enough. WE MUST CONSERVE OUR VALUABLE STORAGE SPACE.

 e. Shipping and receiving platforms. —"There are THREE THINGS we must consider about our PLATFORMS or DOCKS;

LOCATION

SIZE

HEIGHT (in relation to cars and trucks)."

—"To intelligently plan location of materials we should also have some general appreciation of what percentage of our material is SHIPPED BY RAIL and what percentage BY MOTOR TRUCK."

—"ASK the group if they know percentages as applied to their own warehouse or section. If they are guessing, ask them to check on the information.

(1) The normal, general-purpose, single-story warehouses have one long platform stretching the entire length of the warehouse, used for shipping and receiving by rail. On the opposite side, materials are received or shipped by motor truck on small docks at each section, or on one or more large docks spaced at intervals along the warehouse. The width of these platforms is a very important factor because it determines the type of materials han-

dling operation that can be applied. For example: if the platform is too narrow, the use of the tractor-trailer train system is difficult or the platform may become dangerously congested during receiving and shipping operations in the same vicinity. The entire width of platforms should be covered to protect the material from the weather.

(2) In multistory buildings the platforms are located in as many different locations as there are

buildings. In some of the buildings, however, it is possible to use separate platforms for receiving and shipping in respect to both rail and truck facilities. Such a condition helps to ease the bottlenecks caused by elevators and permits a more continuous flow of material in the materials handling operation. Care should be taken to keep the platforms, which occupy a large portion of the ground floor, clear of stored material.

(3) The height of the platforms, whether in single or in multistory buildings, is an important factor. Platforms either too high or too low will cause

serious handicaps in our materials handling operations as well as create a serious accident hazard. A difference of 6 inches between the height of the platform and the floors of cars or trucks is maximum if an efficient operation is to be accomplished. Conditions where excessive difference in height exists should be corrected by either lowering or raising the track bed, the road surface, or through the use of a compensating bridge plate. The cost of such a change should pay for itself in speedier and more economical operations.

f. Doorways and entrances.	—"It is evident that we must know the LOCATION, NUMBER, and SIZE of our DOORWAYS or ENTRANCES." —"Care must be taken that we make efficient use of these openings."
	— Care must be taken that we make emerge use of these specials

(1) There should be a sufficient number of doorways leading to platforms and between sections of a warehouse to handle the movement of materials. This is particularly true of single-story buildings.

(2) In most of our typical single-story warehouses, there are at least two, and sometimes more, doorways per section leading to the rail platforms; and two doors giving access to sections. THESE DOORS SHOULD BE OF SUFFICIENT SIZE TO ENABLE MECHANICAL EQUIPMENT TO PASS EACH OTHER. TOO MANY DOORWAYS CAN BE A HINDRANCE BECAUSE THEY REDUCE THE WALL SPACE WHICH IS SO VALUABLE FOR STORAGE AREAS.

g. Pillars, posts, and columns.	—"The location, number, and size of the pillars, posts, and columns in a warehouse are IMPORTANT FACTORS CONTROLLING OUR LAY-OUT."
	—"They consume valuable storage space." —"They are usually more of a problem in multistory buildings."
	ASK the group to figure approximately how much square footage and cubage are taken up by the columns on their warehouse floors; also how much wasted storage space around the columns.

(1) The general plan of our floor layout is controlled, to a great extent, by pillars, posts, and columns which are necessary as floor and roof supports, and cannot be removed, yet which do reduce the amount of storage space and must be considered carefully in our planning.

(2) Pillars, posts, and columns, are a problem in our single-story buildings, but not so critical as in some multistory warehouses, where each column may use up as much as four square feet and many more cubic feet of storage space. In addition to this loss of space, we will lose even more in stacking pallets around columns, unless extreme care is given to the method of storing.

(3) Where possible, columns or posts should be

used as aisle guides and also to define the size and location of bays. Certain pieces of fire equipment can be placed on these columns, but care should be taken to place this equipment so that it uses the least amount of storage space. It should be hung on the post adjacent to an aisle, BUT NOT EXTENDING INTO THE AISLE BECAUSE IT CUTS DOWN THE AISLE WIDTH AND MAY BE DAMAGED BY PASSING MECHANICAL EQUIPMENT.

(4) Under no conditions should fire equipment be placed on the back of the post from the aisle line for, in so doing, storage space is greatly reduced and valuable seconds can be lost looking for equipment in case of need. h. Windows.

—"Can you name any ADVANTAGES or DISADVANTAGES in having WINDOWS in a warehouse?"

Advantages

LIGHT AIR

ENTRANCE FOR FIREMAN

Disadvantages
LOSS OF WALL SPACE
DAMAGE TO MATERIALS
(by elements)

WASTE OF FLOOR SPACE

Windows are more numerous in multistory than in single-story buildings. Although the light and air admitted by windows do improve working condi-

tions, from a purely operations standpoint they are a handicap.

i. Floor load limits.

—"We should all have the SAME IDEA of HOW to FIGURE the AMOUNT of MATERIALS we can STORE on a FLOOR and STAY WITHIN FLOOR LOAD LIMITS."

ASK one of the group to explain how he determines this on his own floor. Continue to ask various members until an agreed method is reached.

—"We should note the following CAUTIONS: WEIGHT should be FIGURED from EACH SQUARE FOOT COVERED.

In the use of pallets, weight is determined by square feet covered by the pallet.

Include the weight of the pallets.

Do not depend too much on safety factor."

Note. Since floor load limits occur mainly in multistory buildings, the subject should be covered briefly when members of the group are concerned with onlysingle-story buildings. Point out some of the problems that are caused and some typical floor load limits. In discussion groups where multistory buildings are of concern the subject should be covered in detail.

(1) Floor load limits can cause a great waste in cubic feet of storage space; however, if these limits are not considered, a tremendous safety hazard is caused. Naturally, these floor load limits are more prevalent in the multistory buildings. Limits in this type of building usually range from 100 pounds per square foot to 350 pounds per square foot. The problem in single-story buildings is small because in the majority of them the limit is so high that it poses little restriction. In multistory build-

ings it is important that a standard method of determining permissible floor loads be decided upon in line with conditions existing in each building. Such a method should be clearly defined, agreed upon, and enforced by those responsible for storage operations.

(2) Normally, safe warehouse floor load limits are determined by reference to the building plans on which the floor capacities in pounds per square foot are customarily designated. Generally, plans for unconverted private buildings may be secured from the former owner or tenant. A competent engineer should be brought in to establish floor load capacity in all cases where building plans are not available, where the plans do not indicate safe floor loads, or where the accuracy of the stated floor load is doubtful.

j. Elevators.

(Note. As in the case of floor loads, the subject of elevators should be touched only briefly in single-story operations, but in detail in multistory buildings.)

-"ELEVATORS in multistory buildings are often the cause of SERIOUS BOTTLENECKS."

-"What must we consider about elevators?"

LOCATION SIZE CAPACITY SPEED

-"They are a SERIOUS SAFETY HAZARD."

(1) Freight elevators are the "arteries" of the multistory warehouse. The number and location of these elevators are important factors in determining the general plan of floor layout. Care must be taken to keep sufficient space clear in front of the elevators on each floor. The size and load capacity of these elevators determines the type of materials handling operation which can be performed. Care must be taken not to overload the elevator; THIS IS A SAFETY MUST. This means, of course, that we must figure not only the weight of the materials, but also the weight of the mechanical equipment,

such as trailers or fork trucks, if such equipment is used. PROPER MAINTENANCE OF THE EL-EVATORS AND TRAINING OF THE OPERA-TORS IS ALSO A SAFETY "MUST."

(2) Because these elevators are often small in size and slow in movement, they create a bottleneck in the operation which is difficult to eliminate. In most cases we cannot enlarge or speed up the elevators; therefore, careful planning and thought can profitably be given to "timing" of the operation to the existing conditions.

# 8-119. Commodity Characteristics

a. Facts about commodities.

#### DEVELOP FACTS ABOUT COMMODITIES

- —"After we have viewed the warehouse from all physical angles, we must then consider the COMMODITIES WE WILL STORE."
- —"We cannot separate these two factors in our planning and thinking—TO-GETHER THEY INFLUENCE OUR METHOD OF LAYOUT AND ALLOCATION OF SPACE."
- —"In this portion we are interested in WHERE we will store the materials— NOT HOW."
- —"WHAT DO WE HAVE TO KNOW ABOUT THE COMMODITIES?"

  (Try to get the following points from the group and list them on the black-board as they are given.)

NATURE (KIND OR TYPE)
AMOUNT
SIZE
WEIGHT
SHAPE
TURNOVER (ACTIVITY)
PERISHABILITY
ODOR

b. Amounts of each commodity.

- —"The AMOUNT of each commodity handled VARIES in EACH STORAGE INSTALLATION and from time to time WITHIN AN INSTALLA-TION."
- —"To keep our planning up to date WE MUST KNOW CONTINUOUSLY what we will be expected to STORE."
- —"As STORAGE MANAGERS AND WAREHOUSE SUPERVISORS, What INFORMATION is AVAILABLE TO US? What information DO YOU GET?

What information WOULD YOU LIKE TO HAVE to help you plan efficiently?"

STOCK LEVELS
DUES-IN NOTICES
AVERAGE ACTIVITY OF MOVEMENT
ADVANCE NOTICE OF SHIPMENT

(1) The supplies handled by the average military storage installation consist of thousands of items of different weight, size, shape, perishability, and crushability. These supplies are packaged various ways within different types of containers, such as: boxes, crates, cartons, bags, bales, or drums. The items vary from a small package of bearings to a complete field hospital and are shipped to the storage installation from thousands of manufacturers and producers.

(2) The fact that commodities or items vary to such a degree complicates the problem not only of handling in transportation, but also of storing in our warehouses or other storage areas. We must study our problem as it relates to the different commodities and do everything within our power to handle the materials efficiently.

(3) Before we can allocate space and layout warehouses or storage areas, we must know something about the type of material and how much will be stored. To aid in this, the controlling agency responsible for a particular storage installation furnishes such data as stock levels, tonnage, and item forecasts, information on manpower strength within

a given area of distribution. All of these aids are a valuable asset in planning storage.

- (4) By whatever means secured, a knowledge of the stock level or quantities to be stored will enable storage personnel to get an overall picture of supply and helps in laying out space in order to eliminate storage bottlenecks and unnecessary rewarehousing. On the other hand, experience gained through issue and receipt will be of invaluable help to storage personnel in determining the best layout for their commodities. Remember that a stock level is only a guide and should not be used as the absolute figure for determining space for an item. You must keep your storage layout simple and above all flexible.
- (5) Usually, the first notification of incoming stock is a distribution directive, schedule of delivery, letter of award, or specific directive from the supply agency. From this information, the "dues in" can be compiled. Storage personnel should study these "dues in" and have their area planned for storage of material when supplies are received; this will help to eliminate unnecessary rewarehousing.

- -"After we know HOW MUCH we have to STORE, and HAVE DECIDED in general WHERE it will be STORED, we must CONSIDER the ITEMS as to their POPULARITY, SIZE, WEIGHT, and SHAPE.
- -"WHERE do you STORE your LARGE, BULKY material?"
- -"Can you move your FAST MOVING goods EASILY and QUICKLY?"
- —"Are you having TROUBLE with DAMAGES to your PERISHABLE materials? If so, it is because of WHERE THEY ARE STORED?"

(1) After we have determined the amount of material we have to store, allocated the proper amount of space, and formulated a GENERAL PLAN; we THEN MUST determine the actual location of the material. Such location is controlled partly by certain characteristics of the items. Large

c. Popularity, size, weight, shape, perishability.

and bulky items should be placed as near the shipping and receiving points as possible to reduce the amount of handling.

(2) In locating materials that have a rapid turnover, every effort should be made to place the materials as near the shipping points as possible and, in multistory buildings as near the elevators as possible and on the floors near the shipping and receiving docks. Slow-moving commodities, of course, can be placed in less accessible locations.

(3) Perishable items should not be stacked near windows or doors because of possible damage from

sunlight, rain or snow. Care should also be taken to store perishable items, bagged materials in particular, where they cannot be damaged by floor dampness caused by sweating. Generally, bagged items should be kept in storage areas having the least amount of temperature change. Commodities which need periodic turning, such as certain items of compounded or chemical nature or items such as kegs of vinegar or pickles, should be placed in an accessible location. Commodities which absorb odors should be kept away from odorous items.

#### 8-120. Aisles

a. Layout.

#### EXPLAIN HOW TO PLAN LAYOUT

- —"Once we know ALL the facts ABOUT the BUILDINGS and the COM-MODITIES, we can then LAY OUT the FLOOR PLAN."
- -"First, we must decide on AISLES regarding:

TYPE

NUMBER

SIZE (Length and width)

LOCATION

DIRECTION"

-"We all realize that AISLES ARE NECESSARY TO:

PROVIDE ACCESS to DOORS on LOADING PLATFORMS,

PROVIDE ACCESS to ELEVATORS in multistory building,

PROVIDE SUFFICIENT SPACE for operating EQUIPMENT,

PROVIDE ACCESS to different kinds of SUPPLIES

PROVIDE SHORTER HAULING DISTANCE."


—"AISLES should be kept to a minimum in number and size because they WASTE STORAGE SPACE."

Note. Illustrate the above point by an example and then ask members of the group if they know exactly what percentage of their available storage space is used for aisles. If they do not know, work out one problem with the group.

(1) The number, type, size, and location of aisles are directly dependent upon the CAPACITY FACTOR and the COMMODITY FACTOR. A warehouseman should not be content to lay out aisles according to a pattern determined either by "someone else" or by precedent. He/she should know WHY the aisle plan is used and BE SURE THAT IT FITS INTO THE PARTICULAR OPERATION after study from all angles. He/She should constantly TRY TO REDUCE the amount of space used by aisles WITHOUT HAMPERING THE OPERATION.

(2) To illustrate the percentage of storage space that can be used by aisles, the following example can be used: Consider a warehouse section 120' × 180' or a total of 21,600 square feet. Two 10' main aisles, the length of section, equal 2,400 square

feet which uses about 11 percent of gross storage space and leaves 89 percent for storage. This PLUS two 10' cross aisles running the width of section equals 3,600 square feet. TOTAL aisle space for the aisles equals 6,000 square feet which uses about 27 percent of gross storage space and leaves about 73 percent for storage (actually, 100 square feet should be subtracted for each point of crossing of aisles; however, for ease of illustration, this has not been considered). If we reduce the width of each of the four aisles ONE FOOT and make them 9 feet instead of 10 feet, we will have 600 square feet. This saving would make space for about 200 additional pallet loads where pallets are stacked three high. This reduction of ONE FOOT would raise the available storage space to 76 percent.

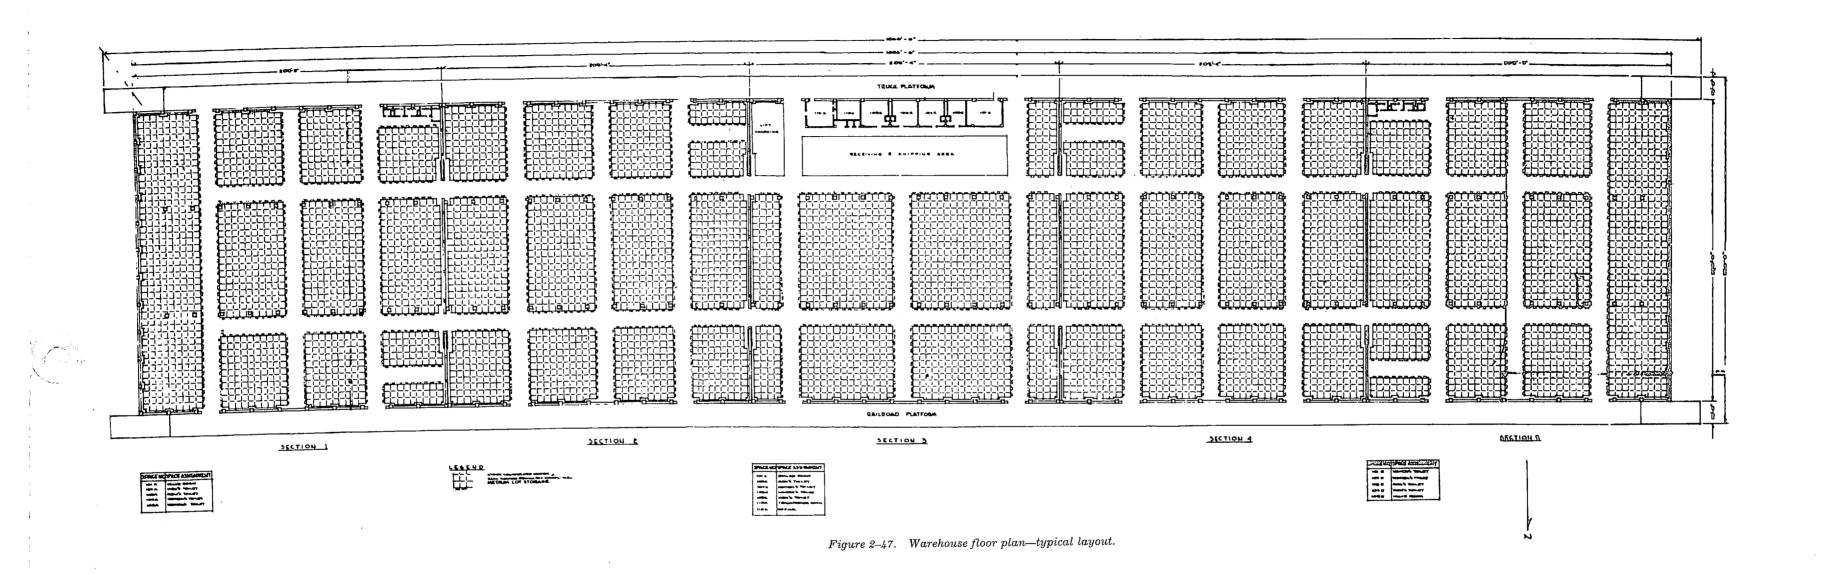

(3) How much area should be used for storage. Naturally the thought in relation to this question is "every available square foot." That is certainly very true, but just how much should be the minimum available area for storage? This will certainly vary from installation to installation depending upon many factors such as building characteristics. and type of commodity to be stored or mission. As a good rule of thumb we may say that a minimum of 65 percent of the available gross space should be available for storage of supplies. This leaves approximately 35 percent of the gross space (inside measurement) that can be used for offices, restrooms, posts, aisles, and other necessary space. To make the group think about the problem of aisle layout from a practical "know-the-reasons" viewpoint rather than from a "how-we-do-it-here" viewpoint, a chart or plan of a different type of building should be used in the discussion. For example: use a physical floor plan which is different from the one used at your installation. As each type of aisle is discussed, it should be on a chart as suggested by the group. A blackboard, about 3 feet by 4 feet, can be used with sample warehouse plans painted on the board. Aisles and commodity locations can then be chalked on it as suggested by the group.

- (4) Before laying out aisles, the storage person must ask:
- (a) Where and how far away are platforms and door openings?
- (b) Approximately how much space will be needed for each item and the sizes of the lots the warehouse is at present expected to store?
- (c) Is it likely that there will be changes in the quantities and types of material in the near future and can such changes be anticipated, so as to avoid extensive rearrangement of aisles?
  - (d) Where are fire walls and fire line valves?
- (e) How many posts or columns support the roof and floors. Where are they, how big are they, and how far apart?
- (f) Will materials be block-stocked or binned? Where binned, aisle space must be reserved in front of each bin.
- (g) Which supplies will be stored mechanically and which by hand? Fork lift trucks cannot work in tight spots behind columns, nor pass packages around a corner.
- (h) What is the size of the forklift trucks to be used? If 6,000 pounds, a larger aisle should be provided; if 2,000 pounds, smaller aisles naturally result.

b. Types of aisles.	<ul> <li>—"There are three TYPES of AISLES COMMONLY used in our warehouses:</li> <li>MAIN AISLES, CROSS TRAFFIC AISLES AND FIRE AISLES."</li> <li>—DISCUSS in DETAIL each of these types, as to number, size, location and direction.</li> </ul>
c. Main or transportation aisles.	<ul> <li>—"MAIN AISLES are sometimes referred to as TRAFFIC or TRANSPORTATION AISLES."</li> <li>—"As in the case of elevators in multistory buildings, MAIN AISLES are the LIFELINES or ARTERIES of a warehouse."</li> <li>—"The location, number, length, and width of these aisles depend upon certain conditions."</li> <li>—"WHAT ARE THE DETERMINING FACTORS?"</li> <li>GET the following points from the group and then have them designate where they would place Main Aisles on the sample layout under varying conditions:</li> </ul>
	TYPE OF STORAGE (Storage mechanically or by hand) SIZE OF EQUIPMENT LOCATION OF DOORS SIZE OF LOTS

(1) These serve as the lifeline or arteries of a warehouse. There should be no "breaks" or "bottlenecks" and they should be kept clear at all times. THEY SHOULD BE LOCATED so that they give direct access to shipping and receiving platforms, doorways between sections, and, in multistory buildings, give access to elevators and conveyors. Although 10 feet is the normally accepted width in warehouses utilizing 4,000-pound forklift trucks, the WIDTH may vary. Size is determined by the type of mechanical equipment used. Aisles should be wide enough to permit equipment to pass and to permit easy working of the fork truck. Experience has taught us that a forklift truck of 2,000 pound capacity requires a 7-foot aisle, and a truck

of 6,000 pounds requires a 11-foot by 6-inch aisle in which to work efficiently.

(2) The NUMBER of transportation aisles in a section or on a floor of a multistory building depends on the number of communicating doors and elevators that must be used to move material in and out of the area. The number is also determined somewhat by the size of the lots and the number of different commodities. In a section where ONE ITEM will fill the entire area, the section could be stacked to its capacity. It would be necessary to leave only enough space to "get at" the items and to permit access for fire prevention or fire fighting purposes.

d. Fire aisles.

- -"FIRE AISLES are NECESSARY IN SOME LOCATIONS under FIRE REGULATIONS."
- -"What are the REGULATIONS governing our own installation?"
- —DISCUSS the fire aisle regulations with the group and be sure each member has a clear understanding of them.
  - CAUTION—BE SURE YOU, AS LEADER, UNDERSTAND THEM.
- -"What factors usually determine the location and number of fire aisles?"

FIRE DOORS
SUBSTANDARD
WINDOWS
LOCATION OF FIRE FIGHTING EQUIPMENT
MATERIAL SUBJECT TO SPONTANEOUS COMBUSTION


- -"What is the MAXIMUM WIDTH of FIRE AISLES?"
- —Have the group designate where they would place fire aisles on a sample plan.

(1) Fire fighting aisles were once widely used in warehouses. Experience has proved that they are often of little help in controlling fire and may actually constitute a fire hazard. The present thinking is that fire aisles should be eliminated except along substandard interior walls and where they lead to fire fighting equipment. Ordinarily, fire is on the surface of the material; the greater the surface, the greater the fire hazard. The exception to this is material subject to spontaneous ignition; which must be watched constantly for overheating; however, fire aisles will not prevent ignition.

(2) In every depot or storage activity a certain number of fire aisles are necessary. The policy in each should be the guide in establishing these aisles. ALTHOUGH THEY ARE NECESSARY, THEY SHOULD BE REDUCED TO A MINIMUM IN NUMBER AND WIDTH. THEY WASTE VALUABLE STORAGE SPACE. It is seldom neces-

sary to have fire aisles wider than 24". In many cases fire aisles can be eliminated by a simple change in the location of the fire fighting apparatus. Previously it has been mentioned that extinguishers and hose fixtures should never be hung BE-HIND posts or columns opposite the aisle. Fire aisles must be used adjacent to windows THAT WILL BE USED AS ENTRANCES by firemen. Fire aisles are not necessary next to exterior walls or standard walls which serve as dividers of sections or units of a warehouse.

(3) Standard fire walls separating buildings or dividing warehouses and sheds into fire areas are those constructed in such a manner that the resulting wall will have a minimum fire resistance rating of 4 hours. The types of fire wall construction which will provide fire resistance for a period of four hours under revised ratings and are established as the minimum standard are:

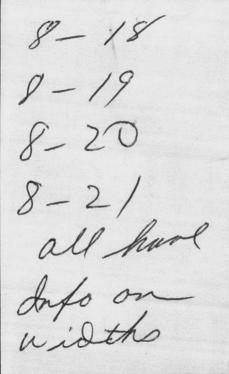

FIRE EXTINGUISHER SER	VICE
Upon delivery to the Bas (Bldg. 1203) this fire extinuill be serviced and check	
REMARKS:	
INSPECTOR	DATE

NSPECTOR	DATE
----------	------

Clay or Shale Brick, 8" Thick Mass Concrete, 7½" Thick Reinforced Concrete, 6½" Thick Structural Tile, 12½" Thick Concrete Block, 10" Thick

A concrete block wall, 8 inches in thickness, compounded of expanded slag pumice in which 62 per-

cent of the wall unit is solids will also meet the standard requirement.

(4) A 24" aişle is maintained along SUB-STANDARD fire walls. Commodities are stored up to a STANDARD fire wall (but not in such a manner as to use the wall to support the stack) EXCEPT that a 36" clearance must be maintained at the sides of the portals between the warehouse sections.

## 8-121. Stock Locator

- a. Locator system.

  —"Keep your LOCATOR SYSTEM as SIMPLE as POSSIBLE."
  —"There are TWO THINGS we want to know:
  Where is it located?
  Which is the oldest?
  —"First, we must decide on a METHOD OF NUMBERING OR LETTER-ING the warehouses, sections, and bays." Explain the method employed at your depot.
  —"Then a method of RECORDING information is needed." Explain operation of vour locator system.
  —"Remember THREE THINGS about STOCK LOCATOR RECORDS:
  They should be as SIMPLE as POSSIBLE
  They are USEFUL ONLY IF they are FOLLOWED UP and KEPT UP TO DATE
  They should be USED FOR PROPER STOCK ROTATION."
- (1) We must be able to locate any item upon call and we must not "take a chance" or carry this information around in our heads. We must devise a system for controlling the placement and locating of material. This system must be understandable not only to the storekeeper, but to ANYONE who may be called upon to find materials for ANY REASON.
- (2) The locator system should contain the information necessary to identify and locate stored supplies. Complicating the system by including "extras" such as inventory figures, stock levels, and records of shipments and receipts breaks down its primary function; the quick and accurate locating of requested supplies.
- (3) A good locator system must start with a plan of the storage areas. The system for numbering warehouses, sections, bays and rows must be de-

vised and made as simple as possible. It must be readily understandable to ALL personnel working in the storage areas. This includes warehousemen, stockpickers, checkers, laborers, and other personnel. There also must be a file maintained, either mechanically, manually, or a combination of both, on which the data necessary to identify the item are maintained and which will reflect all established locations of the item.

(4) The importance of keeping such a locator system up-to-date cannot be stressed too strongly. Any system that is not accurate is of no value; therefore, it will be necessary that the system be audited periodically. Every location of every item in storage areas will be surveyed and the locations reflected by the locator, as presently established, will be reconciled with those locations surveyed.

# 8-122. Summary and Check List

Summary of session.	—"The fact that it and DISCUS; JOB as WAR have a COMP —"As we warned IAL—BUT T —"FAILURE to WASTE of S. —"The following a (HAND OUT —"If YOU can sit you can consi —"If you CAN'T-	SUMMARIZE IMPORTANT POINTS OF SESSION  "The fact that it has taken THIS LENGTH OF TIME to BREAK DOWN and DISCUSS some of the FACTORS in only a SMALL PART of our JOB as WAREHOUSEMEN SHOULD MAKE US REALIZE that we have a COMPLICATED and IMPORTANT job to do."  "As we warned you earlier, MANY OF THESE FACTORS SEEM TRIVIAL—BUT THEY ARE IMPORTANT."  "FAILURE to CONSIDER ALL of THESE FACTORS can and has caused WASTE of SPACE, MANPOWER and VALUABLE TIME."  "The following are a few things on which you can CHECK YOURSELVES."  (HAND OUT check list fig. 8-2.)  "If YOU can sit back and answer these questions to your own satisfaction, you can consider yourself a SUPER WAREHOUSEMAN."  "If you CAN'T—LET'S DO SOMETHING ABOUT IT."  "That's all for this session. We will meet again on		
	(Day)	(Time)	(Place)	
	QUES	ND SERIOUSLY ON THE FO STIONS		
Yes—No  1. Is there enough light (daylight or electric) in aisles to permit safe and efficient operations?  2. In multistory buildings are the floors overloaded?  3. Does layout permit efficient use of all available storage space?  4. Are "rapid turnover" items easily accessible?  5. Does aisle layout permit speedy movement?  6. Are aisles as narrow as practicable?		Yes—No  8. Are there unnecessary lateral or fire aisles?  9. Can everyone find material?  10. Is excessive rewarehousing necessary?  11. Is the section or floor satisfactory?  12. Are plans being made to improve layout?  Note. Unless you can answer "Yes" to Nos.  1, 3, 4, 5, 6, 9, 11, and 12, and "No" to the others, LET'S DO SOMETHING TO CORRECT THE FAULTS.		

Figure 8-2.

## Part III. STORAGE OF MATERIALS

## 8-123. Review

Review of previous session(s).

#### REVIEW PREVIOUS SESSION

- —"In our previous session(s) we discussed HOW we would LAY OUT our storage area and WHERE we would STORE MATERIALS under certain conditions."
- —"The SUCCESS of our PLANNING depends upon HOW WELL we are ACQUAINTED with the TOOLS with which we have to work."
- -"How much we KNOW about the WAREHOUSES as to:

TYPE

SIZE

PLATFORMS

DOORS

COLUMNS

WINDOWS

FLOOR LOADS

ELEVATORS."

-"How much we KNOW about the MATERIALS as to:

TYPE

AMOUNT

SIZE

WEIGHT

SHAPE

TURNOVER

PERISHABILITY

CRUSHABILITY."

- —"From this information we determine the NUMBER, WIDTH and LO-CATION of the TRANSPORTATION and FIRE AISLES."
- —"These AISLES DIVIDE our FLOORS into a number of AREAS where we STORE the MATERIAL."

## 8-124. Objectives

a. Objectives to be achieved.

#### STATE OBJECTIVES

- -"Today, we will discuss HOW we can STACK MATERIAL, the DIFFER-ENT METHODS used, and WHEN they are used."
- —"BEFORE we actually "put away" our supplies we must know the OB-JECTIVES—WHAT we are trying to achieve."
- —"There are FOUR MAIN OBJECTIVES in storing:"
  (WRITE following points on blackboard):

CONSERVE SPACE
ASSURE SPEED OF MOVEMENT
ASSURE STABILITY
ORDERLINESS

- (1) There is more to "warehousing" and "storing" than handling materials. Certain objectives must be kept in mind at all times and constantly checked by those concerned. There are FOUR MAIN OBJECTIVES that must be accomplished if the job is to be done efficiently.
- (2) Storage methods should be such that they CONSERVE SPACE, ASSURE SPEED OF MOVEMENT, ASSURE STABILITY OF THE STACKS, AND PERMIT THE EASY LOCATION AND INVENTORY OF MATERIAL BY HAVING GOOD ORDER IN FORMING STACKS.

b. Conservation of space.

-"We all agree and realize that we MUST CONSERVE SPACE."

—"To CONSERVE SPACE we must STACK as HIGH as practicable and as COMPACTLY as possible."

-"What are some of the FACTORS that LIMIT HEIGHT?"

TRUSSES
FIRE EXTINGUISHER LINES
HEATING EQUIPMENT
LIGHTS
FLOOR LOAD LIMIT
METHOD OF STACKING—
BY HAND
BY MECHANICAL EQUIPMENT
CRUSHABILITY OF MATERIALS

—"What are some of the FACTORS that make it DIFFICULT to STACK COMPACTLY?"

DISCUSS following points as to how they can CAUSE DIFFICULTY:

NUMEROUS POSTS AND COLUMNS
POORLY TRAINED LABOR AND EQUIPMENT OPERATORS
TYPE OF STACKING
ODD SIZE CONTAINERS OF THE SAME ITEM

- (1) The necessity to CONSERVE STORAGE SPACE is generally accepted, particularly covered space—not only because of the possible shortage of such space, but also because of the cost. It would seem ridiculous if the Empire State Building engineers had planned to have office space on the first floor only, and left those millions of cubic feet overhead vacant. It is just as ridiculous to have ceilings twenty feet high in a warehouse and then stack material only five feet high. There are two things that SHOULD BE DONE if space is to be conserved. Material must be stacked as HIGH as practicable and as COMPACTLY as possible. Naturally, there are certain physical conditions that limit the height and compactness of stacking material in a warehouse.
- (2) In many of our older buildings trusses handicap the height to which material can be stacked. In any case, the height of stacks BELOW the level of roof trusses or beams will provide that an 18" clearance will be maintained when stack heights do not exceed 15 feet or 36" clearance when stacks exceed 15 feet in height. In those instances where supplies are stored ABOVE the level of the lower truss members a HORIZONTAL clearance of 18" will be maintained.
- (3) The height of the stack BELOW automatic sprinkler DEFLECTORS will allow for an 18"

clearance when stack heights do not exceed 15 feet and a 36" clearance for stacks which exceed 15 feet. Stacks made up of hazardous commodities will maintain a 36" clearance regardless of height.

- (4) Handicapping floor load limits occur most frequently in multistory buildings, however, may also be present in single-story structures. Because of the limitations on floor loads full advantage of height can be taken by locating heavier materials on floors or portions of floors having higher load limits.
- (5) Whether we do stacking by hand or whether we use mechanical equipment, there are height limits in stacking.
- (6) Ways must be devised to avoid damage to crushable materials. Use of racks, bins, or box pallets helps. Even with the use of such aids, it is sometimes difficult to stack to any great height and maintain stability.
- (7) Compactness in stacks is just as important in storing as in packing a trunk. The more compactly we pack, the more we can get into a trunk. Likewise the more compactly we stack, the more we can get into warehouses or other storage areas.
- (8) Much space is lost by failure to stack compactly around the posts and columns in buildings. In the planning of layout and stacking methods, we must consider how we can best eliminate waste

space around posts and columns. Although the space lost around EACH COLUMN may be a question of only a few feet, the total loss, when we consider ALL THE POSTS AND COLUMNS in a building, may amount to as much as several hundred square feet. In stacking PALLETS around COLUMNS, the pallets, in some instances, can be turned to make them fit closely. Care must be taken not to block the movement of other pallets.

(9) The method used to stack the material directly affects the compactness of stacks. In block stacking by hand, there should be no wasted space. If block stacking by fork trucks with pallets or dun-

nage is not properly done, much space can be wasted. Operators should be well trained in the correct methods of stacking. These methods will be discussed in the portion devoted to materials handling.

(10) In stacking various size containers of the same item, much space can be wasted and compactness decreased UNLESS an effort is made to match and stack the containers by size. Although such care may take a little more time, it usually pays dividends in the conservation of space and convenience in inventory.

## c. Assure speed of movement.

-"There are certain PRECAUTIONS we can take in our PLANNING and in our STACKING to ASSURE SPEED of MOVEMENT—to ASSURE RAPID AVAILABILITY as mentioned in our definition."

—"HOW can we ASSURE RAPID AVAILABILITY?" GET following points from group:

AISLES WIDE ENOUGH LOCATION OF FAST MOVING ITEMS TYPE OF STACKING, AND MECHANICAL EQUIPMENT

-"Are we going to SACRIFICE STORAGE SPACE for SPEED?"

(1) In the objectives of storing, RAPID AVAILABILITY of the material is stressed. We must be "movement minded as well as storage minded." Movement of supplies is an all-important objective. Our present storage program must be built around the movement of material. Storage must be considered in terms of MORE material stored in the SAME amount of space—perhaps in less amount of space. The speed of the movement of material can be increased if certain precautions

are taken in the warehouse to assure RAPID AVAILABILITY.

(2) Aisles must be wide enough to enable the mechanical equipment to operate easily and speedily. Material that is fast moving and has a high rate of turnover must be stored in locations where it can be quickly reached, thereby reducing the amount of handling. The type and method of stacking used must be considered first and in the light of the turnover of the material.

## d. Assure stability.

We must be sure that our STACKS ARE STABLE.

- —"This can be assured by CAREFUL PLANNING and by CAREFUL STORING OR STACKING."
- —"We must know HOW to STACK commodities packed loose, in cartons, drums, bags, glass, boxes, and crates."
- —"We must know HOW to USE the various STORAGE AIDS such as DUN-NAGE, and PALLETS which we will discuss in detail later in this session."
- -"Once we PUT the STACKS UP, we want them to STAY PUT."
- —"Both LABOR and MATERIAL must be PROTECTED from ACCI-DENTS, DAMAGE, and INJURY."

(1) Unfortunately, many items handled do not lend themselves easily to good stable stacking. Many items, subsistence for instance, because of their shape, size, and pack can be stacked uniform

and stable without too much difficulty. Other items lend themselves to efficient stacking only by the use of proper storage aids.

(2) Every effort should be made to standardize

the methods of stacking these commodities; this can be done only by a constant study and search for improvement. These items must be stacked as high as possible with as little loss of space as possible. Constant check should be made of all stacks; those that are unstable, shifting, or leaning should be corrected and studied in the light of WHY they are not stable and what causes them to shift. By so doing, many accidents and much lost time rebuilding or repairing stacks can be prevented.

e. Orderliness.	—"Bring out through questions and comments from various class members their idea of ORDERLINESS in stacking."
	—"Means STRAIGHT, STABLE, EASILY ACCESSIBLE stacks—."
	—"Does NOT mean PRECISION warehousing which is NOT DESIRED."
	—"Means like items placed together so that CONTENTS of stack and con-
	tainers may be QUICKLY and EASILY IDENTIFIED."
	—"There is NO excuse for SLOPPY STACKING."
	—"There are three self-evident reasons for ORDERLINESS in stacking:
	STOCK PICKING
	INVENTORY
	INHERENT NECESSITY IN STORAGE OPERATIONS TO MAIN-

(1) There is no more excuse for confusion and disorder in arranging stacks in a storage location than there is in placing the furniture in your home around the room in "helter skelter" fashion. We would not tolerate a dangerous unsightly three-legged chair in the room; we would not stack a table on top of the sofa; or we would not buy a beautiful picture and spend valuable time in the hanging procedure then turn the picture facing the wall.

(2) Examples which can be easily applied to

warehousing military supplies in an orderly manner

- (a) STABLE STACKS in reasonably regular and neat arrangement.
- (b) QUANTITY in each row UNIFORM for ease in inventory.
- (c) Boxes arranged so that CONTENTS are READILY DETERMINED.
- (d) No "MIXED STACKS" to waste valuable time during inventory or "LOST" MATERIAL that causes WAREHOUSE REFUSALS.

# 8-125. Types of Stacks and Their Use

a. Stacking.

—"Name and describe the storage circumstances wherein we build stacks for"—

LARGE LOT BULK BAY STORAGE MEDIUM LOT STORAGE SMALL LOT STORAGE

—"BULK BAY STORAGE consists of LARGE BLOCK STACKS for storing large quantities of the same item."

—"MEDIUM LOT STORAGE is defined as a stack of material requiring one to three pallet stacks, stored to maximum storage height."

—"SMALL LOT STORAGE is a stack consisting of a quantity of supplies ranging from one container to a lot consisting of two or more pallets but less than the quantity required to complete a full pallet stack. Stress following KEY THOUGHT.

—"Where possible all stacks should START AT THE WALL and be WORKED FORWARD TO AN AISLE."

—"Stacks built in the large center sections should be started at an imaginary back line and built forward to an aisle."

Discuss with the group large bulk lot stacking as it is used in their ware-houses.

—"WHERE in your warehouse do you use this type of stacking?"

—"WHAT items are usually stacked in large bulk lots?"

Discuss the items and conditions of stacking supplies in medium lot storage.

—"Explain 'side to back' stacking."

-"Where is it used?"

- —"What commodities do we stack in this manner in our warehouses?" Discuss small lot storage.
- -"Why is it necessary to have small lot stacks?"
- -"What do you stack in small lot storage?"

b. Discussion guide for types of stacks.

- (1) When discussing stacking we should take care to differentiate between type of stack and method of stacking. In this outline method refers to a WAY of building a stack such as by the use of forklift trucks and pallets or through the use of stacking equipment in outside storage. Excluding retail bin areas we might consider that our storage area is made up of two types of stacks—BLOCK STACKS and SHORT LOT STACKS.
- (a) A BLOCK STACK may be defined as a "self-supporting regular stack two or more wide, two or more deep, and two or more high." From this we can see that the supplies we place in LARGE LOT BULK STORAGE as well as those we stack in MEDIUM LOT STORAGE are both block stacks. However, we have come to a general understanding that a BLOCK STACK consists of supplies stored in carload or truckload lots filling an area of perhaps 20 feet by 20 feet and stacked to a height of from 10 to 14 feet, or in other words LARGE lot storage. This type of stack is the most efficient method of conserving space, and we should try to follow this type of stacking as often as possible. It should be done with mechanical equipment.

- (b) Block stacks are limited only by:
  - 1. MHE.
  - 2. Quantity of the item.
  - 3. Size and height of the building.
  - 4. Floor load limits.
  - 5. Necessary aisle space.
  - 6. Size, shape, and crushability of supplies.
  - 7. Items subject to spontaneous combus-

tion.

(c) Block stacks start back at the wall and end at an aisle, or in the case of large center sections of storage space, the block stack starts at an imaginary line drawn through the longitudinal axis of the space, and extends in either direction to the nearest aisle. Often two blocks of different kinds of supplies are stacked back to back in one of these large center spaces. In cases of extremely large quantities of one commodity, such as mattresses, it is possible to fill an entire floor area of a section and leave only the necessary aisles for fire protection and to get to and move the material. FOR SAFETY REASONS, CARE SHOULD BE TAKEN IN BUILDING BLOCK STACKS TO MAKE THEM STABLE AND SELF-SUPPORT-ING.

(2) Stacking for medium lot storage. One very efficient manner of stacking items in medium lots storage is "side to back" storage adjacent to aisles. By so doing we can eliminate in many instances, the need for additional aisles, or reduce the rewarehousing necessary to recapture bulk storage space.

(3) Small lots. One of the greatest problems in stacking small lots is the necessity for obtaining accessibility without using bulk storage areas or

increasing aisle requirements. To eliminate this, small lots should be stacked in shallow storage space adjacent to warehouse walls bordering transportation aisles or side to back with large storage blocks running parallel with aisles. Box pallets, pallet racks, or bin racks are the most convenient means of stacking this type of supplies in order to take full advantage of storage heights and to maintain quick accessibility to the various odd sizes, lots, or quantities of supplies stored in this manner.

# 8-126. Honeycombing

Cause and effect of honeycombing.

EXPLAIN CAUSE AND EFFECT OF "HONEYCOMBING"

—"One of the BIGGEST SPACE WASTERS IS HONEYCOMBING." (EX-PLAIN what is meant by HONEYCOMBING. ILLUSTRATE by picture or drawing on the blackboard.)

—"By HONEYCOMBING we mean the LOSS of SPACE caused by storage or PARTIAL SHIPMENT of lots in a manner that leaves HOLES which CANNOT be FILLED except with an identical item until the BALANCE of that particular LOT is SHIPPED."

-"HONEYCOMBING can occur in ANY TYPE of STACKING."

-"Do you have difficulty with this problem?"

—"What ITEMS or what CONDITIONS cause the biggest 'headache'?"

LESS THAN CARLOAD LOTS
MOTOR TRUCK SHIPMENTS
ITEMS WHICH MUST BE SHIPPED IN ORDER OF AGE
SIZE ITEMS
SMALL LOTS

- -- "What have YOU DONE or what CAN BE DONE to ELIMINATE or REDUCE HONEYCOMBING?"
- —"What CORRECTIVE MEASURES can we take to REDUCE HONEY-COMBING?"

PROPER PLANNING
USE OF SHORT ROWS IN BLOCK AND SIZE STACKING
USE OF SHORT ROWS ALONG EDGES OF BLOCK STACKS
USE OF RACKS, BINS, BOX PALLETS
USE OF SHORT WALL SPACE
MINOR REWAREHOUSING—"Floor CLEANUP"

a. To honeycomb is to store or remove supplies in such a way that unusable areas of storage space are created within the stack. Bad storage and delivery methods conceivably could leave a warehouse only limitedly occupied, yet with no space available for new storage. Preventing honeycombing is one of the most difficult problems faced by a warehouseman; it can occur, almost before he/she realizes it, in any commodity or in any method of stacking. Although honeycombing can occur even in large

blocks of stacked commodities that are shipped in carload lots, its most usual occurrence is in the storing of "LESS THAN CARLOAD LOTS," MATERIAL RECEIVED BY MOTOR TRUCKS, ITEMS WHICH MUST BE SHIPPED IN ORDER OF AGE, SIZED ITEMS IN ROW STACKS, AND SMALL LOTS. There are certain things that can be done to REDUCE the amount of honeycombing in a warehouse.

b. The problem of honeycombing emphasizes the

necessity for CAREFUL PLANNING of operations and emphasizes the importance of knowing WHAT we are going to store, HOW MUCH and WHERE we will store, as well as HOW we are going to store. We must also know whether the material will be received or shipped in carload lots or whether they must be shipped in order of age. AFTER we know all of these facts, there are certain precautions to take in stacking and storing to reduce the amount of honeycombing in the warehouse. Minor rewarehousing, or "floor cleanup" of short lots, which have caused honeycombing due to shipping out of large blocks, should be considered. These items should be moved to short lot areas if receiving of similar items is not expected in the immediate future.

c. In the session on LAYOUT, we mentioned that by experience we determined that, as a general rule, we should limit the depth of our rows to between 25 and 40 feet. This means that under ordinary circumstances, a shipment will cause the removal of one, two or three rows, and leave space for a similar amount of new material to be stored in the same location. In cases where we know that exceptionally small shipments of a certain commodity are made, it is sometimes advantageous to shorten the rows further.

d. Another method that can be used in the case of short lots is to store such items along the edges of a large block stack, facing at right angles to the block stack, and also facing a transportation aisle. The depth of these rows depends, of course, upon the amount of the commodity and may vary from one to three containers or loads.

e. In stacking material along the edges of block stacks, the use of storage aids further reduces the chance for honeycombing and also conserves space, in that it is possible to stack higher and thereby reduce the square footage. In other words, it eliminates having to spread material all over the floor and takes advantage of cubage.

f. In many warehouses, there are numerous short wall spaces which can be used for the storing of odd lots. This, of course, prevents wasting valuable square footage and cubage in the large center bays.

# 8-127. Storage Aids

- a. Types and uses of storage aids.
- DISCUSS TYPES AND USES OF STORAGE AIDS
- —"There are NUMEROUS WAYS of STABILIZING STACKS—they might be called 'tricks of the trade':"
- -"They are such things as:

CROSS-STACKING

DUNNAGE

BINDERS

- PALLETS/PALLET SUPPORT SETS/BOX PALLETS."
- -"We should understand HOW, WHEN and WHERE to use them."
- -DISCUSS each of these STORAGE AIDS in order and ILLUSTRATE
- —ASK the group to give EXAMPLES of where they are used in their own warehouse and get improvements, if possible.
- (1) Regardless of the quantity of supplies to be stored, there are certain "tricks of the trade" which we must know and use if we are to stabilize our stacks properly and facilitate handling.
- (2) Such things as "cross-stacking," dunnage, binders, bulkheads, and the most used storage aid—pallets—must be understood from the standpoint of both meaning and purpose.

b. Cross-stacking.

- -"What is meant by 'CROSS-STACKING'?"
- -"What ADVANTAGE is to be gained by CROSS-STACKING material on a pallet?"

STABILITY

—"What OTHER MEANS can be used to get STABILITY in addition to, or instead of, CROSS-STACKING?"

> DUNNAGE BINDERS

(1) By cross-stacking we mean alternating the direction of placing cartons or containers in a stack in order to "tie" them together. The method of cross-stacking varies with the size, shape, and crushability of the various items. Care must be taken to cross-stack in a uniform manner so that inventory can be easily taken. Also, care must be taken in cross-stacking to effect as little loss of space as possible; this calls once more for careful PLANNING—it must NOT be done haphazardly. Thousands of valuable cubic feet can be lost in a

warehouse by poor cross-stacking; this is particularly true in cross-stacking loads on pallets.

(2) Although the primary purpose of cross-stacking is stability, poor cross-stacking can cause serious INSTABILITY. In stacking pallet loads, the effort to assure stability often causes excessive waste of space. Both factors must be carefully weighed before a standard practice is set up. Sometimes it pays to use other ways to get the desired stability.

c. Dunnage (general).

—"The term 'DUNNAGE' as applied to warehousing covers a NUMBER of TYPES—DIFFERENT as to MATERIAL and USE."

—"Let's WRITE them on the blackboard and DISCUSS IT and WHERE YOU USE them in the warehouse."

HORIZONTAL DUNNAGE FLOOR DUNNAGE LONG DUNNAGE SHORT DUNNAGE VERTICAL DUNNAGE

(1) Dunnage as applied to warehousing covers a number of different uses. Dunnage is used primarily for spacers and in some cases to protect the material from deterioration. Specifically, the types of dunnage used throughout our military warehouses may be identified as horizontal dunnage consisting of floor dunnage, long dunnage, short dunnage, and vertical dunnage. Each of these has

a definite place in our stacking methods and should be used only for the purpose intended and when actually needed.

(2) We should not use dunnage "just for the sake of using dunnage." Many times careful PLAN-NING and a thorough study of the problem will effect with satisfactory results some way to stack WITHOUT the use of dunnage.

d. Floor dunnage.

-"What do we mean when we speak of 'FLOOR DUNNAGE'?"

-"WHERE do you USE FLOOR DUNNAGE?"

—"IS IT NECESSARY? REMEMBER—LUMBER IS EXPENSIVE."

-"What are the ADVANTAGES to be gained?"

SAFEGUARDS PERISHABLE ITEMS such as

BAGGED COMMODITIES CLOTHING From FLOOR SWEATING RAIN LEAKS

-"Are there any DISADVANTAGES?"

USES MANY BOARD FEET OF LUMBER HANDICAPS MATERIALS HANDLING SAFETY HAZARD

(1) Floor dunnage consists of boards of various thicknesses and widths, laid in some systematic way on the floor to raise the material and protect it from moisture and dampness. This type of dunnage should be used only where materials are hand-stacked and is required only in a few instances and under certain unusual conditions. Perishable items, which can be damaged by moisture, should be either

palletized or placed on floor dunnage.

(2) If the lengths of dunnage are ten feet or more, floor dunnage may be a hindrance to materials handling operation. Such misuse tends to slow up the movement of equipment and is also hazardous to people working in the area. A good rule to follow is: eliminate the use of floor dunnage as much as possible.

e. Long dunnage.

- —"ALTHOUGH LONG DUNNAGE can be used as FLOOR DUNNAGE, we USUALLY THINK of LONG DUNNAGE as being used to STA-BILIZE STACKS of IRREGULARLY SHAPED and CRUSHABLE ITEMS."
- —"Can you think of any DISADVANTAGES in the use of LONG DUN-NAGE?"

DIFFICULT TO HANDLE SAFETY HAZARD WASTES LUMBER (usually must be cut)

- "BEFORE you use LONG DUNNAGE, BE SURE there is NO OTHER WAY. IF YOU MUST USE IT, KEEP the lengths within TEN FEET."

-"Is LONG DUNNAGE being used?"
(If "YES")

—"WHERE is it used? Can we use SHORT DUNNAGE instead?"

(1) The use of dunnage is being discontinued as much as possible; it has been found by experience that many of the items formerly thought to require long dunnage can be more effectively and economically stabilized by either cross-stacking or the use of short dunnage or pallets. As in the case of floor dunnage, long dunnage hampers the materials handling operation. In "tearing down" a stack, the long

dunnage must be sawed off as the work progresses; this results in a waste of lumber as well as a cumbersome operation. If the lumber is not cut, then the stack must be broken down layer by layer rather than by column.

(2) In some instances in outside storage, long dunnage is used—merely because "that's the way we have always done it"—rather than as a result

of a careful study of the problem. For example, in stacking drums, the use of long dunnage on top of each layer is sometimes used to get a more stable and more even stack—and supposedly to facilitate handling. Actually, if the surface of the storage area is leveled off by use of long dunnage (floor dunnage) and the drums are pyramided, blocks placed under the front and rear of the stack, the job will be much

easier, more compact, and much more stable. This method of forming block stacks is known as PY-RAMIDAL stacking. Six inches of long dunnage should be placed on the ground, but no dunnage is needed between the tiers. Wedge-shaped blocks or but boards can be used at the ends of tiers for stability.

-"We usually refer to SHORT DUNNAGE as meaning pieces of LUMBER
2" × 4" or 4" × 4", cut in lengths of from two to four feet."
-"What is the MOST COMMON USE of SHORT DUNNAGE?"

SPACERS BETWEEN BOXES PERMITTING
USE OF FORKS FOR LIFTING

-"WHERE are you using SHORT DUNNAGE, and in handling WHAT
COMMODITIES?"
-"How do you DETERMINE WHETHER to use PALLETS or SHORT
DUNNAGE?""
-"When using SHORT DUNNAGE be sure that it is cut the CORRECT
SIZE and RIGHT AMOUNT—READY BEFORE you START the job."

(1) Usually, this type of dunnage is cut from pieces of 2" × 4" lumber and is used primarily in handling heavy boxes that do not lend themselves to palletizing, such as refrigerators, machinery, and similar items. Short dunnage serves to separate the containers so that the forks of the truck can be inserted for transporting and stacking the commodity. Care should be taken in cutting this type of dunnage so that there is sufficient dunnage to do the job and that it is cut in correct lengths. Dunnage to be used in handling a container 30" deep should be cut between 28" and 30". UNDER NO CONDITIONS SHOULD IT BE CUT SO THAT IT

EXTENDS BEYOND THE LIMITS OF THE CONTAINER.

(2) One problem that often confronts storage personnel is whether to use pallets or short dunnage. This should be easily solved by remembering one of the principal objectives in materials handling: "to transport and stack as much as is humanly or mechanically possible in one load, under existing conditions, with an eye to cost, speed, and safety—in other words, to do the job efficiently." Therefore, IF AN EQUAL AMOUNT OF MATERIAL CAN BE HANDLED EFFICIENTLY ON EITHER PALLET OR SHORT DUNNAGE, SHORT DUNNAGE IS MORE ECONOMICAL.

g. Vertical dunnage.

—"Pieces of DUNNAGE can ALSO be used in a VERTICAL position to STABILIZE CRUSHABLE ITEMS and to SPREAD WEIGHT OF PALLET LOADS."

—"WHERE in your warehouses have you used VERTICAL DUNNAGE?"

Pieces of dunnage can be used in a vertical position to stabilize crushable items and to spread the weight of pallet loads. h. Binders.

- "Strips of PAPER, OSNABURG or BURLAP, and sometimes thin strips of WOOD, can be used to 'TIE' columns of MATERIALS TOGETHER."
- -"In some depots they speak of these types of binders as DUNNAGE."
- -"We should refer to them simply as BINDERS."
- "When and WHERE do you think that such a method can be used to advantage?"

BETWEEN LAYERS OF SLIPPERY CONTAINERS BETWEEN THE TWO TOP LAYERS OF A PALLET WHICH NEEDS STABILITY BECAUSE IT HAS NOT BEEN CROSS-STACKED.

—"WHAT OTHER MEANS, besides CROSS-STACKING and BINDING, can we USE for STABILIZING and TYING TOGETHER ODD SHAPED and SLIPPERY ITEMS on PALLETS or in BLOCK STACKS?"

CORD or STRING STEEL STRAPPING

(1) Strips of paper, osnaburg, or burlap, and sometimes thin strips of wood can be used to "tie" columns together. Although such storage aids are sometimes referred to as "dunnage," they are actually "binders" and should be referred to as such. The binder in this case should be inserted between the two top layers, depending upon the commodity. Such binders can be used also to "tie" cartons on a pallet if, due to their shape, they cannot be crosstied, or if they have been stacked to conserve space on the pallet. In the latter case, the binder should

be inserted between the two top layers of the pallet load.

(2) In addition to the use of the above-mentioned aids, pieces of cord, string, or steel strapping can be used to bind pallet loads together. These can be used to bind loads of paper rolls or cartons which have not been cross-tied. It is necessary to tie such loads around the top layer only or, in the case of paper rolls, around the tops of the rolls. The use of metal strapping is recommended only in exceptional cases.

i. Pallets (general).

- —"PALLETS are really 'GLORIFIED DUNNAGE'. They are an IMPROVE-MENT on the SKID."
- —"There are THREE GENERAL TYPES of PALLETS used in our warehouses. Can you NAME them?"

SINGLE-FACED (SKID) DOUBLE-FACED BOX (Permanent and Collapsible)

-DESCRIBE AND DISCUSS TYPES in following order:

- (1) A pallet is a small wooden platform upon which containers are loaded in unit blocks. There are three common types: SINGLE-FACED PALLET, DOUBLE-FACED PALLET, BOX PALLET.
- (2) Actually, pallets might be called "glorified" dunnage and are an improvement in storage operations over the "skid" or "sling board" used in marine operations.

j. Single and double-faced pallets.

- -"What do we mean by SINGLE-FACED PALLETS?"
- -"Do you USE SINGLE-FACED PALLETS in your operation?" (If "YES"):

-"WHERE and HOW?" (If "NO"):

- -"COULD we USE them to ADVANTAGE?""
- -"The MOST COMMONLY USED PALLET in our warehouses is the DOU-BLE-FACED PALLET."
- —"FORK TRUCK and PALLETS have become as closely connected as 'HAM and EGGS'."
- --"They have become so CLOSELY related that quite often we forget that FORK TRUCKS can DO many EFFICIENT JOBS WITHOUT the AID of PALLETS. BUT PALLETS ARE USELESS WITHOUT FORK TRUCKS."
- —"Will someone explain the basic CONSTRUCTION of the DOUBLE-FACED PALLET and give the REASONS for its CONSTRUCTION THIS WAY?"

Check to make sure that he explains the following points with the "whys."

TYPE OF WOOD (hard or soft)
SIZE OF BOARDS AND SPACING—TOP PLATFORM
SIZE OF BOARDS AND SPACING—BOTTOM PLATFORM
SIZE AND NUMBER OF STRINGERS
CHAMFER ON BOTTOM OF FRONT FACE
NAILS OR BOLTS FOR FASTENING (Drive screw nails)
PLATFORM OVERHANG STRINGERS
4-WAY OR 2-WAY ENTRY
WEIGHT

- "WHAT SIZE PALLETS are used here? WHAT DETERMINES the SIZE?"
- -"WHAT are the DIFFERENT SIZES USED for?"
- -"COULD THE NUMBER OF DIFFERENT SIZES BE REDUCED?"
- —DISCUSS THE 4-way 40 × 48 pallet

CONSTRUCTION PURPOSE FEATURES ADAPTABILITY

- (1) A single-faced pallet is a single platform with stringers underneath to provide clearance for the tines of a fork lift truck and may be set down upon such items as wooden boxes, barrels, and drums which will not be damaged by the concentrated pressure of the stringers. Single-faced pallets could be used to advantage in some multistory buildings on floors which have such a low floor load capacity that pallet loads cannot be topped and mechanical equipment cannot be used. Single-faced pallets are used quite often in conjunction with hydraulic hand lifts and straddle-type fork trucks.
- (2) A double-faced pallet is the one most commonly used; hundreds of thousands of them are in use at this time. A double-faced pallet is constructed as a double platform separated by stringers. The
- tines of the fork truck enter between the two platforms. The boards of the lower platform are separated to make room for the drop wheels of hand fork trucks. The smooth bottom surface distributes pressure equally on the pallet load stored beneath. Fork trucks and pallets have become as closely connected as "ham and eggs," and we sometimes forget that fork trucks can do many efficient jobs without the aid of pallets. Pallets, however, are of little value without fork trucks.
- (3) It would not be efficient to have as many different sized pallets as we have items. To make pallet loads fit perfectly would require hundreds of different sizes; although it might save space, it would cause confusion and waste of time in the operation. The basic factors which determine pallet

design and size are: size of package or pieces of material to be stored; distance between warehouse columns; distance between loading or unloading points and points of storage; width of aisles required for type of fork lift trucks to be used; layout of storage space, location of aisles; whether pallets are to be used in hoisting operations; whether pallets are to be used for shipping purposes; maximum weight to be stored on a pallet; floor load-weight limit; whether pallets are to be used for storage in

the open; and whether pallets must pass through doors of railroad cars or trucks and loaded therein.

(4) Much experience and research has developed the 40" × 48" pallet as the size that will accommodate most packages and also store well in most military warehouses and commercial carriers, both car and truck; it has, therefore, been adopted as the standard size for use in the military supply system. There are other sizes which have special though somewhat limited application.

- k. Box pallets/pallet support sets.
- —"BOX PALLETS/PALLET SUPPORT SETS are being used MORE AND MORE in our storage operations."
- —"What is meant by BOX PALLET/PALLET SUPPORT SET?"
- —"WHEN and WHERE can we use BOX PALLETS/PALLET SUPPORT SETS EFFICIENTLY?"

STACKING SMALL LOTS
STACKING CRUSHABLE ITEMS
STACKING SLIPPERY BAGGED ITEMS
STACKING AGAINST SHORT WALL SPACE
STACKING ALONG ENDS OF LARGE BLOCK STACKS

(1) Box pallets/pallet support sets are being used more and more in warehouses; as in the case of anything that solves problems for us, we tend to overuse it. These aids have a definite place in our operations and should be used only in their place. Pallet support sets adapt to pallets and form a metal super structure (box effect) for stacking pallets and material. Box pallets are merely an adaption of the standard double-faced pallet. A simple superstructure is built on the pallet to give the general appearance of a crate.

(2) CRUSHABLE ITEMS which will not bear up under the weight of stacked regular pallet loads can be stored in these aids; this method gains more height and assures stability. In handling such crushable items box pallets/pallet support sets are speedier than portable racks. SLIPPERY BAGGED ITEMS in many cases can be handled more efficiently on box pallets/pallet support sets than by hand stacking. SMALL AND ODD LOTS can be stacked to advantage in box pallets; this eliminates much honeycombing and permits higher stacking. Box pallets/pallet support sets instead of regular pallets or permanent racks, can be used to advantage against SHORT WALL SPACE and along the EDGES OF LARGE BLOCK STACKS.

l. Stacking materials on pallets.

—"What are the main PURPOSES and the ADVANTAGES of using PAL-LETS in warehousing?"

MOVE GREATER NUMBER OF PIECES AT ONE TIME INCREASE SPEED OF HANDLING PERMIT HIGH STACKING FASTER AND WITH LESS DAN-GER

-"Are there any DISADVANTAGES in the use of PALLETS?"

USE LARGE AMOUNT OF LUMBER COSTLY WASTE OF CUBAGE IN STORAGE SPACE

- —"HOW can we determine WHAT ITEMS should be PALLETIZED?"
  CAUTION GROUP IN FOLLOWING KEY THOUGHT:
- —"NO MATERIAL SHOULD BE PALLETIZED ON FLAT PALLETS UNLESS WE ARE SURE THE STACKS WILL BE STABLE."
- —"What determines the NUMBER OF CONTAINERS that can be STACKED on a PALLET?"

SIZE OF PALLET
SIZE AND SHAPE OF ITEM
WEIGHT OF ITEM
FLOOR LOAD LIMIT (in multistory buildings)
LIFTING CAPACITY OF FORK TRUCK
LIFTING HEIGHT LIMIT OF FORK TRUCK
EFFICIENT STACKING HEIGHT OF MANPOWER

DISCUSS each of the above points with reference to how it affects the number of containers to be placed on a pallet. Give examples.

(1) The use of pallets helps in attaining this objective because it enables us to move a greater number of pieces at one time, increases speed of handling, reduces higher stacking with more speed and less danger. Care must be taken to make sure that pallets are used to advantage. We must remember that palletizing loads does consume more storage space then hand stacking. All of these points are mentioned to emphasize the need for PLANNING and knowing WHEN and WHERE to use pallets; they should not be used indiscriminately. We must weigh carefully the advantages with the disadvantages.

(2) The number of containers that can be placed on a pallet depends upon a number of factors:

- (a) SIZE OF THE PALLET.
- (b) SIZE AND SHAPE OF THE CONTAINER.
  - (c) WEIGHT OF THE COMMODITY.
- (3) If we are using a truck with 108 inch lift and we want to stack three pallets high and main-

tain uniformity in the pallet loads, care must be taken to load the lower two pallet loads so that their combined overall height will not exceed 102" or an average of 51" overall for each pallet load; or in another vein the lifting capacity of the fork lift truck AT SPECIFIED DISTANCES FROM THE HEEL OR FORK should not be exceeded in forming pallet loads. Most 2,000 lb forklift trucks will lift 2,000 lbs IF THE LOAD DOES NOT EXTEND BEYOND 24" FROM HEEL OF FORK, however, for EVERY INCH the load protrudes beyond this point a sharp reduction in lifting capacity occurs.

(4) Careful PLANNING is again emphasized in order that the number of different sizes of pallets be reduced to a minimum, and that those sizes agreed upon fit the requirements of the operation. We must keep in mind also the overall picture of all installations and the trend to shipping and receiving unit pallet loads. Although such handling has not been completely perfected, it is an important objective which must be kept in mind.

# 8-128. Summary for Storage Aids

#### Summary.

#### SUMMARIZE SESSION

- —"As a review let's make a list on the blackboard of the various STORAGE TYPES, METHODS, and AIDS or DEVICES we have discussed."
  - 1. BINDING AIDS: PAPER
    - OSNABURG
  - 2. BINS AND RACKS 3. BLOCK STACK
  - 4. BOX PALLET/PALLET SUPPORT SETS
  - 5. CROSS-STACKING
  - 6. DOUBLE-FACED PALLET
  - 7. 4-WAY PALLETS

- 8. FLOOR DUNNAGE
- 9. LONG DUNNAGE
- 10. PYRAMIDAL STACKING
- 11. SHORT DUNNAGE
- 12. SINGLE-FACED PAL-LETS
- 13. SIZE OR ROW STACK
- 14. VERTICAL DUNNAGE
- —"Referring to this list, WHAT STORAGE METHOD OR STORAGE DE-VICE or AID WOULD YOU USE in EACH of THESE WAREHOUSE SITUATIONS?"
  - PRESENT each of the following warehouse problems one at a time, with some such introductory remark as: "Suppose we had to \_\_\_\_\_. What type of stack and storage aids would you use?"
  - Store small amounts of ten different items that are packed in corrugated cartons.
- 2. Give a single row of supplies support to avoid spilling into the aisle.
- 3. Warehouse a large shipment of 36" rolls of paper.
- 4. Warehouse two boxcars of one item.
- 5. Warehouse three bays of an item such as mattresses.
- 6. Store crafted refrigerators.
- 7. Prevent damage from moisture to a block hand-stacked item.
- 8. Store ten thousand 55 gallon empty drums in outside storage.
- -"That's all for this session. We will meet again on

(Day) (Time) (Place)

- a. The purpose of this portion of the course was to discuss the various methods and storage devices or aids commonly used in storing material in military supply warehouses. At close of a discussion, it is wise to try to pull together the general idea, conclusions, or points discussed in a conference. It is likely to make every member of the group more conscious of what he has learned. It is probable that additional discussion will result. Any doubts should be cleared up.
- b. Some of the warehouse situations indicated may have been discussed in the session. The leader

man financial backetter recent of the first

should be prepared to add or substitute others from observation or experience at the depot. If a member of the group answers in a very general way, such as: "it depends on the size," or "it depends on the commodity," or "it depends on the warehouse," he/she should be asked to pick a specific situation and present his/her method to the group. There may be different answers. Each person should give reasons or enough details to make answer clear. If time does not permit the use of this summary, it may be used at the beginning of the third session as a review.

# PART IV. PRINCIPLES OF MATERIALS HANDLING

## 8-129. Review

Review of previous session(s).

REVIEW PREVIOUS SESSION—STATE TODAY'S TOPIC

"In our previous sessions we have discussed STORAGE OF MATERIALS, with regard to BASIC FACTS WE MUST KNOW, as well as the NECESSITY FOR DEVELOPING STANDARD PRACTICES."

—"We determined that, in order to accomplish the FOUR OBJECTIVES OF STORAGE:

CONSERVE SPACE
ASSURE SPEED OF MOVEMENT
ASSURE STABILITY
ORDERLINESS

We must determine the BEST METHOD and then ALWAYS USE IT."

—"We emphasized the fact that once these methods are standardized, THEY SHOULD BE PUT DOWN IN WRITING."

a. To "warm up" the group mentally, a short time at the beginning of the class should be spent in reviewing some of the main points in the previous session(s). This helps, not only to impress these points upon their minds but also to continue the lines of thought into the following meetings.

b. Future session(s) will deal with the most expensive, most troublesome, and most important part of any storage operation: the handling and movement of supplies. The purpose of the next series of conferences is to point out many of the problems involved in materials handling, to make the group THINK about them, and to emphasize the necessity for ANALYZING each operation from the bottom up. The success or failure of the entire program can depend upon how well YOU put over this session. Since certain material in this session

is likely to be a "new approach"—in the eyes of the group-it requires skillful presentation and leadership. The group probably has never considered "Principles of Materials Handling" and, unless these principles are carefully related to their specific jobs, they may be considered as "theories" or "schoolish." In preparing for this session, the leader should have up-to-date information on many of the materials handling operations taking place in the depot. This information may be used to illustrate principles or methods of analyzing. At the conclusion of these sessions, the group must have a clear understanding of the five main principles of materials handling and their application to actual jobs. The group also must have a realization of the necessity for analyzing EACH JOB and their responsibility for maintaining efficient operations.

# 8-130. Materials Handling Efficiency

a. Definition of materials handling.

-"To be sure that we all have the SAME UNDERSTANDING of what we mean by MATERIALS HANDLING in warehouses, let's put the DEF-INITION on the blackboard." "MOVEMENT OF MATERIAL, other than by common carrier."

In further explanation of the definition of materials handling:

## MATERIALS HANDLING

Is the LIFTING and SHIFTING of commodities UP, DOWN, or SIDEWAYS (that is, VERTICALLY or HORIZONTALLY). This can be done MANUALLY, MECHANICALLY, or by a COMBINATION of BOTH.

(REFER to definition on blackboard)

—"In EACH of these TYPES of MOVEMENT we are faced with PROB-LEMS—WHETHER we do them by HAND, by MACHINE, OR by a COMBINATION of BOTH."

—"These points alone, without considering others, make us understand that MATERIALS HANDLING IS NOT A SIMPLE JOB."

-"There's more to it than 'picking-it-up and laying-it-down!"

—"There are TWO WAYS to 'pick-it-up and lay-it-down'—the WRONG or HARD way, and the RIGHT or EASY way."

—"At the conclusion of these meetings, we hope you will be able to DISTIN-GUISH more easily between the WRONG and the RIGHT way—and be sure of it."

(1) One of the purposes for defining materials handling is to give the group an understanding of what is meant generally by the term. In many cases the interpretation of materials handling is LIM-ITED TO THE JOBS DONE BY FORK TRUCKS. Many times we hear the person in charge of the equipment pool or the shop referred to as the "materials handling chief." Materials handling, in the broader aspect, refers to ANY MOVEMENT of materials, whether by hand or by use of a locomotive crane. Materials handling is the physical handling of supplies into and out of storage; its most elementary method is a person carrying a package from a freight car to a storage pile. An advanced method is the operator of a fork lift truck driving the machine into a freight car, picking up supplies loaded on a pallet, carrying loaded pallet to its storage location and lifting it, still unaided, onto the top of a stack. Materials handling is the actual storage

process in operation; the aims are conservation of labor, time, and space to the maximum degree consistent with safety of men and materials.

(2) A second purpose for developing the definition of materials handling is to establish a means through which the importance of analyzing and breaking down a materials handling operation can be emphasized. By breaking down this definition with the group, we can immediately make them aware of the fact that there are problems in the warehouses which can be broken down and analyzed. We can drive home the point that materials handling is not a simple job, that there is more to it than merely picking up and laying down materials, and that THERE IS A RIGHT WAY and A WRONG WAY TO DO IT. The leader must be careful not to read the definition—make it PROVE AND MEAN SOMETHING to the group.

b. Where materials handling occurs.

plan man make Kareho hari

er a composit of the engineering with him

THE RECORD OF THE PARTY OF THE SECOND SECOND SECOND

## WHERE MATERIALS HANDLING OCCURS

- —"To start, let's LIST on the blackboard WHERE and WHAT MATERIALS HANDLING TAKES PLACE in our WAREHOUSES or STORAGE AREAS."
- —"Will someone name the THREE MAIN OPERATIONS in a storage operation and point out the MATERIALS HANDLING INVOLVED?" WRITE ON BLACKBOARD

Operation

Materials Handling Involved

RECEIVING— Unloading cars and trucks, horizontal movement to storage, elevating to upper floors (multistory

buildings).

STORING— Stacking.

SHIPPING— Stacki

Removing stock from stacks; lowering from upper floors in multistory buildings; horizontal mmovement to processing, packing, and crating areas and to platforms; loading cars and trucks

—"Are there any ADDITIONAL OPERATIONS in which MATERIALS HANDLING is INVOLVED?"
(Add to list on blackboard.)

ADDITIONAL—Checking, assembly, inspecting, rewarehousing, selecting.

- (1) Before we can break down the analysis of specific materials handling operations, it is necessary to know WHERE and WHAT materials handling takes place in our depots. This can be done by determining what handling takes place in each of the three main operations: RECEIVING, STORING, and SHIPPING.
- (2) In the three basic operations, receiving, storing, and shipping, about 85 percent of all of the work in a warehouse is done. Unloading cars and trucks, moving from receiving platforms to storage points, stacking at the storage point, pulling down those stacks, moving back to the shipping point,

, Menger more filosoficos de contrata de la filosoficia del filosoficia de la filoso

A STATE OF THE THE CANADA THE PARTY OF

and then loading the cars and trucks—these activities include most of the interior transportation mentioned previously. In addition, there is some materials handling that takes place in miscellaneous operations, such as assembly, inspection, packing, processing, and rewarehousing.

(3) After we have isolated the problems involved in each of these operations, we should then study them—one at a time. In this way we can reduce, slowly but surely, the cost of our materials handling operations, and thereby help to reduce the cost of the entire operation.

The state of the state of the state of

A compress to the other of the series are glass

c. General way to raise efficiency.

DEVELOP WAYS OF RAISING EFFICIENCY (REFER to blackboard)

—"The TIME AND LABOR involved in these operations amount to about 85 percent of ALL WORK done in our storage and materials handling operation."

—"Therefore, if we can REDUCE the COST of HANDLING, we can greatly REDUCE the COST of the WHOLE OPERATION."

—"In what GENERAL WAYS can we REDUCE the COST and INCREASE the EFFICIENCY of operations?"

TRY TO GET the following points from the group, and discuss generally what each means and how it can be applied.

BETTER PLANNING
BETTER UTILIZATION OF MANPOWER AND EQUIPMENT
BETTER METHODS
BETTER SUPERVISION

—"To ANALYZE THOROUGHLY and THINK THROUGH our operations to ATTAIN our OBJECTIVE, we MUST HAVE a WORKING KNOWL-EDGE of the following:

(1) Types of equipment available and the advantages to be gained by their use.

(2) Existing physical conditions which determine and limit types of operation.

(3) BASIC PRINCIPLES OF MATERIALS HANDLING."

(1) There are four things that can be done to raise the efficiency of any job: take time for better planning, use better methods, get better utilization of manpower and equipment, and provide better supervision. These four points are more easily said than done. They are essentially the basis for a good operation but each in its own right presents a problem to those responsible for the operation.

(2) The necessity for taking time to plan was mentioned previously but cannot be stressed too strongly. As a matter of fact, much of the "planning" should be "ADVANCE PLANNING." For example, to plan a receiving operation, we must know what commodities are coming in, how they will be received, by car or truck; how many are to be received; and where and how they will be stored. Such information should be available as far ahead of time as possible. Unfortunately, the supervisor concerned often does not have ALL OF THE INFOR-

MATION to do a good PLANNING JOB.

(3) THE USE OF BETTER METHODS must always be uppermost in the minds of supervisors. They must not be content to do things because "they-have-always-been-done-that-way." There are very few jobs in which improvement cannot be made. The efficient improvement depends upon the supervisor's ability to analyze jobs properly, step by step.

(4) The assurance of better utilization of labor and equipment depends upon the results of a good analysis. The supervisor, in the role of the watchdog, must ever be on the lookout for waste.

(5) Better supervision is perhaps the hardest to get. There is an acute shortage of GOOD SUPERVISORS. We must develop our supervisors. They should know: types of equipment available, physical limitations of equipment, and basic materials handling principles.

# 8–131. Various Types of and Advantages in Using Mechanical Equipment

# a. Types of equipment.

DISCUSS TYPES AND USES OF EQUIPMENT

—"Will someone name the various types of equipment that are being used in materials handling operations at our own installations?" (LIST types on blackboard).

#### BLACKBOARD

TRACTORS
TRAILERS
FORK TRUCKS
CONVEYORS
TWO-WHEEL HAND TRUCKS
FOUR-WHEEL HAND TRUCKS
STOCK PICKING TRUCKS
HAND LIFT TRUCKS
CRANES
DOLLIES

DISCUSS in general terms how each type is being used. Suggest additions to list if any have been omitted.

(1) General. To help speed the movement of supplies and to make the materials handling job easier for laborers, there are certain types of handling equipment that are used in military storage establishments. Any person in a supervisory jobwhether the warehouse officer or a squad leadershould know what these types are, how they should be used, and in what operations they serve to the best advantage. Many man and equipment-hours can be wasted by failing to use proper equipment in an operation or by failing to know how to use it. For example, in stacking unit loads by fork truck, it is not necessary to have a helper for the fork truck operator if the operator has been properly trained. In most operations of this type, a helper represents manhours wasted. The most commonly used equipment AND their primary uses are listed and further identified in chapter IV, section 2, of this regulation.

(2) Forklift truck. These machines have become the most used mechanical aid of all. The primary use of forklift trucks is to transport and stack palletized loads or large boxes and crates with skids. They are most economically used when the distance of travel is limited to distances under 400 feet. Selection of the size of the forklift truck is determined by the weight of loads, size of pallets, width of aisles, width of doorways, and whether it must be used to enter freight cars. Generally, the 2,000 pound and 4,000 pound capacity trucks are

the most popular for inside storage operations. Trucks having a greater lift capacity are used chiefly in outside storage areas.

(3) Tractors. Generally, there are two kinds of tractors used in storage operations: the three and the four-wheel tractor. The three-wheel tractor may have either a single or twin wheel as its front steer wheel; its short turning radius makes it well suited to cramped, congested areas. Usually, the four-wheel tractor is larger and lacks the short turning radius of the three-wheel type. Hence, it cannot be used in congested areas, but its four wheels and greater bulk give it great stability and increased drawbar-pull capacity. The three-wheel type comes equipped with either solid rubber or pneumatic tires. Usually those with the solid rubber tires are used within the warehouses. Usually, the fourwheel type is equipped with pneumatic tires and is most often used for outside hauls, in outside storage, or hauls between warehouses; its most common use is in connection with the tractor-trailer trains.

(4) Trailers. The trailers used in our storage operations are an adaptation of the four-wheel platform truck, with attachments for hooking them together so that two or more can form a "train." Light duty trailers have capacities up to 6,000 pounds; heavy duty up to 10,000 pounds. Platforms are usually 6 to 9 feet long and 3 to 4 feet wide. Platform height from the floor ranges from 14" to 18". The most commonly used trailer has a capacity of 4,000

pounds, platform 6' × 3' 14" from the floor. Automatic coupling devices have replaced the old hook and eye coupler; this has reduced injuries. The primary use of the tractor-trailer train is for hauling unit loads, palletized or not, for distances over 400 feet. Tractor-trailer trains also can be used to advantage in collecting and delivering LCL shipments to the collecting point. Trains should never be "frozen" by storing on them materials that will not be moved for a long period of time.

(5) Conveyors.

(a) There are many types of conveyors that can be used in our depots. The permanent belt conveyor, portable belt conveyor, gravity roller conveyor, and skate roller conveyor can be used to advantage, if they are used for the purpose for which they were designed. In many operations the conveyor can be used in conjunction with the fork truck. The conveyor cannot efficiently replace the fork truck in certain operations any more than the fork truck can replace the conveyor in other operations. The skate wheel conveyor which is light in weight, speedy, easily set up, and readily transported is the type most commonly used. This conveyor can be used efficiently for loading and unloading trucks or freight cars where no platform is available and where the surface does not permit the use of a fork truck.

(b) Conveyors can be used to advantage also in packing operations, serving both as a work table and a means of moving the material from one operation to the next without lifting. Care must be

taken regarding the weight of the material handled by conveyors. Heavy roller gravity conveyors can be used in handling heavier material.

(c) Where permanent operations take place, roller gravity conveyors can be set up with a certain number of power-driven "live rollers." In such operations as assembly of various kits or set where the material is not too heavy and the operation is permanent, power belt conveyors can be installed and used efficiently. The big advantage of a conveyor, particularly the power-driven type, is that it ACTS AS A PACE SETTER FOR THE OPERATION. In setting up any conveyor, care should also be taken that it be the correct and easiest working height from the floor or ground.

(6) Handlift truck. The handlift truck, sometimes known as the hydraulic jack, can be used to move pallet loads short distances as on and off elevators or for moving material in packing or inspection rooms. In no case should it be used to replace the forklift truck, but merely to supplement

it.

(7) Two-wheel and four-wheel platform truck. Although both of these types of hand trucks are used, they are fast becoming outmoded. Two-wheel hand trucks can be used in handling large cartons, cases, bags, or barrels for very short hauls. The four-wheel platform truck can be used in stock rooms and in packing rooms for miscellaneous movement of material where it would not be economical to use mechanical equipment.

b. Advantages in using mechanical equipment.

DISCUSS ADVANTAGES OF PROPER USE OF EQUIPMENT

"What are some of the ADVANTAGES that YOU WANT to GAIN by the PROPER USE of this MECHANICAL EQUIPMENT?"

SAVE TIME (Man-Hours)
SAVE LABOR
SPEED MOVEMENT OF CARS AND TRUCKS
GET MAXIMUM USE OF OVERHEAD SPACE
REDUCE INJURIES
REDUCE DAMAGES

—"Will some of you give specific examples where any or all of these advantages have been gained in your own operations by the proper use of mechanical equipment?"

(1) To use mechanical equipment just for the sake of using it, is NOT REASON ENOUGH.

There are certain advantages which are quite evident:

(a) Time. If time is not saved when we are using mechanical equipment, it is not properly used. Time SHOULD BE saved when equipment is added to an operation, if the equipment is in good condition and is properly used.

(b) Labor. Saving of labor can be accomplished if mechanical equipment is properly used: this saving can come in the better utilization of labor. For example, in an extreme situation, if eight laborers are used to unload a freight car, the addition of one or two fork trucks to the job permits

the unloading of TWO CARS at the SAME TIME in LESS OVERALL TIME.

(2) We should be able to speed up the movement of cars and trucks if we use mechanical equipment properly. If, by the addition of mechanical equipment and the reduction of manual handling in a job, we reduce the amount of labor involved, we automatically REDUCE THE POSSIBILITY OF INJURY. Reduction in labor and consequent reduction in injury can be effected only if mechanical equipment is maintained and used properly.

#### 8-132. Movement Factors

a. Factors to be considered in horizontal movement.

POINT OUT OPERATING PROBLEMS IN HORIZONTAL MOVEMENT —"Our definition of Materials Handling points out that there are TWO TYPES of MOVEMENT-HORIZONTAL and VERTICAL."

"In EACH TYPE of MOVEMENT there are CERTAIN FACTORS which

AFFECT our MATERIALS HANDLING OPERATIONS."

"We must UNDERSTAND these CONDITIONS PECULIAR to OUR OWN OPERATIONS BEFORE we can PLAN an EFFICIENT OP-ERATION and DETERMINE the TYPE of EQUIPMENT to be used."

-"For example, we have to know whether the HAULING DISTANCE is LONG or SHORT."

"We have to consider the PLATFORM SPACE, the CONDITION of ROADWAYS and FLOORS, and the WIDTH of DOORS and AISLES." (LIST FACTORS on blackboard)

#### BLACKBOARD

SHORT HAULS LONG HAULS PLATFORM SPACE ROADWAYS AND FLOORS DOORS AND AISLES

- "What do we mean by LONG and SHORT HAULS?" LONG HAUL, OVER 400 FEET SHORT HAUL, UNDER 400 FEET
- -"How can the AMOUNT of PLATFORM SPACE affect your operation?" -"What trouble can you run into, if your ROADWAYS and FLOORS are
- not smoothly surfaced?"
- "How does the WIDTH of the DOORS and AISLES affect the job?"

(1) Two types of movement. Our definition of materials handling states that there are two general types of movement: HORIZONTAL and VERTI-CAL. In both of these types there are certain existing conditions which affect our materials handling operations. We must understand them as they apply, not only generally, but to a particular job. Failure to understand will handicap the efficiency of the job and the type of equipment used.

(2) Distance of haul. In horizontal movement,

THE DISTANCE OF THE HAUL will have a bearing on the type of equipment to be used. Is it a long or a short haul? What is meant by a short haul? From experience, we have come to apply the term "short haul" to any distance under 400 feet. Distances over 400 feet, hauling between warehouses or the length of one warehouse, have been accepted as "long hauls," usually, these distances are handled by tractor-trailers. There is a difference, in application of this rule, between long and short hauls in single-story and in multistory buildings, where the elevator must be taken into consideration.

(3) Platform space. The amount of platform space available for loading and unloading cars and trucks is a determining factor in the method used. For example: Platforms may be too narrow for tractor-trailers or conveyors; or they may be too narrow to permit the use of tractor-trailer trains in conjunction with a gravity conveyor for unloading, sorting, and checking sized items.

(4) Roadways and floors. If we plan to carry commodities any distance by means of mechanical equipment, THE CONDITION OF THE ROADWAYS OR FLOORS will determine the method

used. In cases where the roadways and floors are rough and uneven, it may be necessary to stack the material differently. In some cases tying or strapping is necessary to keep the material from shifting.

(5) Width of aisles. Width of aisles, as mentioned in our study on LAYOUT, is important, since it influences the type of equipment that can be used in the handling of material. The aisles and doors must be wide enough to permit mechanical equipment to be used; otherwise material will have to be handled by hand. For example: It would not be efficient to try to use a 6,000 pound fork truck in nine foot aisles. Trailers and tractors cannot be used in 30-inch or even 36-inch aisles, which are sometimes found in loose issue rooms.

b. Factors to be considered in vertical movement.

POINT OUT LIMITING FACTORS IN VERTICAL MOVEMENT

—"There are CERTAIN CONDITIONS which LIMIT or AFFECT the OP-ERATION in VERTICAL MOVEMENT."
(LIST CONDITIONS on blackboard)

> CEILING HEIGHTS OVERHEAD OBSTACLES TYPE OF MATERIAL SAFETY PRECAUTIONS

-"How do ceiling heights limit the operation?"

—"What overhead obstacles are likely to be found? What regulations are related to them?"

-"How does the type of material affect the operation?"

-"What safety precautions must be observed?"

(1) Ceiling heights determine the height to which we can stack and also constitutes a factor in the size and type of equipment that can be used in an installation. In a building that has a 15 foot ceiling, it would certainly be uneconomical to sacrifice the advantage of "full air rights" by using only forklift trucks with 108" materials lifting height.

(2) Overhead obstacles, such as trusses, sprinklers, lighting fixtures, and skylights are all factors that affect vertical movement.

(3) Type of commodities (the shape, size, weight, and crushability) directly controls our method of handling, as well as the height to which we can stack.

but here we want I what he be reasonably said that

(4) Size and capacity of elevators in multistory

buildings are controlling factors in the equipment used, such as: trailers, pallets, handlift trucks, or fork trucks, as well as how and in what order such equipment can be used. Care must be taken to prevent damage and injury in handling materials in vertical movement. There are certain SAFETY PRECAUTIONS AND REGULATIONS as to stability, height, and weight of a stack that must be considered. Such elementary regulations as prohibiting men from riding or being elevated on the forks are primary. The use of a "back-rest" and an overhead guard on a fork truck to protect the operator from being injured by a falling load is important. Training laborers in the proper way of lifting to avoid strains is another safety need.

the same daying and saterials and

## 8-133. Principles of Materials Handling

- a. Definition of principles of materials handling.
- DEFINE "PRINCIPLE." DEVELOP IN DETAIL MAIN PRINCIPLES OF MATERIALS HANDLING
- —"The third—and perhaps the most important—KNOWLEDGE a good warehouseman or storekeeper must have, is knowledge of the PRINCIPLES OF MATERIALS HANDLING."
- —"Before discussing these, let's determine first what is meant by 'PRIN-CIPLE'."
- —"One definition which covers it pretty well is: a PRINCIPLE is the DE-VELOPMENT of a THEORY which has been USED MANY TIMES SUCCESSFULLY and has become accepted as a STANDARD RULE or PRACTICE."

"These PRINCIPLES are NOT THEORIES—THEY WORK!"

"The most significant PRINCIPLES which should be applied are as follows:"
(LIST PRINCIPLES on blackboard)

STRAIGHT-LINE FLOW CONTINUOUS FLOW CONCENTRATION OF OPERATION EFFICIENT HANDLING PRINCIPLE OF WORK

DISCUSS in detail each of these principles and use them as a guide to analyze some operation which is being done in your organization.

(1) The third requisite of a good storage person is that he/she knows the basic principles of materials handling. He/she must not only know what they are, but also understand how to APPLY them in THE OPERATION. He/she should be able to ascertain quickly when principles do not apply and correct the condition immediately. Too often the word "principle" is used as a "blanket" term to cover up real understanding. Because of this, the word often has been associated—incorrectly—with things divorced from practical, down-to-earth facts that are so important to the average warehouseman. As pointed out in the definition of principle—"a principle is the DEVELOPMENT of a theory which has been used many times successfully, and has become

accepted as a STANDARD RULE or PRACTICE."

(2) Principles are not theories. They are sound GROUND RULES which, if applied, will work. There are many principles applied to materials handling; however, there are FIVE SIGNIFICANT PRINCIPLES. Their meaning should be discussed at length and subsequently applied to the various operations with which the members are familiar. These principles are: principle of straight-line flow; principle of continuous flow; principle of concentration of operation; principle of efficient handling, applied to both manual and mechanical handling; principle of work, which includes what may be considered by some as another principle—that of a balanced operation.

b. Principle of straight-line flow.

- —"By PRINCIPLE of STRAIGHT-LINE FLOW we mean the MOVEMENT OF MATERIAL BETWEEN ANY TWO POINTS SHOULD TRAVEL BY WAY OF THE SHORTEST DISTANCE."
- —"This is based on the old principle—'a straight line is the shortest distance between two points'."
- —"We cannot always travel in a STRAIGHT LINE, but we should always travel the SHORTEST DISTANCE."
- —"In our SHIPPING AND RECEIVING OPERATIONS, what is the FIRST THING TO BE CONSIDERED if this principle is to be applied?"

## CAR SPOTTING

- —"In those cases where warehouses are constructed with multiple truck docks or with truck docks extending the length of the warehouse then TRUCK SPOTTING must be considered also."
- -"What is the METHOD we use here in SPOTTING CARS?"
- DISCUSS the car spotting system and have the group evaluate its efficiency.

(1) THIS PRINCIPLE MEANS THAT THE MOVEMENT OF MATERIALS BETWEEN ANY TWO POINTS SHOULD TRAVEL BY WAY OF THE SHORTEST DISTANCE. In application to our problems, it cannot always be thought of as the shortest distance. How well we adhere to this principle determines, in some cases, the type of equipment used in the operation. For example, in receiving and stacking commodities in a warehouse, the distance from the car to the stack determines whether we use a fork truck and pallet method alone, or with the addition of tractor and trailers. We have discussed previously that it is not economical, in an

average operation, to have a fork truck travel farther than 400 feet in hauling and stacking. To save man-hours and equipment; therefore, we should make every effort to keep the distances from car to stack under 400 feet. We cannot move our warehouse, but we can move the car to a location nearer the stack. This, of course, calls for PLANNING and the correct SPOTTING OF CARS.

(2) Car spotting means placing the freight car at a SPECIFIC location or SPOT for loading or unloading. By spotting cars as near the storage points as possible, the hauling distance of supplies is reduced and man-hours and equipment are saved.

- c. Principle of continuous flow.
- -"The second principle is the PRINCIPLE of CONTINUOUS FLOW."
- —"By that is meant—MATERIALS SHOULD MOVE CONTINUOUSLY ALONG ANY PRODUCTION LINE."
- —"WHICH materials handling JOBS do you know about that lend themselves most naturally to the application of this PRINCIPLE?"

LOOSE ISSUE ROOM PACKING KIT ASSEMBLY UNLOADING CARS SORTING SIZED ITEMS

-"What is one of the best ways to ASSURE CONTINUOUS FLOW?"

#### USE OF CONVEYORS

—"CONTINUOUS FLOW should be applied to ALL of our SHIPPING and RECEIVING operations."

Note. DISCUSS shipping and receiving operations generally, to determine if the principle does apply. If it does not apply, discuss the reasons and get the group to think along the lines of eliminating these causes.

- (1) This principle stresses the point that materials should move continuously along any production line. Material should always move as smoothly as possible; spasmodic or interrupted flow causes confusion and delay. In shipping or receiving materials, every effort must be made to move the materials DIRECTLY to the car or stack; this, of course, requires PLANNING. There are certain operations that lend themselves more easily than others to the application of this principle. Loose issue room packing, kit or set assembly, and sorting sized items on a conveyor are all operations in which we SEE the continuous flow, or easily recognize the lack of it.
  - (2) Whenever it can be used, one of the best

methods to assure continuous flow is the use of a conveyor system of some type. Such a conveyor will act as a PACE SETTER and interruptions are easily observed. We can, however, have continuous flow, even in the following: operations involving hand labor, use of platform trucks, tractor-trailer trains, forklift trucks, and pallets. We must take care in such operations, particularly in shipping and receiving, that the flow is not interrupted by inefficient checking or inspection methods, unnecessary marking, miscellaneous bottlenecks caused by poor planning, or lack of necessary labor and equipment. A very simple ground rule to follow is: "Plan where you want the material to go-and then take them there!" Question very critically the necessity and reason for any stops enroute.

- d. Principle of concentration of operation.
- —"The next principle listed is the PRINCIPLE of CONCENTRATION OF OPERATION which implies that—in the MOVEMENT and HANDLING of material, the OPERATION SHOULD BE LIMITED IN DISTANCE AND AREA COVERED."
- —"We all realize that an OPERATION SPREAD OVER TOO MUCH AREA causes PROBLEMS in HANDLING and SUPERVISION."
- -"Don't, however, limit the operation to the point of CONGESTION."
- —"In which operations could we most likely make improvements along the lines implied in this PRINCIPLE?"

PACKING LOOSE ISSUE ROOMS INSPECTIONS ASSEMBLING SIZE CHECKING

- DISCUSS setup of these operations. Have group apply the principle to determine whether it is applied efficiently in the depot.
- ASK the following questions to stress application of principle in terms of manpower. Have members give reasons for their answers.
- -"How many people can be used efficiently in strapping a carton?"
- —"How many people can be used efficiently in breaking a freight car door and getting working space inside the car?"
- —"How many people can be used efficiently to load or unload INSIDE the freight car?"
- -"How many people can be used efficiently in loading a pallet?"
- (1) In movement and handling of materials, the operation should be limited in distance and area covered. This principle stresses the idea that operations spread over too much area cause problems in handling and supervision which do not occur in

more compact operations. It is unwise, however, to limit a production line or area to a point of congestion. We can see clearly the importance of applying this principle in operations such as packing, inspection, assembly and certain checking operations.

In setting up such operations, it is necessary first to study just what and how much work must be done; then apply the first two principles, straightline and continuous flow, which should eliminate much of the confusion that can occur; then limit the operation to an area in which people can work without interference, and without taking unnecessary steps, or making unnecessary motions in doing their part of the job.

(2) Often by combining different operations into one, we can save not only in working space required, but also in number of laborers required and amount of supervision needed. For example, in preparing shipments we are faced with many different operations: removing from the stack, strapping, "blocking out" old markings, stencilling new markings, weighing, checking, transportation to car, and loading car. Rather than move each container to five or six different locations in the warehouse to get the whole job done, it is certainly more economical to move the operations to one spot and, in the smallest workable area, perform the job with the least amount of handling of the containers.

(3) In connection with this principle, we must take care not to overman an operation to the extent that workers are getting in each other's way. Many

times an operation is CONGESTED merely because there are too many people involved. We must determine by careful study how many people can efficiently perform a certain operation at one time in one location. For example, it would be very inefficient to permit three or four persons to strap an average-sized container; at most, two persons can do the job efficiently and then only if one doesn't have to wait on the other. Generally, it is inefficient for four or five persons to "break" a freight car. Usually, two persons can do the job faster and easier. Once inside the car, two persons can work more efficiently unloading one end of a car; three or four persons get in each other's way. When you see three or four persons trying to load a standard sized pallet with average sized containers, it is probable that there is "congestion." The work area is too small for an efficient operation by more than two people, unless the operation is so planned and balanced that two "crews" can work in opposite ends of the car.

(4) Studying the various operations, considering the amount of space used, and the number of people working in the area will pay dividends. BE SURE THAT THERE IS CONCENTRATION OF OPERATION, BUT NOT CONGESTION.

# e. Principle of efficient handling.

- -"The FOURTH PRINCIPLE—the PRINCIPLE of EFFICIENT HAN-DLING is one which too often is overlooked."
- -"It is perhaps the MOST IMPORTANT."
- -"It means simply that —In the MOVEMENT of MATERIALS, THERE SHOULD BE THE LEAST POSSIBLE HANDLING."
- —"It should be applied to both MANUAL and MECHANICAL OPERATIONS."
- —"Despite the use of mechanical equipment, the MAJORITY of our MATERIALS HANDLING is still done by HAND."

This principle means that in the movement of materials, there should be as little handling as possible. Constant picking up and putting down is wasteful of time and energy, ties up the use of equipment,

and causes damage. The principle of efficient handling should be applied to both manual and mechanical operations.

f. Applied to manual handling.

- (ILLUSTRATE this point on the blackboard. Example included with this outline can be used.)
- —"You will note that in this unloading operation 75 percent of the total WORK-HOURS consists of MANHANDLING."
- —"We can improve the efficiency of an operation immediately by REDUCING excessive MANHANDLING."
- —"What things in an operation cause a laborer to tire rapidly?"

ITEMS TOO HEAVY EXTREME BENDING HIGH LIFTING LONG CARRYING

—"Those are things that WE CAN CORRECT."

—"Can you think of any of your operations in which a laborer handles the same items two or three times?"

*Note.* if not, point out an operation you have observed personally. Take care not to embarrass any member of the group.)

- —"We should constantly check our operations and reduce MANUAL RE-HANDLING to a minimum."
- —"It is part of our jobs as supervisors to show our people the EASY WAY to do a job."
- —"These few POINTERS on LIFTING may be a guide in showing the workers the SAFE and EASY way."

(HAND OUT mimeographed material on "WHAT EVERYONE SHOULD KNOW ABOUT LIFTING.")

DISCUSS each point with the group or have one member demonstrate the correct procedure.

DISCUSS carefully and in detail the following EASIER METHODS. Point out advantages and determine extent of use of each method.

(1) SWING instead of STRAIGHT lift.

(2) Unloading cars and trucks by TIERING method.

(3) REPALLETIZING by use of "THREE PALLET" method.

(1) Regardless of the type of mechanical equipment we use, there will be SOME MANUAL HANDLING somewhere along the line. Manual handling should be reduced to a minimum and done properly.

(2) Manual handling of material can be illustrated if we break down the job of unloading a freight car in which we use two laborers and one fork truck and operator. For purposes of illustration, the job takes two hours to complete.

2 laborers × 2 hours = 4 man-hours

1 truck operator

 $\times$  2 hours = 2 man-hours 1 truck  $\times$  2 hours = 2 truck-hours

Total 8 work-hours

It can easily be seen that in the 8 WORK-HOURS consumed, only 2 hours were used by mechanical equipment and 6 hours consumed by man-hours. In other words, about 75 percent of the work in this job was done by MANUAL LABOR.

(3) The job might have taken many more hours

to complete without the use of mechanical equipment, and may have involved many more laborers. Let's not get the misconception that mechanical equipment REPLACES manual handling; it does not, it merely supplements it and makes it easier. By eliminating all excess manual handling, particularly that involving lifting, it is possible to increase immediately the efficiency not only of the laborer, but of the job itself. Whether picking up pieces from floor level or loading a truck from ground level, the element of fatigue rapidly cuts efficiency and production. The human body is a most flexible and adaptable machine, but this machine is also subject to two weaknesses: FATIGUE AND HABIT.

(4) A person can move a light object in the same plane from one position to another continuously for a long time and at a high production rate without excessive fatigue, if he/she does not have to take steps, bend extremely low, or reach extremely high. A good rule, which can be applied to the work done by manpower alone, might be found in the

answers to these questions: Does the weight exceed 50 pounds? Does picking up require extreme handling? Does carrying require more than one step? Must lifting be higher than eye level? If the answer to any of these questions is "yes," then it is very doubtful whether manpower alone is the answer to that particular handling problem. Persons should be given the help of the proper type of mechanical equipment; this will help to reduce the element of fatigue. The elimination of rehandling will further reduce the element of fatigue—LET'S PLACE THE MATERIAL IN ITS FINAL RESTING PLACE AND LEAVE IT THERE.

(5) Part of a supervisor's job is to teach workers the EASY WAY to do a job. It was mentioned that the human body had two weaknesses: FATIGUE AND HABIT. It is important that we do everything possible to reduce the fatigue element and, even more important, that we guide our workers into correct habits of doing the job. Once formed, incorrect habits are difficult to break.

(6) The HANDOUT on "Lifting" should be mimeographed and distributed to the group for use in teaching workers. In addition to these correct methods for lifting, there are certain "knacks" or "tricks" that can be used to reduce the element of

fatigue. For example, in handling containers of average size and weight, it is easier to move and lift them by using a certain "swing" motion than by a stiff or rigid lifting motion. In using this "swing" motion, the laborer can take advantage of pendulum motion, obtain a kind of rhythm, and reduce the physical effort required.

(7) In unloading average-sized containers from a freight car or truck onto trailers or pallets. a systematic method should be used to break down the load. The method might be called "UNLOAD-ING BY THE TIERING METHOD." The load should be broken down in such a way that the number of times it is necessary to lift the bottom cartons in the load to the top of the pallet is reduced to a minimum. Where repalletizing must be done, the "three pallet method" can be used as follows: Repalletize half of loaded pallet #1 onto empty pallet #2: temporarily withdraw pallet #2 from the operation; place empty pallet #3 into position and repalletize the rest of pallet #1 onto empty pallet #3; half of loaded pallet #4 is repalletized on halfloaded pallet #3. Such a method reduces the amount of bending and lifting as a SHIFTING rather than a lifting process is employed.

## g. Applied to mechanical handling.

—"To use our mechanical equipment to fullest advantage we must constantly try to:

ELIMINATE EXCESSIVE HANDLING

ELIMINATE REHANDLING

AVOID INCORRECT HANDLING."

—"There are certain PRECAUTIONS we must take to assure greater efficiency in use of equipment:

PROPER TRAINING OF OPERATORS

APPLICATION OF BOTH PRINCIPLES-

STRAIGHT-LINE AND CONTINUOUS FLOW

COMBINE CARRYING AND LIFTING OPERATIONS."

—"In the majority of SHIPPING and RECEIVING OPERATIONS there should be NO STOPPING PLACE between the STORAGE POINT and the CARRIERS VEHICLE."

DISCUSS with the group the shipping and receiving operation and have them determine whether there is rehandling—setting down and picking up—which could be eliminated.

(1) To use mechanical equipment to its fullest advantage, we must eliminate excessive handling, rehandling, and incorrect handling. Equipment improperly used can cause more waste and hamper operations to a greater extent than failure to use it at all. There are certain precautions that must be taken to assure efficiency in the use of equipment.

(2) Operators of mechanical equipment must be properly trained; this should include operators of equipment such as fork trucks, tractors, conveyors, and strapping machines. We should not take it for granted that because a person has been operating a machine over a period of time, he/she is operating it correctly or in the most efficient manner; we must be sure. We can be sure only by carefully spot

checking at frequent intervals and then providing time and means for improving his/her work by training.

(3) In addition, we must be sure that the application of the first two principles—STRAIGHT-LINE AND CONTINUOUS FLOW— be made in the use of equipment. We should determine the shortest possible moves and then take advantage

of them. The "flow" of the equipment must be continuous, with no time wasted. Maximum loads should be determined and carried to reduce the number of trips and pieces of equipment to a minimum. One large handling unit requires less total handling than many small units. Concentrating small packages into large units, as the palletized load plan, reduces handling time.

h. Principle of work.

- "The PRINCIPLE OF WORK stresses the fact that the GREATEST AMOUNT of WORK MUST BE DONE in the LEAST AMOUNT OF TIME (MAN-HOURS)."
- —"The successful application of this principle is largely dependent upon the FIRST FOUR PRINCIPLES."
- —"To REDUCE COST and INCREASE SPEED we must constantly CHECK in TWO WAYS:

  TIME IT TAKES TO DO THE JOB

MAN-HOURS USED IN DOING IT."

and the second s

(1) The fifth important materials handling principle may be referred to as the PRINCIPLE OF WORK. It cannot be supplied unless the other four principles have been adhered to and is actually the culmination of a BALANCED OPERATION through proper application of the other four principles. The principles of work means simply, doing the greatest amount of work in the least amount of time (man-hours). Speed of movement does not necessarily mean a good operation. A balanced operation, with each step performed in its proper sequence without lost motions, and at a speed consistent with the slowest step or capabilities of the personnel or mechanical equipment involved, is a good operation. The question, "How long does it take to do a job?" can be answered in two ways: Length of time it takes to accomplish the job. TO-TAL MAN-HOURS it takes to accomplish the job: both are important in relation to results that are

to be attained. The fact that a carload of materials has been unloaded in 1½ hours is a clue ONLY TO THE SPEED with which it was unloaded. The added fact that it took six persons 1½ hours to do the job is indicative of the MAN-HOURS required and also the efficiency of the job in relation to cost in manpower.

(2) We must remember that we want to accomplish TWO THINGS: REDUCE COST—directly in MANPOWER, in MONEY—and INCREASE THE EFFICIENCY with which the job is done. Figures indicating this decrease in manpower and increase in efficiency are difficult to compute, but it is most nearly accomplished by use of the TONS PER MAN-HOUR figure. How well this PRINCIPLE OF WORK is applied can also be measured by the TONS PER MAN-HOUR figure. Some examples of variations in operation and results in tons per man-hour follow:

1 846 15 1000

i. Balance in an operation.

- -"To do any MATERIALS HANDLING JOB EFFICIENTLY and apply the PRINCIPLE OF WORK, we must have BALANCE IN THE OPERATION."
- —"By 'BALANCE' we mean—WORK has been PLANNED so that all MAN-POWER and EQUIPMENT used on the job are WORKING CONTIN-UOUSLY WITHOUT LOST MOTION OR TIME."
- —"To get BALANCE in an operation: the TIME it take to perform EACH PART of the job must be determined and the DIFFERENCE EQUAL-IZED by the NUMBER of persons used and the PIECES of EQUIP-MENT used."
  - ILLUSTRATE what is meant by using example given or one which you have prepared from an actual operation which you observed and studied.
- —"After you have determined WHERE the operation is OUT of BALANCE, then CHECK EACH PART of the JOB to make sure it is being done PROPERLY."

Note. To illustrate how this can be done, use the suggested check list if the tractor-trailer train example has been used. If you have used an example of your own, develop a similar check list by breaking down the job into all of its parts. (Have the group discuss each of the points and decide what is the "PROPER WAY.")

- —"If each part of this job cannot be improved—and we are convinced of that fact—THEN ADD or REDUCE MANPOWER or EQUIPMENT."
- —"We can also aid in the attaining of BALANCE if we take care to AVOID the following TIMEWASTERS:

EQUIPMENT WAITING FOR LABORERS
LABORERS WAITING FOR EQUIPMENT
EQUIPMENT ARRIVING EMPTY WHEN PALLETS OR OTHER
NECESSITIES SHOULD BE CARRIED

WAITING FOR CHECKERS."

- (1) Even after the seemingly best method has been chosen, it will not produce the desired results unless there is balance in the operation. Need for synchronized and balanced operations is a most pressing problem in warehouses today. BY "BALANCE" IN AN OPERATION IS MEANT THAT THE WORK HAS BEEN PROPERLY PLANNED SO THAT ALL MANPOWER AND EQUIPMENT USED ON THE JOB ARE WORKING CONTINUOUSLY—WITHOUT LOSS OF MOTION OR LOSS OF TIME.
- (2) In order to gain balance in any materials handling operation, the time it takes to perform each part of the job must be determined and the differences in production of the separate parts equalized by adding or reducing the number of persons and pieces of equipment used. For example, in unloading a boxcar, using a tractor-trailer train, we should determine: time it takes two persons to load pallet; time it takes tractor to travel to stack with loaded train, uncouple at stack, pick up empty train, and return to car; and time it takes fork truck to stack loaded pallets.
- (3) In this operation, the tractor-trailer is the balance wheel and by increasing or reducing the

number of trailers hauled, the entire operation should be kept continuous. After it has been determined where the operation is OUT OF BALANCE, we must then check each part of the job to make sure that it is being done properly-that the workers know how to do it. Applying this idea to the illustration, we would jot down the various parts of the job and then check them: Laborers handling material properly, the easy way; pallets properly placed on trailer; trailers placed in car correctly; trailers coupled and ready for the tractor; trailers in proper location at the stack; fork truck stacking properly, the easy and safe way; empty trailers in proper location near the car; and in multistory buildings check the elevator operation. If all of these operations are being done correctly—the easy and the safe way-then we should consider adding or reducing manpower and equipment.

(4) Quite often an operation gets out of BAL-ANCE because of poor timing at the start. Part of the supervisor's job is to PLAN properly so that everybody and everything is READY and ON THE SCENE at the time the job is scheduled to start. Care should be taken to avoid such time wasters as: equipment on the job waiting for the laborers

to arrive; OR, laborers on the job waiting for the equipment; OR, both laborers and equipment on the job waiting for a checker; OR, equipment arriving "empty handed," when it should have brought pallets or other miscellaneous equipment needed.

DO NOT OVERLOOK THE LITTLE DETAILS THAT GO INTO MAKING AN OPERATION. LOOK FOR TIMEWASTERS IN ALL OPERATIONS!

## 8-134. Summary

Brief summary of main points.

BRIEFLY SUMMARIZE MAIN POINTS

—"To SUMMARIZE briefly, we can list THREE MAIN QUESTIONS which must be asked in analyzing a materials handling operation." (LIST points on blackboard.)

BLACKROARD

ARE THE PRINCIPLES APPLICABLE?
IS THE OPERATION BALANCED?
IS EACH PART OF THE JOB DONE PROPERLY?

—"There are NO SHORT CUTS—NO TRICKY OFFICE METHODS for analyzing a MATERIALS HANDLING operation."

—"It requires CAREFUL STUDY ON THE JOB—some clearly ORGA-NIZED THINKING."

—"After we arrive at what WE THINK is the BEST METHOD, we should PUT IT DOWN IN WRITING—not carry it around in our heads."

-- "Have the CORRECT METHOD AVAILABLE for YOUR FUTURE REFERENCE."

-"Give the next fellow a break."

a. Throughout this session many points have been discussed concerning the THINKING ABOUT and DOING an efficient operation. The number of things to think about emphasizes that it is no simple job; that it has many complexities. The summary should stress the necessity for ANALYZING, in an organized way, EVERY JOB for which supervisors are responsible. The basis for such an analysis can be summed up in three questions:

Are the principles applicable? Is the operation balanced?

Is each part of the job done properly?

b. After answering these questions we should be more able to spot the weak points, and take the necessary action to correct these weak points. REMEMBER, A SUPERVISOR CAN DO A BETTER JOB BY USING HIS/HER HEAD AND SAVING HIS/HER BACK.

#### HANDOUT

# WHAT EVERYONE SHOULD KNOW ABOUT LIFTING\*

- 1. Never try to lift beyond your own strength. Get help!
- 2. Always crouch down to what you are going to lift.
- 3. Get a good footing. Place feet eight to twelve inches apart.
- 4. Get a firm grip with fingers underneath the load whenever possible.
- 5. Keep your arms straight and keep your back in as near a straight upand-down position as possible.
- 6. Lift gradually. Avoid jerky motions!
- 7. Avoid twisting motions by shifting the position of your feet.
- 8. Lift by standing up or pushing up with the strong leg muscles. This takes the strain off the back muscles.
- 9. Put things down by generally reversing the lifting methods.
- 10. Your job may involve handling of cases, boxes, baskets, drums, or odd-shaped containers, under unusual conditions. Check your methods of lifting these with your foreman to make sure they are safe and proper.

\*Published by National Safety Council.

Figure 8-3.

#### HANDOUT

## MAIN PRINCIPLES OF MATERIALS HANDLING

- 1. PRINCIPLE OF STRAIGHT-LINE FLOW. THE MOVEMENT OF MATERIAL BETWEEN ANY TWO POINTS SHOULD TRAVEL BY WAY OF THE SHORTEST DISTANCE. This is based on the old principle that "a straight line is the shortest distance between two points." In our consideration, it does not have to be a STRAIGHT line, but should always be the SHORTEST distance.
- 2. PRINCIPLE OF CONTINUOUS FLOW. MATERIAL SHOULD MOVE CONTINUOUSLY ALONG ANY PRODUCTION LINE. Material should always move as smoothly as possible. Spasmodic or interrupted flow causes confusion and delay.
- 3. PRINCIPLE OF CONCENTRATION OF OPERATION. IN MOVE-MENT OF MATERIAL, THE OPERATION SHOULD BE LIMITED IN DISTANCE AND AREA COVERED. This principle stresses the idea that operations spread over too much area cause problems in handling and supervision which do not occur in more compact operations. However, it is unwise to limit a "production line" or area to the point of congestions.
- 4. PRINCIPLE OF EFFICIENT HANDLING. IN THE MOVEMENT OF MATERIAL THERE SHOULD BE THE LEAST POSSIBLE AMOUNT OF HANDLING. The constant picking up and setting down of material is wasteful of time and energy, ties up the use of equipment, and causes damage. The principle can be applied to both manual and mechanical operations as follows:
- a. Principle of efficient handling as applied to manual movement: IN MOVING MATERIAL THERE SHOULD BE AS LITTLE MANUAL HANDLING AS POSSIBLE. Although it is the basis for all materials handling, manual handling should be reduced whenever possible.
- b. Principle of efficient handling as applied to mechanical movement: To reduce handling, MATERIAL SHOULD BE MOVED WITH MECHANICAL EQUIPMENT WHENEVER POSSIBLE AND EFFICIENT. PROPER USE OF MECHANICAL EQUIPMENT IS ONE OF THE BEST WAYS FOR LOWERING COST AND INCREASING SPEED.
- 5. PRINCIPLE OF WORK. THE GREATEST AMOUNT OF WORK SHOULD BE DONE IN THE LEAST AMOUNT OF TIME (MANHOURS). Mere speed of movement does not necessarily mean a good operation. The PRINCIPLE OF WORK suggests the most efficient handling for the amount of time spent. Often apparently slow movements may be efficient if they are steady, continuous, direct, and synchronized—and balanced operation of work is the most pressing problem in our warehouse today.

80.15.4

# HANDOUT

COMMON DE	FICIENCIES, CAUSES, AND CON	PEROFICES		
Common deficiencies	Causes	Consequences		
Materiel release denials.	Incorrect inventory counts.	Special inventory required.		
	Poor in float documentation control.	ASDA/depot stock record imbalance.		
	Rewarehousing of stock in progress.	Delay or failure in supply fill.  Additional manpower/paperwok		
	Delay in placing materiel in location.	requirements.		
	Erroneous quantity, stock number, owner, or condition code recorded in receipt actions.			
	Erroneous location recorded.			
	Excess quantity selected in previous issue.			
Failure to maintain relative humidity at 50% in controlled	Warehouse doors left open when outside humidity conditions are	Improper humidity conditions maintained.		
humidity (CH) facilities.	unfavorable.  Humidistats not properly calibrated.	Inefficient and/or unnecessarily costly operation of dehumidification equipment.		
	Faulty dehumidification equipment.	Could adversely affect stored material condition.		
	Failure on the part of responsible personnel to periodically and properly inspect the CH facility and dehumidification equipment.			
Vertical stacking of material not being accomplished to full potential.	accomplished to full than mechanically.			
ailure to perform quality control atistical sampling of locator file ctions on a daily basis or failure determine sources of errors incovered during samplings.  Experiencing a satisfactory locator accuracy and discontinuing the quality control sampling on the assumption that such accuracy will continue indefinitely.  Lack of management emphasis on both daily sampling and error source identification.		Undetected error introduction into the locator file.  Possible increase in material release denials.		

Figure 8-5. Potential storage problems.

Common deficiencies	Causes	Consequences			
Improper utilization of bulk type storage space (honeycombing).	Inadequate planning and space planograph layouts such as storing short lot materiel in large storage blocks.	Waste of storage spaces.  Loss of control over space availability.			
	Failure to accomplish timely rewarehousing actions.	Repeated unplanned rewarehousing actions.			
Testame p	Improper stock selection resulting in vacant space in front of stacks.				
Multiple stock numbers in a bulk storage stack.	Desire to achieve higher stacking.	Could increase material release denials.			
	Failure to use proper storage aids.  Insufficient instruction to	Additional handling actions to select or count stock.			
	warehousing personnel.	Possible materiel damage due to extra handling actions or incompatible weight conditions.			
Incorrect item or quantity	Inadequate lighting.	Imbalance of stock records.			
selection.	Duplicate MROs.	Increasse in inventory investigation			
	Incorrect item or location identification.	Possible increase in warehouse denials.			
	Incorrect data on forms, labels or placards.	Incorrect item or quantity possibly shipped to the requisitioner.			
	Failure to consider unit of issue or	Possible delay in supply fill.			
	unit of measure quantity.  Mixed stock and failure to	Possible waste of assets and processing resources.			
	recognize such.  Inadequate training of stock selection personnel.	Possible unnecessary transportation costs.			
Inadequate or improper packaging/ packing.	Use of substitute, inferior materials.	Underpackaged items are more susceptible to damage.			
Date of the State	Packaging/packing instructions not available.	Overpackaged items can result in excessive material and transportation costs as well as wasted manpower resources.			
	Failure to recognize requisition				
(MOTAL) STEER CONTROL	priority, destination, and mode of shipment.	Possible failure to meet due-out date when overpackaging is involved.			
Placing materiel received at the	Heavy workload surges.	Double handling actions required.			
warehouse into holding areas or into aisles rather than directly into location.	Improper scheduling of equipment and personnel.	Possible need to search hold areas or aisles for requisition fill.			
unganaesikasekri katipi elizibi yalandan marabada wakepa yalandan marabada wakepa	Lack of receiving personnel to properly palletize at time of receipt.	Obstruction of travel through aisles and possible delay in gaining access to other stock.			
estantia de la destantia de Ause. Parametra	Inadequate intra-depot transport capability.				

Figure 8-5. Potential storage problems—Continued.

Common deficiencies	Causes	Consequences			
	Lack of understanding of double handling penalties.  Inadequate visibility of workload conditions.  Lack of training or lack of management emphasis on correct techniques.				
Placing different stock numbered items behind other stock numbered items in shelf and rack locations.	Lack of proper training of warehousing personnel.  Inattention to warehousing tasks.  Lack of sufficient storage space for additional items being received coupled with poor enforcement of proper warehousing procedures.	Possible lost assets.  Delay in requisition fill.  May result in erroneous inventory counts.			
Not assuring containers are positioned on pallets and in the storage location so that identification markings are easily visible.	Lack of proper training of receiving and warehousing personnel.  Lack of attention to good warehousing practices and their enforcement.	Can delay stock selections.  Delays inventory counting and inspection actions.  Can contribute to incorrect inventory count.  Causes additional handling actions.			
Excessive forklift truck travel distances (more than 400 feet one way).	Lack of planning in storage layouts and unloading or loading sites.  Lack of proper long haul handling equipment (e.g., lack of warehouse tractor and trailer system or other vehicles to supplement the forklift fleet for intra-depot stock movement).	Inefficient use of forklift/intra-depot handling.  Possible loading/unloading delays.  Excessive equipment wear and manpower requirements.			
Failure to develop and maintain storage space planographs.	Lack of management emphasis.	Timely storage space control and reporting affected.  Improper storage layouts for type and quantity of stocks on hand.			
Storing items in open storage when such items require covered storage.	Lack of sufficient covered storage space.  Poor management of covered storage space.	Possible stock deterioration.  More frequent inspections.  More frequent preservation and packaging actions.			
toring items by commodity rouping rather than by physical andling requirements.  Earmarking storage space by commodity groups.  Excessive emphasis on a particul commodity group for physical visibility.		Additional wide aisle requirements.  Duplicate equipment requirements or excessive transfers of handling equipment among warehouses.  Possible additional personnel requirements.			

Figure 8-5. Potential storage problems—Continued.

DOD 4145.19-R-1 15 September 1979

COMMON B	EFICIENCIES, CAUSES, AND CON	T T T T T T T T T T T T T T T T T T T			
Common deficiencies	Causes	Consequences			
Use of storage space for nonstorage purposes.	Establishment of excessive holding areas or processing areas in storage warehouses.	Reduction of net available space for storage.  Poor vertical space utilization.  Could cause material to be stored in open storage.			
Failure to plan for large quantity receipts or receipts of large or heavy items.	Failure to use prepositioned receipt information as a planning consideration.  Lack of management emphasis on preplanning for receipts.	Inefficient receiving actions.  Can result in multiple locations for the same stock number.  Possible delay in storing material.  Possible inefficient use of storage space.			
Failure to accomplish daily warehouse housekeeping actions (stock alignment, closing lids, etc.).	Lack of management emphasis.  Lack of training.  Heavy workloads.  No routine schedule for examination or correction of such deficiencies.	Actions accumulate to major tasks Can create safety hazards. General relaxation in discipline fo accomplishing such actions. Unsightly appearance.			
Failure to properly palletize applicable receipts to standard pallet patterns in the receiving area prior to movement to location.	Lack of management emphasis.  Lack of standard pallet pattern guides in receiving area.  Procedures not specific in this regard.  Lack of training.	Workload placed on warehouse personnel.  Delay in properly and promptly storing materiel.			
Failure to apply identification placards/inventory aids to bulk storage locations.	ards/inventory aids to bulk				

Figure 8-5. Potential storage problems—Continued.

## REFERENCES

A-1.	Joint.	Service/Agency	Publications
** **	OCILLO	DUI TICCITIE CITCY	I unifering

DSAM 4145.2/TM 38-230-1/NAVSUP PUB 502/AFP 71–15/MCO 4030.31A, VOL I

DSAM 4145.2, VOL II/TM 38-230-2/NAVSUP PUB 503, VOL II/AFP 71-6/MCO 4030.21B

DSAR 4145.26/AR 740-30/NAVSUPINST 4450.19B/ AFR 67-73/MCO 4450.9A

AR 700-15/NAVSUPINST 4030.28A/AFR 71-6/MCO Packaging of Materiel 4030.33A/DSAR 4145.7

TM 38-250/AFR 71-4/DSAM 4145.3/NAVSUP PUB 505 (REV)/MCO P4030.19D

DSAM 4145.8/AR 700-64/NAVSUPINST 4000.34/ AFM 67-8/MCO P 4400.105A

DSAR 4145.25/AR 700-68/NAVSUPINST 4440.128B/MCO 10330.2B/AFR 67-12

AR 55-355/NAVSUP PUB 444/AFM 75-2/MCO P 4600.14A/DSAR 4500.3

AR 700-58/NAVSUPINST 4030.29/AFR 71-13/MCO P 4030.29A/DSAR 4145.8

AR 55-38/RCS MTMC-54(RI)/NAVSUPINST 4610-33A/AFR 75-18/MCO P 4610-19B/DSAR 4500.15

TM 5-632/AFM 91-16/NAVDOCKS MO 310

TB MED 144/NAV MED P-5052-26/AFM 161-3

AR 40-14/BUMED INST 6150.18B/AFR 161-8/ DSAR 4145.24

TB MED 223/AFP 160-1-1

TB MED 242/NAV MED P 5035/AFP 160-6-3

Packaging of Materiel: Preservation (Vol I)

Preservation, Packaging, and Packing of Military Supplies and Equipment; Packing (Vol.

Commercial Warehouse Service Plan for Department of Defense Agencies

Preparation of Hazardous Materials for Military Air Shipment

Radioactive Commodities in the Department of Defense Supply Systems

Compressed Gases and Gas Cylinders

Military Traffic Management Regulation

Packaging Improvement Report

Reporting of Transportation Discrepancies in Shipment

Military Entomology Operational Handbook

Rodent Control

Control and Recording Procedures Occupational Exposure to Ionizing Radiation

Respiratory Protection Program

Health Hazards From Propellant Fuels and Oxidizers

#### A-2. DOD Publications

DOD 4145.19-R DOD 4145.19-R-2 Storage and Warehousing Facilities and Services Storage and Materials Handling Standard Methods

#### DOD 4145.19-R-1

DOD 4145.19-R-3 DOD 4500-32-R

DOD 5200.1-R DOD 4160.21.1-M DODI 4140.27 DODI 4140.35 DODI 4150.7 DODI 4500.35 Storage Modernization

Military Standard Transportation and Movement Procedures (MILSTAMP)

DOD Information Security Program Regulation (DODI-SPR)
Defense Demilitarization Manual

Identification, Control and Utilization of Shelf Life Items
Physical Inventory Control for DOD Supply System Material
Department of Defense Pest Management Program (I&L)
Processing and Shipping DOD-Sponsored Retrograde Materiel

Destined for Shipment to the United States, It's Territories, Trusts, and Possessions (I&L)

## A-3. Army Publications

AR 190-11 AR 740-26 TM 11-415 TM 743-200-1 SB 11-30 Physical Security of Weapons, Ammunition, and Explosives

Physical Inventory Control

Primary Batteries (Dry and Reserve Types)

Storage and Materials Handling

FSC Class 6135; Dry Battery Management Data

## A-4. Navy Publications

OPNAVINST 5510.1E OPNAVINST P 5510.45B OPNAVINST 5540.8E ONI-CS-63-1-76 ONI-CS-63-2-76 ESOINST 4440.85 Information Security Program Regulation
United States Navy Physical Security Manual

Industrial Security Regulation Guide for Security Equipment Security Education Guide Dry Cell Battery Procedures

#### A-5. Air Force Publications

AFM 67-1, VOL I, part 1 T.O.-00-25-213

United States Air Force Supply Manual

Dry Cell Battery Procedures

#### A-6. DLA Publications.

DSAR 4145.11 DSAR 5205.8 DSAR 5205.15 DSAR 5710-1 DSAR 5710.2 DSAR 5710.3 Safeguarding of Sensitive and Pilferable DSA Items of Supply Storage and Custody of Classified Information Defense Supply Agency Classified Material Storage Program Physical Security Truck Control

## A-7. Specifications and Standards

Federal Specifications

P-S-863 W-L-122 QO-S-781 RR-C-271 TT-W-5711 GG-B-325 PPP-D-1427 Sweeping Compound Lamp, Photoflash

Visitor Control

Strapping, Steel, Flat and Seals

Chains and Attachments, Welded, Weldless and Roller Chain

Wood Preservation, Treating Practices

Binder, Load

Dunnage, Pneumatic, Cargo Shoring

Federal Standards FED-STD-356 FED-STD-595

Commercial Packaging of Supplies and Equipment
Color (Requirements for individual Color CHIPS (3 × 5
Supplements) should be submitted to the Naval Supply
Depot, Philadelphia, citing FED-STD-595 together with

appropriate chip number as shown therein.)

Military Specifications MIL-A-27302 MIL-C-12000 MIL-C-16173 MIL-D-11303 MIL-L-1497 MIL-L-14362 MIL-T-43372 MIL-T-46755

Military Standards MIL-STD-101 MIL-STD-105 MIL-STD-107 MIL-STD-129 MIL-STD-137 MIL-STD-147

MIL-STD-163 MIL-STD-290 MIL-STD-414

MIL-STD-904 MIL-STD-1235

MIL-STD-1363 MIL-STD-1458

MIL-STD-1486 Military Handbooks MIL-HDBK-7 MIL-HDBK-201 MIL-HDBK-721

Arrestor, Spark, Exhaust, Internal Combustion Engine Cable, Cord, and Wire, Electric Packaging of Corrosion Preventive Compound, Solvent Cutback, Cold Application

Drum Handling Attachment, Forklift Truck (For Horizontal Handling) Labeling of Metal Cans for Subsistence Items

Lumber, Unitizing and Loading of Temperatures of Chilled or Frozen Subsistence Tires, Pneumatic, and Tires Semipneumatic, Installed on Vehicles, Preparation for Storage of

Color Code for Pipelines and for Compressed Gas Cylinders Sampling Procedures and Tables for Inspection by Attributes Preparation and Handling of Industrial Plant Equipment for Shipment and Storage

Marking for Shipment and Storage Materials Handling Equipment

Palletized and Containerized Unit Loads for 40" × 48" Pallets, Skids, Runners or Pallet Type Base

Steel Mill Products, Preparation for Shipment and Storage Packaging, Packing and Marking of Petroleum and Related **Products** 

Sampling Procedure and Table for Inspection by Variables for Percent Defective

Guidelines for Insect Infestation of Subsistence

Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

Measurement of Wood Moisture Content Radioactive Materials, Marking and Labeling of Items,

Packages and Shipping Containers for Identification in Use, Storage and Transportation

In-transit Fumigation

Lumber and Allied Products Petroleum Operations Corrosion and Corrosion Protection of Metals

A-8. Miscellaneous Publications

NFPA Guide on Hazardous Materials Pamphlets 325A, 325M, 49, 491F, 704M

NFPA Codes Vol 5, Class 1, Division 2-National Electric Code

NFPA Flammable Liquids Code No. 30

National Fire Codes, 10 volumes, published by National Fire Protection Association (May be obtained from 470 Atlantic Avenue, Boston, MA 02210)

Strategic and Critical Material Storage Manual, published by General Services Administration (GSA)

Cleaning Petroleum Storage Tanks, Accident Prevention Manual No. 1 (Available from American Petroleum Institute, 1801 K Street, N.W., Washington, DC 20006)

DOD 4145.19-R-1 15 September 1979

Handbook of Dangerous Materials by N. Irving Sax (Available from Norstrand-Reinhold Publishing Co., 450 West Third Street, New York, NY 10001)

American National Standards Institute, Inc., publications 1430 Broadway, New York, NY 10018

Accident Prevention Manual for Industrial Operations (Available from National Safety Council, Inc., 425 North Michigan Avenue, Chicago, IL 60611)

Chemical Safety Data Sheets, published by Manufacturing Chemists Association, Inc., 1825 Connecticut Avenue, N.W. Washington, DC 20009

Occupational Safety and Health Administration Standards (OSHA) 29 CFR 1910 (May be obtained from US Department of Labor)

Armed Forces Pest Control Board Technical Memorandum No. 11 (Hydrogen Phosphide Fumigation with Aluminum Phosphide)

1. 是一种的工工工具是是一种原理的工作。

the state of the s

of his print to some as more for a more than the

# APPENDIX B

# **FORMS**

	하는 것도 할 때 맛이 많아 다른 가게 하는 것이 되는 것도 하는 것이 되었다. 그는 것은
DD Form 6	Packaging Improvement Report
DD Form 200	Report of Survey
DD Form 626	Motor Vehicle Inspection
DD Form 805	Storage Space Management Report
DD Form 858	Material Transfer Record
DD Form 1222	Requests for and Results of Tests
DD Form 1225	Storage Quality Control Report
DD Form 1387-2	Special Handling Data Certification
DD Form 1532	Pest Control Summary Report
DD Form 1574	Serviceable Tag—Materiel
DD Form 1574-1	Serviceable Label—Materiel
DD Form 1575	Suspended Tag—Materiel
DD Form 1575-1	Suspended Label—Materiel
DD Form 1576	Test/Modification Tag—Materiel
DD Form 1576-1	Test/Modification Label—Materiel
DD Form 1577	Unserviceable (Condemned) Tag—Materiel
DD Form 1577-1	Unserviceable (Condemned) Label—Materiel
DD Form 1577-2	Unserviceable (Reparable) Tag—Materiel
DD Form 1577-3	Unserviceable (Reparable) Label—Materiel
SF 361	Discrepancy in Shipment Report (DISREP)
SF 363	Discrepancy in Shipment Confirmation (DISCOM)

US Civil Service Commission

Std Form 46 US Government Motor Vehicle Operators Identification Card

							in the second	
							, King a big	
1.128								
			1 1 1					
							1 2 3 1 1 1 2 2	
				7,000				
	The Wager Continues (							
		100						
		18.84		1 1 1 1 1 1 1				
A STATE OF THE STA								
		11 7						
						ra si ja		
					4 79 7 14			

# APPENDIX C

# METRIC/TEMPERATURE CONVERSION CHARTS

		METRIC SYSTEM	
		LENGTH	
unit	abbreviation	number of meters	approximate U.S. equivalent
myriameter	mym	10,000	6.2 miles
kilometer	km	1,000	0.62 mile
hectometer	hm	100	109.36 yards
decameter	dkm	10	32.81 feet
meter	m	1	39.37 inches
decimeter	dm	0.1	3.94 inches
centimeter	cm	0.01	0.39 inch
millimeter	mm	0.001	0.04 inch
		AREA	
unit	abbreviation	number of square	meters approximate U.S. equivalent
square kilometer		1,000,000	0.3861 square mile 2.47 acres
hectare	ha	10,000	119.60 square yards
are	a	100	10.76 square feet
centare square centimeter	r sq cm or cm <sup>2</sup>	0.00	를 가장 하는 것이 되는 것으로 하는 것이 되었다. 그는 사람들은 사람들이 되었다면 하는 것이 없는 것이 없는 것이 되었다. 그런 사람들은 사람들은 사람들이 되었다면 없다면 없다.
square centimeter	Je em s. em		
		VOLUME	
unit	abbreviation	number of cubic r	meters approximate U.S. equivalent
decastere	dks	10	13.10 cubic yards
stere	S	0.10	1.31 cubic yards 3.53 cubic feet
decistere	ds cu cm or	0.000001	0.061 cubic inch
cubic centimeter	cm <sup>3</sup> also cc	0.00001	\$.00, casic men
FAR ST		CAPACITY	
unit	abbreviation	number of liters	cubic approximate U.S. equivalent d
			cubic dry liquid
kiloliter	kl	1,000	1.31 cubic y. ds
hectoliter	hl	100	3.53 cubic feet 2.84 bushels
decaliter	dkl I	10	0.35 cubic foot 1.14 pecks 2.64 gallons
deciliter	dl	0.10	61.02 cubic inches 0.908 quart 1.057 quarts
centiliter	cl	0.10	6.1 cubic inches 0.18 pint 0.21 pint 0.6 cubic inch 0.338 fluidound
milliliter	ml	0.001	0.6 cubic inch 0.338 fluidound 0.06 cubic inch 0.27 fluidram
	ō	MASS AND WEIGHT	
unit	abbreviation	number of grams	approximate U.S. equivalent
metric ton	MT or t	1,000,000	1.1 tons
quintal	q	100,000	220.46 pounds
kilogram	kg	1,000	2.2046 pounds
hectogram	hg	100	3.527 ounces
decagram	dkg	10	0.353 ounce
gram	g or gm	1	0.035 ounce
decigram	dg	0.10	1.543 grains
centigram	cg	0.01	0.154 grain
milligram	mg	0.001	0.015 grain

## APPENDIX C--Continued

