


CFLHD ADHOC DEFAULT PREFERNCES


Adhoc's are assigned default adhoc attributes required for preliminary design. For preliminary design of MSE Wall and Cut Wall for CFLHD, modify the adhoc attributes as shown below.

CUT WALL ADHOC ATTRIBUTES

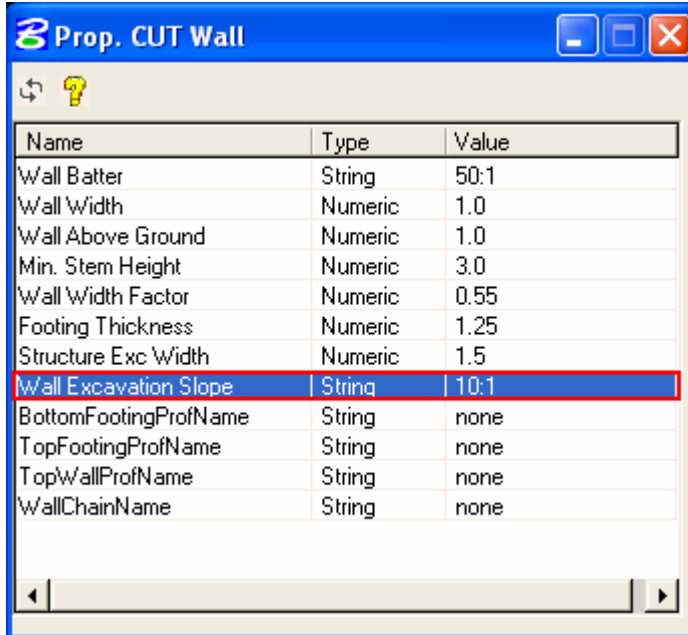

Name	Type	Value
Wall Batter	String	50:1
Wall Width	Numeric	1.0
Wall Above Ground	Numeric	1.0
Min. Stem Height	Numeric	3.0
Wall Width Factor	Numeric	0.55
Footing Thickness	Numeric	1.25
Structure Exc Width	Numeric	1.5
Wall Excavation Slope	String	10:1
BottomFootingProfName	String	none
TopFootingProfName	String	none
TopWallProfName	String	none
WallChainName	String	none

MSE WALL ADHOC ATTRIBUTES

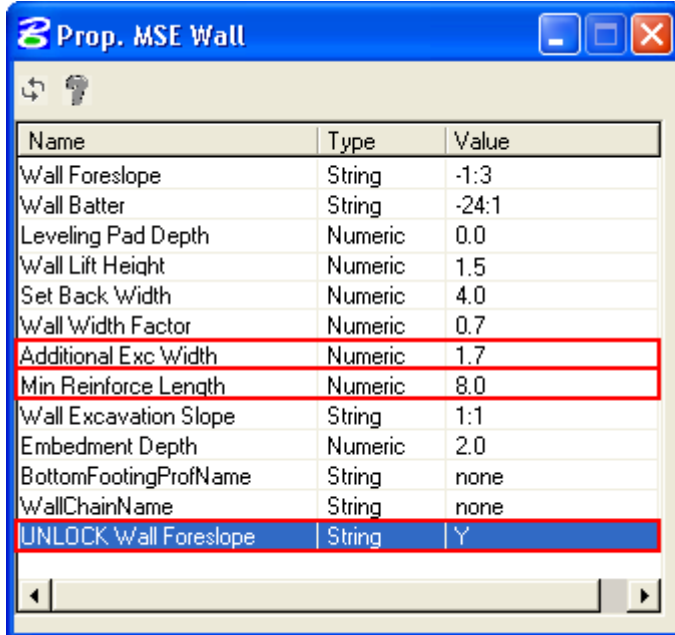

Name	Type	Value
Wall Foreslope	String	-1:3
Wall Batter	String	-24:1
Leveling Pad Depth	Numeric	0.0
Wall Lift Height	Numeric	1.5
Set Back Width	Numeric	4.0
Wall Width Factor	Numeric	0.7
Additional Exc Width	Numeric	1.7
Min Reinforce Length	Numeric	8.0
Wall Excavation Slope	String	1:1
Embedment Depth	Numeric	2.0
BottomFootingProfName	String	none
WallChainName	String	none
UNLOCK Wall Foreslope	String	Y