



the **ENERGY** lab

PROJECT FACTS

Carbon Storage

Midwest Geological Sequestration Consortium—Development Phase

Illinois Basin – Decatur Project Site

Background

The U.S. Department of Energy Regional Carbon Sequestration Partnership (RCSP) Initiative consists of seven partnerships. The purpose of these partnerships is to determine the best approaches for permanently storing carbon dioxide (CO₂) in geologic formations. Each RCSP includes stakeholders comprised of state and local agencies, private companies, electric utilities, universities, and nonprofit organizations. These partnerships are the core of a nationwide network helping to establish the most suitable technologies, regulations, and infrastructure needs for carbon storage (CS). The partnerships include more than 400 distinct organizations, spanning 43 states and four Canadian provinces, and are developing the framework needed to validate carbon sequestration technologies. The RCSPs are unique in that each one is determining which of the numerous CS approaches are best suited for their specific regions of the country and are also identifying regulatory and infrastructure requirements needed for future commercial deployment. The RCSP Initiative is being implemented in three phases, the Characterization Phase, Validation Phase, and Development Phase. In September 2003, the Characterization Phase began with the seven partnerships working to determine the locations of CO₂ sources and to assess suitable locations for CO₂ storage. The Validation Phase (2005–2012) focused on evaluating promising CO₂ storage opportunities through a series of small scale field tests in the seven partnership regions. Finally, the Development Phase (2008–2020) activities are proceeding and will continue evaluating how CO₂ capture, transportation, injection, and storage can be achieved safely, permanently, and economically at large scales. These tests are providing tremendous insight regarding injectivity, capacity, and containment of CO₂ in the various geologic formations identified by the partnerships. Results and assessments from these efforts will assist commercialization efforts for future sequestration projects in North America.

CONTACTS

John Litynski

Carbon Storage Technology Manager
National Energy Technology Laboratory
626 Cochran Mill Road
P.O. Box 10940
Pittsburgh, PA 15236-0940
412-386-4922
john.litynski@netl.doe.gov

Darin Damiani

Project Manager
National Energy Technology Laboratory
3610 Collins Ferry Road
P.O. Box 880
Morgantown, WV 26507-0880
304-285-4398
darin.damiani@netl.doe.gov

Robert J. Finley

Principal Investigator
Illinois State Geological Survey
615 E. Peabody Dr.
Champaign, IL 61820
214-244-8389
finley@isgs.uiuc.edu

NATIONAL ENERGY TECHNOLOGY LABORATORY

Albany, OR • Fairbanks, AK • Morgantown, WV • Pittsburgh, PA • Sugar Land, TX

Website: www.netl.doe.gov

Customer Service: 1-800-553-7681



U.S. DEPARTMENT OF
ENERGY

PARTNERS

Ameren Corporation
American Air Liquide
American Water Works Association
Archer Daniels Midland Company
Aventine Renewable Energy, Inc.
Baker Hughes, Inc.
Bellona US
Biorecro
Blue Source
British Petroleum
Carbon Storage Partners
The Cline Group
Conoco Phillips Company
Continental Carbonic Products, Inc.
Drummond Coal Company
Duke Energy Corporation, Inc.
Edison Mission Energy
Electric Power Research Institute, Inc.
Environmental Defense
GE Energy
Illinois Corn Growers Association
Illinois Department of Commerce and Economic Opportunity, Office of Coal Development
Illinois Department of Natural Resources, Office of Scientific Research and Analysis

(continued on pg. 4)

The Midwest Geological Sequestration Consortium (MGSC) is led by the Illinois State Geological Survey in collaboration with the Indiana, and Kentucky State Geological Surveys, and has a research focus on the entire state of Illinois, southwest Indiana, and western Kentucky. This partnership was established to assess carbon capture, transportation, and geologic carbon storage options in deep coal seams, mature oil fields, and deep saline formations in the Illinois Basin. Regional point source emissions in the MGSC area account for more than 265 million metric tons (292 million tons) of CO₂ per year, or about 11 percent of the total point source CO₂ emissions in the United States. The MGSC has determined that the Illinois Basin's regional geology offers exceptional geologic opportunities to safely and permanently store these emissions.

Project Description

Project Summary

MGSC has partnered with the Archer Daniels Midland (ADM) Company, an agricultural product processing company, and Schlumberger Carbon Services to conduct a large-volume, saline reservoir sequestration test at ADM's agricultural products processing complex in Decatur, Illinois. The Development Phase project, also referred to as the Illinois Basin – Decatur Project (IBDP) involves the injection of 1 million metric tons (1.1 million short tons) of CO₂ over three years into a deep saline formation of the Illinois Basin.

Site Description

The project site is located on the ADM industrial facility and corporate headquarters within the city of Decatur, Illinois, a city with a population of 77,000 people. The injection well and verification wells are located in a field north of the industrial facilities (Figure 1). ADM's Decatur complex consists of various processing facilities including a corn wet milling plant with ethanol production which is the source of the CO₂ for the project. Additional primary facilities include cogeneration of electricity and steam, bioproducts, oilseed processing, and vegetable oil refining. Previously this field had been used for corn/soybean farming or had lain fallow. Other land uses within one mile of the test site include agricultural, commercial, and residential. The site is located in Bloomington Ridged Plain of the Till Plains Section of Illinois, has approximately 40 m (25 feet) of relief, and is less than 3.2 km (2 miles) west of Lake Decatur. Lake Decatur is a surface impoundment of the Sangamon River, which is the major surface water feature in east-central Illinois. The site is underlain by approximately 1.5 meters of loess, 30.5 feet of glacial drift (Wisconsin and Illinoian Episode), and Pennsylvanian bedrock. The deepest Underground Source of Drinking Water (USDW) being monitored at the site is at a depth of about 43 m (140 ft) in the Pennsylvanian bedrock.



Figure 1. Overview of the Illinois Basin – Decatur Project during drilling of the verification well in November 2010.

PARTNERS (cont.)

Illinois Department of Transportation

Illinois Oil and Gas Association

Indiana Gasification, LLC

Indiana Geological Survey, Indiana University

Indiana Oil and Gas Association

Interstate Oil and Gas Compact Commission

Kentucky Geological Survey, University of Kentucky

Kentucky Oil and Gas Association

Lincolnland Agri-Energy, LLC

Louisville Gas and Electric Company, LLC

Natural Resources Defense Council

Peabody Energy

Power Holdings, LLC

Praxair, Inc.

Schlumberger Carbon Services

Spectra Energy Corporation

Tenaska Taylorville, LLC

Total Gas and Power Ventures USA, Inc.

Description of Geology

The target formation is the Cambrian-age Mt. Simon Sandstone, the thickest and most widespread saline reservoir in the Illinois Basin (Figure 2). It is overlain by the Eau Claire Formation, a regionally extensive, low-permeability shale, siltstone and tight limestone, and is underlain by Precambrian granitic basement. To date, the upper Mt. Simon has been used extensively for natural gas storage in the northern half of Illinois. Detailed reservoir data from a few wells at these storage sites shows that the lower Mt. Simon has the necessary porosity and permeability to be a good storage target. A regional isopach map of the Mt. Simon initially suggested there are probably more than 305 meters (1,000 feet) of Mt. Simon reservoir available for injection at the ADM site and 505 meters (1,650 feet) was actually measured. The injection well was drilled to a total depth of 2,200 meters (7,236 feet). Data from a well drilled 17 miles from the ADM site and a second well drilled 51 miles south of the ADM site indicate that there is generally good porosity in the Mt. Simon. MGSC found that the average porosity of the Mt. Simon injection zone at the IBDP site is around 12 percent. The top of the Mt. Simon Sandstone at the ADM site is estimated to lie at a depth of 1,670 meters (5,500 feet).

Within the Illinois Basin, the Devonian-age New Albany Shale, Ordovician-age Maquoketa Formation, and the Cambrian-age Eau Claire Formation all contain shales that function as the primary confining zones. There are also many minor, thinner Mississippian- and Pennsylvanian-age shale beds that form local confinement for known hydrocarbon traps within the basin. Subsurface wireline correlations suggest the three primary confining zones are continuous within a 160-kilometer (100-mile) radius of the test site. At the injection site the Eau Claire, which will be the primary confining zone, was found to be 150 meters (500 feet) thick. The Ordovician Maquoketa Shale and the New Albany Shale act as secondary and tertiary confinement. There are no seismically resolvable faults and fractures within a 40-kilometer (25-mile) radius of the ADM site.

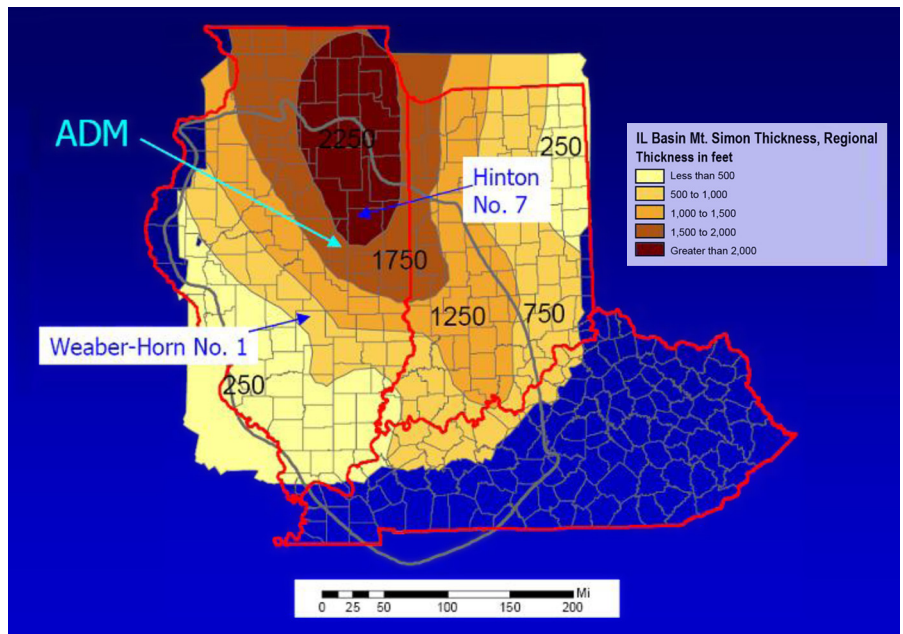


Figure 2. Thickness of Mt. Simon Sandstone in Illinois Basin.

Source of CO₂

The source of CO₂ for the project is downstream of the product recovery scrubbers that follow the ADM ethanol fermentation units. The CO₂ stream from these units is typically 99%+ pure and is saturated with water vapor at 27 °C (80 °F) and 1.5 psig. Common impurities are ethanol and nitrogen in the range of 600 to 1,000 parts per million by volume (ppmv) each. The CO₂ also contains other trace.

Injection Operations

The CO₂ stream from the fermentation units is routed to a dedicated dehydration/compression facility where it is dried and compressed. The CO₂ stream is routed to a multistage centrifugal blower with one 632 kW motor that raises the CO₂ pressure to 18 psig. Following the blower, the CO₂ is compressed to a supercritical fluid (~1,400 psig) by two 4-stage reciprocating compressors running in parallel and powered by 632 kW motors. Glycol dehydration occurs between the third and fourth stages of compression. The compressed CO₂ fluid is then transported to the injection wellhead through a 6,000 foot steel pipeline. An additional pump is integrated into the system just downstream of the compressors to boost pressure above 1,400 psi if additional pressure is needed to maintain an injection rate 1,000 metric tons per day. Shakedown of the newly constructed facility was completed in October, 2011. On November 2, 2011 the Illinois EPA granted approval to begin injection operations, and on November 17, 2011 injection operations were initiated at 1,000 metric tons per day.

Simulation and Monitoring of CO₂

MODFLOW and GFLOW are being used to develop a conceptual model for shallow groundwater flow and to estimate CO₂ migration in the subsurface. The modeling results provide information used in developing risk mitigation strategies for nearby water supplies in the unlikely occurrence of a CO₂ leak either during or following CO₂ injection. Geochemical models, such as Geochemist's workbench, PHREEQCI, and TOUGHREACT, will be used to conduct thermodynamic modeling of shallow groundwater and injection-formation brine. These models will provide insight on the long-term fate of injected CO₂ and will be used to study the regional impact of multiple injection wells on flow within a saline reservoir across the Illinois Basin. At present, 17 meters (55 feet) of perforations have been opened in the lower Mt. Simon, and plume modeling is proceeding based on porosity and permeability data from sidewall cores and well log information. Other zones may be opened during the three-year injection period to take advantage of vertically stacked storage zones that will result in a compact plume shape. Porosities in the lower Mt. Simon are 15–25 percent, and permeabilities are primarily in the range of tens to several hundred millidarcies, up to about 1,000 millidarcies.

COST

Total Project Value

\$96,214,720

DOE/Non-DOE Share

\$75,634,823 / \$20,579,897

AWARD NUMBER

FC26-05NT-42588





The IBDP has an extensive Monitoring, Verification, Accounting, and Assessment (MVAA) program focused on the 0.65 km² (0.25 mi²) project site and critical locations in the surrounding area. Program goals include establishment of the environmental baseline conditions to evaluate potential impacts from CO₂ injection, demonstration that project activities are protective of human health and the environment, and demonstration of an accurate accounting of stored CO₂. MVAA efforts are being conducted pre-, during, and post- CO₂ injection. Effectiveness of long-term storage of CO₂ in the Mt. Simon is being evaluated through an in-zone verification well designed to monitor the injection formation and formations immediately above the primary caprock using pressure monitoring and fluid sampling. A dedicated geophone well has been drilled to facilitate repeat seismic imaging over the life of the project. Surface deformation will be measure using InSAR satellite imagery. Monitoring of the near-surface environment includes color infrared aerial imagery, high-resolution electrical earth resistivity, shallow groundwater quality, soil CO₂ fluxes, net exchange CO₂ fluxes, and vadose zone CO₂ concentrations. Characterization of near-surface CO₂ conditions is important to determine baseline conditions for detecting any potential CO₂ leakage to the atmosphere.

Goals and Objectives

MGSC's overall goal is to carry out a fully integrated demonstration of monitored geological carbon storage in the largest-capacity saline reservoir in the Illinois Basin. Specific objectives include:

- To inject 1 million metric tons of supercritical CO₂ from an industrial source into a regionally significant saline reservoir to demonstrate the safety, effectiveness, and efficiency of the process of isolating the CO₂ stream from the atmosphere.
- To inject a volume of CO₂ such that the plume will be of sufficient size to monitor geophysically and will adequately emulate larger volumes in terms of requirements for compression/dehydration, injection well construction, and



Figure 3. Completed CO₂ pipeline at the ADM site.

environmental monitoring, and project results can be effectively extrapolated to commercial-scale operations and multiple sites within the Illinois Basin.

- To establish a project development model for site characterization, permitting, drilling and completion, environmental monitoring, and outcome assessment that will inform the public, scientists, regulators, and legislators on regional, national, and global scales about geologic carbon sequestration, and that will additionally support energy facility development.
- To demonstrate the development and use of a dynamic geologic model for the site that evolves as new data are acquired and incorporates advanced understanding of the fate of the injected CO₂ and its interactions with reservoir, seal, and subsurface fluids.

Accomplishments to Date

- Injection well drilled and completed May 2009.
- Geophone well completed and geophone array installed in November 2009.
- 3D seismic baseline data acquired in January 2010.
- Verification well drilled, cased, and fitted with Westbay™ fluid sampling and P/T sensor instrumentation in January, 2011.
- Construction of compression/dehydration facility and pipeline completed in summer 2010 (Figure 3).
- Illinois EPA finalizes Class I Underground Injection Control (UIC) Permit in April 2011.
- Baseline fluid samples from injection target zone collected from verification well in summer 2011 (Figure 4).



Figure 4. Groundwater sampling efforts at the ADM site.



- Initiated satellite interferometry baseline data collection for imaging ground displacement in summer 2011.
- Compression/dehydration facility commissioned in October 2011.
- Illinois EPA completed review of as-built specifications and granted approval to begin injection operations on November 4, 2011.
- Injection operations at 1,000 metric tons per day initiated on November 17, 2011.
- Submittal of UIC Class VI permit December 2011.
- First post-injection 3-Dimensional vertical seismic profile and cased-hole logging in March 2012.

Benefits to the Region

The MGSC region currently emits 265 million metric tons (292 million tons) of CO₂ annually. The target Mt. Simon Sandstone is estimated to have a regional potential CO₂ storage capacity in the Illinois Basin of 11 to 151 billion metric tons (12 to 166 billion tons). Based on the region's current emissions rate, 50 percent of the regional emissions for the next 100 years amounts to 15.1 billion metric tons (16.6 billion tons), a total amount that is less than the low end of the basin's estimated storage capacity. Thus, this project is vital to determine the storage capabilities of the Mt. Simon Sandstone.

The previously described large scale field test is critical to understanding that adequate injectivity, containment, and capacity exist in storage formations throughout the United States. This will further commercial deployment of carbon capture, utilization, and storage (CCUS) technologies at an adequate scale to reduce GHG emissions from industrial plants.

