

SAND80-0179
Unlimited Release
UC-60

Aerodynamic Performance of a 5-Metre-Diameter Darrieus Turbine With Extruded Aluminum NACA-0015 Blades

Robert E. Sheldahl, Paul C. Klimas, Louis V. Feltz

Printed March 1980



Sandia National Laboratories

Issued by Sandia Laboratories, operated for the United States
Department of Energy by Sandia Corporation.

NOTICE

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.

Printed in the United States of America

Available from
National Technical Information Service
U. S. Department of Commerce
5285 Port Royal Road
Springfield, VA 22161

Price: Printed Copy \$4.50 ; Microfiche \$3.00

SAND80-0179
Unlimited Release
Printed March 1980

Distribution
Category UC-60

AERODYNAMIC PERFORMANCE OF A 5-METRE-DIAMETER
DARRIEUS TURBINE WITH EXTRUDED ALUMINUM
NACA-0015 BLADES

Robert E. Sheldahl
Paul C. Klimas
Aerodynamics Department 5630

Louis V. Feltz
Exploratory Systems Department 5620

Sandia Laboratories
Albuquerque, NM 87185

ABSTRACT

A 5-metre-diameter vertical-axis wind turbine has undergone continued testing since 1976 at the Sandia Laboratories Wind Turbine site. The latest tests of this machine have been with extruded aluminum blades of NACA-0015 airfoil cross section. The results of these tests at several turbine rotational speeds are presented and compared with earlier test results. A performance comparison is made with a vortex/lifting line computational code. The performance of the turbine with the extruded blades met all expectations.

ACKNOWLEDGMENT

The authors are grateful for the support provided by the personnel of the Advanced Energy Projects Division 4715.

CONTENTS

	<u>Page</u>
NOMENCLATURE	7
SUMMARY	9
Introduction	11
The 5-Metre Vertical-Axis Wind Turbine	12
Testing and Data Acquisition	17
Results and Discussion	19
Conclusions	30
References	32

ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1	The 5-Metre Vertical-Axis Wind Turbine at Sandia Laboratories Test Site	13
2	Original Three-Piece Blades on 5-Metre Turbine	14
3	Short Segment of the NACA-0015 Airfoil Extrusion With End Fixture and Mandrel	15
4	Destructive Static Tensile Samples of Three Candidate Joint Designs	16
5	Schematic of 5-Metre Turbine System	17
6	Representative Time Histories of 5-Metre Turbine Torque and Site Wind Velocity	18
7	Power Coefficient, C_p , Performance Data of 5-Metre Turbine With Three Extruded NACA-0015 Blades at 125, 137.5, and 150 rpm	22
8	Power Coefficient, K_p , Performance Data for 5-Metre Turbine With Three Extruded NACA-0015 Blades at 125, 137.5, and 150 rpm	23

ILLUSTRATIONS (cont)

		<u>Page</u>
9	Power Coefficient, C_p , Performance Data of 5-Metre Turbine With Two Extruded NACA-0015 Blades at 162.5 and 175 rpm	24
10	Power Coefficient, K_p , Performance Data of 5-Metre Turbine With Two Extruded NACA-0015 Blades at 162.5 and 175 rpm	25
11	Comparison of the 150 rpm C_p Data Between Initial Blade Performance and Extruded Blade Performance of the 5-Metre Turbine	27
12	Comparison of the 150 rpm K_p Data Between Initial Blade Performance and Extruded Blade Performance of the 5-Metre Turbine	27
13	Comparison of Two-Bladed 5-Metre Turbine Performance Data With VDART Computer Program at 162.5 rpm	29
14	Zero Wind Drag Coefficient Data for Three Configurations of Vertical Axis Wind Turbine	30

NOMENCLATURE

A_s	Turbine swept area
c	Blade chord
C_{d_0}	Zero wind drag coefficient
C_p	Power coefficient, $\frac{Q\omega}{\frac{1}{2}\rho_\infty V_\infty^3 A_s}$
J	Advance ratio, $\frac{V_\infty}{R\omega}$
K_p	Power coefficient, $\frac{Q\omega}{\frac{1}{2}\rho_\infty A_s (R\omega)^3}$
L	Blade length
N	Number of blades
Q	Turbine aerodynamic torque ($T + Q_f$)
Q_f	Friction tare torque
R	Turbine maximum radius
Re_c	Chord Reynolds number, $\frac{\rho_\infty R\omega c}{\mu_\infty}$
T	Turbine shaft torque

NOMENCLATURE (cont)

V_{∞} Average freestream velocity

X Turbine tip-speed ratio, $\frac{R\omega}{V_{\infty}}$

μ_{∞} Freestream viscosity

ρ_{∞} Freestream density

ω Turbine rotational speed

σ Solidity, $\frac{NcL}{A_s}$

SUMMARY

The Sandia 5-metre vertical-axis wind turbine has undergone continued testing since 1976 in free air at the Sandia Laboratories Wind Turbine site. The turbine was operated at several fixed and nearly constant rotational speeds by an induction motor/generator which can act as either a motor delivering power to the turbine or as a generator delivering power from the turbine to the utility line. The extruded aluminum blades on the turbines are of the straight line/circular arc troposkien approximation with a constant NACA-0015 airfoil cross section from hub-to-hub. The turbine height-to-diameter ratio is 1.02. The solidity of the present system is 0.22 with three blades and 0.15 with two blades. These blades differ from previous blades which had an NACA-0012 airfoil section only on the circular arc portion of the blades. The straight line segments which attached the original blade to the center column were not of airfoil cross section but merely a flat sheet of steel rolled back onto itself with a circular leading edge.

Five different constant-rotational-speed data sets were obtained with the extruded aluminum blades: three sets (125, 137.5 and 150 rpm) with three blades and two sets (162.5 and 175 rpm) with two blades. The performance data were obtained with the aid of a minicomputer using a computer program which utilized statistical methods. The unsteadiness of the winds necessitates the statistical averaging of the data. The "method of bins" computer technique (computer code BINS) used for averaging the data is, at the present time, the only method by which reasonable performance information has been obtained in free air. The results show the performance of the turbine with the extruded aluminum blades to meet all expectations relating to wind tunnel performance and analytical models. The maximum power coefficient, C_p , for the turbine was found to be 0.392 at a rotational speed of 150 rpm with three blades. This is an improvement of 44% over the former three-piece blades also operating with three blades at 150 rpm.

Part of the improvement in the performance is due to the elimination of the nonairfoil straight segments and part is due to the improved performance of the NACA-0015 airfoil over the NACA-0012 airfoil.

AERODYNAMIC PERFORMANCE OF A 5-METRE-DIAMETER
DARRIEUS TURBINE WITH EXTRUDED ALUMINUM
NACA-0015 BLADES

Introduction

The vertical-axis wind turbine,¹ which was patented in the United States in 1931 by G. J. M. Darrieus, has been receiving continued attention at Sandia Laboratories.²⁻¹⁴ Sandia Laboratories fabricated its first machine, a 5-metre diameter Darrieus turbine, in 1974. The original turbine design allowed a variable rotational speed mode of operation; however, subsequent studies identified the constant rotational speed/synchronous power grid application as being very promising for the Darrieus turbine. Since 1976, the Sandia 5-metre turbine has been operating in a synchronous grid mode.

The first performance data for this turbine with its original blades were reported in Ref 2. Each of its original blades consisted of three segments: a circular arc located near the turbine equator with a 19-cm chord NACA-0012 airfoil cross section, and two straight sections that attached the circular arc to the center column. Each straight section was steel sheet formed to a "streamlined" shape with a 10-cm chord. This straight line/circular arc combination was designed to approximate the shape that a perfectly flexible blade would assume under the action of centrifugal forces and has been given the name troposkien³ (Greek for turning rope). It was determined that the straight sections were detrimental to the turbine performance² and that the blades should have the airfoil cross section from hub-to-hub. With that in mind, new one-piece blades were designed and the airfoil cross section was changed to the NACA-0015 cross section to take advantage of the fact that these airfoils exhibit more favorable stall characteristics. This report describes the performance of the turbine using these new blades.

The 5-metre turbine shares the test site with a 17-metre turbine and a 2-metre turbine. Also at the site is the instrumentation building which houses the controls for the three turbines, turbine instrumentation, anemometry instrumentation, and the Hewlett-Packard HP 21 MX minicomputer system. It should be noted that the elevation of the test site is 1658 metres and that the nominal air density is 82% of standard sea level density.

The 5-Metre Vertical-Axis Wind Turbine

The Sandia 5-m turbine, a proof-of-concept machine fabricated in 1974, was designed to be erected in the shortest possible time at reasonable cost. These ground rules were the basis for the construction of its original blades which were later found to perform below expectations.² It was decided in 1977 to design and purchase new aluminum blades for this machine with the blades being one-piece extrusions with the NACA-0015 airfoil cross section extending from hub-to-hub. Figure 1 shows the turbine at the test site with the new one-piece blades. It can be seen that overall, the blade design is much "cleaner" than the original design shown in Figure 2. The new blades eliminate the nonaerodynamic straight sections as well as the knuckles at the attachment to the circular arc portion of the blades.

The new blades are one-piece hollow aluminum (Alloy 6061 T6) extrusions conforming to the NACA-0015 airfoil cross section with a chord of 15.24 cm (6 in.). They were bent to the curved blade shape by incremental bending and then stress-relieved. The blades were furnished to Sandia from Aluminum Company of America (ALCOA) without end fixtures for attachment to the rotating tube of the turbine. The end fixtures were attached to the blades with an aircraft structural adhesive as the primary joining method. Representative joint components are shown in Figure 3. The upper item is a short segment of the blade extrusions, and the item at the right is the machined blade end fixture. The tapered plug end of this fixture is inserted into a closely matched cavity in the blade extrusion. This cavity was obtained by spark discharge machining, using an identical plug as the

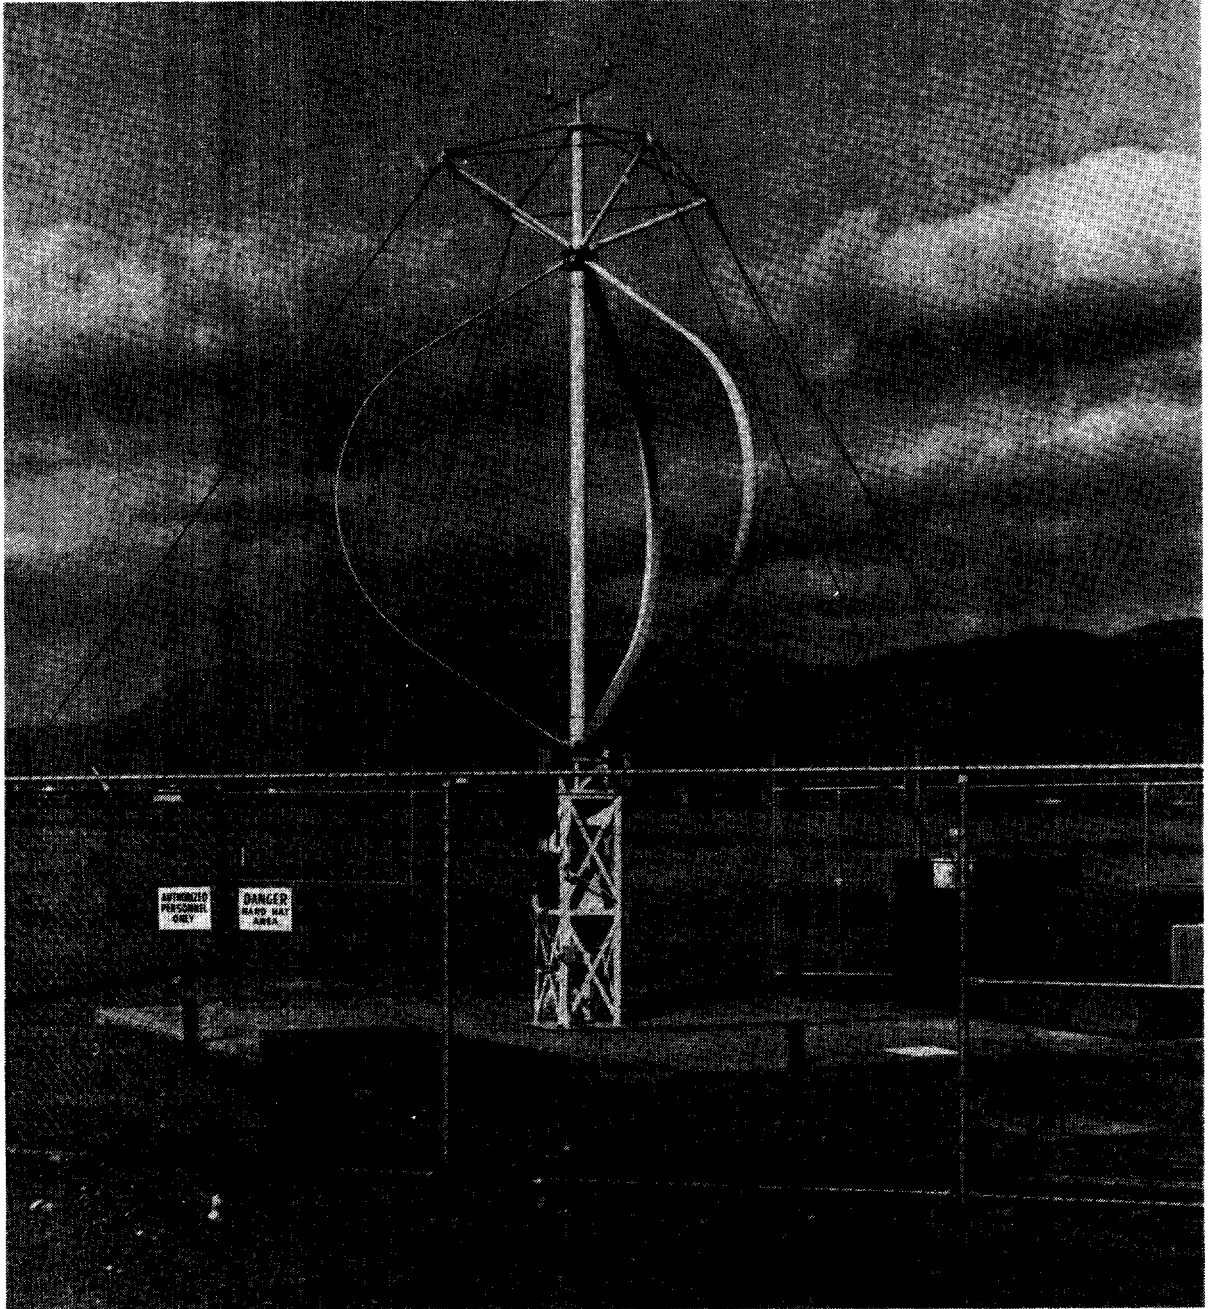


Figure 1. The 5-Metre Vertical-Axis Wind Turbine at Sandia Laboratories Test Site

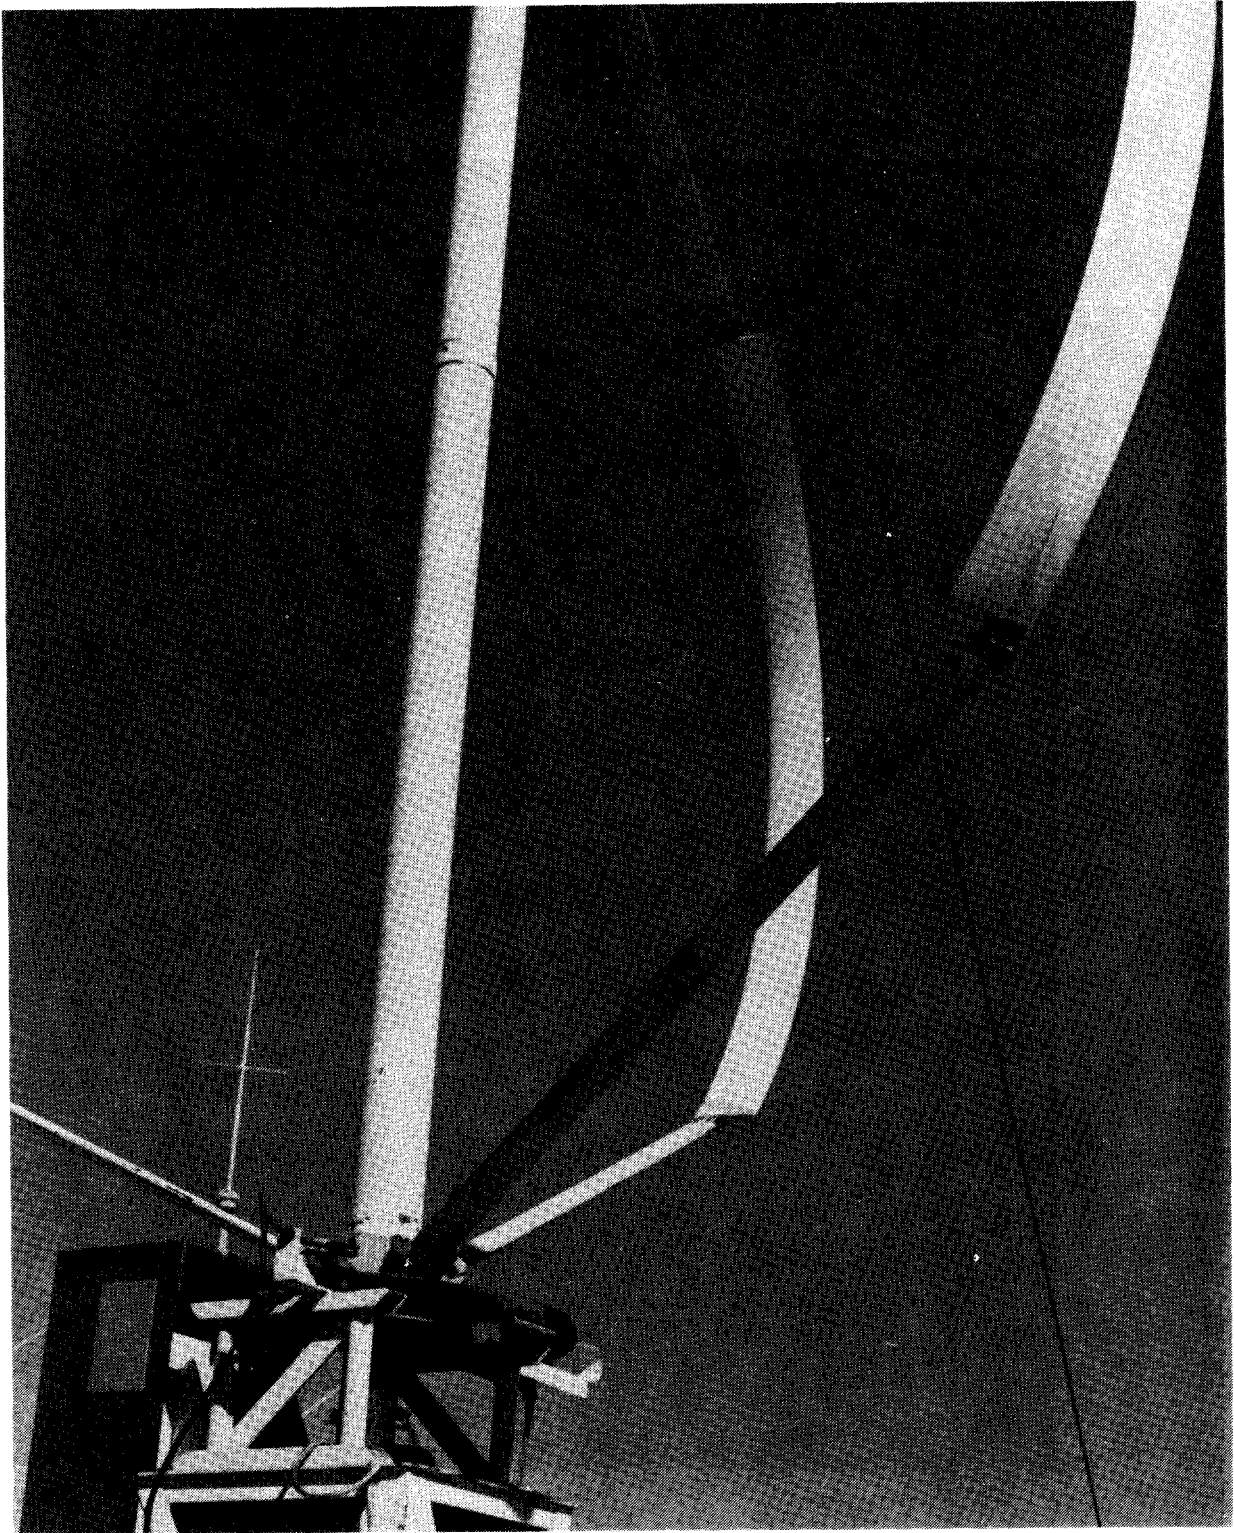


Figure 2. Original Three-Piece Blades on 5-Metre Turbine

machining mandrel. This mandrel is seen in the lower left corner of the figure. After the end fixtures were installed, sheet aluminum cover plates were contoured to the external airfoil surface and added as a double-lap joint strengthener over the joint of the end fixture and blade with the same adhesive. Finally, rivets were placed through the entire sandwich structure of the joint. Destructive static tensile tests were conducted on short, straight blade segments with three candidate joint designs: (1) plug and adhesive (2) plug and adhesive with contoured cover plates, and (3) plug and adhesive with riveted contoured cover plates. The tests indicated the mode of failure and confirmed the predicted strength levels. Each of three samples tested failed only after tensile yielding of the aluminum extrusion had commenced (Figure 4). The blades failed at loads in excess of 2.67×10^5 N (60,000 lb_f). For reasons of maximum safety, design 3 was chosen for the blade end fixtures.

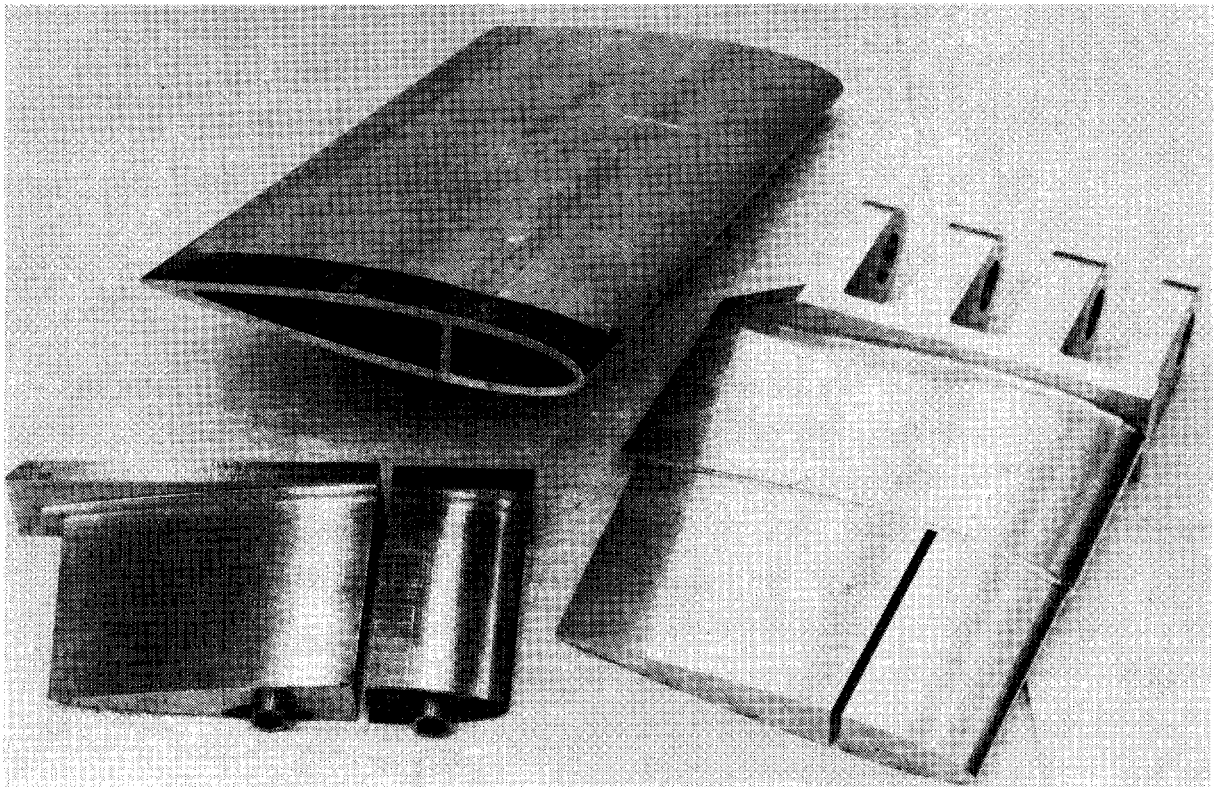


Figure 3. Short Segment of the NACA-0015 Airfoil Extrusion With End Fixture and Mandrel

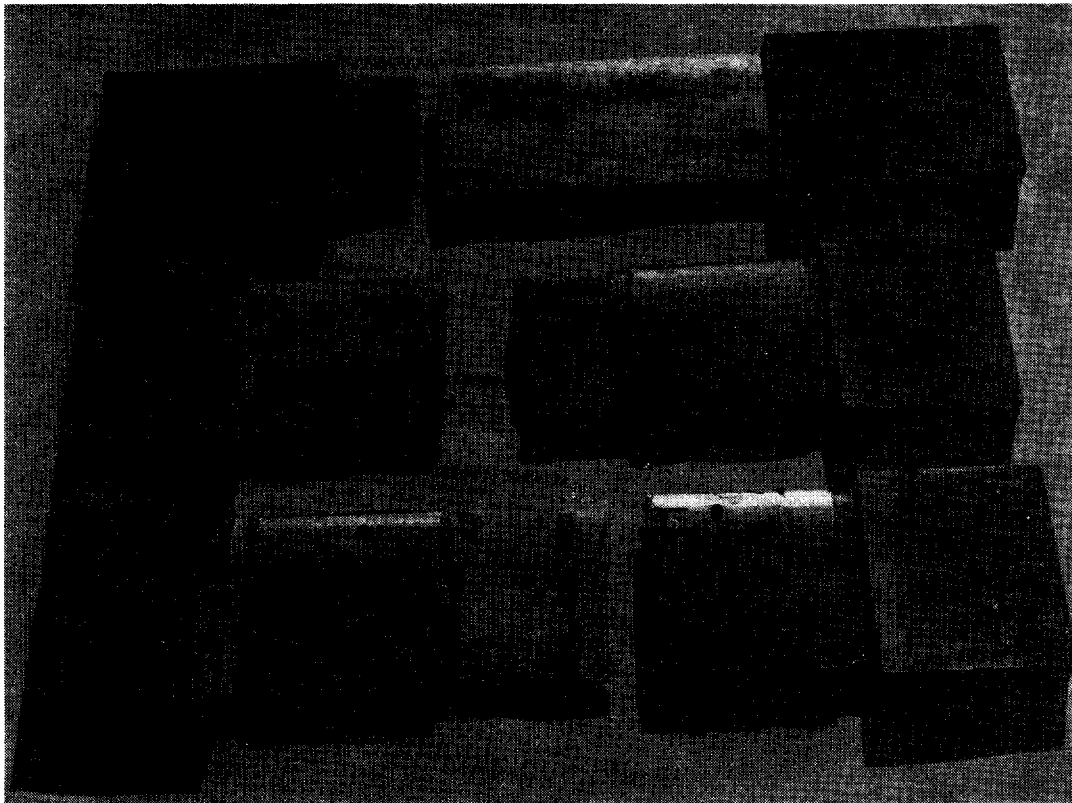


Figure 4. Destructive Static Tensile Samples of Three Candidate Joint Designs

The turbine is designed to operate at a nearly constant rotational speed by connecting the turbine shaft through a two-stage timing belt drive to an induction motor/generator operating at 3600 rpm. By changing pulleys, the turbine speed can be changed in discrete steps. Figure 5 is a schematic of the 5-m system showing the relationship of the induction machine, speed increaser, Lebow^{*} RPM and torque transducer, and the turbine shaft. Nominal rotational speed of the turbine is determined by the synchronous speed of the induction machine and the timing belt sprocket ratios. The induction machine can act as either a motor, delivering power to the turbine from the utility line, or as a generator, delivering power to the utility line from the turbine.

^{*}Lebow Associates, 1728 Maple Lawn Road, Troy, Michigan 48084

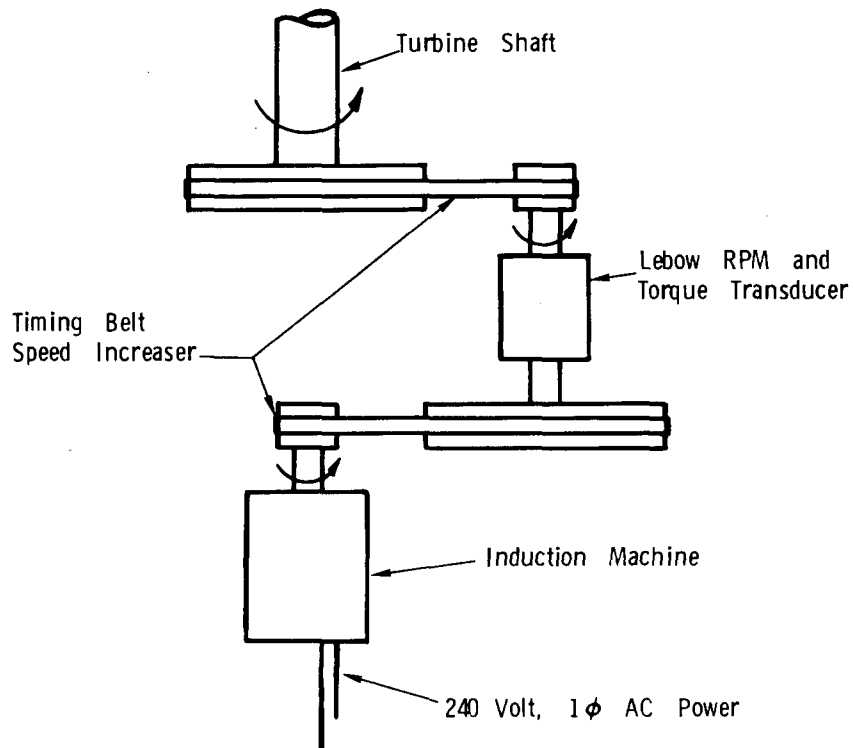


Figure 5. Schematic of 5-Metre Turbine System

Testing and Data Acquisition

The testing of turbines in free-air offers problems not usually encountered in wind tunnel testing. In particular, the atmospheric wind speed seldom remains constant for any appreciable length of time. Consequently, it is difficult to assign an appropriate wind velocity corresponding to a given torque measurement. A record showing typical wind velocity and turbine torque fluctuations is shown in Figure 6. The unsteadiness of the velocity and torque shows some of the problems of obtaining free-air data from a wind turbine. Computer code BINS,² which uses the "method of bins" to statistically average the wind speed and torque data, was developed to assist the data acquisition. The wind speed and torque are recorded at sample rates chosen by the operator, generally from 1 to 10 data samples per second. The data are then stored in velocity bin widths of 0.5 mph, i.e., a datum point is taken and the wind velocity is determined which, in turn, locates the velocity bin. The datum point is

widths of 0.5 mph, i.e., a datum point is taken and the wind velocity is determined which, in turn, locates the velocity bin. The datum point is counted, and the value of the torque obtained at that wind speed is added to the summed torque in the bin. The data are stored as a function of the velocity bins (120 bins for velocities from 0 to 60 mph). Each bin records the number of data points and the total summed torque. Each data record, consisting of the 120 velocity bins, number of data points, and the summed torque for each bin, also contains information which is constant for each data record. These constants are the rotational speed, number of blades, anemometer identification, wind shear correction factor, temperature, barometric pressure, time of day, and turbine tare torque. The turbine tare torque is the torque lost in the turbine due to bearing friction and belt losses.

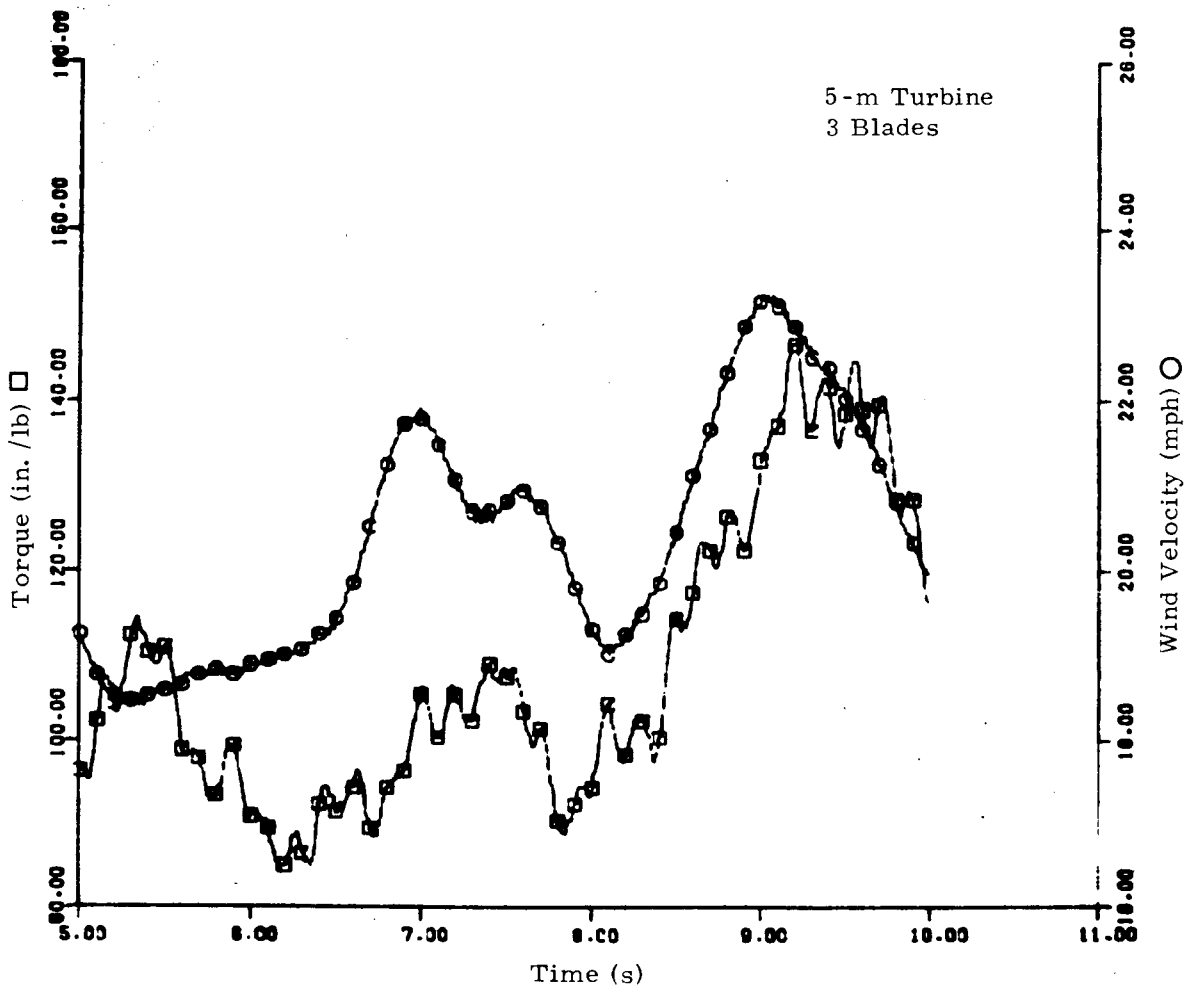


Figure 6. Representative Time Histories of 5-Metre Turbine Torque and Site Wind Velocity

The computer will accept simultaneously wind-velocity data from three separate anemometers; thus, during a single test three data records can be generated, all with the same turbine torque information but with wind velocities corresponding to each separate anemometer. The operator has the option of taking wind-velocity data from any of the available anemometers at the turbine site up to a total of three.

During a test, the required constant information is input to the computer. With the turbine operating, the computer is instructed to take data. If during the test the temperature or barometric pressure changes, the test is terminated and the data record stored. The new information is input to a new data record and testing is resumed. Data are taken when the winds are available, so a test may be a few minutes long or extend past an hour. These tests are performed on a day-to-day basis; the end result is a large amount of data taken for a wide range of wind conditions over many days.

Results and Discussion

The data records for a given rotational speed and anemometer can be combined into a data set, and the performance of the turbine can be computed by the minicomputer in the control building. The data are corrected for the day-to-day variations of the ambient air density, and the results of the summed data records are presented in the form of power coefficient as a function of tip-speed ratio or advance ratio.

The power coefficient, which is a standard measure of turbine performance, is calculated by

$$C_p = \frac{Q \omega}{\frac{1}{2} \rho_{\infty} V_{\infty}^3 A_s} \quad (1)$$

where Q is the turbine torque corrected for tare torque losses, ω is the turbine rotational speed, ρ_{∞} is the ambient air density, V_{∞} is the far

field wind velocity, and A_s is the turbine swept area.² The values of this power coefficient are plotted against a tip-speed ratio defined as:

$$X = \frac{R\omega}{V_\infty} . \quad (2)$$

A second power coefficient has been defined² as

$$K_p = \frac{Q\omega}{\frac{1}{2}\rho_\infty A_s (R\omega)^3} \quad (3)$$

where the wind velocity of the first power coefficient has been replaced by the blade equatorial velocity. This power coefficient was developed for three reasons: (1) K_p shows that power reaches a maximum at a particular value of the advance ratio (wind speed) when the turbine rotational speed is constant; (2) K_p describes more clearly the power output characteristics of the wind turbine operating in the synchronous mode; and (3) since the calculation of C_p involves a wind velocity cubed, large errors in the calculation can occur due to errors in the wind speed measurement. The values of this second power coefficient are plotted against an advance ratio defined as

$$J = \frac{V_\infty}{R\omega} . \quad (4)$$

which is merely the inverse of the tip-speed ratio.

Each data set consisted of eight or more data records and contained more than one-third million data points. Five data sets were obtained during the course of the test program. Three of the data sets (125, 137.5, and 150 rpm) are for a three-bladed turbine configuration with a turbine solidity, σ , of 0.22. The test plan originally called for testing the three-bladed configuration at rotational speeds above 150 rpm; however, the improved performance (higher torques) could not be accommodated. The attempt with a rotational speed of 162.5 rpm resulted in overspeeding of the induction motor and finally timing belt skip and breakage. The remaining two data sets (162.5 and 175 rpm) were for a two-bladed configuration with a turbine solidity of 0.15. Again, other rotational speeds were

planned; however, at lower rotational speeds the two-bladed configuration entered a natural frequency regime which caused excessive vibration of the turbine; at rotational speeds in excess of 175 rpm, the turbine output again exceeded the torque limitation of the induction motor.

The wind velocities presented in all five data sets were obtained from anemometers located two turbine diameters away from the axis of rotation and at the turbine equator height. The usual winds at the turbine site are easterly or westerly, and the anemometers are located to the north and south of the turbine to minimize the influence of the turbine on the anemometers.² Data were not taken when the wind was not from the usual wind directions.

The power coefficients, C_p , for the three data sets of the three-bladed configuration are presented in Figure 7 as a function of the tip-speed ratio. It can be seen that with each increase in chord Reynolds number (rotational speed) there is a corresponding increase in maximum power coefficient. At a chord Reynolds number of 2.5×10^5 (125 rpm), the maximum C_p is 0.335; at $Re_c = 2.8 \times 10^5$ (137.5 rpm), $C_{p_{max}}$ is 0.360; at $Re_c = 3.0 \times 10^5$ (150 rpm), $C_{p_{max}}$ is 0.392. Run-away, the high tip-speed ratio at which no power is produced, occurs near the tip-speed ratio of 8 for all three rotational speeds. The power coefficients, K_p , are presented for the three-bladed configuration in Figure 8. This figure shows the inherent self regulation (K_p reaches a maximum value and does not continue to increase with increasing wind velocity) of a Darrieus turbine operating at a constant rotational speed with the maximum power coefficient, $K_{p_{max}}$, occurring between an advance ratio of 0.3 and 0.4. The value of $K_{p_{max}}$ increases with increasing chord Reynolds number as expected.

The power coefficients, C_p , for the two data sets of the two-bladed configuration are presented in Figure 9. The maximum power coefficients are lower than the three-bladed data as expected due to the lower solidity of the turbine with two blades.⁴ The K_p data presented in Figure 10 shows a large increase in $K_{p_{max}}$ with increased chord Reynolds number. As mentioned earlier, data at higher rotational speeds could not be obtained since the turbine torque near the maximum power output of the turbine

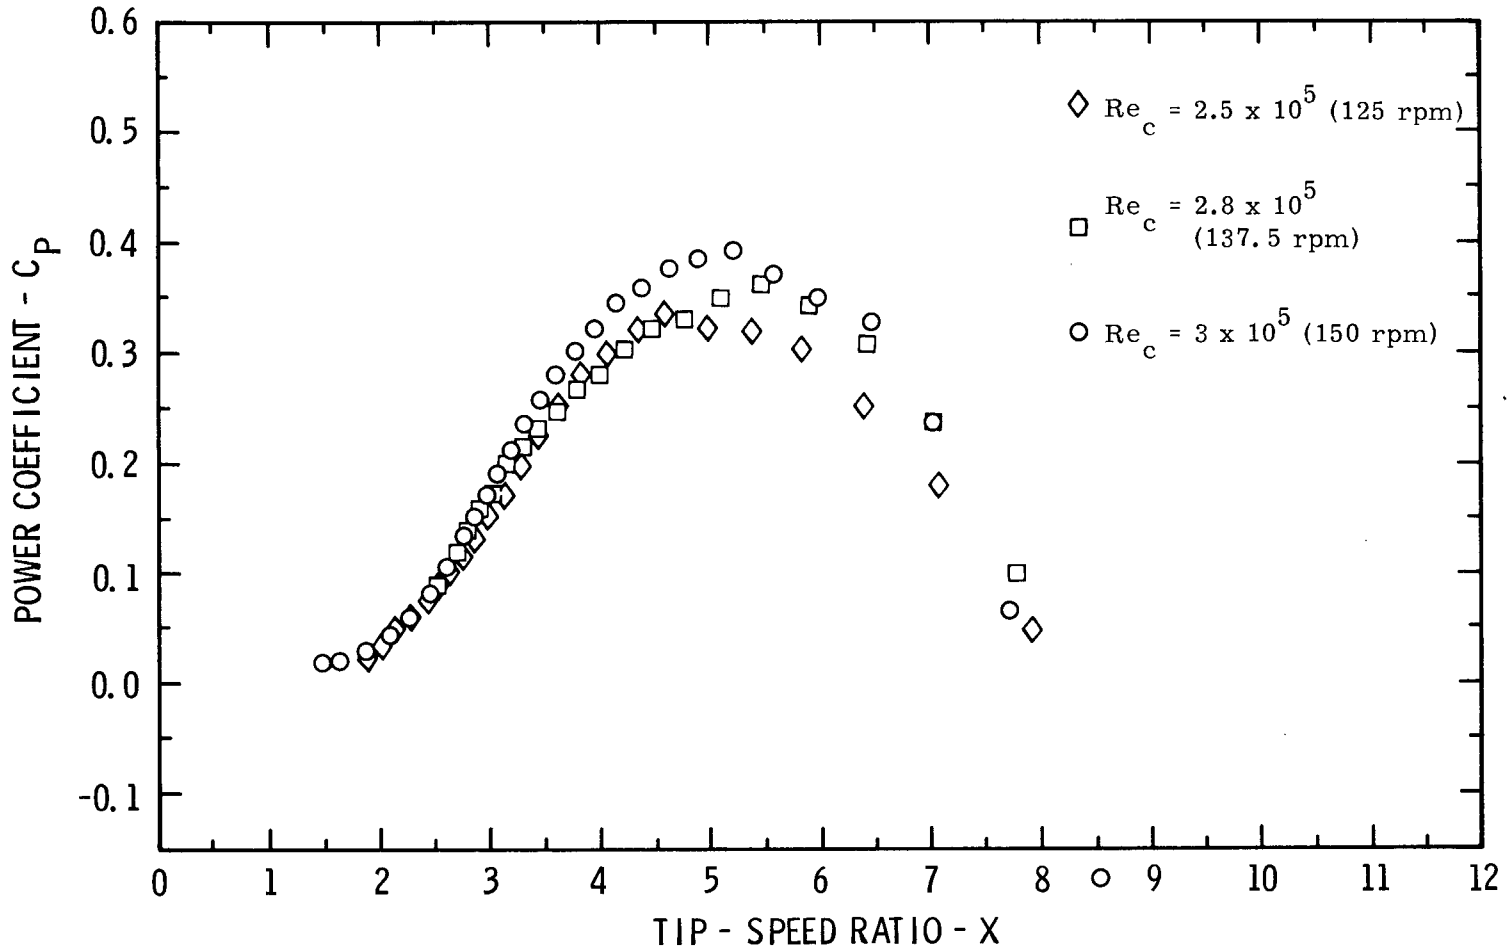


Figure 7. Power Coefficient, C_p , Performance Data for 5-Metre Turbine With Three Extruded NACA-0015 Blades at 125, 137.5, and 150 rpm

planned; however, at lower rotational speeds the two-bladed configuration entered a natural frequency regime which caused excessive vibration of the turbine; at rotational speeds in excess of 175 rpm, the turbine output again exceeded the torque limitation of the induction motor.

The wind velocities presented in all five data sets were obtained from anemometers located two turbine diameters away from the axis of rotation and at the turbine equator height. The usual winds at the turbine site are easterly or westerly, and the anemometers are located to the north and south of the turbine to minimize the influence of the turbine on the anemometers.² Data were not taken when the wind was not from the usual wind directions.

The power coefficients, C_p , for the three data sets of the three-bladed configuration are presented in Figure 7 as a function of the tip-speed ratio. It can be seen that with each increase in chord Reynolds number (rotational speed) there is a corresponding increase in maximum power coefficient. At a chord Reynolds number of 2.5×10^5 (125 rpm), the maximum C_p is 0.335; at $Re_c = 2.8 \times 10^5$ (137.5 rpm), $C_{p_{max}}$ is 0.360; at $Re_c = 3.0 \times 10^5$ (150 rpm), $C_{p_{max}}$ is 0.392. Run-away, the high tip-speed ratio at which no power is produced, occurs near the tip-speed ratio of 8 for all three rotational speeds. The power coefficients, K_p , are presented for the three-bladed configuration in Figure 8. This figure shows the inherent self regulation (K_p reaches a maximum value and does not continue to increase with increasing wind velocity) of a Darrieus turbine operating at a constant rotational speed with the maximum power coefficient, $K_{p_{max}}$, occurring between an advance ratio of 0.3 and 0.4. The value of $K_{p_{max}}$ increases with increasing chord Reynolds number as expected.

The power coefficients, C_p , for the two data sets of the two-bladed configuration are presented in Figure 9. The maximum power coefficients are lower than the three-bladed data as expected due to the lower solidity of the turbine with two blades.⁴ The K_p data presented in Figure 10 shows a large increase in $K_{p_{max}}$ with increased chord Reynolds number. As mentioned earlier, data at higher rotational speeds could not be obtained since the turbine torque near the maximum power output of the turbine

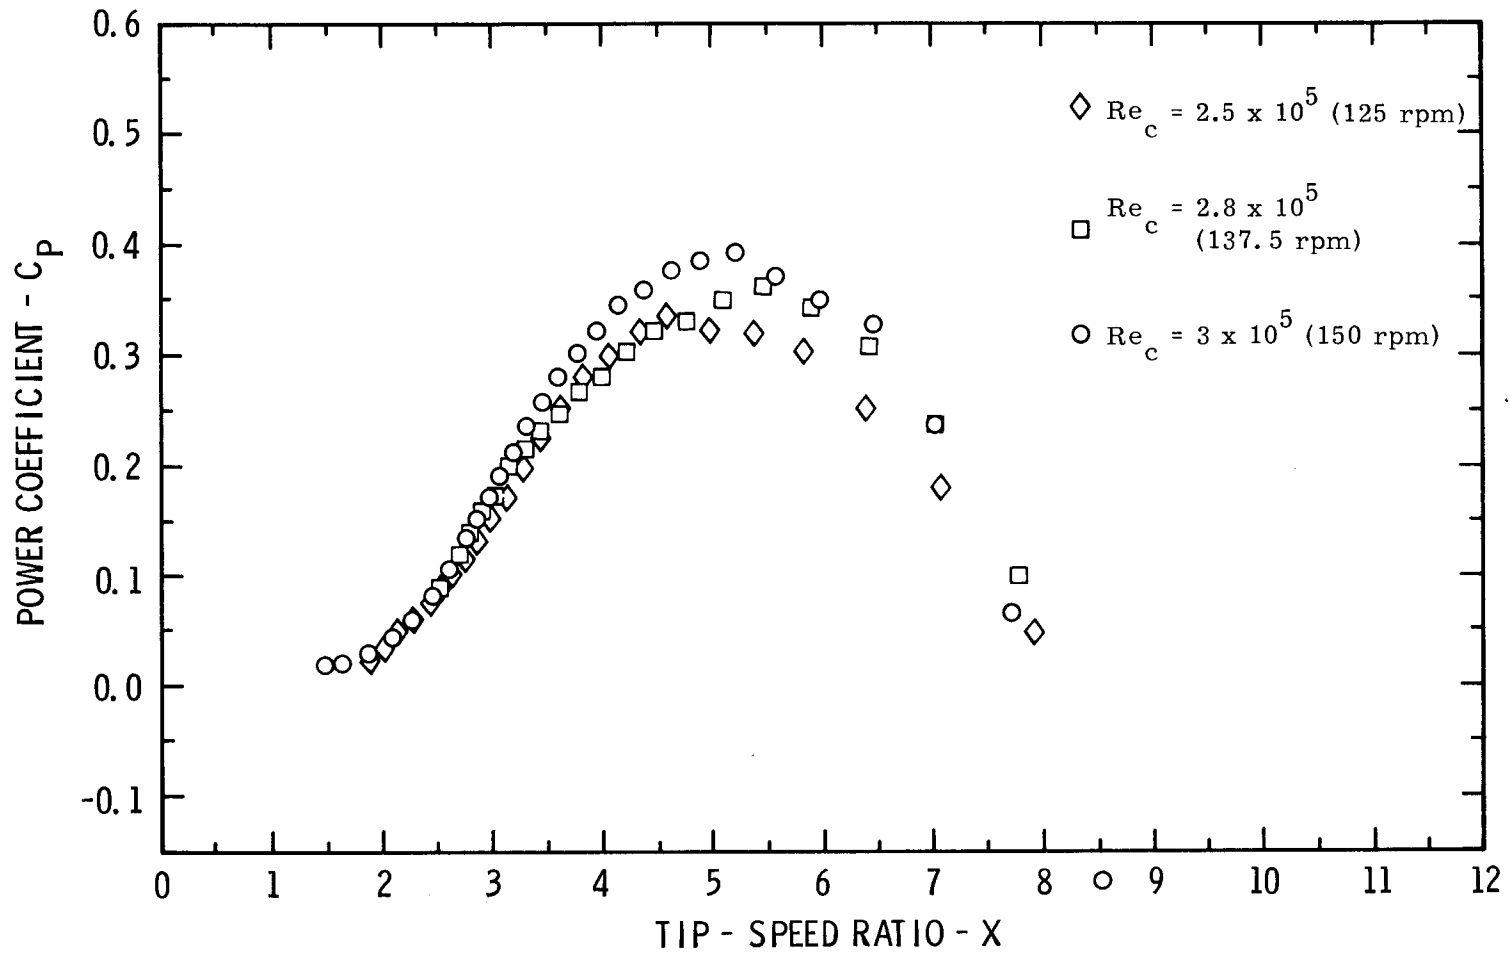


Figure 7. Power Coefficient, C_p , Performance Data for 5-Metre Turbine With Three Extruded NACA-0015 Blades at 125, 137.5, and 150 rpm

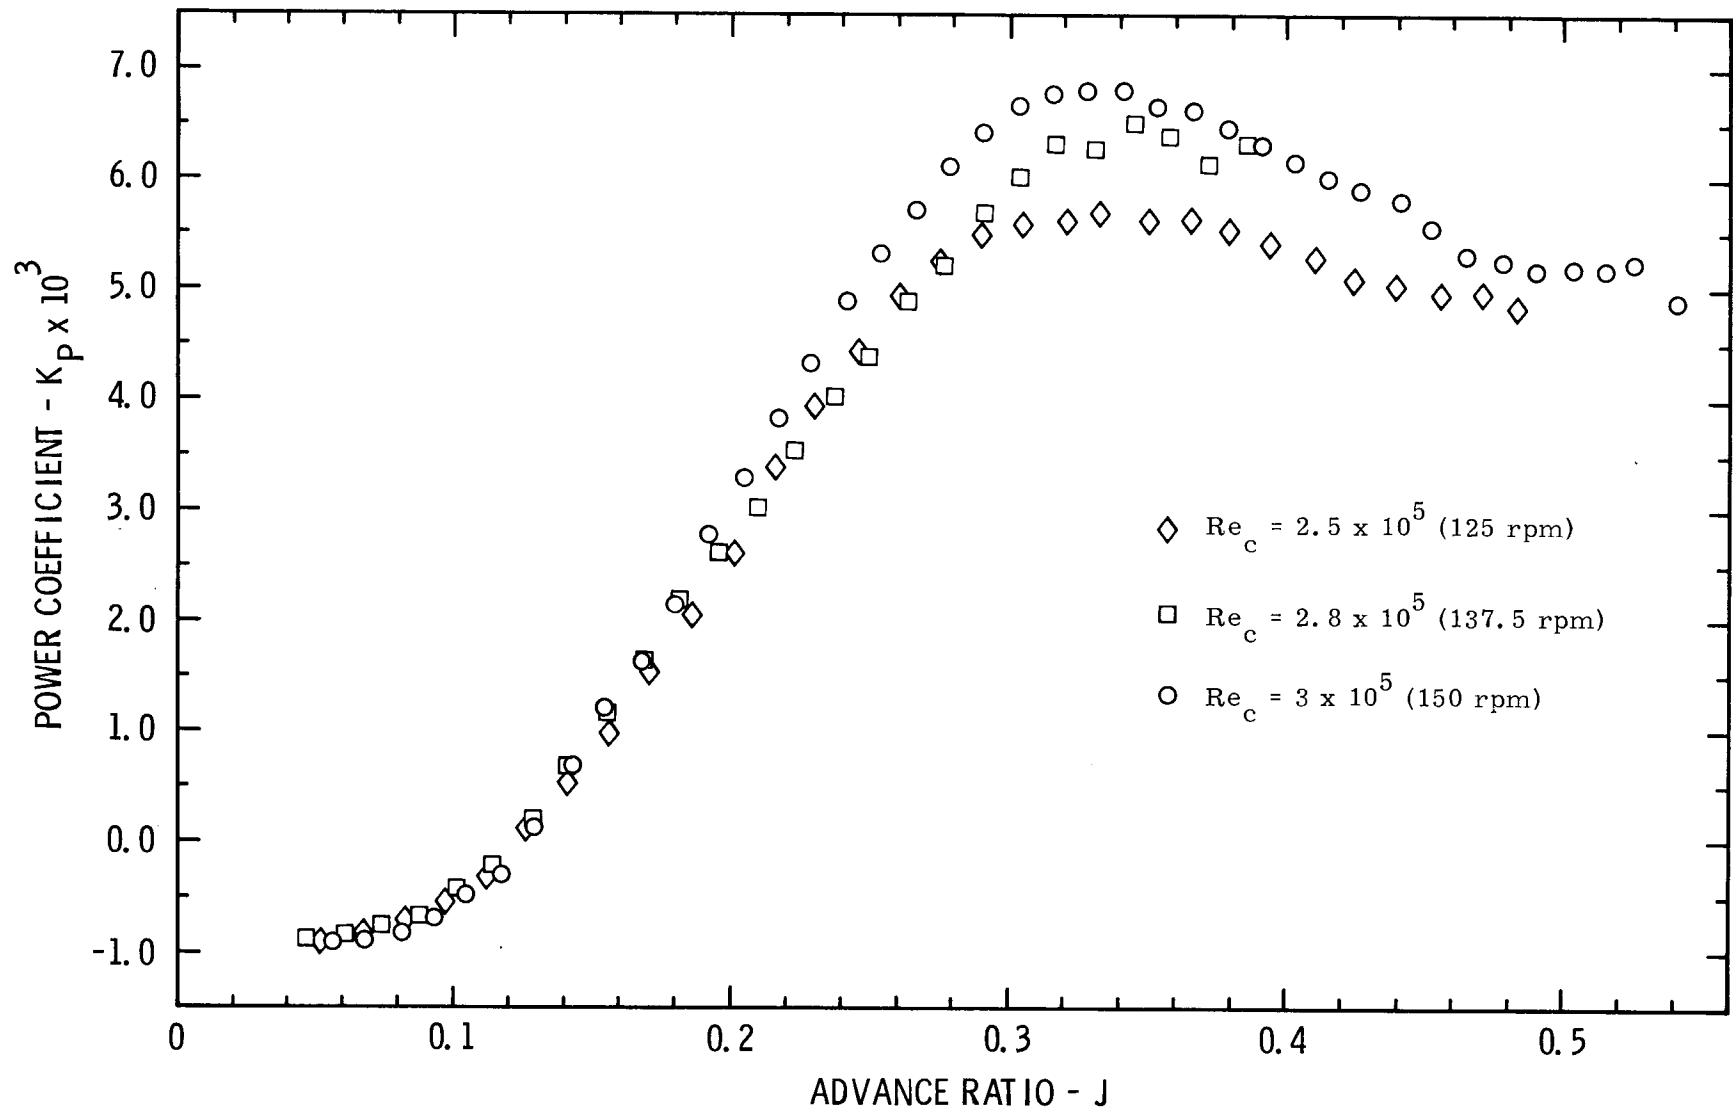


Figure 8. Power Coefficient, K_p , Performance Data for 5-Metre Turbine With Three Extruded NACA-0015 Blades at 125, 137.5, and 150 rpm

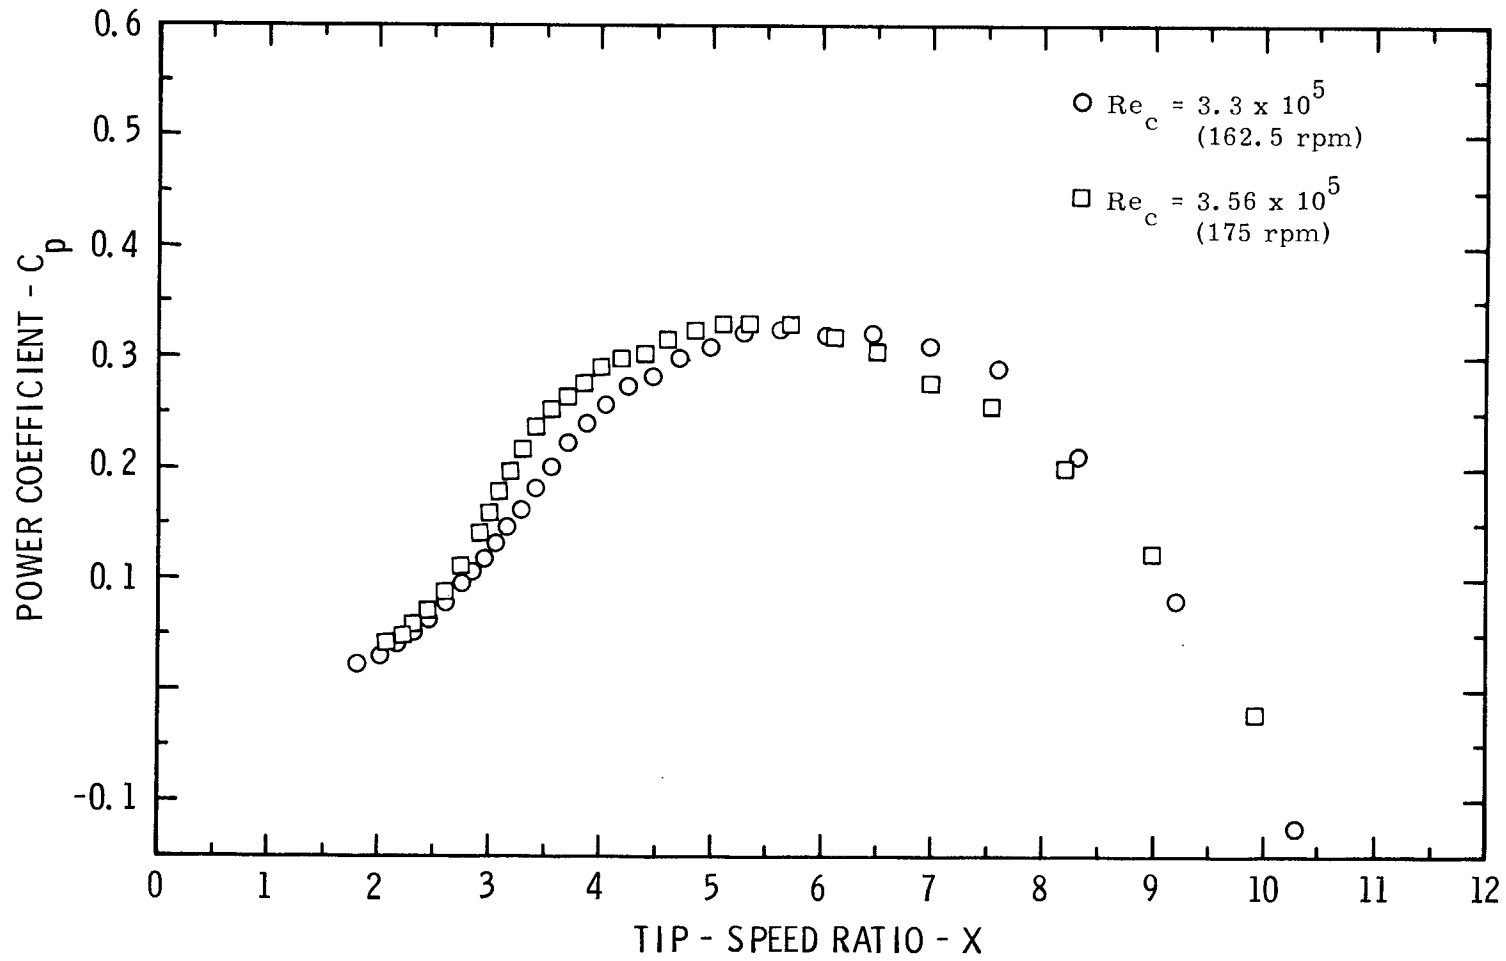


Figure 9. Power Coefficient, C_p , Performance Data of 5-Metre Turbine With Two Extruded NACA-0015 Blades at 162.5 and 175 rpm

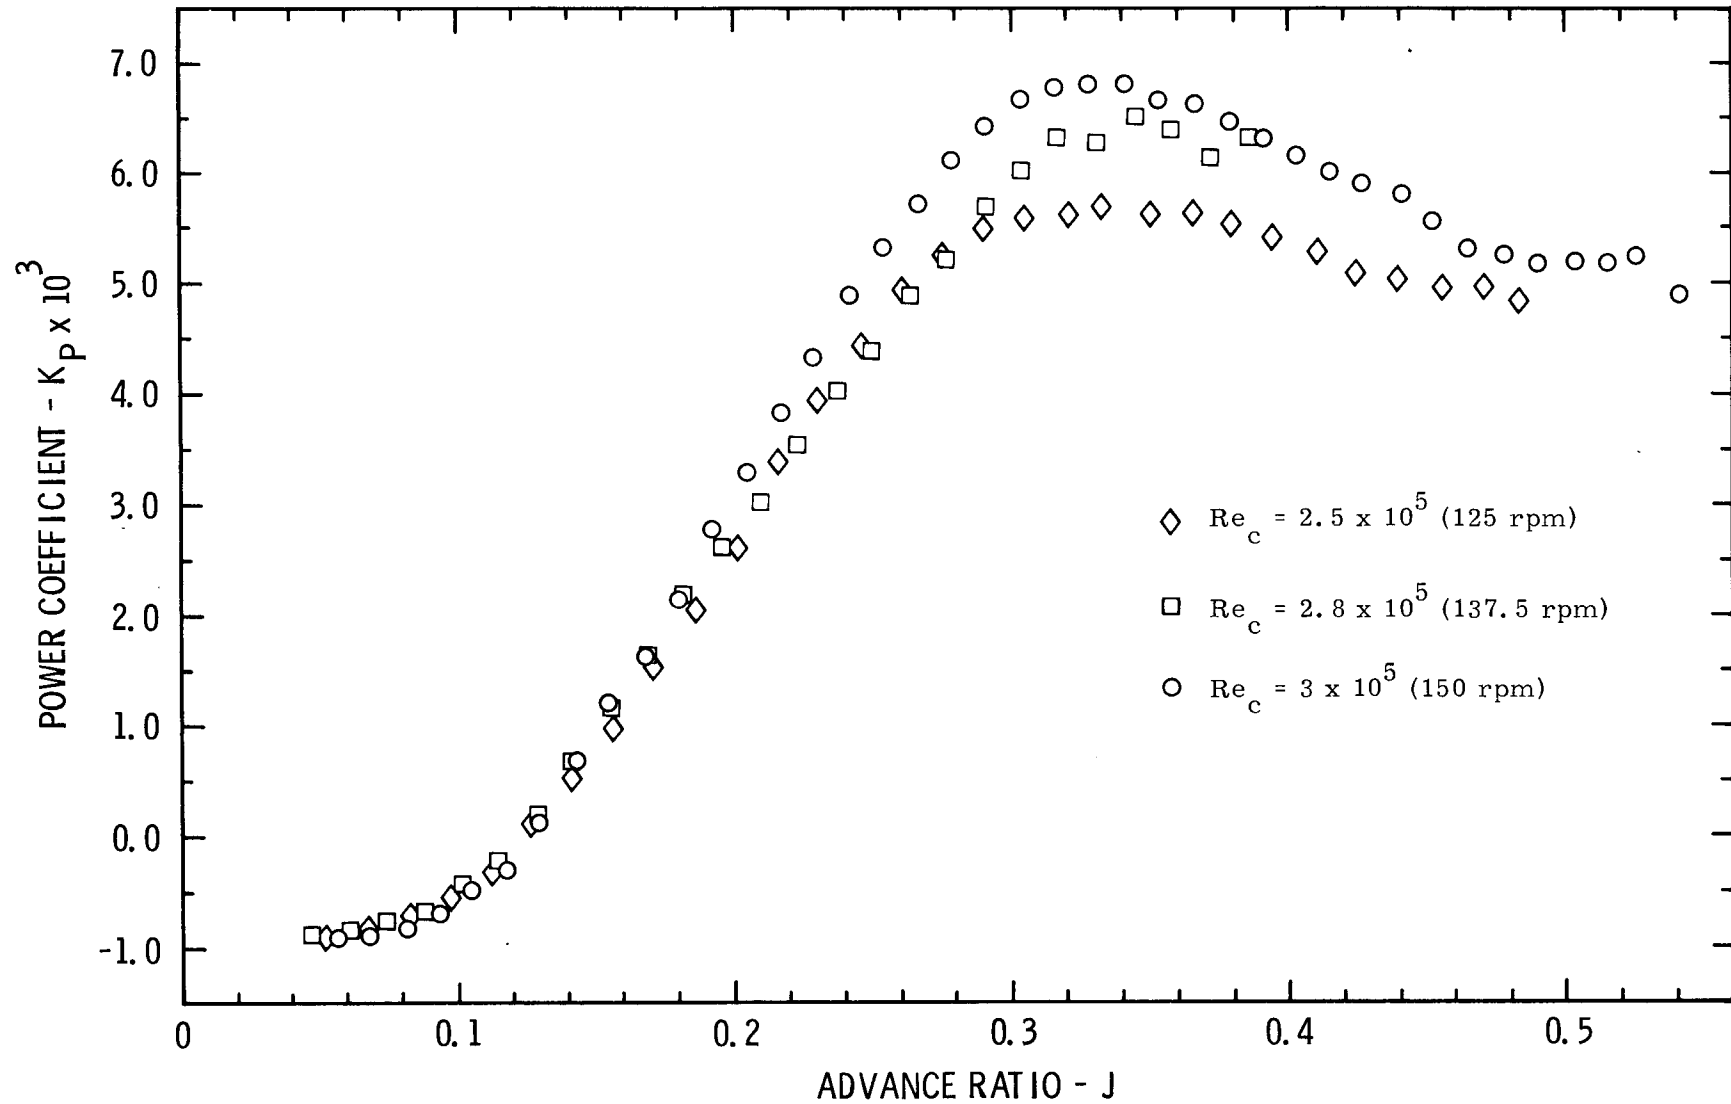


Figure 8. Power Coefficient, K_p , Performance Data for 5-Metre Turbine With Three Extruded NACA-0015 Blades at 125, 137.5, and 150 rpm

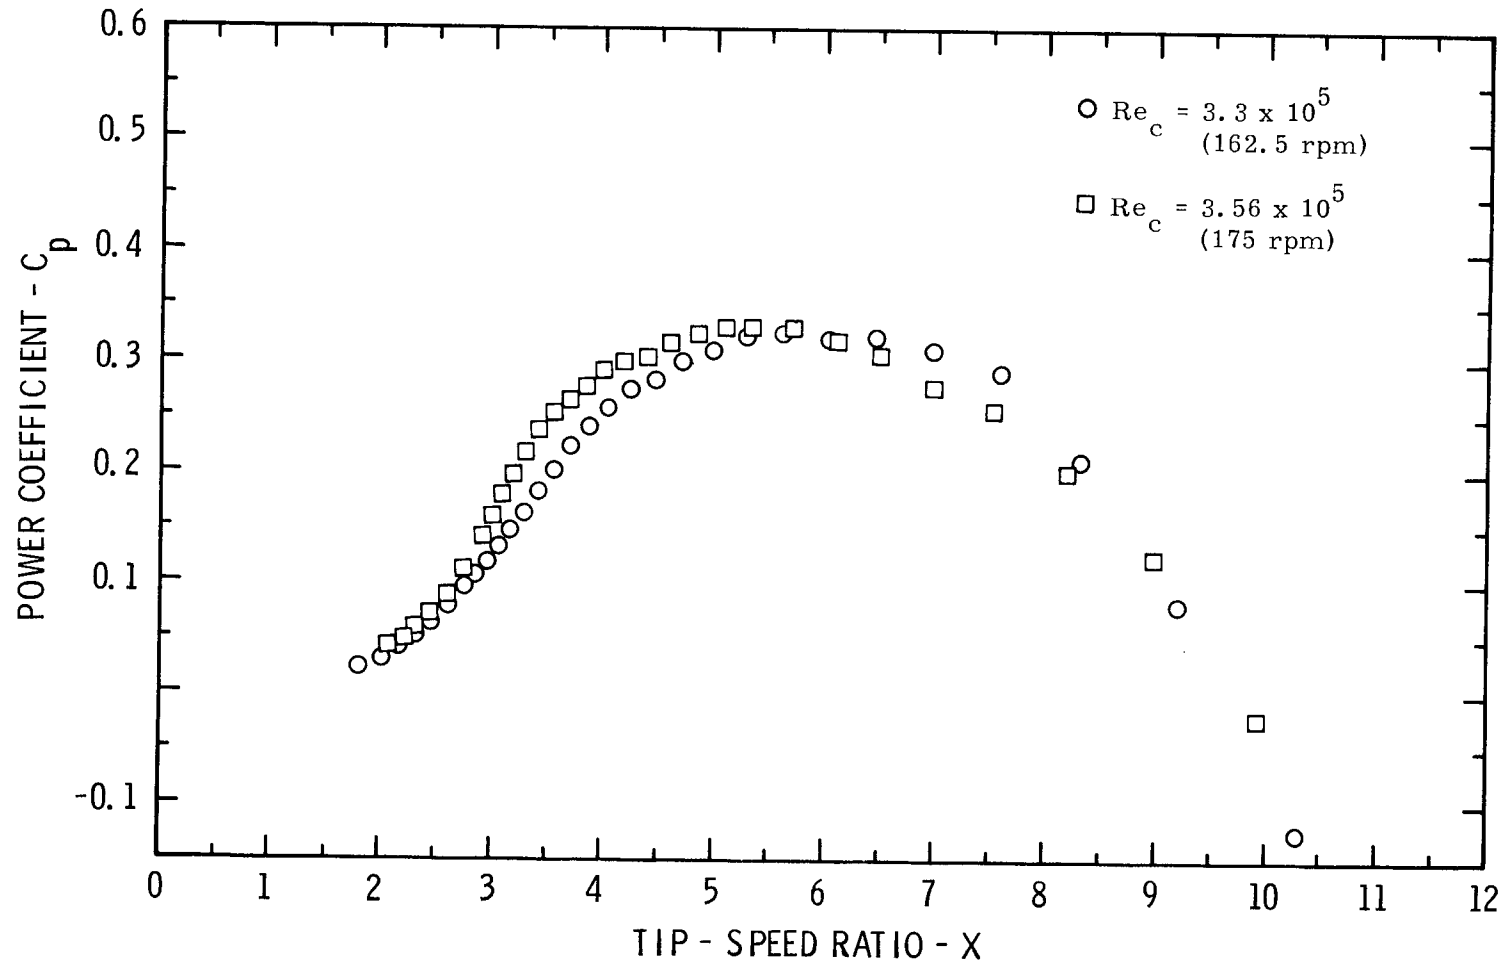


Figure 9. Power Coefficient, C_p , Performance Data of 5-Metre Turbine With Two Extruded NACA-0015 Blades at 162.5 and 175 rpm

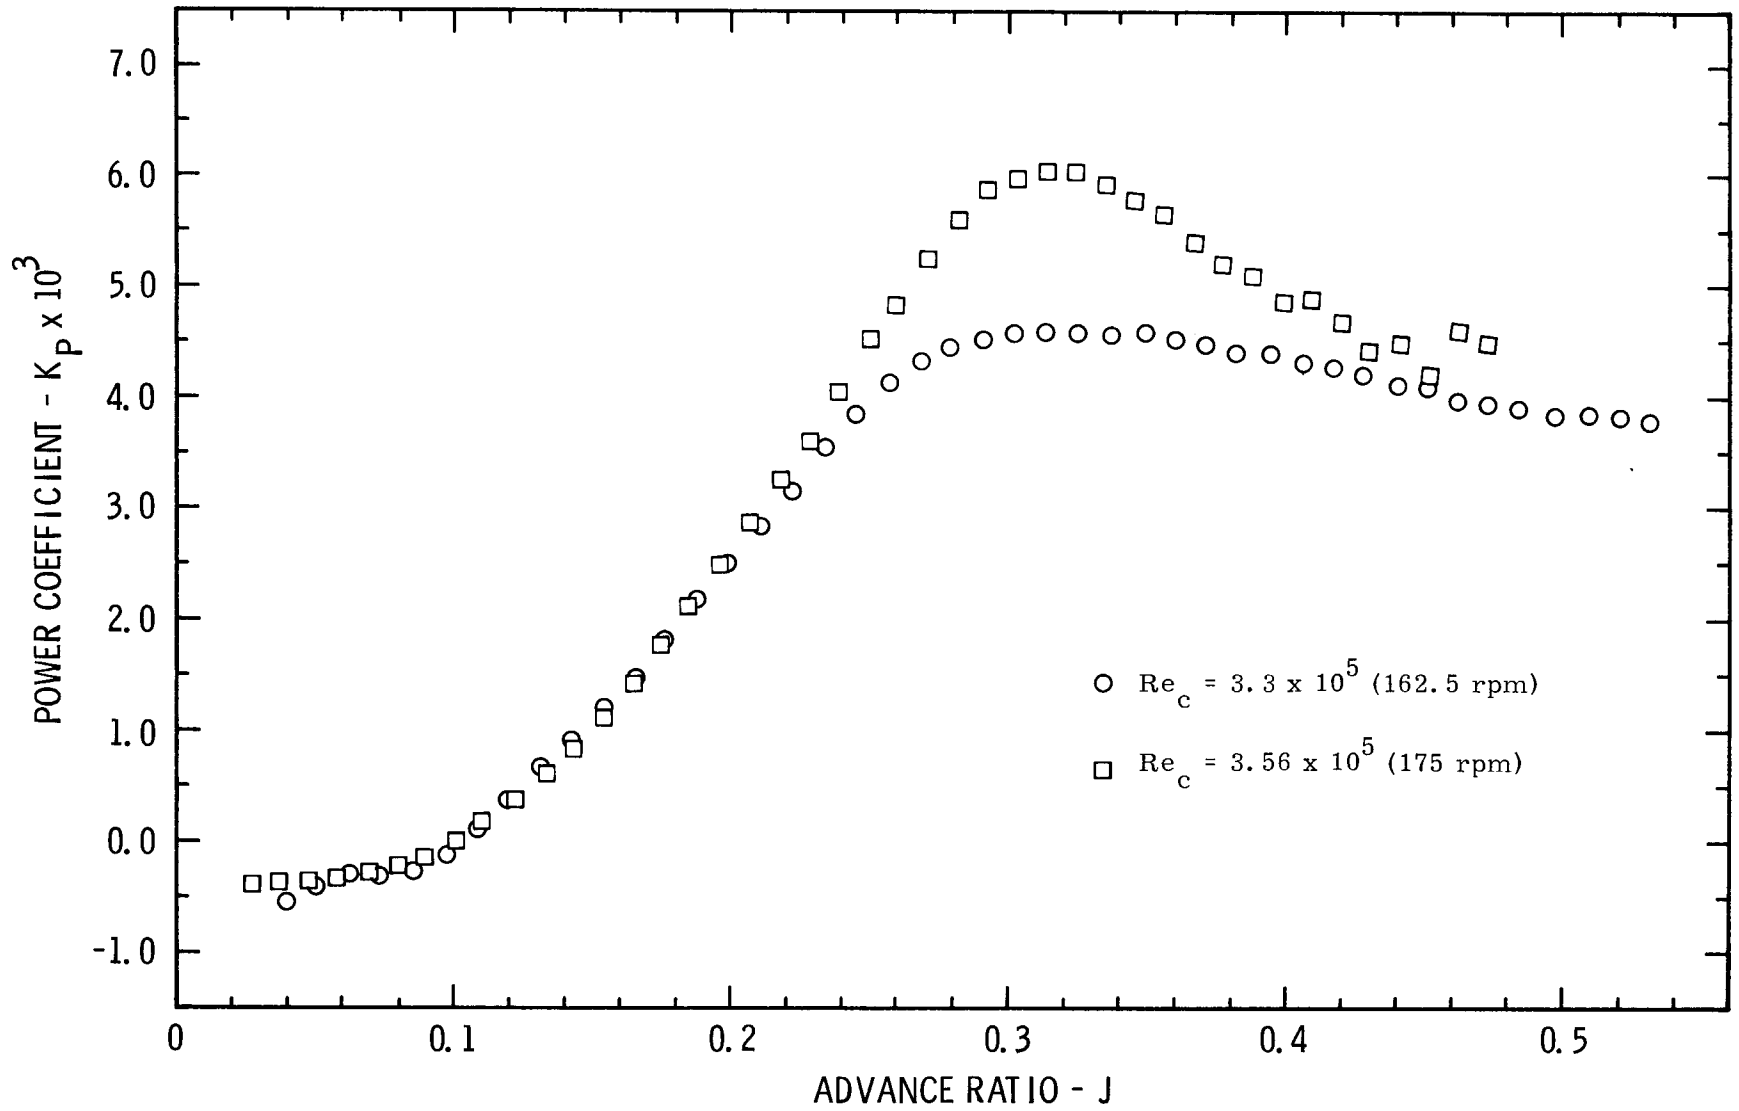


Figure 10. Power Coefficient, K_p , Performance Data of 5-Metre Turbine With Two Extruded NACA-0015 Blades at 162.5 and 175 rpm

exceeded the limitation of the induction motor. This allows the turbine to operate at higher rotational speeds than the synchronous speed which is input to the data reduction program as a constant value. It appears that even at the 175 rpm condition, the induction motor may have been operating with excessive slip. This has the effect of producing higher calculated values of K_p and lower calculated values of C_p because these values are normalized using rotational speeds lower than the actual rotational speed. Thus the large increase in $K_{p_{max}}$ for the 175 rpm condition and the almost insignificant increase in $C_{p_{max}}$ may be due to this excessive slip. This means the 175 rpm data should be used with reservation.

Figures 11 and 12 present the C_p and K_p comparisons between the new and the original blades at a rotational speed of 150 rpm. The improvement in performance is due to the elimination of the nonaerodynamic straight sections and associated knuckles of the original NACA-0012 blades and the better stall characteristics of the NACA-0015 airfoil. The data show an increase in $C_{p_{max}}$ of 44% (from 0.27 to 0.39) and an increase in $K_{p_{max}}$ of 62% (from 0.0042 to 0.0068).

One of the computational tools used at Sandia Laboratories to predict vertical-axis wind turbine performance is a program called VDART, a detailed description of which is found in Ref 15. Briefly, VDART is a vortex/lifting line representation of the turbine blades and the wake they generate. The blades are divided into segments, each of which is modeled by a single "bound" vortex which remains attached to the blade segment and a pair of "trailing" vortices at each of the segment's two extremities. These trailing vortices account for spanwise lift variations and are convected into the turbine wake. Also carried downstream of each segment are "shed" vortices which model timewise variations in the bound vorticity. The sum of velocities induced by the totality of the bound, trailing, and shed vortex systems plus that of the ambient stream define the aerodynamic flowfield. Once this is established at a given operating condition, the lift and drag of the blade segment is obtained with airfoil section data.

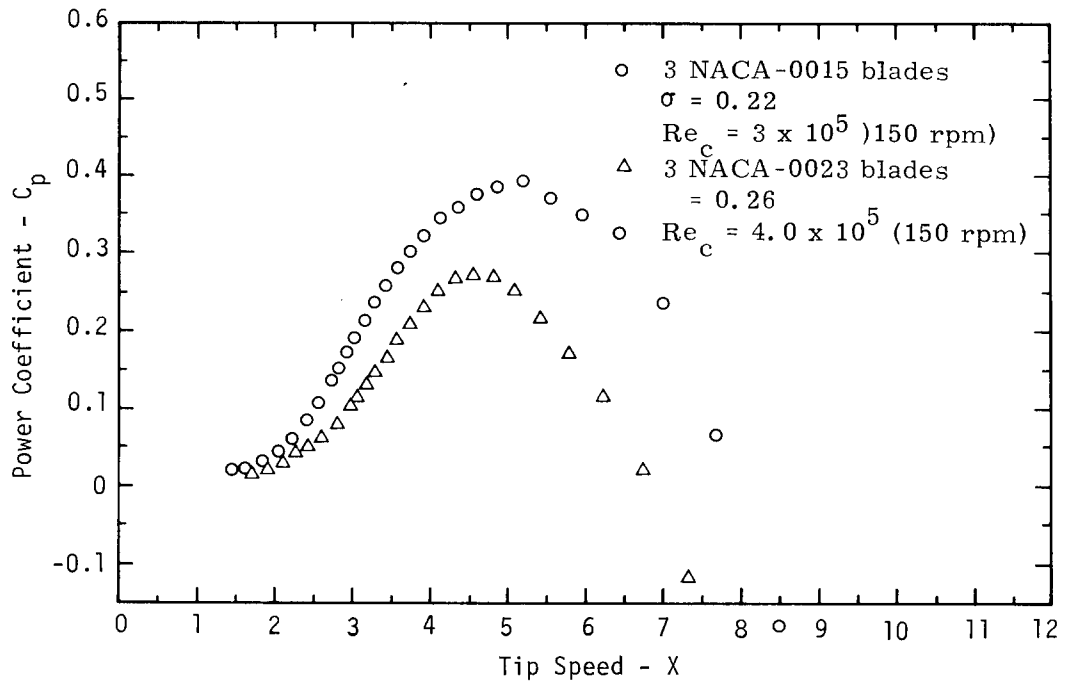


Figure 11. Comparison of the 150 rpm C_p Data Between Original Blade Performance and Extruded Blade Performance of the 5-Metre Turbine

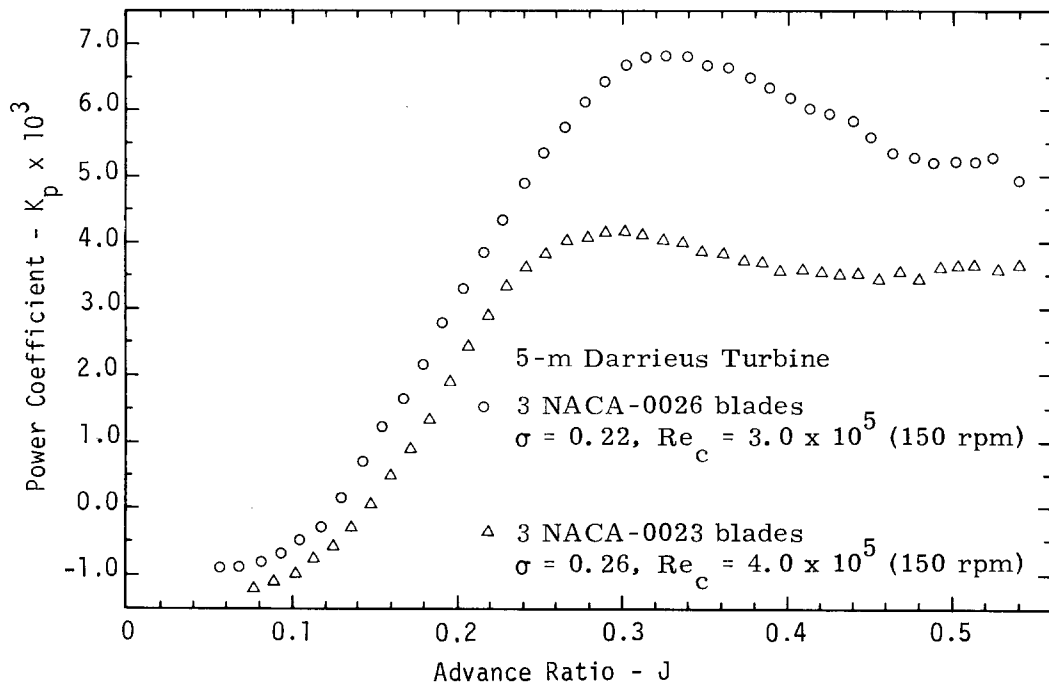


Figure 12. Comparison of the 150 rpm K_p Data Between Original Blade Performance and Extruded Blade Performance of the 5-Metre Turbine

A comparison of the two-bladed 162.5 rpm data with the results of the VDART code is shown in Figure 13. With the exception of the $X = 3$ point, agreement is quite good. This exception is believed due to the effects of dynamic stall. VDART computer solution convergence for values of $X > 8$ could not be achieved.

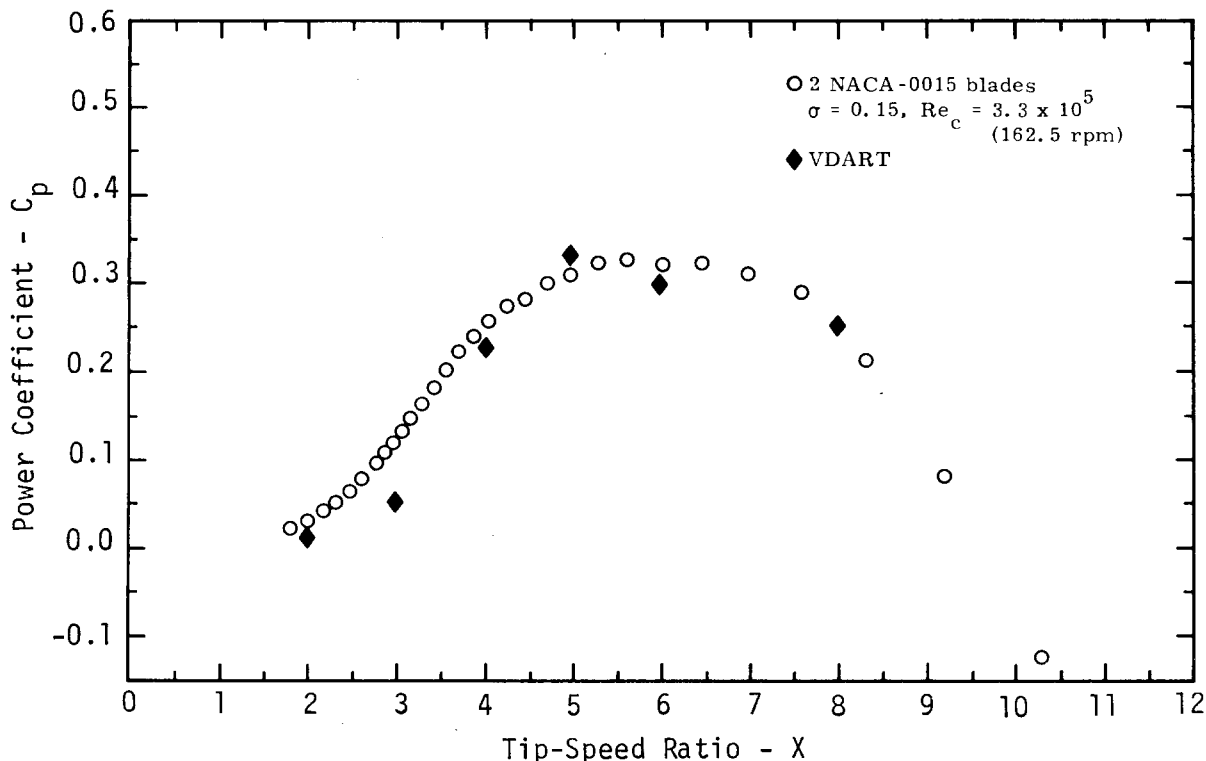


Figure 13. Comparison of Two-Bladed 5-Metre Turbine Performance Data With VDART Computer Program at 162.5 rpm

When the wind turbine is operated (powered) when there is no wind, a value for the zero wind drag coefficient C_{d_0} , can be determined. The value of C_{d_0} as a function of chord Reynolds number is a measure of the turbine's efficiency (high values of C_{d_0} result in low values of C_p). It is therefore of interest to compare the C_{d_0} 's of different configurations and also with the minimum drag of two-dimensional airfoils of the same cross section as the turbine blades. Under the no wind condition, the airfoils are always operating at a geometric angle-of-attack of zero degree. Migliore and Wolfe¹⁶ have shown that airfoils in curvilinear flow actually operate at a virtual angle-of-attack which is different from the geometric angle-of-attack. For the turbine this difference is dependent upon the

geometric angle-of-attack, the tip-speed ratio, the blade chord to turbine radius ratio, and the position of the blade in its orbit about the turbine axis. They also show that the effect is reduced for small chord to radius ratios. The chord-to-turbine maximum radius ratio for the 5-m turbine with the extruded blades is 0.067. This results in a virtual angle-of-attack of the order of one degree.¹⁵ This is small, and its effect will be considered insignificant in the calculation of C_{d_o} as a function of chord Reynolds number for the turbine.

A plot of zero-wind drag coefficients as a function of chord Reynolds number is presented in Figure 14. Shown in the figure are C_{d_o} curves for two-dimensional airfoils with the NACA-0012 and -0015 profiles obtained from Eppler's¹⁷ airfoil code, C_{d_o} data for a 2-m-diameter turbine with NACA-0012 blades, and C_{d_o} data for the 5-m turbine with the original NACA-0012 blades and the extruded NACA-0015 blades. The data for the 2-m turbine are shown here because they represent a large amount of data obtained under the most nearly ideal conditions and can be used as a basis for comparison purposes. These data were obtained during spin tests of the 2-m turbine in a large room with the laboratory instrumentation described in Ref 4. The C_{d_o} results of the 5-m turbine with its initial NACA-0012 blades (which performed below expectations) can be seen to be approximately 50% higher than the C_{d_o} 's obtained for the 2-m turbine. The 5-m turbine with the extruded aluminum NACA-0015 blades show a marked reduction of C_{d_o} with accompanying improved performance exhibited by these blades. The results are still higher than the two-dimensional airfoil data from the Eppler code, as can be expected since the chord Reynolds number which the data are plotted against is valid only for that portion of the blade at the turbine equator. The actual Reynolds number everywhere else on the blade is lower, and the accumulated effect of Reynolds number on the minimum drag coefficient (i.e., minimum drag increases with decreasing Reynolds number) can be seen.

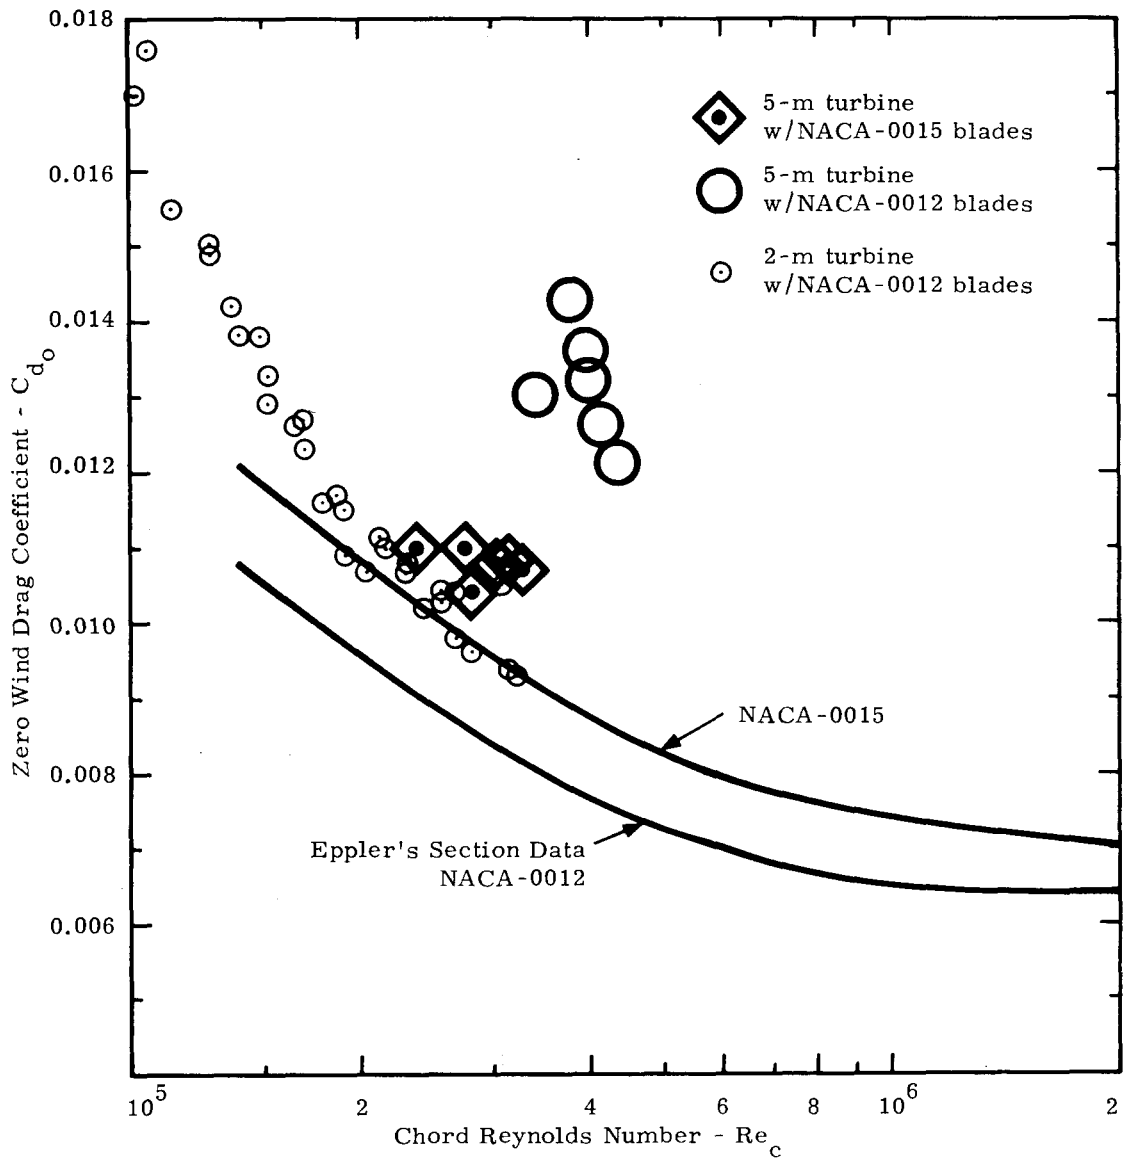


Figure 14. Zero Wind Drag Coefficient Data for Three Configurations of Vertical Axis Wind Turbine

Conclusions

The performance data for the 5-m turbine and the new one-piece extruded aluminum blades with the NACA-0015 airfoil cross section were obtained with the aid of a minicomputer and the computer program BINS. The data show the performance of these blades to be as anticipated and to be considerably improved over that of the original three-piece blades. The

highest performance was obtained with three blades at a rotational speed of 150 rpm and produced a $C_{p_{max}}$ of 0.392. This compares with a $C_{p_{max}}$ of 0.273 obtained with three blades at 150 rpm taken during earlier tests with the original three-piece blades. This 44% improvement agrees with wind tunnel data obtained with a 2-m turbine with similar 1-piece blades.

The data obtained at 162.5 rpm with two blades is compared with the results of the computer program VDART and found to be in agreement. VDART is the most sophisticated computer model of the vertical-axis wind turbine performance that is available to Sandia and is considered to offer the best results.

The one-piece extruded aluminum blades are more aerodynamically "clean" than the original three-piece blades, as indicated by the marked reduction of the C_{d_o} 's. This is in spite of the fact that the minimum drag for the NACA-0015 airfoil is slightly higher than the minimum drag for the NACA-0012 airfoil. The turbine with the new blades has demonstrated that the vertical-axis wind turbine can produce power coefficients in the range of 0.4. It is believed that this machine would have exceeded this value if it were not for the fact that the rotational speed of 150 rpm with three blades could not be exceeded due to torque limitations of the timing belts and induction motor.

References

¹B. F. Blackwell, The Vertical Axis Wind Turbine 'How it Works', SLA-74-0160 (Albuquerque: Sandia Laboratories, April 1974).

²R. E. Sheldahl and B. F. Blackwell, Free-Air Performance Tests of a 5-Metre Diameter Darrieus Turbine, SAND77-1063 (Albuquerque: Sandia Laboratories, December 1977).

³B. F. Blackwell and G. E. Reis, Blade Shape for a Troposkien Type of Vertical-Axis Wind Turbine, SLA-74-0154 (Albuquerque: Sandia Laboratories, April 1974).

⁴B. F. Blackwell, R. E. Sheldahl, and L. V. Feltz, Wind Tunnel Performance Data for the Darrieus Wind Turbine with NACA-0012 Blades, SAND76-0130 (Albuquerque: Sandia Laboratories, May 1976).

⁵B. F. Blackwell et al. "Engineering Development Status of the Darrieus Wind Turbine," Journal of Energy, Vol. I, No. 1, Jan-Feb 1977, pp 50-64.

⁶Proceedings of Vertical-Axis Wind Turbine Technology Workshop, SAND76-5586 (Albuquerque: Sandia Laboratories, May 1976).

⁷B. F. Blackwell and R. E. Sheldahl, "Selected Wind Tunnel Test Results for the Darrieus Wind Turbine," Journal of Energy, Vol. I, No. 6, Nov-Dec 1977, pp 382-386.

⁸P. C. Klimas and R. E. Sheldahl, Four Aerodynamic Prediction Schemes for Vertical-Axis Wind Turbines: A Compendium, SAND78-0014 (Albuquerque: Sandia Laboratories, June 1978).

⁹M. H. Worstell, Aerodynamic Performance of the 17-Metre-Diameter Darrieus Wind Turbine, SAND78-1737 (Albuquerque: Sandia Laboratories, January 1979).

¹⁰W. N. Sullivan, Economic Analysis of Darrieus Vertical Axis Wind Turbine Systems for the Generation of Utility Grid Electrical Power. Volume I - Executive Summary, SAND78-0962 (Albuquerque: Sandia Laboratories, August 1979).

¹¹W. N. Sullivan, Economic Analysis of Darrieus Vertical Axis Wind Turbine Systems for the Generation of Utility Grid Electrical Power. Volume II - The Economic Optimization Model, SAND78-0962 (Albuquerque: Sandia Laboratories, August 1979).

¹²R. D. Grover and E. G. Kadlec, Economic Analysis of Darrieus Vertical Axis Wind Turbine Systems for the Generation of Utility Grid Electrical Power. Volume III - Point Designs, SAND78-0962 (Albuquerque: Sandia Laboratories, August 1979).

¹³W. N. Sullivan and R. O. Nellums, Economic Analysis of Darrieus Vertical Axis Wind Turbine Systems for the Generation of Utility Grid Electrical Power. Volume IV - Summary and Analysis of the A. T. Kearney and Alcoa Laboratories Point Design Economic Studies, SAND78-0962 (Albuquerque: Sandia Laboratories, August 1979).

¹⁴R. E. Akins, Wind Characteristics at the VAWT Test Facility, SAND78-0760 (Albuquerque: Sandia Laboratories, September 1978).

¹⁵J. H. Strickland, B. T. Webster, and T. Nguyen, "A Vortex Model of the Darrieus Turbine: An Analytical and Experimental Study," ASME Paper No. 79-WA/FE-6 presented at the Winter Annual Meeting, New York, NY, December 2-7, 1979.

¹⁶P. G. Migliore and W. P. Wolfe, "Some Effects of Flow Curvature on the Performance of Darrieus Wind Turbines," AIAA Paper No. 79-0112, 17th Aerospace Sciences Meeting, New Orleans, LA, January 15-17, 1979.

¹⁷R. Eppler, "Turbulent Airfoils for General Aviation," Journal of Aircraft, Vol. 15, No. 2, pp 93-99, February 1978.

DISTRIBUTION:

DOE/TIC-4500 (Rev 67) UC-60 (338)

Aero Engineering Dept (2)
Wichita State University
Wichita, KS 67208
Attn: M. Snyder
W. Wentz

R. E. Akins, Assistant Professor
Dept of Engineering Science
and Mechanics
Virginia Polytechnic Institute
and State University
Blacksburg, VA 24060

Alcoa Labs (5)
Alcoa Technical Center
Aluminum Company of America
Alcoa Center, PA 15069
Attn: D. K. Ai
A. G. Craig
J. T. Hugng
J. R. Jombock
P. N. Vosburgh

Dynergy Corp
P.O. Box 428
1269 Union Ave.
Laconia, NH 03246
Attn: R. B. Allen,
General Manager

American Wind Energy Assn
54468 CR31
Bristol, IN 46507

South Dakota School of Mines
and Technology
Dept of Mechanical
Engineering
Rapid City, SD 57701
Attn: E. E. Anderson

University of Vermont
318 Millis Hall
Burlington, VT 05405
Attn: S. Anderson

DOE/Office of Commercialization
20 Massachusetts Ave. NW
Mail Station 2221C
Washington, DC 20585
Attn: G. T. Ankrum

Stanford University
Dept of Aeronautics and
Astronautics Mechanical
Engineering
Stanford, CA 94305
Attn: H. Ashley

Consolidated Edison Company of
New York, Inc
4 Irving Place
New York, NY 10003
Attn: K. Austin

Washington State University
Dept of Electrical
Engineering
College of Engineering
Pullman, WA 99163
Attn: F. K. Bechtel

Arizona State University
Solar Energy Collection
University Library
Tempe, AZ 85281
Attn: M. E. Beecher

University of Oklahoma
Aero Engineering Dept
Norman, OK 73069
Attn: K. Bergey

Wind Energy Systems
Route 1, Box 93-A
Oskaloosa, KS 66066
Attn: S. Blake

McDonnell-Douglas
P.O. Box 516
Dept 241, Bldg 32
St. Louis, MO 63166
Attn: R. Brulle

DISTRIBUTION: (cont)

University of Sherbrooke
Sherbrooke, Quebec
CANADA J1K 2R1
Attn: R. Camerero,
Faculty of Applied Science

CERCEM
49 Rue du Commandant Rolland
93350 Le Bourget
FRANCE
Attn: G. Darrieus
J. Delassus

University of Auckland
School of Engineering
Private Bag
Auckland, NEW ZEALAND
Attn: V. A. L. Chasteau

McDonnell Aircraft Corp
P.O. Box 516
Department 337, Bldg 32
St. Louis, MO 63166
Attn: H. T. Clark

USDA, Agricultural Research
Service
Southwest Great Plains Research
Center
Bushland, TX 79012
Attn: R. N. Clark

State of New York
Executive Dept
State Consumer Protection Board
99 Washington Ave.
Albany, NY 12210
Attn: J. D. Cohen,
Consumer Outreach
Coordinator

University of Massachusetts
Mechanical and Aerospace
Engineering Dept
Amherst, MA 01003
Attn: D. E. Cromack,
Associate Professor

Curtis Associates
2345 Academy Place
P.O. Box 7737
Colorado Springs, CO 80933
Attn: G. B. Curtis

DOE/ALO (3)
Albuquerque, NM 87185
Attn: G. T. Tennyson
D. C. Graves
D. W. King

DOE Headquarters (20)
Washington, DC 20545
Attn: L. V. Divone, Chief
Wind Systems Branch
D. F. Ancona, Program Manager
Wind Systems Branch

Southern Illinois University
School of Engineering
Carbondale, IL 62901
Attn: C. W. Dodd

Dominion Aluminum Fabricating Ltd (2)
3570 Hawkestone Rd
Mississauga, Ontario
CANADA L5C 2U8
Attn: L. Schienbein
C. Wood

Hamilton Standard
1730 NASA Blvd
Rm 207
Houston, TX 77058
Attn: D. P. Dougan

Nederlands Energy Research
Foundation (E.C.N.)
Physics Dept
Westerduinweg 3 Patten (nh)
THE NETHERLANDS
Attn: J. B. Dragt

Battelle-Pacific Northwest Lab
P.O. Box 999
Richland, WA 99352
Attn: C. E. Elderkin

DISTRIBUTION: (cont)

The Mitre Corp
1820 Dolley Madison Blvd
McLean, VA 22102
Attn: F. R. Eldridge, Jr.

Electric Power Research Institute
3412 Hillview Ave.
Palo Alto, CA 9434
Attn: E. Demeo

Dept of Aerospace
Engineering Sciences
University of Colorado
Boulder, CO 80309
Attn: J. D. Fock, Jr

Public Service Co of
New Hampshire
1000 Elm St
Manchester, NH 03105
Attn: L. C. Frederick

Amarillo College
Amarillo, TX 79100
Attn: E. Gilmore

Wind Power Digest
P.O. Box 539
Harrisburg, PA 17108
Attn: P. Gipe

University College of Swansea
Dept of Mechanical Engineering
Singleton Park
Swansea SA2 8PP
UNITED KINGDOM
Attn: R. T. Griffiths

Massachusetts Institute of Technology
77 Massachusetts Ave.
Cambridge, MA 02139
Attn: N. D. Ham

DOE/DST
20 Massachusetts Ave.
Washington, DC 20545
Attn: S. Hansen

Wind Engineering Corp
Airport Industrial Area
Box 5936
Lubbock, TX 79415
Attn: C. F. Harris

Aero/Astro Dept
Massachusetts Institute of
Technology
Cambridge, MA 02139
Attn: W. L. Harris

Rocky Flats Plant (2)
P.O. Box 464
Golden, CO 80401
Attn: T. Healy

Helion
P.O. Box 4301
Sylmar, CA 91342

AMBIO
KVA
Fack, S-10405
Stockholm
SWEDEN
Attn: D. Hinrichsen
Associate Editor

S. Hugosson
Box 21048
S. 100 31 Stockholm 21
SWEDEN

Ben-Gurion University of the Negev
Dept of Mechanical Engineering
Beer-Sheva, ISRAEL.
Attn: O. Igra

Indian Oil Corp Ltd
Marketing Division
254-C, Dr. Annie Bisant Rd
Pralhadevi, Bombay-400025
INDIA

JBF Scientific Corp
2 Jewel Dr
Wilmington, MA 01887
Attn: E. E. Johanson

DISTRIBUTION: (cont)

Kansas State University
Electrical Engineering Dept
Manhattan, KS 66506
Attn: G. L. Johnson, P.E.

Stanford University
Dept of Mechanical Engineering
Stanford, CA 94305
Attn: J. P. Johnston

Kaman Aerospace Corp
Old Windsor Rd
Bloomfield, CT 06002
Attn: W. Batesol

The College of Trades and
Technology
P.O. Box 1693
Prince Philip Dr
St. John's NEWFOUNDLAND
A1C 5P7
Attn: R. E. Kelland

L. Kinnett
P.O. Box 6593
Santa Barbara, CA 93111

Michigan State University
Division of Engineering Research
East Lansing, MI 48824
Attn: O. Krauss

Lawrence Livermore Lab
P.O. Box 808 L-340
Livermore, CA 94550
Attn: D. W. Dorn

Public Service Company of NM
P.O. Box 2267
Albuquerque, NM 87103
Attn: M. Lechner

UNM/CERF
P.O. Box 188
University Station
Albuquerque, NM 87131
Attn: G. G. Leigh

Mill Products Division
Reynolds Metals Co
6601 West Eroad St
Richmond, VA 23261
Attn: George E. Lennox,
Industry Director

State Energy Commission
Research and Development Division
1111 Howe Ave.
Sacramento, CA 95825
Attn: J. Lerner

Agriculture Research Center
USDA
Beltsville, MD 20705
Attn: L. Liljidahll,
Bldg 303

Aeroenvironment, Inc
660 South Arroyo Parkway
Pasadena, CA 91105
Attn: P. B. S. Lissaman

FFA, The Aeronautical Research
Institute
Box 11021
S-16111 Bromma
SWEDEN
Attn: Olle Ljungstrom

Los Alamos Scientific Lab
P.O. Box 1663
Los Alamos, NM 87544
Attn: J. D. Balcomb Q-DO-T
Library

PRC Energy Analysis Co
7600 Old Springhouse Rd
McLean, VA 22101
Attn: E. L. Luther,
Senior Associate

L. H. J. Maile
48 York Mills Rd
Willowdale, Ontario
CANADA M2P 1B4

DISTRIBUTION: (cont)

Ford Motor Co
Environmental and Safety
Engineering Staff
The American Rd
Dearborn, MI 48121
Attn: J. R. Maroni,
Environmental Research and
Energy Planning Director

Dardalen Associates
15110 Frederick Rd
Woodbine, MD 21797
Attn: F. Matanzo

Tumac Industries, Inc
650 Ford St
Colorado Springs, CO 80915
Attn: P. R. McConnell

Kaman Sciences Corp
P.O. Box 7463
Colorado Springs, CO 80933
Attn: J. Meiggs

Colorado State University
Dept of Civil Engineering
Fort Collins, CO 80521
Attn: M. N. Meroney

Dept of Economic Planning
and Development
Barrett Bldg
Cheyenne, WY 82002
Attn: G. N. Monsson

NASA Lewis Research Center (2)
21000 Brookpark Rd
Cleveland, OH 44135
Attn: J. Savino, MS 509-201
R. L. Thomas
W. Robbins
R. Kaza, MS 49-6

West Texas State University
Dept of Physics
P. O. Box 248
Canyon, TX 79016
Attn: V. Nelson

Natural Power, Inc
New Boston, NH 03070
Attn: L. Nichols

Oklahoma State University (2)
Stillwater, OK 76074
Attn: W. L. Hughes,
EE Dept
D. K. McLaughlin,
ME Dept

Oregon State University (2)
Corvallis, OR 97331
Attn: R. Wilson,
ME Dept
R. W. Thresher,
ME Dept

Precinct 4
County Commissioner
City-County Bldg
El Paso, TX 79901
Attn: P. F. O'Rourke

Dow Chemical USA
Research Center
2800 Mitchell Dr
Walnut Creek, CA 94598
Attn: H. H. Paalman

Northwestern University
Dept of Civil Engineering
Evanston, IL 60201
Attn: R. A. Parmelee

Riso National Lab
DK-4000 Roskilde
DENMARK
Attn: H. Petersen

Commonwealth Scientific and Industrial
Research Organization
Graham Rd, Highett
Victoria, 3190
AUSTRALIA
Attn: B. Rawlings, Chief
Division of Mechanical Engineering

DISTRIBUTION: (cont)

The University of Tennessee
Dept of Electrical Engineering
Knoxville, TN 37916
Attn: T. W. Reddoch
Associate Professor

Memorial University of Newfoundland
Faculty of Engineering and
Applied Sciences
St. John's Newfoundland
CANADA A1C 5S7
Attn: A. Robb

Institut fur Leichtbau
Technische Hochschule Aachen
Wullnerstrasse 7
GERMANY
Attn: I. H. Ruscheweyh

National Atomic Museum
Albuquerque, NM 87185
Attn: G. Schreiner,
Librarian

Technion-Israel Institute of
Technology
Dept of Aeronautical
Engineering
Haifa, ISRAEL
Attn: A. Seginer,
Professor of Aerodynamics

Dipl.-Phys.
Wehrtechnik und Energieforschung
ERNO-Raumfahrttechnik GmbH
Hunefeldstr. 1-5
Postfach 10 59 09
2800 Bremen 1
GERMANY
Attn: H. Selzer

Bristol Aerospace Ltd
P.O. Box 874
Winnipeg, Manitoba
CANADA R3C 2S4
Attn: H. Sevier,
Rocket and Space Division

Aerodynamics Division
National Aeronautical Lab
Bangalore 560017
INDIA
Attn: P. N. Shankar

Kingston Polytechnic
Canbury Park Rd
Kingston, Surrey
UNITED KINGDOM
Attn: D. Sharpe

Cornell University
Sibley School of Mechanical and
Aerospace Engineering
Ithaca, NY 14853
Attn: D. G. Shepherd

Colorado State University
Mechanical Engineering Dept
Ft. Collins, CO 80521
Attn: F. Smith, Dept Head

Instituto Tecnológico Costa Rica
Apartado 159 Cartago
COSTA RICA
Attn: K. Smith

Iowa State University
Agricultural Engineering, Room 213
Ames, IA 50010
Attn: L. H. Soderholm

Southwest Research Institute (2)
P.O. Drawer 28501
San Antonio, TX 78284
Attn: W. L. Donaldson,
Senior Vice President
R. K. Swanson

R. Stevenson
Route 2
Box 85
Springfield, MO 65802

Morey/Stjernholm and Associates
1050 Magnolia St
Colorado Springs, CO 80907
Attn: D. T. Stjernholm, P.E.
Mechanical Design Engineer

DISTRIBUTION: (cont)

G. W. Stricker
383 Van Gordon 30-559
Lakewood, CO 80228

C. J. Swet
Route 4
Box 358
Mt. Airy, MD 21771

NRC-National Aeronautical
Establishment (3)
Ottawa 7, Ontario
CANADA K1A 0R6
Attn: R. J. Templin,
Low Speed Aerodynamics
Section

Texas Tech University (3)
P.O. Box 4289
Lubbock, TX 79409
Attn: K. C. Mehta,
CE Dept
J. Stickland
ME Dept
J. Lawrence
ME Dept

Atari, Inc
155 Moffett Park Dr
Sunnyvale, CA 94086
Attn: F. Thompson

United Engineers and Constructors, Inc
Advanced Engineering Dept
30 South 17th St
Philadelphia, PA 19101
Attn: A. J. Karalis

University of New Mexico (2)
Albuquerque, NM 87106
Attn: K. T. Feldman,
Energy Research Center
V. Sloglund,
ME Dept

Eolienne experimentale
C.P. 279, Cap-aux-Meules
Iles de la Madeleine, Quebec
CANADA
Attn: J. Vacek

Solar Energy Research Institute
1617 Cole Blvd
Golden, CO 80401
Attn: I. E. Vas

National Aerospace Lab
Anthony Fokkerweg 2
Amsterdam 1017
THE NETHERLANDS
Attn: O. de Vries

West Virginia University
Dept of Aero Engineering
1062 Kountz Ave.
Morgantown, WV 26505
Attn: R. Walters

Bonneville Power Administration
P.O. Box 3621
Portland, OR 97225
Attn: E. J. Warchol

ERA Ltd
Cleeve Rd
Leatherhead
Surrey KT22 7SA
ENGLAND
Attn: D. F. Warne, Manager
Energy and Power Systems

Stanford University
546B Crothers Memorial Hall
Stanford, CA 94305
Attn: R. A. Watson

Watson Bowman Associates, Inc
1280 Niagara St
Buffalo, NY 14213
Attn: R. J. Watson

Tulane University
Dept of Mechanical Engineering
New Orleans, LA 70018
Attn: R. G. Watts

Solar Energy Research Institute
1536 Cole Blvd
Golden, CO 80401
Attn: P. Weis

DISTRIBUTION: (cont)

Mississippi State University
Mechanical Engineering Dept
Mississippi State, MS 39762
Attn: W. G. Wells, P.E.
Associate Professor

University of Alaska
Geophysical Institute
Fairbanks, AK 99701
Attn: T. Wentink, Jr

West Texas State University
Government Depository Library
Number 613
Canyon, TX 79015

Wind Energy Report
Box 14
104 S. Village Ave.
Rockville Centre, NY 11571
Attn: F. S. Seiler

Central Solar Energy Research
Corp
1200 Sixth St
328 Executive Plaza
Detroit, MI 48226
Attn: R. E. Wong,
Assistant Director

400 C. Winter
1000 G. A. Fowler
1200 L. D. Smith
3161 J. E. Mitchell (15)
3161 P. S. Wilson
4533 J. W. Reed
4700 J. H. Scott
4710 G. E. Brandvold
4715 R. H. Braasch (100)
4715 R. D. Grover
4715 E. G. Kadlec
4715 M. T. Mattison
4715 R. O. Nellums
4715 W. N. Sullivan
4715 M. H. Worstell
5000 J. K. Galt
5520 T. B. Lane
5521 D. W. Lobitz
5523 R. C. Reuter, Jr
5523 T. G. Carne
5600 D. B. Schuster

5610 A. A. Lieber
5620 M. M. Newsom
5624 E. C. Rightly
5624 L. V. Feltz
5630 R. C. Maydew
5632 C. W. Peterson
5632 P. C. Klimas (25)
5632 P. R. Schatzle
5633 S. McAlees, Jr
5633 R. E. Sheldahl (25)
5636 H. R. Spahr
5640 G. J. Simmons
8266 E. A. Aas
3141 T. L. Werner (5)
3151 W. L. Garner (3)
For DOE/TIC (Unlimited Release)