

SDO


Atlas V is the newest member in the Atlas launch vehicle evolution. The Atlas V launch vehicle family integrates the Centaur III second stage and a newly developed, structurally stable, 3.83 meter (12.6 feet) diameter Common Core Booster™ (CCB) with RD-180 main engine. The Atlas V vehicles were developed to meet Air Force Evolved Expendable Launch Vehicle (EELV) program requirements for significantly lower cost access to space. The Atlas V 401 launch vehicle that will launch the SDO spacecraft combines the RD-180-powered Common Core Booster™ with a 4.2 meter (13.8 feet) diameter payload fairing. The Atlas V 401 launch vehicle uses a single engine Centaur III (SEC) second stage.


The primary interfaces between the Atlas V launch vehicle and SDO spacecraft consist of the payload adapter, which supports the spacecraft on the launch vehicle and provides separation, and the payload fairing, which encloses and protects the spacecraft during ground operations and launch vehicle ascent.

The Payload Fairing (PLF) provides thermal, acoustic, electro-magnetic, and environmental protection for the spacecraft during the pre-launch processing operations, launch and ascent.

Conical Interstage Adapter

RD-180 Engine

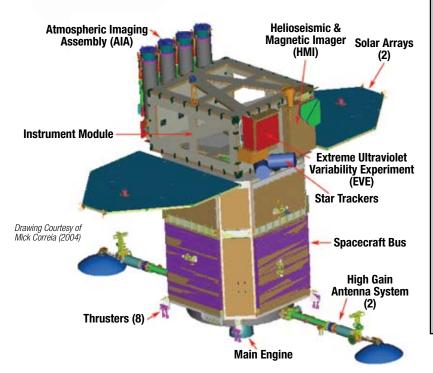



Payload

Adapter

Centaur

Centaur Engine

Short

Interstage

Adapter

Drawing Courtesy of United Launch Alliance

SDO Spacecraft

Payload

Fairing

Atmospheric Imaging Assembly (AIA) – will image the solar atmosphere at multiple wavelengths to link changes above the surface to changes at and below the surface. Data will include images of the Sun in eight wavelengths every 10 seconds.

Extreme Ultraviolet Variability Experiment (EVE) - will measure the solar extreme-ultraviolet (EUV) spectral irradiance with unprecedented spectral resolution, temporal cadence, and precision to understand variations on the timescales which influence Earth's climate and near-Earth space.

Instrument Module (IM) – structure holding SDO's three science instruments, AIA, HMI and EVE.

Main Engine – propels SDO through space to geosynchronous orbit using 22.5 Newton (100 pounds of force) of thrust.

High Gain Antenna System (HGAS) – sends science data from the SDO instruments to a dedicated ground system at a rate of 150 Megabytes per second using a Ka-band frequency of 26 gigahertz.

Spacecraft Bus – structure housing the components of the observatory such as electronic boxes, battery electrical harnessing and propulsion tanks.

Star Trackers – use star field patterns to measure the attitude of the spacecraft (where the instruments are pointed in space).

Solar Arrays – panels of solar cells that will generate electric power for the spacecraft.

National Aeronautics and Space Administration **Kennedy Space Center** Kennedy Space Center, FL 32899