


A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

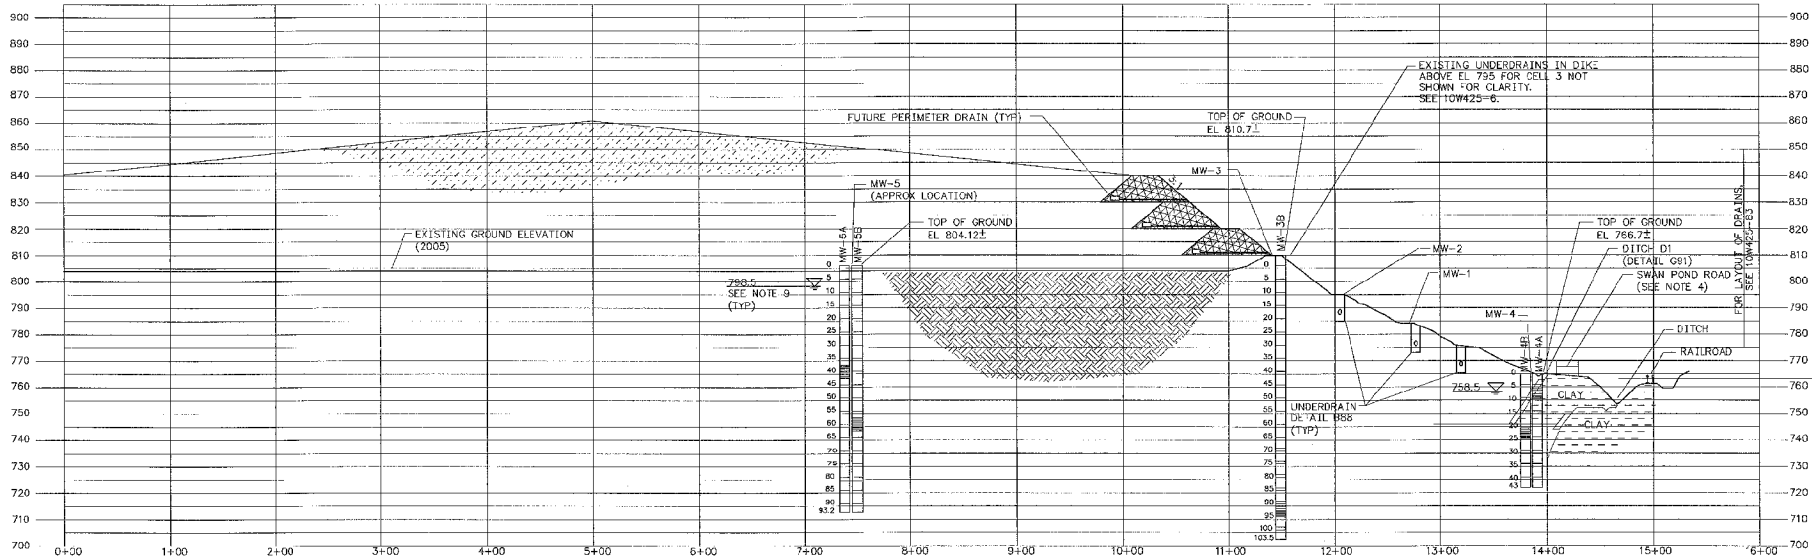


SECTION A88  
SCALE: HORIZONTAL: 1" = 30'  
VERTICAL: 1" = 20'

STRIP EXISTING SOIL COVER, PLACE COMPOSITE GEONET & PLACE 1 FT COMPACTED CLAY SOIL ON COMPOSITE GEONET

NOTES:

- FOR DRAWINGS LIST AND LEGEND SEE 10W425-81.
- FOR GENERAL NOTES SEE 10W425-26 FOR CONSTRUCTION NOTES, SEE 10W425-83.
- BETWEEN EL. 760 & 775, STRIP EXISTING 1'-0" SOIL COVER WITHIN THE LIMITS SHOWN ON DRAWINGS 10W425-83 THRU 10W425-86, PRIOR TO INSTALLING FINAL COVER, STOCK PILE SOIL AND REUSE AS RANDOM FILL, VEGETATIVE LAYER FOR FINAL COVER.
- DETAIL DEPICTS SECTION THROUGH EXISTING DREDGE CELLS ADJACENT TO SWAN POND ROAD. BASE ELEVATION OF DREDGE CELL VARIES.
- UNDERDRAINS ARE NOT REQUIRED FOR EXISTING DIKE CONSTRUCTED FOR DREDGE CELL 2.
- LATERAL OUTLET PIPE SHALL BE NON-PERFORATED POLYETHYLENE CORRUGATED TUBING AS MANUFACTURED BY ADVANCED DRAINAGE SYSTEMS, INC., COLUMBUS, OHIO (61+) 457-3051 OR EQUAL.
- LATERAL OUTLET PIPES SHALL BE PLACED EVERY 200 FEET ON CENTER, AT LOW POINTS. FOR PROFILE OF DRAINS, SEE 10W425-81.
- GEOTEXTILE USED FOR UNDERDRAIN SHALL BE A WOVEN MONOFILAMENT WITH AN APPARENT OPENING SIZE (AOS) SELECTED BY TVA FES (US STANDARD SIEVE SIZE) WHEN TESTED IN ACCORDANCE WITH ASTM D 4751. THE GEOTEXTILE SHALL BE GEOTEX 104F AS MANUFACTURED BY SYNTHETIC INDUSTRIES OR APPROVED EQUAL.
- WATER LEVELS SHOWN ARE THOSE EXISTING AFTER MW DEVELOPMENT.

- SCREENING FOR BORE HOLE CONVERTED TO MIN.

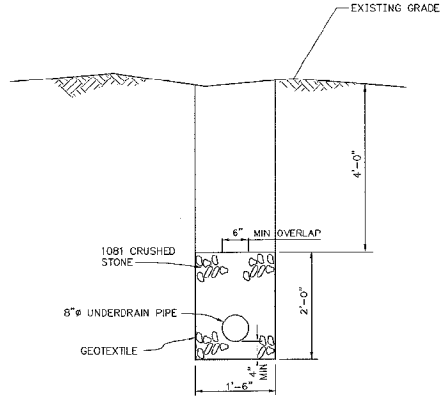

DETAIL B88  
PERIMETER UNDERDRAIN  
SCALE: 1" = 1'-0"

REV	DATE	BY	CHKD	APP'D	DESCRIPTION
1					INITIAL ISSUE TO INCORPORATE DOK K1F-05-090-010
2					SCALE: 1" = 50' EXCEPT AS NOTED
YARD					
DREDGE CELL					
DIKE RESTORATION					
SECTION & DETAIL - SHEET 1					
DESIGNED BY	DRAWN BY	CHECKED BY	APPROVED BY	PROJECT NO.	DATE
KINGSTON FOSSIL PLANT					
TENNESSEE VALLEY AUTHORITY					
FOSSIL AND HYDRO ENGINEERING					
AUTOCAD R2200	36	C	10W425-88	R	0