






**“K”**  
Single Leaf  
Aluminum

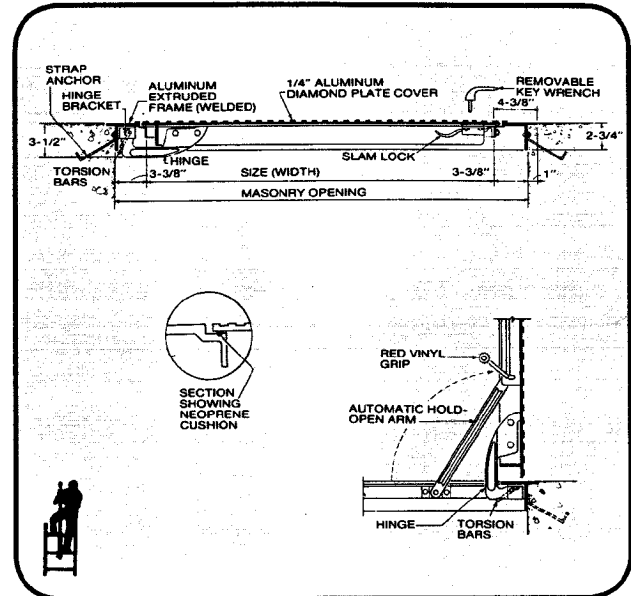

**STANDARD SIZES AND WEIGHTS**  
Type K, and KD

Type	SIZE		Material	Wt. Lbs.
	Width	Length		
K-1	2'0"	2'0"	Aluminum	60
K-2	2'6"	2'6"	Aluminum	75
K-3	3'0"	2'6"	Aluminum	85
K-4	3'0"	3'0"	Aluminum	95
K-5	3'6"	3'6"	Aluminum	120
KD-2	4'0"	4'0"	Aluminum	150
KD-3	4'0"	6'0"	Aluminum	225
KD-4	5'0"	5'0"	Aluminum	230

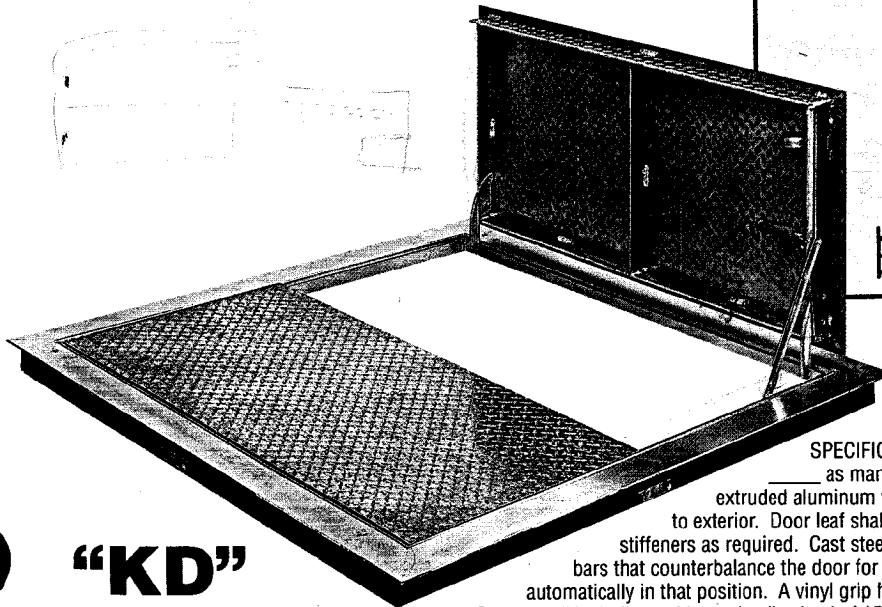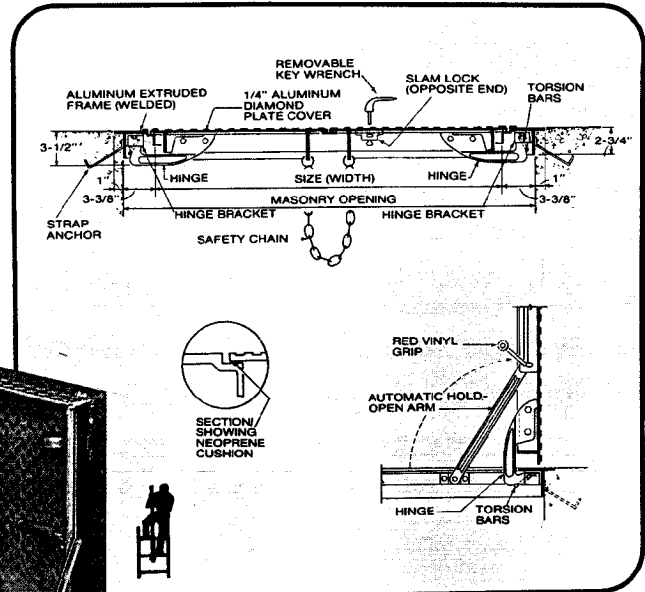

**“KD”**  
Double Leaf  
Aluminum

**SPECIFICATIONS:** Type K, Type KD. Floor access door shall be Type \_\_\_\_\_ as manufactured by The Bilco Company. Frame shall be 1/4" extruded aluminum with built-in neoprene cushion and with strap anchors bolted to exterior. Door leaf shall be 1/4" aluminum diamond plate reinforced with aluminum stiffeners as required. Cast steel hinges shall be bolted to underside and pivot on torsion bars that counterbalance the door for easy operation. The door shall open to 90 degrees and lock automatically in that position. A vinyl grip handle shall be provided to release the cover for closing. Doors shall be built to withstand a live load of 150 pounds per square foot, and equipped with a snap lock and removable handle. Aluminum shall be mill finish, with bituminous coating to be applied to exterior of frame by manufacturer. Hardware shall be zinc plated and chromate sealed. Installation shall be in accordance with manufacturer's instructions. Manufacturer shall guarantee against defects in material or workmanship for a period of five years.