



UNTRENCHED INSTALLATION ISOMETRIC VIEW

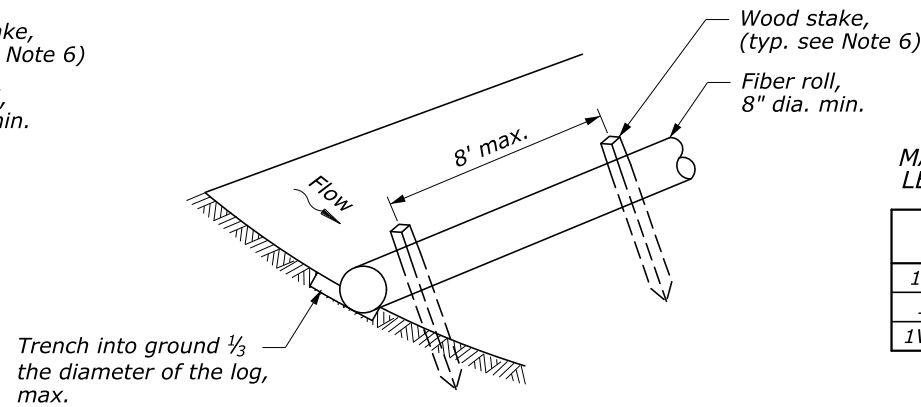

ENTRENCHED INSTALLATION ISOMETRIC VIEW

MAXIMUM ALLOWABLE SLOPE LENGTH ABOVE FIBER ROLLS


SLOPE	MAX INTERVAL
1V:4H or Flatter	20 ft
1V:4H - 1V:2H	15 ft
1V:2H or Steeper	10 ft

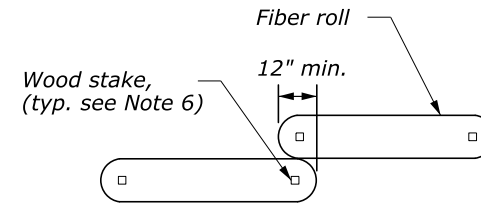


ROLL OVERLAP

NOTES:


1. Provide fiber rolls meeting the requirements of Subsection 713.12.
2. Use fiber rolls with a minimum 8-inch diameter. For drain inlet protection, use fiber rolls with a minimum 12-inch diameter.
3. Prior to installation, clear all obstructions including rocks, clods, and debris greater than 1-inch that may interfere with proper function of the fiber roll.
4. For untrenched installation, blow or hand place mulch or compost on uphill side of the slope along the fiber roll.
5. Place fiber rolls on level grade and parallel to contours. Extend both ends of the fiber roll at least 8 feet upslope at 45 degrees to the main alignment.
6. Use wood stakes with a minimum nominal cross section of 2-inch x 2-inch and of sufficient length to attain a minimum of 12 inches into the ground and 3 inches protruding above the roll. Furnish wood stakes meeting the requirements of Subsection 713.08(a).
7. When more than one fiber roll is needed, overlap ends 12 inches minimum and stake.
8. Remove sediment deposits when accumulation is one-half the height of the exposed fiber roll.
9. Replace biodegradable fiber rolls 6 months after installation and photodegradable fiber rolls after 12 months after installation.
10. When fiber rolls are required on paved surfaces, use gravel bags to support them as shown on the inlet protection detail.
11. Provide gravel bag weights meeting the requirements of Subsection 713.13.

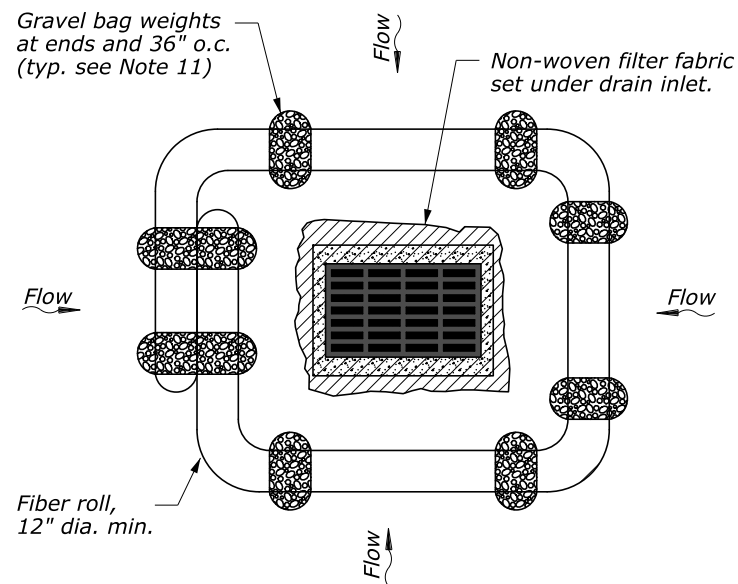


INLET PROTECTION

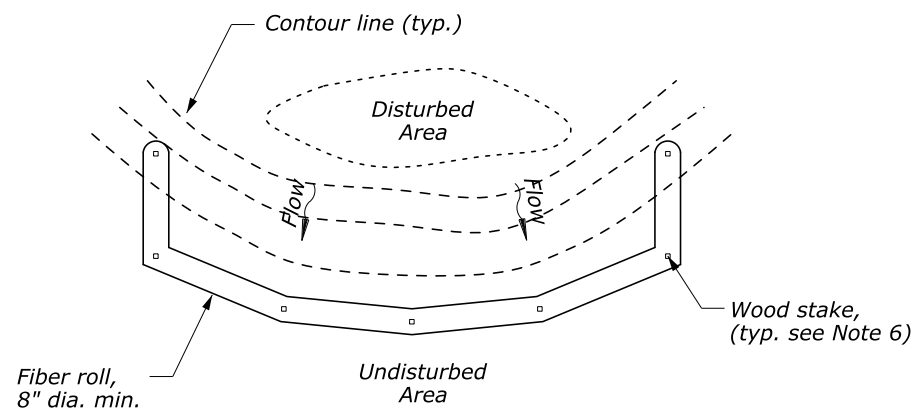


PLAN VIEW

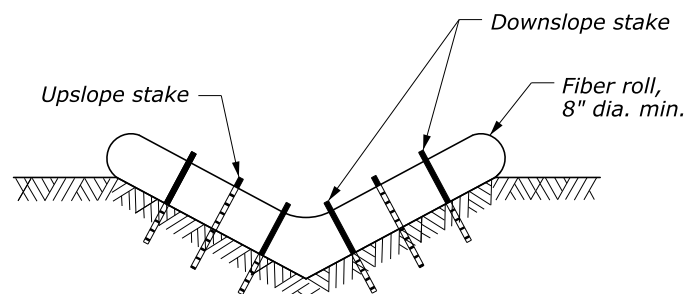

V-DITCH FIBER ROLL CHECK DAM CROSS SECTION

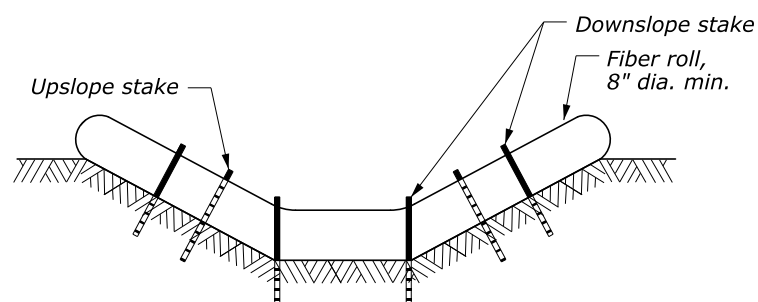

TRAPEZOIDAL DITCH FIBER ROLL CHECK DAM CROSS SECTION

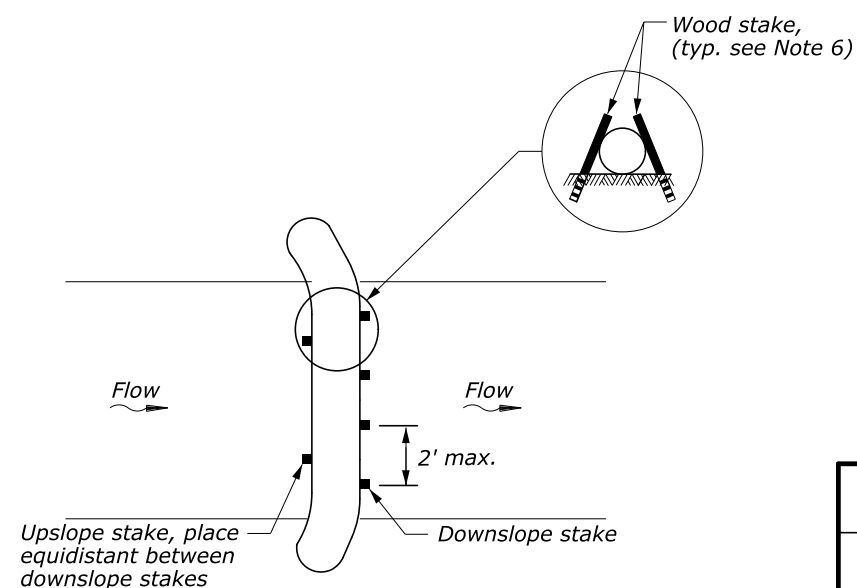

FIBER ROLL CHECK DAM PLAN VIEW

FIBER ROLL CHECK DAM SPACING TABLE

DITCH GRADE *	CHECK DAM SPACING(S) **	
	8" HIGH	12" HIGH
2%	33 ft	50 ft
3%	22 ft	33 ft
4%	16 ft	25 ft
5%	13 ft	20 ft

* Do not install check dams on grades below 2%
 ** Adjust spacing as approved based on site conditions

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION
 FEDERAL HIGHWAY ADMINISTRATION
 EASTERN FEDERAL LANDS HIGHWAY DIVISION

U.S. CUSTOMARY DETAIL

FIBER ROLLS AND SOCKS

DETAIL APPROVED FOR USE

APPROVED : MAY 2016

DETAIL

E157-04