


**CABINET LOCATION WITH GUARDRAIL OR BARRIER**

**NOTES:**

1. Install pull box and cabinet as directed by the CO.
2. If cabinet is located more than 30 feet from the travelway edge, provide a minimum cover of 12 inches. Otherwise, provide a minimum cover of 18 inches.
3. Paint damaged portions of conduit and untreated threads with a rust inhibitor as approved by the CO.
4. Use minimum 3/4 inch diameter conduit when attached to poles above ground.
5. In the vicinity of underground utilities, provide a minimum 2 feet horizontal and 6 inches vertical clearance.

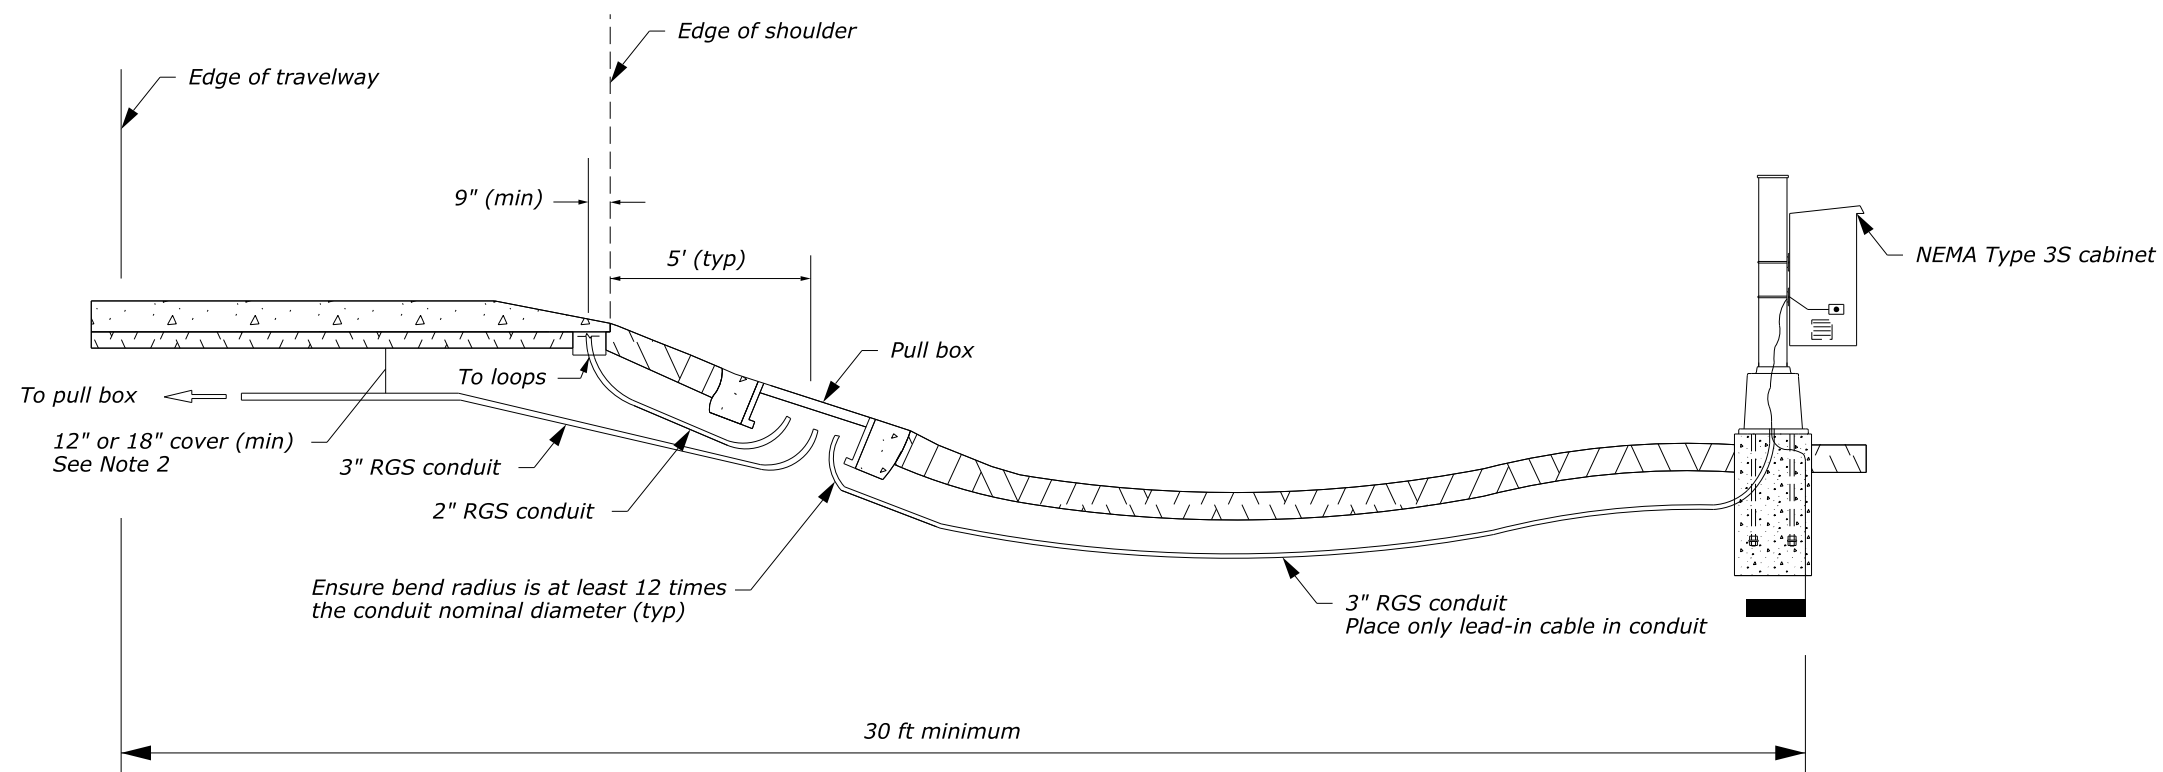

**CABINET LOCATION WITHOUT GUARDRAIL OR BARRIER**

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
U.S. CUSTOMARY DETAIL	
<b>INDUCTIVE LOOP CABINET LOCATION</b>	
DETAIL APPROVED FOR USE APPROVED : MARCH 2015	DETAIL E636-05