
- 1. All pipe stakes and hardware to be galvanized after fabrication.
- 2. Approved alternative pipe anchor assemblies may be used.
- 3. Place slope anchor assemblies on 6 m max. centers on slopes 20% or greater.
- 4. Plate material to be ASTM A36. Galvanize after fabrication.
- 5. Dimensions without units are millimeters.

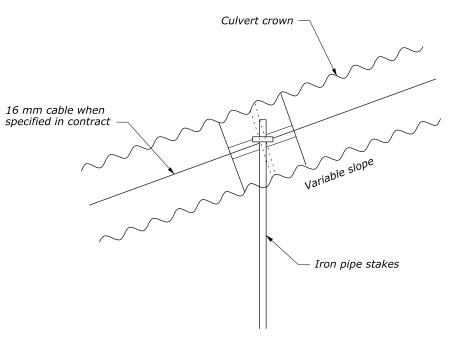

METAL PIPE ASSEMBLY

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION WESTERN FEDERAL LANDS HIGHWAY DIVISION

METRIC DETAIL

PIPE ANCHOR ASSEMBLY


NO SCALE

DETAIL APPROVED FOR USE 4/2009

VISED: 9/2009


DETAIL

WM606-14

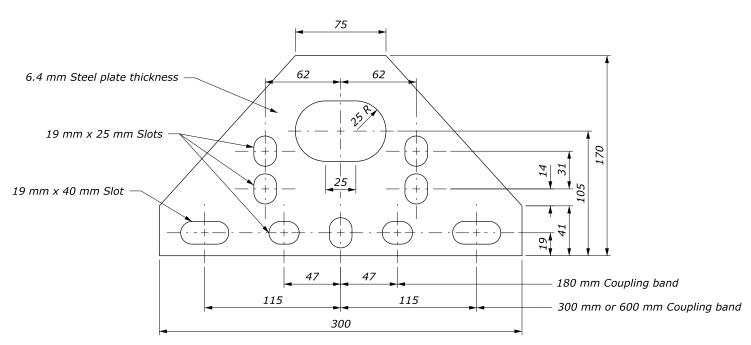

Measure length of coupling band parallel to the centerline of the pipe

STEEL PLATE

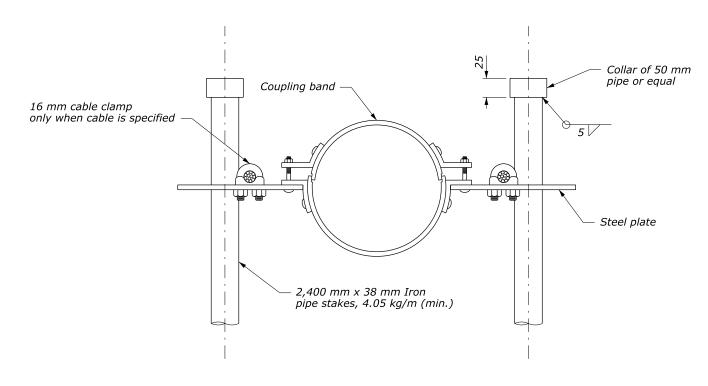

ANCHOR ASSEMBLY