

# **FEDERAL AVIATION ADMINISTRATION**

**February 24, 2011**

**Prepared by the:**

**Asset Management and NAS Supply Support Team  
Technical Operations Service, ATO-W  
Air Traffic Organization**



## **FAA Asset Identification Process and Procedure Guide**

## Table of Contents

<b>FAA Asset Identification .....</b>	<b>i</b>
<b>Process and Procedure Guide .....</b>	<b>i</b>
<b>General.....</b>	<b>1</b>
1. What is the purpose of this guide? .....	1
2. To whom does this guide apply? .....	1
3. What is the governing authority for this guide?.....	1
4. What does this guide cover? .....	1
5. To whom do “we”, “you”, and their variants refer? .....	1
6. What information does this guide contain? .....	1
7. How do we request a deviation from these requirements and who can approve it?.....	2
8. What are my responsibilities?.....	2
<b>Asset Identification Specification .....</b>	<b>i</b>
1 Introduction.....	1
1.1 Purpose .....	1
1.2 References .....	1
2 Specification .....	3
2.1 Barcode Standard.....	3
2.1.1 Unique identification.....	3
2.1.2 Asset labeling .....	4
2.1.3 Environmental considerations .....	4
2.1.4 FAA Order applicability.....	4
2.2 Symbology and Printing Requirements for 1-D (Linear) Barcodes .....	4
2.2.1 Barcode symbology.....	4
2.2.2 Barcode printing.....	6
2.2.3 Print contrast .....	7
2.2.4 Field overlap.....	7
2.3 Data Requirements for 1-D (Linear) Barcodes.....	7
2.3.1 Mandatory Data.....	7
2.3.2 Symbol Syntax .....	7
2.3.3 Human Readable Text.....	8
2.4 Asset Label Specifications for 1-D (Linear) Barcodes.....	9
2.5 Symbology and Printing Requirements for 2-D (Data Matrix) Barcodes .....	10
2.5.1 Data matrix symbology .....	10
2.5.2 Data matrix size.....	10
2.5.3 Data matrix symbol quality .....	10
2.5.4 Calibration of verification equipment .....	11
2.5.5 Alternative quality measuring methodologies.....	11
2.5.6 Field overlap.....	11
2.6 Data Requirements for 2-D (Data Matrix) Barcodes.....	11
2.6.1 Symbol Syntax .....	11
2.6.2 Human readable text.....	13
2.6.3 Legibility of human readable text .....	13
2.7 Asset Label Specifications for 2-D (Data Matrix) Barcodes.....	14

2.8	Material Specifications .....	15
2.8.1	Resistance.....	15
2.8.2	Specular reflection (substrate, laminate & imaging media).....	15
2.8.3	Composition .....	15
2.8.4	Application temperature.....	16
2.8.5	Service environment.....	16
2.9	Label Placement .....	16
2.9.1	Label accessibility.....	16
2.9.2	Number of labels .....	16
2.9.3	Application surfaces.....	16
2.9.4	Rough surfaces .....	17
2.9.5	Curved surfaces.....	17
2.9.6	Irregular surfaces.....	17
2.9.7	Administrative assets.....	17
2.10	Replacement of Labels.....	17
2.11	Unreadable Labels .....	17
3	Government and Contractor responsibilities .....	19
3.1	Government asset identification .....	19
3.2	Contractor asset identification .....	19
3.3	Contractor label specifications .....	19
3.4	Contractor GS1 Company Prefix.....	19
	Appendix 1. Definitions.....	20
	<b>Asset Identification Contract Data .....</b>	<b>i</b>
	<b>Requirements List and Data Item .....</b>	<b>i</b>
	<b>Description (CDRL/DID) .....</b>	<b>i</b>
1	Introduction.....	1
1.1	Purpose .....	1
1.2	Background.....	1
1.2.1	Barcode Specification .....	1
1.2.2	Electronic Asset Data.....	1
1.2.3	Fixed File Format.....	2
2	Instructions.....	3
2.1	Statement of Work.....	3
2.1.1	Asset Identification Report.....	3
2.2	CDRL Items: A0xx Asset Identification Report .....	5
2.3	Data Item Description (DID).....	<b>Error! Bookmark not defined.</b>
2.3.1	Example DID.....	<b>Error! Bookmark not defined.</b>
2.3.2	DID Fields - Contractors .....	5
2.3.3	DID Fields – FAA.....	6
2.4	Asset Identification Label.....	8
	Appendix A - Unit of Issue.....	10

## General

### 1. What is the purpose of this guide?

This guide was written to provide an easy to use "how to" tool to assist you in asset identification including barcoding, tagging, or identifying FAA personal property assets using FAA asset identification standards. It ensures FAA assets are properly identified and managed from the time the asset is initially acquired until it reaches the end of its life cycle and is disposed of.

### 2. To whom does this guide apply?

It covers FAA headquarters, regions, centers (also referred to as "regions"), and field organizations, and applies to all FAA employees who manage FAA asset acquisitions.

### 3. What is the governing authority for this guide?

The Federal Property and Administrative Services Act of 1949, as amended (Act of 30 June 1949, 63 Stat. 372), the Chief Financial Officers (CFO) Act of 1990, and FAA Order 4600.27A, dated 11/16/07.

### 4. What does this guide cover?

This guide covers all FAA accountable personal property and operating inventory used in the National Airspace System (NAS) and other FAA personal property assets used in the performance of its mission that is owned or controlled by the FAA. These assets are located within all FAA facilities as well as contractor facilities. In addition:

- a) Future acquisitions of NAS systems require vendors to identify and tag all assets to the lowest replaceable/repairable units (LRU), during assembly or at the time deemed most appropriate in order to maintain the warranty or integrity of the assets.
- b) Future acquisitions of non-NAS assets or systems, consisting of FAA accountable property, as defined in FAA Order 4600.27A are tagged prior to delivery to or acceptance by the FAA. Non-accountable assets may be tagged and recorded in AITS at the discretion of the property custodian.

### 5. To whom do “we”, “you”, and their variants refer?

Use of pronouns “we”, “you”, and their variants refer to the agency.

### 6. What information does this guide contain?

The following two documents are included in this guide:

- a) Asset Identification Specification. This document describes the attributes of the FAA asset identification specification as developed by the Asset Management and NAS

Supply Support Team, ATO-W, AML and GS1 US (formerly Uniform Code Council, Inc.).

- b) Asset Identification Contract Data Requirements List (CDRL) and Data Item Description (DID). This document provides instructions for incorporating CDRLs and DIDs into all FAA asset acquisitions.

### **7. How do we request a deviation from these requirements and who can approve it?**

Deviations must be submitted in writing to the FAA Service Management Group, Asset Management and NAS Supply Support Team, ATO-W, at 800 Independence Avenue, SW, Washington, DC 20591.

### **8. What are my responsibilities?**

Effective asset management depends on your involvement as well as that of organizations that acquire, develop, own, operate, or replace the agency's personal property assets.

- a) The Vice President of Technical Operations. ATO-W is the focal point and has overall responsibility for the FAA personal property management program. As such the ATO-W sponsors FAA asset identification initiatives.
- b) The Vice President of Acquisition and Business Services (ATO-A) has overall responsibility to make sure all applicable contracts and procurements contain applicable clauses from the Acquisition Management System (AMS), requiring newly acquired assets to be properly identified and tagged in accordance with the Asset Identification Specification.
- c) All LOBs and SOs are responsible to make sure proper FAA assets are properly identified as they move through their life cycle.

# **FEDERAL AVIATION ADMINISTRATION**

**Version 3.0**

**February 24, 2011**

**Prepared by the:**

**Asset Management and NAS Supply Support Team**

**Technical Operations Service, ATO-W**

**Air Traffic Organization**



## **Asset Identification Specification**

## Revision History

<b>Author</b>	<b>Date</b>	<b>Version</b>
AFZ-500	11/21/2002	v1.0
UCC <sup>®</sup>	4/15/2003	v1.1
UCC <sup>®</sup>	5/29/2003	v2.0
AFZ-500	6/10/2003	v2.1
AFZ-500	6/24/2003	v2.2
UCC <sup>®</sup>	7/25/2003	v2.3
AFZ-500	11/18/2003	v2.4
AMNSS	12/13/04	v2.5
AMNSS	5/27/06	v2.5.1
AMNSST	6/16/06	V2.5.2
AMNSST	9/21/2009	V2.5.5
AMNSST	7/10/2009	V2.5.4
AMNSST	9/21/2009	V2.5.5
AMNSST	11/18/2009	V2.5.6
AMNSST	2/24/2011	V3.0

## Table of Contents

<b>1</b>	<b>Introduction.....</b>	<b>AIS-1</b>
1.1	Purpose.....	AIS-1
1.2	References .....	AIS-1
<b>2</b>	<b>Specification.....</b>	<b>AIS-3</b>
2.1	Barcode Standard .....	AIS-3
2.1.1	Unique identification .....	AIS-3
2.1.2	Asset labeling.....	AIS-4
2.1.3	Environmental considerations.....	AIS-4
2.1.4	FAA Order applicability .....	AIS-4
2.2	Symbology and Printing Requirements for 1-D (Linear) Barcodes.....	AIS-4
2.2.1	Barcode symbology .....	AIS-4
2.2.2	Barcode printing.....	AIS-6
2.2.3	Print contrast .....	AIS-7
2.2.4	Field overlap .....	AIS-7
2.3	Data Requirements for 1-D (Linear) Barcodes .....	AIS-7
2.3.1	Mandatory Data .....	AIS-7
2.3.2	Symbol Syntax .....	AIS-7
2.3.3	Human Readable Text.....	AIS-8
2.4	Asset Label Specifications for 1-D (Linear) Barcodes .....	AIS-9
2.5	Symbology and Printing Requirements for 2-D (Data Matrix) Barcodes.....	AIS-10
2.5.1	Data matrix symbology.....	AIS-10
2.5.2	Data matrix size .....	AIS-10
2.5.3	Data matrix symbol quality.....	AIS-10
2.5.4	Calibration of verification equipment.....	AIS-11
2.5.5	Alternative quality measuring methodologies .....	AIS-11
2.5.6	Field overlap .....	AIS-11
2.6	Data Requirements for 2-D (Data Matrix) Barcodes .....	AIS-11
2.6.1	Symbol Syntax .....	AIS-11
2.6.2	Human readable text .....	AIS-13
2.6.3	Legibility of human readable text.....	AIS-13
2.7	Asset Label Specifications for 2-D (Data Matrix) Barcodes .....	AIS-14
2.8	Material Specifications.....	AIS-15
2.8.1	Resistance .....	AIS-15
2.8.2	Specular reflection (substrate, laminate & imaging media).....	AIS-15
2.8.3	Composition.....	AIS-15
2.8.4	Application temperature.....	AIS-16
2.8.5	Service environment .....	AIS-16
2.9	Label Placement .....	AIS-16
2.9.1	Label accessibility.....	AIS-16
2.9.2	Number of labels.....	AIS-16
2.9.3	Application surfaces.....	AIS-16
2.9.4	Rough surfaces.....	AIS-17
2.9.5	Curved surfaces.....	AIS-17
2.9.6	Irregular surfaces .....	AIS-17



2.9.7	Administrative assets .....	AIS-17
2.10	Replacement of Labels .....	AIS-17
2.11	Unreadable Labels .....	AIS-17
<b>3</b>	<b>Government and Contractor responsibilities.....</b>	<b>AIS-19</b>
3.1	Government asset identification.....	AIS-19
3.2	Contractor asset identification.....	AIS-19
3.3	Contractor label specifications.....	AIS-19
3.4	Contractor GS1 Company Prefix .....	AIS-19

## 1 Introduction

### 1.1 Purpose

This document describes the attributes of the Federal Aviation Administration (FAA) Asset Identification Specification as developed by the Asset Management and NAS Supply Support Team (AM&NSST) and GS1 US (formerly Uniform Code Council, Inc.). This specification is in conformance with the GS1 Global Individual Asset Identifier (GIAI) standard. This specification shall be used FAA-wide for personal property asset identification.

This document also establishes two barcode specifications that define the format, standard, location and definition of the barcode label for identifying FAA accountable personal property and operating inventory used in the National Airspace System (NAS) in the performance of its mission that is owned or controlled by the FAA. The first specification is for a linear, or 1-D, barcode label, which encodes the asset’s GIAI; the second specification is for a data matrix, or 2-D, barcode label, which encodes the GIAI as well as the CAGE code, part number, and serial number of the asset. The data matrix specification was finalized in July, 2009 after being accepted by both GS1 US and the Department of Defense (DoD).

### 1.2 References

Table 1 below provides a complete list of all documents and publications referenced in this specification.

Document	Reference
FAA Order 4600.XX	FAA policy for Personal Property Management
ISO/IEC 15416 Information technology	Automatic identification and data capture techniques – Barcode print quality test specification – Linear symbols (See paragraph 12)
ISO/IEC 15417 Information technology	Automatic identification and data capture techniques – Barcode symbology specification – Code 128 (See paragraph 21)
ISO/IEC 15424:2000 Information technology	Automatic identification and data capture techniques – Data Carrier Identifiers (including Symbology Identifiers)
Guidelines for Department of Defense Unique Identification (UID) Markings using the GS1 System	<a href="http://barcodes.gs1us.org/dnn_bcec/Documents/tabid/136/DMXModule/731/Command/Core_Download/Default.aspx?EntryId=51">http://barcodes.gs1us.org/dnn_bcec/Documents/tabid/136/DMXModule/731/Command/Core_Download/Default.aspx?EntryId=51</a>
International Organization for Standardization (ISO)	<a href="http://www.iso.org">http://www.iso.org</a>
GS1 US (formerly Uniform Code Council, Inc.)	<a href="http://www.gs1us.org">www.gs1us.org</a>
GS1 Global (formerly EAN International)	<a href="http://www.gs1.org">www.gs1.org</a>
Department of Defense (DoD) MIL STD-130N	<a href="http://www.id-integration.com/docs/specs/MIL-STD-130N.pdf">http://www.id-integration.com/docs/specs/MIL-STD-130N.pdf</a>

**FAA ASSET IDENTIFICATION SPECIFICATION**

---



ISO/IEC 15434 Information technology	Syntax for high-capacity data capture (ADC) media
ISO/IEC 15415 Information technology	Automatic identification and data capture techniques— Bar code print quality test specification—Two dimensional symbols
ISO/IEC 15418:2009 Information Technology	Automatic identification and data capture techniques -- GS1 Application Identifiers and ASC MH10 Data Identifiers and maintenance
ISO/IEC 16022 Information technology	Automatic identification and data capture techniques— Data Matrix bar code symbology specification
SAE AS 9132	Society of Automotive Engineers (SAE) aerospace industry marking standard
Department of Defense Cataloging Handbook H2 – Federal Supply Classification Groups and Classes	<a href="http://www.dlis.dla.mil">www.dlis.dla.mil</a>

**Table 1: References**

## 2 Specification

This section details the specifications for FAA asset barcode labels, including symbology, printing requirements, data requirements, materials, placement and replacement of labels, and appearance.



### 2.1 Barcode Standard

  **Section 2.1 applies to both linear (1-D) and Data Matrix (2-D) barcode labels.**

#### 2.1.1 Unique identification

FAA assets are identified using one of two standards. The 1-D, or linear, standard consists of a barcode label that encodes a globally unique number, the GIAI, designed to link the physical asset to attributes about the asset in the FAA database. The 2-D, or data matrix, standard consists of a data matrix barcode which encodes the GIAI as well as the CAGE code, part number, and serial number.

The applicable standard is determined according to the following criteria:

Asset ID Standard	Criteria for Selecting Asset ID Standard
Data Matrix 	Equipment that affects the operation of the National Airspace System (NAS). These assets are also referred to as Exchange and Repair (E&R) assets as they can be exchanged and repaired through the FAA Logistics Center (FAALC). E&R assets are defined as equipment classified under the following Federal Supply Groups (FSGs): <ul style="list-style-type: none"> <li>• 58 – Communication, Detection, and Coherent Radiation Equipment</li> <li>• 59 – Electrical and Electronic Equipment Components</li> <li>• 61 – Electric Wire, and Power and Distribution Equipment</li> <li>• 66 – Instruments and Laboratory Equipment</li> <li>• 70 - Automatic Data Processing Equipment (Including Firmware), Software, Supplies and Support Equipment</li> </ul> For more information on FSGs, please refer to the DoD Cataloging Handbook H2.
Linear barcode 	All other assets

**Table 2: Criteria for determining asset ID standard**

It is intended that the asset label and the information in the asset management systems provide all required identification of the asset over its entire serviceable life cycle.

### 2.1.2 Asset labeling

The FAA barcode label will be affixed to the asset. It will provide both a machine-readable barcode information and, when space permits, in human readable individual asset reference number in text format. In certain circumstances the barcode label may be directly marked, etched or embedded on the item. The FAA barcode label becomes the “license plate” against which all the attributes of the asset may be recorded and with which the same information may be quickly and easily referenced and/or retrieved.


### 2.1.3 Environmental considerations

Asset labels must be able to withstand many environments (indoors, outdoors and the extreme heat and cold therein, exposure to solvents, oils, alcohol, etc.). Outdoor environments include locations in the U.S. as well as international locations where FAA assets exist. Labels must also be able to withstand periodic cleaning with water and detergent, and other chemicals used during maintenance, repair, and overhaul. **Note:** This will apply if the Lowest Replaceable Unit (LRU) is going through this process.

### 2.1.4 FAA Order applicability

This specification applicable to asset identification as defined in Order 4600.27A.

## 2.2 Symbology and Printing Requirements for 1-D (Linear) Barcodes

	<b>Section 2.2 applies only to linear (1-D) barcode labels.</b>
---	---

### 2.2.1 Barcode symbology

The barcode symbology is GS1-128 which is based on the ISO Standard for barcode symbology specification – Code 128 (ISO/IEC 15417). An example of information available in above-referenced ISO document includes:

- Symbology characteristics
- Symbol structure
- Character assignments
  - Symbol character structure
  - Data character encodation
  - Code Sets
  - Special characters
  - Symbol check character
- Dimensional requirements
  - Minimum width of a module (X)
  - Quiet zone
- Reference decode algorithm
- Symbol quality
  - General
  - Decodability
  - Quiet zones

- User-defined application parameters
  - Symbology and data characteristics
  - Test specification
- Transmitted data.

### 2.2.2 Barcode printing

For printing, the bars in the barcode and the human readable portion of the asset identification labels should be printed black on a white background. The printed symbol shall be ISO/IEC Grade 3.0 or better at time of printing. All labels should be printed with a protective surface laminate that results in an ISO/IEC symbol grade of 2.0 or better at the time of lamination. These two parameters are designed to ensure an ISO/IEC symbol grade of 1.5 in the label's final form.

Labels shall conform to the ISO Standard for barcode print quality test specification (ISO/IEC15416). Listed below are examples of information available in the above-referenced ISO document:

- Symbols and abbreviated terms
  - Abbreviations
  - Symbols
- Measurement methodology
  - General requirements
  - Reference reflectivity measurements
    - Measurement wavelength(s)
    - Measuring aperture
    - Optical geometry
    - Inspection band
    - Number of scans
  - Scan reflectance profile
  - Scan reflectance profile assessment parameters
    - Element determination
    - Edge determination
    - Decode
    - Symbol contrast (SC)
    - Minimum reflectance (Rmin)
    - Edge contrast (EC)
    - Modulation (MOD)
    - Defects
    - Decodability
    - Quiet zone check
  - Symbol grading
    - Scan reflectance profile grading
      - Decode
      - Reflectance parameter grading
      - Decodability
    - Expression of symbol grade
  - Substrate characteristics


### 2.2.3 Print contrast

The print contrast is to be measured per ISO/IEC 15416. Follow the GS1 standard, which is 1.5/10/670 – symbol grade/measuring aperture/wave length; this references the ISO/IEC 15416.

### 2.2.4 Field overlap

The barcode and the human readable data are separate fields. Each field should not protrude on any other, thereby maintaining the ability to distinguish between them.

## 2.3 Data Requirements for 1-D (Linear) Barcodes

	<b>Section 2.3 applies only to linear (1-D) barcode labels.</b>
---	---

This section provides details on the data elements that make up the linear barcode identification standard.

### 2.3.1 Mandatory Data

The following data elements must be included in the asset label:

1. Application Identifier
2. GS1 Company Prefix
3. Individual Asset Reference

### 2.3.2 Symbol Syntax

The grammar, structure, and order of the barcode symbol elements are as follows:

<ST><FNC1><AI><GS1 Company Prefix>< Individual Asset Reference><Symbol Check Character><Stop>

The symbol elements are defined in Table 5 below:

Element	Data Content	Length
<ST>	Symbol start character	1
<FNC1>	An element built into the barcode providing unique data integrity. It tells the scanning application that the data that follows will be in the GS1 format and that Application Identifiers will be used to identify the data. It is called: ‘function code one’.	2
<AI>:	Application Identifier. The Application Identifier (AI) for assets is 8004. It tells the scanning application that the data that follows is an asset number. This prevents common errors, like a serial number being mistaken for an asset number.	4



**FAA ASSET IDENTIFICATION SPECIFICATION**

---

<GS1 Company Prefix>	Unique company identification assigned by GS1 US to members. It ensures the asset number is unique worldwide. The GS1 Company Prefix can be anywhere from 7 to 10 digits. Contractors are responsible for using the contractor's GS1 Company Prefix. If the contractor is not registered with GS1, the FAA may provide use of the FAA GS1 Company Prefix for FAA which is 0602970.	>=7 and =<10
<Individual Asset Reference>	Unique variable length field. The GS1 Company Prefix determines the length of the Individual Asset Reference Number. The Individual Asset Reference Number may be all numeric or alphanumeric. <b>Note:</b> The maximum combined length of the GS1 Company Prefix and Individual Asset Reference Number is 30 digits.	<=23
<Symbol Check Character>	A symbol character included within a GS1-128 Symbol, the value of which is used by the barcode reader for the purpose of performing a mathematical check to ensure the accuracy of the scanned data. It is not shown in Human Readable Interpretation. It is not input to the barcode printer and is not transmitted by the barcode reader. It is built into the symbology.	0
<Stop>	Symbol stop character.	1

**Table 3: Barcode symbol elements**

**2.3.3 Human Readable Text**

Human readable text is to appear *above* the symbol with the exception of the small barcode identified in Table 5, Example C. The human readable text is not encoded; it is represented as follows:

Property of DOT/FAA

Human readable text is to appear *below* the symbol. The human readable text is represented as follows:

**For FAA assets:**

(8004) 0602970 XXXXXXXXX

where XXXXXXXXX is the unique Individual Asset Reference Number assigned by FAA.


**For Contractor Barcoded assets:**

(8004) NNNNNNN XXXXXXXXX

where NNNNNNN is the Contractor's GS1 Company Prefix, and XXXXXXXXX is the unique Individual Asset Reference Number assigned by the Contractor (refer to section 3.4).

**NOTE:** Parentheses and Spaces are not encoded in the label, and are for human readability only.




## 2.4 Asset Label Specifications for 1-D (Linear) Barcodes

	<b>Section 2.4 applies only to linear (1-D) barcode labels.</b>
---	---

The label specifications are provided in Table 4 below. Label samples are also shown in Table 5 below, and are to scale.

<b>Label</b>	<b>X-Dimension (inches)</b>	<b>Quiet Zone (inches)</b>	<b>Label Size (inches)</b>	<b>Bar Height (inches)</b>	<b>Human Readable Minimum Character Height (inches)</b>
A – Large Barcode	0.0100	.100	2.00 x 0.500 with corner radius	0.25	0.063 (6 pt. True Type Arial)
B – Medium Barcode	0.0066	.066	1.38 x 0.375 with corner radius	0.15	0.063 (6 pt. True Type Arial)
C – Small Barcode	0.0066	.066	1.38 x 0.25 with corner radius	0.15	0.063 (6 pt. True Type Arial)

**Table 4: Label specifications**

<b>Description</b>	<b>Sample Labels</b>
A - Large Asset Barcode	
B - Medium Asset Barcode	
C – Small Asset Barcode	

**Table 5: Sample Labels**


The human-readable information on the labels comes from the following sources:

<b>Label Information</b>	<b>Source</b>
(8004)	GS1 Global Individual Application Identifier – this signifies that the barcode is used for the identification of an asset.
0602970	GS1 Company Prefix assigned to the FAA
123456789	Individual Asset reference assigned by FAA to asset (sample value)

**Table 6: Sources of human readable information on 1-D labels**

**NOTE:** DOT/FAA text, Parentheses and Spaces are not encoded in the label, and are for human readability only.

## 2.5 Symbology and Printing Requirements for 2-D (Data Matrix) Barcodes



### 2.5.1 Data matrix symbology

The Data Matrix standard is based on ISO/IEC 15424:2000. For AMS mandated Item Unique Identification (IUID) marking, the minimum mark is a Data Matrix ECC 200 symbol using ISO/IEC 15434 syntax and the semantics of ISO/IEC 15418. The two-dimensional symbol shall be the Data Matrix ECC 200 in accordance with ISO/IEC 16022.

### 2.5.2 Data matrix size

Unless otherwise specified, the module size shall be no smaller than 0.0075 inch (0.19 mm) and no larger than 0.025 inch (0.635 mm). Square symbol sizes shall not exceed one inch (25.4 mm). The larger dimension of rectangular Data Matrix symbols, as permitted by ISO/IEC 16022, shall not exceed one inch. Deviations from the stated module sizes and maximum overall symbol size shall be specified by contract if required. The data elements shall be encoded in the Data Matrix symbol using the syntax of ISO/IEC 15434. For examples, please see section 2.7 below.

### 2.5.3 Data matrix symbol quality

The following provide acceptance criteria for all marking procedures that can be used at the Supplier's choice:

#### 2.5.3.1 ISO/IEC 15415

The symbol shall have a minimum quality grade of 3.0/05/650 measured with an aperture size of 0.005 inch (0.127 mm) with a light source wavelength of 650 nm ± 20 nm. As an exception, the ISO/IEC 15415 parameters Modulation (MOD), Symbol Contrast (SC), or both, may measure as low as 2.0, providing the overall ISO/IEC 15415 grade would be 3.0 if the MOD and SC grades are 3.0 or higher. (This allows for lower contrast substrates, high density images, printing, overlaminates and other such limiting factors to the parameters MOD, SC, or both on otherwise well produced images.) Quality (symbol validation and verification) reports shall clearly show that the MOD, SC, or both, are the only parameters measured as low as 2.0, and clearly show that the overall grade would be at least 3.0 if MOD and SC were at least 3.0. Quality reports shall also document the synthetic aperture size used. The methodology for measuring the print quality shall be as specified in ISO/IEC 15415, where the overall grade is based on a single scan (not five scans).

#### 2.5.3.2 AIM DPM-1-2006

The symbol shall have a minimum quality grade of DPM2.0/7.5-25/650/(45Q|30Q|90|30T|30S|D) where:

1. Minimum quality grade = 2.0

2. X dimension range of the application = 7.5-25 mils
3. Inspection wavelength = 650 nanometers  $\pm$  20 nanometers.
4. Lighting conditions = Medium Angle Four Direction (45Q) or Low Angle Four Direction (30Q) or Diffuse Perpendicular (90) or Low Angle Two Direction (30T) or Low Angle One Direction (30S) or Diffuse Off-axis (D).

#### 2.5.3.3 SAE AS9132

The symbol shall fulfill the visual inspection criteria of “Pass” as defined in AS9132.

#### 2.5.4 Calibration of verification equipment

Due to the absence of a nationally traceable standard to calibrate verification equipment, calibration processes and materials for reflectance criteria provided by the verifier manufacturer are acceptable.

#### 2.5.5 Alternative quality measuring methodologies

If the preceding quality measuring methodologies specified are non-responsive, quality acceptance levels shall be identified within the individual contract or order.

#### 2.5.6 Field overlap

The barcode and the human readable data are separate fields. Each field should not protrude on any other, thereby maintaining the ability to distinguish between them.

### 2.6 Data Requirements for 2-D (Data Matrix) Barcodes

	<b>Section 2.6 applies only to Data Matrix (2-D) barcode labels.</b>
---	--

This section provides details on the data elements that make up the 2-D barcode identification standard.

#### 2.6.1 Symbol Syntax

The grammar, structure, and order of the barcode symbol elements are defined in Table 7:

**FAA ASSET IDENTIFICATION SPECIFICATION**

<b>Data Element</b>	<b>Data Content</b>	<b>Length</b>
Message Header	[ ] >	3
Record separator (RS)	Chr(30)	1
Format Header	05	2
Group separator (GS)	Chr(29)	1
Application Identifier	8004 The Application Identifier (AI) for assets is 8004. It tells the scanning application that the data that follows is an asset number. This prevents common errors, like a serial number being mistaken for an asset number.	4
Company Code Prefix	Unique company identification assigned by GS1 US to members. It ensures the asset number is unique worldwide. The GS1 Company Prefix can be anywhere from 7 to 10 digits. Contractors are responsible for using the contractor's GS1 Company Prefix. If the contractor is not registered with GS1, the FAA may provide use of the FAA GS1 Company Prefix for FAA which is 0602970.	>=7 and =<10
Individual Asset Reference Number	Unique variable length field. The GS1 Company Prefix determines the length of the Individual Asset Reference Number. The Individual Asset Reference Number may be all numeric or alphanumeric. <b>Note:</b> The maximum combined length of the GS1 Company Prefix and Individual Asset Reference Number is 30 digits.	=<23
Record separator (RS)	Chr(30)	1
Format header	12	2
Group separator (GS)	Chr(29)	1
CAGE code prefix	CAG[space] if Mike Monroney Aeronautical Center (MMAC) created the mark MFR[space] if the manufacturer created the mark	4
CAGE code	The Commercial and Government Entity (CAGE) code is a unique identifier assigned to suppliers as well as to government agencies and various organizations.	5
Group separator (GS)	Chr(29)	1
Original part number prefix	PNO[space]	4
Original part number	Part number assigned by the asset manufacturer.	32
Group separator (GS)	Chr(29)	1
Serial sequence number prefix	SEQ[space]	4
Serial sequence number	Serial number assigned by the manufacturer.	20
Record separator (GS)	Chr(30)	1
End of Transmission (EOT)	Chr(4)	1

**Table 7: 2-D barcode syntax**

**Legend:**

Green rows	Message header/trailer
Yellow rows	GS1 Asset Identification (AI) syntax.
Blue rows	ATA Text Element Identifier syntax. TEIs are specified as 4 character identifiers consisting of 3 alphabetic characters followed by a space.
RED TEXT	Literal data

**Example:**

**[ ]><sup>RS</sup>05<sup>GS</sup>80040602970xxxxx<sup>RS</sup>12<sup>GS</sup> CAG 12345<sup>GS</sup>PNO ABC123<sup>GS</sup>SEQ 7890<sup>RSEOT</sup>**

where

<sup>RS</sup> = record separator, Chr(30)

<sup>GS</sup> = group separator, Chr(29)

xxxxxx = individual asset reference number, not to exceed 23 bytes

<sup>EOT</sup> = end of transmission, Chr(4)

**2.6.2 Human readable text**

Human readable text is to appear *above* the symbol with the exception of the small barcode identified in 2.7 below. The human readable text is not encoded; it is represented as follows:

Property of DOT/FAA

Human readable text is to appear *to the left of* the symbol. The human readable text is represented as follows:

CAG (or MFR) CCCCC  
 SEQ SSSSSSS  
 PNO PPPPPPPPPPPPPPP

Where CCCCC is the CAGE code, SSSSSSS is the serial number, and PPPPPPPPPPPPPPP is the part number.

**Note:** The CAGE code will be preceded by CAG if the mark was created by the FAALC, or MFR if the mark was created by the manufacturer.

**2.6.3 Legibility of human readable text**

Legibility shall be as required for human readability. For human-readable information, the recommended minimum character height for human readable text is the equivalent of :

<b>Character Height (Centimeters)</b>	<b>Character Height (Inches)</b>	<b>Character Height (Points)</b>
---	--------------------------------------	--------------------------------------

0.2 cm	0.08 in	5.76 pts
--------	---------	----------

Table 8: Recommended human-readable text heights

Letters shall be capitals without serifs (sans-serif) such as Arial, Futura, Gothic, Trebuchet MS, or other sans-serif font. Numerals shall be Arabic except when Roman numerals are used for type designation per applicable Government or industry specifications and standards. Generating characters by automated processes (e.g., dot peen, laser, interactive graphics systems, or stencils) shall be the preferred method.

2.7 Asset Label Specifications for 2-D (Data Matrix) Barcodes

	<b>Section 2.7 applies only to Data Matrix (2-D) barcode labels.</b>
---	--

The label specifications are provided in Table 9 below. Label samples are also shown, and are to scale.

Size	Example
<p><b>4.2 x 2.5</b> Data Matrix and human readable CAG, SEQ, PNO and UII</p>	
<p><b>2.5 x 1.5</b> Data Matrix and human readable CAG, SEQ, PNO and UII</p>	
<p><b>1.1 x 0.54</b> Data Matrix and human readable CAG, SEQ and PNO</p>	
<p><b>Data Matrix only</b> Data Matrix only with no human-readable text</p>	

**Table 9: Sample 2-D Barcode Labels**

The human-readable information on the labels comes from the following sources:


Label Information	Source
MFR or CAG	CAGE code Text Element Identifier (TEI). A TEI of MFR represents that the manufacturer created mark. A TEI of CAG represents the Mike Monroney Aeronautical Center (MMAC) created the mark.
1U2R7	CAGE code of the asset (sample value)
SEQ	Serial number TEI
MH80312	Serial number of the asset (sample value)
PNO	Original Part Number TEI
F100200300400BP	Original part number of the asset (sample value)

**Table 10: Sources of human readable information on 2-D labels**

Items shall be individually marked as follows:

1. Data Matrix labels shall be printed with white mark and lettering on a black background.
2. Preferred marking includes Data Matrix with human-readable information.
3. Where space is limited, the linear human-readable information may be abbreviated.
4. To accommodate severe space limitations, human-readable information may be omitted from the item.

## 2.8 Material Specifications

	<b>Section 2.8 applies to both linear (1-D) and Data Matrix (2-D) barcode labels.</b>
---	---

### 2.8.1 Resistance

The printed barcode image must be resistant to oils and solvents commonly used in the repair of printed circuit boards, such as water, alcohol, trichlorethane and hydrocarbon based solvents. Labels may be exposed to mechanical scrubbing using these solvents.

### 2.8.2 Specular reflection (substrate, laminate & imaging media)

Specific attention must be paid to the combination of label substrate (e.g., paper, metal, plastic, glass, ceramic, etc.) laminate (such as lacquer, clear tape, plastic over-wrap, etc.) and imaging media (e.g., ink, thermal transfer resin, photographic emulsion, etching, etc.) such that specular reflection is minimized.

### 2.8.3 Composition

The substrate for the asset label may be comprised of a variety of materials such as, but not limited to, bare and painted metals (i.e., steel and aluminum), various plastics, printed circuit boards, glass and wood. **Note:** This will apply if the Lowest Replaceable Unit (LRU) is going through this process.




### 2.8.4 Application temperature

Labels will be applied at temperatures between 50 and 100 degrees Fahrenheit. Once applied the label must retain adhesive properties over an exposure range of -40F to +200F.

### 2.8.5 Service environment

During its service life the label may be exposed to direct sunlight, rain, snow, ice, and to various solvents, degreasers, varnishes, oils, detergents, paints, mineral oil, solder flux and environmental temperatures ranging from -40F to 200F. Asset labels must remain affixed to the asset for the entire duration of the asset's lifetime. Asset labels should be produced so that, when scanned, they will reflect a minimum symbol grade of ANSI 2.0.

## 2.9 Label Placement



### 2.9.1 Label accessibility

Asset identification labels should be located on the asset in a position that is easily accessible and can be read by a barcode scanner while the asset is in normal use. For example, if the rear of an asset is not normally easily accessible while in use, the asset label needs to be located on a side that is easily accessible (e.g., the front of the asset). It is desirable that labels are located close to or adjacent to the manufacturer's identification markings (serial, model, etc) if that location is also easily accessible for scanning.

When items cannot be physically marked (in the case that there is no space for a Data Matrix alone) or tagged due to a lack of marking space or because marking or tagging would have a harmful effect, the detailed marking requirements specified in this section shall be:

1. applied to a supplemental container that may or may not provide item protection, becomes a part of the individual item, and is provisioned and managed as a component of that item, or
2. applied to the unit pack in addition to, or in combination with, the identification marking information specified.

### 2.9.2 Number of labels

Only one FAA asset barcode label is to be affixed to an asset. In the case of replaceable or configurable modules, an asset label should be affixed to each of the lowest replaceable units within the assembly.

### 2.9.3 Application surfaces

Labels are intended to be applied to flat and curved rigid surfaces, which have been degreased and cleaned with solvent. Labels are not intended to be applied to Teflon, delrin, and their related chemical family. Labels should not be placed over manufacturer labels or any silk-screened text designation on the item. Labels should not be placed over any indicators such as diodes (LED's)

nor placed in a fashion that would detract from the utility of usability for which the item was designed or intended to function.

#### 2.9.4 Rough surfaces

It is recommended that labels be located on clean, smooth, flat surfaces where possible, and on surfaces that provide direct visual access for a scanner and its operator. Labels should not be applied to rough surfaces, since these surfaces reduce adhesive performance.

#### 2.9.5 Curved surfaces

It is recommended that labels applied to curved or cylindrical surfaces are applied along the axis of the cylinder to make the barcode visible and able to be scanned. If it is necessary to apply along the radial axis, the curve radius must not be less than 1.5 inches. This practice will ensure readability.

For Data Matrix symbols applied to a curved surface, the overall symbol size shall not exceed more than 32% of the radius (16% of the diameter or 5% of the circumference) associated with the curvature of the surface.


#### 2.9.6 Irregular surfaces

Labels are not intended for irregular or bumpy surfaces, nor should they be applied to spherical surfaces or surfaces composed of compound curves.

#### 2.9.7 Administrative assets


On administrative assets such as furniture and equipment, labels should not be located on decorative surfaces or to any surface subject to routine wear and abrasion.

### 2.10 Replacement of Labels



It is recognized that some asset labels may be exposed to environments so harsh as to render them unreadable after a period of time. For that reason, those personnel tasked with the inventorying assets, per FAA Order 4600.27A, are to ensure that asset labels are successfully scanned, and in the event of an unsuccessful scan the label must be physically replaced and the FAA'S Asset Tracking and Management System should be updated with the new barcode information for the asset.

### 2.11 Unreadable Labels



When a linear or Data Matrix symbol mark is unacceptable (unreadable, in error, etc.) and cannot be removed or otherwise repaired, replaced or re-worked without deleterious effect to the marked item, it shall be crossed out. Linear barcodes are to be crossed out as shown in Figure 1 below

using two diagonal lines crossing each other through the center of the barcode symbol, and also crossing all of the bars making up the symbol:



Figure 1: Crossing out a linear barcode

Data Matrix barcodes are to be crossed out as shown in Figure 2 below using two diagonal lines crossing each other through the center of the Data Matrix symbol and two other lines (one vertical the other horizontal) through the two interrupted frame lines (finder pattern) of the Data Matrix symbol.

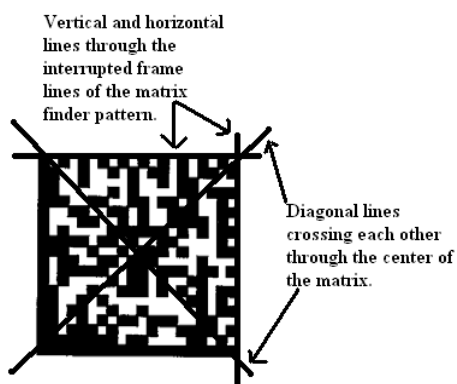


Figure 2: Crossing out a Data Matrix barcode

Placement of a new label shall follow the FAA-approved procedure as specified in the FAA Personal Property Management Process & Procedure Guide, or the applicable FAALC documentation.

### 3 Government and Contractor responsibilities



**Section 3 applies to both linear (1-D) and Data Matrix (2-D) barcode labels.**

This section outlines the responsibilities of the Government (FAA) and contractors in the application of this specification to FAA assets.

#### 3.1 Government asset identification

The Government (FAA) is responsible for providing asset identification for all FAA assets as defined in FAA Order 4600.27A. The FAA is required to provide asset identification for all assets (i.e., assets in the field). Labels produced by the FAA for its assets (or produced by a third party specifically for the FAA's assets) are to conform to the specifications detailed in Section 2 above.

#### 3.2 Contractor asset identification

Contractors are required to provide asset identification for all assets that are delivered. The contractor will also provide an electronic Asset Identification Report per Contract Data Requirements List and Data Item Description (CDRL/DID), which includes the number on the label applied to the asset against which all the attributes of the asset may be recorded in, or extracted from, the FAA's Asset Tracking and Management System.

#### 3.3 Contractor label specifications

Labels applied by contractors will follow the specifications detailed in Section 2 above.

#### 3.4 Contractor GS1 Company Prefix

Contractors are also responsible for using the contractor's GS1 Company Prefix (plus the unique individual asset reference number maintained by the contractor), to meet the labeling performance requirements as specified in this document. If the contractor is not registered with GS1, the FAA may provide use of the FAA Company Prefix and a sequence of Global Individual Asset Identifiers.

## Appendix 1. Definitions

The following definitions apply to the terms used in this appendix.

Term	Definition
ANSI	The American National Standards Institute designates standards submitted by their accredited Standards Development Organizations. The American National Standards Institute designation is awarded after the opportunity for public review and comment, and a certification by the Standards Development Organizations that due process was followed in the development of the standard. GS1 US is an accredited standards development organization.
Application Identifier	The field of two or more characters, at the beginning of a string of data, which uniquely defines its format and meaning. For example, the Application Identifier for assets is 8004; it tells the scanning application that the data that follows is an asset number. This prevents common errors, like a serial number being scanned and mistaken for an asset number.
Asset	In general terms, an asset refers to a useful and valuable item that is owned or leased and is being used or is available for use in performance of FAA's mission.
Individual Asset reference number	A number assigned by the enterprise to an item providing for the differentiation of that item from any other item. The entity responsible for labeling assets is responsible and accountable for not duplicating the individual asset reference number.
HRI	Human Readable Interpretation.
ISO	Worldwide federation of national standards bodies promoting the development of standardization and whose work results in the publication of international standards.
Life Cycle	There are two categories of life cycle: a. Data. The stages through which data pass, typically characterized as creation or collection, processing, dissemination, use, storage, and disposition. b. Information System. The phases through which information systems pass, typically characterized as initiation, development, operation, termination, and decommissioning.
Ongoing reference	For the purpose of this application guideline the terms and definitions given in Section 8, Glossary of Terms, of the <i>General GS1 Specifications</i> shall apply. The <i>General GS1 Specifications</i> is available at the GS1 US website at <a href="http://www.gs1us.org">www.gs1us.org</a> .
Quiet Zone	A clear space on a label, having no machine-readable marks, which precedes the Start Character of a barcode symbol and follows the Stop Character. Formerly referred to as "Clear Area" or "Light Margin."
GS1	GS1 (formerly EAN International), based in Brussels, Belgium, is an

**FAA ASSET IDENTIFICATION SPECIFICATION**

---

	organization of GS1 Member Organizations that co-manages the GS1 System and Global Standards Management Process.
GS1 Company Prefix	The number assigned to a company by GS1 US. The inclusion of the GS1 Company Prefix ensures uniqueness throughout the world.
GS1 US	GS1 US (formerly Uniform Code Council, Inc.) is a not-for-profit organization dedicated to the development and implementation of standards-based, global supply chain solutions.
X- Dimension	The specified width of the narrow element in a barcode symbol; the narrowest nominal width unit of measure in a barcode symbol.

# **FEDERAL AVIATION ADMINISTRATION**

**Version 2.0**

**February 24, 2011**

**Prepared by the:**

**Asset Management and NAS Supply Support Team**

**Technical Operations Service, ATO-W**

**Air Traffic Organization**



## **Asset Identification Contract Data Requirements List and Data Item Description (CDRL/DID)**

**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

---

## Revision History

<b>Author</b>	<b>Date</b>	<b>Version</b>
AFZ-500	12/1/2002	v1.0
AFZ-500	10/1/03	v1.1
AFZ-500	11/18/03	v1.2
AFZ-500	3/16/04	v1.2.1
AMNSS	12/13/04	v1.2.2
AMNSS	1/28/05	v1.2.3
AHW	5/9/06	v1.2.4
AMNSST	5/27/06	V 1.2.5
AMNSST	6/16/06	V 1.2.6
AMNSST	5/1/09	V 1.2.7
AMNSST	7/10/09	V1.2.8
AMNSST	9/21/09	V1.2.9
AMNSST	11/18/09	V1.2.10
AMNSST	2/24/11	V2.0



**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

---

## **Table of Contents**

<b>1</b>	<b>Introduction.....</b>	<b>1</b>
1.1	Purpose.....	1
1.2	Background .....	1
1.2.1	Barcode Specification .....	1
1.2.2	Electronic Asset Data.....	1
1.2.3	Fixed File Format.....	2
<b>2</b>	<b>Instructions.....</b>	<b>3</b>
2.1	Statement of Work .....	3
2.1.1	Asset Identification Report .....	3
2.2	CDRL Items: A0xx Asset Identification Report .....	5
2.3	Data Item Description (DID).....	<b>Error! Bookmark not defined.</b>
2.3.1	Example DID .....	<b>Error! Bookmark not defined.</b>
2.3.2	DID Fields - Contractors.....	5
2.3.3	DID Fields – FAA.....	6
2.4	Asset Identification Label .....	8
	Appendix A - Unit of Issue.....	10

## 1 Introduction

### 1.1 Purpose

This document contains instructions for incorporating the Asset Identification Contract Data Requirements List and Data Item Description (CDRL/DID) for Linear and Data Matrix Barcodes into all Federal Aviation Administration (FAA) personal property asset acquisition contracts.

### 1.2 Background

#### 1.2.1 Barcode Specification

The FAA has adopted a barcode label specification, called FAA Asset Identification Specification, based on GS1 US (formerly Uniform Code Council, Inc.) standards. GS1 US is an international standards based organization that establishes asset identification standards for retail products such as the Uniform Product Code (U.P.C.) as well as other identification standards. The FAA has adopted the GS1 standard for Global Individual Asset Identifier (GIAI). The GS1 Global Individual Asset Identifier (GIAI) is the unique identifier and the pointer to the business critical information necessary to identify and track individual assets. The GIAI has become a pointer to an ever-expanding library of information stored in electronic databases. This GS1 system solution was designed to enable companies and agencies to eliminate duplication of asset numbers, provide tracing and tracking capabilities, facilitate maintenance, and provide asset configuration management and control.

The barcode specification provides for two types of asset identification labels:

- **1-D (or linear) barcode labels**, which encode the GIAI, and
- **2-D (or Data Matrix) barcode labels**, which encode the GIAI as well as manufacturer's CAGE code, part number and serial number.

The requirements in this CDRL-DID apply regardless of which barcode type is used. For an overview of the criteria to determine when each type of label is used, please refer to the Asset Identification Specification, section 2.1.1.

#### 1.2.2 Electronic Asset Data

The FAA identifies delivery of a system to its installation point and initial testing, as the system inception. It is the goal of the FAA to capture all personal property asset movement and service activity from the system inception until system retirement. This CDRL/DID represents the initial characterization, serialization, and capture of asset and system detail. All accountable personal property assets (and, optionally, non-accountable assets), facility equipment, and project materiel assets are recorded in the Automated Inventory Tracking System (AITS) which is the FAA personal property management system of record. The information generated by the contractor is to be delivered to the FAA in electronic format to populate the AITS data fields for a delivered system.

**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

---

**1.2.3 Fixed File Format**

The seed data may be delivered to the FAA via electronic media in the fixed file format, as described in Section 10 of the DID (see section **Error! Reference source not found.**).

## 2 Instructions

This section provides instructions for contract officers and acquisitions staff to communicate FAA's asset identification requirements to potential contractors.

### 2.1 Statement of Work

#### 2.1.1 Asset Identification Report

##### 2.1.1.1 Barcode Symbology Standard

The Contractor shall use the appropriate barcode symbology standard, as described in the Asset Identification Specification document, to identify contract assets at the Lowest Replaceable Unit (LRU) level. For each LRU barcoded asset, the contractor shall provide the following types of information:

- Barcode / Pin number
- Item Description
- Manufacturer's part number
- Manufacturers' serial number
- Manufacturer's CAGE Code
- Year Manufactured
- Cost

##### 2.1.1.2 System-Level Data

The Contractor shall also provide system-level data such as:

- Major system components or enclosures
- Component / enclosure descriptive data
- System configuration
- Any other associated data

##### 2.1.1.3 Examples of Equipment Types

LRU's may consist of circuit boards, modules, cable assemblies, motors, power supplies, etc. Ancillary equipment may consist of personal computer data terminals, displays, test rigs, etc. System components or enclosures may consist of cabinets, mounting assemblies, waveguides, etc.

##### 2.1.1.4 Asset Management Systems

The Contractor is to use an FAA asset management systems or equivalent COTS package to manage the contract asset detail data for each category of asset from point of acquisition to production and delivery.

##### 2.1.1.5 Barcoded Asset Listing

The Contractor will provide a report that contains a listing of all assets that have been identified with a barcode label. The report shall include all of the data elements considered for barcoding as specified in Block 10 of the DID (see Section **Error! Reference source not found.**).

**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

---

***2.1.1.6 Asset Identification Report***

The Contractor will also provide an Asset Identification Report in accordance with the DID (DI-ATO-W-2003-005), Asset Identification Specification documentation, and the CDRL.

**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

**2.2 Contract Data Requirements List and Data Item Description (CDRL/DID)**

**2.2.1 CDRL/DID Fields - Contractors**

Contractors are required to include the following fields (as defined in 10.2.3 of the CDRL/DID preparation instructions) as described below:

<b>Field Name</b>	<b>Type/Length</b>	<b>Required</b>	<b>Description</b>
<b>Asset Barcode</b>	VarChar (38)	Yes	Asset Barcode (See Asset Identification Specification)
<b>National Stock Number</b>	VarChar (13)	Yes	Defense Logistics Information Service assigned National Stock Number
<b>Equipment Description</b>	VarChar (32)	Yes	Asset Name, Nomenclature or Description
<b>Manufacturer</b>	VarChar (36)	Yes	Manufacturer Name
<b>Mfg Part Number</b>	VarChar (32)	Yes	Manufacturer assigned Part Number
<b>CAGE Code</b>	VarChar (5)	Yes	Manufacturer's CAGE Code assigned by Defense Logistics Information Service
<b>Serial Number</b>	VarChar (30)	Yes	Manufacturer assigned Serial Number
<b>Cost</b>	Float	Yes	Acquisition Cost of the item
<b>Source Document</b>	Varchar(30)	Yes	Enter the source document number, generally an invoice, requisition, credit card, contract number or shipping and receiving document number. If you don't know the Source Document Number, enter <b>Unknown</b> .
<b>Year Manufactured</b>	VarChar (4)	Yes	Year Asset Manufactured
Unit of Issue	VarChar (2)	No	The code for the unit of issue e.g. DZ – Dozen. See the complete list below in Appendix A.
PR Number	VarChar (14)	No	FAA Purchase Request Number
<b>Contract/PO number</b>	VarChar (30)	Yes	FAA Contract / Purchase Order Number
Comments	VarChar (255)	No	Additional relevant information about the asset
<b>Parent Barcode</b>	VarChar (38)	Yes	Barcode of the Asset, for which this asset is a sub-assembly. If Parent is N/A the field should contain the Asset Barcode.
<b>Warranty Expiration*</b>	Date(8)	Yes*	The Date (MMDDYYYY) the warranty expires for the item
<b>Photo Identifier*</b>	Digital Photo	Yes*	2 Photos, one of the entire part pointing to the barcode, and one zoomed in photo showing the placement (with specified measurements for location) of the barcode

**Table 1: DID fields for contractors**

**\*Note:** Warranty Expiration and Photo Identifier information is required for assets acquired by the FAA Logistics Center (FAALC)

**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

---

**2.2.2 CDRL/DID Fields – FAA**

For proper tracking in AITS, the FAA acquiring entity must add the following fields to the information provided by the contractor:

<b>Field Name</b>	<b>Type/Length</b>	<b>Required</b>	<b>Description</b>
<b>Region</b>	VarChar(2)	Yes	<p>FAA Region Code for regional identification as listed below:</p> <p>1 EA Eastern Region            2 SW Southwest Region            3 CE Central Region            4 WP Western-Pacific Region            5 AL Alaskan Region            7 SO Southern Region            8 EU Europe, Africa, and Middle East            A AC Mike Monroney Aeronautical Center            C GL Great Lakes Region            E NE New England Region            F VN Aviation Systems Standards            N CT William J. Hughes Technical Center            O UN Unknown            S NM Northwest Mountain Region            W WA Washington Headquarters            Z GU Guest Account</p>
<b>Cost Center</b>	VarChar (8)	Yes	<p><b>FAA Cost Center Code</b> depicts the organization assigned maintenance responsibility. Cost Center is a primary collection point. It identifies the benefiting or administering organizational element. The Cost Center codes may represent an organization, a function, geographical section or a combination of these elements. The codes are structured to facilitate the collection and summarization of obligations and costs within the FAA for various management purposes. When used in combination with the region code, the element is unique within the agency.</p>
<b>Asset Type</b>	Varchar(1)	Yes	<p>Asset Type code identification as listed below:</p> <p>1 – Line Item Accountable            2 – Barcoded Facility Equipment            3 – Facility Value</p>
<b>Location ID</b>	VarChar (4)	Yes	<p>Location Identifier is a three or four character field that represents the city and state assigned to that identifier where the equipment is physically located</p>

**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

<b>Facility Type</b>	VarChar (5)	Yes	Facility Service Equipment Profile assigned Location Identifier is a 5-digit alpha abbreviation representing a NAS facility, e.g., "ATCT" representing an Air Traffic Control Tower, or "ILS" representing an Instrument Landing System.
FIC	Varchar(5)	No	The System/Facility Identification Code is made up of a one-character numeric field representing the system code and a four-character alphanumeric field representing the capacity, type and model code.
<b>Location 1</b>	VarChar(30)	Yes	Location of the item within the facility, e.g. Address
<b>Location 2</b>	VarChar(30)	Yes	More specific location of the item within the facility, e.g. Room #/floor
<b>Location 3</b>	VarChar(30)	Yes	Exact location of the item within the facility, e.g. John Doe Cube/office number/desk
<b>Test Equipment</b>	Boolean	Yes	Indicates whether the item is test equipment
<b>Delphi Asset Number</b>	Varchar(30)	No	Asset Identifier used by the Delphi system
<b>Accountability</b>	Bit	Yes	Select either Accountable or Non-Accountable from the drop-down box based on whether the item meets or doesn't meet the criteria for an accountable item. 0 – Non-Accountable 1 – Accountable
Justification	Varchar(100)	No	If Unknown is checked, you must enter a reason why you don't have a Source Document Number.
Job Order Number	VarChar (5)	No	Corporate Work Plan (formerly known as Resource Tracking Program) assigned Job Order Number
Fund Source	VarChar(1)	No	The source of the funding, as listed below: 1 - National 2- Regional 3 - Other
Fund Source Comment	VarChar(30)	No	Explanation if the Fund Source is Other, e.g., picked up from excess
<b>F &amp; E</b>	Boolean	Yes	Indicates whether the item is facility Equipment
<b>Ownership</b>	Varchar(1)	Yes	These codes indicate who owns the property and are identified as listed below: 1 FAA owned (FAA maintained) 2 FAA owned (Loaned to military) 3 FAA owned (Loaned to civil agency) 4 FAA owned (Loaned to contractor) 5 Military owned (FAA maintained & supported) 6 Military owned (FAA supply support only) 7 Contractor owned (FAA operated) 8 Owned by others (FAA operated -



**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

			leased) 9 FAA borrowed and reloaned A Federal Aviation Administration (FAA) B Department of Defense (DoD) C Other Federal Agency D State Government E Local Government F Foreign Government G Domestic Private Organization I Federal Aviation Administration (FAA) J Federal Aviation Administration (FAA) K Department of Defense (DoD) L Other Federal Agency M State Government N Local Government O Foreign Government P Domestic Private Organization Q Foreign Private Organization R Department of Defense (DoD) S Federal Aviation Administration (FAA) T Department of Defense (DoD) U Other Federal Agency V State Government W Local Government Y Domestic Private Organization
Condition Code	VarChar(1)	No	The code that best describes the condition of the item, as listed below: 1 - New or Unused 4 - Usable - property that shows some wear 7 - Unusable, but economically repairable R - Repairable S - Scrap V - Serviceable X - Salvage - repair uneconomical
System Name	VarChar(25)	No	The name of the system that the item is associated with.
<b>Date Received</b>	Date (8)	Yes	The date the item was received
Remarks	Varchar(450)	No	Additional information regarding the item
Field Spare	Boolean	Yes	Indicates whether the item is part of the field spare inventory

**Table 2: DID fields for FAA acquiring entities**

### 2.3 Asset Identification Label

See the Asset Identification Specification (in the previous section of this document) for complete label and identification specifications. Documents are available from the AM&NSST website at

**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

---

[https://intranet.faa.gov/FAAEmployees/org/linebusiness/ato/operations/technical\\_operations/amsst/](https://intranet.faa.gov/FAAEmployees/org/linebusiness/ato/operations/technical_operations/amsst/) .

**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

---

## Appendix A - Unit of Issue

The following is the list of Unit of Issue codes and descriptions:

<b>Unit of Issue Code</b>	<b>Description</b>
ID	UNKNOWN
AT	ASSORTMENT
AY	ASSEMBLY
BA	BALL
BC	BLOCK
BD	BUNDLE
BE	BALE
BG	BAG
BK	BOOK
BO	BOLT
BR	BAR
BT	BOTTLE
BX	BOX
CA	CARTRIDGE
CE	CONE
CK	CAKE
CL	COIL
CN	CAN
CO	CONTAINER
CS	CASE
CT	CARTON
CY	CYLINDE
DR	DRUM
DZ	DOZEN
EA	EACH
FT	FOOT
FV	UNKNOWN
FY	UNKNOWN
GL	GALLON
GR	GROSS
HD	HUNDRED
HK	HANK
IN	INCH
JR	JAR
KT	KIT
LB	POUND
LG	LENGTH
LI	LITER
LT	LOT

**ASSET IDENTIFICATION CONTRACT DATA  
REQUIREMENTS LIST AND DATA ITEM DESCRIPTION (CDRL/DID)**

---

<b>Unit of Issue Code</b>	<b>Description</b>
MX	THOUSAND
OT	OUTFIT
OZ	OUNCE
PA	PAPER
PC	PIECE
PD	PAD
PE	PECK
PG	PACKAGE
PK	PACK
PL	PAIL
PR	PAIR
PT	PINT
PZ	PACKET
QT	QUART
RA	UNKNOWN
RL	REEL
RM	REAM
RO	ROLL
RX	UNKNOWN
SA	SACK
SE	SET
SF	SQUARE FOOT
SH	SHEET
SK	SKEIN
SL	SPOOL
SP	UNKNOWN
SX	STICK
SY	SYSTEM
TD	UNKNOWN
TE	UNKNOWN
TF	UNKNOWN
TN	TON
TO	TROY OUNCE
TU	TUBE
VC	500
XX	TEN
YD	YARD