MEMPHIS
LEGEND

SOUTH ◀ ▶ NORTH

Airports having Control Towers are shown in Blue, all others in Magenta. Consult Chart Supplement for details involving airport lighting, navigation aids, and services. All times are local. For additional symbol information refer to the Chart User's Guide.

AIRPORTS

- Other than hard-surfaced runways
- Seaplane Base
- Hard-surfaced runways 1500 ft. to 8069 ft. in length
- Hard-surfaced runways greater than 8069 ft. or some multiple runways less than 8069 ft.
- Open dot within hard-surfaced runway configuration indicates approximate VOR, VOR-DME, or VORTAC location.

All recognizable hard-surfaced runways, including those closed, are shown for visual identification. Airports may be public or private.

ADDITIONAL AIRPORT INFORMATION

- Private "(Pvt)" - Non-public use having emergency or landmark value
- Military - Other than hard-surfaced, all military airports are identified by abbreviations AFB, NAS, AAF, etc.
- Heliport Selected
- Unverified
- Abandoned - paved having landmark value, 3000 ft. or greater
- Ultralight Flight Park Selected

Fuel - available Mon thru Fri 10:00 A.M. to 4:00 P.M. depicted by use of ticks around basic airport symbol. Consult Supplement for details and for availability at airports with hard-surfaced runways greater than 8069 ft.

★ Rotating airport beacon in operation Sunset to Sunrise

OBJECTIONABLE - Airport may adversely affect airspace use.

AIRPORT DATA

Box indicates FAR 93 Special Air Traffic Rules & Airport Traffic Patterns. Runways with Right Traffic Patterns (public use)

FSS / NO SVFR / NAME (NAM) (PNAM) / CT - 118.3 ★ ⓒ ATIS 123.8 / 285 L 72 122.95 / RP 23, 34 / VFR Advsy 125.0 / AOE

FAR 91 / Location Identifier / ICAO Location Indicator shown outside contiguous U.S. / UNICOM / Airport of Entry

RP ✱ Special conditions exist - see Supplement.

FSS - Flight Service Station

NO SVFR - Fixed-wing special VFR flight is prohibited.

CT - 118.3 - Control Tower (CT) - primary frequency

★ - Star indicates operation part-time. See tower frequencies tabulation for hours of operation.

ⓒ - Follows the Common Traffic Advisory Frequency (CTAF)

ATIS 123.8 - Automatic Terminal Information Service

ASOS/AWOS 135.42 - Automated Surface Weather Observing Systems (shown where full-time ATIS not available). Some ASOS/AWOS facilities may not be located at airports.

UNICOM - Aeronautical advisory station

VFR Advsy - VFR Advisory Service shown where full-time ATIS not available and frequency is other than primary CT frequency.

285 - Elevation in feet

L - Lighting in operation Sunset to Sunrise

*L - Lighting limitations exist; refer to Supplement.

72 - Length of longest runway in hundreds of feet; usable length may be less.

When information is lacking, the respective character is replaced by a dash. Lighting codes refer to runway edge lights and may not represent the longest runway or full length lighting.

AIRPORT TRAFFIC SERVICE AND AIRSPACE INFORMATION

Only the controlled and reserved airspace effective below 18,000 ft. MSL are shown.

- Class B Airspace
- Class C Airspace (Mode C - see FAR 91.215/AIM.)
- Class D Airspace
- 40 - Ceiling of Class D Airspace in hundreds of feet (A minus ceiling value indicates surface up to but not including that value.)
- Class E (sfc) Airspace
- Class E Airspace with floor 700 ft. above surface that laterally abuts Class G Airspace
- CLASS G
- Class E Airspace with floor 700 ft. above surface that laterally abuts 1200 ft. or higher Class E Airspace
- Class E Airspace with floor 1200 ft. or greater above surface that laterally abuts Class G Airspace
- 2400 MSL / 4500 MSL - Differentiates floors of Class E Airspace greater than 700 ft. above surface.

Class E Airspace exists at 1200' AGL unless otherwise designated as shown above.

Class E Airspace low altitude Federal Airways are indicated by center line.

Intersection - Arrows are directed towards facilities which establish intersection.

132° V 69

Total mileage 169 between NAVAIDs on direct Airways

Class E Airspace low altitude RNAV 2 Routes are indicated by center line.

T 319 / TK 313 (Helicopter Only) / RNAV Waypoint

- Prohibited, Restricted, and Warning Areas; Canadian Advisory, Danger, and Restricted Areas
- Alert Area and MOA - Military Operations Area
- Special Airport Traffic Area (See FAR 93 for details.)
- ADIZ - Air Defense Identification Zone
- MODE C (See FAR 91.215/AIM.)
- National Security Area
- Terminal Radar Service Area (TRSA)
- MTR - Military Training Route

COMMUNICATION BOXES

122.1R 122.6 123.6 / OAKDALE / 362 OAK / 122.1R CHICAGO CHI

- Underline indicates no voice on frequency.
- Crosshatch indicates Shutdown status.
- ★ - Operates less than continuous or On-Request.
- Ⓐ - ASOS/AWOS
- Ⓗ - HIWAS

Heavy line box indicates Flight Service Station (FSS). Frequencies 121.5, 122.2, 243.0 and 255.4 (Canada - 121.5, 126.7 and 243.0) are available at many FSSs and are not shown above boxes. All other frequencies are shown.

R - Receive only

FSS radio providing voice communication: 122.1R MIAMI

Frequencies above this thin line box are remoted to NAVAID site. Other FSS frequencies providing voice communication may be available as determined by altitude and terrain. Consult Supplement for complete information.

RADIO AIDS TO NAVIGATION

- VHF OMNI RANGE (VOR)
- VORTAC
- VOR-DME
- DME
- Other facilities, i.e., FSS Outlet, RCO, etc.
- Non-Directional Radio Beacon (NDB)
- NDB - DME

OBSTRUCTIONS

- 1000 ft and higher AGL
- Wind Turbine
- Wind Turbine Farm
- Above 200 ft & below 1000 ft AGL (above 299 ft AGL in urban area)
- Group Obstruction
- 2894' UC
- Elevation of the top above mean sea level 2049 / Height above ground (1149) / Under construction or reported; position and elevation unverified UC
- Obstruction with high-intensity lights; may operate part-time
- NOTICE: Guy wires may extend outward from structures.

MISCELLANEOUS

- A - Aerobatic Practice Area (See Supplement.)
- G - Glider Operations
- H - Hang Glider Activity
- U - Ultralight Activity
- Unmanned Aircraft Activity
- Parachute Jumping Area (See Supplement.)
- STADIUM - Intermittent TFR site (within 3 NM, up to & incl 3000' AGL)
- Marine Light
- VPXYZ - VFR Waypoints (See chart tabulation for latitude/longitude.)
- VPXYZ - NAME (VPXYZ)
- Space Launch Activity Area (See Supplement.)
- –1°E– Isogonic Line (2015 VALUE)

TOPOGRAPHIC INFORMATION

- Power Transmission Line
- Aerial Cable
- Lookout Tower 618 (Elevation Base of Tower)
- Mountain Pass 11823 (Elevation of Pass)

Pass symbol does not indicate a recommended route or direction of flight and pass elevation does not indicate a recommended clearance altitude. Hazardous flight conditions may exist within and near mountain passes.

SOUTH ◀ ▶ NORTH

MEMPHIS SECTIONAL
SECTIONAL AERONAUTICAL CHART SCALE 1:500,000

Federal Aviation Administration

97TH EDITION EFFECTIVE 0901Z 15 SEP 2016
TO 0901Z 30 MAR 2017

Includes airspace amendments effective 15 SEP 2016
and all other aeronautical data received by 21 JUL 2016

Information on this chart will change; consolidated major updates of chart changes are available every 56 days in the CHART SUPPLEMENT Aeronautical Chart Bulletin section (online at http://faa.gov/go/ais). Also consult appropriate NOTICES TO AIRMEN (NOTAMs) and other FLIGHT INFORMATION PUBLICATIONS (FLIPs) for the latest changes. Consult/Subscribe to FAA Safety Alerts and Charting Notices at: http://www.faa.gov/air_traffic/flight_info/aeronav/safety_alerts/

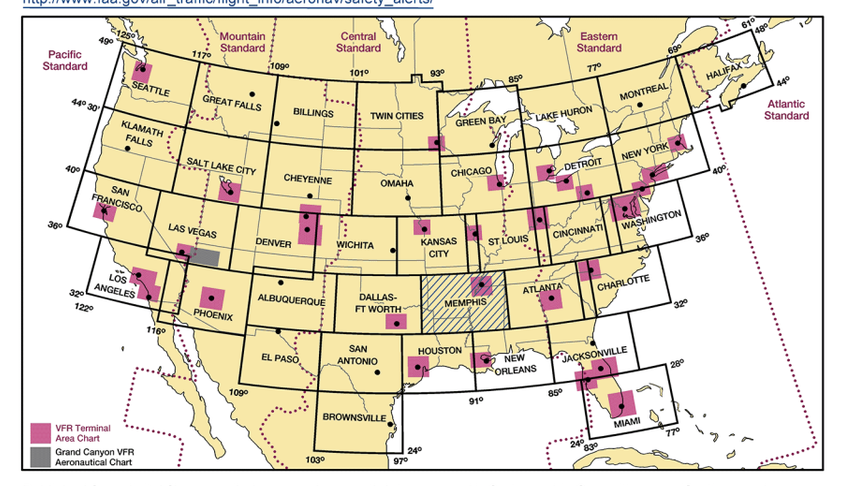

Published from digital files compiled in accordance with Interagency Air Cartographic Committee specifications and agreements approved by Department of Defense - Federal Aviation Administration.

Warning: Refer to current foreign charts and flight information publications for information within foreign airspace.

FAA Product ID: SMEM
NSN 7641014100162
NGA REF. NO. SECXXMEMPHIS
EFF. DATE 16259

PLOTTING DIRECT ROUTE ON NORTH/SOUTH SIDE

There are approximately two minutes of latitude overlap between the north and south sides of each sectional/WAC chart. To plot a course line from one side to the other, the user must first locate two pair of corresponding latitude tick marks, one pair on each side of the chart and follow the steps below.

STEP 1 - Draw a horizontal line (MATCH LINE) between each pair of corresponding latitude tick marks on each side of the chart just to the left or right of where your plot line crosses. (Figure 1)

STEP 2 - Decide which side of the chart has the departure or destination point closer to the edge of the chart. On that side, line up a blank piece of paper along the MATCH LINE (the paper should be completely on the chart, not extending beyond its edge).

STEP 3 - Slide the paper sideways left or right so that a side edge of the paper aligns with the departure or destination point (POINT A). Make a MARK A on edge of the paper where it meets that point.

STEP 4 - Without moving the paper, on the same edge as MARK A, extend a short line on the chart from the corner of the paper where it meets the MATCH LINE out to the edge of the chart. Make that LINE B.

STEP 5 - Turn the chart over and transfer the end of LINE B to the other side, and extend it straight to the MATCH LINE. (Figure 2)

STEP 6 - Take the sheet of paper with MARK A on it and align the (top or bottom) edge of the paper with the MATCH LINE and side edge with LINE B with the bulk of the sheet extending off of the chart. Plot a line from MARK A to the departure or destination point (POINT B).

STEP 7 - Where your plot line crosses the MATCH LINE make a MARK C. Extend a line straight from that mark to the edge of the chart.

STEP 8 - Turn the chart back over and transfer MARK C to that side and extend it to the MATCH LINE. Plot a line from MARK C to the destination. (Figure 3)

Figure 1: NORTH SIDE, Sheet of paper, POINT A, MARK A, MATCH LINE, Overlap area, LINE B

Figure 2: same latitude, LINE B (transferred), Overlap area, MARK A, MATCH LINE, MARK C, SOUTH SIDE, POINT B

Figure 3: NORTH SIDE, POINT A, LINE B, MARK C (transferred), MATCH LINE, Overlap area

CONTROL TOWER FREQUENCIES ON MEMPHIS SECTIONAL CHART

Airports with control towers are indicated on the face of the chart by the letters CT followed by the primary VHF tower frequency(ies). Information for each tower is listed in the table below. Operational hours are local time. The primary VHF and UHF tower and ground control frequencies are listed.

Automatic Terminal Information Service (ATIS) frequencies shown on the face of the chart are arrival VHF/UHF frequencies. All ATIS frequencies are listed in the table below. ATIS operational hours may differ from tower operational hours.

ASR and/or PAR indicate Radar Instrument Approach available.
"MON-FRI" indicates Monday through Friday.
O/T indicates other times.

CONTROL TOWER	OPERATES	TOWER	GND CON	ATIS	ASR/PAR
BARKSDALE AFB	CONTINUOUS CLSD HOL	128.25 278.3	121.8 253.5	307.025	ASR
BILL AND HILLARY CLINTON NATIONAL/ADAMS	CONTINUOUS	118.7 257.8	121.9 339.8	125.65	ASR
COLUMBUS AFB	0700-1900 MON-FRI 1000-1700 SUN CLSD HOL	126.65 379.925	121.9 275.8	115.2 273.5	
DRAKE	0600-2200	128.0 371.9	121.8	119.575	ASR
EAST TEXAS RGNL	0600-2200	119.2 277.05	121.6	119.65	
FORT SMITH RGNL	0530-2300	118.3 323.175	121.9 275.8	126.3	ASR
GOLDEN TRIANGLE RGNL	0600-2000	118.2 298.875	135.375 322.475	126.375	
GREENVILLE MID-DELTA	0700-1900	119.0 256.9	121.8 256.9		
GREENWOOD-LEFLORE	0800-1800	118.35 367.6	125.55 373.4		
HAWKINS	0700-2100	119.65 257.8	121.9 239.0		
JACKSON-MEDGAR WILEY EVERS INTL	0600-2300	120.9 352.0	121.7 348.6	121.05	ASR
KEY	0600-2200 O/T BY NOTAM	133.975 257.8	121.9 348.6	126.475 291.675	ASR/PAR
LITTLE ROCK AFB	CONTINUOUS CLSD HOL FROM 2100 PRECEDING DAY—0700 SUCCEEDING DAY MON HOL CLSD 2300 PRECEDING FRI—0700 SUCCEEDING TUES CLSD 2100 22 DEC—0700 26 DEC AND 2100 30 DEC—0700 2 JAN	120.6 269.075	132.8 275.8	119.175 251.1	
MC KELLAR-SIPES RGNL	0700-1900	127.15 249.95	120.9		
MEMPHIS INTL	CONTINUOUS	118.3 (RWY 9/27) 119.7 (RWYS 18C/36C & 18L/36R) 128.425 (RWY 18R/36L) 257.8	121.0 (RWY 9/27) 121.65 (RWY 18R/36L) 121.9 (RWYS 18C/36C & 18L/36R) 379.2	127.75	
MERIDIAN NAS (MC CAIN)	0700-2300 MON-THUR 0700-1700 FRI CLSD HOL EXC BY NOTAM	126.2 340.2 (RWYS 1L, 19L & 28) 360.2 (RWYS 1R, 19R & 10)	336.4	290.525	ASR/PAR
MILLINGTON RGNL	0900-0200 MON 0530-0200 TUE-FRI 0530-1900 SAT-SUN	120.25 340.2	121.375		
MONROE RGNL	0600-2200	118.9 257.8	121.9	125.05	ASR
OLIVE BRANCH	0700-2100	125.275	121.2	119.925	
SHREVEPORT DOWNTOWN	0700-2200	120.225 284.6	121.65		
SHREVEPORT RGNL	CONTINUOUS	121.4 236.775	121.9 236.775	128.45	ASR
SPRINGDALE	0600-2100	118.2	121.6		
TEXARKANA RGNL-WEBB	0600-2200	123.875 235.625	119.225	120.2	
TUPELO RGNL	0600-2200	118.775 254.275	121.825 254.275		
WILLIAMS NOLF	0800-1730 MON-FRI	118.475 279.2			ASR

CLASS B, CLASS C, TRSA, AND SELECTED APPROACH CONTROL FREQUENCIES

FACILITY	FREQUENCIES	SERVICE AVAILABILITY
MEMPHIS CLASS B	125.8 338.3 (356°-175°) 119.1 291.6 (176°-355°)	CONTINUOUS
COLUMBUS AFB CLASS C	132.025 134.55 350.3 (090°-165°) 135.6 323.275 (165°-310°) 126.075 239.25 (310°-090°) O/T 127.1 MEMPHIS CNTR	0700-1900 MON-FRI 1000-1700 SUN CLSD HOL O/T CLASS G
JACKSON CLASS C	123.9 317.7 (333°-152°) 125.25 319.2 (153°-332°) O/T 132.5 259.1 MEMPHIS CNTR	0600-2300 O/T CLASS E
LITTLE ROCK CLASS C	135.4 353.6 (040°-219°) 119.5 306.2 (220°-039°)	CONTINUOUS
SHREVEPORT CLASS C	119.9 335.55 (153°-319°) 123.75 360.725 (320°-152°)	CONTINUOUS
FORT SMITH TRSA	120.9 343.75 O/T 126.1 269.0 MEMPHIS CNTR	0530-2300
LONGVIEW TRSA	124.275 257.975 (EAST AT OR BELOW 4000') 124.675 128.75 282.225 379.15 (WEST AT OR BELOW 5000') 127.325 (AT OR ABOVE 4500') O/T 126.325 346.25 FORT WORTH CNTR	0600-2200
MONROE TRSA	126.9 (180°-359°) 118.15 (360°-179°) 307.9 O/T 126.325 346.25 FORT WORTH CNTR	0600-2200
LITTLE ROCK AFB	119.5 306.2	CONTINUOUS
MERIDIAN NAS (MC CAIN)	119.2 348.7 (E) 120.5 269.6 (S) 120.95 276.4 (W) 379.575 (N) O/T 125.975 351.7 MEMPHIS CNTR	0700-2300
WILLIAMS NOLF	276.4	0700-2300

SPECIAL USE AIRSPACE ON MEMPHIS SECTIONAL CHART

Unless otherwise noted altitudes are MSL and in feet. Time is local. "TO" an altitude means "To and including." FL - Flight Level. NO A/G - No air to ground communications. Contact Flight Service for information.

† Other times by NOTAM. NOTAM - Use of this term in Restricted Areas indicates FAA and DoD NOTAM systems. Use of this term in all other Special Use areas indicates the DoD NOTAM system.

U.S. P-PROHIBITED, R-RESTRICTED, W-WARNING, A-ALERT, MOA-MILITARY OPERATIONS AREA

NUMBER	ALTITUDE	TIME OF USE	CONTROLLING AGENCY/ CONTACT FACILITY	FREQUENCIES
R-2401 A, B	TO 30,000	SR-SS†	MEMPHIS CNTR	
R-2402 A	TO 10,000	SR-SS†	MEMPHIS CNTR	
R-2402 B	10,000 TO BUT NOT INCL FL 220	SR-SS†	MEMPHIS CNTR	
R-2402 C	13,000 TO BUT NOT INCL FL 220	SR-SS†	MEMPHIS CNTR	
R-2403 A, B	TO 16,000	BY NOTAM 24 HRS IN ADVANCE	MEMPHIS CNTR	
R-4404 A	TO 11,500	0700-1800 INTERMITTENT †24 HRS IN ADVANCE	MEMPHIS CNTR	
R-4404 B	1200 AGL TO 11,500	0700-1800 INTERMITTENT †24 HRS IN ADVANCE	MEMPHIS CNTR	
R-4404 C	11,500 TO 14,500	0700-1800 INTERMITTENT †24 HRS IN ADVANCE	MEMPHIS CNTR	
A-440	TO 6500	SR TO 3 HRS AFTER SS MON-FRI SAT-SUN BY NOTAM	NO A/G	
A-443	TO 4000	SR-SS MON-FRI†	NO A/G	

MOA NAME	ALTITUDE*	TIME OF USE†	CONTROLLING AGENCY/ CONTACT FACILITY	FREQUENCIES
ANNE HIGH	7000	SR-SS MON-FRI	FORT WORTH CNTR	123.92 269.47 132.32 346.25
ANNE LOW	100 AGL TO BUT NOT INCL 7000	SR-SS MON-FRI	FORT WORTH CNTR	123.92 269.47 126.32 346.25
ARROWHEAD	100 AGL	0500-2000 MON-FRI	MEMPHIS CNTR	
BIRMINGHAM	10,000	0700-2200	ATLANTA CNTR	
BIRMINGHAM 2	500 AGL TO BUT NOT INCL 10,000	0700-2200	ATLANTA CNTR	
CAMDEN RIDGE	500 AGL TO BUT NOT INCL 10,000	0700-2300	ATLANTA CNTR	
COLUMBUS 1, 2, 3	8000	SR-SS NORMALLY MON-FRI	MEMPHIS CNTR	
COLUMBUS 4	10,000	SR-SS NORMALLY MON-FRI	MEMPHIS CNTR	
HACKETT	7000	0730-2200 MON-FRI	MEMPHIS CNTR	126.32 265.25 128.2 269.1
HOG HIGH NORTH	6000	0500-2000 MON-FRI	MEMPHIS CNTR	125.47 316.05
HOG HIGH SOUTH	6000	0500-2000 MON-FRI	MEMPHIS CNTR	132.42 323.25
HOG LOW NORTH	100 AGL TO BUT NOT INCL 6000	0500-2000 MON-FRI	MEMPHIS CNTR	126.1 269.0
HOG LOW SOUTH	100 AGL TO BUT NOT INCL 6000	0500-2000 MON-FRI	MEMPHIS CNTR	128.47 277.15
JENA	100 AGL TO 5000	0800-2200 MON-FRI	HOUSTON CNTR	
MERIDIAN 1 EAST	8000	SR-SS NORMALLY MON-FRI	MEMPHIS CNTR	
MERIDIAN 1 WEST	8000	SR-2300 INTERMITTENT SUN-FRI	MEMPHIS CNTR	
MERIDIAN 2 EAST, WEST	8000	0700-2200 MON-FRI	MEMPHIS CNTR	
PINE HILL EAST, WEST	10,000	0700-2200 MON-FRI 0800-1500 SAT	MEMPHIS CNTR	
RIVERS	7000	0700-2000 MON-FRI	FORT WORTH CNTR	124.87 307.3 132.2 338.35
SHIRLEY A, B	11,000	0700-1200 & 1300-1700 MON-FRI	MEMPHIS CNTR	
SHIRLEY C	11,000	BY NOTAM	MEMPHIS CNTR	

*Altitudes indicate floor of MOA. All MOAs extend to but do not include FL 180 unless otherwise indicated in tabulation or on chart.
†Other times by DoD NOTAM.

MEMPHIS

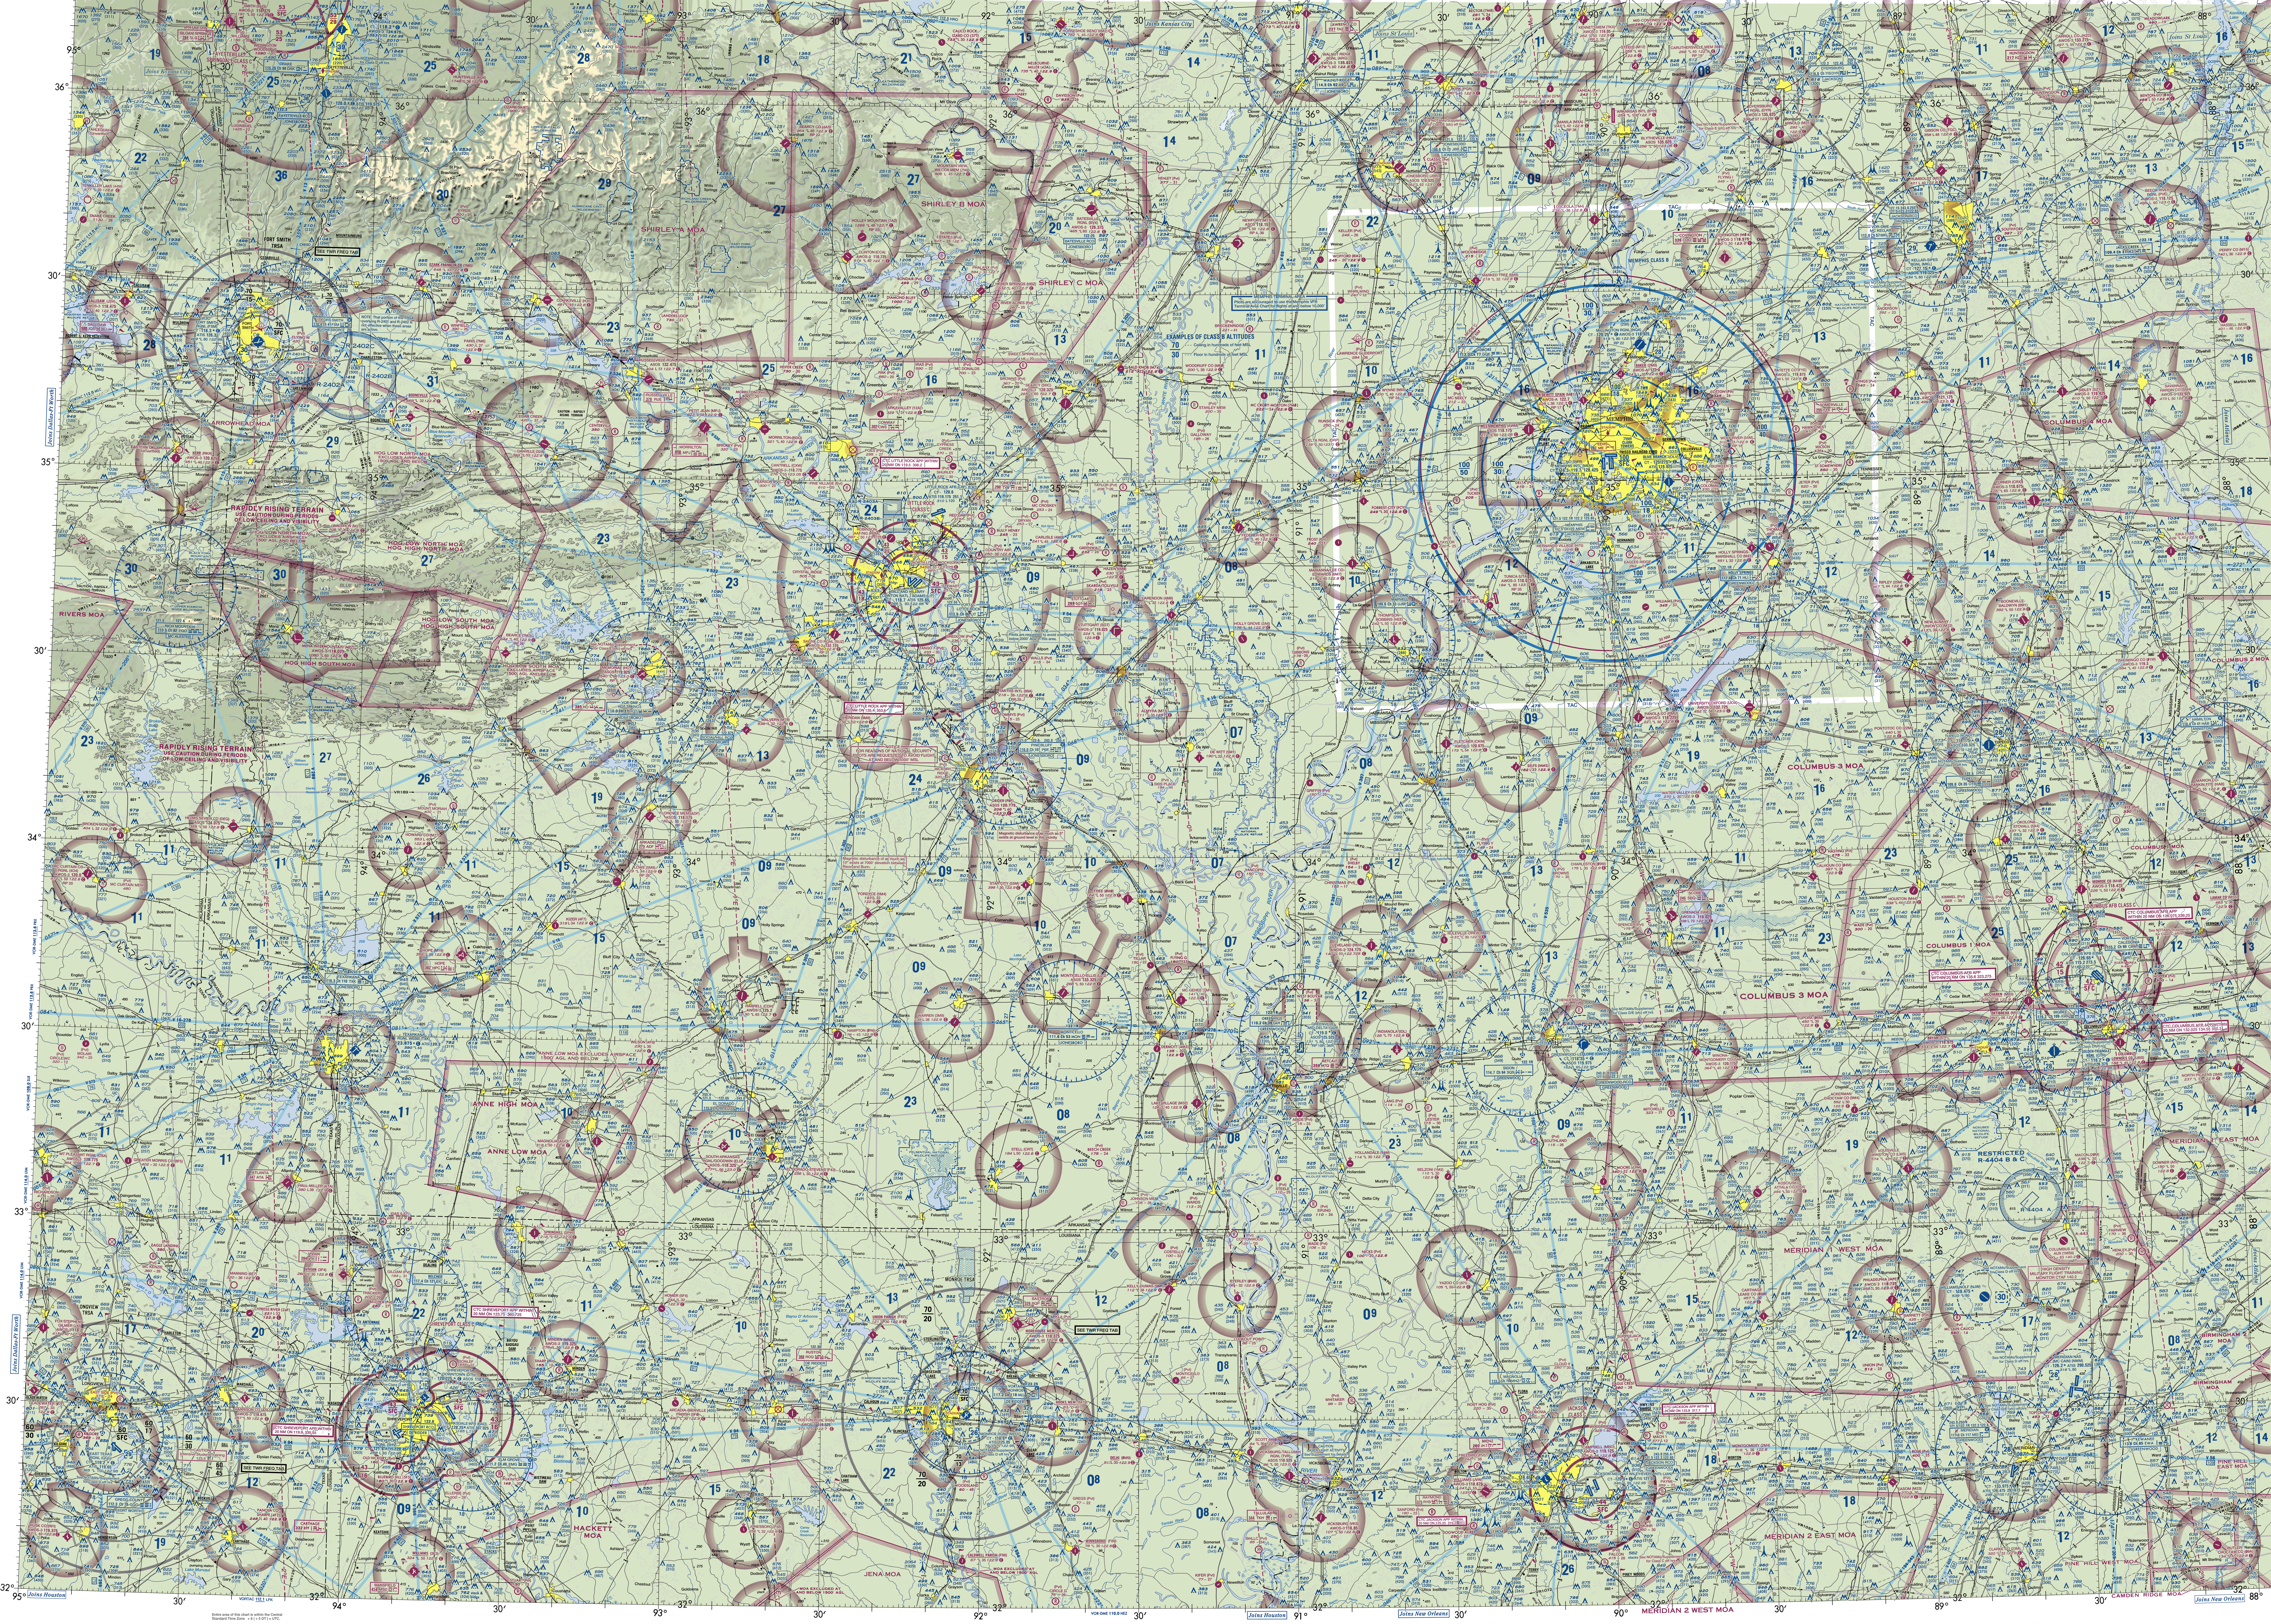

Entire area of this chart is within the Central Standard Time Zone + 6 (+5 DT) = UTC.

NAUTICAL MILES / STATUTE MILES / KILOMETERS

Lambert Conformal Conic Projection Standard Parallels 33° 20' and 38° 40'
Horizontal Datum: North American Datum of 1983 (World Geodetic System 1984)

Features normally used as checkpoints for controlling VFR traffic are emphasized on this series of charts so they may be readily identified.

Example: POWER PLANT

The name shown is that used by the controlling personnel and is not necessarily the official name of the feature.

CAUTION: This chart is primarily designed for VFR navigational purposes and does not purport to indicate the presence of all power transmission and telecommunication lines, terrain or obstacles which may be encountered below reasonable and safe altitudes.

MILITARY TRAINING ROUTES (MTRs)

All IR and VR MTRs are shown, and may extend from the surface upwards. Only the route centerline, direction of flight along the route, and the route designator are depicted - route widths and altitudes are not shown.

Since these routes are subject to change every 56 days, you are cautioned and advised to contact Flight Service for route dimensions and current status for those routes affecting your flight.

Routes with a change in the alignment of the charted route centerline will be indicated in the Aeronautical Chart Bulletin of the Chart Supplement.

DoD users refer to Area Planning AP/1B Military Training Routes North and South America for current routes.

CAUTION: Severe turbulence may occur over rugged terrain. See AIM.

ATTENTION

THIS CHART CONTAINS MAXIMUM ELEVATION FIGURES (MEF). The Maximum Elevation Figures shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The MEF is based on information available concerning the highest known feature in each quadrangle, including terrain and obstructions (trees, towers, antennas, etc.).

Example: 12,500 feet 12⁵

Flight Following Services are available on request and highly recommended in and around Class B, C, and TRSA areas.

CONVERSION OF ELEVATIONS

FEET (Thousands) / METERS (Thousands)

CONTOUR INTERVAL 500 feet
Intermediate contours 250 feet

HIGHEST TERRAIN elevation is 2753 feet located at 35° 10'N - 93° 39'W

Spot elevation 4254
Approximate elevation 3200

2753 / 2000 / 1000 / Sea Level

REPORTING CHART ERRORS

You are requested to inform us of chart errors and/or additions that come to your attention while using this chart. Frequently asked questions (FAQs) are answered on our website at http://faa.gov/go/ais. See the FAQs prior to contact via toll free number or email. Telephone toll free at 1-800-638-8972, or email us at 9-AMC-Aerochart@faa.gov or mail to: FAA, Aeronautical Information Services, Customer Operations Team, 1305 East-West Highway, SSMC 4, Suite 4400, Silver Spring, MD 20910-3281.

FOR PROCUREMENT: For digital products, visit http://www.faa.gov/air_traffic/flight_info/aeronav/digital_products/
For a list of approved FAA Print Providers, visit our website at: http://www.faa.gov/air_traffic/flight_info/aeronav/print_providers/

REGULATIONS REGARDING FLIGHTS OVER CHARTED NATIONAL PARK SERVICE AREAS, U.S. FISH AND WILDLIFE SERVICE AREAS AND U.S. FOREST SERVICE AREAS

The landing of aircraft is prohibited on lands or waters administered by the National Park Service, U.S. Fish and Wildlife Service or U.S. Forest Service without authorization from the respective agency. Exceptions include: 1) when forced to land due to an emergency beyond the control of the operator, 2) at officially designated landing sites, or 3) on approved official business of the Federal Government.

All aircraft are requested to maintain a minimum altitude of 2,000 feet above the surface of the following: National Parks, Monuments, Seashores, Lakeshores, Recreation Areas and Scenic Riverways administered by the National Park Service; National Wildlife Refuges, Big Game Refuges, Game Ranges and Wildlife Ranges administered by the U.S. Fish and Wildlife Service; and Wilderness and Primitive areas administered by the U.S. Forest Service. FAA Advisory Circular (AC) 91-36, "Visual Flight Rules (VFR) Flight Near Noise-Sensitive Areas," defines the surface as: the highest terrain within 2,000 feet laterally of the route of flight, or the upper-most rim of a canyon or valley.

Federal regulations also prohibit airdrops by parachute or other means of persons, cargo, or objects from aircraft on lands administered by the three agencies without authorization from the respective agency. Exceptions include: 1) emergencies involving the safety of human life, or 2) threat of serious property loss.

Boundary of National Park Service areas, U.S. Fish and Wildlife Service areas, and U.S. Forest Service Wilderness and Primitive areas.

NORTH AMERICAN AEROSPACE DEFENSE COMMAND (NORAD) PROCEDURES

All aircraft operating in the U.S. national airspace, if capable, will maintain a listening watch on guard frequencies VHF 121.5 or UHF 243.0. It is incumbent upon all aviators to know and understand their responsibilities if intercepted. Review "AIM" section 5-6-2 for intercept procedures. Additionally, if U.S. military fighter jets intercept an aircraft and flares are dispensed in the area of that aircraft, aviators will pay strict attention, contact air traffic control immediately on the local frequency or on VHF guard 121.5 or UHF guard 243.0, and follow the interceptor visual ICAO signals. Be advised that non-compliance may result in the use of force.

Class G Airspace within the United States extends up to 14,500 feet MSL. At and above this altitude all airspace is within Class E Airspace, excluding the airspace less than 1500 feet above the terrain and certain special use airspace areas.

MEMPHIS