

# **The National Energy Modeling System: An Overview 2009**

**October 2009**

**Energy Information Administration**  
Office of Integrated Analysis and Forecasting  
U.S. Department of Energy  
Washington, DC 20585

---

**This publication is on the WEB at:  
[www.eia.doe.gov/oiaf/aeo/overview/](http://www.eia.doe.gov/oiaf/aeo/overview/)**

---

This report was prepared by the Energy Information Administration, the independent statistical and analytical agency within the U.S. Department of Energy. The information contained herein should be attributed to the Energy Information Administration and should not be construed as advocating or reflecting any policy position of the Department of Energy or any other organization.

# Preface

---

The National Energy Modeling System: An Overview 2009 provides a summary description of the National Energy Modeling System, which was used to generate the projections of energy production, demand, imports, and prices through the year 2030 for the *Annual Energy Outlook 2009*, (DOE/EIA-0383(2009)), released in March 2009. AEO2009 presents national projections of energy markets for five primary cases—a reference case and four additional cases that assume higher and lower economic growth and higher and lower world oil prices than in the reference case. The Overview presents a brief description of the methodology and scope of each of the component modules of NEMS. The model documentation reports listed in the appendix of this document provide further details.

The Overview was prepared by the Energy Information Administration, Office of Integrated Analysis and Forecasting under the direction of John J. Conti (john.conti@eia.doe.gov, 202/586-2222), Director, Office of Integrated Analysis and Forecasting; Paul D. Holtberg (paul.holtberg@eia.doe.gov, 202/586-1284), Director of the Demand and Integration Division; Joseph A. Beamon (jbeamon@eia.doe.gov, 202/586-2025), Director of the Coal and Electric Power Division; A. Michael Schaal (michael.schaal@eia.doe.gov, 202/586-5590), Director of the Oil and Gas Division; Glen E. Sweetnam (glen.sweetnam@eia.doe.gov, 202-586-2188), Director, International, Economic, and Greenhouse Gases Division; and Andy S. Kydes (akydes@eia.doe.gov, 202/586-2222), Senior Technical Advisor.

Detailed questions concerning the National Energy Modeling System and the *Annual Energy Outlook 2009* may be addressed to the following analysts:

AEO2009 . . . . .	Paul D. Holtberg (paul.holtberg@eia.doe.gov, 202/586-1284)
Integrating Module/Carbon Emissions. . . . .	Daniel H. Skelly (daniel.skelly@eia.doe.gov, 202-586-1722)
Macroeconomic Activity Module . . . . .	Kay A. Smith (kay.smith@eia.doe.gov, 202/586-1132)
International Energy Module. . . . .	Adrian Geagla (adrian.geagla@eia.doe.gov, 202/586-2873)
Residential Demand . . . . .	John H. Cymbalsky (john.cymbalsky@eia.doe.gov, 202/586-4815)
Commercial Demand . . . . .	Erin E. Boedecker (erin.boedecker@eia.doe.gov, 202/586-4791)
Industrial Demand . . . . .	Amelia L. Elson (amelia.elson@eia.doe.gov, 202/586-1420)
Transportation Demand . . . . .	John D. Maples (john.maples@eia.doe.gov, 202/586-1757)
Electricity Demand Module . . . . .	Jeffrey S. Jones (jeffrey.jones@eia.doe.gov, 202/586-2038)
Renewable Fuels Module . . . . .	Chris R. Namovicz (chris.namovicz@eia.doe.gov, 202/586-7120)
Oil and Gas Supply Module . . . . .	Eddie L. Thomas, Jr. (eddie.thomas@eia.doe.gov, 202/586-5877)
Natural Gas Transmission and Distribution Module . . . . .	Joseph G. Benneche (joseph.benneche@eia.doe.gov, 202/586-6132)
Petroleum Market Module . . . . .	William S. Brown (william.brown@eia.doe.gov, 202/586-8181)
Coal Market Module . . . . .	Diane R. Kearney (diane.kearney@eia.doe.gov, 202/586-2415)

AEO2009 is available on the EIA Home Page on the Internet (<http://www.eia.doe.gov/oiaf/aeo/index.html>). Assumptions underlying the projections are available in Assumptions to the Annual Energy Outlook 2009 at <http://www.eia.doe.gov/oiaf/aeo/assumption/index.html>. Tables of regional projections and other underlying details of the reference case are available at <http://www.eia.doe.gov/oiaf/aeo/supplement/index.html>. Model documentation reports and The National Energy Modeling System: An Overview 2009 are also available on the Home Page at [http://tonto.eia.doe.gov/reports/reports\\_kindD.asp?type=model documentation](http://tonto.eia.doe.gov/reports/reports_kindD.asp?type=model documentation).

For ordering information and for questions on energy statistics, please contact EIA's National Energy Information Center.

National Energy Information Center, EI-30  
Energy Information Administration, Forrestal Building  
Washington, DC 20585, Telephone: 202/586-8800  
FAX: 202/586-0727, TTY: 202/586-1181  
9 a.m. to 5 p.m., eastern time, M-F  
E-mail: [infoctr@eia.doe.gov](mailto:infoctr@eia.doe.gov)  
World Wide Web Site: <http://www.eia.doe.gov>, FTP Site: <ftp://ftp.eia.doe.gov>

# Contents

---

Preface ..... ii

Introduction ..... 1

Overview of NEMS ..... 6

Carbon Dioxide and Methane Emissions ..... 12

Macroeconomic Activity Module ..... 14

International Energy Module ..... 17

Residential Demand Module ..... 20

Commercial Demand Module ..... 25

Industrial Demand Module ..... 32

Transportation Demand Module ..... 37

Electricity Market Module ..... 43

Renewable Fuels Module ..... 50

Oil and Gas Supply Module ..... 54

Natural Gas Transmission and Distribution Module ..... 59

Petroleum Market Module ..... 64

Coal Market Module ..... 71

Appendix: Bibliography ..... 77

## Figures

1. Census Divisions . . . . .	8
2. National Energy Modeling System . . . . .	9
3. Macroeconomic Activity Module Structure . . . . .	15
4. International Energy Module Structure . . . . .	18
5. Residential Demand Module Structure . . . . .	21
6. Commercial Demand Module Structure . . . . .	26
7. Industrial Demand Module Structure . . . . .	33
8. Transportation Demand Module Structure . . . . .	39
9. Electricity Market Module Structure . . . . .	44
10. Electricity Market Module Supply Regions . . . . .	45
11. Renewable Fuels Module Structure . . . . .	51
12. Oil and Gas Supply Module Regions . . . . .	55
13. Oil and Gas Supply Module Structure . . . . .	56
14. Natural Gas Transmission and Distribution Module Structure . . . . .	60
15. Natural Gas Transmission and Distribution Module Network . . . . .	62
16. Petroleum Market Module Structure . . . . .	65
17. Petroleum Administration for Defense Districts . . . . .	66
18. Coal Market Module Demand Regions . . . . .	72
19. Coal Market Module Supply Regions . . . . .	73
20. Coal Market Module Structure . . . . .	75

# Contents

---

## Tables

1. Characteristics of Selected Modules .....	6
2. NEMS Residential Module Equipment Summary .....	22
3. Characteristics of Selected Equipment .....	23
4. Capital Cost and Efficiency Ratings of Selected Commercial Space Heating Equipment .....	29
5. Commercial End-Use Technology Types .....	30
6. Economic subsectors Within the IDM .....	32
7. Fuel-Consuming Activities for the Energy-Intensive Manufacturing Subsectors .....	34
8. Selected Technology Characteristics for Automobiles .....	38
9. Examples of Midsize Automobile Attributes .....	38
10. Example of Truck Technology Characteristics (Diesel) .....	41
11. Generating Technologies .....	46
12. 2008 Overnight Capital Icosts (including Contingencies), 2008 Heat Rates, and Online Year by Technology for the AEO2009 Reference Case .....	47
13. Coal Export Component .....	74

# Introduction

---

# Introduction

---

The National Energy Modeling System (NEMS) is a computer-based, energy-economy modeling system of U.S. through 2030. NEMS projects the production, imports, conversion, consumption, and prices of energy, subject to assumptions on macroeconomic and financial factors, world energy markets, resource availability and costs, behavioral and technological choice criteria, cost and performance characteristics of energy technologies, and demographics. NEMS was designed and implemented by the Energy Information Administration (EIA) of the U.S. Department of Energy (DOE).

The National Energy Modeling System: An Overview 2009 provides an overview of the structure and methodology of NEMS and each of its components. This chapter provides a description of the design and objectives of the system, followed by a chapter on the overall modeling structure and solution algorithm. The remainder of the report summarizes the methodology and scope of the component modules of NEMS. The model descriptions are intended for readers familiar with terminology from economic, operations research, and energy modeling. More detailed model documentation reports for all the NEMS modules are also available from EIA (Appendix, "Bibliography").

## Purpose of NEMS

NEMS is used by EIA to project the energy, economic, environmental, and security impacts on the United States of alternative energy policies and different assumptions about energy markets. The projection horizon is approximately 25 years into the future. The projections in *Annual Energy Outlook 2009 (AEO2009)* are from the present through 2030. This time period is one in which technology, demographics, and economic conditions are sufficiently understood in order to represent energy markets with a reasonable degree of confidence. NEMS provides a consistent framework for representing the complex interactions of the U.S. energy system and its response to a wide variety of alternative assumptions and policies or policy initiatives. As an annual model, NEMS can also be used to examine the impact of new energy programs and policies.

Energy resources and prices, the demand for specific energy services, and other characteristics of energy markets vary widely across the United States. To address these differences, NEMS is a regional model. The

regional disaggregation for each module reflects the availability of data, the regional format typically used to analyze trends in the specific area, geology, and other factors, as well as the regions determined to be the most useful for policy analysis. For example, the demand modules (e.g., residential, commercial, industrial and transportation) use the nine Census divisions, the Electricity Market Module uses 15 supply regions based on the North American Electric Reliability Council (NERC) regions, the Oil and Gas Supply Modules use 12 supply regions, including 3 offshore and 3 Alaskan regions, and the Petroleum Market Module uses 5 regions based on the Petroleum Administration for Defense Districts.

Baseline projections are developed with NEMS and published annually in the *Annual Energy Outlook (AEO)*. In accordance with the requirement that EIA remain policy-neutral, the AEO projections are generally based on Federal, State, and local laws and regulations in effect at the time of the projection. The potential impacts of pending or proposed legislation, regulations, and standards or of sections of legislation that have been enacted but that require implementing regulations or appropriations of funds that have not been provided or specified in the legislation itself are not reflected in NEMS. The first version of NEMS, completed in December 1993, was used to develop the projections presented in the *Annual Energy Outlook 1994*. This report describes the version of NEMS used for the *AEO2009*.<sup>1</sup>

The projections produced by NEMS are not considered to be statements of what will happen but of what might happen, given the assumptions and methodologies used. Assumptions include, for example, the estimated size of the economically recoverable resource base of fossil fuels, and changes in world energy supply and demand. The projections are business-as-usual trend estimates, given known technological and demographic trends.

## Analytical Capability

NEMS can be used to analyze the effects of existing and proposed government laws and regulations related to energy production and use; the potential impact of new and advanced energy production, conversion, and consumption technologies; the impact and cost of greenhouse gas control; the impact of increased use of renewable energy sources; and the potential savings

1 Energy Information Administration, *Annual Energy Outlook 2009*, DOE/EIA-0383(2009) (Washington, DC, March 2009)

from increased efficiency of energy use; and the impact of regulations on the use of alternative or reformulated fuels.

In addition to producing the analyses in the AEO, NEMS is used for one-time analytical reports and papers, such as *An Updated Annual Energy Outlook 2009 Reference Case Reflecting Provisions of the American Recovery and Reinvestment Act and Recent Changes in the Economic Outlook*,<sup>2</sup> which updates the AEO2009 reference case to reflect the enactment of the American Recovery and Reinvestment Act in February 2009 and to adopt a revised macroeconomic outlook for the U.S. and global economies. The revised AEO2009 reference case will be used as the starting point for pending and future analyses of proposed energy and environmental legislation. Other analytical papers, which either describe the assumptions and methodology of the NEMS or look at current energy markets issues, are prepared using the NEMS. Many of these papers are published in the Issues In Focus section of the AEO. Past and current analyses are available at [http://www.eia.doe.gov/oiaf/aeo/otheranalysis/aeo\\_analyses.html](http://www.eia.doe.gov/oiaf/aeo/otheranalysis/aeo_analyses.html).

NEMS has also been used for a number of special analyses at the request of the Administration, U.S. Congress, other offices of DOE and other government agencies, who specify the scenarios and assumptions for the analysis. Some recent examples include:

- *Energy Market and Economic Impacts of H.R. 2454, the American Clean Energy and Security Act of 2009*,<sup>3</sup> requested by Chairman Henry Waxman and Chairman Edward Markey to analyze the impacts of H.R. 2454, the American Clean Energy and Security Act of 2009 (ACESA), which was passed by the House of Representatives on June 26, 2009. ACESA is a complex bill that regulates emissions of greenhouse gases through market-based mechanisms, efficiency programs, and economic incentives.
- *Impacts of a 25-Percent Renewable Electricity Standard as Proposed in the American Clean Energy and Security Act*,<sup>4</sup> requested by Senator Markey to analyze the effects of a 25-percent Federal renewable electricity standard (RES) as included in the discussion draft of broader legislation, the American Clean Energy and Security Act.
- *Light-Duty Diesel Vehicles: Efficiency and Emissions Attributes and Market Issues*,<sup>5</sup> requested by Senator Sessions to analyze the environmental and energy efficiency attributes of diesel-fueled light-duty vehicles (LDV's), including comparison of the characteristics of the vehicles with those of similar gasoline-fueled, E85-fueled, and hybrid vehicles, as well as a discussion of any technical, economic, regulatory, or other obstacles to increasing the use of diesel-fueled vehicles in the United States.
- *The Impact of Increased Use of Hydrogen on Petroleum Consumption and Carbon Dioxide Emissions*,<sup>6</sup> requested by Senator Dorgan to analyze the impacts on U.S. energy import dependence and emissions reductions resulting from the commercialization of advanced hydrogen and fuel cell technologies in the transportation and distributed generation markets.
- *Analysis of Crude Oil Production in the Arctic National Wildlife Refuge*,<sup>7</sup> requested by Senator Stevens to access the impact of Federal oil and natural gas leasing in the coastal plain of the Arctic National Wildlife Refuge in Alaska.
- *Energy Market and Economic Impacts of S.2191, the Lieberman-Warner Climate Security Act of*

2 Energy Information Administration, *An Updated Annual Energy Outlook 2009 Reference Case Reflecting Provisions of the American Recovery and Reinvestment Act and Recent Changes in the Economic Outlook*, SR/OIAF/2009-4 (Washington, DC, April 2009).

3 Energy Information Administration, *Energy Market and Economic Impacts of H.R. 2454, the American Clean Energy and Security Act of 2009*, SR/OIAF/2009-05 (Washington, DC, August 2009).

4 Energy Information Administration, *Impacts of a 25-Percent Renewable Electricity Standard as proposed in the American Clean Energy and Security Act Discussion*, SR/OIAF/2009-03 (Washington, DC, April 2009)

5 Energy Information Administration, *Light-Duty Diesel Vehicles: Efficiency and Emissions Attributes and Market Issues*, SR/OIAF/2009-02 (Washington, DC, February 2009).

6 Energy Information Administration, *The Impact of Increased Use of Hydrogen on Petroleum Consumption and Carbon Light-Duty Diesel Vehicles: Efficiency and Emissions Attributes and Market Issues*, SR/OIAF/2008-04 (Washington, DC, September 2008).

7 Energy Information Administration, *Analysis of Crude Oil Production in the Arctic National Wildlife Refuge*, SR/OIAF/2008-03 (Washington, DC, May 2008).



# Introduction

---

2007,<sup>8</sup> requested by Senators Lieberman, Warner, Inhofe, Voinovich, and Barrasso to analyze the impacts of the greenhouse gas cap-and-trade program that would be established under Title I of S.2191.

- *Energy Market and Economic Impacts of S.1766*, the Low Carbon Economy Act of 2007,<sup>9</sup> requested by Senators Bingaman and Specter to analyze the impact of the mandatory greenhouse gas allowance program under S.1766 designed to maintain covered emissions at approximately 2006 levels in 2020, 1990 levels in 2030, and at least 60 percent below 1990 levels by 2050.

## Representations of Energy Market Interactions

NEMS is designed to represent the important interactions of supply and demand in U.S. energy markets. In the United States, energy markets are driven primarily by the fundamental economic interactions of supply and demand. Government regulations and policies can exert considerable influence, but the majority of decisions affecting fuel prices and consumption patterns, resource allocation, and energy technologies are made by private individuals who value attributes other than life cycle costs or companies attempting to optimize their own economic interests. NEMS represents the market behavior of the producers and consumers of energy at a level of detail that is useful for analyzing the implications of technological improvements and policy initiatives.

### *Energy Supply/Conversion/Demand Interactions*

NEMS is a modular system. Four end-use demand modules represent fuel consumption in the residential, commercial, transportation, and industrial sectors, subject to delivered fuel prices, macroeconomic influences, and technology characteristics. The primary fuel supply and conversion modules compute the levels of domestic production, imports, transportation costs, and fuel prices that are needed to meet domestic and export demands for energy, subject to resource base characteristics, industry infrastructure and technology, and world market conditions. The modules interact to solve for the economic supply and demand balance for each fuel. Because of the modular design, each sector can be represented with the methodology and the level of

detail, including regional detail, appropriate for that sector. The modularity also facilitates the analysis, maintenance, and testing of the NEMS component modules in the multi-user environment.

### *Domestic Energy System/Economy Interactions*

The general level of economic activity, represented by gross domestic product, has traditionally been used as a key explanatory variable or driver for projections of energy consumption at the sectoral and regional levels. In turn, energy prices and other energy system activities influence economic growth and activity. NEMS captures this feedback between the domestic economy and the energy system. Thus, changes in energy prices affect the key macroeconomic variables—such as gross domestic product, disposable personal income, industrial output, housing starts, employment, and interest rates—that drive energy consumption and capacity expansion decisions.

### *Domestic/World Energy Market Interactions*

World oil prices play a key role in domestic energy supply and demand decision making and oil price assumptions are a typical starting point for energy system projections. The level of oil production and consumption in the U.S. energy system also has a significant influence on world oil markets and prices. In NEMS, an international module represents the response of world oil markets (supply and demand) to assumed world oil prices. The results/outputs of the module are international liquids consumption and production by region, and a crude oil supply curve representing international crude oil similar in quality to West Texas Intermediate that is available to U.S. markets through the Petroleum Market Module (PMM) of NEMS. The supply-curve calculations are based on historical market data and a world oil supply/demand balance, which is developed from reduced-form models of international liquids supply and demand, current investment trends in exploration and development, and long-term resource economics for 221 countries/territories. The oil production estimates include both conventional and unconventional supply recovery technologies.

8 Energy Information Administration, *Energy Market and Economic Impacts of S.2191, the Lieberman-Warner Climate Security Act of 2007*, SR/OIAF/2008-01 (Washington, DC, April 2008).

9 Energy Information Administration, *Energy Market and Economic Impacts of S.1766, the Low Carbon Economy Act of 2007*, SR/OIAF/2007-06 (Washington, DC, January 2008).

## *Economic Decision Making Over Time*

The production and consumption of energy products today are influenced by past investment decisions to develop energy resources and acquire energy-using capital stock. Similarly, the production and consumption of energy in a future time period will be influenced by decisions made today and in the past.

Current investment decisions depend on expectations about future markets. For example, expectations of rising energy prices in the future increase the likelihood of current decisions to invest in more energy-efficient technologies or alternative energy sources. A variety of assumptions about planning horizons, the formation of expectations about the future, and the role of those expectations in economic decision making are applied within the individual NEMS modules.

## **Technology Representation**

A key feature of NEMS is the representation of technology and technology improvement over time. Five of the sectors—residential, commercial, transportation, electricity generation, and refining—include extensive treatment of individual technologies and their characteristics, such as the initial capital cost, operating cost, date of availability, efficiency, and other characteristics specific to the particular technology. For example, technological progress in lighting technologies results in a gradual reduction in cost and is modeled as a function of time in these end-use sectors. In addition, the electricity sector accounts for technological optimism in the capital costs of first-of-a-kind generating technologies and for a decline in cost as experience with the technologies is gained both domestically and internationally. In each of these sectors, equipment choices are made for individual technologies as new equipment is needed to meet growing demand for energy services or to replace retired equipment.

In the other sectors—industrial, oil and gas supply, and coal supply—the treatment of technologies is more limited due to a lack of data on individual technologies. In the industrial sector, only the combined heat and power and motor technologies are explicitly considered and characterized. Cost reductions resulting from technological progress in combined heat and power technologies are represented as a function of time as experience with the technologies grows. Technological progress is not explicitly modeled for the industrial motor technologies. Other technologies in the energy-intensive industries are represented by technology bundles, with technology possibility curves representing efficiency improvement over time. In the oil and gas supply sector, technological progress is represented by econometrically estimated improvements in finding rates, success rates, and costs. Productivity improvements over time represent technological progress in coal production.

## **External Availability**

In accordance with EIA requirements, NEMS is fully documented and archived. EIA has been running NEMS on four EIA terminal servers and several dual-processor personal computers (PCs) using the Windows XP operating system. The archive file provides the source language, input files, and output files to replicate the *Annual Energy Outlook* reference case runs on an identically equipped computer; however, it does not include the proprietary portions of the model, such as the IHS Global Insight, Inc. (formerly DRI-WEFA) macroeconomic model and the optimization modeling libraries. NEMS can be run on a high-powered individual PC as long as the required proprietary software resides on the PC. Because of the complexity of NEMS, and the relatively high cost of the proprietary software, NEMS is not widely used outside of the Department of Energy. However, NEMS, or portions of it, is installed at the Lawrence Berkeley National Laboratory, Oak Ridge National Laboratory, the Electric Power Research Institute, the National Energy Technology Laboratory, the National Renewable Energy Laboratory, several private consulting firms, and a few universities.

# Overview of NEMS

---

# Overview of NEMS

NEMS explicitly represents domestic energy markets by the economic decision making involved in the production, conversion, and consumption of energy products. Where possible, NEMS includes explicit representation of energy technologies and their characteristics. Since energy costs, availability, and

energy-consuming characteristics vary widely across regions, considerable regional detail is included. Other details of production and consumption are represented to facilitate policy analysis and ensure the validity of the results. A summary of the detail provided in NEMS is shown in Table 1.

Table 1. Characteristics of Selected Modules

Energy Activity	Categories	Regions
Residential Demand	Twenty four end-use services Three housing types Fifty end-use technologies	Nine Census divisions
Commercial demand	Ten end-use services Eleven building types Eleven distributed generation technologies Sixty-three end-use technologies	Nine Census divisions
Industrial demand	Seven energy-intensive industries Eight non-energy-intensive industries Six non-manufacturing industries Cogeneration	Four Census regions, shared to nine Census divisions
Transportation demand	Six car sizes Six light truck sizes Sixty-three conventional fuel-saving technologies for light-duty vehicles Gasoline, diesel, and fourteen alternative-fuel vehicle technologies for light-duty vehicles Twenty vintages for light-duty vehicles Regional, narrow, and wide-body aircraft Six advanced aircraft technologies Light, medium, and heavy freight trucks Thirty-seven advanced freight truck technologies	Nine Census divisions
Electricity	Eleven fossil generation technologies Two distributed generation technologies Eight renewable generation technologies Conventional and advanced nuclear Storage technology to model load shifting Marginal and average cost pricing Generation capacity expansion Seven environmental control technologies	Fifteen electricity supply regions (including Alaska and Hawaii) based on the North American Electric Reliability Council regions and subregions Nine Census divisions for demand Fifteen electricity supply regions
Renewables	Two wind technologies—onshore and offshore—, geothermal, solar thermal, solar photovoltaic, landfill gas, biomass, conventional hydropower	
Oil supply	Lower-48 onshore Lower-48 deep and shallow offshore Alaska onshore and offshore	Six lower 48 onshore regions Three lower 48 offshore regions Three Alaska regions
Natural gas supply	Conventional lower-48 onshore Lower-48 deep and shallow offshore Coalbed methane Gas shales Tight sands	Six lower 48 onshore regions Three lower 48 offshore regions Three Alaska regions
Natural gas transmission and distribution	Core vs. noncore delivered prices Peak vs. off-peak flows and prices Pipeline capacity expansion Pipeline and distributor tariffs Canada, Mexico, and LNG imports and exports Alaska gas consumption and supply	Twelve lower 48 regions Ten pipeline border points Eight LNG import regions
Refining	Five crude oil categories Fourteen product categories More than 40 distinct technologies Refinery capacity expansion	Five refinery regions based on the Petroleum Administration for Defense Districts
Coal supply	Three sulfur categories Four thermal categories Underground and surface mining types Imports and Exports	Fourteen supply regions Fourteen demand regions Seventeen export regions Twenty import regions

## Major Assumptions

Each module of NEMS embodies many assumptions and data to characterize the future production, conversion, or consumption of energy in the United States. Two of the more important factors influencing energy markets are economic growth and oil prices.

The *AEO2009* includes five primary fully-integrated cases: a reference case, high and low economic growth cases, and high and low oil price cases. The primary determinant for different economic growth rates are assumptions about growth in the labor force and productivity, while the long-term oil price paths are based on access to and cost of oil from the non-Organization of Petroleum Exporting Countries (OPEC), OPEC supply decisions, and the supply potential of unconventional liquids, as well as the demand for liquids.

In addition to the five primary fully-integrated cases, *AEO2009* includes 34 other cases that explore the impact of varying key assumptions in the individual components of NEMS. Many of these cases involve changes in the assumptions that impact the penetration of new or improved technologies, which is a major uncertainty in formulating projections of future energy markets. Some of these cases are run as fully integrated cases (e.g., integrated 2009 technology case, integrated high technology case, low and high renewables technology cost cases, slow and rapid oil and gas technology cases, and low and high coal cost cases). Others exploit the modular structure of NEMS by running only a portion of the entire modeling system in order to focus on the first-order impacts of changes in the assumptions (e.g., 2009, high, and best available technology cases in the residential and commercial sectors, 2009 and high technology cases in the industrial sector and, low and high technology cases in the transportation sector).

## NEMS Modular Structure

Overall, NEMS represents the behavior of energy markets and their interactions with the U.S. economy. The model achieves a supply/demand balance in the end-use demand regions, defined as the nine Census divisions (Figure 1), by solving for the prices of each energy type that will balance the quantities producers are willing to supply with the quantities consumers wish to consume. The system reflects market economics, industry structure, and existing energy policies and regulations that influence market behavior.

NEMS consists of four supply modules (oil and gas, natural gas transmission and distribution, coal market, and renewable fuels); two conversion modules (electricity market and petroleum market); four end-use demand modules (residential demand, commercial demand, industrial demand, and transportation demand); one module to simulate energy/economy interactions (macro-economic activity); one module to simulate international energy markets (international energy); and one module that provides the mechanism to achieve a general market equilibrium among all the other modules (integrating module). Figure 2 depicts the high-level structure of NEMS.

Because energy markets are heterogeneous, a single methodology does not adequately represent all supply, conversion, and end-use demand sectors. The modularity of the NEMS design provides the flexibility for each component of the U.S. energy system to use the methodology and coverage that is most appropriate. Furthermore, modularity provides the capability to execute the modules individually or in collections of modules, which facilitates the development and analysis of the separate component modules. The interactions among these modules are controlled by the integrating module.


The NEMS global data structure is used to coordinate and communicate the flow of information among the modules. These data are passed through common interfaces via the integrating module. The global data structure includes energy market prices and consumption; macroeconomic variables; energy production, transportation, and conversion information; and centralized model control variables, parameters, and assumptions. The global data structure excludes variables that are defined locally within the modules and are not communicated to other modules.

A key subset of the variables in the global data structure is the end-use prices and quantities of fuels that are used to equilibrate the NEMS energy balance in the convergence algorithm. These delivered prices of energy and the quantities demanded are defined by product, region, and sector. The delivered prices of fuel encompass all the activities necessary to produce, import, and transport fuels to the end user. The regions used for the price and quantity variables in the global data structure are the nine Census divisions. The four Census regions (shown in Figure 1 by breaks between State groups) and nine Census divisions are a common, mainstream level of regionality widely used by EIA and other organizations for data collection and analysis.



# Overview of NEMS


Figure 1. Census Division

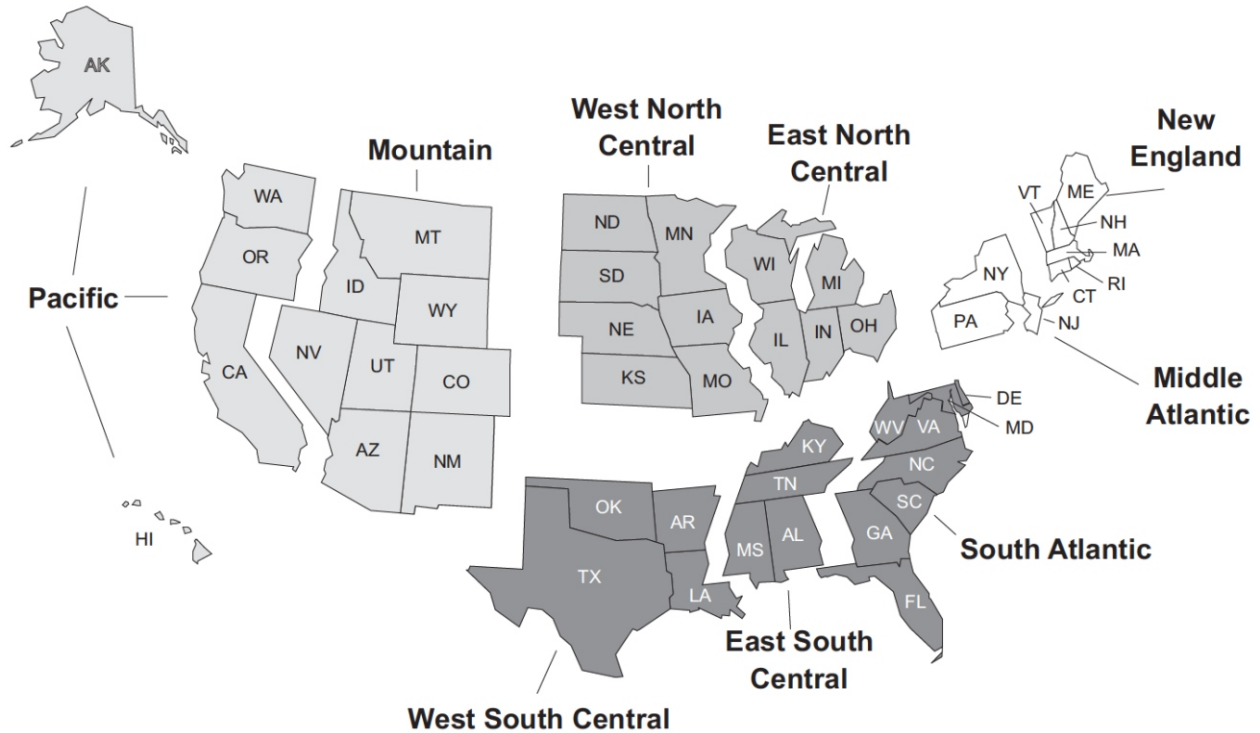

<u>Division 1</u>	<u>Division 3</u>	<u>Division 5</u>	<u>Division 7</u>	<u>Division 9</u>
<b>New England</b>	<b>East North Central</b>	<b>South Atlantic</b>	<b>West South Central</b>	<b>Pacific</b>
Connecticut	Illinois	Delaware	Arkansas	Alaska
Maine	Indiana	District of Columbia	Louisiana	California
Massachusetts	Michigan	Florida	Oklahoma	Hawaii
New Hampshire	Ohio	Georgia	Texas	Oregon
Rhode Island	Wisconsin	Maryland		Washington
Vermont		North Carolina	<b>Division 8</b>	
	<b>Division 4</b>	South Carolina	<b>Mountain</b>	
<b>Division 2</b>	<b>West North Central</b>	Virginia	Arizona	
<b>Middle Atlantic</b>	Iowa	West Virginia	Colorado	
New Jersey	Kansas		Idaho	
New York	Minnesota	<b>Division 6</b>	Montana	
Pennsylvania	Missouri	<b>East South Central</b>	Nevada	
	Nebraska	Alabama	New Mexico	
	North Dakota	Kentucky	Utah	
	South Dakota	Mississippi	Wyoming	
		Tennessee		

# Overview of NEMS

Figure 2. National Energy Modeling System

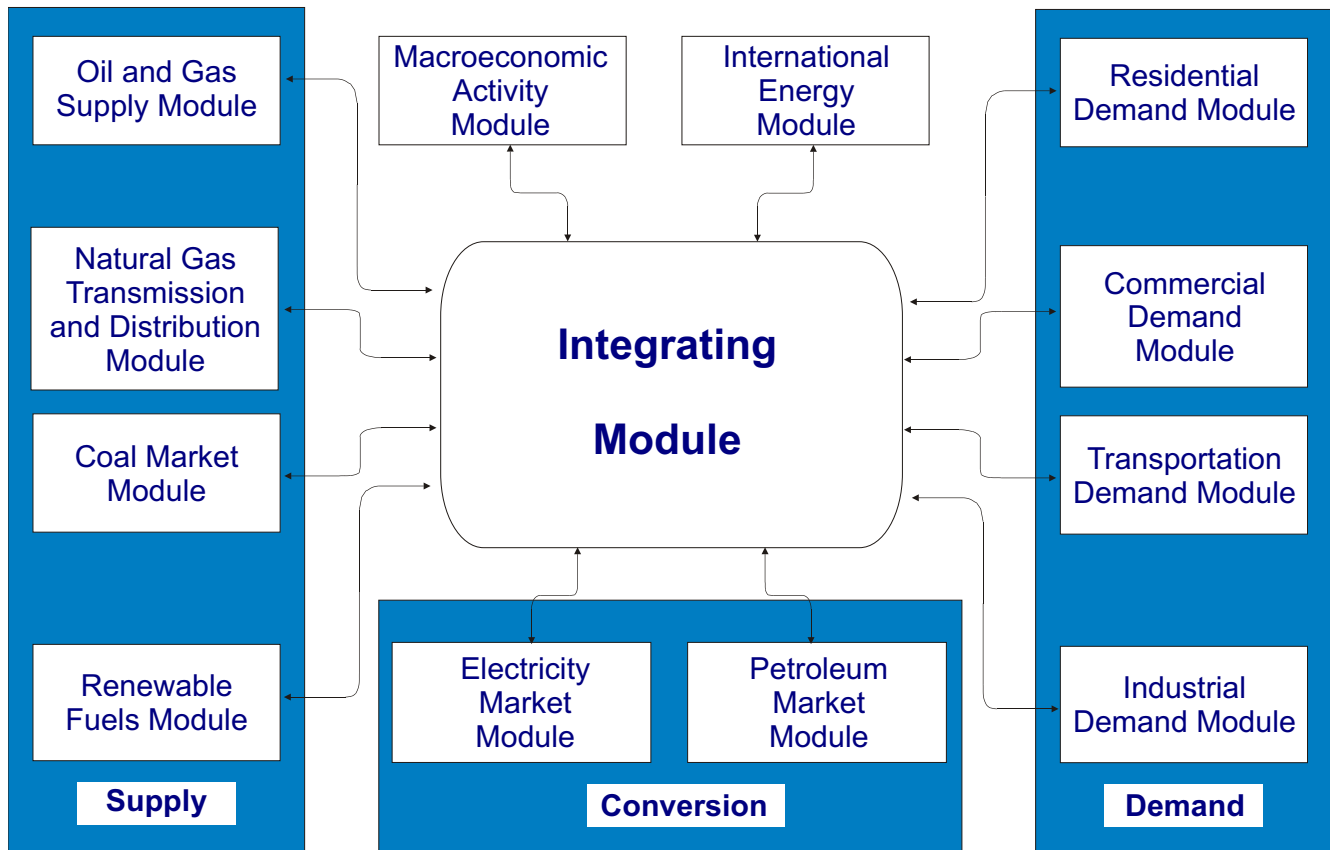

## Integrating Module

The NEMS integrating module controls the entire NEMS solution process as it iterates to determine a general market equilibrium across all the NEMS modules. It has the following functions:

- Manages the NEMS global data structure
- Executes all or any of the user-selected modules in an iterative convergence algorithm
- Checks for convergence and reports variables that remain out of convergence
- Implements convergence relaxation on selected variables between iterations to accelerate convergence
- Updates expected values of the key NEMS variables.

The integrating module executes the demand, conversion, and supply modules iteratively until it achieves an economic equilibrium of supply and demand in all the consuming and producing sectors. Each module is

called in sequence and solved, assuming that all other variables in the energy markets are fixed. The modules are called iteratively until the end-use prices and quantities remain constant within a specified tolerance, a condition defined as convergence. Equilibration is achieved annually throughout the projection period, currently through 2030, for each of the nine Census divisions.

In addition, the macroeconomic activity and international energy modules are executed iteratively to incorporate the feedback on the economy and international energy markets from changes in the domestic energy markets. Convergence tests check the stability of a set of key macroeconomic and international trade variables in response to interactions with the domestic energy system.

The NEMS algorithm executes the system of modules until convergence is reached. The solution procedure for one iteration involves the execution of all the component modules, as well as the updating of expectation variables (related to foresight assumptions) for use in the next iteration. The system is executed sequentially for

# Overview of NEMS

---

each year in the projection period. During each iteration, the modules are executed in turn, with intervening convergence checks that isolate specific modules that are not converging. A convergence check is made for each price and quantity variable to see whether the percentage change in the variable is within the assumed tolerance. To avoid unnecessary iterations for changes in insignificant values, the quantity convergence check is omitted for quantities less than a user-specified minimum level. The order of execution of the modules may affect the rate of convergence but will generally not prevent convergence to an equilibrium solution or significantly alter the results. An optional relaxation routine can be

executed to dampen swings in solution values between iterations. With this option, the current iteration values are reset partway between solution values from the current and previous iterations. Because of the modular structure of NEMS and the iterative solution algorithm, any single module or subset of modules can be executed independently. Modules not executed are bypassed in the calling sequence, and the values they would calculate and provide to the other modules are held fixed at the values in the global data structure, which are the solution values from a previous run of NEMS. This flexibility is an aid to independent development, debugging, and analysis.



# **Carbon Dioxide Emissions**

---

## Carbon Dioxide and Methane Emissions

---

The emissions policy submodule, part of the integrating module, estimates energy-related carbon dioxide emissions and is capable of representing two related greenhouse gas (GHG) emissions policies: a cap-and-trade program and a carbon dioxide emission tax.

Carbon dioxide emissions are calculated from fossil-fuel energy consumption and fuel-specific emissions factors. The estimates are adjusted for carbon capture technologies where applicable. Carbon dioxide emissions from energy use are dependent on the carbon content of the fossil fuel, the fraction of the fuel consumed in combustion, and the consumption of that fuel. The product of the carbon content at full combustion and the combustion fraction yields an adjusted carbon emission factor. The adjusted carbon emissions factors, one for each fuel and sector, are provided as input to the emissions policy module.

Data on past carbon dioxide emissions and emissions factors are updated each year from the EIA's annual inventory, *Emissions of Greenhouse Gases the United States*.<sup>10</sup> To provide a more complete accounting of greenhouse gas emissions consistent with that inventory, a baseline emissions projection for the non-energy carbon dioxide and other greenhouse gases may be specified as an exogenous input.

To represent carbon tax or cap-and-trade policies, an incremental cost of using each fossil fuel, on a dollar-per-Btu basis, is calculated based the carbon dioxide emissions factors and the per-ton carbon dioxide

tax or cap-and-trade allowance cost. This incremental cost, or carbon price adjustment, is added to the corresponding energy prices as seen by the energy demand modules. These price adjustments influence energy demand and energy-related CO<sub>2</sub> emissions, as well as macroeconomic trends.

Under a cap-and-trade policy, the allowance or permit price is determined in an iterative solution process such that the annual covered emissions match the cap each year. If allowance banking is permitted, a constant-growth allowance price path is found such that cumulative emissions over the banking interval match the cumulative covered emissions. To the extent the policies cover greenhouse gases other than CO<sub>2</sub>, the coverage assumptions and abatement potential for the gases must be provided as input. In past studies, EIA has drawn on work by the Environmental Protection Agency (EPA) to represent exogenous estimates of emissions abatement and the use of offsets as a function of allowance prices.

Representing specific cap-and-trade policies in NEMS almost always requires customization of the model. Among the issues that must be addressed are what gases and sectors are covered, what offsets are eligible as compliance measures, how the revenues raised by the taxes or allowance sales are used, how allowances or the value of allowances are distributed, and how the distribution affects energy pricing or the cost of using energy.

10 Energy Information Administration, *Emissions of Greenhouse Gases in the United States 2007*, DOE/EIA-0573 (2007) (Washington, DC, December 2008), web site [www.eia.doe.gov/oiaf/1605/ggrpt/index.html](http://www.eia.doe.gov/oiaf/1605/ggrpt/index.html).

# **Macroeconomic Activity Module**

---

# Macroeconomic Activity Module

The Macroeconomic Activity Module (MAM) links NEMS to the rest of the economy by providing projections of economic driver variables for use by the supply, demand, and conversion modules of NEMS. The derivation of the baseline macroeconomic projection lays a foundation for the determination of the energy demand and supply forecast. MAM is used to present alternative macroeconomic growth cases to provide a range of uncertainty about the growth potential for the economy and its likely consequences for the energy system. MAM is also able to address the macroeconomic impacts associated with changing energy market conditions, such as alternative world oil price assumptions. Outside of the AEO setting, MAM represents a system of linked modules which can assess the potential impacts on the economy of changes in energy events or policy proposals. These economic impacts then feed back into NEMS for an integrated solution. MAM consists of five submodules:

- Global Insight Model of the U.S. Economy
- Global Insight Industry Model
- Global Insight Employment Model
- EIA Regional Model
- EIA Commercial Floorspace Model

The IHS Global Insight Model of the U.S. Economy (Macroeconomic Model) is the same model used by IHS Global Insight, Inc. to generate the economic projections behind the company's monthly assessment of the U.S. economy. The Industry and Employment submodules, are derivatives of IHS Global Insight's Industry and Employment Models, and have been tailored to provide the industry and regional detail required by NEMS. The Regional and Commercial Floorspace Submodules were developed by EIA to complement the set of Global Insight models, providing a fully integrated

approach to projecting economic activity at the national, industry and regional levels. The set of models is designed to run in a recursive manner (see Figure 3). Global Insight's Macroeconomic Model determines the national economy's growth path and final demand mix. The Global Insight Macroeconomic Model provides projections of over 1300 concepts spanning final demands, aggregate supply, prices, incomes, international trade, industrial detail, interest rates and financial flows.

The Industry Submodule takes the final demand projections from the Macroeconomic Submodule as inputs to provide projections of output and other key indicators for 61 sectors, covering the entire economy. This is later aggregated to 41 sectors to provide information to NEMS. The Industry Submodule insures that supply by industry is consistent with the final demands (consumption, investment, government spending, exports and imports) generated in the Macroeconomic Submodule.


The Employment Submodule takes the industry output projections from the Industry Submodule and national wage rates, productivity trends and average work-week trends from the Macroeconomic Submodule to project employment for the 41 NEMS industries. The sum of non-agricultural employment is constrained to sum to the national total projected by the Macroeconomic Submodule.

The Regional Submodule determines the level of industry output and employment, population, incomes, and housing activity in each of nine Census regions. The Commercial Floorspace Submodule calculates regional floorspace for 13 types of building use by Census Division.

MAM Outputs	Inputs from NEMS	Exogenous Inputs
Gross domestic product Other economic activity measures, including housing starts, commercial floorspace growth, vehicle sales, population Price indices and deflators Production and employment for manufacturing Production and employment for nonmanufacturing Interest rates	Petroleum, natural gas, coal, and electricity prices Oil, natural gas, and coal production Electric and gas industry output Refinery output End-use energy consumption by fuel	Macroeconomic variables defining alternative economic growth cases

# Macroeconomic Activity Module

Figure 3. Macroeconomic Activity Module Structure

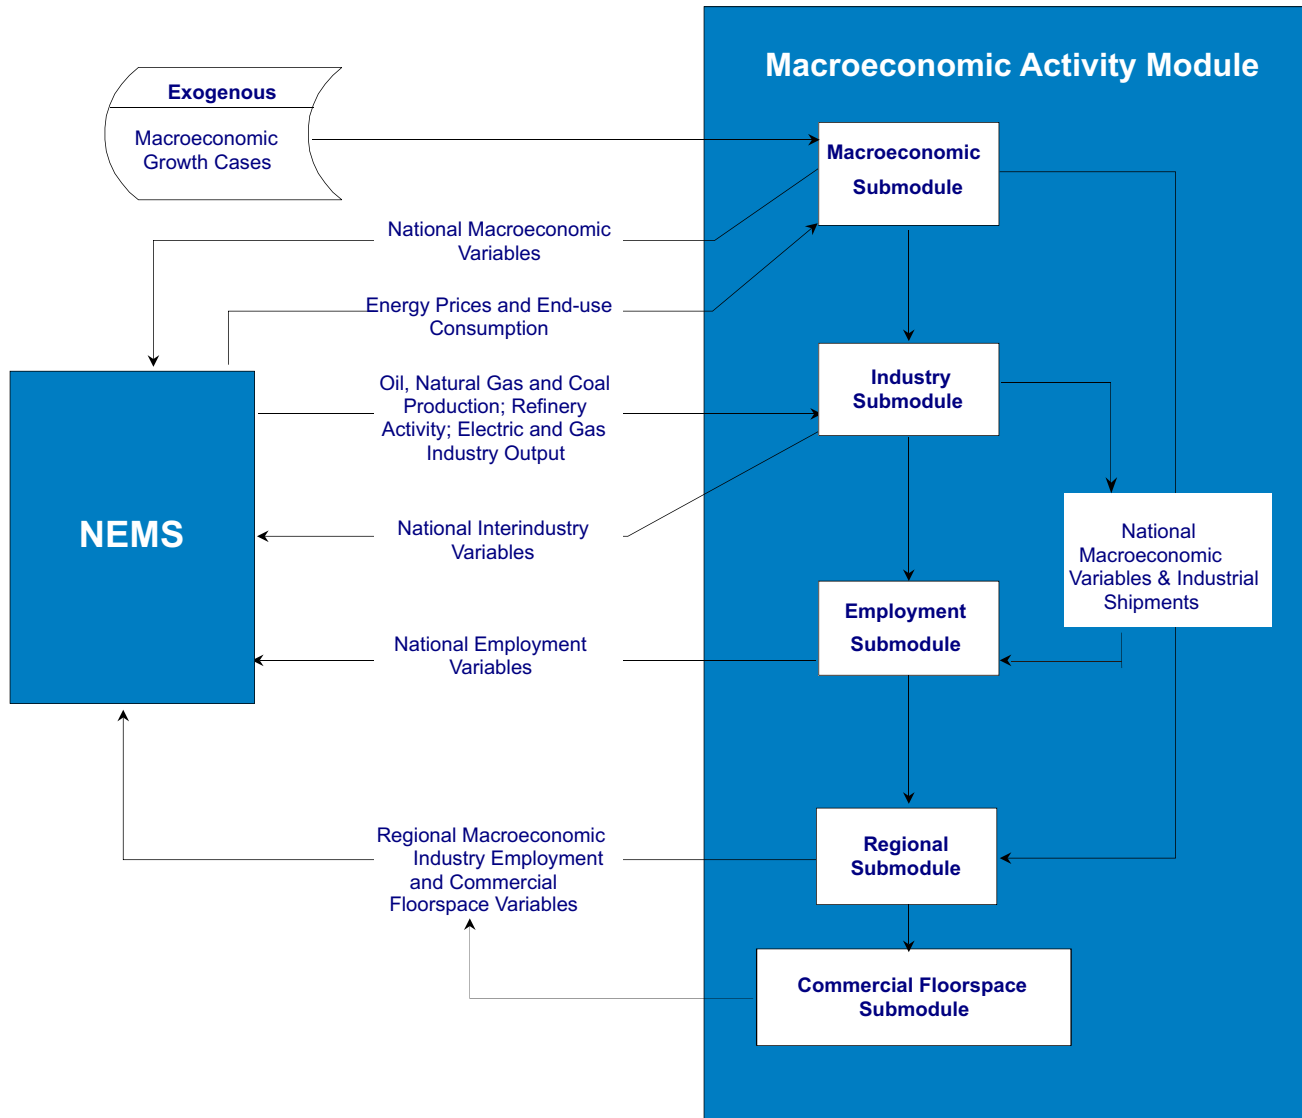

Integrated forecasts of NEMS center around estimating the state of the energy-economy system under a set of alternative energy conditions. Typically, the projections fall into the following four types of integrated NEMS simulations:

- Baseline Projection
- Alternative World Oil Prices
- Proposed Energy Fees or Emissions Permits
- Proposed Changes in Combined Average Fuel Economy (CAFE) Standards

In these integrated NEMS simulations, projection period baseline values for over 240 macroeconomic and demographic variables from MAM are passed to NEMS which solves for demand, supply and prices of energy for the projection period. These energy prices and quantities are passed back to MAM and solved in the Macroeconomic, Industry, Employment, Regional, and Commercial Floorspace Submodules in the EViews environment.<sup>11</sup>

<sup>11</sup> EViews is a model building and operating software package maintained by QMS (Quantitative Micro Software.)

# **International Energy Module**

---

# International Energy Module

The International Energy Module (IEM) (Figure 4) performs the following functions:

- Calculates the world oil price (WOP) that equilibrates world crude-like liquids supply with demand for each year. The WOP is defined as the price of light, low sulfur crude oil delivered to Cushing, Oklahoma.
- Provides the projected world crude-like liquids supply curve (for each year) used by the Petroleum Market Module (PMM). These curves are adjusted to reflect expected conditions in international oil markets and projected changes in U.S. crude-like liquids production and consumption.
- Provide annual regional (country) level production detail for conventional and unconventional liquids based on exogenous assumptions about expected country-level liquid fuels production and producer behavior.
- Projects crude oil and light and heavy refined product import quantities into the U.S. by year and by source based on exogenous assumptions about future exploration, production, refining, and distribution investments worldwide.

## Scope of IEM

Non-U.S. liquid fuels markets are represented in NEMS by the interaction between the PMM and the IEM. Using the specific algorithm described in the documentation of this module, IEM calculates the WOP that equilibrates world crude-like liquids supply with demand for each year. The IEM then estimates new world crude-like liquids supply curves based on exogenous, expected U.S. and world crude-like liquids supply and demand curves and that incorporate any changes in U.S. crude-like liquids production or consumption projected by other NEMS modules. Operationally, IEM passes to PMM an array of nine points of this supply curve, with the equilibrium point being the fifth point of this array.

Input data into IEM contain the historical percentages of imports of oils, heavy and light products imported into

U.S. from different regions in the world. Using these values and total imports into the U.S. of crudes, heavy and light products provided by PMM, IEM generates a report, with imports by source for every year in the projection.

While the IEM is intended to be executed as a module of the NEMS system, and utilizing its complete capabilities and features requires a NEMS interface, it is also possible to execute the IEM module on a stand-alone basis. In stand-alone mode, the IEM calculates the WOP based on an exogenously specified projection of U.S. crude-like liquids production and consumption. Sensitivity analyses can be conducted to examine the response of the world oil market to changes in oil price, production capacity, and demand. To summarize, the model searches for the WOP that equilibrates crude-like liquids supply and demand at the world level.

Based on the final results for U.S. total liquids production and consumption, IEM also provides an International Petroleum Supply and Disposition Summary table for world conventional and unconventional liquids production as well as for world liquids demand by region. Exogenous data used to build this report is contained in omsinput.wk1 file. Each scenario has its own version of this file.

Because U.S. production and consumption of conventional liquids are dynamic values (output from NEMS), all other world regions have been proportionally updated such that the world liquids production and consumption reflect the corresponding value as in the *International Energy Outlook (IEO)*.


## Relation to Other NEMS Components

The IEM both uses information from and provides information to other NEMS components. It primarily uses information about projected U.S. and world crude-like liquids production and consumption and petroleum imports and provides information about the world liquid fuels markets, including global crude-like liquids supply curves and the sources of petroleum imports into the U.S. It should be noted, however, that the present focus of the IEM is on the international oil market where the

IEM Outputs	Inputs from NEMS	Exogenous Inputs
World crude-like liquids supply curves Projected world liquid fuels production and consumption by region Sources of crude oil and petroleum product imports by year	Controlling information: iteration count, time horizon, etc GDP deflator Projected U.S. and world crude-like liquids production and consumption U.S. crude oil and petroleum product imports	Expected US and world crude-like liquids supply and demand curves Expected world liquid fuel production and consumption by region

# International Energy Module

Figure 4. International Energy Module Structure

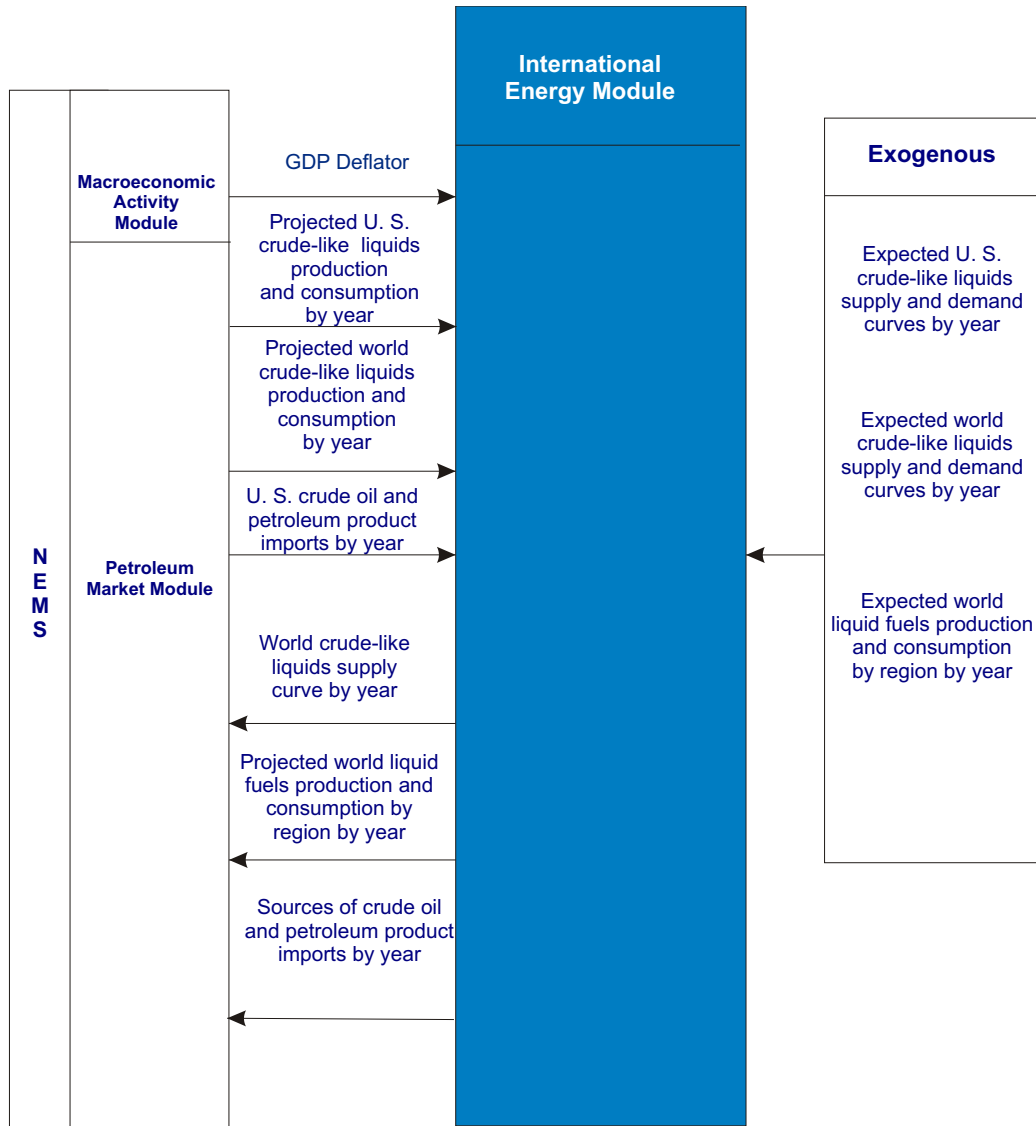

WOP is computed. Any interactions between the U.S. and foreign regions in fuels other than oil (for example, coal trade) are modeled in the particular NEMS module that deals with that fuel.

For U.S. crude-like liquids production and consumption in any year of the projection period, the IEM uses projections generated by the NEMS PMM (based on supply curves provided by the Oil and Gas Supply Module (OGSM) and demand curves from the end-use demand modules).

U.S. and world expected crude-like liquids supply and demand curves, for any year in the projection period, are exogenously provided through data included in input file omsecon.txt, as detailed in the documentation of the IEM.



# **Residential Demand Module**

---

# Residential Demand Module

The residential demand module (RDM) projects energy consumption by Census division for seven marketed energy sources plus solar, wind, and geothermal energy. RDM is a structural model and its demand projections are built up from projections of the residential housing stock and energy-consuming equipment. The components of RDM and its interactions with the NEMS system are shown in Figure 5. NEMS provides projections of residential energy prices, population, disposable income, and housing starts, which are used by RDM to develop projections of energy consumption by end-use service, fuel type, and Census division.

RDM incorporates the effects of four broadly-defined determinants of energy consumption: economic and demographic effects, structural effects, technology turnover and advancement effects, and energy market effects. Economic and demographic effects include the number, dwelling type (single-family, multifamily or mobile homes), occupants per household, disposable income, and location of housing units. Structural effects include increasing average dwelling size and changes in the mix of desired end-use services provided by energy (new end uses and/or increasing penetration of current end uses, such as the increasing popularity of electronic equipment and computers). Technology effects include changes in the stock of installed equipment caused by normal turnover of old, worn out equipment with newer versions that tend to be more energy efficient, the integrated effects of equipment and building shell (insulation level) in new construction, and the projected availability of even more energy-efficient equipment in the future. Energy market effects include the short-run effects of energy prices on energy demands, the longer-run effects of energy prices on the efficiency of purchased equipment and the efficiency of building shells, and limitations on minimum levels of efficiency imposed by legislated efficiency standards.

## Housing Stock Submodule

The base housing stock by Census division and dwelling type is derived from EIA's 2005 Residential Energy Consumption Survey (RECS). Each element of the of the base stock is retired on the basis of a constant rate of decay for each dwelling type. RDM receives as an

input from the macroeconomic activity module projections of housing additions by type and Census division. RDM supplements the surviving stocks from the previous year with the projected additions by dwelling type and Census division. The average square footage of new construction is based on recent upward trends developed from the RECS and the Census Bureau's Characteristics of New Housing.

## Appliance Stock Submodule

The installed stock of appliances is also taken from the 2005 RECS. The efficiency of the appliance stock is derived from historical shipments by efficiency level over a multi-year interval for the following equipment: heat pumps, gas furnaces, central air conditioners, room air conditioners, water heaters, refrigerators, freezers, stoves, dishwashers, clothes washers, and clothes dryers. A linear retirement function with both minimum and maximum equipment lives is used to retire equipment in surviving housing units. For equipment where shipment data are available, the efficiency of the retiring equipment varies over the projection. In early years, the retiring efficiency tends to be lower as the older, less efficient equipment in the stock turns over first. Also, as housing units retire, the associated appliances are removed from the base appliance stock as well. Additions to the base stock are tracked separately for housing units existing in 2005 and for cumulative new construction.

As appliances are removed from the stock, they are replaced by new appliances with generally higher efficiencies due to technology improvements, equipment standards, and market forces. Appliances added due to new construction are accumulated and retired parallel to appliances in the existing stock. Appliance stocks are maintained by fuel, end use, and technology as shown in Table 2.


## Technology Choice Submodule

Fuel-specific equipment choices are made for both new construction and replacement purchases. For new construction, initial heating system shares (taken from the most recently available Census Bureau survey data covering new construction, currently 2005) are adjusted

RDM Outputs	Inputs from NEMS	Exogenous Inputs
Energy demand by service and fuel type Changes in housing and appliance stocks Appliance stock efficiency	Energy product prices Housing starts Population	Current housing stocks and retirement rates Current appliance stocks and life expectancy New appliance types, efficiencies, and costs Housing shell retrofit indices Unit energy consumption Square footage

# Residential Demand Module

Figure 5. Residential Demand Module Structure

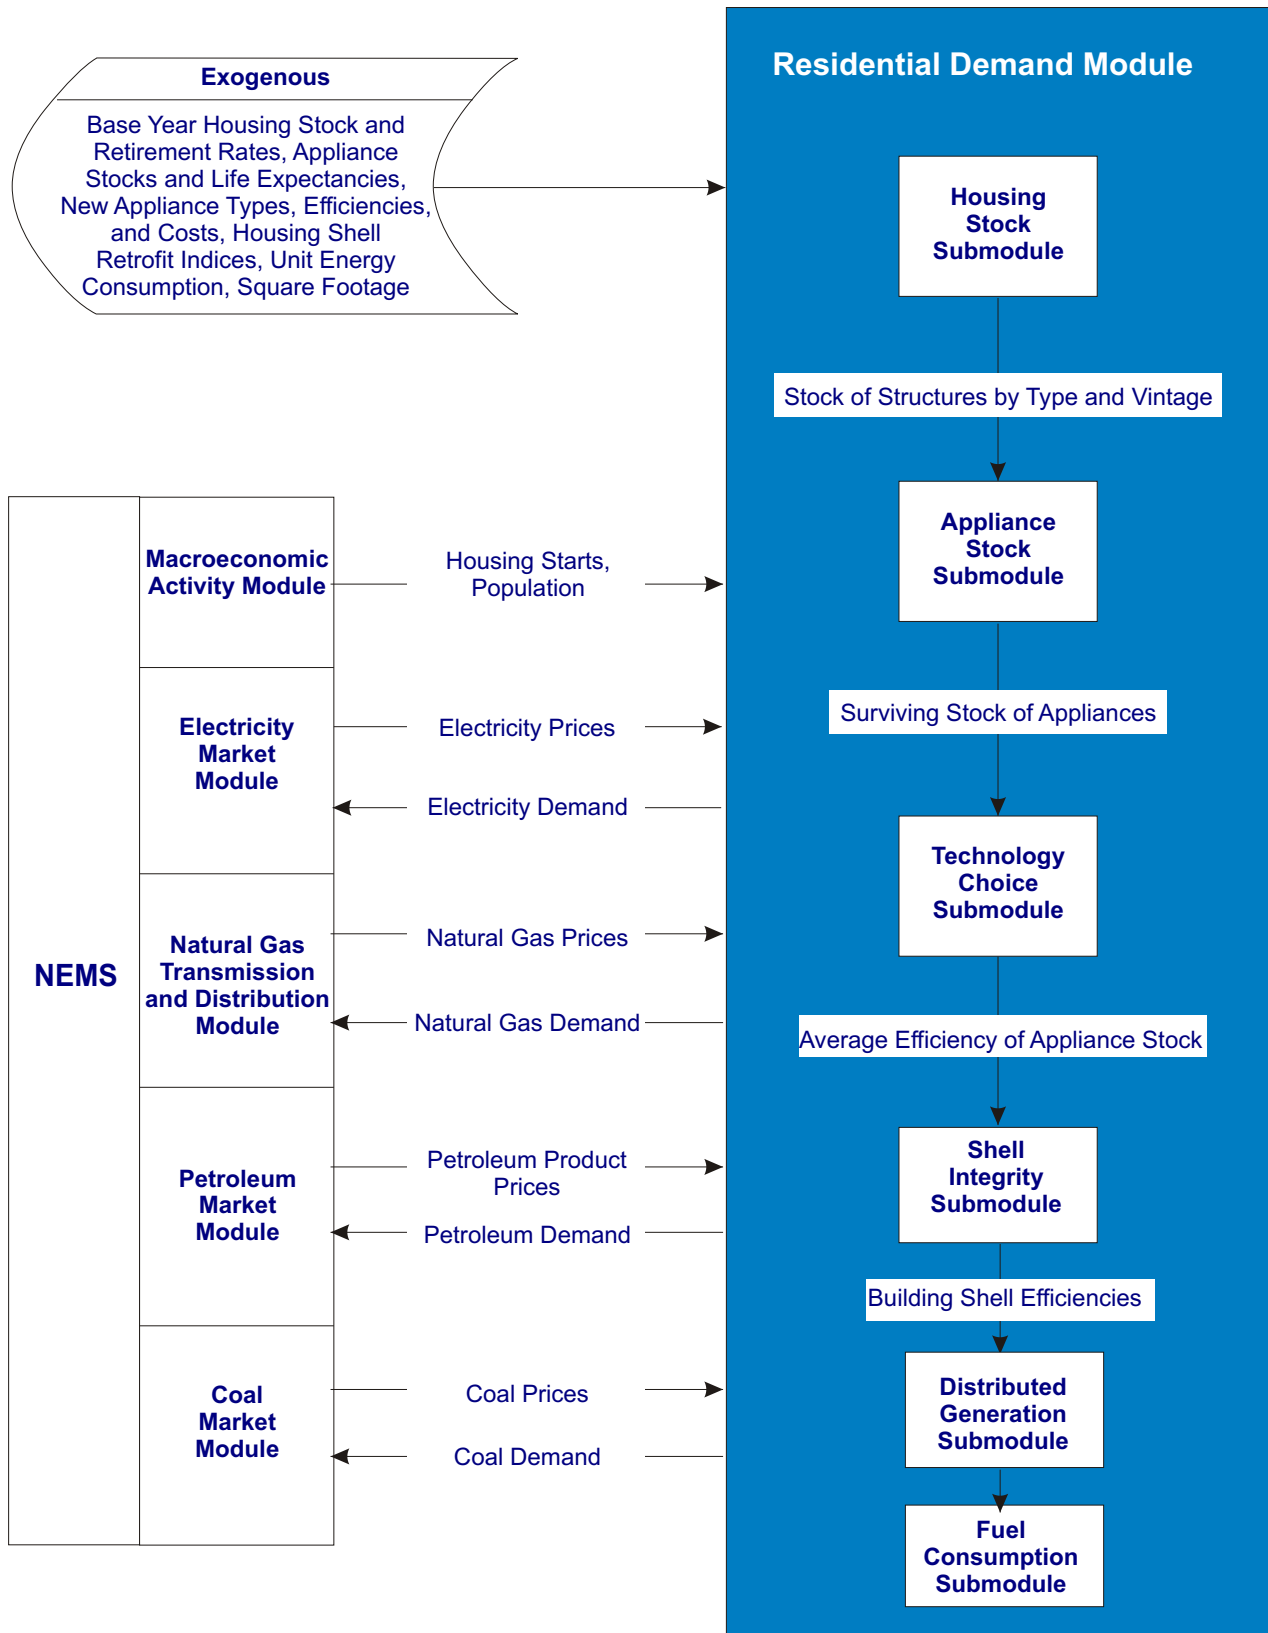

# Residential Demand Module

Table 2. NEMS Residential Module Equipment Summary

<p><b>Space Heating Equipment:</b> electric furnace, electric air-source heat pump, natural gas furnace, natural gas hydronic, kerosene furnace, liquefied petroleum gas, distillate furnace, distillate hydronic, wood stove, ground-source heat pump, natural gas heat pump.</p> <p><b>Space Cooling Equipment:</b> room air conditioner, central air conditioner, electric air-source heat pump, ground-source heat pump, natural gas heat pump.</p> <p><b>Water Heaters:</b> solar, natural gas, electric distillate, liquefied petroleum gas.</p> <p><b>Refrigerators:</b> 18 cubic foot top-mounted freezer, 25 cubic foot side-by-side with through-the-door features.</p> <p><b>Freezers:</b> chest - manual defrost, upright - manual defrost.</p> <p><b>Lighting:</b> incandescent, compact fluorescent, LED, halogen, linear fluorescent.</p> <p><b>Clothes Dryers:</b> natural gas, electric.</p> <p><b>Cooking:</b> natural gas, electric, liquefied petroleum gas.</p> <p><b>Dishwashers</b></p> <p><b>Clothes Washers</b></p> <p><b>Fuel Cells</b></p> <p><b>Solar Photovoltaic</b></p> <p><b>Wind</b></p>
---

based on relative life cycle costs for all competing technology and fuel combinations. Once new home heating system shares are established, the fuel choices for other services, such as water heating and cooking, are determined based on the fuel chosen for space heating. For replacement purchases, fuel switching is allowed for an assumed percentage of all replacements but is dependent on the estimated costs of fuel-switching (for example, switching from electric to gas heating is assumed to involve the costs of running a new gas line).

For both replacement equipment and new construction, a “second-stage” of the equipment choice decision requires selecting from several available efficiency levels. The efficiency range of available equipment represents a “menu” of efficiency levels and installed cost combinations projected to be available at the time the choice is being made. Costs and efficiencies for selected appliances are shown in Table 3, derived from

the report Assumptions to the *Annual Energy Outlook 2009*.<sup>12</sup> At the low end of the efficiency range are the minimum levels required by legislated standards. In any given year, higher efficiency levels are associated with higher installed costs. Thus, purchasing higher than the minimum efficiency involves a trade-off between higher installation costs and future savings in energy expenditures. In RDM, these trade-offs are calibrated to recent shipment, cost, and efficiency data. Changes in purchases by efficiency level are based on changes in either the installed capital costs or changes in the first-year operating costs across the available efficiency levels. As energy prices increase, the incentive of greater energy expenditures savings will promote increased purchases of higher-efficiency equipment. In some cases, due to government programs or general projections of technology improvement, increases in efficiency or decreases in the installed costs of higher-efficiency equipment will also promote purchases of higher-efficiency equipment.

## Shell Integrity Submodule

Shell integrity is also tracked separately for the existing housing stock and new construction. Shell integrity for existing construction is assumed to respond to increases in real energy prices by becoming more efficient. There is no change in existing shell integrity when real energy prices decline. New shell efficiencies are based on the cost and performance of the heating and cooling equipment as well as the shell characteristics. Several efficiency levels of shell characteristics are available throughout the projection period and can change over time based on changes in building codes. All shell efficiencies are subject to a maximum shell efficiency based on studies of currently available residential construction methods.

## Distributed Generation Submodule

Distributed generation equipment with explicit technology characterizations is also modeled for residential customers. Currently, three technologies are characterized, photovoltaics, wind, and fuel cells. The submodule incorporates historical estimates of photovoltaics (residential-sized fuel cells are not expected to be commercialized until after 2005, the base year of the model) from its technology characterization and exogenous penetration input file. Program-based photovoltaic

12 Energy Information Administration, Assumptions to the Annual Energy Outlook 2009, [http://www.eia.doe.gov/oiaf/aeo/assumption/pdf/0554\(2009\).pdf](http://www.eia.doe.gov/oiaf/aeo/assumption/pdf/0554(2009).pdf) (Washington, DC, March 2009).

## Residential Demand Module

estimates for the Department of Energy's Million Solar Roofs program are also input to the submodule from the exogenous penetration portion of the input file. Endogenous, economic purchases are based on a penetration function driven by a cash flow model that simulates the costs and benefits of distributed generation purchases. The cash flow calculations are developed from NEMS projected energy prices coupled with the technology characterizations provided from the input file.

Potential economic purchases are modeled by Census division and technology for all years subsequent to the base year. The cash flow model develops a 30-year cost-benefit horizon for each potential investment. It includes considerations of annual costs (down payments, loan payments, maintenance costs and, for fuel cells, gas costs) and annual benefits (interest tax deductions, any applicable tax credits, electricity cost savings, and water heating savings for fuel cells) over the entire 30-year period. Penetration for a potential investment in either photovoltaics, wind, or fuel cells is a function of whether it achieves a cumulative positive discounted cash flow, and if so, how many years it takes to achieve it.

Once the cumulative stock of distributed equipment is projected, reduced residential purchases of electricity

are provided to NEMS. For fuel cells, increased residential natural gas consumption is also provided to NEMS based on the calculated energy input requirements of the fuel cells, partially offset by natural gas water heating savings from the use of waste heat from the fuel cell.

### Energy Consumption Submodule

The fuel consumption submodule modifies base year energy consumption intensities in each projection year. Base year energy consumption for each end use is derived from energy intensity estimates from the 2005 RECS. The base year energy intensities are modified for the following effects: (1) increases in efficiency, based on a comparison of the appliance stock serving this end use relative to the base year stock, (2) changes in shell integrity for space heating and cooling end uses, (3) changes in real fuel prices—(short-run price elasticity effects), (4) changes in square footage, (5) changes in the number of occupants per household, (6) changes in disposable income, (7) changes in weather relative to the base year, (8) adjustments in utilization rates caused by efficiency increases (efficiency "rebound" effects), and (9) reductions in purchased electricity and increases in natural gas consumption from distributed generation. Once these modifications are made, total energy use is computed across end uses and housing types and then summed by fuel for each Census division.

Table 3. Characteristics of Selected Equipment

Equipment Type	Relative Performance <sup>1</sup>	2007 Installed Cost (\$2007) <sup>2</sup>	Efficiency <sup>3</sup>	2020 Installed Cost (\$2007) <sup>2</sup>	Efficiency <sup>3</sup>	Approximate Hurdle Rate
Electric Heat Pump	Minimum	\$3,800	13.0	\$3,800	13.0	15%
	Best	\$6,700	17.0	\$6,700	20.0	
Natural Gas Furnace	Minimum	\$1,900	0.80	\$1,900	0.80	15%
	Best	\$3,050	0.96	\$2,700	0.96	
Room Air Conditioner	Minimum	\$310	9.8	\$310	9.8	140%
	Best	\$925	11.7	\$875	12.0	
Central Air Conditioner	Minimum	\$3,000	13.0	\$3,000	13.0	15%
	Best	\$5,700	21.0	\$5,750	23.0	
Refrigerator (23.9 cubic ft in adjusted volume)	Minimum	\$550	510	\$550	510	19%
	Best	\$950	417	\$1000	417	
Electric Water Heater	Minimum	\$400	0.90	\$400	0.90	30%
	Best	\$1,400	2.4	\$1,700	2.4	

<sup>1</sup>Minimum performance refers to the lowest efficiency equipment available. Best refers to the highest efficiency equipment available.

<sup>2</sup>Installed costs are given in 2007 dollars in the original source document.

<sup>3</sup>Efficiency measurements vary by equipment type. Electric heat pumps and central air conditioners are rated for cooling performance using the Seasonal Energy Efficiency Ratio (SEER); natural gas furnaces are based on Annual Fuel Utilization Efficiency; room air conditioners are based on Energy Efficiency Ratio (EER); refrigerators are based on kilowatt-hours per year; and water heaters are based on Energy Factor (delivered Btu divided by input Btu).

Source: Navigant Consulting, *EIA Technology Forecast Updates-Residential and Commercial Buildings Technologies*, September 2007.

# **Commercial Demand Module**

---

# Commercial Demand Module

The commercial demand module (CDM) projects energy consumption by Census division for eight marketed energy sources plus solar, wind, and geothermal energy. For the three major commercial sector fuels, electricity, natural gas and distillate oil, CDM is a structural model and the projections are built up from the stock of commercial floorspace and energy-consuming equipment. For the remaining five marketed minor fuels, simple econometric projections are made.

The commercial sector encompasses business establishments that are not engaged in industrial or transportation activities. Commercial sector energy is consumed mainly in buildings, except for a relatively small amount for services such as street lights and water supply. CDM incorporates the effects of four broadly-defined determinants of energy consumption: economic and demographics, structural, technology turnover and change, and energy markets. Demographic effects include total floorspace, building type and location. Structural effects include changes in the mix of desired end-use services provided by energy (such as the penetration of telecommunications equipment, personal computers and other office equipment). Technology effects include changes in the stock of installed equipment caused by the normal turnover of old, worn out equipment to newer versions that tend to be more energy efficient, the integrated effects of equipment and building shell (insulation level) in new construction, and the projected availability of equipment with even greater energy-efficiency. Energy market effects include the short-run effects of energy prices on energy demands, the longer-run effects of energy prices on the efficiency of purchased equipment, and limitations on minimum levels of efficiency imposed by legislated efficiency standards. The model structure carries out a sequence of five basic steps, as shown in Figure 6. The first step is to project commercial sector floorspace. The second step is to project the energy services (space heating, lighting, etc.) required by the projected floorspace. The third step is to project the electricity generation and water and space heating supplied by distributed generation and combined heat and power (CHP) technologies. The

fourth step is to select specific technologies (natural gas furnaces, fluorescent lights, etc.) to meet the demand for energy services. The last step is to determine how much energy will be consumed by the equipment chosen to meet the demand for energy services.

## Floorspace Submodule

The base stock of commercial floorspace by Census division and building type is derived from EIA's 2003 Commercial Buildings Energy Consumption Survey (CBECS). CDM receives projections of total floorspace by building type and Census division from the macroeconomic activity module (MAM) based on IHS Global Insight, Inc. definitions of the commercial sector. These projections embody both economic and demographic effects on commercial floorspace. Since the definition of commercial floorspace from IHS Global Insight, Inc. is not calibrated to CBECS, CDM estimates the surviving floorspace from the previous year and then calibrates its new construction so that growth in total floorspace matches that from MAM by building type and Census division.

CDM models commercial floorspace for the following 11 building types:


- Assembly
- Education
- Food sales
- Food service
- Health care
- Lodging
- Office-large
- Office-small
- Mercantile and service
- Warehouse
- Other

CDM Outputs	Inputs from NEMS	Exogenous Inputs
Energy demand by service and fuel type Changes in floorspace and appliance stocks	Energy product prices Interest rates Floorspace growth	Existing commercial floorspace Floorspace survival rates Appliance stocks and survival New appliance types, efficiencies, costs Energy use intensities



# Commercial Demand Module

Figure 6. Commercial Demand Module Structure

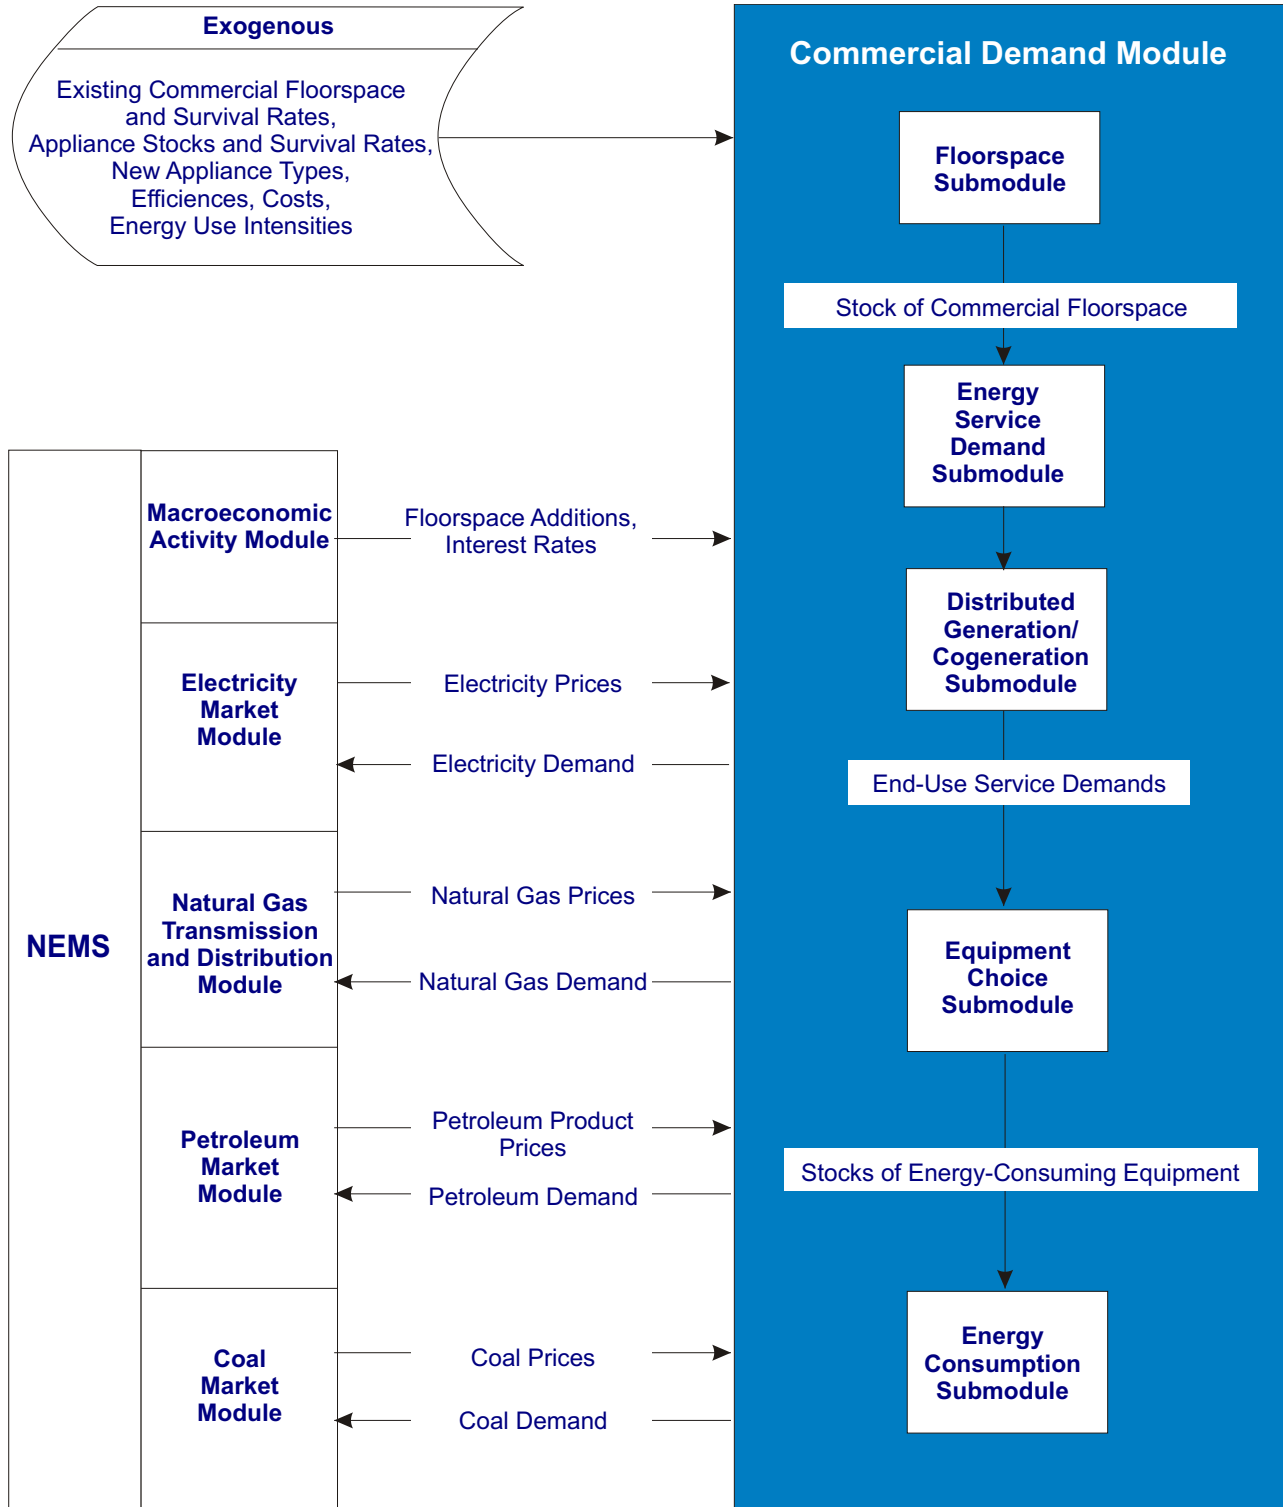



# Commercial Demand Module

---

## Energy Service Demand Submodule

Energy consumption is derived from the demand for energy services. So the next step is to project energy service demands for the projected floorspace. CDM models service demands for the following ten end-use services:

- Heating
- Cooling
- Ventilation
- Water heating
- Lighting
- Cooking
- Refrigeration
- Office equipment personal computer
- Office equipment other
- Other end uses.

Different building types require unique combinations of energy services. A hospital must have more light than a warehouse. An office building in the Northeast requires more heating than one in the South. Total service demand for any service depends on the floorspace, type, and location of buildings. Base service demand by end use by building type and Census division is derived from estimates developed from CBECS energy consumption data. Projected service demands are adjusted for trends in new construction based on CBECS data concerning recent construction.

## Distributed Generation and CHP Submodule

Commercial consumers may decide to purchase equipment to generate electricity (and perhaps provide heat as well) rather than depend on purchased electricity to fulfill all of their electric power requirements. The third step of the commercial module structure is to project electricity generation, fuel consumption, water heating, and space heating supplied by eleven distributed generation and CHP technologies. The technologies characterized include: photovoltaic solar systems, wind turbines, natural gas fuel cells, reciprocating engines, turbines and microturbines, diesel engine, coal-fired CHP, and municipal solid waste, wood, and hydroelectric generators.

Existing electricity generation by CHP technologies is derived from historical data contained in the most recent year's version of Form EIA-860, Annual Electric Generator Report. The estimated units form the installed

base of CHP equipment that is carried forward into future years and supplemented with any additions. Proven installations of solar photovoltaic systems, wind turbines and fuel cells are also included based on information from the Departments of Energy and Defense. For years following the base year, an endogenous projection of distributed generation and CHP is developed based on the economic returns projected for distributed generation technologies. A detailed discounted cash-flow approach is used to estimate the internal rate of return for an investment. The calculations include the annual costs (down payments, loan payments, maintenance costs, and fuel costs) and returns (tax deductions, tax credits, and energy cost savings) from the investment covering a 30-year period from the time of the investment decision. Penetration of these technologies is a function of how quickly an investment in a technology is estimated to recoup its flow of costs. In terms of NEMS projections, investments in distributed generation reduce purchases of electricity. Fuel consuming technologies also generate waste heat that is assumed to be partially captured and used to offset commercial water heating and space heating energy use.

## Equipment Choice Submodule

Once service demands are projected, the next step is to define the type and efficiency of equipment that will be used to satisfy the demands. The bulk of equipment required to meet service demand will carry over from the equipment stock of the previous model year. However, equipment must always be purchased to satisfy service demand for new construction. It must also be purchased to replace equipment that has either worn out (replacement equipment) or reached the end of its economically useful life (retrofit equipment). For required equipment replacements, CDM uses a constant decay rate based on equipment life. A technology will be retrofitted only if the combined annual operating and maintenance costs plus annualized capital costs of a potential technology are lower than the annual operating and maintenance costs of an existing technology.

Equipment choices are made based on a comparison of annualized capital and operating and maintenance costs across all allowable equipment for a particular end-use service. In order to add inertia to the equipment choices, only subsets of the total menu of potentially available equipment may be allowed for defined market segments. For example, only 7 percent of floorspace in large office buildings may consider all available equipment using any fuel or technology when making space

heating equipment replacement decisions. A second segment equal to 31 percent of floorspace, must select from technologies using the same fuel as already installed. A third segment, the remaining 62 percent of floorspace, is constrained to consider only different efficiency levels of the same fuel and technology already installed. For lighting and refrigeration, all replacement choices are limited to the same technology class, where technologies are broadly defined to encompass the principal competing technologies for a particular application. For example, a commercial ice maker may replace another ice maker, but may not replace a refrigerated vending machine.

When computing annualized costs to determine equipment choices, commercial floorspace is segmented by what are referred to as hurdle rates or implicit discount rates (to distinguish them from the generally lower and more common notion of financial discount rates). Seven segments are used to simulate consumer behavior when purchasing commercial equipment. The segments range from rates as low as the 10-year Treasury bond rate to rates high enough to guarantee that only equipment with the lowest capital cost (and least efficiency) is chosen. As real energy prices increase (decrease) there is an incentive for all but the highest implicit discount rate segments to purchase increased (decreased) levels of efficiency.

The equipment choice submodule is designed to choose among a discrete set of technologies that are characterized by a menu which defines availability, capital costs, maintenance costs, efficiencies, and equipment life. Technology characteristics for selected space heating equipment are shown Table 4, derived from the report *Assumptions to the Annual Energy*

Outlook 2009.<sup>13</sup> This menu of equipment includes technological innovation, market developments, and policy interventions. For the *AEO2009*, the technology types that are included for seven of the ten service demand categories are listed in Table 5.

The remaining three end-use services (PC-related office equipment, other office equipment, and other end uses) are considered minor services and are projected using exogenous equipment efficiency and market penetration trends.

### Energy Consumption Submodule

Once the required equipment choices have been made, the total stock and efficiency of equipment for a particular end use are determined. Energy consumption by fuel can be calculated from the amount of service demand satisfied by each technology and the corresponding efficiency of the technology. At this stage, adjustments to energy consumption are also made. These include adjustments for changes in real energy prices (short-run price elasticity effects), adjustments in utilization rates caused by efficiency increases (efficiency rebound effects), and changes for weather relative to the CBECs survey year. Once these modifications are made, total energy use is computed across end uses and building types for the three major fuels, for each Census division. Combining these projections with the econometric/trend projections for the five minor fuels yields total projected commercial energy consumption.

13 Energy Information Administration, *Assumptions to the Annual Energy Outlook 2009*, [http://www.eia.doe.gov/oiaf/aeo/assumption/pdf/0554\(2009\).pdf](http://www.eia.doe.gov/oiaf/aeo/assumption/pdf/0554(2009).pdf) (Washington, DC, March 2009)

# Commercial Demand Module

Table 4. Capital Cost and Efficiency Ratings of Selected Commercial Space Heating Equipment<sup>1</sup>

Equipment Type	Vintage	Efficiency <sup>2</sup>	Capital Cost (\$2007 per Mbtu/hour) <sup>3</sup>	Maintenance Cost (\$2007 per Mbtu/hour) <sup>3</sup>	Service Life (Years)
Electric Rooftop Heat Pump	2007- typical	3.2	\$72.78	\$1.39	15
	2007- high efficiency	3.4	\$96.67	\$1.39	15
	2010 - typical (standard)	3.3	\$76.67	\$1.39	15
	2010 - high efficiency	3.4	\$96.67	\$1.39	15
	2020 - typical	3.3	\$76.67	\$1.39	15
	2020 - high efficiency	3.4	\$96.67	\$1.39	15
Ground-Source Heat Pump	2007 - typical	3.5	\$140.00	\$16.80	20
	2007 - high efficiency	4.9	\$170.00	\$16.80	20
	2010 - typical	3.5	\$140.00	\$16.80	20
	2010 - high efficiency	4.9	\$170.00	\$16.80	20
	2020 - typical	4.0	\$140.00	\$16.80	20
	2020 - high efficiency	4.9	\$170.00	\$16.80	20
Electric Boiler	Current typical	0.98	\$17.53	\$0.58	21
Packaged Electric	Typical	0.96	\$16.87	\$3.95	18
Natural Gas Furnace	Current Standard	0.80	\$9.35	\$0.97	20
	2007 - high efficiency	0.82	\$9.90	\$0.94	20
	2020 - typical	0.81	\$9.23	\$0.96	20
	2020 - high efficiency	0.90	\$11.57	\$0.86	20
	2030 - typical	0.82	\$9.12	\$0.94	20
	2030 - high efficiency	0.91	\$11.44	\$0.85	20
Natural Gas Boiler	Current Standard	0.80	\$22.42	\$0.50	25
	2007 - mid efficiency	0.85	\$25.57	\$0.47	25
	2007 - high efficiency	0.96	\$39.96	\$0.52	25
	2020 - typical	0.82	\$21.84	\$0.49	25
Natural Gas Heat Pump	2007 - absorption	1.4	\$158.33	\$2.50	15
	2010 - absorption	1.4	\$158.33	\$2.50	15
	2020 - absorption	1.4	\$158.33	\$2.50	15
Distillate Oil Furnace	Current Standard	0.81	\$11.14	\$0.96	20
	2020 - typical	0.81	\$11.14	\$0.96	20
Distillate Oil Boiler	Current Standard	0.83	\$17.63	\$0.15	20
	2007 - high efficiency	0.89	\$19.84	\$0.14	20
	2020 - typical	0.83	\$17.63	\$0.15	20

<sup>1</sup>Equipment listed is for the New England Census division, but is also representative of the technology data for the rest of the U.S. See the source referenced below for the complete set of technology data.

<sup>2</sup>Efficiency measurements vary by equipment type. Electric rooftop air-source heat pumps, ground source and natural gas heat pumps are rated for heating performance using coefficient of performance; natural gas and distillate furnaces are based on Thermal Efficiency; and boilers are based on combustion efficiency.

<sup>3</sup>Capital and maintenance costs are given in 2007 dollars.

Source: Energy Information Administration, "EIA - Technology Forecast Updates - Residential and Commercial Building Technologies - Reference Case Second Edition (Revised)", Navigant Consulting, Inc., Reference Number 20070831.1, September 2007.

# Commercial Demand Module

Table 5. Commercial End-Use Technology Types

End-Use Service by Fuel	Technology Types
Electric Space Heating	air-source heat pump, ground-source heat pump, boiler, packaged space heating
Natural Gas Space Heating	boiler, furnace, absorption heat pump
Fuel Oil Space Heating	boiler, furnace
Electric Space Cooling	air-source heat pump, ground-source heat pump, reciprocating chiller, centrifugal chiller, screw chiller, scroll chiller, rooftop air conditioner, residential style central air conditioner, window unit
Natural Gas Space Cooling	absorption chiller, engine-driven chiller, rooftop air conditioner, engine-driven heat pump, absorption heat pump
Electric Water Heating	electric resistance, heat pump water heater, solar water heater with electric back-up
Natural Gas Water Heating	natural gas water heater
Fuel Oil Water Heating	fuel oil water heater
Ventilation	constant air volume (CAV) system, variable air volume (VAV) system
Electric Cooking	range/oven/griddle, induction range/oven/griddle
Natural Gas Cooking	range/oven/griddle, power burner range/oven/griddle
Incandescent Style Lighting	incandescent, compact fluorescent, halogen, halogen-infrared, light emitting diode (LED)
Four-foot Fluorescent Lighting	magnetic ballast, electronic ballast-T8 electronic w/controls, electronic w/reflectors, electronic ballast-T5, electronic ballast-super T8, LED,
Eight-foot Fluorescent Lighting	magnetic ballast, electronic ballast, electronic-high output, LED
High Intensity-Discharge Lighting	metal halide, mercury vapor, high pressure sodium, electronic-T8 high output, electronic-T5 high output, LED
Refrigeration	supermarket compressor rack, supermarket condenser, supermarket display case, walk-in cooler, walk-in freezer, reach-in refrigerator, reach-in freezer, ice machine, beverage merchandiser, refrigerated vending machine

# **Industrial Demand Module**

---

# Industrial Demand Module

The Industrial Demand Module (IDM) projects energy consumption for fuels and feedstocks for fifteen manufacturing industries and six nonmanufacturing industries, subject to delivered prices of energy and macroeconomic variables representing the value of shipments for each industry. The module includes electricity generated through Combined Heat and Power (CHP) systems that is either used in the industrial sector or sold to the electricity grid. The IDM structure is shown in Figure 7.

Industrial energy demand is projected as a combination of “bottom up” characterizations of the energy-using technology and “top down” econometric estimates of behavior. The influence of energy prices on industrial energy consumption is modeled in terms of the efficiency of use of existing capital, the efficiency of new capital acquisitions, and the mix of fuels utilized, given existing capital stocks. Energy conservation from technological change is represented over time by trend-based “technology possibility curves.” These curves represent the aggregate efficiency of all new technologies that are likely to penetrate the future markets as well as the aggregate improvement in efficiency of 2002 technology.

IDM incorporates three major industry categories: energy-intensive manufacturing industries, non-energy-intensive manufacturing industries, and nonmanufacturing industries (see Table 6). The level and type of modeling and detail is different for each. Manufacturing disaggregation is at the 3-digit North American Industrial Classification System (NAICS) level, with some further disaggregation of large and energy-intensive industries. Detailed industries include food, paper, chemicals, glass, cement, steel, and aluminum. Energy product demands are calculated independently for each industry.

Each industry is modeled (where appropriate) as three interrelated components: buildings (BLD), boilers/steam/cogeneration (BSC), and process/assembly (PA) activities. Buildings are estimated to account for 4 percent of energy consumption in manufacturing

Table 6. Economic Subsectors Within the IDM


Energy-Intensive Manufacturing	Nonmanufacturing Industries
Food and Kindred Products (NAICS 311)	Agricultural Production - Crops (NAICS 111)
Paper and Allied Products (NAICS 322)	Other Agriculture including Livestock (NAICS 112-115)
Bulk Chemicals (NAICS 325)	Coal Mining (NAICS 2121)
Glass and Glass Products (NAICS 3272)	Oil and Gas Extraction (NAICS 211)
Hydraulic Cement (NAICS 32731)	Metal and Other Nonmetallic Mining (NAICS 2122-2123)
Blast Furnaces and Basic Steel (NAICS 331111)	Construction (NAICS 233-235)
Aluminum (NAICS 3313)	
Nonenergy-Intensive Manufacturing	
Metals-Based Durables (NAICS 332-336)	
Other Manufacturing (all remaining manufacturing NAICS)	
NAICS = North American Industry Classification System	

industries (in nonmanufacturing industries, building energy consumption is not currently calculated).

Consequently, IDM uses a simple modeling approach for the BLD component. Energy consumption in industrial buildings is assumed to grow at the same rate as the average growth rate of employment and output in that industry. The BSC component consumes energy to meet the steam demands from and provide internally generated electricity to the other two components. The boiler component consumes by-product fuels and fossil fuels to produce steam, which is passed to the PA and BLD components.

IDM Outputs	Inputs from NEMS	Exogenous Inputs
Energy demand by service and fuel type Electricity sales to grid Cogeneration output and fuel consumption	Energy product prices Economic output by industry Refinery fuel consumption Lease and plant fuel consumption Cogeneration from refineries and oil and gas production	Production stages in energy-intensive industries Technology possibility curves Unit energy consumption of outputs Capital stock retirement rates

Figure 7. Industrial Demand Module Structure

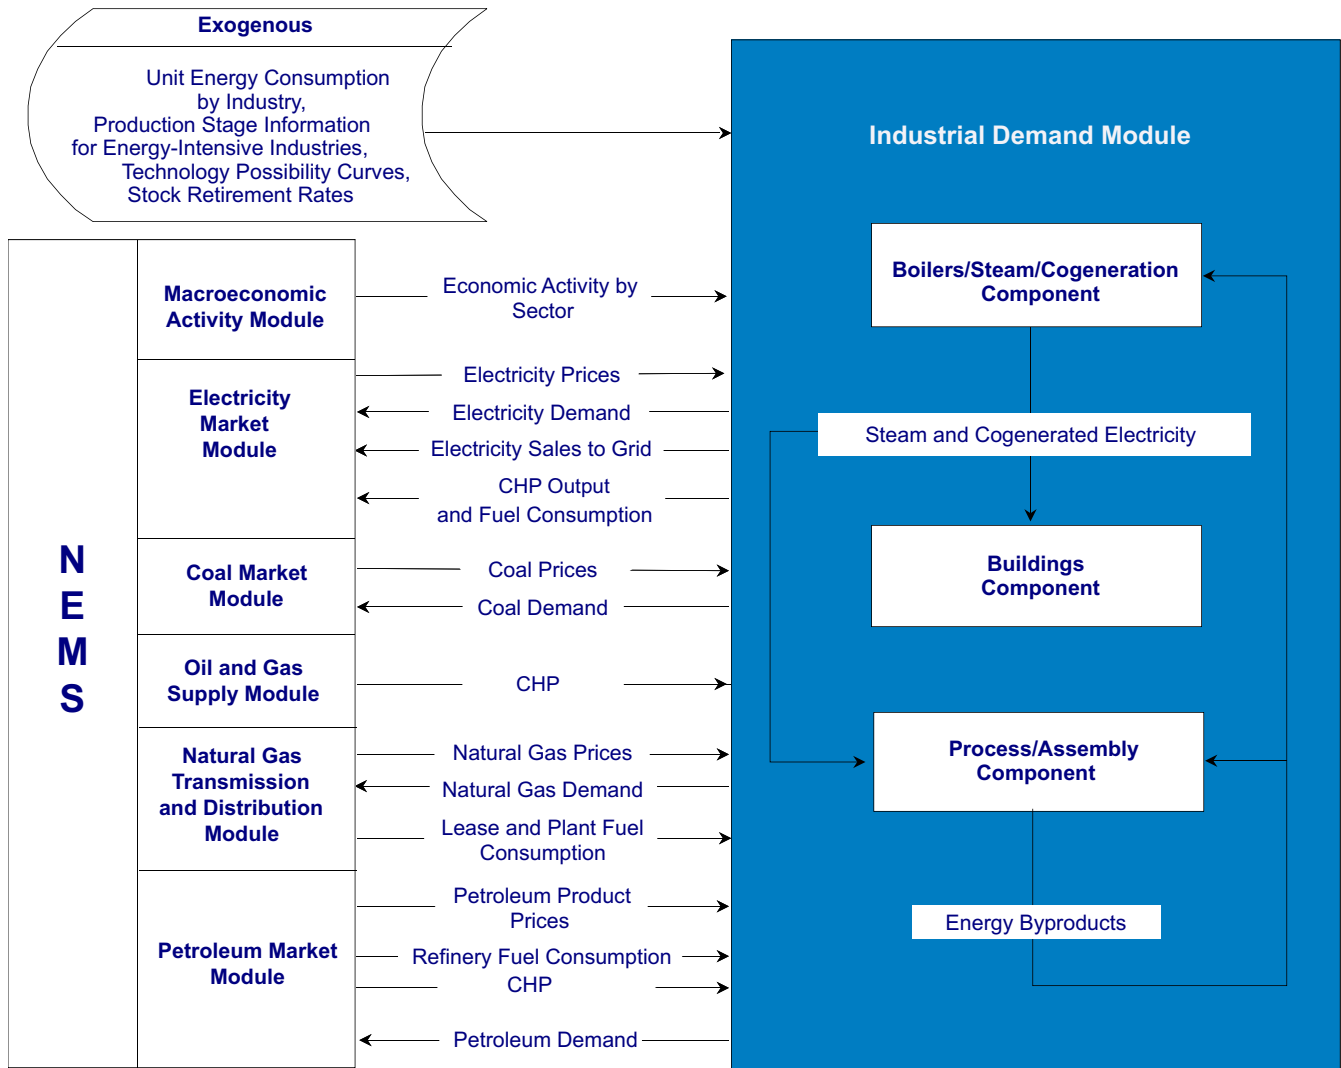

IDM models “traditional” CHP based on steam demand from the BLD and the PA components. The “non-traditional” CHP units are represented in the electricity market module since these units are mainly grid-serving, electricity-price-driven entities.

CHP capacity, generation, and fuel use are calculated from exogenous data on existing and planned capacity additions and new additions determined from an engineering and economic evaluation. Existing CHP capacity and planned additions are derived from Form EIA-860, “Annual Electric Generator Report,” formerly Form EIA-867, “Annual Nonutility Power Producer Report.” Existing CHP capacity is assumed to remain in

service throughout the projection or, equivalently, to be refurbished or replaced with similar units of equal capacity.

Calculation of unplanned CHP capacity additions begins in 2009. Modeling of unplanned capacity additions is done in two parts: biomass-fueled and fossil-fueled. Biomass CHP capacity is assumed to be added to the extent possible as additional biomass waste products are produced, primarily in the pulp and paper industry. The amount of biomass CHP capacity added is equal to the quantity of new biomass available (in Btu), divided by the total heat rate from biomass steam turbine CHP.



# Industrial Demand Module

Table 7. Fuel-Consuming Activities for the Energy-Intensive Manufacturing Subsectors

End Use Characterization
<b>Food:</b> direct fuel, hot water/steam, refrigeration, and other energy uses.
<b>Bulk Chemicals:</b> direct fuel, hot water/steam, electrolytic, and other energy uses.
Process Step characterization
<b>Pulp and Paper:</b> wood preparation, waste pulping, mechanical pulping, semi-chemical pulping, kraft pulping, bleaching, and paper making.
<b>Glass:</b> batch preparation, melting/refining, and forming.
<b>Cement:</b> dry process clinker, wet process clinker, and finish grinding.
<b>Steel:</b> coke oven, open hearth steel making, basic oxygen furnace steel making, electric arc furnace steel making, ingot casting, continuous casting, hot rolling, and cold rolling.
<b>Aluminum:</b> primary and secondary (scrap) aluminum smelting, semi-fabrication (e.g. sheet, wire, etc.).

It is assumed that the technical potential for fossil-fuel source CHP is based primarily on supplying thermal requirements. First, the model assesses the amount of capacity that could be added to generate the industrial steam requirements not met by existing CHP. The second step is an economic evaluation of gas turbine prototypes for each steam load segment. Finally, CHP additions are projected based on a range of acceptable payback periods.

The PA component accounts for the largest share of direct energy consumption for heat and power, 55 percent. For the seven most energy-intensive industries, process steps or end uses are modeled using engineering concepts. The production process is decomposed into the major steps, and the energy relationships among the steps are specified.

The energy intensities of the process steps or end uses vary over time, both for existing technology and for technologies expected to be adopted in the future. In IDM, this variation is based on engineering judgement and is reflected in the parameters of technology possibility curves, which show the declining energy intensity of existing and new capital relative to the 2002 stock.

IDM uses “technology bundles” to characterize technological change in the energy-intensive industries.

These bundles are defined for each production process step for five of the industries and for end uses in the remaining two energy-intensive industries. The process step industries are pulp and paper, glass, cement, steel, and aluminum. The end-use industries are food and bulk chemicals (see Table 7).

Machine drive electricity consumption in the food, bulk chemicals, metal-based durables, and balance of manufacturing sectors is calculated by a motor stock model. The beginning stock of motors is modified over the projection horizon as motors are added to accommodate growth in shipments for each sector, as motors are retired and replaced, and as failed motors are rewound. When a new motor is added, either to accommodate growth or as a replacement, an economic choice is made between purchasing a motor that meets the EPACT minimum for efficiency or a premium efficiency motor. There are seven motor size groups in each of the four industries. The EPACT efficiency standards only apply to the five smallest groups (up to 200 horsepower). As the motor stock changes over the projection horizon, the overall efficiency of the motor population changes as well.

The Unit Energy Consumption (UEC) is defined as the energy use per ton of throughput at a process step or as energy use per dollar of shipments for the end-use industries. The “Existing UEC” is the current average installed intensity as of 2002. The “New 2002 UEC” is the intensity assumed to prevail for a new installation in 2002. Similarly, the “New 2030 UEC” is the intensity expected to prevail for a new installation in 2030. For intervening years, the intensity is interpolated.

The rate at which the average intensity declines is determined by the rate and timing of new additions to capacity. In IDM, the rate and timing of new additions are functions of retirement rates and industry growth rates.

IDM uses a vintaged capital stock accounting framework that models energy use in new additions to the stock and in the existing stock. This capital stock is represented as the aggregate vintage of all plants built within an industry and does not imply the inclusion of specific technologies or capital equipment.

The capital stock is grouped into three vintages: old, middle, and new. The old vintage consists of capital in production prior to 2002, which is assumed to retire at a fixed rate each year. Middle-vintage capital is that added after 2002. New production capacity is built in the projection years when the capacity of the existing stock of capital in



## Industrial Demand Module

---

IDM cannot produce the output projected by the NEMS regional submodule of the macroeconomic activity module. Capital additions during the projection horizon are retired in subsequent years at the same rate as the pre-2002 capital stock.

The energy-intensive and/or large energy-consuming industries are modeled with a structure that explicitly describes the major process flows or “stages of production” in the industry (some industries have major consuming uses).

Technology penetration at the level of major processes in each industry is based on a technology penetration curve relationship. A second relationship can provide additional energy conservation resulting from increases in

relative energy prices. Major process choices (where applicable) are determined by industry production, specific process flows, and exogenous assumptions.

Recycling, waste products, and byproduct consumption are modeled using parameters based on off-line analysis and assumptions about the manufacturing processes or technologies applied within industry. These analyses and assumptions are mainly based upon environmental regulations such as government requirements about the share of recycled paper used in offices. IDM also accounts for trends within industry toward the production of more specialized products such as specialized steel which can be produced using scrap material versus raw iron ore.

# Transportation Demand Module

---

# Transportation Demand Module

The transportation demand module (TRAN) projects the consumption of transportation sector fuels by transportation mode, including the use of renewables and alternative fuels, subject to delivered prices of energy and macroeconomic variables, including disposable personal income, gross domestic product, level of imports and exports, industrial output, new car and light truck sales, and population. The structure of the module is shown in Figure 8.

Projections of future fuel prices influence fuel efficiency, vehicle-miles traveled, and alternative-fuel vehicle (AFV) market penetration for the current fleet of vehicles. Alternative-fuel vehicle shares are projected on the basis of a multinomial logit model, subject to State and Federal government mandates for minimum AFV sales volumes.

## Fuel Economy Submodule

This submodule projects new light-duty vehicle fuel economy by 12 U.S. Environmental Protection Agency (EPA) vehicle size classes and 16 propulsion technologies (gasoline, diesel, and 14 AFV technologies) as a function of energy prices and income-related variables. There are 61 fuel-saving technologies which vary in cost and marginal fuel savings by size class. Characteristics of a sample of these technologies are shown in Table 8, a complete list is published in *Assumptions to the Annual Energy Outlook 2009*.<sup>14</sup> Technologies penetrate the market based on a cost-effectiveness algorithm that compares the technology cost to the discounted stream of fuel savings and the value of performance to the consumer. In general, higher fuel prices lead to higher fuel efficiency estimates

within each size class, a shift to a more fuel-efficient size class mix, and an increase in the rate at which alternative-fuel vehicles enter the marketplace.

## Regional Sales Submodule

Vehicle sales from the MAM are divided into car and light truck sales. The remainder of the submodule is a simple accounting mechanism that uses endogenous estimates of new car and light truck sales and the historical regional vehicle sales adjusted for regional population trends to produce estimates of regional sales, which are subsequently passed to the alternative-fuel vehicle and the light-duty vehicle stock submodules.

## Alternative-Fuel Vehicle Submodule

This submodule projects the sales shares of alternative-fuel technologies as a function of technology attributes, costs, and fuel prices. The alternative-fuel vehicles attributes are shown in Table 9, derived from *Assumptions to the Annual Energy Outlook 2009*. Both conventional and new technology vehicles are considered. The alternative-fuel vehicle submodule receives regional new car and light truck sales by size class from the regional sales submodule.

The projection of vehicle sales by technology utilizes a nested multinomial logit (NMNL) model that predicts sales shares based on relevant vehicle and fuel attributes. The nesting structure first predicts the probability of fuel choice for multi-fuel vehicles within a technology set. The second level nesting predicts penetration among similar technologies within a technology set (i.e. gasoline versus diesel hybrids). The third level choice determines market share among the different technology sets.<sup>15</sup>

TRAN Outputs	Inputs from NEMS	Exogenous Inputs
Fuel demand by mode Sales, stocks, and characteristics of vehicle types by size class Vehicle-miles traveled Fuel economy by technology type Alternative-fuel vehicle sales by technology type Light-duty commercial fleet vehicle characteristics	Energy product prices Gross domestic product Disposable personal income Industrial output Vehicle sales International trade Natural gas pipeline Population	Existing vehicle stocks by vintage and fuel economy Vehicle survival rates New vehicle technology characteristics Fuel availability Commercial availability Vehicle safety and emissions regulations Vehicle miles-per-gallon degradation rates

14 Energy Information Administration, *Assumptions to the Annual Energy Outlook 2009*

[http://www.eia.doe.gov/oi/aeo/assumption/pdf/0554\(2009\)](http://www.eia.doe.gov/oi/aeo/assumption/pdf/0554(2009)) (Washington, DC, January 2009).

15 Greene, David L. and S.M. Chin, "Alternative Fuels and Vehicles (AFV) Model Changes," Center for Transportation Analysis, Oak Ridge National Laboratory, page 1, (Oak Ridge, TN, November 14, 2000).

# Transportation Demand Module

Table 8. Selected Technology Characteristics for Automobiles

	Fractional Fuel Efficiency Change	First Year Introduced	Fractional Horsepower Change
Material Substitution IV	0.099	2006	0
Drag Reduction IV	0.042	2000	0
5-Speed Automatic	0.025	1995	0
CVT	0.052	1998	0
Automated Manual Trans	0.073	2004	0
VVL-6 Clinder	0.033	2000	0.10
Camless Valve Actuation 6 Cylinder	0.058	2020	0.13
Electric Power Steering	0.015	2004	0
42V-Launch Assist and Regen	0.075	2005	-0.05


Table 9. Examples of Midsize Automobile Attributes

	Year	Gasoline	TDI Diesel	Ethanol Flex	LPG Bi-Fuel	Electric Gasoline Hybrid	Fuel Cell Hydrogen
Vehicle Price (thousand 2007 dollars)	2006	28.0	29.8	28.7	33.3	31.1	78.6*
	2030	29.8	30.7	30.2	35.0	31.0	54.2
Vehicle Miles per Gallon	2006	29.5	39.8	29.9	29.6	42.7	53.3*
	2030	37.8	48.2	38.1	37.7	51.0	54.9
Vehicle Range (miles)	2006	521	704	381	417	652	594*
	2030	674	910	492	539	843	674

\*First year of availability

# Transportation Demand Module

Figure 8. Transportation Demand Module Structure

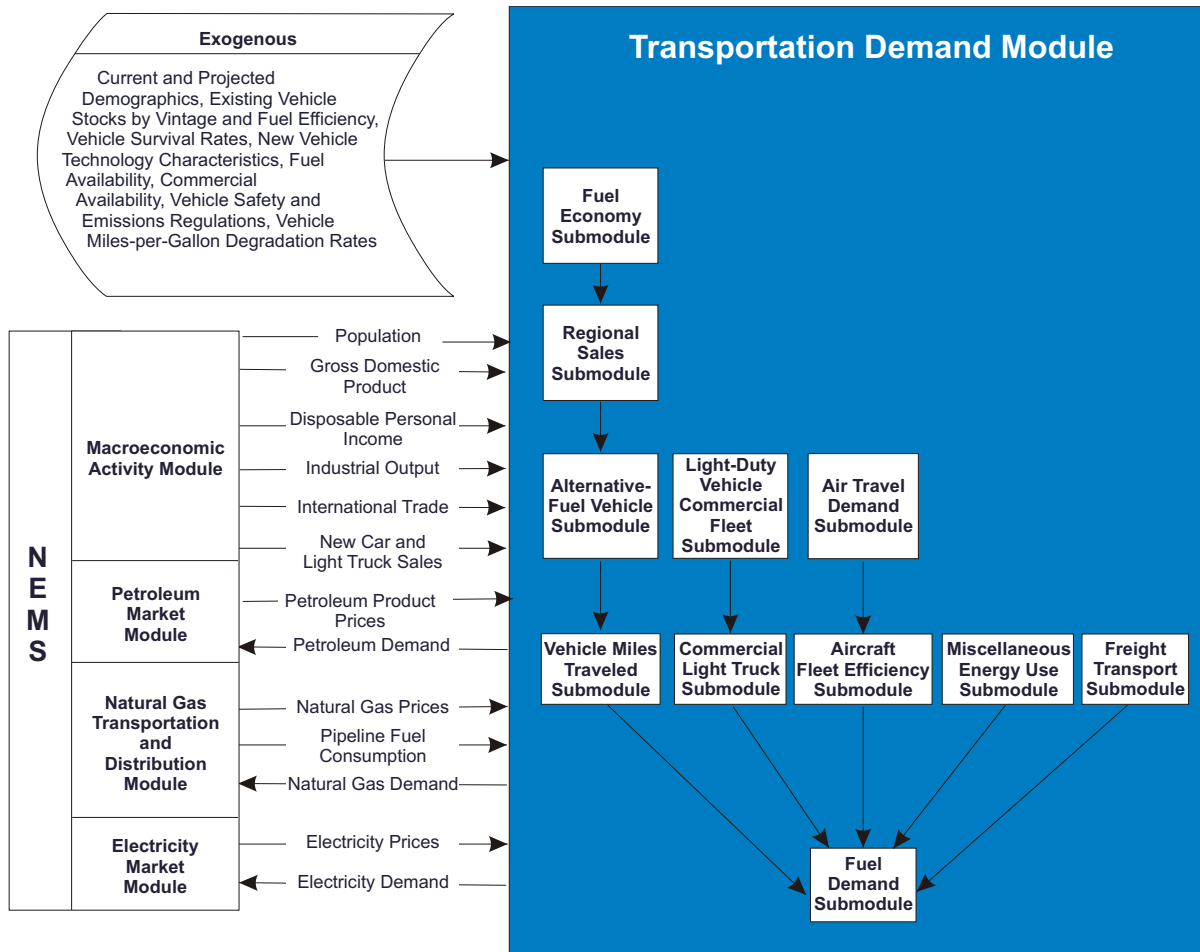

Alternative Fuel Vehicles
Ethanol flex-fueled
Ethanol neat (85 percent ethanol)
Compressed natural gas (CNG)
CNG bi-fuel
Liquefied petroleum gas (LPG)
LPG bi-fuel
Battery electric vehicle
Plug-in hybrid with 10 mile all electric range
Plug-in hybrid with 40 mile all electric range
Gasoline hybrid
Diesel Hybrid
Fuel cell gasoline
Fuel cell hydrogen
Fuel cell methanol

The technology sets include:

- Conventional fuel capable (gasoline, diesel, bi-fuel and flex-fuel),
- Hybrid (gasoline and diesel) and plug-in hybrid
- Dedicated alternative fuel (compressed natural gas (CNG), liquefied petroleum gas (LPG), and ethanol),
- Fuel cell (gasoline, methanol, and hydrogen),
- Electric battery powered (nickel-metal hydride, lithium)

The vehicles attributes considered in the choice algorithm include: price, maintenance cost, battery replacement cost, range, multi-fuel capability, home refueling capability, fuel economy, acceleration and luggage space.

# Transportation Demand Module

With the exception of maintenance cost, battery replacement cost, and luggage space, vehicle attributes are determined endogenously.<sup>16</sup> The fuel attributes used in market share estimation include availability and price. Vehicle attributes vary by six EPA size classes for cars and light trucks and fuel availability varies by Census division. The NMNL model coefficients were developed to reflect purchase preferences for cars and light trucks separately.

## Light-Duty Vehicle (LDV) Stock Submodule

This submodule specifies the inventory of LDVs from year to year. Survival rates are applied to each vintage, and new vehicle sales are introduced into the vehicle stock through an accounting framework. The fleet of vehicles and their fuel efficiency characteristics are important to the translation of transportation services demand into fuel demand.

TRAN maintains a level of detail that includes twenty vintage classifications and six passenger car and six light truck size classes corresponding to EPA interior volume classifications for all vehicles less than 8,500 pounds,

Light Duty Vehicle Size Classes	
Cars:	
	Mini-compact - less than 85 cubic feet
	Subcompact - between 85 and 99 cubic feet
	Compact - between 100 and 109 cubic feet
	Mid-size - between 110 and 119 cubic feet
	Large - 120 or more cubic feet
	Two-seater - designed to seat two adults
Trucks:	
	Small vans - gross vehicle weight rating (GVWR) less than 4,750 pounds
	Large vans - GVWR 4,750 to 8,500 pounds
	Small pickups - GVWR less than 4,750 pounds
	Large pickups - GVWR 4,750 to 8,500 pounds
	Small utility - GVWR less than 4,750 pounds
	Large utility - GVWR 4,750 to 8,500 pounds

as follows:

## Vehicle-Miles Traveled (VMT) Submodule

This submodule projects travel demand for automobiles and light trucks. VMT per capita estimates are based on the fuel cost of driving per mile and per capita disposable

personal income. Total VMT is calculated by multiplying VMT by the number of licensed drivers.

## LDV Commercial Fleet Submodule

This submodule generates estimates of the stock of cars and trucks used in business, government, and utility fleets. It also estimates travel demand, fuel efficiency, and energy consumption for the fleet vehicles prior to their transition to the private sector at predetermined vintages.

## Commercial Light Truck Submodule

The commercial light truck submodule estimates sales, stocks, fuel efficiencies, travel, and fuel demand for all trucks greater than 8,500 pounds and less than 10,000 pounds gross vehicle weight rating.

## Air Travel Demand Submodule

This submodule estimates the demand for both passenger and freight air travel. Passenger travel is projected by domestic travel (within the U.S.), international travel (between U.S. and Non U.S.), and Non U.S. travel. Dedicated air freight travel is estimated for U.S. and Non U.S. demand. In each of the market segments, the demand for air travel is estimated as a function of the cost of air travel (including fuel costs) and economic growth (GDP, disposable income, and merchandise exports).

## Aircraft Fleet Efficiency Submodule

This submodule projects the total world-wide stock and the average fleet efficiency of narrow body, wide body, and regional jets required to meet the projected travel demand. The stock estimation is based on the growth of travel demand and the flow of aircraft into and out of the United States. The overall fleet efficiency is determined by the weighted average of the surviving aircraft efficiency (including retrofits) and the efficiencies of the newly acquired aircraft. Efficiency improvements of new aircraft are determined by projecting the market penetration of advanced aircraft technologies.

16 Energy and Environmental Analysis, Inc., Updates to the Fuel Economy Model (FEM) and Advanced Technology Vehicle (ATV:) Module of the National Energy Modeling System (NEMS) Transportation Model, prepared for the Energy Information Administration (EIA),

# Transportation Demand Module

## Freight Transport Submodule

This submodule translates NEMS estimates of industrial production into ton-miles traveled for rail and ships and into vehicle vehicle-miles traveled for trucks, then into fuel demand by mode of freight travel. The freight truck stock is subdivided into medium and heavy-duty trucks. VMT freight estimates by truck size class and technology are based on matching freight needs, as measured by the growth in industrial output by NAICS code, to VMT levels associated with truck stocks and new vehicles. Rail and shipping ton-miles traveled are also estimated as a function of growth in industrial output.

Freight truck fuel efficiency growth rates are tied to historical growth rates by size class and are also dependent on the maximum penetration, introduction year, fuel trigger price (based on cost-effectiveness), and fuel economy

improvement of advanced technologies, which include alternative-fuel technologies. A subset of the technology characteristics are shown in Table 10. In the rail and shipping modes, energy efficiency estimates are structured to evaluate the potential of both technology trends and efficiency improvements related to energy prices.

## Miscellaneous Energy Use Submodule

This submodule projects the use of energy in military operations, mass transit vehicles, recreational boats, and lubricants, based on endogenous variables within NEMS (e.g., vehicle fuel efficiencies) and exogenous variables (e.g., the military budget).

Table 10. Example of Truck Technology Characteristics (Diesel)

	Fuel Economy Improvement (percent)		Maximum Penetration (percent)		Introduction Year		Capital Cost (2001 dollars)	
	Medium	Heavy	Medium	Heavy	Medium	Heavy	Medium	Heavy
Aero Dynamics: bumper, underside air battles, wheel well covers	3.6	2.3	50	40	2002	N/A	N/A	\$1,500
Low rolling resistance tires	2.3	2.7	50	66	2004	2005	\$180	\$550
Transmission: lock-up, electronic controls, reduced friction	1.8	1.8	100	100	2005	2005	\$750	\$1,000
Diesel Engine: hybrid electric powertrain	36.0	N/A	15	N/A	2010	N/A	\$6,000	N/A
Reduce waste heat, thermal mgmt	N/A	9.0	N/A	35	N/A	2010	N/A	\$2,000
Weight reduction	4.5	9.0	20	30	2010	2005	\$1,300	\$2,000
Diesel Emission No <sub>x</sub> non-thermal plasma catalyst	-1.5	-1.5	25	25	2007	2007	\$1,000	\$1,250
PM catalytic filter	-2.5	-1.5	95	95	2008	2006	\$1,000	\$1,500
HC/CO: oxidation catalyst	-0.5	-0.5	95	95	2002	2002	\$150	\$250
NO <sub>x</sub> adsorbers	-3.0	-3.0	90	90	2007	2007	\$1,500	\$2,500

# **Electricity Market Module**

---



# Electricity Market Module

The electricity market module (EMM) represents the generation, transmission, and pricing of electricity, subject to: delivered prices for coal, petroleum products, and natural gas; the cost of centralized generation from renewable fuels; macroeconomic variables for costs of capital and domestic investment; and electricity load shapes and demand. The submodules consist of capacity planning, fuel dispatching, finance and pricing, and load and demand (Figure 9). In addition, nonutility supply and electricity trade are represented in the fuel dispatching and capacity planning submodules. Nonutility generation from CHP and other facilities whose primary business is not electricity generation is represented in the demand and fuel supply modules. All other nonutility generation is represented in the EMM. The generation of electricity is accounted for in 15 supply regions (Figure 10), and fuel consumption is allocated to the 9 Census divisions.

The EMM determines airborne emissions produced by the generation of electricity. It represents limits for sulfur dioxide and nitrogen oxides specified in the Clean Air Act Amendments of 1990 (CAAA90) and the Clean Air Interstate Rule. The *AEO2009* also models State-level regulations implementing mercury standards. The EMM also has the ability to track and limit emissions of carbon dioxide, and the *AEO2009* includes the regional carbon restrictions of the Regional Greenhouse Gas Initiative (RGGI).

Operating (dispatch) decisions are provided by the cost-minimizing mix of fuel and variable operating and maintenance (O&M) costs, subject to environmental costs. Capacity expansion is determined by the least-cost mix of all costs, including capital, O&M, and fuel. Electricity demand is represented by load curves, which vary by region and season. The solution to the submodules of EMM is simultaneous in that, directly or indirectly, the solution for each submodule depends on the solution to every other submodule. A solution sequence through the submodules can be viewed as follows:

- The electricity load and demand submodule processes electricity demand to construct load curves
- The electricity capacity planning submodule projects the construction of new utility and nonutility plants, the level of firm power trades, and the addition of equipment for environmental compliance
- The electricity fuel dispatch submodule dispatches the available generating units, both utility and nonutility, allowing surplus capacity in select regions to be dispatched to meet another regions needs (economy trade)
- The electricity finance and pricing submodule calculates total revenue requirements for each operation and computes average and marginal-cost based electricity prices.

## Electricity Capacity Planning Submodule


The electricity capacity planning (ECP) submodule determines how best to meet expected growth in electricity demand, given available resources, expected load shapes, expected demands and fuel prices, environmental constraints, and costs for utility and nonutility technologies. When new capacity is required to meet growth in electricity demand, the technology chosen is determined by the timing of the demand increase, the expected utilization of the new capacity, the operating efficiencies, and the construction and operating costs of available technologies.

The expected utilization of the capacity is important in the decision-making process. A technology with relatively high capital costs but comparatively low operating costs (primarily fuel costs) may be the appropriate choice if the capacity is expected to operate continuously (base load). However, a plant type with high operating costs but low capital costs may be the most economical selection to serve the peak load (i.e., the highest demands on the system), which occurs infrequently. Intermediate or cycling load occupies a middle ground between base and peak load and is best served

EMM Outputs	Inputs from NEMS	Exogenous Inputs
Electricity prices and price components Fuel demands Capacity additions Capital requirements Emissions Renewable capacity Avoided costs	Electricity sales Fuel prices Cogeneration supply and fuel consumption Electricity sales to the grid Renewable technology characteristics, allowable capacity, and costs Renewable capacity factors Gross domestic product Interest rates	Financial data Tax assumptions Capital costs Operation and maintenance costs Operating parameters Emissions rates New technologies Existing facilities Transmission constraints

# Electricity Market Module

Figure 9. Electricity Market Module Structure

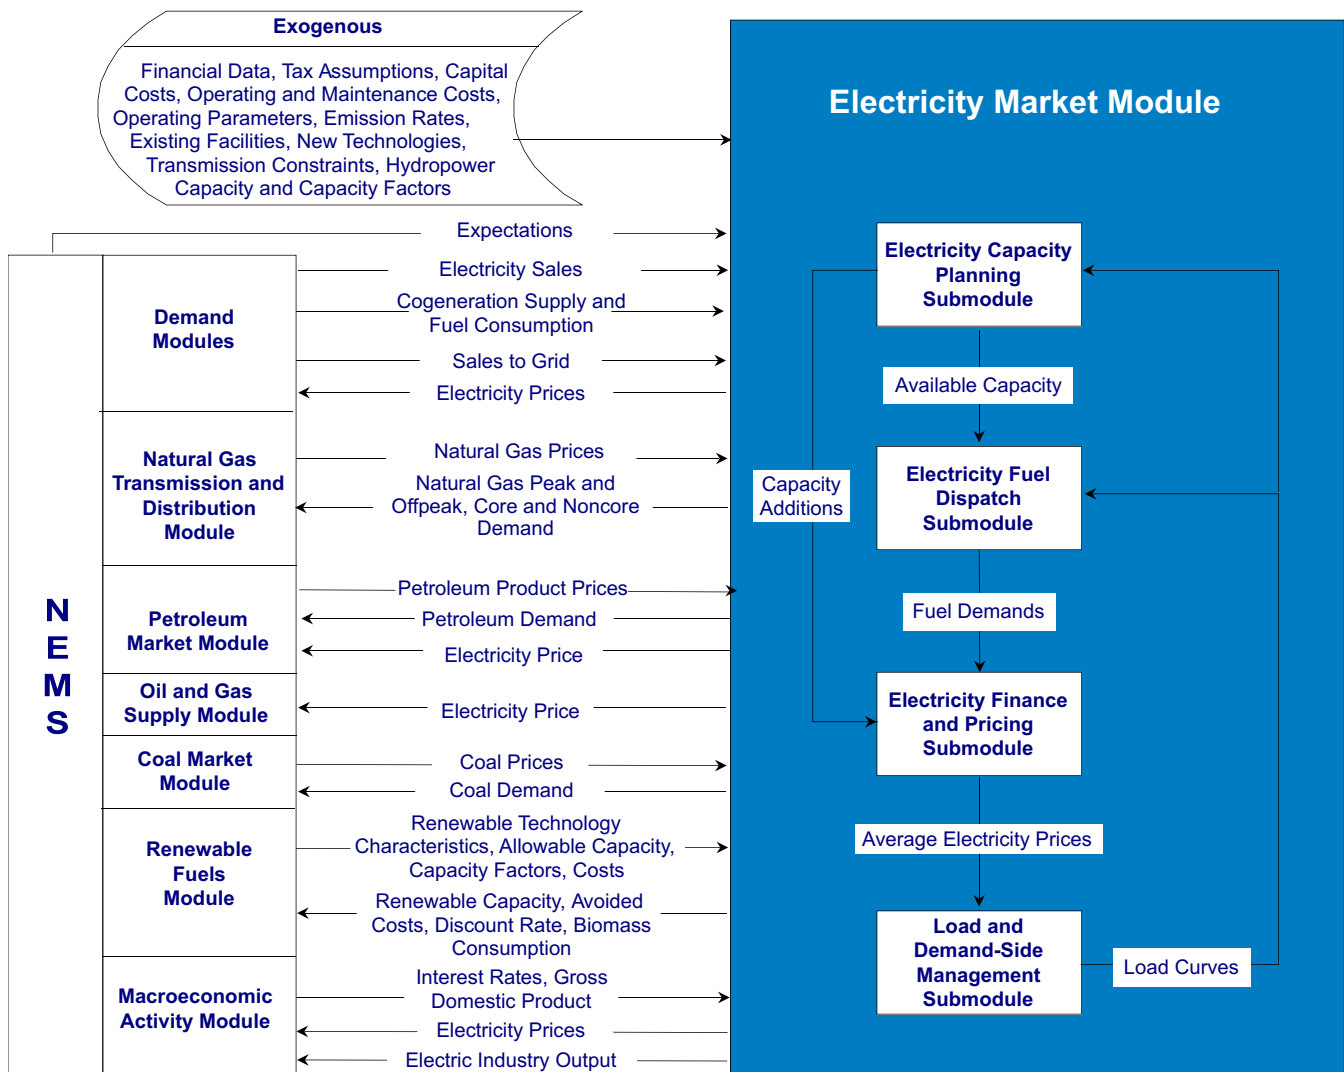

by plants that are cheaper to build than baseload plants and cheaper to operate than peak load plants.

Technologies are compared on the basis of total capital and operating costs incurred over a 20-year period. As new technologies become available, they are competed against conventional plant types. Fossil-fuel, nuclear, and renewable central-station generating technologies are represented, as listed in Table 11. The EMM also considers two distributed generation technologies -baseload and peak. The EMM also has the ability to model a demand storage technology to represent load shifting.

Uncertainty about investment costs for new technologies is captured in ECP using technological optimism and learning factors. The technological optimism factor reflects the inherent tendency to underestimate costs for new technologies. The degree of technological optimism depends on the complexity of the engineering design and the stage of development. As development proceeds and more data become available, cost estimates become more accurate and the technological optimism factor declines.


Learning factors represent reductions in capital costs due to learning-by-doing. For new technologies, cost reductions due to learning also account for international experience in building generating capacity. These factors

# Electricity Market Module

Figure 10. Electricity Market Module Supply Regions

Electricity  
Supply  
Regions

- 1 ECAR
- 2 ERCOT
- 3 MAAC
- 4 MAIN
- 5 MAPP
- 6 NY
- 7 NE
- 8 FL
- 9 STV
- 10 SPP
- 11 NWP
- 12 RA
- 13 CNV
- 14 AK
- 15 HI

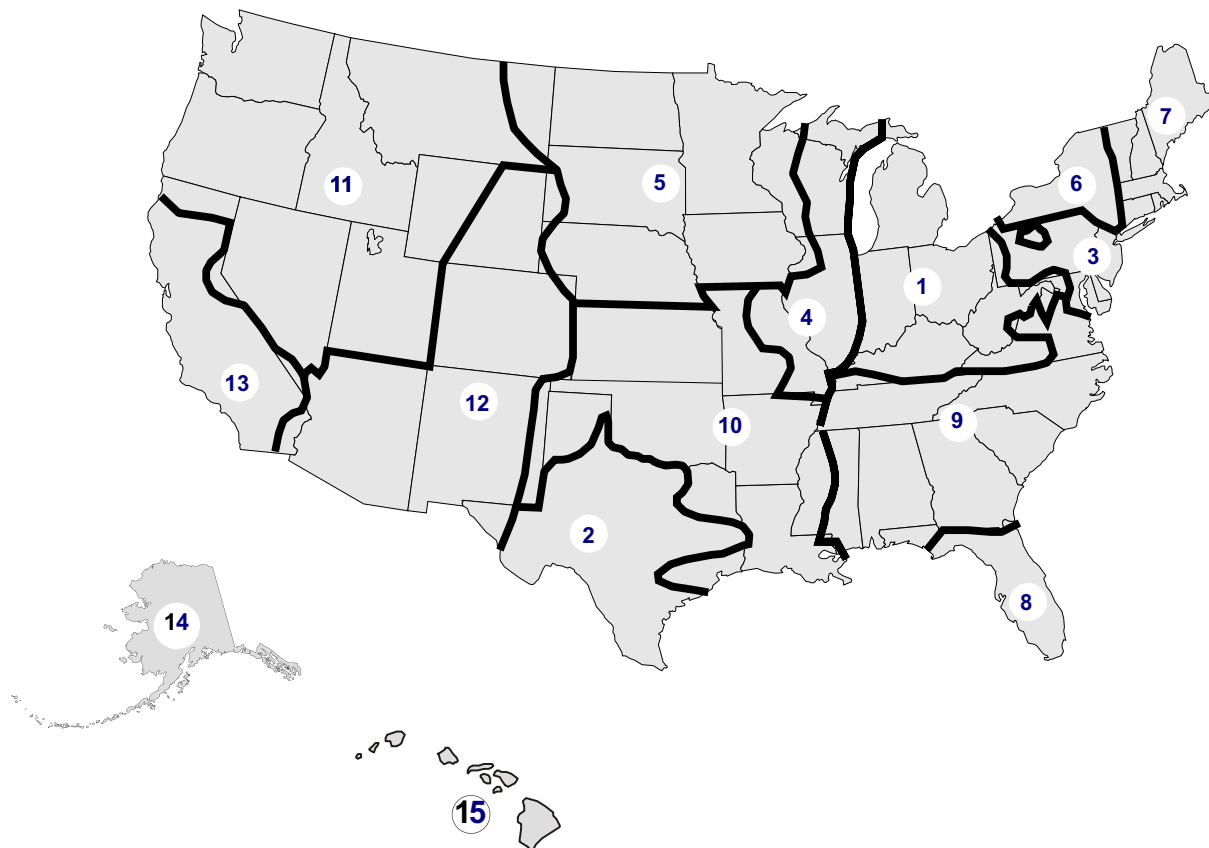

are calculated for each of the major design components of a plant type design. For modeling purposes, components are identified only if the component is shared between multiple plant types, so that the ECP can reflect the learning that occurs across technologies. The cost adjustment factors are based on the cumulative capacity of a given component. A 3-step learning curve is utilized for all design components.

Typically, the greatest amount of learning occurs during the initial stages of development and the rate of cost reductions declines as commercialization progresses. Each step of the curve is characterized by the learning rate and the number of doublings of capacity in which this rate is applied. Depending on the stage of development for a particular component, some of the learning may already be incorporated in the initial cost estimate.

Capital costs for all new electricity generating technologies (fossil, nuclear, and renewable) decrease in response to foreign and domestic experience. Foreign units of new technologies are assumed to contribute to reductions in capital costs for units that are installed in the United States to the extent that (1) the technology characteristics are similar to those used in U.S. markets, (2) the design and construction firms and key personnel compete in the U.S. market, (3) the owning and operating firm competes actively in the United States, and (4) there exists relatively complete information about the status of the associated facility. If the new foreign units do not satisfy one or more of these requirements, they are given a reduced weight or not included in the learning effects calculation. Capital costs, heat rates, and first year of availability from the *AEO2009* reference case are shown in Table 12; capital costs represent the costs of building

# Electricity Market Module

new plants ordered in 2008. Additional information about costs and performance characteristics can be found on page 89 of the "Assumptions to the Annual Energy Outlook 2009."<sup>17</sup>

Initially, investment decisions are determined in ECP using cost and performance characteristics that are represented as single point estimates corresponding to the average (expected) cost. However, these parameters are also subject to uncertainty and are better represented by distributions. If the distributions of two or more options overlap, the option with the lowest average cost is not likely to capture the entire market. Therefore, ECP uses a market-sharing algorithm to adjust the initial solution and reallocate some of the capacity expansion decisions to technologies that are competitive but do not have the lowest average cost.

Fossil-fired steam and nuclear plant retirements are calculated endogenously within the model. Plants are retired if the market price of electricity is not sufficient to support continued operation. The expected revenues from these plants are compared to the annual going-forward costs, which are mainly fuel and O&M costs. A plant is retired if these costs exceed the revenues and the overall cost of electricity can be reduced by building replacement capacity.

The ECP submodule also determines whether to contract for unplanned firm power imports from Canada and from neighboring electricity supply regions. Imports from Canada are competed using supply curves developed from cost estimates for potential hydroelectric projects in Canada. Imports from neighboring electricity supply regions are competed in the ECP based on the cost of the unit in the exporting region plus the additional cost of transmitting the power. Transmission costs are computed as a fraction of revenue.

After building new capacity, the submodule passes total available capacity to the electricity fuel dispatch submodule and new capacity expenses to the electricity finance and pricing submodule.

## Electricity Fuel Dispatch Submodule

Given available capacity, firm purchased-power agreements, fuel prices, and load curves, the electricity fuel dispatch (EFD) submodule minimizes variable

Table 11. Generating Technologies

<b>Fossil</b>
Existing coal steam plants (with or without environmental controls) New pulverized coal with environmental controls Advanced clean coal technology Advanced clean coal technology with sequestration Oil/Gas steam Conventional combined cycle Advanced combined cycle Advanced combined cycle with sequestration Conventional combustion turbine Fuel cells
<b>Nuclear</b>
Conventional nuclear Advanced nuclear
<b>Renewables</b>
Conventional hydropower Pumped storage Geothermal Solar-thermal Solar-photovoltaic Wind - onshore and offshore Wood Municipal solid waste
<small>Environmental controls include flue gas desulfurization (FGD), selective catalytic reduction (SCR), selective non-catalytic reduction (SNCR), fabric filters, spray cooling, activated carbon injection (ACI), and particulate removal equipment.</small>

costs as it solves for generation facility utilization and economy power exchanges to satisfy demand in each time period and region. Limits on emissions of sulfur dioxide from generating units and the engineering characteristics of units serve as constraints. Coal-fired capacity can co-fire with biomass in order to lower operating costs and/or emissions.

The EFD uses a linear programming (LP) approach to provide a minimum cost solution to allocating (dispatching) capacity to meet demand. It simulates the electric transmission network on the NERC region level and simultaneously dispatches capacity regionally by time slice until demand for the year is met. Traditional cogeneration and firm trade capacity is removed from the load duration curve prior to the dispatch decision. Capacity costs for each time slice are based on fuel and variable O&M costs, making adjustments for RPS

17 Energy Information Administration, *Assumptions to the Annual Energy Outlook 2009*, [http://www.eia.doe.gov/oiia/aeo/assumption/pdf/0554\(2009\).pdf](http://www.eia.doe.gov/oiia/aeo/assumption/pdf/0554(2009).pdf) (March 2009)

# Electricity Market Module

credits, if applicable, and production tax credits. Generators are required to meet planned maintenance requirements, as defined by plant type.

Interregional economy trade is also represented in the EFD submodule by allowing surplus generation in one region to satisfy electricity demand in an importing region, resulting in a cost savings. Economy trade with Canada is determined in a similar manner as interregional economy trade. Surplus Canadian energy is allowed to displace energy in an importing region if it results in a cost savings. After dispatching, fuel use is reported back to the fuel supply modules and operating expenses and revenues from trade are reported to the electricity finance and pricing submodule.

## Electricity Finance and Pricing Submodule

The costs of building capacity, buying power, and generating electricity are tallied in the electricity finance and pricing (EFP) submodule, which simulates both competitive electricity pricing and the cost-of-service method often used by State regulators to determine the price of electricity. The AEO2009 reference case assumes a transition to full competitive pricing in New York, Mid-Atlantic Area Council, and Texas, and a 95 percent transition to competitive pricing in New England (Vermont being the only fully-regulated State in that region). California returned to almost fully regulated pricing in 2002, after beginning a transition to competition in 1998. In addition electricity prices in the

Table 12. 2008 Overnight Capital Costs (including Contingencies), 2008 Heat Rates, and Online Year by Technology for the AEO2009 Reference Case

Technology	Capital Costs <sup>1</sup> (2007\$/KW)	Heatrate in 2008 (Btu/kWhr)	Online Year <sup>2</sup>
Scrubbed Coal New	2058	9200	2012
Integrated Coal-gasification Comb Cycle (IGCC)	2378	8765	2012
IGCC with carbon sequestration	3496	10781	2016
Conventional Gas/Oil Comb Cycle	962	7196	2011
Advanced Gas/Oil Comb Cycle (CC)	948	6752	2011
Advanced CC with carbon sequestration	1890	8613	2016
Conventional Combustion Turbine	670	10810	2010
Advanced Combustion Turbine	634	9289	2010
Fuel Cells	5360	7930	2011
Adv nuclear	3318	10434	2016
Distributed Generation - Base	1370	9050	2011
Distributed Generation - Peak	1645	10069	2010
Biomass	3766	9646	2012
MSW - Landfill Gas	2543	13648	2010
Geothermal <sup>3</sup>	1711	34633	2010
Conventional Hydropower <sup>3,4</sup>	2242	9919	2012
Wind <sup>4</sup>	1923	9919	2009
Wind Offshore <sup>4</sup>	3851	9919	2012
Solar Thermal	5021	9919	2012
Photovoltaic	6038	9919	2011

<sup>1</sup>Overnight capital cost including contingency factors, excluding regional multipliers and learning effects. Interest charges are also excluded. These represent costs of new projects initiated in 2008. Capital costs are shown before investment tax credits are applied, where applicable.

<sup>2</sup>Online year represents the first year that a new unit could be completed, given an order date of 2008. For wind, geothermal and landfill gas, the online year was moved earlier to acknowledge the significant market activity already occurring in anticipation of the expiration of the Production Tax Credit in 2009 for wind and 2010 for the others.

<sup>3</sup>Because geothermal and hydro cost and performance characteristics are specific for each site, the table entries represent the cost of the least expensive plant that could be built in the Northwest Power Pool region, where most of the proposed sites are located.

<sup>4</sup>For hydro, wind, and solar technologies, the heatrate shown represents the average heatrate for conventional thermal generation as of 2007. This is used for purposes of calculating primary energy consumption displaced for these resources, and does not imply an estimate of their actual energy conversion efficiency.



East Central Area Reliability Council, the Mid-American Interconnected Network, the Southeastern Electric Reliability Council, the Southwest Power Pool, the Northwest Power Pool, and the Rocky Mountain Power Area/Arizona are a mix of both competitive and regulated prices. Since some States in each of these regions have not taken action to deregulate their pricing of electricity, prices in those States are assumed to continue to be based on traditional cost-of-service pricing. The price for mixed regions is a load-weighted average of the competitive price and the regulated price, with the weight based on the percent of electricity load in the region that has taken action to deregulate. In regions where none of the states in the region have introduced competition—Florida Reliability Coordinating Council and Mid-Continent Area Power Pool—electricity prices are assumed to remain regulated and the cost-of-service calculation is used to determine electricity prices.

Using historical costs for existing plants (derived from various sources such as Federal Energy Regulatory Commission Form 1, Annual Report of Major Electric Utilities, Licensees and Others, and Form EIA-412, Annual Report of Public Electric Utilities), cost estimates for new plants, fuel prices from the NEMS fuel supply modules, unit operating levels, plant decommissioning costs, plant phase-in costs, and purchased power costs, the EFP submodule calculates total revenue requirements for each area of operation—generation, transmission, and distribution—for pricing of electricity in the fully regulated States. Revenue requirements shared over sales by customer class yield the price of electricity for each class. Electricity prices are returned to the demand modules. In addition, the submodule generates detailed financial statements.

For those States for which it is applicable, the EFP also determines competitive prices for electricity generation. Unlike cost-of-service prices, which are based on average costs, competitive prices are based on marginal costs. Marginal costs are primarily the operating costs of the most expensive plant required to meet demand. The competitive price also includes a reliability price adjustment, which represents the value consumers place on reliability of service when demands are high and available capacity is limited. Prices for transmission and distribution are assumed to remain regulated, so the delivered electricity price under competition is the sum of the marginal price of generation and the average price of transmission and distribution.

## Electricity Load and Demand Submodule

The electricity load and demand (ELD) submodule generates load curves representing the demand for electricity. The demand for electricity varies over the course of a day. Many different technologies and end uses, each requiring a different level of capacity for different lengths of time, are powered by electricity. For operational and planning analysis, an annual load duration curve, which represents the aggregated hourly demands, is constructed. Because demand varies by geographic area and time of year, the ELD submodule generates load curves for each region and season.

## Emissions

EMM tracks emission levels for sulfur dioxide (SO<sub>2</sub>) and nitrogen oxides (NO<sub>x</sub>). Facility development, retrofitting, and dispatch are constrained to comply with the pollution constraints of the CAAA90 and other pollution constraints including the Clean Air Interstate Rule. An innovative feature of this legislation is a system of trading emissions allowances. The trading system allows a utility with a relatively low cost of compliance to sell its excess compliance (i.e., the degree to which its emissions per unit of power generated are below maximum allowable levels) to utilities with a relatively high cost of compliance. The trading of emissions allowances does not change the national aggregate emissions level set by CAAA90, but it does tend to minimize the overall cost of compliance.

In addition to SO<sub>2</sub>, and NO<sub>x</sub>, the EMM also determines mercury and carbon dioxide emissions. It represents control options to reduce emissions of these four gases, either individually or in any combination. Fuel switching from coal to natural gas, renewables, or nuclear can reduce all of these emissions. Flue gas desulfurization equipment can decrease SO<sub>2</sub> and mercury emissions. Selective catalytic reduction can reduce NO<sub>x</sub> and mercury emissions. Selective non-catalytic reduction and low-NO<sub>x</sub> burners can lower NO<sub>x</sub> emissions. Fabric filters and activated carbon injection can reduce mercury emissions. Lower emissions resulting from demand reductions are determined in the end-use demand modules.

The *AEO2009* includes a generalized structure to model current state-level regulations calling for the best available control technology to control mercury. The *AEO2009* also includes the carbon caps for States that are part of the RGGI.

# **Renewable Fuels Module**

---



# Renewable Fuels Module

The renewable fuels module (RFM) represents renewable energy resources and large-scale technologies used for grid-connected U.S. electricity supply (Figure 11). Since most renewables (biomass, conventional hydroelectricity, geothermal, landfill gas, solar photovoltaics, solar thermal, and wind) are used to generate electricity, the RFM primarily interacts with the electricity market module (EMM).

New renewable energy generating capacity is either model-determined or based on surveys or other published information. A new unit is only included in surveys or accepted from published information if it is reported to or identified by the EIA and the unit meets EIA criteria for inclusion (the unit exists, is under construction, under contract, is publicly declared by the vendor, or is mandated by state law, such as under a state renewable portfolio standard). EIA may also assume minimal builds for reasons based on historical experience (floors). The penetration of grid-connected renewable energy generating technologies, with the exception of landfill gas, is determined by the EMM.

Each renewable energy submodule of the RFM is treated independently of the others, except for their least-cost competition in the EMM. Because variable operation and maintenance costs for renewable technologies are lower than for any other major generating technology, and because they generally produce little or no air pollution, all available renewable capacity, except biomass, is assumed to be dispatched first by the EMM. Because of its potentially significant fuel cost, biomass is dispatched according to its variable cost by the EMM.

With significant growth over time, installation costs are assumed to be higher because of growing constraints on the availability of sites, natural resource degradation, the need to upgrade existing transmission or distribution networks, and other resource-specific factors.

## Geothermal-Electric Submodule

The geothermal-electric submodule provides the EMM the amounts of new geothermal capacity that can be built at known and well characterized geothermal resource sites, along with related cost and performance data. The information is expressed in the form of a three-step supply function that represents the aggregate amount of new capacity and associated costs that can be offered in each year in each region.

Only hydrothermal (hot water and steam) resources are considered. Hot dry rock resources are not included, because they are not expected to be economically accessible during the NEMS projection horizon.

Capital and operating costs are estimated separately, and life-cycle costs are calculated by the RFM. The costing methodology incorporates any applicable effects of Federal and State energy tax construction and production incentives

## Wind-Electric Submodule

The wind-electric submodule projects the availability of wind resources as well as the cost and performance of wind turbine generators. This information is passed to EMM so that wind turbines can be built and dispatched in competition with other electricity generating technologies. The wind turbine data are expressed in the form of energy supply curves that provide the maximum amount, capital cost, and capacity factor of turbine generating capacity that could be installed in a region in a year, given the available land area and wind speed. The model also evaluates the contribution of the wind capacity to meeting system reliability requirements so that the EMM can appropriately incorporate wind capacity into calculations for regional reliability reserve margins.


## Solar-Electric Submodule

The solar-electric submodule represents both photovoltaic and high-temperature thermal electric (concentrated solar power) technologies.

RFM Outputs	Inputs from NEMS	Exogenous Inputs
Energy production capacities Capital costs Operating costs (including wood supply prices for the wood submodule) Capacity factors Available capacity Biomass fuel costs Biomass supply curves	Installed energy production capacity Gross domestic product Population Interest Rates Avoided cost of electricity Discount rate Capacity additions Biomass consumption	Site-specific geothermal resource quantity data Site-specific and resource quality data Plant utilization (capacity factor) Transmission and distribution costs Technology cost and performance parameters Landfill gas capacity

# Renewable Fuels Module

Figure 11. Renewable Fuels Module Structure

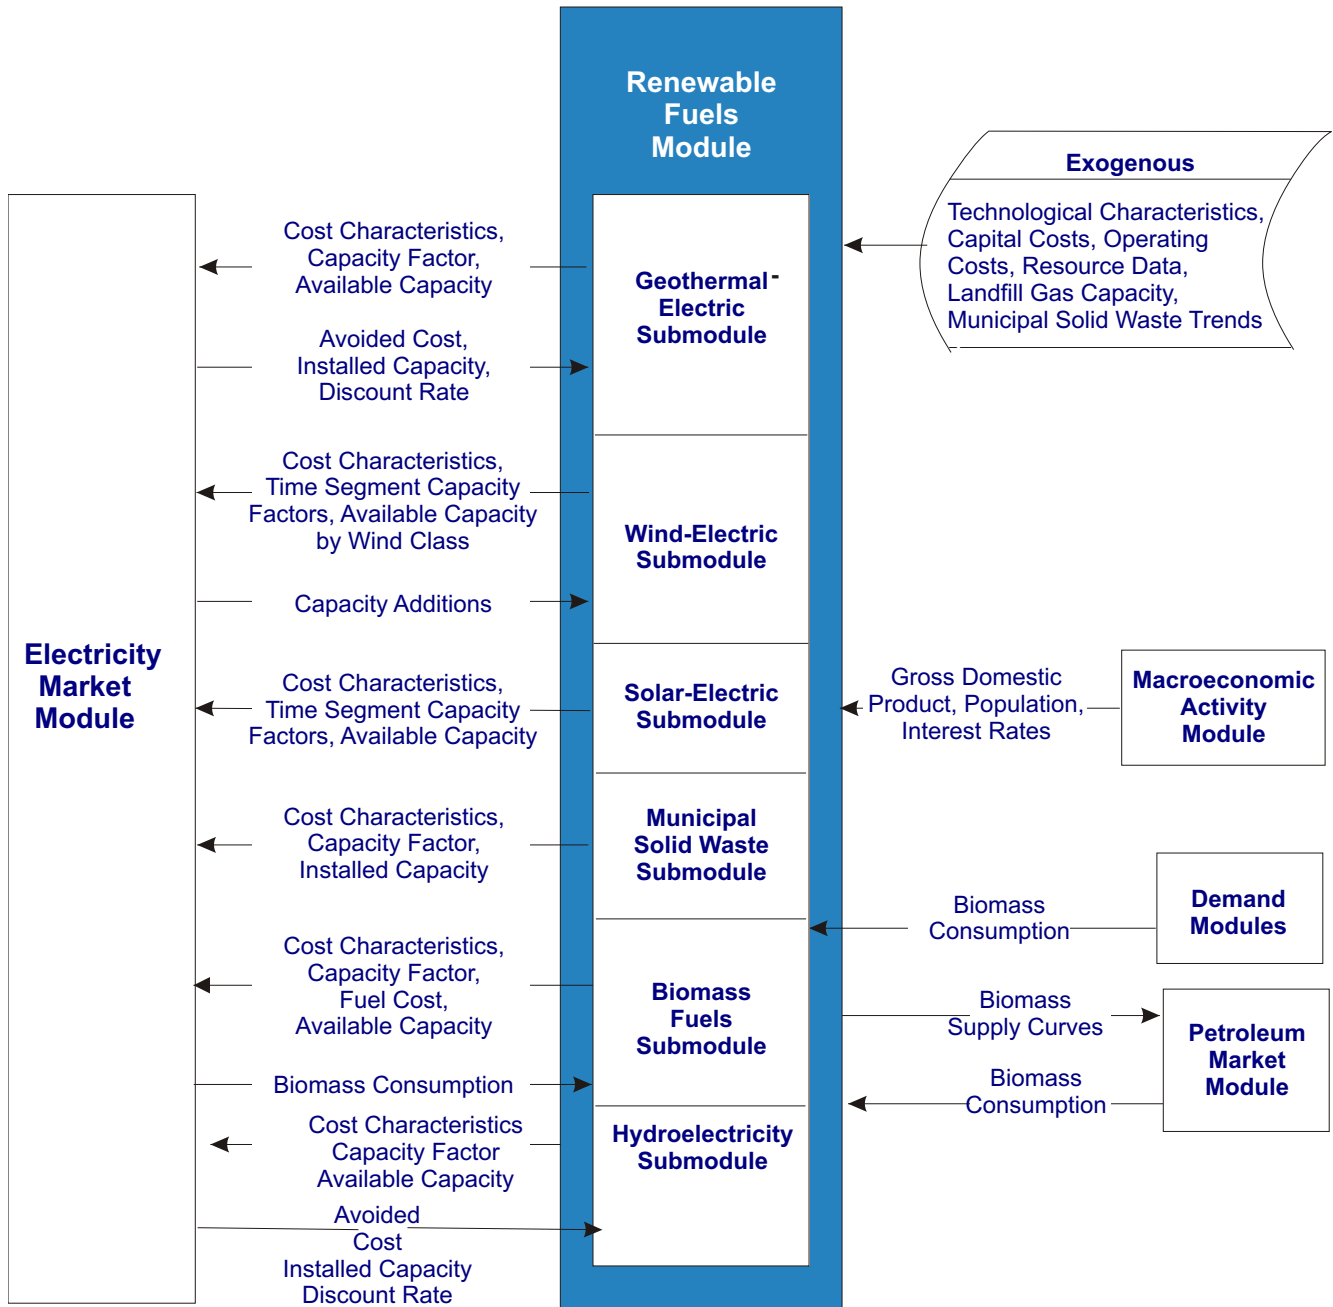

# Renewable Fuels Module

---

trating solar power) installations. Only central-station, grid-connected applications constructed by a utility or independent power producer are considered in this portion of the model.

The solar-electric submodule provides the EMM with time-of-day and seasonal solar availability data for each region, as well as current costs. The EMM uses this data to evaluate the cost and performance of solar-electric technologies in regional grid applications. The commercial and residential demand modules of NEMS also model photovoltaic systems installed by consumers, as discussed in the demand module descriptions under “Distributed Generation.”

## Landfill Gas Submodule

The landfill gas submodule provides annual projections of electricity generation from methane from landfills (landfill gas). The submodule uses the quantity of municipal solid waste (MSW) that is produced, the proportion of MSW that will be recycled, and the methane emission characteristics of three types of landfills to produce projections of the future electric power generating capacity from landfill gas. The amount of methane available is calculated by first determining the amount of total waste generated in the United States. The amount of total waste generated is derived from an econometric equation that uses gross domestic product and population as the projection drivers. It is assumed that no new mass burn waste-to-energy (MSW) facilities will be built and operated during the projection period in the United States. It is also assumed that operational mass-burn facilities will continue to operate and retire as planned throughout the projection period. The landfill gas submodule passes cost and performance characteristics of the landfill gas-to-electricity technology to the EMM for capacity planning decisions. The amount of new land-fill-gas-to-

electricity capacity competes with other technologies using supply curves that are based on the amount of high, medium, and low methane producing landfills located in each EMM region.

## Biomass Fuels Submodule

The biomass fuels submodule provides biomass-fired plant technology characterizations (capital costs, operating costs, capacity factors, etc.) and fuel information for EMM, thereby allowing biomass-fueled power plants to compete with other electricity generating technologies.

Biomass fuel prices are represented by a supply curve constructed according to the accessibility of resources to the electricity generation sector. The supply curve employs resource inventory and cost data for four categories of biomass fuel - urban wood waste and mill residues, forest residues, energy crops, and agricultural residues. Fuel distribution and preparation cost data are built into these curves. The supply schedule of biomass fuel prices is combined with other variable operating costs associated with burning biomass. The aggregate variable cost is then passed to EMM.

## Hydroelectricity Submodule

The hydroelectricity submodule provides the EMM the amounts of new hydroelectric capacity that can be built at known and well characterized sites, along with related cost and performance data. The information is expressed in the form of a three-step supply function that represents the aggregate amount of new capacity and associated costs that can be offered in each year in each region. Sites include undeveloped stretches of rivers, existing dams or diversions that do not currently produce power, and existing hydroelectric plants that have known capability to expand operations through the addition of new generating units. Capacity or efficiency improvements through the replacement of existing equipment or changes to operating procedures at a facility are not included in the hydroelectricity supply.

# **Oil And Gas Supply Module**

---

# Oil and Gas Supply Module

The OGSM consists of a series of process submodules that project the availability of domestic crude oil production and dry natural gas production from onshore, offshore, and Alaskan reservoirs, as well as conventional gas production from Canada. The OGSM regions are shown in Figure 12.

The driving assumption of OGSM is that domestic oil and gas exploration and development are undertaken if the discounted present value of the recovered resources at least covers the present value of taxes and the cost of capital, exploration, development, and production. Crude oil is transported to refineries, which are simulated in the PMM, for conversion and blending into refined petroleum products. The individual submodules of the OGSM are solved independently, with feedbacks achieved through NEMS solution iterations (Figure 13).

Technological progress is represented in OGSM through annual increases in the finding rates and success rates, as well as annual decreases in costs. For conventional onshore, a time trend was used in econometrically estimated equations as a proxy for technology. Reserve additions per well (or finding rates) are projected through a set of equations that distinguish between new field discoveries and discoveries (extensions) and revisions in known fields. The finding rate equations capture the impacts of technology, prices, and declining resources. Another representation of technology is in the success rate equations. Success rates capture the impact of technology and saturation of the area through cumulative drilling. Technology is further represented in the determination of drilling, lease equipment, and operating costs. Technological progress puts downward pressure on the drilling, lease equipment, and operating cost projections. For unconventional gas, a series of eleven different technology groups are represented by time-dependent adjustments to factors which influence finding rates, success rates, and costs.

Conventional natural gas production in Western Canada is modeled in OGSM with three econometrically estimated equations: total wells drilled, reserves added per well, and expected production-to-reserves ratio. The model performs a simple reserves accounting and applies the expected production-to-reserve ratio to estimate an expected production level, which in turn is used to establish a supply curve for conventional Western Canada natural gas. The rest of the gas production sources in Canada are represented in the Natural Gas Transmission and Distribution Module (NGTDM).

## Lower 48 Onshore and Shallow Offshore Supply Submodule


The lower 48 onshore supply submodule projects crude oil and natural gas production from conventional recovery techniques. This submodule accounts for drilling, reserve additions, total reserves, and production-to-reserves ratios for each lower 48 onshore supply region.

The basic procedure is as follows:

- First, the prospective costs of a representative drilling project for a given fuel category and well class within a given region are computed. Costs are a function of the level of drilling activity, average well depth, rig availability, and the effects of technological progress.
- Second, the present value of the discounted cash flows (DCF) associated with the representative project is computed. These cash flows include both the capital and operating costs of the project, including royalties and taxes, and the revenues derived from a declining well production profile, computed after taking into account the progressive effects of resource depletion and valued at constant real prices as of the year of initial valuation.
- Third, drilling levels are calculated as a function of projected profitability as measured by the projected DCF levels for each project and national level cash-flow.

OGSM Outputs	Inputs from NEMS	Exogenous Inputs
Crude oil production Domestic nonassociated and Canadian conventional natural gas supply curves Cogeneration from oil and gas production Reserves and reserve additions Drilling levels Domestic associated-dissolved gas production	Domestic and Canadian natural gas production and wellhead prices Crude oil demand World oil price Electricity price Gross domestic product Inflation rate	Resource levels Initial finding rate parameters and costs Production profiles Tax parameters

Figure 12. Oil and Gas Supply Module Regions

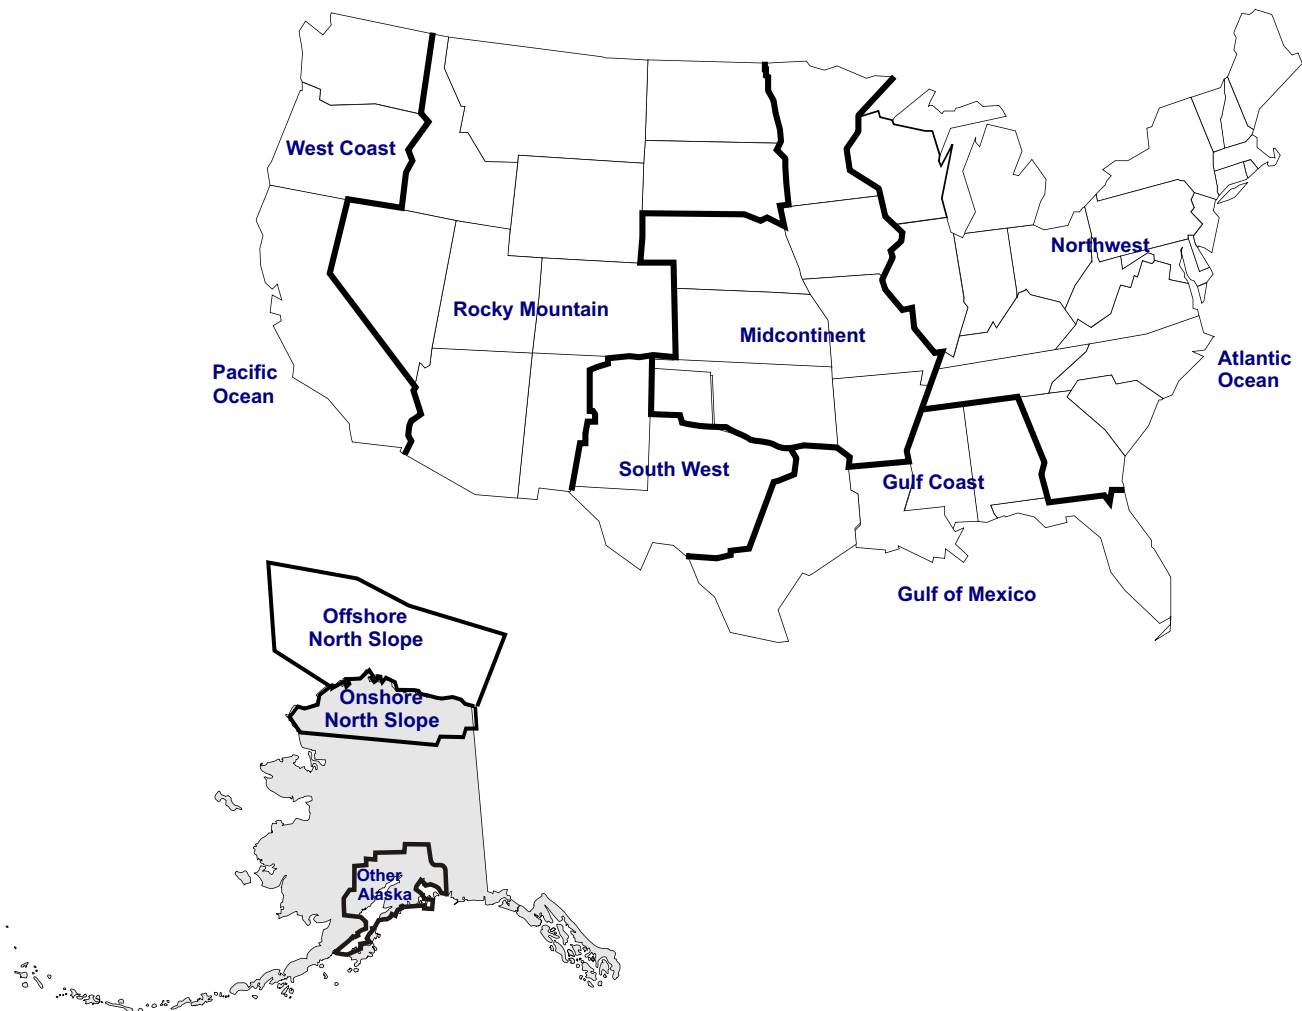

- Fourth, regional finding rate equations are used to project new field discoveries from new field wild-cats, new pools, and extensions from other exploratory drilling, and reserve revisions from development drilling.
- Fifth, production is determined on the basis of reserves, including new reserve additions, previous productive capacity, flow from new wells, and, in the case of natural gas, fuel demands. This occurs within the market equilibration of the NGTDM for natural gas and within OGSM for oil.

### Unconventional Gas Recovery Supply Submodule


Unconventional gas is defined as gas produced from nonconventional geologic formations, as opposed to conventional (sandstones) and carbonate rock formations. The three unconventional geologic formations

considered are low-permeability or tight sandstones, gas shales and coalbed methane.

For unconventional gas, a play-level model calculates the economic feasibility of individual plays based on locally specific wellhead prices and costs, resource quantity and quality, and the various effects of technology on both resources and costs. In each year, an initial resource characterization determines the expected ultimate recovery (EUR) for the wells drilled in a particular play. Resource profiles are adjusted to reflect assumed technological impacts on the size, availability, and industry knowledge of the resources in the play.

# Oil and Gas Supply Module

Figure 13. Oil and Gas Supply Module Structure

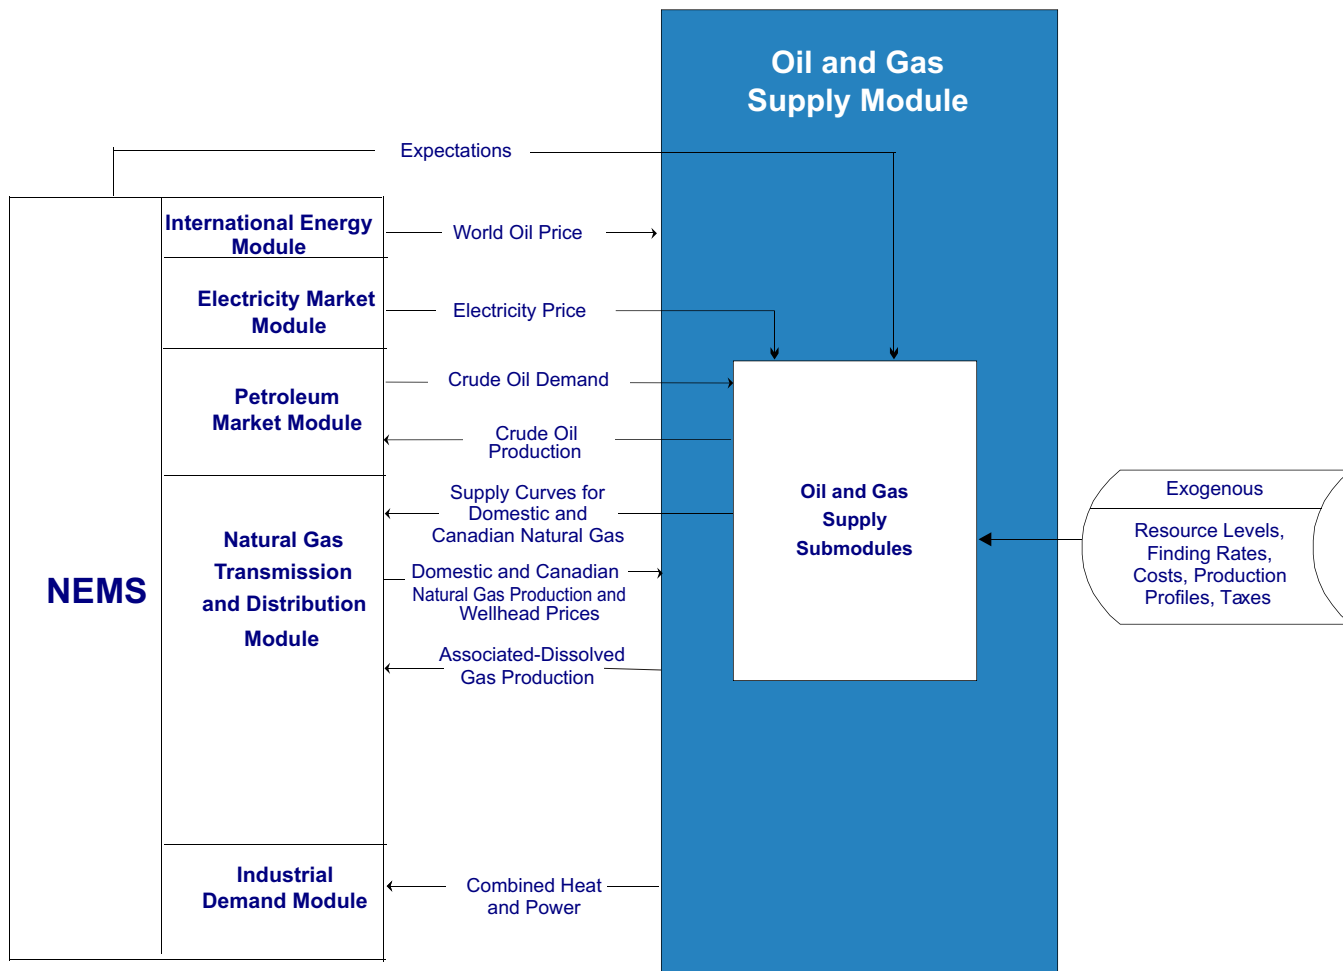

Subsequently, prices received from NGTDM and endogenously determined costs adjusted to reflect technological progress are utilized to calculate the economic profitability (or lack thereof) for the play. If the play is profitable, drilling occurs according to an assumed schedule, which is adjusted annually to account for technological improvements, as well as varying economic conditions. This drilling results in reserve additions, the quantities of which are directly related to the EURs for the wells in that play. Given these reserve additions, reserve levels and expected production-to-reserves (P/R) ratios are calculated at both the OGSM and the NGTDM region level. The resultant values are aggregated with similar values from the conventional onshore and offshore submodules. The aggregate P/R ratios and reserve levels are then passed to NGTDM, which determines the prices and production for the following year through market equilibration.

## Offshore Supply Submodule

This submodule uses a field-based engineering approach to represent the exploration and development of U.S. offshore oil and natural gas resources. The submodule simulates the economic decision-making at each stage of development from frontier areas to post-mature areas. Offshore resources are divided into 3 categories:

- **Undiscovered Fields.** The number, location, and size of the undiscovered fields are based on the MMS's 2006 hydrocarbon resource assessment.
- **Discovered, Undeveloped Fields.** Any discovery that has been announced but is not currently producing is evaluated in this component of the model. The first production year is an input and is based on announced plans and expectations.



- **Producing Fields.** The fields in this category have wells that have produced oil and/or gas through the year prior to the AEO projection. The production volumes are from the Minerals Management Service (MMS) database.

Resource and economic calculations are performed at an evaluation unit basis. An evaluation unit is defined as the area within a planning area that falls into a specific water depth category. Planning areas are the Western Gulf of Mexico (GOM), Central GOM, Eastern GOM, Pacific, and Atlantic. There are six water depth categories: 0-200 meters, 200-400 meters, 400-800 meters, 800-1600 meters, 1600-2400 meters, and greater than 2400 meters.

Supply curves for crude oil and natural gas are generated for three offshore regions: Pacific, Atlantic, and GOM. Crude oil production includes lease condensate. Natural gas production accounts for both nonassociated gas and associated-dissolved gas. The model is responsive to changes in oil and natural gas prices, royalty relief assumptions, oil and natural gas resource base, and technological improvements affecting exploration and development.

### Alaska Oil and Gas Submodule

This submodule projects the crude oil and natural gas produced in Alaska. The Alaskan oil submodule is divided into three sections: new field discoveries, development projects, and producing fields. Oil transportation costs to lower 48 facilities are used in

conjunction with the relevant market price of oil to calculate the estimated net price received at the wellhead, sometimes called the netback price. A discounted cash flow method is used to determine the economic viability of each project at the netback price.

Alaskan oil supplies are modeled on the basis of discrete projects, in contrast to the onshore lower 48 conventional oil and gas supplies, which are modeled on an aggregate level. The continuation of the exploration and development of multiyear projects, as well as the discovery of new fields, is dependent on profitability. Production is determined on the basis of assumed drilling schedules and production profiles for new fields and developmental projects, historical production patterns, and announced plans for currently producing fields.

- Alaskan gas production is set separately for any gas targeted to flow through a pipeline to the lower 48 States and gas produced for consumption in the State and for export to Japan. The latter is set based on a projection of Alaskan consumption in the NGTDM and an exogenous specification of exports. North Slope production for the pipeline is dependent on construction of the pipeline, set to commence if the lower 48 average wellhead price is maintained at a level exceeding the established comparable cost of delivery to the lower 48 States.

# **Natural Gas Transmission and Distribution Module**

---

# Natural Gas Transmission And Distribution Module

The NGTDM of NEMS represents the natural gas market and determines regional market-clearing prices for natural gas supplies and for end-use consumption, given the information passed from other NEMS modules (Figure 14). A transmission and distribution network (Figure 15), composed of nodes and arcs, is used to simulate the interregional flow and pricing of gas in the contiguous United States and Canada in both the peak (December through March) and offpeak (April through November) period. This network is a simplified representation of the physical natural gas pipeline system and establishes the possible interregional flows and associated prices as gas moves from supply sources to end users.

Flows are further represented by establishing arcs from transshipment nodes to each demand sector represented in an NGTDM region (residential, commercial, industrial, electric generators, and transportation). Mexican exports and net storage injections in the offpeak period are also represented as flow exiting a transshipment node. Similarly, arcs are also established from supply points into a transshipment node. Each transshipment node can have one or more entering arcs from each supply source represented: U.S. or Canadian onshore or U.S. offshore production, liquefied natural gas imports, supplemental gas production, gas produced in Alaska and transported via pipeline, Mexican imports, or net storage withdrawals in the region in the peak period. Most of the types of supply listed above are set independently of current year prices and before NGTDM determines a market equilibrium solution.

Only the onshore and offshore lower 48 U.S. and Western Canadian Sedimentary Basin production, along with net storage withdrawals, are represented by short-term supply curves and set dynamically during the NGTDM solution process. The construction of natural gas pipelines from Alaska and Canada's MacKenzie

Delta are triggered when market prices exceed estimated project costs. The flow of gas during the peak period is used to establish interregional pipeline and storage capacity requirements and the associated expansion. These capacity levels provide an upper limit for the flow during the offpeak period.

Arcs between transshipment nodes, from the transshipment nodes to end-use sectors, and from supply sources to transshipment nodes are assigned tariffs. The tariffs along interregional arcs reflect reservation (represented with volume dependent curves) and usage fees and are established in the pipeline tariff submodule. The tariffs on arcs to end-use sectors represent the interstate pipeline tariffs in the region, intrastate pipeline tariffs, and distributor markups set in the distributor tariff submodule. Tariffs on arcs from supply sources represent gathering charges or other differentials between the price at the supply source and the regional market hub. The tariff associated with injecting, storing, and withdrawing from storage is assigned to the arc representing net storage withdrawals in the peak period. During the primary solution process in the interstate transmission submodule, the tariffs along an interregional arc are added to the price at the source node to arrive at a price for the gas along the arc right before it reaches its destination node.


## Interstate Transmission Submodule

The interstate transmission submodule (ITS) is the main integrating module of NGTDM. One of its major functions is to simulate the natural gas price determination process. ITS brings together the major economic factors that influence regional natural gas trade on a seasonal basis in the United States, the balancing of the demand for and the domestic supply of natural gas, including competition from imported natural gas. These are examined in combination with the relative prices associated with moving the gas from the producer to the end user where and when (peak versus offpeak) it is

NGTDM Outputs	Inputs from NEMS	Exogenous Inputs
Natural gas delivered prices Domestic and Canadian natural gas wellhead prices Domestic natural gas production Mexican and liquefied natural gas imports and exports Canadian natural gas imports and production Lease and plant fuel consumption Pipeline and distribution tariffs Interregional natural gas flows Storage and pipeline capacity expansion Supplemental gas production	Natural gas demands Domestic and Canadian natural gas supply curves Macroeconomic variables Associated-dissolved natural gas production	Historical consumption and flow patterns Historical supplies Pipeline company-level financial data Pipeline and storage capacity and utilization data Historical end-use citgate, and wellhead prices State and Federal tax parameters Pipeline and storage expansion cost data Liquefied natural gas supply curves Canada and Mexico consumption projections

# Natural Gas Transmission And Distribution Module

Figure 14. Natural Gas Transmission and Distribution Module Structure

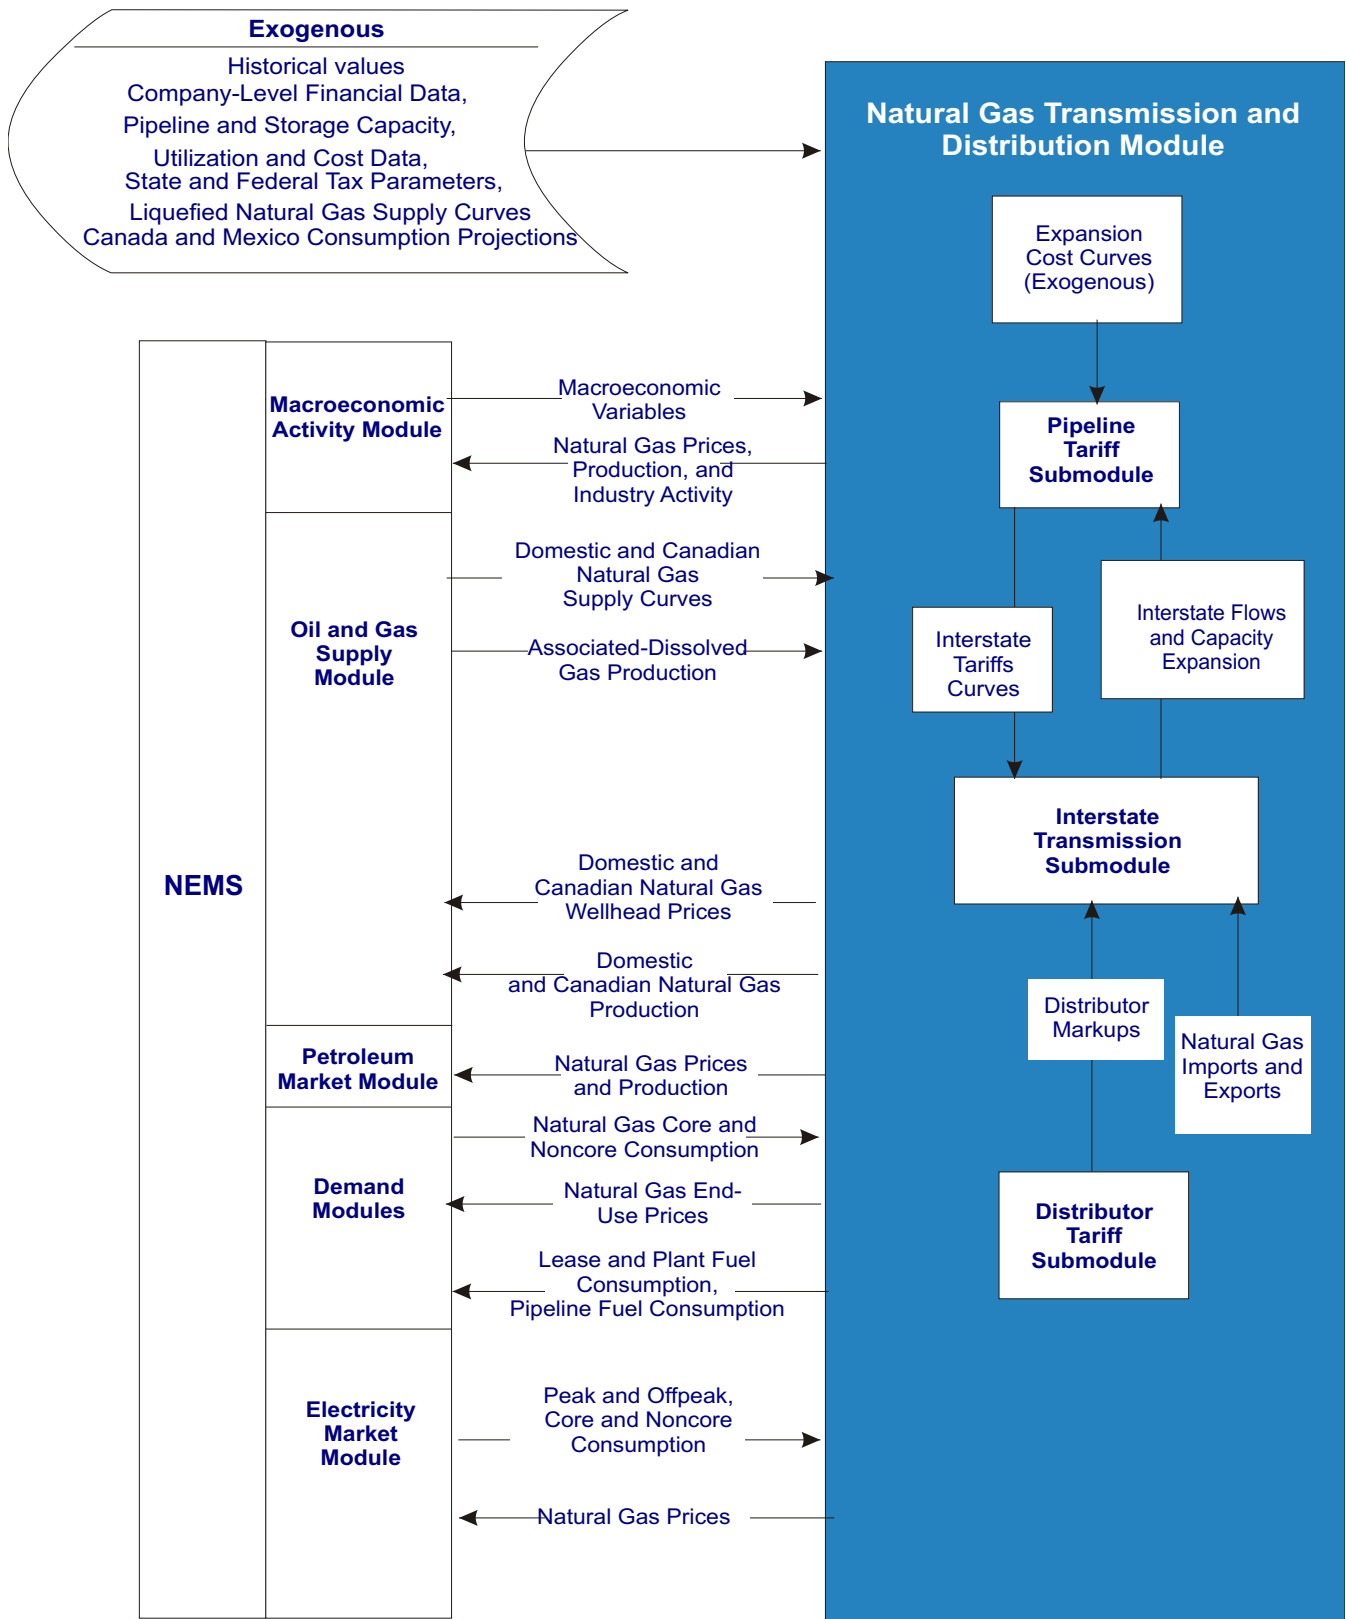

# Natural Gas Transmission And Distribution Module

---

needed. In the process, ITS simulates the decision-making process for expanding pipeline and/or seasonal storage capacity in the U.S. gas market, determining the amount of pipeline and storage capacity to be added between or within regions in NGTDM. Storage serves as the primary link between the two seasonal periods represented.

ITS employs an iterative heuristic algorithm, along with an acyclic hierarchical representation of the primary arcs in the network, to establish a market equilibrium solution. Given the consumption levels from other NEMS modules, the basic process followed by ITS involves first establishing the backward flow of natural gas in each period from the consumers, through the network, to the producers, based primarily on the relative prices offered for the gas from the previous ITS iteration. This process is performed for the peak period first since the net withdrawals from storage during the peak period will establish the net injections during the offpeak period. Second, using the model's supply curves, wellhead and import prices are set corresponding to the desired production volumes. Also, using the pipeline and storage tariffs from the pipeline tariff submodule, pipeline and storage tariffs are set corresponding to the associated flow of gas, as determined in the first step. These prices are then translated from the producers, back through the network, to the city gate and the end users, by adding the appropriate tariffs along the way. A regional storage tariff is added to the price of gas injected into storage in the offpeak to arrive at the price of the gas when withdrawn in the peak period. This process is then repeated until the solution has converged. Finally, delivered prices are derived for residential, commercial, and transportation customers, as well as for both core and noncore industrial and electric generation sectors using the distributor tariffs provided by the distributor tariff submodule.

## Pipeline Tariff Submodule

The pipeline tariff submodule (PTS) provides usage fees and volume dependent curves for computing unitized reservation fees (or tariffs) for interstate transportation and storage services within the ITS. These curves extend beyond current capacity levels and relate incremental pipeline or storage capacity expansion to corresponding estimated rates. The underlying basis for each tariff curve in the model is a projection of the associated regulated revenue requirement. Econometrically estimated equations within a general accounting framework are used to track costs and compute revenue requirements associated with both

reservation and usage fees under current rate design and regulatory scenarios. Other than an assortment of macroeconomic indicators, the primary input to PTS from other modules in NEMS is pipeline and storage capacity utilization and expansion in the previous projection year.

Once an expansion is projected to occur, PTS calculates the resulting impact on the revenue requirement. PTS assumes rolled-in (or average), not incremental, rates for new capacity. The pipeline tariff curves generated by PTS are used within the ITS when determining the relative cost of purchasing and moving gas from one source versus another in the peak and offpeak seasons.

## Distributor Tariff Submodule

The distributor tariff submodule (DTS) sets distributor markups charged by local distribution companies for the distribution of natural gas from the city gate to the end user. For those that do not typically purchase gas through a local distribution company, this markup represents the differential between the citygate and delivered price. End-use distribution service is distinguished within the DTS by sector (residential, commercial, industrial, electric generators, and transportation), season (peak and offpeak), and service type (core and noncore).

Distributor tariffs for all but the transportation sector are set using econometrically estimated equations. The natural gas vehicle sector markups are calculated separately for fleet and personal vehicles and account for distribution to delivery stations, retail markups, and federal and state motor fuels taxes.

## Natural Gas Imports and Exports

Liquefied natural gas imports for the U.S., Canada, and Baja, Mexico are set at the beginning of each NEMS iteration within the NGTDM by evaluating seasonal east and west supply curves, based on outputs from EIA's International Natural Gas Model, at associated regasification tailgate prices set in the previous NEMS iteration. A sharing algorithm is used to allocate the resulting import volumes to particular regions. LNG exports to Japan from Alaska are set exogenously by the OGSM.

The Mexico model is largely based on exogenously specified assumptions about consumption and production growth rates and LNG import levels. For the most part, natural gas imports from Mexico are set exogenously for each of the three border crossing points with

# Natural Gas Transmission And Distribution Module

Figure 15. Natural Gas Transmission and Distribution Module Network



the United States, with the exception of any gas that is imported into Baja, Mexico in liquid form only to be exported to the United States. Exports to Mexico from the United States are established before the NGTDM equilibrates and represent the required level to balance the assumed consumption in (and exports from) Mexico against domestic production and LNG imports. The production levels are also largely assumption based, but are set to vary with changes in the expected well-head price in the United States.

A node for east and west Canada is included in the NGTDM equilibration network, as well as seven border crossings into the United States. The model includes a

representation/accounting of the U.S. border crossing pipeline capacity, east and west seasonal storage transfers, east and west consumption, east and west LNG imports, eastern production, conventional/tight sands production in the west, and coalbed/shale production. Imports from the United States, conventional production in eastern Canada, and base level natural gas consumption (which varies with the world oil price) are set exogenously. Conventional/tight sands production in the west is set using a supply curve from the OGSM. Coalbed and shale gas production are effectively based on an assumed production growth rate which is adjusted with realized prices.

# **Petroleum Market Module**

---



# Petroleum Market Module

The PMM represents domestic refinery operations and the marketing of liquid fuels to consumption regions. PMM solves for liquid fuel prices, crude oil and product import activity (in conjunction with the IEM and the OGSM), and domestic refinery capacity expansion and fuel consumption. The solution satisfies the demand for liquid fuels, incorporating the prices for raw material inputs, imported liquid fuels, capital investment, as well as the domestic production of crude oil, natural gas liquids, and other unconventional refinery inputs. The relationship of PMM to other NEMS modules is illustrated in Figure 16.

The PMM is a regional, linear programming formulation of the five Petroleum Administration for Defense Districts (PADDs) (Figure 17). For each region two distinct refinery are modeled. One is highly complex using over 40 different refinery processes, while the second is defined as a simple refinery that provides marginal cost economics. Refining capacity is allowed to expand in each region, but the model does not distinguish between additions to existing refineries or the building of new facilities. Investment criteria are developed exogenously, although the decision to invest is endogenous.

PMM assumes that the petroleum refining and marketing industry is competitive. The market will move toward lower-cost refiners who have access to crude oil and markets. The selection of crude oils, refinery process utilization, and logistics (transportation) will adjust to minimize the overall cost of supplying the market with liquid fuels.

PMM's model formulation reflects the operation of domestic liquid fuels. If demand is unusually high in one region, the price will increase, driving down demand and providing economic incentives for bringing supplies in from other regions, thus restoring the supply and demand balance.

Existing regulations concerning product types and specifications, the cost of environmental compliance, and Federal and State taxes are also modeled. PMM incorporates provisions from the Energy Independence and Security Act of 2007 (EISA2007) and the Energy Policy Act of 2005 (EPACT05). The costs of producing new formulations of gasoline and diesel fuel as a result of the CAAA90 are determined within the linear-programming representation by incorporating specifications and demands for these fuels.

PMM also includes the interaction between the domestic and international markets. Prior to AEO2009, PMM postulated entirely exogenous prices for oil on the international market (the world oil price). Subsequent AEOs include an International Energy Module (IEM) that estimates supply curves for imported crude oils and products based on, among other factors, U.S. participation in global trade of crude oil and liquid fuels.

## Regions


PMM models U.S. crude oil refining capabilities based on the five PADDs which were established during World War II and are still used by EIA for data collection and analysis. The use of PADD data permits PMM to take full advantage of EIA's historical database and allows analysis within the same framework used by the petroleum industry.

PMM Outputs	Inputs from NEMS	Exogenous Inputs
Petroleum product prices	Petroleum product demand by sector	Processing unit operating parameters
Crude oil imports and exports	Domestic crude oil production	Processing unit capacities
Crude oil demand	World oil price	Product specifications
Petroleum product imports and exports	International crude oil supply curves	Operating costs
Refinery activity and fuel use	International product supply curves	Capital costs
Ethanol demand and price	International oxygenates supply curves	Transmission and distribution costs
Combined heat and power (CHP)	Natural gas prices	Federal and State taxes
Natural gas plant liquids production	Electricity prices	Agricultural feedstock quantities and costs
Processing gain	Natural gas production	CHP unit operating parameters
Capacity additions	Macroeconomic variables	CHP unit capacities
Capital expenditures	Biomass supply curves	
Revenues	Coal prices	




# Petroleum Market Module

Figure 16. Petroleum Market Module Structure

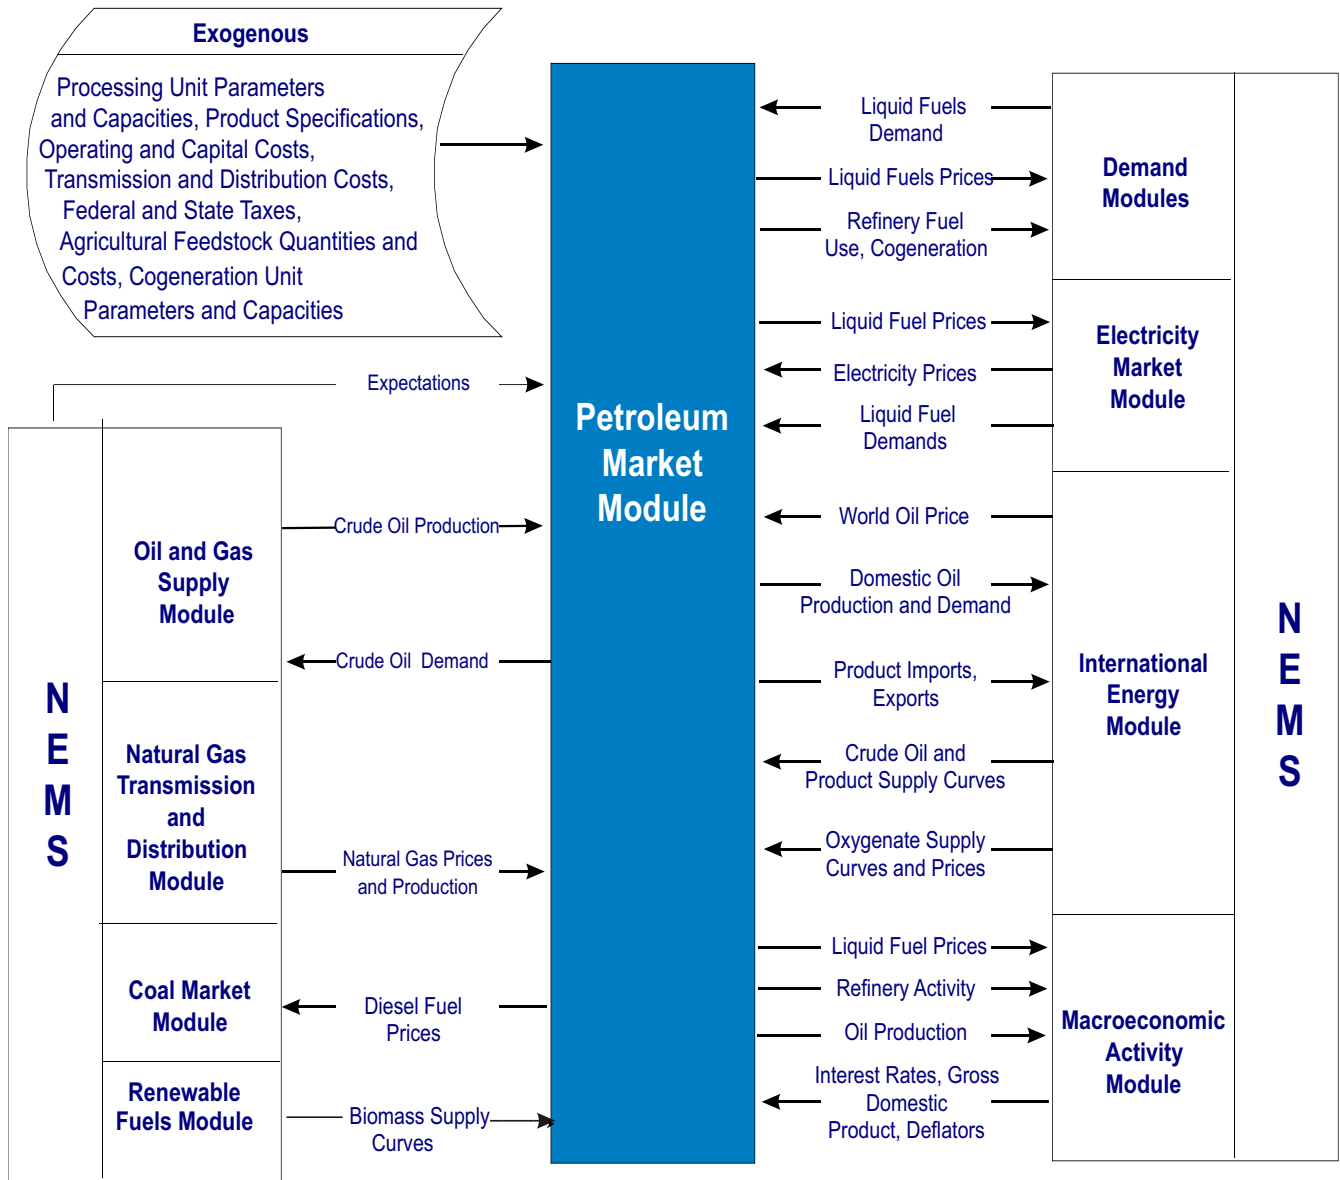

# Petroleum Market Module

Figure 17. Petroleum Administration for Defense Districts

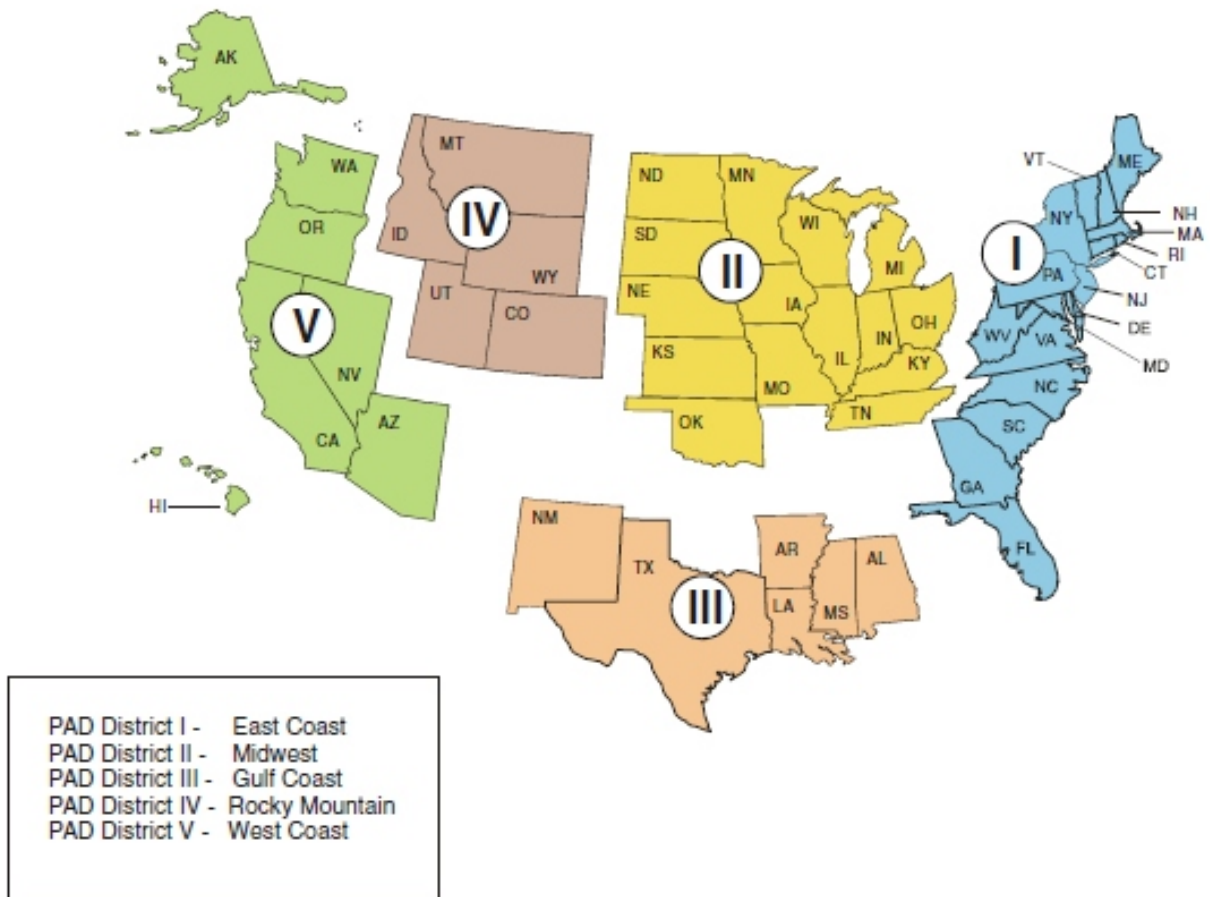

## Product Categories

Product categories, specifications and recipe blends modeled in PMM include the following:

### Liquid Fuels Modeled in PMM

**Motor gasoline:** conventional (oxygenated and non-oxygenated), reformulated, and California reformulated

**Jet fuels:** kerosene-based

**Distillates:** kerosene, heating oil, low sulfur (LSD) and ultra-low-sulfur (ULSD) highway diesel, distillate fuel oil, and distillate fuel from various non-crude feedstocks (coal, biomass, natural gas) via the Fischer-Tropsch process (BTL, CTL, GTL)

**Alternative Fuel:** Biofuels [including ethanol, biodiesel (methyl-ester), renewable diesel, biomass-to-liquids (BTL)], coal-to-liquids (CTL), gas-to-liquids (GTL).

**Residual fuels:** low sulfur and high sulfur residual fuel oil

**Liquefied petroleum gas (LPG):** a light-end mixture used for fuel in a wide range of sectors comprised primarily of propane

**Natural gas plant:** ethane, propane, iso and normal butane, and pentanes plus (natural gasoline)

**Petrochemical feedstocks**

**Other:** asphalt and road oil, still gas, (refinery fuel) petroleum coke, lubes and waxes, special naphthas

## Fuel Use

PMM determines refinery fuel use by refining region for purchased electricity, natural gas, distillate fuel, residual fuel, liquefied petroleum gas, and other petroleum. The fuels (natural gas, petroleum, other gaseous fuels, and other) consumed within the refinery to generate electricity from CHP facilities are also determined.

## Crude Oil Categories

Both domestic and imported crude oils are aggregated into five categories as defined by API gravity and sulfur content ranges. This aggregation of crude oil types allows PMM to account for changes in crude oil composition over time. A composite crude oil with the appropriate yields and qualities is developed for each category by averaging characteristics of foreign and domestic crude oil streams.

## Refinery Processes

The following distinct processes are represented in the PMM:

- 1) Crude Oil Distillation
  - a. Atmospheric Crude Unit
  - b. Vacuum Crude Unit
- 2) Residual Oil Upgrading
  - a. Coker - Delayed, fluid
  - b. Thermal Cracker/Visbreaker
  - c. Residuum Hydrocracker
  - d. Solvent Deasphalting
- 3) Cracking
  - a. Fluidized Catalytic Cracker
  - b. Hydrocracker
- 4) Final Product Treating/Upgrading
  - a. Traditional Hydrotreating
  - b. Modern Hydrotreating
  - c. Alkylation
  - d. Jet Fuel Production
  - e. Benzene Saturation
  - f. Catalytic Reforming
- 5) Light End Treating
  - a. Saturated Gas Plant
  - b. Isomerization
  - c. Dimerization/Polymerization
  - d. C2-C5 Dehydrogenation
- 6) Non-Fuel Production
  - a. Sulfur Plant
  - b. Methanol Production
  - c. Oxgenate Production
  - d. Lube and Wax Production
  - e. Steam/Power Generation
  - f. Hydrogen Production
  - g. Aromatics Production
- 7) Specialty Unit Operations
  - a. Olefins to Gasoline/Diesel
  - b. Methanol to Olefins
- 8) Merchant Facilities
  - a. Coal/Gas/Biomass to Liquids
  - b. Natural Gas Plant
  - c. Ethanol Production
  - d. Biodiesel Plant

## Natural Gas Plants

Natural gas plant liquids (ethane, propane, normal butane, isobutane, and natural gasoline) produced from natural gas processing plants are modeled in PMM. Their production levels are based on the projected natural gas supply and historical liquids yields from various natural gas sources. These products move directly into the market to meet demand (e.g., for fuel or petrochemical feedstocks) or are inputs to the refinery.

# Petroleum Market Module

---

## Biofuels

PMM contains submodules which provide regional supplies and prices for biofuels: ethanol (conventional/corn, advanced, cellulosic) and various forms of biomass-based diesel: FAME (methyl ester), biomass-to-liquid (Fisher-Tropsch), and renewable (“green”) diesel (hydrogenation of vegetable oils or fats). Ethanol is assumed to be blended either at 10 percent into gasoline (conventional or reformulated) or as E85. Food feedstock supply curves (corn, soybean oil, etc.) are updated to USDA baseline projections; biomass feedstocks are drawn from the same supply curves that also supply biomass fuel to renewable power generation within the Renewable Fuels Module of NEMS. The merchant processing units which generate the biofuels supplies sum these feedstock costs with other cost inputs (e.g., capital, operating). A major driving force behind the production of these biofuels is the Renewable Fuels Standard under EISA2007. Details on the market penetration of the advanced biofuels production capacity (such as cellulosic ethanol and BTL) which are not yet commercialized can be found in the PMM documentation.

## End-Use Markups

The linear programming portion of the model provides unit prices of products sold in the refinery regions (refinery gate) and in the demand regions (wholesale). End use markups are added to produce a retail price for each of the Census Divisions. The mark ups are based on an average of historical markups, defined as the difference between the end-use prices by sector and the corresponding wholesale price for that product. The average is calculated using data from 2000 to the present. Because of the lack of any consistent trend in the historical end-use markups, the markups remain at the historical average level over the projection period.

State and Federal taxes are also added to transportation fuel prices to determine final end-use prices. Previous tax trend analysis indicates that state taxes increase at the rate of inflation, while Federal taxes do not. In PMM, therefore state taxes are held constant in real terms throughout the projection while Federal taxes are related at the rate of inflation.<sup>18</sup>

18 [http://www.eia.doe.gov/oiaf/archive/aeo07/leg\\_reg.html](http://www.eia.doe.gov/oiaf/archive/aeo07/leg_reg.html).

## Gasoline Types

Motor vehicle fuel in PMM is categorized into four gasoline blends (conventional, oxygenated conventional, reformulated, and California reformulated) and also E85. While federal law does not mandate gasoline to be oxygenated, all gasoline complying with the Federal reformulated gasoline program is assumed to contain 10 percent ethanol, while conventional gasoline may be “clear” (no ethanol) or used as E10. As the mandate for biofuels grows under the Renewable Fuels Standard, the proportion of conventional gasoline that is E10 also generally grows. California reformulated motor gasoline is assumed to contain 5.7% ethanol in 2009 and 10 percent thereafter in line with its approval of the use of California’s Phase 3 reformulated gasoline.

EIA defines E85 as a gasoline type but is treated as a separate fuel in PMM. The transportation module in NEMS provides PMM with a flex fuel vehicle (FFV) demand, and PMM computes a supply curve for E85. This curve incorporates E85 infrastructure and station costs, as well as a logit relationship between the E85 station availability and demand of E85. Infrastructure costs dictate that the E85 supplies emerge in the Midwest first, followed by an expansion to the coasts.

## Ultra-Low-Sulfur Diesel

By definition, Ultra Low Sulfur Diesel (ULSD) is highway diesel fuel that contains no more than 15 ppm sulfur at the pump. As of June 2006, 80 percent of all highway diesel produced or imported into the United States was required to be ULSD, while the remaining 20 percent contained a maximum of 500 parts per million. By December 1, 2010 all highway fuel sold at the pump will be required to be ULSD. Major assumptions related to the ULSD rule are as follows:

- Highway diesel at the refinery gate will contain a maximum of 7-ppm sulfur. Although sulfur content is limited to 15 ppm at the pump, there is a general consensus that refineries will need to produce diesel below 10 ppm sulfur in order to allow for contamination during the distribution process.
- Demand for highway grade diesel, both 500 and 15 ppm combined, is assumed to be equivalent to the total transportation distillate demand. Historically, highway grade diesel supplied has nearly matched total transportation distillate sales, although some highway grade

diesel has gone to non-transportation uses such as construction and agriculture.

### **Gas, Coal and Biomass to Liquids**

Natural gas, coal, and biomass conversion to liquid fuels is modeled in the PMM based on a three step process known as indirect liquefaction. This process is sometimes called Fischer-Tropsch (FT) liquefaction after the inventors of the second step.

The liquid fuels produced include four separate products: FT light naphtha, FT heavy naphtha, FT kerosene, and FT diesel. The FT designation is used to distinguish these liquid fuels from their petroleum counterparts. This is necessary due to the different physical and chemical properties of the FT fuels. For example, FT diesel has a typical cetane rating of approximately 70-75 while that of petroleum diesel is typically much lower (about 40). In addition, the above production methods have differing impacts with regard to current and potential legislation, particularly RFS and CO2.

# **Coal Market Module**

---

# Coal Market Module

The coal market module (CMM) represents the mining, transportation, and pricing of coal, subject to end-use demand. Coal supplies are differentiated by thermal grade, sulfur content, and mining method (underground and surface). CMM also determines the minimum cost pattern of coal supply to meet exogenously defined U.S. coal export demands as a part of the world coal market. Coal distribution, from supply region to demand region, is projected on a cost-minimizing basis. The domestic production and distribution of coal is projected for 14 demand regions and 14 supply regions (Figures 18 and 19).

The CMM components are solved simultaneously. The sequence of solution among components can be summarized as follows. Coal supply curves are produced by the coal production submodule and input to the coal distribution submodule. Given the coal supply curves, distribution costs, and coal demands, the coal distribution submodule projects delivered coal prices. The module is iterated to convergence with respect to equilibrium prices to all demand sectors. The structure of the CMM is shown in Figure 20.

## Coal Production Submodule

This submodule produces annual coal supply curves, relating annual production to minemouth prices. The supply curves are constructed from an econometric analysis of prices as a function of productive capacity, capacity utilization, productivity, and various factor input costs. A separate supply curve is provided for surface and underground mining for all significant production by coal thermal grade (metallurgical, bituminous, subbituminous and lignite), and sulfur level in each supply region. Each supply curve is assigned a unique heat, sulfur, and mercury content, and carbon dioxide emissions factor. Constructing curves for the coal types available in each region yields a total of 40 curves that are used as inputs to the coal distribution submodule. Supply curves are updated for each year in the projection period. Coal supply curves are shared with both the EMM

and the PMM. For detailed assumptions, please see the Assumptions to the Annual Energy Outlook updated each year with the release of the AEO.

## Coal Distribution Submodule: Domestic Component

The coal distribution submodule is a linear program that determines the least-cost supplies of coal for a given set of coal demands by demand region and sector, accounting for transportation costs from the different supply curves, heat and sulfur content, and existing coal supply contracts. Existing supply contracts between coal producers and electricity generators are incorporated in the model as minimum flows for supply curves to coal demand regions. Depending on the specific scenario, coal distribution may also be affected by any restrictions on sulfur dioxide, mercury, or carbon dioxide emissions.

Coal transportation costs are simulated using interregional coal transportation costs derived by subtracting reported minemouth costs for each supply curve from reported delivered costs for each demand type in each demand region. For the electricity sector, higher transportation costs are assumed for market expansion in certain supply and demand region combinations. Transportation rates are modified over time using econometrically based multipliers which considers the impact of changing productivity and equipment costs. When diesel fuel prices are sufficiently high, a fuel surcharge is also added to the transportation costs.


## Coal Distribution Submodule: International Component

The international component of the coal distribution submodule projects quantities of coal imported and exported from the United States. The quantities are determined within a world trade context, based on assumed characteristics of foreign coal supply and demand. The component disaggregates coal into 17 export regions and 20 import regions, as shown in Table 13. The supply and demand components of world coal trade are

CMM Outputs	Inputs from NEMS	Exogenous Inputs
Coal production and distribution Minemouth coal prices End-use coal prices U.S. coal exports and imports Transportation rates Coal quality by source, destination, and end-use sector World coal flows	Coal demand Interest rates Price indices and deflators Diesel fuel prices Electricity prices	Base year production, productive capacity, capacity utilization, prices, and coal quality parameters Contract quantities Labor productivity Labor costs Domestic transportation costs International transportation costs International supply curves International coal import demands



Figure 18. Coal Market Module Demand Regions

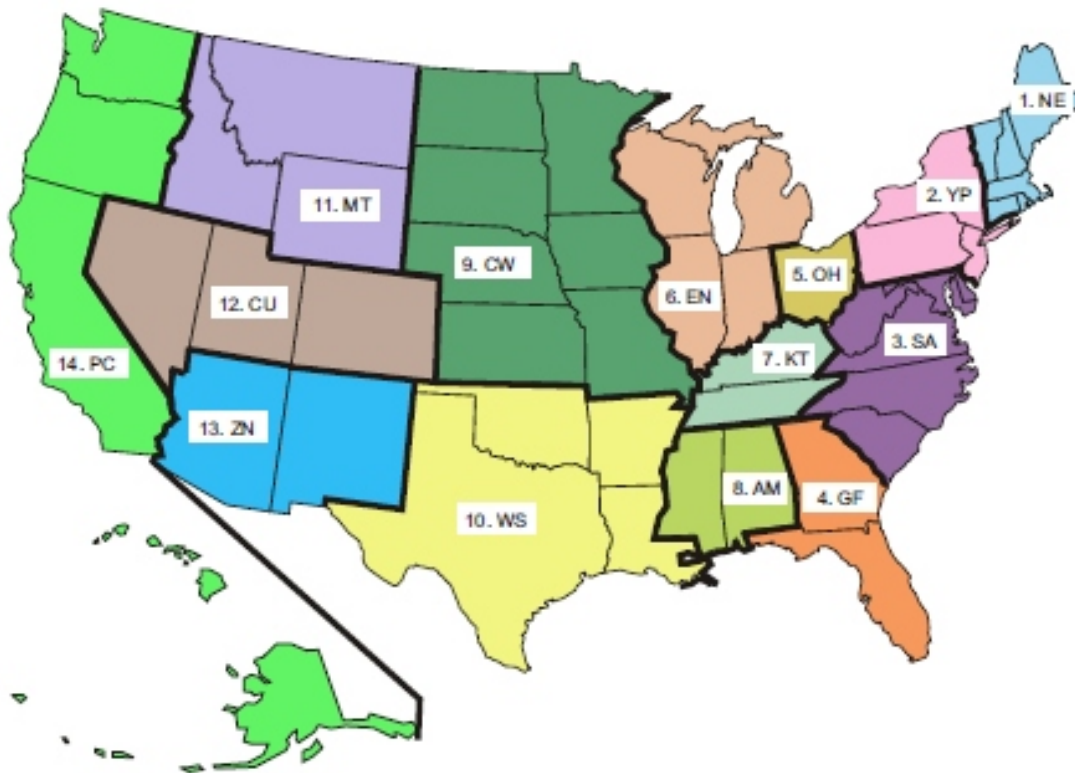

Region Code	Region Content
1. NE	CT,MA,ME,NH,RI,VT
2. YP	NY,PA,NJ
3. SA	WV,MD,DC,DE,VA,NC,SC
4. GF	GA,FL
5. OH	OH
6. EN	IN,IL,MI,WI
7. KT	KY,TN

Region Code	Region Content
8. AM	AL,MS
9. CW	MN,IA,ND,SD,NE,MO,KS
10. WS	TX,LA,OK,AR
11. MT	MT,WY,ID
12. CU	CO,UT,NV
13. ZN	AZ,NM
14. PC	AK,HI,WA,OR,CA


segmented into two separate markets: 1) coking coal, which is used for the production of coke for the steelmaking process; and 2) steam coal, which is primarily consumed in the electricity and industrial sectors.

The international component is solved as part of the linear program that optimizes U.S. coal supply. It determines world coal trade distribution by minimizing overall costs for coal, subject to coal supply prices in the United

States and other coal exporting regions plus transportation costs. The component also incorporates supply diversity constraints that reflect the observed tendency of coal-importing countries to avoid excessive dependence upon one source of supply, even at a somewhat higher cost.

# Coal Market Module

Figure 19. Coal Market Module Supply Regions

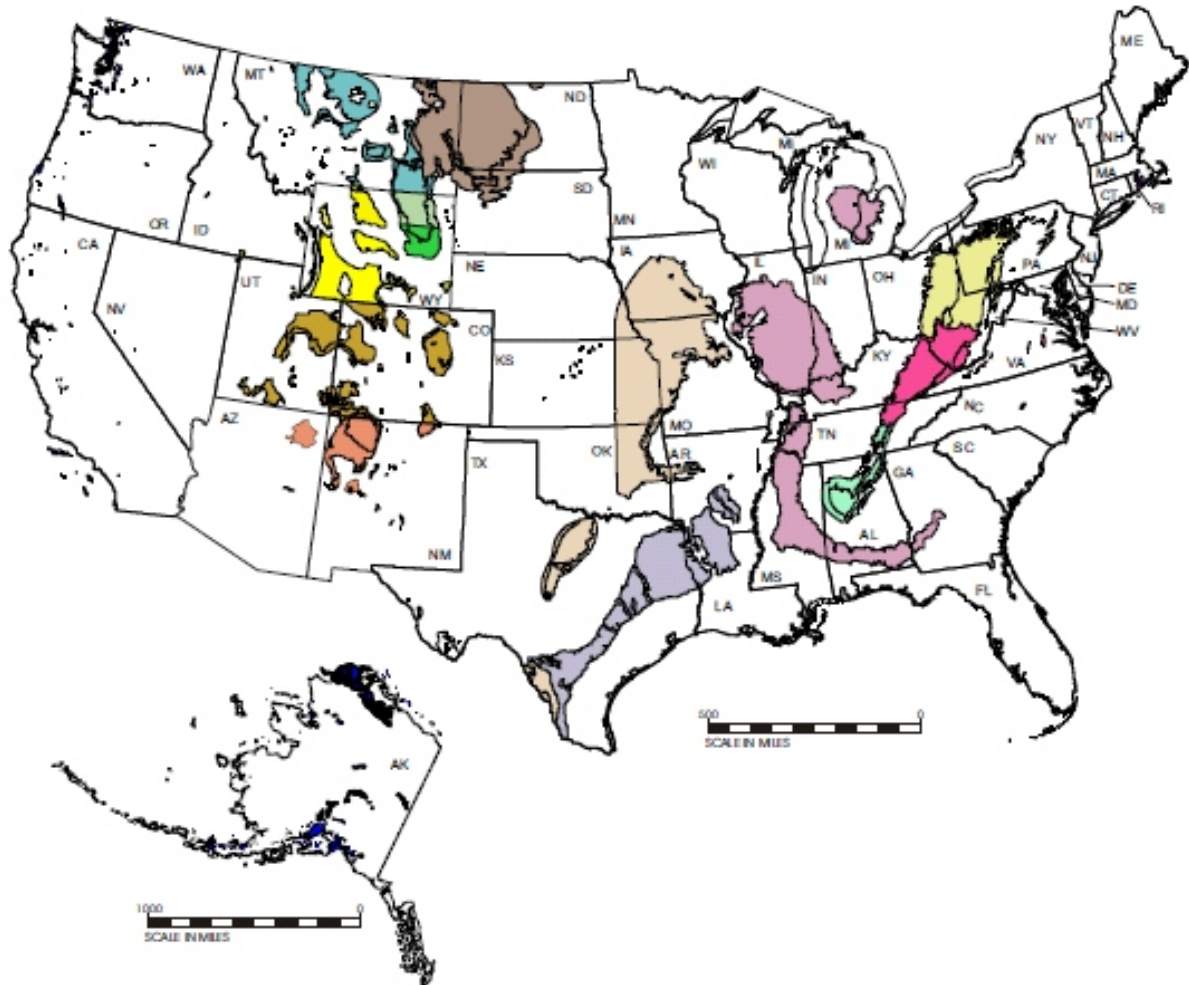


- |   |  |  |   |
|---|--|--|---|
| <b>APPALACHIA</b>   |  | <b>NORTHERN GREAT PLAINS</b>   |   |
| <span style="display:inline-block; width:15px; height:10px; background-color:yellow; border:1px solid black;"></span> Northern Appalachia     | <span style="display:inline-block; width:15px; height:10px; background-color:lightblue; border:1px solid black;"></span> Dakota Lignite  | <span style="display:inline-block; width:15px; height:10px; background-color:lightgreen; border:1px solid black;"></span> Wyoming, Northern Powder River Basin | <span style="display:inline-block; width:15px; height:10px; background-color:yellow; border:1px solid black;"></span> Western Wyoming |
| <span style="display:inline-block; width:15px; height:10px; background-color:lightcoral; border:1px solid black;"></span> Central Appalachia  | <span style="display:inline-block; width:15px; height:10px; background-color:lightblue; border:1px solid black;"></span> Western Montana | <span style="display:inline-block; width:15px; height:10px; background-color:lightgreen; border:1px solid black;"></span> Wyoming, Southern Powder River Basin |   |
| <span style="display:inline-block; width:15px; height:10px; background-color:lightgreen; border:1px solid black;"></span> Southern Appalachia |  |  |   |
| <b>INTERIOR</b>   |  | <b>OTHER WEST</b>  |   |
| <span style="display:inline-block; width:15px; height:10px; background-color:lightcoral; border:1px solid black;"></span> Eastern Interior    | <span style="display:inline-block; width:15px; height:10px; background-color:lightblue; border:1px solid black;"></span> Rocky Mountain  | <span style="display:inline-block; width:15px; height:10px; background-color:lightcoral; border:1px solid black;"></span> Southwest                            |   |
| <span style="display:inline-block; width:15px; height:10px; background-color:lightblue; border:1px solid black;"></span> Western Interior     | <span style="display:inline-block; width:15px; height:10px; background-color:lightblue; border:1px solid black;"></span> Gulf Lignite    | <span style="display:inline-block; width:15px; height:10px; background-color:blue; border:1px solid black;"></span> Northwest                                  |   |

Table 13. Coal Export Component

Coal Export Regions	Coal Import Regions
U.S. East Coast	U.S. East Coast
U.S. Gulf Coast	U.S. Gulf Coast
U.S. Southwest and West	U.S. Northern Interior
U.S. Northern Interior	U.S. Noncontiguous
U.S. Noncontiguous	Eastern Canada
Australia	Interior Canada
Western Canada	Scandinavia
Interior Canada	United Kingdom and Ireland
Southern Africa	Germany and Austria
Poland	Other Northwestern Europe
Eurasia-exports to Europe	Iberia
Eurasia-exports to Asia	Italy
China	Mediterranean and Eastern Europe
Colombia	Mexico
Indonesia	South America
Venezuela	Japan
Vietnam	East Asia
	China and Hong Kong
	ASEAN (Association of Southeast Asian Nations)
	India and South Asia

# Coal Market Module

Figure 20. Coal Market Module Structure

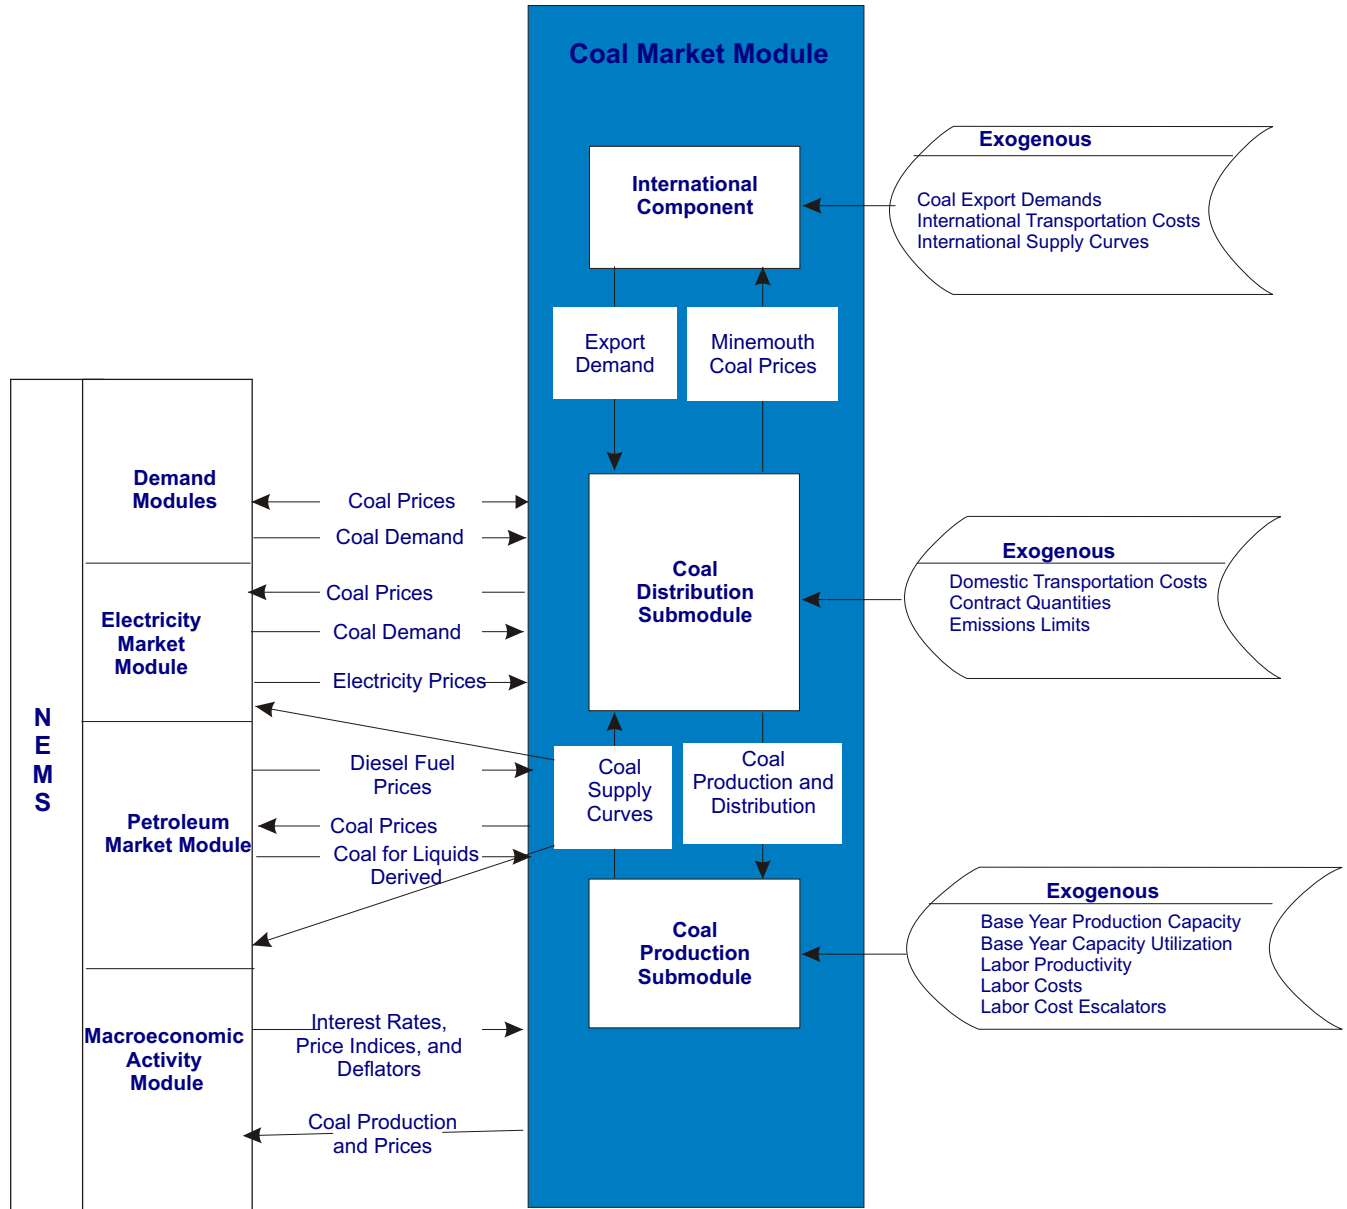

# Appendix

---

## Appendix Bibliography

---

The National Energy Modeling System is documented in a series of model documentation reports, available on the EIA Web site at [http://tonto.eia.doe.gov/reports/reports\\_kindD.asp?type=model documentation](http://tonto.eia.doe.gov/reports/reports_kindD.asp?type=model%20documentation) or by contacting the National Energy Information Center (202/586-8800).

Energy Information Administration, *Integrating Module of the National Energy Modeling System: Model Documentation Report*, DOE/EIA-M057(2009) (Washington, DC, May 2009).

Energy Information Administration, *Model Documentation Report: Macroeconomic Activity Module (MAM) of the National Energy Modeling System*, DOE/EIA-M065(2009) (Washington, DC, January 2009).

Energy Information Administration, *NEMS International Energy Module: Model Documentation Report*, DOE/EIA-M071(2007) (Washington, DC, May 2007).

Energy Information Administration, *Model Documentation Report: Residential Sector Demand Module of the National Energy Modeling System*, DOE/EIA-M067(2009) (Washington, DC, May 2009).

Energy Information Administration, *Model Documentation Report: Commercial Sector Demand Module of the National Energy Modeling System*, DOE/EIA-M066(2009) (Washington, DC, May 2009).

Energy Information Administration, *Model Documentation Report: Industrial Sector Demand Module of the National Energy Modeling System*, DOE/EIA-M064(2009) (Washington, DC, May 2009).

Energy Information Administration, *Transportation Sector Module of the National Energy Modeling System: Model Documentation Report*, DOE/EIA-M070(2009) (Washington, DC, June 2009).

Energy Information Administration, *The Electricity Market Module of the National Energy Modeling System: Model Documentation Report*, DOE/EIA-M068(2009) (Washington, DC, May 2009).

Energy Information Administration, *Documentation of the Oil and Gas Supply Module (OGSM)*, DOE/EIA-M063(2009) (Washington, DC, July 2009).

Energy Information Administration, *Model Documentation: Natural Gas Transmission and Distribution Model of the National Energy Modeling System*, DOE/EIA-M062(2009) (Washington, DC, June 2009).

Energy Information Administration, *Model Documentation: Coal Market Module of the National Energy Modeling System*, DOE/EIA-M060(2009) (Washington, DC, June 2009).

Energy Information Administration, *Model Documentation: Renewable Fuels Module of the National Energy Modeling System*, DOE/EIA-M069(2009) (Washington, DC, July 2009).

Energy Information Administration, *Annual Energy Review 2008*, DOE/EIA-0384(2008) (Washington, DC, June 2009).

Energy Information Administration, *Model Documentation: Petroleum Market Model of the National Energy Modeling System*, DOE/EIA-M059(2009) (Washington, DC, August 2009).