



# GOES-R Series Mission Requirements Document (MRD)

## May 2016




U.S. Department of Commerce (DOC)  
National Oceanic and Atmospheric Administration (NOAA)

Effective Date: 2-27-2007  
Expiration Date: 2-27-2012  
Responsible Organization: GOES-R Program/Code 417

P417-R-MRD-0070

GOES-R Series  
Mission Requirements Document (MRD)


Prepared by:

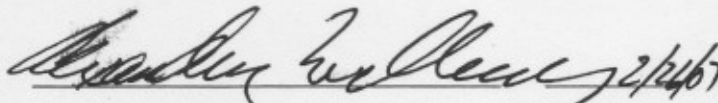

Alexander Krimchansky  
GOES-R Program System Engineering  
Manager (Acting)

Date

Reviewed by:

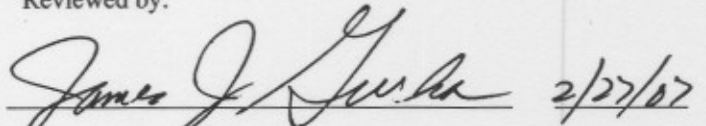

James J. Gurka  
GOES-R Program Scientist Lead


Date

Concurred by:



Michael L. Donnelly  
GOES-R Flight Project Manager

Date

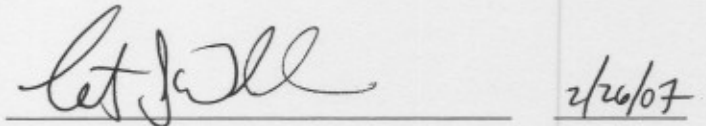

Timothy J. Walsh  
GOES-R Operations Project Manager  
(Acting)

Date

Approved by:



Anthony B. Comberiate  
GOES-R System Program Director

Date



Michael J. Crison  
GOES-R Deputy System Program Director  
(Acting)

Date

**Mission Requirements Document (MRD)  
 Document Change Record Page**

Version	CCR #	CCB Date	DOORS ID #(s):	Description
Original/ Baseline	374	02/26/07		DOORS format implemented and Program retreat MRD restructure 1st time baseline to supersede 2B Prime version.
3.1	1099	12/05/07	<u>Modify</u> : MRD226 (3.3.3.2.41.0-1)	Change (relieve) the mission product latency for the low cloud and fog product Full Disk from 1 minute to 3 minutes.
3.2	1116	01/16/08	<u>Modify</u> MRD550 (3.4.2.1.12.0-4), MRD737 (3.6.3.0-8)	Reallocate the MRD requirement on the ABI for long-term calibration performance to more clearly indicate that meeting the same calibration performance will be achieved by a combination of instrument performance and ground system and calibration working group activities.
3.2	1121	01/16/08	<u>Modify</u> MRD21 MRD27, MRD28, MRD29, MRD30, MRD32, MRD791	Modify MRD21 - MRD32 to minimize changes to these sections with each change on the ground side.
3.2	1127	01/14/08	<u>Modify</u> MRD12, MRD463, MRD467, MRD698, MRD699, MRD723, MRD724	The previously planned signals for EMWIN and LRIT services will be consolidated into one signal. EMWIN and LRIT data will be separately identified using the product ID information currently in use for LRIT.
3.3	1186	05/14/08	<u>Modify</u> MRD95 (3.3.2.4.0-1) MRD789 (5.0-1),	Change MRD language that uses "level 2 and level 2+" products together to say only "level 2+ products". The definition of level 2+ has been added to the MRD glossary with the same language as the program glossary. (See 2 DOORS issues and 1 attachment for reference whose DOORS issue is covered under PC 377)
3.4	1211	06/20/08	Numerous	Changes are primarily to fill TBDs in MRD product precision values, with a few other product refinements in other product parameter such as product qualifiers and product accuracy.
3.4	1212	06/20/08	Numerous	Update from the product prioritization tiers to the product set numbers in order to support the release of the GS F&PS.
3.4	1213	06/20/08	Numerous	Changes to latency and refresh values reflect the minimum baseline (or threshold) performance for GOES-R.
3.4	1214	06/20/08	Numerous	GORWG proposed changes for improved product refresh or latency.
3.5	1273	09/05/08	<u>Waiver</u> : MRD506 (3.4.2.1.4.0-1), MRD515 (3.4.2.1.4.0-10)	Waivers are being requested for four of the ABI filters. Reference CCRs generated by Flight: CCR-01178, CCR-01179, CCR-01180, CCR-01181.
3.6	1295	11/04/08	<u>Modify</u> MRD180 (3.3.3.2.18.0-1) MRD182 (3.3.3.2.19.0-1),	Update Cloud Particle Size latency from 1 minute to 5 minutes for Mesoscale and 3 minutes to 15 minutes for Full Disk as a result of old latency descope.

**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

3.6	1298	11/04/08	<u>Modify</u> MRD246 (3.3.3.4.8.0-1) MRD244 (3.3.3.4.7.0-1)	Outstanding cleanup from last set of MRD product changes for Derived Stability Indices to 1) replace the TBD for CONUS measurement precision with values and to match mesoscale and 2) under Product Measurement range for mesoscale, change temperature range for delta temperature range for Lifted Index, and 3) replace TBD with N/A under Product Vertical Resolution for the mesoscale product
3.6	1300	11/04/08	<u>Modify</u> MRD36 (3.2.1.1.0-1)	Deletes dates, clarifies operational lifetime and adds reference to the GOES-R Program Management Directive.
3.6	1301	11/04/08	<u>Modify</u> MRD595 (3.4.2.4.0-4)	The wavelengths for Fe XX and Fe XII need to be adjusted to ensure the SUVI bandpasses cover the wavelengths of interest with sufficient radiance levels.
3.7	1315	12/11/08	<u>Modify</u> MRD198 (3.3.3.2.27.0-1), MRD263 (3.3.3.5.4.0-1), MRD265 (3.3.3.5.5.0-1), MRD267 (3.3.3.5.6.0-1),	Change geographic area from 62 degree LZA in MRD198 (Cloud Top Pressure) to Full Disk. Change MRD263 (Radiances) from CONUS: 62 degree LZA Clear and Cloud Regions Only to CONUS: Clear and above Cloud Regions Only. Change MRD265 and MRD267 by adding above in Clear and Cloud Regions Only to say Clear and above Cloud Regions Only.
3.7	1316	12/11/08	<u>Modify</u> MRD315 (3.3.4.2.1.0-1), MRD317 (3.3.4.2.2.0-1), MRD320 (3.3.4.3.1.0-1), MRD330 (3.3.4.5.1.0-1), MRD332 (3.3.4.5.2.0-1), MRD334 (3.3.4.5.3.0-1), MRD336 (3.3.4.5.4.0-1), MRD338 (3.3.4.5.5.0-1), MRD340 (3.3.4.5.6.0-1), MRD343 (3.3.4.6.1.0-1), MRD345 (3.3.4.6.2.0-1), MRD348 (3.3.4.7.1.0-1), MRD350 (3.3.4.7.2.0-1), MRD363 (3.3.5.2.1.0-1), MRD365 (3.3.5.2.2.0-1), MRD367 (3.3.5.2.3.0-1) MRD371 (3.3.5.2.5.0-1), MRD373 (3.3.5.2.6.0-1),	Change product Temporal Coverage Qualifiers for from Sun at 67 degree (TBR) daytime solar zenith angle to Sun at less than 67 degree zenith angle (TBR) in MRD363 (Sea & Lake Ice: Age); MRD365 and MRD367 (adding TBR) (Sea & Lake Ice: Concentration); MRD369 (Sea & Lake Ice: Extent); MRD371 and MRD373 (Sea & Lake Ice: Motion); MRD330, MRD332 and MRD334 (Snow Cover); MRD336, RD338, and MRD340 (Snow Depth); MRD343 (Surface Albedo); MRD345 (Surface Emissivity); MRD348 (Vegetation Fraction: Green); and MRD350 (Vegetation Index). Also change product Temporal Coverage Qualifiers for Flood/Standing Water (MRD315 and MRD317) and Ice Cover/ Landlocked: Hemispheric (MRD320) from Day with Sun at TBD solar zenith angle to Day with Sun at <67 degree solar zenith angle. Additionally, change TBD to 67 degree (TBR) in MRD334 (Snow Cover). and a adds a TBR in MRD365 & MRD367.
3.7	1317	12/11/08	<u>Modify</u> MRD323 (3.3.4.4.1.0-1) MRD325 (3.3.4.4.2.0-1), MRD327 (3.3.4.4.3.0-1),	Land Surface Temperature Mesoscale latency should be updated to 5 minutes from 3 minutes. The Full Disk Measurement Range should change from 230 K - 330 K to 213 K - 333 K to be self-consistent with the Mesoscale Measurement Range. The CONUS measurement range should change from 233 K - 333 K to 213 K - 333 K for the same reason.

**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

3.7	1345	02/19/09	<u>Modify</u> MRD222 (3.3.3.2.39.0-1)	Change the Product Extent Qualifier for the Full Disk from 62 degrees LZA to 65 degrees LZA in order to match value listed in both the CONUS and Mesoscale.
3.7	1347	02/05/09	<u>Modify</u> MRD228 (3.3.3.2.42.0-1)	Change grammar from Correction detection to Correct detection
3.7	1348	02/19/09	<u>Modify</u> MRD284 (3.3.3.6.8.0-1)	Change the Product Measurement Accuracy for Full Disk from $\pm 60$ W/m <sup>2</sup> at high end of range (1500 W/m <sup>2</sup> ); $\pm 40$ at typical value/midpoint (350 W/m <sup>2</sup> ) to $\pm 60$ W/m <sup>2</sup> at high end of range (1300 W/m <sup>2</sup> ); $\pm 40$ W/m <sup>2</sup> at typical value/mid-point (350 W/m <sup>2</sup> ).
3.7	1349	02/19/09	<u>Modify</u> MRD343 (3.3.4.6.1.0-1)	In MRD343 (Surface Albedo: Hemispheric), change the Product Horizontal Resolution from TBD to 2 km and change the Product Mapping Accuracy from TBD to 2 km.
3.7	1370	02/19/09	<u>Modify</u> MRD292 (3.3.3.6.12.0-1)	MRD292, change the Product Measurement Range from 50-900 W/m <sup>2</sup> to 50-450 W/m <sup>2</sup> to match physical limitations.
3.7	1423	03/23/09	<u>Modify</u> MRD#: 12, 23, 407, 460, 461, 462, 463, 465 – 467, 698, 699, 723, 724, 791	Changes service name EMWIN/LRIT to HRIT/EMWIN
3.8	1377	09/11/09	<u>Modify</u> MRD310, MRD312, MRD315, MRD317, MRD343	MRD312 & 310 – Changes the Product Measurement (PM) Range. MRD315 & 317 - Change the PM Range. Change Precision. MRD343: Relax Precision
3.8	1420A	09/11/09	<u>Modify</u> MRD216, MRD302, MRD304, MRD306	MRD216: Change the PM; Change Product Statistics Qualifier MRD#s 302, 304, 306: Change PM Precision; Change the Mesoscale Product Stat Qualifier; Change the refresh:
3.8	1421	09/11/09	<u>Modify</u> MRD320, MRD330, MRD332, MRD334, MRD336, MRD338, MRD340, MRD363, MRD365, MRD367, MRD371, MRD373	MRD #s 320, 336, 338, 340, 371, 373: Changed Precision; MRD #s 330, 332, 334: Change Measurement Range ; Change Precision MRD363: Change text description; Change Measurement Range MRD365 & 367: Change the text description
3.8	1422A	07/10/09	<u>Modify</u> MRD107, MRD115	Reconcile the definitions for Product Measurement Accuracy and Product Measurement Precision
3..8	1424	07/10/09	<u>Modify</u> MRD595	The description corresponding to the 131.2A wavelength is corrected.
3.8	1432A	09/11/09	<u>Modify</u> MRD270, MRD272, MRD274, MRD276, MRD278, MRD280, MRD282, MRD284, MRD290, MRD292	MRD #s 270, 276, 278, 280, 282, 284: Change the Precision; MRD #s 270, 272, 274, 282, 284, 290, 292: Change

**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

				Cloud Cover Conditions; MRD282 & 284: Change FD Horizontal Resolution
3.8	1438	09/11/09	<u>Modify</u> MRD143, MRD146, MRD210, MRD212, MRD214, MRD226, MRD228, MRD230, MRD234, MRD299, MRD 797	MRD #s 143, 146, 210, 212, 214, 226, 228, 299, 230, 234, 797: Change Precision  MRD #s 146, 212, 214, 226, 228, 299, 230, 234: Change the Product Measurement Range  MRD146: Change Prod Horizontal Resolution  MRD228 & 230: Change the Prod Stat Qualifier  MRD234: changes PM Accuracy
3.8	1439	09/11/09	<u>Modify</u> MRD244, MRD246, MRD807, MRD808, MRD809	Soundings: MRD244 & 246: Change Horizontal Resolution; Remove the '+/-' before Precision values  MRD807 – 809: Change the Precision values
3.8	1460	09/11/09	<u>Modify</u> MRD237, MRD239, MRD241	MRD237: update Product Extent Qualifier.  MRD239: Change Precision; change Measurement Range; update Product Extent Qualifier.  MRD241: update Product Extent Qualifier; change Mapping Accuracy; Change Precision
3.8	1462	07/10/09	<u>Modify</u> MRD9	Change "Program Plan" to Management Control Plan".
3.8	1463	07/10/09	<u>Modify</u> MRD299	Change the Product Horizontal Resolution
3.8	1466	09/11/09	<u>Modify</u> : MRD #s: 148, 150, 152, 156, 158, 160, 162, 164, 166, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 257, 259, 261	MRD #s 148, 150, 152, 156, 158, 160, 162, 164, 166, 174, 176, 178, 180, 182, 184, 186, 188, 257, 259, 261: Change Product Measurement (PM) Range and PM Precision  MRD #s 190, 192, 194, 196, 198, 200, 202: Change PM Precision  MRD #s 204, 206, 208: Change description of the 7 classification types of clouds, Change PM Precision
3.8	1482	09/11/09	<u>Modify</u> : MRD #s: 127, 129, 131, 139, 141, 295, 297	Aerosols: MRD #s 127, 129, 131, 295, 297: Change product measurement (PM) precision  MRD139 & 141: Change PM range, Clarified the text description of the product. Change PM precision
3.8	1489	07/10/09	<u>New</u> : MRD818 (insert after MRD601)	Add SEISS level 1b definition to MRD
3.8	1490	09/04/09	<u>New</u> : MRD816 (insert after MRD591)	Add SUVI level 1b definition to MRD
3.8	1491	09/04/09	<u>New</u> : MRD819 (insert after MRD569)	Add EXIS XRS level 1b definition to MRD
3.8	1492	09/04/09	<u>New</u> : MRD817 (insert after MRD569)	Add EXIS EUVS level 1b definition to MRD
3.8	1499	09/04/09	MRD12, MRD757	Corrects the referenced interface requirements document for the GS to NWS Interface.



**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

3.8	1542	09/04/09	numerous	Delete the Goals Column from Section 3.3 Product Tables.
3.8	1543	09/04/09	TOC, MRD#: 80, 82, 84, 127, 129, 131, 138, 139 - 141, 146, 148, 150, 152, 153 & 154 (deleted), 155 -160, 162, 164, 166, 174, 176, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 219 & 220 (deleted), 222 - 224 (deleted), 226-230, 234, 239, 241, 244, 246, 248, 249 - 254 (deleted), 257, 259, 261, 263, 265, 267, 270, 275- 284, 286, 288, 295, 297, 299, 302, 304, 306, 315, 317 - 320, 330, 332, 334, 336, 338, 340, 345, 354, 356, 363, 368 & 369 (deleted), 371, 373, 375 & 376 (deleted), 377, 378, 379 & 380 (deleted), 632 & 633 (deleted), 797, 801 - 803, 807 - 809, 813, 815, 821 & 822 (new)	Changes to the MRD based on the most recent release of the LIRD. Flows down changes to product specifications, including name changes, accuracy, geographic coverage, and horizontal resolution parameters.
3.9	1544	09/18/09	MRD49 (deleted), MRD50	Delete MRD49 (section head) and move MRD50 after section 3.4.1.2 (MRD406), Spacecraft Payloads
3.9	1545	09/18/09	MRD70	Move MRD70 to section 3.6.1, General Ground Segment Requirements
3.9	1546	09/18/09	MRD#: 52 (deleted), 53 (deleted), 54, 55 (deleted), 56 (deleted), 57 (deleted), 58, 59, 792 (deleted), 793, 794	Change location in document of MRD793 MRD794 MRD58 MRD59 MRD54 so that Space Segment, Spacecraft and Ground Segment requirements are collected together.  Delete empty section headings
3.9	1559	10/21/09	MRD12	Update IT Security Document Name
3.9	1571A	11/02/09	MRD12, MRD68	Change document from Program MAR, which doesn't exist, to Spacecraft, Instrument and ABI and Ground MAR docs.
3.9	1572A	11/04/09	MRD #: 12, 64, 65, 66, 415, 2058 (new)	Add NPR 2810.1; Change GS to "Ground Segment"; update IT standards document references; Move MRD 65 to after MRD708; Add security requirement for space segment project.
3.9	1578	11/02/09	MRD #: 450, 2053 (new), 2054 (new)	Modify MRD450 to specify the interface between the Space and Ground Segments.
3.9	1579	10/30/09	MRD2078 (new)	Add a requirement for the GS to receive GRB data from the SS
3.9	1580	10/30/09	TOC, MRD2057 (new)	Add new section for system level interface requirements
3.9	1581	10/27/09	MRD2077 (new)	Add system level GRB interface requirement
3.9	1582	10/30/09	MRD2076 (new)	Add requirement for Space Segment to receive

**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

				HRIT/EMWIN data from the Ground Segment
3.9	1583	10/30/09	MRD2056 (new)	Add requirement for Ground Segment to send HRIT/EMWIN data to the Space Segment
3.9	1584A	10/30/09	MRD#s: 2064 (new), 2065 (new)	Add requirements for the System to send HRIT/EMWIN data and to receive HRIT/EMWIN data.
3.9	1585	11/02/09	MRD#s: 2074 (new), 2075 (new)	Adds two requirements for Space Segment DCS interface from/to Ground Segment
3.9	1586	11/02/09	MRD#s: 2059 (new), 2060 (new)	Adds two requirements for Ground Segment DCS interface from/to Space Segment.
3.9	1587	11/02/09	MRD#s: 2068 - 2072 (all are new)	Add five system requirements to address the interface(s) between GOES-R and the external DCS systems.
3.9	1588	11/02/09	MRD#s: 2066 (new), 2067 (new)	Add two Space Segment requirements for the SARSAT interface.
3.9	1589A	11/02/09	MRD#s: 2061 (new), 2062 (new)	Add two System level requirements for the SARSAT interface.
3.9	1590	10/21/09	MRD#s: 759, 2063 (new),	Add a System level interface requirement for the CLASS system. Also revised MRD759 to call out L0, L1b, L2+ data more specifically.
3.9	1591A	11/02/09	MRD#s: 12, 2055 (new)	Add a requirement to specify the ADRS to GOES-R System interface.
3.9	1593A	11/02/09	MRD#s: 12, 62	Add GS to GOES-N/O/P IRD to MRD12; Clarify text by referencing interface description document and move to appear with other interface requirements in new section 3.2.9.
3.9	1594	11/02/09	MRD2073 (new)	Add a System level requirement for the AWIPS interface
3.9	1595A	10/21/09	MRD716	Add Ground Segment (GS) TLM interface req.
3.9	1596	11/02/09	MRD717	Modify Ground Segment CMD interface req.
3.9	1602	11/02/09	MRD757	Clarify and correct doc reference GS AWIPS Interface requirement
3.9	1609	11/09/09	MRD#s: 12, 2095 (new), 61 (deleted), 2091 - 2094 (all new)	Delete MRD61 (Continuity) and replace with a series of verifiable system requirements. The added system requirements include: Continuity Facilities Compliance; Section 508 of the Rehabilitation Act Compliance; Accessibility Standards Compliance; Electromagnetic Interference Compliance; System Time Accuracy Compliance
3.9	1610	10/29/09	MRD864 (new)	Remove TBR from product measurement precision in MRD133/Aerosols.
3.9	1611	10/29/09	MRD#s: 1004/168, 1014/ 170, 1024/172, 1140/196, 1150/198, 1202/208, 1203/208	Remove TBXs (TBD, TBR, TBS) in Clouds:
3.9	1612	10/29/09	MRD#s: 1254/216, 1669/ 302, 1679/304, 1689/306	Remove TBRs in Winds:



**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

3.9	1613	10/29/09	MRD228/ 1277 and 1278, MRD230/ 1287 and 1288	Remove TBXs (TBD, TBR, TBS) in Turbulence:
3.9	1614	10/29/09	MRD237/1314, MRD248 /1440, 1441 and1445	Remove TBXs (TBD, TBR, TBS) in Hydrology:
3.9	1615	10/29/09	MRD#:s: 244/1400 & 1404; 246/1417, 1420 & 1424; 801/1337, 1343 & 1344; 802/ 1347, 1353 & 1354; 803/1357, 1363 & 1364; 807/1367 & 1373; 808/1377 & 1383, 809/ 1387 & 1393; 822/1410	Remove TBXs (TBD, TBR, TBS) in Sounding:
3.9	1616	10/29/09	MRD257/1458; MRD259 /1468; MRD261/1479; MRD263/1496; MRD265 /1506; MRD267/1516	Remove TBXs (TBD, TBR, TBS) in Radiances and Clear Sky Masks:.
3.9	1617	10/29/09	MRD#:s: 272/1536; 274 /1546; 286/1602 & 1606; 288/1612 & 1616; 290/ 1622, 1623 & 1626; 292/ 1632, 1633 & 1636	Remove TBXs (TBD, TBR, TBS) in Radiation:
3.9	1618	10/29/09	MRD#:s: 310/1706; 312 /1716; 315/1727; 317/ 1737; 320/1747; 323/ 1756; 325/1766; 327/ 1776; 330/1787; 332/ 1797; 334/1807; 336/ 1817; 338/1827; 340/ 1837; 343/1844, 1845, & 1847; 345/1856 & 1857; 348/1866 &1867; 350/ 1876 & 1877; 363/1927; 365/1937; 367/1947; 371 /1957; and 373/1967	Remove TBXs (TBD, TBR, TBS) in Land, including Cryosphere
3.9	1619	11/08/09	MRD139, MRD141	Remove SO2 from Aerosol Optical Depth definitions
3.9	1620	10/29/09	MRD354/1886; MRD356 /1896; MRD378/1976	Remove TBXs (TBD, TBR, TBS) in SST and Currents
3.9	1621	10/29/09	MRD222/1264; MRD637	Remove TBXs (TBD, TBR, TBS) in Lightning
3.9	1622	10/29/09	MRD14, MRD789, MRD794	Removal TBXs in general Program sections. Change MRD14 TBD reference from non-existent plan to existent plan in doc tree.
3.9	1623	11/09/09	MRD12, MRD2088 - MRD2090 (all new)	Add document to MRD12 and add introductory text to the start of MRD Section 4, Verification and Validation
3.9	1624	10/29/09	MRD2080 (new)	Add requirement for the GS to process UIID data rates specified on Flight side
3.9	1625	10/29/09	MRD32, MRD442, MRD695, MRD764	Remove TBD on Ground Remote Backup Location; Remove TBR on level of scalability.
3.9	1626A	11/08/09	MRD12, MRD44, MRD2081 – 2083 (new), MRD45, MRD46, MRD2084 – 2086 (new)	Update orbital requirements to create separate requirements with separate concepts.
3.9	1627A	11/09/09	MRD12, MRD2087 (new)	Add a system requirement to address the GOES-R to

**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

				GOES-R Data Portal interface.
3.9	1630	11/09/09	MRD#s: MRD393/2022; 400/2046, 2047 & 2057; 596, and 660	Remove TBXs (TBD, TBR, TBS) in Solar products and Magnetometer.
3.9	1631	11/09/09	Numerous	Adds separate DOORS Objects for the individual Product Table Parameters. MRD#s: 127, 129, 131, 133, 139, 141, 143, 146, 148, 150, 152, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 222, 226, 228, 230, 234, 237, 239, 241, 244, 822, 246, 813, 248, 257, 259, 261, 263, 265, 267, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 295, 297, 299, 302, 304, 306, 310, 312, 315, 317, 320, 323, 325, 327, 330, 332, 334, 336, 338, 340, 343, 345, 348, 350, 354, 356, 358, 360, 363, 365, 367, 371, 373, 378, 384, 386, 388, 390, 393, 396, 398, 400, 797, 801 - 803, 807 - 809, 815
3.9	1633	11/10/09	MRD#s: 384, 386, 388, 390, 603	Remove TBXs (TBD, TBR, TBS) in SEISS
3.9	1636	11/11/09	MRD442	Clean up footnote text per comments in CCR-1652 that went beyond TBX changes. Text implied RBU backs up all WCDAS functionality for NESDIS.
3.10	1601	03/12/10	MRD#s 12, 701, 753, 760	Corrects the GS IRD references. It also corrects the EM MTTR from 5 minutes to 120 minutes.
3.10	1677A	01/26/10	MRD645	Specifies how many flashes per second the GLM should detect over the full field of view.
3.10	1681	03/17/10	MRD596	Deletes the "*" and the notation that states 40 seconds of the Product Latency should be allocated to SEC.
3.10	1720	03/17/10	MRD45	Corrects typo from last rev. by changing the orbital control parameter from +/- 1 deg back to +/- 0.1 deg.
3.10	1721A	06/02/10	MRD99	Add a note to clarify that Mapping Accuracy requirements
3.10	1725	03/25/10	MRD #s 607-609, 1983, 1992, 2001, 2010	Refine Product Measurement Accuracies for Level 1b products produced from SEISS
3.10	1727	06/02/10	MRD641	Clarifies that lightning pulses will be time tagged, rather than sampled for the GLM
3.10	1728	05/05/10	MRD#s: 356, 717, 893, 894, 1291, 1667, 2056, 2059, 2060	MRD356 – corrects a typo; Corrects 'Req?' flag for MRD#s: 717, 893, 894, 1291, 1667, 2056, 2059, 2060
3.10	1729	05/05/10	MRD1263	Change the GLM end to end (photons to products) Level 2+ product latency.
3.10	1731	05/12/10	MRD#s: 86, 390, 603, 606 - 609, 1982, 2000, 2009 , 2098 (new)	Update to reflect selected SEISS Appendix I changes.
3.10	1732	05/05/10	MRD#s: 46, 2097 (new)	Divide MRD46 into two separate requirements

**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

3.10	1733	05/05/10	MRD506, MRD566	Waive ABI visible band SNR performance.
3.10	1761	06/02/10	MRD#: 12, 62 (deleted), 745 (deleted), 756 (deleted), 791	Remove emulated GVAR (eGVAR)
3.10	1764	06/16/10	MRD#: 122, 1491, 1501, 1511, 2099 (new), 2100 (new)	Clarifies existing requirements and corrects a disconnect in the MRD between how products parameterize INR navigation performance, and the requirements for INR themselves
3.10	1798	06/24/10	MRD#: 1433, 1902, 1903, 1906, 1912, 1913, 1916 (all deleted)	Remove TBXs on Currents - Offshore for CONUS and Hemispheric. Remove TBX on latency for Total Precipitable Water (TPW) - CONUS
3.10	CMO Notes	06/24/10	Cover page, All	document footer is changed to "check the VSDE at <a href="https://goesv3.ndc.nasa.gov">https://goesv3.ndc.nasa.gov</a> to verify correct version prior to use."  Reformatted output of document as requested by SRR Review Board.
3.11	1503A	09/28/10	<u>Modify:</u> MRD1984, MRD1994, MRD2003, MRD2012; <u>Added:</u> MRD2101 and MRD2102	Adds back the limited SEISS operations capability during spacecraft storage.
3.11	1818	09/28/10	<u>Modify:</u> MRD323 (3.3.4.4.1.0-1), MRD325 (3.3.4.4.2.0-1), and MRD327 (3.3.4.4.3.0-1)	Change Land Surface Temperature (LST) definition to include a computation of Land Surface Temperature over ice covering the land.
3.11	1839	09/28/10	<u>Modify:</u> MRD818 (3.4.2.5.0-1)	Update the SEISS level 1b description in the MRD to include the dosimeter.
3.11	1866	9/28/10	<u>Waiver:</u> MRD506 (3.4.2.1.4.0-1), MRD519 (3.4.2.1.4.0-14)	Waives FPA redundant side NEdT performance and pixel to pixel relative accuracy for the 13.3 um band of Flight Model 1. (related to FP CCR-01833)
3.11	1888	11/22/10	<u>Modify:</u> MRD2031 (3.3.6.3.1.0-10), MRD2038 (3.3.6.3.2.0-7), MRD2039 (3.3.6.3.2.0-8), MRD2040 (3.3.6.3.2.0-9), MRD2041 (3.3.6.3.2.0-10)	Eliminate TBRs in the Solar Flux X-ray L1b product Refresh Rate, Latency and Product Precision and Solar Flux EUV L1b Product Precision. Refine L1b XRS product accuracy.
3.11	1899	11/16/10	<u>Modify:</u> MRD#s 830, 840, 841, 862, 873, 882, 883, 892, 893, 902, 922, 942, 952, 982, 1012, 1032, 1042, 1043, 1053, 1062, 1063, 1083, 1092, 1093, 1103, 1112, 1113, 1122, 1123, 1142, 1153, 1162, 1163, 1182, 1192, 1252, 1253, 1272, 1282, 1302, 1312, 1322, 1332, 1333, 1342, 1352, 1372, 1382, 1402, 1412, 1432, 1443, 1463, 1473, 1494, 1504, 1534, 1544, 1554, 1564, 1584, 1594, 1604, 1614, 1624, 1634, 1644, 1654, 1664, 1674, 1675, 1684, 1685, 1695, 1714, 1715, 1765, 1775, 1974	Restore MRD product latencies and refresh rates to undo the de-scopes approved by GORWG in late 2007 / early 2008.
3.12	1917A	04/25/11	<u>Modify:</u> MRD781 (4.1.0-4)	Refine MRD End-to-End verification to clarify text

**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

				to address IRT concern that verification is not readily done with Level 0 data but depends employing Level 1b algorithm. Remove validation aspect of this requirement. Add information about verification employing simulated data
3.13	2115	08/02/11	<p><u>Modify:</u> MRD#s: 12, 54, 58, 59, 65, 66, 70, 407, 411, 416, 419, 427, 444, 480, 491, 493, 504, 506, 519, 522, 523, 527, 529 – 533, 535, 536, 538, 539, 541 – 543, 545, 567, 572, 577, 579, 580, 584, 586, 588, 589, 593, 595, 599, 603, 615, 616, 619, 620, 631, 636 – 639, 642, 644, 655, 657, 662 – 664, 688, 694, 695, 705, 713, 714, 719, 722, 728, 731, 737, 795, 739 – 743, 752, 764, 771, 775</p> <p><u>New:</u> MRD#s: 2104 – 2108, 2110 – 2154</p> <p><u>Deleted:</u> MRD#s:50, 404, 405, 408, 409, 412, 415, 417, 420–422, 424, 425, 429, 431, 433, 435, 438, 440, 445, 449, 450, 453, 454, 457- 459, 462, 467, 469, 470, 472, 474, 476, 478, 485 – 490, 492, 494 – 500, 507 – 510, 512, 514 - 518, 520, 524, 526, 547 – 550 - 556, 558, 559, 561 – 564, 566, 570, 571, 573, 575, 576, 578, 583, 585, 587, 590, 592, 594, 596 - 598, 602, 604 – 609, 611 – 613, 618, 622, 623, 625, 628, 634, 635, 640, 641, 643, 645, 648 – 652, 654, 658 – 660, 666 – 670, 672, 673, 677 – 681, 683, 685, 689, 690 – 693, 696, 697, 699 – 704, 706 – 708, 710 – 712, 715 – 718, 720, 721, 723 – 727, 730, 732 – 736, 738, 744, 747, 748, 750, 751, 753, 755, 757, 759 – 762, 765 – 767, 770, 773, 773, 778 – 784, 786, 787, 793, 794, 2053, 2054, 2056, 2058 - 2060, 2066, 2067, 2074, 2075, 2076, 2078, 2080, 2096, 2098</p>	Re-baseline of the MRD to eliminate element and below requirements (i.e. mission management, instrument, etc.) by re-capturing technical detail at Level 2 or driving it down to Project requirements.
3.14	1760	06/02/10	<u>Modify:</u> MRD-2047 & MRD-2049	Remove leftover references to temperature in the Product Measurement Range and Product Refresh Rate / Coverage Time in the Solar Imagery: X-ray product (SUVI level 1b product).
3.14	1975	08/29/11	<u>Modify:</u> MRD-1260 & MRD-1702	Refine product measurement ranges for Fire/Hot Spot Characterization and Lightning Detection.

**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

3.14	1977	07/06/11	<u>Modify:</u> MRD#s: 864, 1034, 1044, 1054, 1064, 1074, 1404	New product relaxations to Product Measurement Precision for Aerosol Particle Size, Derived Stability Indices (K-Index), Cloud Optical Depth, Cloud Particle Size in support of 100% ATBDs.
3.14	2071	01/06/12	<u>Modify:</u> MRD#s: 236, 265, 267	Remove the term "infrared" from the definition of Radiances product, which has created confusion by implying it is limited to IR bands only.
3.14	2153	01/12/12	<u>Modify:</u> MRD#s: 2016 & 2019	Deviation for MRD2019 (Geomagnetic Field Measurement Accuracy) to "2.3 nT after calibration, with 4 nT at end of life" and MRD2016 (Geomagnetic Field Pointing/Mapping Accuracy) to "+/- 0.52 degree". See related CCR-02139 SCFPS  CMO Note: Originally MRD2020 was identified as being deviated, this was a typo and has been corrected (see email attachment to CCR)
3.14	2163	12/28/11	<u>Modify:</u> MRD#s: 8, 12, 22, 71, 133, 407, 475, 504, 642, 729, 763, 776, 795, 2105, 2108, 2110, 2114, , <u>Deleted</u> Sections 3.1.2.4, 4.1, 4.2	Many changes are administrative: deletion/renaming of headings which were changed or orphaned in the re-baseline; spelling/grammar. The following requirements have been rewritten or modified: MRD2105; MRD2108; MRD71; MRD2110; MRD2114; MRD504; MRD642; MRD795.
3.14	2168	12/30/11	<u>Modify:</u> MRD #s: 2084, 2085, 2086 <u>Deleted:</u> MRD46, 2097 <u>New:</u> MRD-2155	This adds a new MRD requirement (triggered by LIRD v3.0) to restore service to GOES-East or GOES-West with an on-orbit spare spacecraft within 3 weeks.
3.14	2221	01/19/12	<u>Modify:</u> MRD74	Change the formal risk classification from Class A to Class B.
3.15	1867A	06/20/13	<u>Modify:</u> MRD82 <u>New:</u> MRD #s: 2166, 2170, 2171 – 2180, 2167, 2181 - 2191	Update MRD to reflect 1) proposed LIRD product changes for only area changes (increases) and 2) proposed changes by AWG in support of the 100% algorithm deliveries including only area changes (increases). Vegetation Fraction: Green: Hemispheric; Vegetation Index: Hemispheric
3.15	1892	03/28/12	<u>Modify:</u> MRD #s: 347, 348, 910, 911, 914, 915, 920, 921, 924, 925, 930, 931, 934, 935, 944, 954, 964, 970, 971, 974, 975, 980, 981, 984, 985, 990, 991, 994, 995, 1030, 1031, 1034, 1035, 1040, 1041, 1044, 1045, 1051, 1054, 1055, 1061, 1064, 1065, 1071, 1074, 1075, 1084, 1085, 1094, 1095, 1104, 1105, 1115, 1125, 1135, 1145, 1155, 1184, 1194, 1204, 1251, 1254, 1335, 1446, 1533, 1536, 1543, 1546, 1670, 1672, 1676, 1680, 1682, 1686, 1690, 1692, 1696, 1747, 1786, 1796, 1806, 1856,	Update MRD to reflect 1) proposed LIRD product changes representing requirement relaxations only, 2) proposed relaxation changes by AWG in support of the 100% algorithm deliveries later this year, and 3) proposed changes from PSE to clean up a few observed disconnects.

**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

			1857, 1863, 1866, 1883, 1886, 1893, 1903, 1906, 1913, 1916,	
3.15	2129	05/10/12	<u>Modify:</u> MRD #s 1983, 1984, 1985, 1986, 1992, 1995, 2001, 2004, 2010, 2013, 2021, 2022	Change to Product Measurement Accuracy and Product Measurement Precision requirement for SEISS to N/A during spacecraft storage.  Additionally, cleanup Energetic Heavy Ions Product Latency which was accidentally placed against the Product Refresh in the last SEISS during storage change.
3.15	2166	05/15/12	<u>Modify:</u> MRD #s 480, 491, 493, 529 - 533, 535, 536, 538, 539, 542, 543, 589, 737, 2107, 2110, 2114, 2128, 2131 <u>New:</u> MRD #s: 2156, 2157, 2158	Technical baseline cleanups following the MRD re-baseline.
3.15	2167	10/26/12	<u>Modify:</u> MRD #s 390 & 2009	Remove from MRD Solar Galactic Proton Product Measurement Range requirement and modify MRD Solar Galactic Proton definition to remove SEISS alpha particles.
3.15	2183	05/15/12	<u>Deviation:</u> Numerous (600 plus occurrences)	Deviation of updated latency/refresh changes and Products (related to LIRD CCR-02169)
3.15	2369	02/28/13	<u>Deviation:</u> MRD1260	Deviation of Lightning Detection product: Product Measurement Range limit specification (related to GSP CCR-02386)
3.15	2415	10/24/13	<u>Deviation:</u> MRD#s 330, 332, 334	Deviation to delay implementation of a baseline Snow Cover product
3.15	2416	02/28/13	<u>Deviation:</u> MRD616	Deviate Magnetospheric Electron and Proton-Low Energy temporal uncertainty in the energy bandwidth (related to FP CCR-02451)
3.15	2501	04/19/13	<u>Waiver:</u> MRD506	Waive ABI system spectral response lower limit on shortwave side of the bandwidth for the 8.5 um band of PFM (FM1). (Related to FP CCR-02445)
3.15	2551	07/23/13	<u>Deviation:</u> MRD1334	Deviate Rainfall Rate/ QPE Product Precision rates (Related to GSP CCR-02537)
3.15	2589	09/30/13	<u>Delete:</u> MRD644	Deletes an unnecessary requirement for calibration accuracy on GLM
3.15	2600	09/19/13	<u>Modify:</u> MRD #s 529, 530, 531, 536, 2154	Change co-registration requirements from not-to-exceed values, Cleanup misnamed Radiances relief near sun from "keep out zones" to "zones of reduced data quality", change co-registration value, change swath to swath registration from
3.15	2601	09/19/13	<u>Waiver:</u> MRD#s 506, 519, 1490, 1500, 1510	Waive Radiances relative accuracy, horizontal resolution, and NEdT specified at 240 K for 6.185 um band (related to FP CCR-01963)
3.15	2602	09/19/13	<u>Waiver:</u> MRD#s 829, 839, 851	Waiver Aerosol Detection Product Measurement Accuracy for Dust (not smoke) (related to FP CCR-02590)



**Mission Requirements Document (MRD)  
 Document Change Record Page (Continued)**

3.15	CMO Notes	01/07/13	Entire document, MRD12, MRD2088, MRD14, MRD789, MRD791, footer	In keeping with direction from GPO, revising document numbers (as document is updated) to reflect the NASA code assignment of Code 410 for the GPO. Changed P417-R-MRD.. to 410-R-MRD..., changed P417-R-PLN-0083 to 410-R-PLN-0083, changed P417-R-PLN-0067 to 410-R-PLN-0067, for consistency changed – to : in MRD789, cleaned up some spacing in MRD791, revised portal link to Check the VSDE at <a href="https://goesv3.ndc.nasa.gov">https://goesv3.ndc.nasa.gov</a> to verify correct version prior to use.
3.16	2588	10/24/13	<u>Waiver:</u> MRD2156	ABI FM3 and up, waive current required Radiances low light visible band SNR (related to FP CCR-02584)
3.16	2662	01/17/14	<u>Modify:</u> MRD #s 399 & 400	Change product name in MRD from Solar Imagery: X-ray to Solar Imagery: EUV
3.17	2731	04/14/14	<u>Modify:</u> MRD36	Brings MRD36 in line with the LIRD system lifetime description and de-couples it from the PMD
3.18	2837	09/09/14	<u>Waiver:</u> MRD#s 829, 839, & 851	Waive Aerosol Detection Product Measurement Accuracy for Dust (not smoke)
3.19	2970	09/10/15	<u>Modify:</u> MRD2063	Change Core GS Interface from CLASS to PDA
3.19	3006	12/14/15	<u>Modify:</u> MRD502	Inserts ABI Mode 6 into the list of operational collect modes of that section
3.20	2923	01/04/16	<u>Waiver:</u> MRD506	Waive Radiances (ABI FM2) spectral response bandwidth on shortwave side of 8.5 um band
3.20	2924	01/04/16	<u>Waiver:</u> MRD506	Waive Radiances (ABI FM3) spectral response bandwidth on shortwave side of 8.5 um band
3.21	3074	05/26/16	<u>Waiver:</u> MRD1986	Waiver to Energetic Heavy Ion Prod. Meas. Precision SEISS FM1 - 4
3.21	3075	05/26/16	<u>Waiver:</u> MRD1995	Waiver to Magnetospheric Elect and Protons Low Energy Precision SEISS FM1
3.21	3076	05/26/16	<u>Waiver:</u> MRD2013	Waiver to Solar and Galactic Protons Prod. Meas. Precision SEISS FM1
3.21	3088	05/26/16	<u>Waiver:</u> MRD2004	Waiver to Magneto. Elect and Prot. High Energy Prod. Precision S EISS FM1

**/NOAA Level I-II**

**MRD**

410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

Version: 3.21

Printed by: krmorris

Printed on: Tuesday, May 31, 2016

No filter applied.

No sort applied.

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Document Scope	1
1.2	Document Overview	1
1.3	Requirements Terminology	1
1.4	GOES-R Specification Hierarchy	1
<b>2</b>	<b>Documents</b>	<b>3</b>
2.1	Applicable Documents	3
2.2	Reference Documents	4
<b>3</b>	<b>Mission Requirements</b>	<b>5</b>
3.1	Mission Overview	5
3.1.1	Mission Objectives	5
3.1.2	Mission Architecture	5
3.1.2.1	Space Segment Description	6
3.1.2.2	Launch Segment Description	6
3.1.2.3	Ground Segment Description	6
3.1.3	Concept of Operations Summary	7
3.2	General Requirements	7
3.2.1	Level I Schedule Requirements	7
3.2.1.1	System Life	7
3.2.1.2	System Initial Operating Capability (IOC)	7
3.2.1.3	System Full Operational Capability (FOC)	7
3.2.2	Constellation Requirements	7
3.2.2.1	Orbits	7
3.2.2.2	Coverage	8
3.2.3	Availability and Reliability	8
3.2.4	Mission Continuity	8
3.2.5	System Security	9
3.2.6	System Safety	9
3.2.7	System Standards	9
3.2.8	Risk Classification	9
3.2.9	External Interface Requirements (CCR 01580)	9
3.3	Product Requirements	10
3.3.1	Product Primary Instrument Sources and Prioritization	10
3.3.1.1	Atmosphere Products Primary Instrument Sources/Prioritization	11
3.3.1.2	Land Products Primary Instrument Sources/Prioritization	15
3.3.1.3	Ocean Products Primary Instrument Sources/Prioritization	16

3.3.1.4	Space Weather (Space and Solar) Products Primary Instrument Sources/Prioritization	17
3.3.1.5	Product System Requirements (CCR 02115)	17
3.3.2	Product Parameter Definitions	18
3.3.2.1	Product Geographic Coverage/Conditions	18
3.3.2.2	Product Orthogonality/Coverage	18
3.3.2.3	Product Vertical Resolution	18
3.3.2.4	Product Horizontal Resolution	18
3.3.2.5	Product Horizontal/Angular Resolution	18
3.3.2.6	Product Mapping Accuracy (Product Geolocation)	18
3.3.2.7	Product Pointing/Mapping Accuracy	19
3.3.2.8	Product Pointing Knowledge/Mapping Uncertainty	19
3.3.2.9	Product Measurement Range	19
3.3.2.10	Product Measurement Accuracy	19
3.3.2.11	Product Refresh Rate/Coverage Time	19
3.3.2.12	Mission Product Data Latency	20
3.3.2.13	Long-Term Stability	20
3.3.2.14	Product Measurement Precision	20
3.3.2.15	Temporal Coverage Qualifier	20
3.3.2.16	Product Extent Qualifier	20
3.3.2.17	Cloud Cover Conditions Qualifier	20
3.3.2.18	Product Statistics Qualifier	21
3.3.2.19	Product Parameter Verification Criteria (CCR 01764)	21
3.3.3	Atmospheric Products Tables (GOES-R Baseline)	21
3.3.3.1	Aerosols	21
3.3.3.2	Clouds	27
3.3.3.3	Precipitation	61
3.3.3.4	Profiles, Indices, Total Water	63
3.3.3.5	Radiances	73
3.3.3.6	Radiation	78
3.3.3.7	Trace Gases	87
3.3.3.8	Winds	89
3.3.4	Land Products Tables (GOES-R Baseline)	92
3.3.4.1	Fire/Hot Spot Characterization	92
3.3.4.2	Flood/Standing Water	93
3.3.4.3	Ice Cover (CCR 01543)	95
3.3.4.4	Land Surface (Skin) Temperature	96
3.3.4.5	Snow Cover/Depth	98
3.3.4.6	Surface Albedo/Emissivity	103
3.3.4.7	Vegetation Fraction/Index	104
3.3.5	Ocean Products Tables (GOES-R Baseline)	107
3.3.5.1	Currents	107

3.3.5.2	Sea and Lake Ice	110
3.3.5.3	Sea Surface Temperature	114
3.3.6	Space and Solar Products Tables (GOES-R Baseline)	115
3.3.6.1	Energetic Particles	115
3.3.6.2	Magnetic Field	117
3.3.6.3	Solar	118
3.4	Space Segment Requirements	120
3.4.1	Spacecraft Payloads	120
3.4.2	Launch Vehicle Compatibility	121
3.4.3	Security	121
3.4.4	Continuity (CCR 02115)	121
3.4.4.1	Autonomous Operations	121
3.4.5	Communications	121
3.4.5.1	Mission Space to Ground Communications	123
3.4.5.2	Auxiliary Communications Services	123
3.4.6	Software (CCR 02163)	125
3.4.7	Recovery after Spacecraft Maneuvers	125
3.4.8	Observational Payloads	125
3.4.8.1	Advanced Baseline Imager (ABI)	125
3.4.8.2	EUVS XRS Irradiance Sensors (EXIS)	130
3.4.8.3	Solar UltraViolet Imager (SUVI)	131
3.4.8.4	Space Environment In-Situ Suite (SEISS)	132
3.4.8.5	Geostationary Lightning Mapper (GLM)	133
3.4.8.6	Magnetometer	133
3.5	Launch Segment Requirements	134
3.6	Ground Segment Requirements	134
3.6.1	General Ground Segment Requirements	134
3.6.2	Mission Management	135
3.6.3	Product Generation (CCR 02163)	135
3.6.4	Ground Segment Design and Construction (CCR 02163)	137
3.6.5	Integrated Logistics	137
3.6.5.1	Maintenance	137
3.6.5.2	Training	137
<b>4</b>	<b>Validation and Verification (CCR 02163)</b>	<b>138</b>
<b>5</b>	<b>Definitions and Abbreviations</b>	<b>139</b>
<b>6</b>	<b>Acronyms</b>	<b>142</b>

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD1 1 Introduction****MRD2 1.1 Document Scope**

MRD3 This document provides the Level IIA interface, functional, and performance requirements for the Geostationary Operational Environmental Satellite-R (GOES-R) Series mission. The GOES-R requirements are traceable to NOAA/NESDIS GOES-R Program Plan Level II requirements and as such are the source for all lower level requirements.

**MRD4 1.2 Document Overview**

MRD5 This mission specification is comprised of three sections. Section 1 of this document provides the introduction including the GOES-R specification hierarchy. Section 2 provides the applicable and reference documents. Section 3 of the document is the core, listing the mission requirements including: system overview, system requirements, functional segment requirements, system design and construction requirements and maintenance requirements. Section 4 refers to the documents describing how these requirements will be Verified and Validated. Sections 5 and 6 are references for terminology used throughout.

**MRD6 1.3 Requirements Terminology**

MRD7 The following requirements terminology is used throughout this document:

The term “*shall*” designates a requirement that must be achieved and is synonymous with the term “*threshold*.”

The term “*should*” designates a desired level of performance the government would like the contractor to strive towards achieving and is synonymous with the term “*goal*.”

All other terms, including “*will*”, only designate statements of fact or intentions of the government and are not to be interpreted as contractor requirements.

The term “(TBD)”, which means “to be determined”, applied to a missing requirement means that the contractor determines the missing requirement.

The term “(TBR)”, which means “to be refined/reviewed”, means that the requirement is subject to review for appropriateness and subject to revision. The contractor is liable for compliance with the requirement as if the “TBR” notation did not exist. The “TBR” merely provides an indication that the value is more likely to change in a future modification than requirements not accompanied by a “TBR.”


**MRD8 1.4 GOES-R Specification Hierarchy**

MRD9 The requirements of this specification are derived from the GOES-R Management Control Plan (MCP). This specification provides the source document for the requirement allocation to lower specifications shown in the GOES-R Specification Tree shown below.



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD9

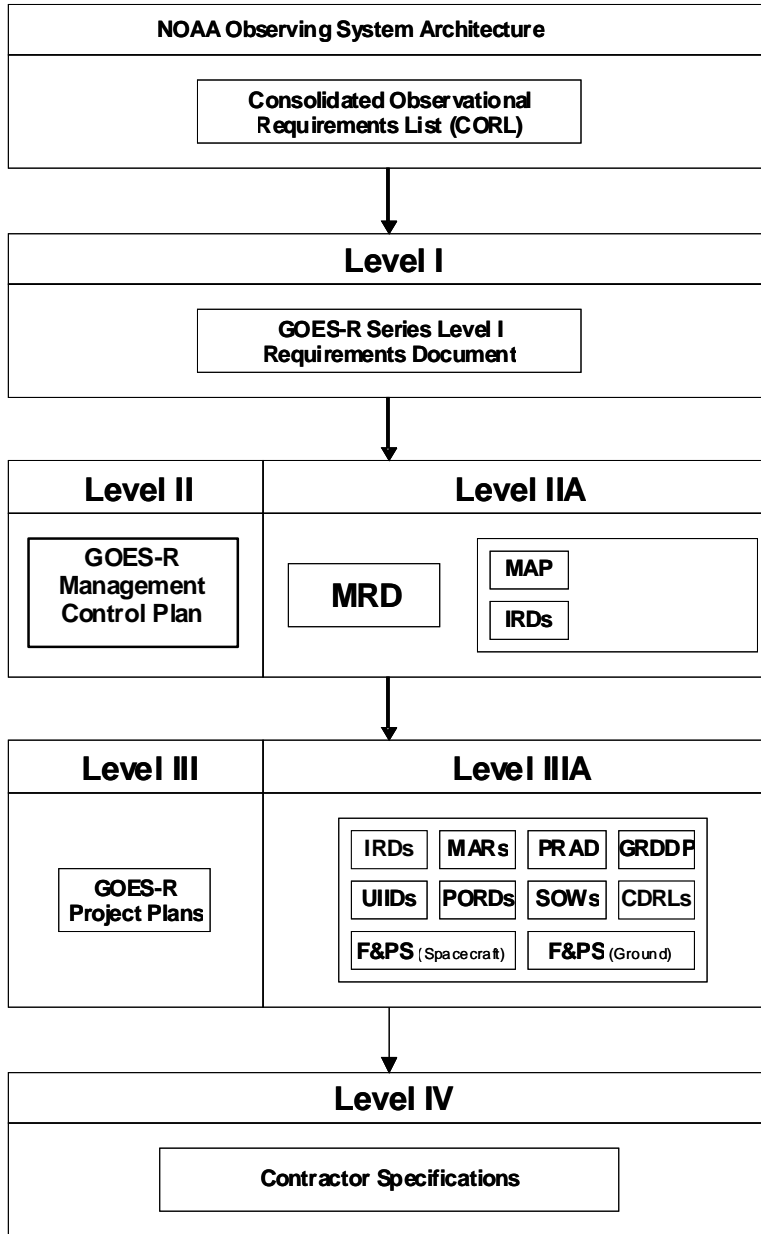

**GOES-R Specification Tree Figure**  
 (CCR 01462) (CCR 02163)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD10 2 Documents****MRD11 2.1 Applicable Documents**

MRD12 The following documents of the exact issue shown form a part of this specification to the extent specified herein. In the event of conflict between the documents referenced herein and the contents of this specification, the contents of this specification are considered the superseding requirements.

1. Security Requirements for Information Management Technology Resources (Oct 2003) CAR 1352.239-73
2. U.S. Department of Commerce IT Security Program Policy (2009)
3. Deleted
4. Deleted
5. Deleted
6. Deleted
7. Deleted
8. Deleted
9. Deleted
10. Deleted
11. GOES-R Series, Space Segment (SS) to Ground Located - Command, Control, and Communications Segment (GL-C3S) Interface Requirements Document (IRD), 417-R-IRD-0001
12. GOES-R Series, Space Segment (SS) to GOES Rebroadcast (GRB) Service Interface Requirements Document (IRD), 417-R-IRD-0002
13. GOES-R Series, Space Segment (SS) to High Rate Information Transmission and Emergency Managers Weather Information Network (HRIT/EMWIN) Service Interface Requirements Document (IRD), 417-R-IRD-0168
14. Deleted.
15. GOES-R Series, Space Segment (SS) to Data Collection System (DCS) Interface Requirements Document (IRD), 417-R-IRD-0005
16. GOES-R Series, Space Segment (SS) to Search and Rescue (SAR) Service Interface Requirements Document (IRD), 417-R-IRD-0006
17. NASA Policy Directive, NASA Policy for Limiting Orbital Debris Generation, NPD 8710.3B, January 27, 2003
18. OMB Memorandum M-05-22
19. NASA Procedural Requirements, Risk Classification of NASA Payloads, NPR 8705.4 , June 14, 2004
20. Launch Services Risk Mitigation Policy for NASA-Owned and/or NASA-Sponsored Payloads/Missions, NPD 8610.7C
21. GOES-R Series, Ground Segment (GS) to High Rate Information Transmission and Emergency Managers Weather Information Network (HRIT/EMWIN) Service Interface Requirements Document (IRD), 417-R-IRD-0095
22. GOES-R Series, Ground Segment (GS) to Emergency Managers Weather Information Network (EMWIN) Service Interface Requirements Document (IRD), 417-R-IRD-0096
23. GOES-R Series, Ground Segment (GS) to Search and Rescue Satellite (SARSAT) Service Interface Requirements Document (IRD), 417-R-IRD-0093
24. GOES-R Series, Ground Segment (GS) to Data Collection System (DCS) Interface Requirements Document (IRD), G417-R-IRD-0094
25. GOES-R Series, Ground Segment (GS) to Advance Weather Interactive Processing System (AWIPS) Interface Requirements Document (IRD), P417-R-IRD-0160
26. Reserved
27. Reserved
28. GOES-R Series, Ground Segment (GS) to Comprehensive Large Array-Data Stewardship System (CLASS) Interface Requirements Document (IRD), 417-R-IRD-0090
29. Deleted
30. Use of the SI (Metric) System of Measurement in NASA Programs, NPD 8010.2D
31. GOES-R Series, Ground Segment (GS) to Ancillary Data Relay System (ADRS) Interface Requirements Document (IRD), G417-R-IRD-0157
32. NASA Procedural Requirements, Security of Information Technology, NPR 2810.1

**ID                    410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD12    33. GOES-R Series, Ground Segment Project MAR Document, G417-R-GSMAR-0068  
34. GOES-R Series, Flight Project Spacecraft MAR, 417-R-SCMAR-0011  
35. GOES-R Series, Instrument Mission Assurance Requirements, 417-R-IMAR-0039  
36. GOES-R Series, Advanced Baseline Imager (ABI) Mission Assurance Requirements (MAR) Document, 417-R-ABIMAR-0012  
37. Reserved  
38. Process for Limiting Orbital Debris, NASA STD 8719.14  
39. GOES-R Series, GOES-R Access Subsystem (GAS)-to-User Interface Description Document, P417-R-IDD-0226  
40. GOES-R Series, Program Verification and Validation Plan, 410-R-PLN-0083  
41. Federal Continuity Directive 1 (FCD-1), Annex G, Continuity Facilities, February 2008  
42. 36 Code of Federal Regulations (CFR), Part 1193 - Telecommunications Act Accessibility Guidelines  
43. 36 Code of Federal Regulations (CFR), Part 1194 - Electronic and Information Technology Accessibility Standards  
44. Code of Federal Regulations (CFR) 47 - Telecommunication, Part 15 - Radio Frequency Devices, Subpart B - Unintentional Radiators, Section 15.107 - Conducted limits  
45. Code of Federal Regulations (CFR) 47 - Telecommunication, Part 15 - Radio Frequency Devices, Subpart B - Unintentional Radiators, Section 15.109 - Radiated emission limits  
46. 29 U.S.C. 794d, Section 508 of the Rehabilitation Act of 1973, as amended  
47. Consultative Committee for Space Data Systems, Recommendation for Space Data System Standards, Blue Book Issue 1, September 2003, CCSDS 231.0-B-1  
48. Consultative Committee for Space Data Systems, Recommendation for Space Data System Standards, Blue Book Issue 2, July 2006, Specification, CCSDS 732.0-B-2  
(*CCR 01127*) (*CCR 01423*) (*CCR 01499*) (*CCR 01591A*) (*CCR 01559*) (*CCR 01572A*) (*CCR 01571A*) (*CCR 01593A*) (*CCR 01626A*) (*CCR 01627A*) (*CCR 01623*) (*CCR 01609*) (*CCR 01601*) (*CCR 01761*) (*CCR 02115*) (*CCR 02163*)

**MRD13    2.2 Reference Documents**

MRD14    The following documents are listed below for reference purposes only.

- GOES-R/S Satellites, Level I Requirements Document
- GOES-R Series, Management Control Plan, 410-R-PLN-0067
- International Vocabulary of Basic and General Terms in Metrology, 1993
- A New Distortion Measure for Video Coding Blocking Artifacts, H. R. Wu, Proceedings of the 1996 International Conference on Communication Technology, Volume 2, May 5-7 1996, Beijing, China, pages 658-661
- GOES-R Series Concept of Operations (CONOPS), P417-OPS-0008  
(*CCR 01622*)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD15 3 Mission Requirements****MRD16 3.1 Mission Overview****MRD17 3.1.1 Mission Objectives**

MRD18 United States Code Title 15 Chapter 9 has chartered Department of Commerce to forecast weather, issue storm warnings, and display weather and flood signals that will benefit agriculture, commerce, and navigation. The National Oceanic and Atmospheric Administration's (NOAA's) primary environmental mission therefore is to provide forecasts and warnings for the United States, its territories, adjacent waters and ocean area, for the protection of life and property and the enhancement of the national economy. The following are the primary and secondary mission objectives for the GOES-R mission.

MRD19

## a) Primary Mission Objectives

- 1) To maintain GOES mission continuity and quality in environmental observations in the GOES-R timeframe, extending from 2014 through at least 2028 (or the equivalent duration if starting later).
- 2) To provide enhanced environmental data products
- 3) To improve services and data being provided to Users
- 4) To be responsive to technology infusion to meet evolving User needs
- 5) To protect, restore, and manage the use of coastal and ocean resources through ecosystem management approaches
- 6) To understand climate variability and change to enhance society's ability to plan and respond
- 7) To serve society's need for weather and water information
- 8) To support the Nation's commerce with information for safe and efficient transportation

## b) Secondary Mission Objective

- 1) To support ties to the NOAA/National/International Observing System


**MRD20 3.1.2 Mission Architecture**

MRD21 The GOES-R System consists of segments for space and launch and for ground. A brief description of the segments is contained in the following paragraphs. A more detailed description is contained in the reference document GOES-R Series Concept of Operations (CONOPS).

The notional architecture of the GOES-R system is shown below.

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

MRD21

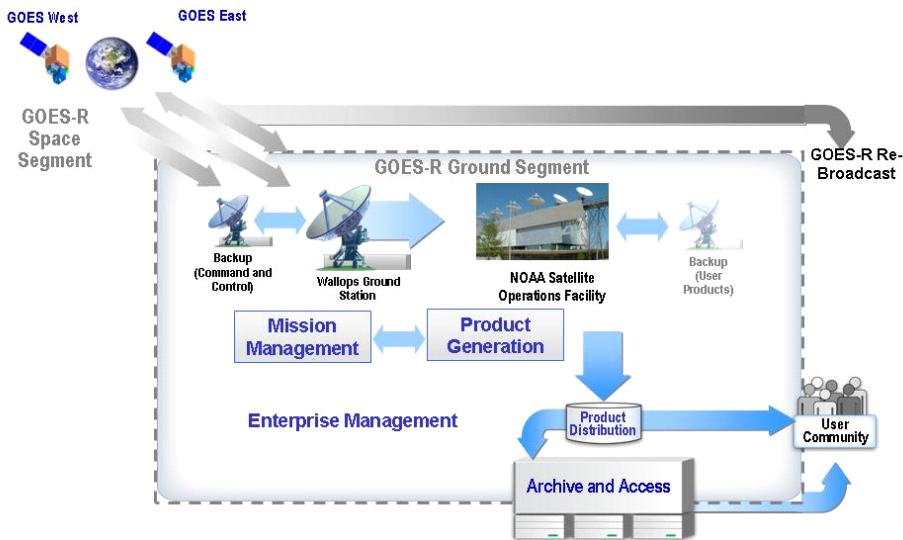

(CCR 01121)

### MRD22 3.1.2.1 Space Segment Description

MRD23 The Space Segment consists of the spacecraft bus, instrument payload, and associated communications equipment. The GOES-R spacecraft will be 3-axis stabilized and capable of the fine pointing control necessary for mission requirements. The primary instrument is the Advanced Baseline Imager (ABI) that will provide climatic, synoptic, and mesoscale imagery for global and CONUS forecasting and severe weather warning. Secondary instruments include the EUVS XRS Irradiance Sensors (EXIS), the Solar UltraViolet Imager (SUVI), the Space Environment In-Situ Suite (SEISS), the Magnetometer (MAG) and the Geostationary Lightning Mapper (GLM). Additionally, GOES-R will provide a set of auxiliary communications services in support of the GOES Rebroadcast service (GRB), Data Collection System (DCS), High Rate Information Transmission/Emergency Managers Weather Information Network (HRIT/EMWIN), and Search-and-Rescue Satellite (SARSAT).

Note: For this specification the Level I requirements for the Solar Imaging Suite (SIS) have been decomposed into EUVS XRS Irradiance Sensors (EXIS) and the Solar UltraViolet Imager (SUVI) requirements. The GOES-NOP Low Rate Information Transfer (LRIT) and the Emergency Managers Weather Information Network (EMWIN) services have been combined into a single service for the GOES-R series spacecraft and renamed High Rate Information Transmission/Emergency Managers Weather Information Network (HRIT/EMWIN). The EMWIN/LRIT terminology in older documents and contracts is a valid equivalent to the new service name. (CCR 01423) (CCR 02163)

### MRD24 3.1.2.2 Launch Segment Description

MRD25 The Launch Segment provides those assets and services associated with the launch vehicle (LV) and the payload integration. The launch vehicle element is an evolved expendable launch vehicle (EELV). Included, along with the LV, are all the ground support equipment, property, and facilities to integrate the spacecraft to the LV, verify their integration, conduct pre-launch testing with the ground system, and launch operations.

### MRD26 3.1.2.3 Ground Segment Description

MRD27 The GOES-R Ground Segment (GS) is comprised of four functional architectural categories: Mission Management, Product Generation, Product Distribution, and Enterprise Management. These categories have been defined as a basis for grouping functional elements and are not intended to specify implementation or design. (CCR 01121)

MRD28 The Mission Management (MM) functional grouping includes mission scheduling, satellite (spacecraft and instrument) operations, satellite state-of-health trending, orbital analysis, and ground system operations. The Product Generation (PG) functional grouping includes algorithm support, processing of

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD28 raw science data, processing to Level 1b (including calibration, navigation and registration), generation of the data for rebroadcast and for higher level data creation including operational derived products. The Product Distribution (PD) grouping includes the distribution of Level 1b, Level 2+, and derived products to users. The NOAA interfaces include the interface to the Comprehensive Large Array-data Stewardship System (CLASS) system for storage and retrieval of GOES-R series measurements. (CCR 01121)
- MRD31 **3.1.3 Concept of Operations Summary**
- MRD32 GOES-R satellites will have two operational locations; 75°W and 137°W. Any GOES-R satellite stored on-orbit will be located at 105°W. The location for testing on orbit (check-out) is 90° W. Data from the instruments are packetized in CCSDS data format and transmitted via X-band to Wallops Command and Data Acquisition Station and a Remote Backup facility.
- The Ground Segment will operate from three sites: the NOAA Satellite Operations Facility (NSOF) in Suitland, MD, the Wallops Command and Data Acquisition Station (WCDAS), and Remote Backup facility (RBU) located at a geographically diverse site of Fairmont, WV. This remote site location will have visibility to operational and on-orbit spare satellites. The Enterprise Management (EM) function lies over all ground segment components and locations.
- Full detail of the concept of operations is contained in the GOES-R Series Concept of Operations (CONOPS) [Reference Document 5]. (CCR 01121) (CCR 01625)
- MRD33 **3.2 General Requirements**
- MRD34 **3.2.1 Level I Schedule Requirements**
- MRD35 **3.2.1.1 System Life**
- MRD36 The GOES-R System **shall** provide an individual satellite lifetime of 5 years of storage and 10 years of operations for each satellite in the series. (CCR 01300) (CCR 02731)
- MRD37 **3.2.1.2 System Initial Operating Capability (IOC)**
- MRD38 The constellation will begin with the launch of a satellite(s) from the GOES-R Series into geostationary orbit. An Initial Operating Capability will be achieved when quality Cloud and Water Vapor imagery are available, with either west or east coverage, exclusively from GOES-R Series satellite(s) and associated Ground Segment capabilities.
- MRD39 **3.2.1.3 System Full Operational Capability (FOC)**
- MRD40 Full Operational Capability (FOC) will provide the full coverage of the east and west positions and associated Ground Segment capabilities.
- MRD41 **3.2.2 Constellation Requirements**
- MRD42 There will be multiple satellites in the GOES-R constellation. A satellite consists of a spacecraft to support the instruments, the associated communication systems, and the communications payload services.
- MRD21  
04 The GOES-R System will be verified and validated in accordance with the Program Verification and Validation Plan. (CCR 02115)
- MRD43 **3.2.2.1 Orbits**
- MRD44 The GOES-R System **shall** position satellites at 75 degrees West longitude and 137 degrees West longitude at geosynchronous altitude during nominal operations. (CCR 01626A)



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD20 81 The GOES-R System **shall** operate satellites at 89.5 degrees West longitude at geosynchronous altitude for initial satellite checkout. (CCR 01626A)
- MRD20 82 The GOES-R System **shall** operate satellites at 105 degrees West longitude at geosynchronous altitude for on-orbit storage. (CCR 01626A)
- MRD20 83 The GOES-R System **shall** dispose of satellites in accordance with NASA STD 8719.14, "Process for Limiting Orbital Debris", [Applicable Document 38]. (CCR 01626A)
- MRD45 The GOES-R System **shall** control the satellites to within +/- 0.1 degree in latitude and longitude at the equator for the nominal operational and checkout orbits. (CCR 01626A) (CCR 01720)
- MRD20 84 The GOES-R System **shall** relocate each satellite between the checkout location and the storage location. (CCR 01626A) (CCR 02168)
- MRD20 85 The GOES-R System **shall** relocate each satellite between the storage location and the operational locations. (CCR 01626A) (CCR 02168)
- MRD20 86 The GOES-R System **shall** relocate each satellite between the two nominal operational locations. (CCR 01626A) (CCR 02168)
- MRD21 05 The GOES-R System **shall** operate in the attitude resulting from Yaw Flips during equinox seasons. (CCR 02115) (CCR 02163)
- MRD21 55 The GOES-R Space Segment satellites **shall** transition from storage mode at the storage location to operational mode at either operational location within 21 days. (CCR 02168)

**MRD47 3.2.2.2 Coverage**

MRD48 Satellite coverage zones are defined in the Coverage Zone Definition Table below.

**Coverage Zone Definitions Table**

	<b>Imaging</b>
West	Latitude: From 68° North to 68° South Longitude: From 150° East to 64° West
Central	Latitude: From 68° North to 68° South Longitude: From 178° West to 32° West
Central Subset	Latitude: From 45° North to 45° South Longitude: From 178° West to 32° West
East	Latitude: From 68° North to 68° South Longitude: From 148° West to 2° West

Central (Subset) coverage zone is a subset that can be provided from either the sum of the East or West coverage areas or from single satellite view including all of CONUS. (CCR 02165)

**MRD51 3.2.3 Availability and Reliability**

- MRD21 06 The GOES-R System **shall** have an availability of 0.83 each month for the KPP at each geosynchronous orbital location, over System lifetime. (CCR 02115)
- MRD21 07 The GOES-R System **shall** have a monthly KPP availability of 0.98 over mission lifetime for the CONUS region contained in the overlap of both operational coverage areas. (CCR 02115) (CCR 02166)

**MRD60 3.2.4 Mission Continuity**

- MRD20 95 The GOES-R System **shall** operate continuously using primary and alternate facilities as defined in Federal Continuity Directive 1 (FCD-1), Annex G, Continuity Facilities, [Applicable Document 41]. (CCR 01609)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD63 3.2.5 System Security**

MRD64 The GOES-R System **shall** prevent unauthorized use and access. (CCR 01572A)

**MRD67 3.2.6 System Safety**

MRD68 The GOES-R System **shall** meet the system safety requirements specified in Ground Segment Project, G417-R-GSMAR-0068, Advanced Baseline Imager, 417-R-ABIMAR-0012, Spacecraft, 417-R-SCMAR-0011, and Instrument, 417-R-IMAR-0039, Mission Assurance Requirements Documents [Applicable Documents 33, 36, 34, 35]. (CCR 1571A)

MRD20 91 The GOES-R System **shall** comply with Section 508 of the Rehabilitation Act (29 USC 749d) as amended [Applicable Document 46]. (CCR 01609)

MRD21 08 The GOES-R System **shall** preclude a single credible failure from inducing mission failure. (CCR 02115) (CCR 02163)

MRD41 9 The GOES-R System **shall** perform fault detection and correction. (CCR 02115)

**MRD69 3.2.7 System Standards**

MRD71 The GOES-R System **shall** be compliant with the Consultative Committee for Space Data Systems (CCSDS) recommendations in Applicable Document 47 and 48. (CCR 02163)

MRD72 The International System of Units (SI) **shall** be used in accordance with NPD 8010.2D [Applicable Document 30].

MRD20 92 The GOES-R System **shall** comply with 36 CFR, Parts 1193 - Telecommunications Act Accessibility Guidelines, and 1194 - Electronic and Information Technology Accessibility Standards [Applicable Documents 42 and 43]. (CCR 01609)

MRD20 93 The GOES-R System **shall** maintain a time accuracy of 100 milliseconds with respect to Coordinated Universal Time. (CCR 01609)

MRD20 94 The GOES-R System **shall** comply with the electromagnetic interference (EMI) requirements of FCC rules CFR 47, Part 15, Subpart B, Sections 15.107 and 15.109 for Class A or B conducted and radiated emissions [Applicable Documents 44 and 45]. (CCR 01609)

**MRD73 3.2.8 Risk Classification**

MRD74 The GOES-R mission primary payload risk classification is Class B per NPR 8705.4 [Applicable Document 19]. (CCR 02221)

**MRD20 57 3.2.9 External Interface Requirements (CCR 01580)**

MRD20 55 The GOES-R System **shall** receive data from ADRS as defined in the interface document, "Ground Segment to ADRS IRD", G417-R-IRD-0157 [Applicable Document 31]. (CCR 01591A)

MRD20 61 The GOES-R System **shall** receive signals from SARSAT Distress Beacons as defined in the interface document, "Space Segment to SAR IRD", 417-R-IRD-0006 [Applicable Document 16]. (CCR 01589A)

MRD20 62 The GOES-R System **shall** send SARSAT Distress Beacon signals to SAR Terminals as defined in the interface document, "Space Segment to SAR IRD", 417-R-IRD-0006 [Applicable Document 16]. (CCR 01589A)

MRD20 63 The GOES-R System **shall** provide information, defined in the GOES-R Ground Segment (GS) To GOES-R Access Subsystem (GAS) Interface Requirements Document (IRD) (G417-R-IRD-0196), for use by the NOAA Archival Data Centers. (CCR 01590) (CCR 02970)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD20 64 The GOES-R System **shall** send HRIT/EMWIN data to User Terminals as defined in the interface document, "Space Segment (SS) to High Rate Information Transmission (HRIT) / Emergency Managers Weather Information Network (EMWIN) Interface Requirements Document (IRD)", 417-R-IRD-0168 [Applicable Document 13]. (CCR 01584A)
- MRD20 65 The GOES-R System **shall** receive HRIT/EMWIN data from the NESDIS HRIT/EMWIN system as defined in the interface document, "Ground Segment to High Rate Information Transmission (HRIT) / Emergency Managers Weather Information Network (EMWIN) Interface Requirements Document (IRD)", 417-R-IRD-0095 [Applicable Document 21]. (CCR 01584A)
- MRD20 68 The GOES-R System **shall** receive DCS data from Data Collections Platforms as defined in the interface document, "Space Segment to DCS IRD", 417-R-IRD-0005 [Applicable Document 15]. (CCR 01587)
- MRD20 69 The GOES-R System **shall** send commands to Data Collections Platforms as defined in the interface document, "Space Segment to DCS IRD", 417-R-IRD-0005 [Applicable Document 15]. (CCR 01587)
- MRD20 70 The GOES-R System **shall** send DCS data to DCS Direct Readout Ground Stations as defined in the interface document, "Space Segment to DCS IRD", 417-R-IRD-0005 [Applicable Document 15]. (CCR 01587)
- MRD20 71 The GOES-R System **shall** receive commands from the DCS ground system as defined in the interface document, "Ground Segment to DCS IRD", G417-R-IRD-0094 [Applicable Document 24]. (CCR 01587)
- MRD20 72 The GOES-R System **shall** send DCS data to the DCS ground system as defined in the interface document, "Ground Segment to DCS IRD", G417-R-IRD-0094 [Applicable Document 24]. (CCR 01587)
- MRD20 73 The GOES-R System **shall** send products to the National Weather Service AWIPS as defined in the interface document, "Ground Segment to AWIPS IRD", P417-R-IRD-0160 [Applicable Document 25]. (CCR 01594)
- MRD20 77 The GOES-R System **shall** send GRB data to GRB Terminals as defined in the interface document, "Space Segment to GRB IRD", 417-R-IRD-0002 [Applicable Document 12]. (CCR 01581)
- MRD20 87 The GOES-R System **shall** send L1b data, L2+ data, and associated metadata to the GOES-R data portal (aka GAS) users as defined in the "GOES-R Series, GOES-R Access Subsystem (GAS)-to-User Interface Description Document" P417-R-IDD-0226, [Applicable Document 39]. (CCR 01627A)

**MRD75 3.3 Product Requirements****MRD76 3.3.1 Product Primary Instrument Sources and Prioritization**

MRD77 The GOES-R Program Plan divided the remote sensing needs of NOAA into the following categories: atmospheric, land, ocean, and space and solar. The observational requirements that are met by this MRD are derived from those in the GOES-R Program Plan. The atmospheric category contains observational requirements for atmospheric observations relating to short-term weather forecasting and weather prediction. The land category contains observational requirements for the land surface focusing on shorter term variations in these quantities than polar observations. The ocean category contains observational requirements for measurements of ocean, large lake, and ice properties relevant to the environment and transportation. The space and solar category (or space weather) contains observational requirements for measurements and forecasts of the space environment as well as for solar activity.

MRD78 The GOES-R series satellite observational requirements are prioritized as follows:

- a) Product Set 1: Includes Key Performance Parameters (KPPs), where inability to meet threshold level requirements is cause for system reevaluation or termination, and other high priority and related legacy products
- b) Product Set 2: Includes next highest priority legacy and related products

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD78 c) Product Set 3: Includes next highest priority and related products  
 d) Product Set 4: Includes remaining products

(CCR 01212) (CCR 02183(RDW))

MRD79 **3.3.1.1 Atmosphere Products Primary Instrument Sources/Prioritization**

- MRD80 The GOES-R Program Plan Atmosphere Products primary instrument sources and priorities are repeated here for reference.

<b>AEROSOLS</b>	<b>Primary Instrument Source</b>	<b>Product Set</b>
Aerosol Particle Size	ABI	3
Aerosol Detection: CONUS (including Smoke and Dust)	ABI	1
Aerosol Detection: Hemispheric (including Smoke and Dust)	ABI	1
Aerosol Detection: Mesoscale (including Smoke and Dust)	ABI	1
Aerosol Optical Depth: CONUS	ABI	1
Aerosol Optical Depth: Hemispheric	ABI	1
Volcanic Ash: Detection and Height	ABI and NWP	2

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD80

<b>CLOUDS</b>	<b>Primary Instrument Source</b>	<b>Product Set</b>
Aircraft Icing Threat	ABI	4
Cloud Imagery: Coastal	ABI	3
Cloud and Moisture Imagery: CONUS	ABI	1
Cloud and Moisture Imagery: Hemispheric	ABI	1
Cloud and Moisture Imagery: Mesoscale	ABI	1
Cloud Ice Water Path: CONUS	ABI	3
Cloud Ice Water Path: Hemispheric	ABI	3
Cloud Ice Water Path: Mesoscale	ABI	3
Cloud Layers/ Heights: CONUS	ABI	3
Cloud Layers/ Heights: Hemispheric	ABI	3
Cloud Layers/ Heights: Mesoscale	ABI	3
Cloud Liquid Water: CONUS	ABI	3
Cloud Liquid Water: Hemispheric	ABI	3
Cloud Liquid Water: Mesoscale	ABI	3
Cloud Optical Depth: CONUS	ABI	1
Cloud Optical Depth: Hemispheric	ABI	1
Cloud Particle Size Distribution: CONUS	ABI	1
Cloud Particle Size Distribution: Hemispheric	ABI	1
Cloud Particle Size Distribution: Mesoscale	ABI	1
Cloud Top Phase: CONUS	ABI	1
Cloud Top Phase: Hemispheric	ABI	1
Cloud Top Phase: Mesoscale	ABI	1
Cloud Top Height: CONUS	ABI	1
Cloud Top Height: Hemispheric	ABI	1
Cloud Top Height: Mesoscale	ABI	1

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD80

<b>CLOUDS (continued)</b>	<b>Primary Instrument Source</b>	<b>Product Set</b>
Cloud Top Pressure: CONUS	ABI and NWP	1
Cloud Top Pressure: Hemispheric	ABI and NWP	1
Cloud Top Temperature: Hemispheric	ABI and NWP	1
Cloud Top Temperature: Mesoscale	ABI and NWP	1
Cloud Type: CONUS	ABI	3
Cloud Type: Hemispheric	ABI	3
Cloud Type: Mesoscale	ABI	3
Convective Initiation: CONUS	ABI and NWP	3
Convective Initiation: Mesoscale	ABI and NWP	3
Enhanced "V"/Overshooting Top Detection: CONUS	ABI	4
Enhanced "V"/Overshooting Top Detection: Mesoscale	ABI	4
Hurricane Intensity	ABI	2
Lightning Detection: Hemispheric	GLM	2
Low Cloud and Fog	ABI	3
Tropopause Folding Turbulence Prediction: Hemispheric	ABI and NWP	3
Tropopause Folding Turbulence Prediction: Mesoscale	ABI and NWP	3
Visibility: Hemispheric	ABI	4

<b>PRECIPITATION</b>	<b>Primary Instrument Source</b>	<b>Product Set</b>
Probability of Rainfall	ABI	4
Rainfall Potential	ABI	4
Rainfall Rate/QPE	ABI	2

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD80

<b>PROFILES, INDICES, TOTAL WATER</b>	<b>Primary Instrument Source</b>	<b>Product Set</b>
Legacy Vertical Moisture Profile: CONUS	ABI and NWP	1
Legacy Vertical Moisture Profile: Hemispheric	ABI and NWP	1
Legacy Vertical Moisture Profile: Mesoscale	ABI and NWP	1
Legacy Vertical Temperature Profile: CONUS	ABI and NWP	1
Legacy Vertical Temperature Profile: Hemispheric	ABI and NWP	1
Legacy Vertical Temperature Profile: Mesoscale	ABI and NWP	1
Derived Stability Indices: CONUS	ABI and NWP	2
Derived Stability Indices: Hemispheric	ABI and NWP	2
Derived Stability Indices: Mesoscale	ABI and NWP	2
Total Precipitable Water: CONUS	ABI	1
Total Precipitable Water: Hemispheric	ABI	1
Total Precipitable Water: Mesoscale	ABI	1

<b>RADIANCES</b>	<b>Primary Instrument Source</b>	<b>Product Set</b>
Clear Sky Masks: CONUS	ABI	1
Clear Sky Masks: Hemispheric	ABI	1
Clear Sky Masks: Mesoscale	ABI	1
Radiances: CONUS	ABI	1
Radiances: Hemispheric	ABI	1
Radiances: Mesoscale	ABI	1

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD80

<b>RADIATION</b>	<b>Primary Instrument Source</b>	<b>Product Set</b>
Absorbed Shortwave Radiation: Surface/ Mesoscale	ABI makes proxy	3
Downward Longwave Radiation: Surface/CONUS	ABI and NWP	3
Downward Longwave Radiation: Surface/Hemispheric	ABI and NWP	3
Downward Shortwave Radiation: Surface/CONUS	ABI	2
Downward Shortwave Radiation: Surface/Hemispheric	ABI	2
Downward Shortwave Radiation: Surface/Mesoscale	ABI	2
Reflected Shortwave Radiation: TOA/CONUS	ABI and NWP	2
Reflected Shortwave Radiation: TOA/Hemispheric	ABI and NWP	2
Upward Longwave Radiation: Surface/CONUS	ABI	3
Upward Longwave Radiation: Surface/Hemispheric	ABI	3
Upward Longwave Radiation: TOA/CONUS	ABI	3
Upward Longwave Radiation: TOA/Hemispheric	ABI	3

<b>TRACE GASES</b>	<b>Primary Instrument Source</b>	<b>Product Set</b>
Ozone Total: CONUS	ABI	3
Ozone Total: Hemispheric	ABI	3
SO <sub>2</sub> Detection	ABI	3

<b>WINDS</b>	<b>Primary Instrument Source</b>	<b>Product Set</b>
Derived Motion Winds: CONUS	ABI	2
Derived Motion Winds: Hemispheric	ABI	2
Derived Motion Winds: Mesoscale	ABI	2

*(CCR 01212) (CCR 01543)***MRD81 3.3.1.2 Land Products Primary Instrument Sources/Prioritization**

MRD82 The GOES-R Program Plan Land Products primary instrument sources and priorities are repeated here for reference.



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD82

<b>LAND</b>	<b>Primary Instrument Source</b>	<b>Prioritization Tier</b>
Fire/Hot Spot Characterization: CONUS	ABI	2
Fire/Hot Spot Characterization: Hemispheric	ABI	2
Flood/Standing Water: Hemispheric	ABI	4
Flood/Standing Water: Mesoscale	ABI	4
Ice Cover: Hemispheric	ABI	4
Land Surface (Skin) Temperature: CONUS	ABI and NWP	2
Land Surface (Skin) Temperature: Hemispheric	ABI and NWP	2
Land Surface (Skin) Temperature: Mesoscale	ABI and NWP	2
Snow Cover: CONUS	ABI	2
Snow Cover: Hemispheric	ABI	2
Snow Cover: Mesoscale	ABI	2
Snow Depth (over Plains): CONUS	ABI	4
Snow Depth (over Plains): Hemispheric	ABI	4
Snow Depth (over Plains): Mesoscale	ABI	4
Surface Albedo: Hemispheric	ABI	3
Surface Emissivity	ABI and NWP	3
Vegetation Fraction: Green: CONUS	ABI	4
Vegetation Fraction: Green: Hemispheric	ABI	4
Vegetation Index: CONUS	ABI	4
Vegetation Index: Hemispheric	ABI	4

*(CCR 01212) (CCR 01543) (CCR 01867A)***MRD83 3.3.1.3 Ocean Products Primary Instrument Sources/Prioritization**

MRD84 The GOES-R Program Plan Ocean Products primary instrument sources and priorities are repeated here for reference.

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD84

<b>OCEAN</b>	<b>Primary Instrument Source</b>	<b>Prioritization Tier</b>
Currents: Hemispheric	ABI	4
Currents: Mesoscale	ABI	4
Currents: Offshore/CONUS	ABI	4
Currents: Offshore/Hemispheric	ABI	4
Sea and Lake Ice: Age/Hemispheric	ABI	4
Sea and Lake Ice: Concentration/CONUS	ABI	4
Sea and Lake Ice: Concentration:/Hemispheric	ABI	4
Sea and Lake Ice: Motion/CONUS	ABI	4
Sea and Lake Ice: Motion/Hemispheric	ABI	4
Sea Surface Temperature: CONUS/Offshore	ABI	2
Sea Surface Temperature (skin): Hemispheric	ABI	2

*(CCR 01212) (CCR 01543)***MRD85 3.3.1.4 Space Weather (Space and Solar) Products Primary Instrument Sources/Prioritization**

MRD86 The GOES-R Program Plan Space Weather Products primary instrument sources and priorities are repeated here for reference.

<b>ENERGETIC PARTICLES</b>	<b>Primary Instrument Source</b>	<b>Prioritization Tier</b>
Energetic Heavy Ions	SEISS: EHIS	2
Magnetospheric Electrons and Protons: Low Energy	SEISS: MPS - Lo	2
Magnetospheric Electrons and Protons: Medium and High Energy	SEISS: MPS - Hi	2
Solar and Galactic Protons	SEISS: SGPS	2

<b>MAGNETIC FIELD</b>	<b>Primary Instrument Source</b>	<b>Prioritization Tier</b>
Geomagnetic Field	Magnetometer	2

<b>SOLAR</b>	<b>Primary Instrument Source</b>	<b>Prioritization Tier</b>
Solar Flux: EUV	EXIS: EUVS	2
Solar Flux: X-ray	EXIS: XRS	2
Solar Imagery: X-Ray	SUVI	2

*(CCR 01212) (CCR 01731)***MRD21 3.3.1.5 Product System Requirements (CCR 02115)**

09

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD21 The GOES-R System **shall** calibrate raw instrument samples to maintain product requirements. (CCR  
10 02115) (CCR 02163) (CCR 02166)

MRD21 The GOES-R System **shall** collect data during System operation for instrument calibration purposes.  
11 (CCR 02115)

MRD21 The GOES-R System **shall** time tag product observations. (CCR 02115)  
12

MRD21 The GOES-R System **shall** have a commandable acquisition pattern for imagery products. (CCR 02115)  
13

MRD21 The GOES-R System **shall** use standard data products coordinate systems and formats to allow for  
14 integration with other appropriate NOAA data sources. (CCR 02115) (CCR 02163) (CCR 02166)

**MRD87 3.3.2 Product Parameter Definitions****MRD88 3.3.2.1 Product Geographic Coverage/Conditions**

MRD89 Product geographic coverage is defined as the size of the area that must be observed in the revisit time  
in order to complete the product; in the case of CONUS, it also specifies a particular area as well as  
location.

The GOES-R products are calculated for the coverage areas of the Level 1b data provided by the  
instrument subject to the qualifiers listed in each product table.

**MRD90 3.3.2.2 Product Orthogonality/Coverage**

MRD91 Product Orthogonality/Coverage is defined for the Space and Solar Products only and is nominally the  
equivalent of the Product Geographic Coverage.

**MRD92 3.3.2.3 Product Vertical Resolution**

MRD93 Product vertical resolution is defined as layering averaging of the resultant samples corresponding to  
different heights in the atmosphere; where only one vertical sample is collected, no layer averaging is  
needed.

The GOES-R System will produce the required vertical layering of the GOES-R products employing  
external data sources if needed.

Discussion: For typical imaging products, the vertical layering is typically over the total column.

**MRD94 3.3.2.4 Product Horizontal Resolution**

MRD95 Product horizontal resolution is defined as the finest horizontal spatial element of the product measured  
at nadir.

The GOES-R System will not spatially degrade the product horizontal resolution beyond that of the  
Level 1b data of the earth-looking instruments when making Level 2+ products, except in the generation  
of GOES-R products with coarser horizontal resolution. (CCR 01186)

**MRD96 3.3.2.5 Product Horizontal/Angular Resolution**

MRD97 Product Horizontal/Angular Resolution is defined for the Space and Solar Products only and is  
nominally the equivalent of the Product Horizontal Resolution.

**MRD98 3.3.2.6 Product Mapping Accuracy (Product Geolocation)**

## **ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD99 Product geolocation or more generally product mapping accuracy is defined as the accuracy of the registration of the collected data to the appropriate earth or other reference frame.

The GOES-R System will geolocate the GOES-R series Level 1b data (which meets instrument image navigation and registration requirement for earth-looking instruments) to comply with the product mapping accuracy requirements.

Note: The product mapping accuracy requirements for Atmospheric, Land and Ocean products in sections 3.3.3, 3.3.4 and 3.3.5 are only applicable while the satellites are in their nominal operational orbit locations. The nominal orbit locations are defined as a box of +/- 0.1 degree about the operational longitude. (*CCR 01721A*)

### MRD10 **3.3.2.7 Product Pointing/Mapping Accuracy** 0

MRD10 Product Pointing/Mapping Accuracy is defined for the Space and Solar Products only and is the  
1 equivalent of the Product Mapping Accuracy.

### MRD10 **3.3.2.8 Product Pointing Knowledge/Mapping Uncertainty** 2

MRD10 Product Pointing Knowledge/Mapping Uncertainty is defined for the Space and Solar Products only as  
3 the knowledge of the line of sight of the space and solar instruments.

### MRD10 **3.3.2.9 Product Measurement Range** 4

MRD10 Product Measurement Range is defined as the range from the minimum to the maximum values over  
5 which the product will be measured.

### MRD10 **3.3.2.10 Product Measurement Accuracy** 6

MRD10 Product Measurement Accuracy is defined for non-categorical products as the systematic difference or  
7 bias between the derived parameter and ground truth. It is determined by computing the absolute value of the average of differences between the derived parameter and ground truth over a statistically significant population of data such that the magnitude of the random error is negligible relative to the magnitude of the systematic error.

Product Measurement Accuracy is defined for categorical products in terms of the percentage of correct classification over a statistically significant population of data.  
(*CCR 01422A*)

### MRD10 **3.3.2.11 Product Refresh Rate/Coverage Time** 8

MRD10 Product Refresh Rate/Coverage Time is defined as the time between the completion of the nth update of  
9 the product and the completion of the (n+1)th update of the same product.

The mission product will be refreshed by the GOES-R system, while meeting the mission product data latency, when new data from the product coverage region is available, with the following three exceptions:

- a) Products that may be made at a NESDIS Infrastructure Interface site
- b) Products from the land group
- c) Products of the ocean subgroupings of currents and sea and lake ice

Discussion: The GOES-R baseline product tables list refresh times for products. However, ABI data may be produced more frequently than the listed times, particularly due to the different scan modes of

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD10 9 ABI. Products that rely on surface observations with product refreshes that are long compared to the instrument image refresh times benefit from observations with no obscurations caused by clouds, although the full system impacts would have to be assessed.
- For exceptions b) and c) above (which refresh at the product refresh values), the intervening observations available since the most recent product generation will be used to generate a composite of cloud-free pixels for the generation of that product, with pixels that are cloudy throughout the observation period employing the most recent cloudy pixel value for the product and pixels that are clear supplying the most recent clear pixel value for the product.
- MRD11 0 **3.3.2.12 Mission Product Data Latency**
- MRD11 1 Mission Product Data Latency is product dependent and is defined as the time from the collection of the last photons through the time that the data is converted to a specified GOES-R product (often beyond the level 1b) and delivered to the user portal.
- MRD11 2 **3.3.2.13 Long-Term Stability**
- MRD11 3 Product Long Term Stability is defined as the deviation in accuracy over a period of time, typically the lifetime of the mission, unless otherwise specified in the product long term stability values.
- MRD11 4 **3.3.2.14 Product Measurement Precision**
- MRD11 5 Product measurement precision for non-categorical products is the one-sigma standard deviation of the differences between the derived parameters and ground truth over the same population of data used to compute the product measurement accuracy. For products that are classified into three or more categories, the precision is defined as the standard deviation of the misclassification error (number of bins away from the correct bin) over a statistically significant population of data. For products that are classified into two categories, the precision measure is not applicable.  
(CCR 01422A)
- MRD11 6 **3.3.2.15 Temporal Coverage Qualifier**
- MRD11 7 The Temporal Coverage Qualifier provides product-specific limitations to the solar zenith angle coverage of the products. When the term Day is used in the temporal qualifier, Day is defined as solar zenith angles less than or equal to 96 degrees. When the term Night is used in the temporal qualifier, Night is defined as solar zenith angles greater than 96 degrees and includes the period of twilight.
- MRD11 8 **3.3.2.16 Product Extent Qualifier**
- MRD11 9 The Product Extent Qualifier provides product specific limitations to the solar zenith angle coverage of the products over which a product can be computed. The use of the term quantitative in any of the product extent qualifiers defines the generation of the product while meeting the threshold product measurement accuracy performance in that region, whereas the use of qualitative in any of the product extent qualifiers defines the generation of the product without meeting the threshold product measurement accuracy performance requirements. For CONUS (3000 km x 5000 km) products and mesoscale (1000 km x 1000 km) products, the product will be computed within the CONUS-sized measurement area and the mesoscale-sized measurement area that falls within the product qualifier limitations.
- MRD12 0 **3.3.2.17 Cloud Cover Conditions Qualifier**
- MRD12 1 The Cloud Cover Conditions Qualifier provides product specific limitations to the cloud cover associated with the threshold accuracy.

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD12 3.3.2.18 Product Statistics Qualifier**  
2

MRD12 The Product Statistics Qualifier provides product specific limitations, where applicable, to the product  
3 generation scene statistics under which the product measurement accuracies apply.

**MRD20 3.3.2.19 Product Parameter Verification Criteria (CCR 01764)**  
99

MRD21 The product parameter requirements in section 3.3 of the MRD **will** be verified based via the following  
00 classes of criteria: Not To Exceed (NTE), No Less Than (NLT), No Less than Input Zones (NLTIZ), 1-sigma and 3-sigma (distribution statistics, at less than  $|\mu+3\sigma|$  or  $|\mu+\sigma|$ ).

Product Mapping Accuracy:  $3\sigma$

Product Refresh Rate/Coverage Time: NTE

Mission Product Data Latency: NTE

Product Orthogonality/Coverage (Space and Solar Products): NLTIZ

Product Horizontal/Angular Resolution (Space and Solar Products): NLT

Product Pointing/Mapping Accuracy (Space and Solar Products):  $3\sigma$

Product Pointing Knowledge/Mapping Uncertainty (Space and Solar Products):  $3\sigma$

Long-Term Stability (Some Space and Solar Products): NTE

For all other product parameters, see the qualifiers and evaluation criteria defined in each individual product.

The product parameter requirements in section 3.3 of the MRD **will** reflect performance thresholds under nominal operational conditions, unless otherwise specified.

The geometric product parameter requirements in section 3.3 of the MRD **will** reflect performance thresholds, at Nadir, under nominal operational conditions, unless otherwise specified. (CCR 01764)

**MRD12 3.3.3 Atmospheric Products Tables (GOES-R Baseline)**  
4**MRD12 3.3.3.1 Aerosols**  
5**MRD12 3.3.3.1.1 Aerosol Detection: CONUS (including Smoke and Dust)**  
6

MRD12 The GOES-R System **shall** produce an Aerosol Detection: CONUS (including Smoke and Dust)  
7 product in accordance with the requirements and qualifiers provided in the product table below.

Aerosol Detection (including Smoke and Dust) is a summary map that indicates the extent of smoke/aerosol coverage and a measure of smoke albedo indicates relative intensity. The detection is above a nominal level that can vary depending on conditions. For reference this product is used for verifying operational smoke forecasts and documenting trends in biomass burning and urban aerosols and to estimate the impact of biomass burning on human health, ecology, and climate.

(CCR 01211) (CCR 01543) (CCR 01482) (CCR 01542) (CCR 01631)

MRD82 Product Geographic Coverage/Conditions: CONUS  
3

MRD82 Product Vertical Resolution: Total column  
4

MRD82 Product Horizontal Resolution: 2 km  
6

MRD82 Product Mapping Accuracy: 1 km  
7

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD82 Product Measurement Range: Binary yes/no detection above threshold 0.2  
8 for aerosol optical thickness
- MRD82 Product Measurement Accuracy: Dust: 80% correct detection over land and ocean Smoke: 80% correct  
9 detection over land; 70% correct detection over ocean (CCR 02602 (RDW)) (CCR 02837 (RDW))
- MRD83 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
0 (CCR 01899) (CCR 2183(RDW))
- MRD83 Mission Product Data Latency: 15 min  
1
- MRD83 Product Measurement Precision: N/A  
2
- MRD83 Temporal Coverage Qualifier: Day  
3 Product Extent Qualifier: Quantitative out to at least 60 degrees LZA (Threshold) and Qualitative at  
Larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with Threshold Accuracy  
Product Statistics Qualifier: Over specified geographic coverage
- MRD12 **3.3.3.1.2 Aerosol Detection: Hemispheric (including Smoke and Dust)**  
8
- MRD12 The GOES-R System **shall** produce an Aerosol Detection: Hemispheric (including Smoke and Dust)  
9 product in accordance with the requirements and qualifiers provided in the product table below.
- Aerosol Detection (including Smoke and Dust) is a summary map that indicates the extent of  
smoke/aerosol coverage and a measure of smoke albedo indicates relative intensity. The detection is  
above a nominal level that can vary depending on conditions. For reference this product is used for  
verifying operational smoke forecasts and documenting trends in biomass burning and urban aerosols  
and to estimate the impact of biomass burning on human health, ecology, and climate (same as CONUS  
product except this version provides larger coverage).
- (CCR 01213) (CCR 01211) (CCR 01543) (CCR 01482) (CCR 01542) (CCR 01631)
- MRD83 Product Geographic Coverage/Conditions: Full Disk  
4
- MRD83 Product Vertical Resolution: Total column  
5
- MRD83 Product Horizontal Resolution: 2 km  
6
- MRD83 Product Mapping Accuracy: 1 km  
7
- MRD83 Product Measurement Range: Binary yes/no detection above threshold 0.2  
8 for aerosol optical thickness
- MRD83 Product Measurement Accuracy: Dust: 80% correct detection over land and ocean Smoke: 80% correct  
9 detection over land; 70% correct detection over ocean (CCR 02602 (RDW)) (CCR 02837 (RDW))
- MRD84 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
0 (CCR 01899) (CCR 02183 (RDW))
- MRD84 Mission Product Data Latency: 3 min (CCR 01899) (CCR 02183 (RDW))  
1

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD84 Product Measurement Precision: N/A  
2

MRD84 Temporal Coverage Qualifier: Day  
3 Product Extent Qualifier: Quantitative out to at least 60 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD13 **3.3.3.1.3 Aerosol Detection: Mesoscale (including Smoke and Dust)**  
0

MRD13 The GOES-R System **shall** produce an Aerosol Detection: Mesoscale (including Smoke and Dust)  
1 product in accordance with the requirements and qualifiers provided in the product table below.

Aerosol Detection (including Smoke and Dust) is a summary map that indicates the extent of smoke/aerosol coverage and a measure of smoke albedo indicates relative intensity. The detection is above a nominal level that can vary depending on conditions. For reference this product is used for verifying operational smoke forecasts and documenting trends in biomass burning and urban aerosols and to estimate the impact of biomass burning on human health, ecology, and climate (same as CONUS product except this version provides mesoscale coverage).

*(CCR 01211) (CCR 01543) (CCR 01482) (CCR 01542) (CCR 01631)*

MRD84 Product Geographic Coverage/Conditions: Mesoscale  
4

MRD84 Product Vertical Resolution: Total column  
5

MRD84 Product Horizontal Resolution: 2 km  
6

MRD84 Product Mapping Accuracy: 1 km  
7

MRD84 Product Measurement Range: Binary yes/no detection above threshold 0.2  
8 for aerosol optical thickness

MRD85 Product Measurement Accuracy: Dust: 80% correct detection over land and ocean Smoke: 80% correct  
1 detection over land; 70% correct detection over ocean *(CCR 02602 (RDW)) (CCR 02837 (RDW))*

MRD85 Product Refresh Rate/Coverage Time: 15 min  
2

MRD85 Mission Product Data Latency: 15 min  
3

MRD85 Product Measurement Precision: N/A  
4

MRD85 Temporal Coverage Qualifier: Day  
5 Product Extent Qualifier: Quantitative out to at least 60 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD13 **3.3.3.1.4 Aerosol Particle Size**  
2



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD13 The GOES-R System **shall** produce an Aerosol Particle Size product in accordance with the  
3 requirements and qualifiers provided in the product table below.

The Aerosol Particle Size provides a measure of the bimodal size distribution of the aerosol population in terms of the effective radius  $r_e$  and effective variance  $v_e$  of each mode. The effective radius is the ratio of the third moment of the aerosol size distribution to the second moment. The effective variance characterizes the width of the size distribution. The aerosol particle size is determined in regions where aerosols have been detected above a nominal level that can vary depending on conditions.

(CCR 00317) (CCR 01542) (CCR 01610) (CCR 01631) (CCR 02163) (CCR 02183 (RDW))

MRD85 Product Geographic Coverage/Conditions: Full Disk (CCR 02183 (RDW))  
6

MRD85 Product Vertical Resolution: Total column (CCR 02183 (RDW))  
7

MRD85 Product Horizontal Resolution: 2 km (CCR 02183 (RDW))  
8

MRD85 Product Mapping Accuracy: 1 km (CCR 02183 (RDW))  
9

MRD86 Product Measurement Range: Fine/Coarse Angstrom exponent range -1 to +3 (range) (CCR 02183  
0 (RDW))

MRD86 Product Measurement Accuracy: Fine/Coarse Angstrom exponent 0.3 over ocean and land (CCR 02183  
1 (RDW))

MRD86 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
2 (CCR 01899) (CCR 02183 (RDW))

MRD86 Mission Product Data Latency: 5 min (CCR 02183 (RDW))  
3

MRD86 Product Measurement Precision: 0.15 (CCR 01977) (CCR 02183 (RDW))  
4

MRD86 Temporal Coverage Qualifier: Day  
5 Product Extent Qualifier: Quantitative out to at least 60 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage (CCR 02183(RDW))

MRD13 **3.3.3.1.5 Aerosol Optical Depth: CONUS (CCR 01543)**  
8

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

MRD13 9 The GOES-R System **shall** produce an Aerosol Optical Depth: CONUS product in accordance with the requirements and qualifiers provided in the product table below.

Aerosol Depth is a measure of the fine solids suspended in the air including dust, sand, volcanic ash, smoke, and urban/industrial aerosols. Aerosol Optical Depth characterization will consist of elements of aerosol optical depth and fine particulate matter. The fine particulate matter will be derived from the aerosol optical dept translated to mass concentration in the observed vertical path (microgram per cubic meter), where translation to concentration depends on particle type and vertical location of the aerosols and determined in regions where aerosols have been detected above a nominal level that can vary depending on conditions.

*(CCR 01213) (CCR 01211) (CCR 01543) (CCR 01482) (CCR01542) (CCR 01619) (CCR 01631)*

MRD86 6 Product Geographic Coverage/Conditions: CONUS

MRD86 7 Product Vertical Resolution: Total column

MRD86 8 Product Horizontal Resolution: 2 km

MRD86 9 Product Mapping Accuracy: 1 km

MRD87 0 Product Measurement Range: -1 - 5 in optical depth

MRD87 1 Product Measurement Accuracy: Based on Aerosol Optical Depth ranges: Over land: < 0.04: 0.06 0.04 - 0.80: 0.04 > 0.80: 0.12 Over water: < 0.40: 0.02 > 0.40: 0.10

MRD87 2 Product Refresh Rate/Coverage Time: 5 min

MRD87 3 Mission Product Data Latency: 1 min *(CCR 01899) (CCR 02183 (RDW))*

MRD87 4 Product Measurement Precision: Based on Aerosol Optical Depth ranges: Over land: < 0.04: 0.13 0.04 - 0.80: 0.25 > 0.80: 0.35 Over water: < 0.40: 0.15 > 0.40: 0.23

MRD87 5 Temporal Coverage Qualifier: Daytime at a minimum  
Product Extent Qualifier: Quantitative out to at least 60 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD14 0 **3.3.3.1.6 Aerosol Optical Depth: Hemispheric (CCR 01543)**

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

MRD14 1 The GOES-R System **shall** produce a Aerosol Optical Depth: Hemispheric product in accordance with the requirements and qualifiers provided in the product table below.

Aerosol Optical Depth is a measure of the fine solids suspended in the air including dust, sand, volcanic ash, smoke, and urban/industrial aerosols. Aerosol Optical Depth characterization will consist of elements of aerosol optical depth and fine particulate matter. The fine particulate matter will be derived from the aerosol optical depth translated to mass concentration in the observed vertical path (microgram per cubic meter), where translation to concentration depends of particle type and vertical location of the aerosols and determined in regions where aerosols have been detected above a nominal level that can vary depending on conditions (same as CONUS product except this version provides larger coverage).

(CCR 01213) (CCR 01211) (CCR 01543) (CCR 1482) (CCR 01542) (CCR 01619) (CCR 01631)

MRD87 6 Product Geographic Coverage/Conditions: Full Disk

MRD87 7 Product Vertical Resolution: Total column

MRD87 8 Product Horizontal Resolution: 2 km

MRD87 9 Product Mapping Accuracy: 1 km

MRD88 0 Product Measurement Range: -1 - 5 in optical depth

MRD88 1 Product Measurement Accuracy: Based on Aerosol Optical Depth ranges: Over land: < 0.04: 0.06 0.04 - 0.80: 0.04 > 0.80: 0.12 Over water: < 0.40: 0.02 > 0.40: 0.10

MRD88 2 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available) (CCR 01899) (CCR 02183 (RDW))

MRD88 3 Mission Product Data Latency: 3 min (CCR 01899) (CCR 02183 (RDW))

MRD88 4 Product Measurement Precision: Based on Aerosol Optical Depth ranges: Over land: < 0.04: 0.13 0.04 - 0.80: 0.25 > 0.80: 0.35 Over water: < 0.40: 0.15 > 0.40: 0.23

MRD88 5 Temporal Coverage Qualifier: Daytime at a minimum  
Product Extent Qualifier: Quantitative out to at least 60 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD14 2 **3.3.3.1.7 Volcanic Ash: Detection and Height**

MRD14 3 The GOES-R System **shall** produce a Volcanic Ash: Detection and Height product in accordance with the requirements and qualifiers provided in the product table below.

Volcanic ash detection and height maps the location and concentration of volcanic ash after an eruption and dispersion by the wind. The top height of the ash is detected at a minimum in regions where aerosols have been detected above a nominal level that can vary depending on conditions.

(CCR 01213) (CCR 01214) (CCR 01211) (CCR 01438) (CCR 01542) (CCR 01631)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD88 Product Geographic Coverage/Conditions: Full Disk  
6
- MRD88 Product Vertical Resolution: 3 km (top height)  
7
- MRD88 Product Horizontal Resolution: 2 km  
8
- MRD88 Product Mapping Accuracy: 1 km  
9
- MRD89 Product Measurement Range: 0-50 tons/km<sup>2</sup>  
0
- MRD89 Product Measurement Accuracy: 2 ton/km<sup>2</sup>  
1
- MRD89 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
2 (CCR 01899)(CCR 02183 (RDW))
- MRD89 Mission Product Data Latency: 1 min (CCR 01728) (CCR 01899) (CCR 02183 (RDW))  
3
- MRD89 Product Measurement Precision: 2.5 tons/km<sup>2</sup> (CCR 01728)  
4
- MRD89 Temporal Coverage Qualifier: Day and night  
5  
Product Extent Qualifier: Quantitative out to at least 60 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy  
Product Statistics Qualifier: Over volcanic ash cases
- MRD14 **3.3.3.2 Clouds**  
4
- MRD14 **3.3.3.2.1 Aircraft Icing Threat**  
5
- MRD14 The GOES-R System **shall** produce an Aircraft Icing Threat product in accordance with the requirements and qualifiers provided in the product table below.  
6
- Aircraft icing threat product maps the location of supercooled water clouds, which can lead to in-flight aircraft icing, and the severity of icing based on the highest cloud layer, which is the layer observed. The cloud top height is provided in regions where icing is likely.
- (CCR 01211) (CCR 01543) (CCR 01438) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))
- MRD89 Product Geographic Coverage/Conditions: Full Disk (CCR 02183 (RDW))  
6
- MRD89 Product Vertical Resolution: Cloud Top (CCR 02183 (RDW))  
7
- MRD89 Product Horizontal Resolution: 2 km (CCR 02183 (RDW))  
8
- MRD89 Product Mapping Accuracy: 5 km (CCR 02183 (RDW))  
9

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD90 Product Measurement Range: Day: Unknown, None, Light, Moderate or Greater (MOG); Night:  
0 Unknown, None, Possible Icing (*CCR 02183 (RDW)*)
- MRD90 Product Measurement Accuracy: 50% correct classification (*CCR 02183 (RDW)*)  
1
- MRD90 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
2 (*CCR 01899*) (*CCR 02183 (RDW)*)
- MRD90 Mission Product Data Latency: 15 min (*CCR 02183 (RDW)*)  
3
- MRD90 Product Measurement Precision: 1 category (*CCR 02183 (RDW)*)  
4
- MRD90 Temporal Coverage Qualifier: Day and night  
5 Product Extent Qualifier: Quantitative out to at least 60 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(*CCR 02183 (RDW)*)
- MRD14 **3.3.3.2.2 Cloud Ice Water Path: CONUS**  
7
- MRD14 The GOES-R System **shall** produce a Cloud Ice Water Path: CONUS product in accordance with the  
8 requirements and qualifiers provided in the product table below.
- Cloud Ice Water Path reports the total equivalent water content of ice particles integrated in a vertical column through the atmosphere. The measured information is dependent on the number of particles, their sizes, and their densities.
- (*CCR 01211*) (*CCR 01543*) (*CCR 01466*) (*CCR 01542*) (*CCR 01631*) (*CCR 02183 (RDW)*)
- MRD90 Product Geographic Coverage/Conditions: CONUS/for limited cloudiness (*CCR 02183 (RDW)*)  
6
- MRD90 Product Vertical Resolution: SFC - 20 km (*CCR 02183 (RDW)*)  
7
- MRD90 Product Horizontal Resolution: 2 km (*CCR 02183 (RDW)*)  
8
- MRD90 Product Mapping Accuracy: 1 km (*CCR 02183 (RDW)*)  
9
- MRD91 Product Measurement Range: 25 - 1500 g/m<sup>2</sup> (Day), and 25 - 175 g/m<sup>2</sup> (Night) (*CCR 01892*) (*CCR*  
0 *02183 (RDW)*)
- MRD91 Product Measurement Accuracy: 40% (Day), and Greater of 25g/m<sup>2</sup> or 30% (Night) (*CCR 01892*)(*CCR*  
1 *02183 (RDW)*)
- MRD91 Product Refresh Rate/Coverage Time: 5 min (*CCR 02183 (RDW)*)  
2
- MRD91 Mission Product Data Latency: 1 min (*CCR 02183 (RDW)*)  
3
- MRD91 Product Measurement Precision: Greater of 100 g/ m<sup>2</sup> or 40% (Day), and  
4 Greater of 25 g/m<sup>2</sup> or 40% (Night) (*CCR 01892*) (*CCR 02183 (RDW)*)

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

- MRD91 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees, and  
5 Night with SZA of greater than 96 degrees  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: In presence of limited clouds with optical depths < 1.0 and > 50 (Day), and  
In presence of limited clouds with optical depth >1 and < 5 (Night)  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 01892) (CCR 02183 (RDW))
- MRD14 **3.3.3.2.3 Cloud Ice Water Path: Hemispheric**  
9
- MRD15 The GOES-R System **shall** produce a Cloud Ice Water Path: Hemispheric product in accordance with  
0 the requirements and qualifiers provided in the product table below.
- Cloud Ice Water Path reports the total equivalent water content of ice particles integrated in a vertical column through the atmosphere. The measured information is dependent on the number of particles, their sizes, and their densities (same as CONUS product except this version provides larger coverage).
- (CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))
- MRD91 Product Geographic Coverage/Conditions: Full Disk/for limited cloudiness (CCR 02183 (RDW))  
6
- MRD91 Product Vertical Resolution: SFC - 20 km (CCR 02183 (RDW))  
7
- MRD91 Product Horizontal Resolution: 2 km (CCR 02183 (RDW))  
8
- MRD91 Product Mapping Accuracy: 1 km (CCR 02183 (RDW))  
9
- MRD92 Product Measurement Range: 25 - 1500 g/m<sup>2</sup> (Day), and  
0 25 - 175 g/m<sup>2</sup> (Night) (CCR 01892) (CCR 02183 (RDW))
- MRD92 Product Measurement Accuracy: 40% (Day), and  
1 Greater of 25 g/m<sup>2</sup> or 30% (Night) (CCR 01892) (CCR 02183 (RDW))
- MRD92 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
2 (CCR 01899) (CCR 02183 (RDW))
- MRD92 Mission Product Data Latency: 3 min (CCR 02183 (RDW))  
3
- MRD92 Product Measurement Precision: Greater of 100 g/ m<sup>2</sup> or 40% (Day), and  
4 Greater of 25 g/m<sup>2</sup> or 40% (Night)  
(CCR 01892) (CCR 02183 (RDW))
- MRD92 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees, and  
5 Night with SZA of greater than 96 degrees  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: In presence of limited clouds with optical depths >1.0 and <50 (Day), and  
In presence of limited clouds with optical depth >1 and < 5 (Night)  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 01892) (CCR 02183 (RDW))

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD15 3.3.3.2.4 Cloud Ice Water Path: Mesoscale**  
1

MRD15 The GOES-R System **shall** produce a Cloud Ice Water Path: Mesoscale product in accordance with the  
2 requirements and qualifiers provided in the product table below.

Cloud Ice Water Path reports the total equivalent water content of ice particles integrated in a vertical column through the atmosphere. The measured information is dependent on the number of particles, their sizes, and their densities (same as CONUS product except this version provides mesoscale coverage).

(CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))

MRD92 Product Geographic Coverage/Conditions: Mesoscale/for limited cloudiness (CCR 02183 (RDW))  
6

MRD92 Product Vertical Resolution: SFC - 20 km (CCR 02183 (RDW))  
7

MRD92 Product Horizontal Resolution: 2 km (CCR 02183 (RDW))  
8

MRD92 Product Mapping Accuracy: 1 km  
9

MRD93 Product Measurement Range: 25 - 1500 g/m<sup>2</sup> (Day), and 25 - 175 g/m<sup>2</sup> (Night) (CCR 01892)(CCR  
0 02183 (RDW))

MRD93 Product Measurement Accuracy: 40% (Day), and  
1 Greater of 25 g/m<sup>2</sup> or 30% (Night) (CCR 01892) (CCR 02183 (RDW))

MRD93 Product Refresh Rate/Coverage Time: 5 min (CCR 02183 (RDW))  
2

MRD93 Mission Product Data Latency: 1 min (CCR 02183 (RDW))  
3

MRD93 Product Measurement Precision: Greater of 100 g/ m<sup>2</sup> or 40% (Day), and  
4 Greater of 25 g/m<sup>2</sup> or 40% (Night) (CCR 01892) (CCR 02183 (RDW))

MRD93 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees, and  
5 Night with SZA of greater than 96 degrees  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: In presence of limited clouds with optical depths > 1.0 and <50 (Day), and  
In presence of limited clouds with optical depth >1 and < 5 (Night)  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 01892) (CCR 02183 (RDW))

**MRD15 3.3.3.2.5 Cloud Layers/Heights: CONUS (CCR 01543)**  
5

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

MRD15 The GOES-R System **shall** produce a Cloud Layers/Heights: CONUS product in accordance with the  
6 requirements and qualifiers provided in the product table below.

Cloud Layers/Heights reports the fractional amount of the cloud coverage detected over a horizontal region that occurs within the high, middle and low layers. The high layer shall be defined for regions of the atmosphere with pressures less than 440 hPa. The low layer is defined for regions with pressures greater than 680 hPa and the middle layer resides between 440 and 680 hPa.

*(CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))*

MRD93 Product Geographic Coverage/Conditions: CONUS *(CCR 02183 (RDW))*  
6

MRD93 Product Vertical Resolution: 1 cloud layer *(CCR 02183 (RDW))*  
7

MRD93 Product Horizontal Resolution: 10 km *(CCR 02183 (RDW))*  
8

MRD93 Product Mapping Accuracy: 5 km *(CCR 02183 (RDW))*  
9

MRD94 Product Measurement Range: Low, Mid, High *(CCR 02183 (RDW))*  
0

MRD94 Product Measurement Accuracy: 80% correct classification *(CCR 02183 (RDW))*  
1

MRD94 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
2 *(CCR 01899) (CCR 02183 (RDW))*

MRD94 Mission Product Data Latency: 15 min *(CCR 02183 (RDW))*  
3

MRD94 Product Measurement Precision: Not applicable *(CCR 01892) (CCR 02183 (RDW))*  
4

MRD94 Temporal Coverage Qualifier: Day and night  
5 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: In presence of limited clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage  
*(CCR 02183 (RDW))*

MRD15 **3.3.3.2.6 Cloud Layers/Heights: Hemispheric** *(CCR 01543)*  
7

MRD15 The GOES-R System **shall** produce a Cloud Layers/Heights: Hemispheric product in accordance with  
8 the requirements and qualifiers provided in the product table below.

Cloud Layers/Heights reports the fractional amount of the cloud coverage detected over a horizontal region that occurs within the high, middle and low layers. The high layer shall be defined for regions of the atmosphere with pressures less than 440 hPa. The low layer is defined for regions with pressures greater than 680 hPa and the middle layer resides between 440 and 680 hPa (same as CONUS product except this version provides larger coverage).

*(CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))*



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD94 Product Geographic Coverage/Conditions: Full Disk (*CCR 02183 (RDW)*)  
6
- MRD94 Product Vertical Resolution: 1 cloud layer (*CCR 02183 (RDW)*)  
7
- MRD94 Product Horizontal Resolution: 10 km (*CCR 02183 (RDW)*)  
8
- MRD94 Product Mapping Accuracy: 5 km (*CCR 02183 (RDW)*)  
9
- MRD95 Product Measurement Range: Low, Mid, High (*CCR 02183 (RDW)*)  
0
- MRD95 Product Measurement Accuracy: 80% correct classification (*CCR 02183 (RDW)*)  
1
- MRD95 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
2 (*CCR 01899*) (*CCR 02183 (RDW)*)
- MRD95 Mission Product Data Latency: 15 min (*CCR 02183 (RDW)*)  
3
- MRD95 Product Measurement Precision: Not applicable (*CCR 01892*) (*CCR 02183 (RDW)*)  
4
- MRD95 Temporal Coverage Qualifier: Day and night  
5  
Product Extent Qualifier: Quantitative out to at least 62 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: In presence of limited clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage (*CCR 02183 (RDW)*)
- MRD15 **3.3.3.2.7 Cloud Layers/Heights: Mesoscale** (*CCR 01543*)  
9
- MRD16 The GOES-R System **shall** produce a Cloud Layers/Heights: Mesoscale product in accordance with the requirements and qualifiers provided in the product table below.  
0
- Cloud Layers/Heights reports the fractional amount of the cloud coverage detected over a horizontal region that occurs within the high, middle and low layers. The high layer shall be defined for regions of the atmosphere with pressures less than 440 hPa. The low layer is defined for regions with pressures greater than 680 hPa and the middle layer resides between 440 and 680 hPa (same as CONUS product except this version provides mesoscale coverage).
- (*CCR 01211*) (*CCR 01543*) (*CCR 01466*) (*CCR 01542*) (*CCR 01631*) (*CCR 02183 (RDW)*)
- MRD95 Product Geographic Coverage/Conditions: Mesoscale (*CCR 02183 (RDW)*)  
6
- MRD95 Product Vertical Resolution: 1 cloud layer (*CCR 02183 (RDW)*)  
7
- MRD95 Product Horizontal Resolution: 4 km (*CCR 02183 (RDW)*)  
8
- MRD95 Product Mapping Accuracy: 2 km (*CCR 02183 (RDW)*)  
9

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD96 Product Measurement Range: Low, Mid, High (*CCR 02183 (RDW)*)  
0
- MRD96 Product Measurement Accuracy: 80% correct classification (*CCR 02183 (RDW)*)  
1
- MRD96 Product Refresh Rate/Coverage Time: 5 min (*CCR 02183 (RDW)*)  
2
- MRD96 Mission Product Data Latency: 5 min (*CCR 02183 (RDW)*)  
3
- MRD96 Product Measurement Precision: Not applicable (*CCR 01892*) (*CCR 02183 (RDW)*)  
4
- MRD96 Temporal Coverage Qualifier: Day and night  
5 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: In presence of limited clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage (*CCR 02183 (RDW)*)
- MRD16 **3.3.3.2.8 Cloud Liquid Water: CONUS**  
1
- MRD16 The GOES-R System **shall** produce a Cloud Liquid Water: CONUS product in accordance with the requirements and qualifiers provided in the product table below.  
2
- Cloud Liquid Water reports the total equivalent amount of water in a vertical column of air.  
*(CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))*
- MRD96 Product Geographic Coverage/Conditions: CONUS (*CCR 02183 (RDW)*)  
6
- MRD96 Product Vertical Resolution: Total Column (*CCR 02183 (RDW)*)  
7
- MRD96 Product Horizontal Resolution: 2 km (*CCR 02183 (RDW)*)  
8
- MRD96 Product Mapping Accuracy: 1 km (*CCR 02183 (RDW)*)  
9
- MRD97 Product Measurement Range: 25 - 1000 g/m<sup>2</sup> (Day), and  
0 25 - 100 g/m<sup>2</sup> (Night) (*CCR 01892*) (*CCR 02183 (RDW)*)
- MRD97 Product Measurement Accuracy: Greater of 50 g/m<sup>2</sup> or 30% (Day), and  
1 Greater of 25 g/m<sup>2</sup> or 15% (Night) (*CCR 01892*) (*CCR 02183 (RDW)*)
- MRD97 Product Refresh Rate/Coverage Time: 5 min (*CCR 02183 (RDW)*)  
2
- MRD97 Mission Product Data Latency: 5 min (*CCR 02183 (RDW)*)  
3
- MRD97 Product Measurement Precision: Greater of 25 g/m<sup>2</sup> or 30% (Day), and  
4 Greater of 25 g/m<sup>2</sup> or 40% (Night) (*CCR 01892*) (*CCR 02183 (RDW)*)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD97 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees, and  
5 Night with SZA of greater than 96 degrees  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: In presence of limited clouds with optical depths > 1 and < 50 (Day), and  
In presence of limited clouds with optical depth >1 and < 5 (Night)  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 01892) (CCR 02183 (RDW))
- MRD16 **3.3.3.2.9 Cloud Liquid Water: Hemispheric**  
3
- MRD16 The GOES-R System **shall** produce a Cloud Liquid Water: Hemispheric product in accordance with the  
4 requirements and qualifiers provided in the product table below.
- Cloud Liquid Water reports the total equivalent amount of water in a vertical column of air (same as CONUS product except this version provides larger coverage).
- (CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))
- MRD97 Product Geographic Coverage/Conditions: Full Disk (CCR 02183 (RDW))  
6
- MRD97 Product Vertical Resolution: Total Column (CCR 02183 (RDW))  
7
- MRD97 Product Horizontal Resolution: 2 km (CCR 02183 (RDW))  
8
- MRD97 Product Mapping Accuracy: 1 km (CCR 02183 (RDW))  
9
- MRD98 Product Measurement Range: 25 - 1000 g/m<sup>2</sup> (Day), and 25 - 100 g/m<sup>2</sup> (Night) (CCR 01892) (CCR  
0 02183 (RDW))
- MRD98 Product Measurement Accuracy: Greater of 50 g/m<sup>2</sup> or 30% (Day), and  
1 Greater of 25 g/m<sup>2</sup> or 15% (Night) (CCR 01892)(CCR 02183 (RDW))
- MRD98 Product Refresh Rate/Coverage Time: 30 min (5 min when 5 minute Full Disk data available)  
2 (CCR 01899) (CCR 02183 (RDW))
- MRD98 Mission Product Data Latency: 3 min (CCR 02183 (RDW))  
3
- MRD98 Product Measurement Precision: Greater of 25 g/m<sup>2</sup> or 30% (Day), and  
4 Greater of 25 g/m<sup>2</sup> or 40% (Night) (CCR 01892) (CCR 02183 (RDW))
- MRD98 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees, and  
5 Night with SZA of greater than 96 degrees  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: In presence of limited clouds with optical depths < 1 and > 50 (Day), and  
In presence of limited clouds with optical depth >1 and < 5 (Night)  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 01892) (CCR 02183 (RDW))
- MRD16 **3.3.3.2.10 Cloud Liquid Water: Mesoscale**  
5

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD16 The GOES-R System **shall** produce a Cloud Liquid Water: Mesoscale product in accordance with the  
6 requirements and qualifiers provided in the product table below.

Cloud Liquid Water reports the total equivalent amount of water in a vertical column of air (same as CONUS product except this version provides mesoscale coverage).

*(CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))*

MRD98 Product Geographic Coverage/Conditions: Mesoscale *(CCR 02183 (RDW))*  
6

MRD98 Product Vertical Resolution: Total Column *(CCR 02183 (RDW))*  
7

MRD98 Product Horizontal Resolution: 2 km *(CCR 02183 (RDW))*  
8

MRD98 Product Mapping Accuracy: 1 km *(CCR 02183 (RDW))*  
9

MRD99 Product Measurement Range: 25 - 1000 g/m<sup>2</sup> (Day), and  
0 25 - 100 g/m<sup>2</sup> (Night) *(CCR 01892) (CCR 02183 (RDW))*

MRD99 Product Measurement Accuracy: Greater of 50 g/m<sup>2</sup> or 30% (Day), and  
1 Greater of 25 g/m<sup>2</sup> or 15% (Night) *(CCR 01892) (CCR 02183 (RDW))*

MRD99 Product Refresh Rate/Coverage Time: 5 min *(CCR 02183 (RDW))*  
2

MRD99 Mission Product Data Latency: 5 min *(CCR 02183 (RDW))*  
3

MRD99 Product Measurement Precision: Greater of 25 g/m<sup>2</sup> or 30% (Day), and  
4 Greater of 25 g/m<sup>2</sup> or 40% (Night) *(CCR 01892) (CCR 02183 (RDW))*

MRD99 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees and  
5 Night with SZA of greater than 96 degrees  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and Qualitative at Larger LZA  
Cloud Cover Conditions Qualifier: In presence of limited clouds with optical depths < 1 and > 50 (Day), and  
In presence of limited clouds with optical depth >1 and < 5 (Night)  
Product Statistics Qualifier: Over specified geographic coverage  
*(CCR 01892) (CCR 02183 (RDW))*

MRD16 **3.3.3.2.11 Cloud and Moisture Imagery: CONUS**  
7

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD16 The GOES-R System **shall** produce a Cloud and Moisture Imagery: CONUS product in accordance  
8 with the requirements and qualifiers provided in the product table below.

Cloud and Moisture Imagery reports digital maps of clouds, moisture, and atmospheric windows through which land and water are observed, by reporting radiance measurements converted first to brightness temperature and then digital counts from 0-255 from all of the bands sensing clouds and moisture from an imaging instrument. Infrared imagery bands are often chosen either along spectral absorption features including those of water vapor bands or CO<sub>2</sub> and in regions with no absorption that permit observations of the surface. Visible bands are also chosen to sense the surface and the low lying cloud and fog interfering with observations of the surface. Low light imagery in the visible band is also included. Cloud and moisture imagery provides input to other algorithms producing other environmental products.

*(CCR 01211) (CCR 01542) (CCR 01611) (CCR 01631)*

MRD99 Product Geographic Coverage/Conditions: CONUS  
6

MRD99 Product Vertical Resolution: N/A  
7

MRD99 Product Horizontal Resolution: 2 km, with finer daytime observations  
8

MRD99 Product Mapping Accuracy: 1 km  
9

MRD10 Product Measurement Range: N/A  
00

MRD10 Product Measurement Accuracy: N/A  
01

MRD10 Product Refresh Rate/Coverage Time: 5 min  
02

MRD10 Mission Product Data Latency: 1 min  
03

MRD10 Product Measurement Precision: N/A  
04

MRD10 Temporal Coverage Qualifier: Day and Night  
05 Product Extent Qualifier: N/A  
Cloud Cover Conditions Qualifier: In presence of clear air and clouds  
Product Statistics Qualifier: Over specified geographic coverage

MRD16 **3.3.3.2.12 Cloud and Moisture Imagery: Hemispheric**  
9

MRD17 The GOES-R System **shall** produce a Cloud and Moisture Imagery: Hemispheric product in accordance  
0 with the requirements and qualifiers provided in the product table below.

Cloud and Moisture Imagery reports digital maps of clouds, moisture, and atmospheric windows through which land and water are observed, by reporting radiance measurements converted first to brightness temperature and then to digital counts from 0-255 from all of the bands sensing clouds and moisture from an imaging instrument. Infrared imagery bands are often chosen either along spectral absorption features including those of water vapor bands or CO<sub>2</sub> and in regions with no absorption that permit observations of the surface. Visible bands are also chosen to sense the surface and the low-lying cloud and fog interfering with observations of the surface. Low light imagery in the visible band is also

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD17 included. Cloud and moisture imagery provides input to other algorithms producing other  
0 environmental products (same as CONUS product except this version provides larger coverage).

*(CCR 01211) (CCR 01542) (CCR 01611) (CCR 01631)*

MRD10 Product Geographic Coverage/Conditions: Full Disk  
06

MRD10 Product Vertical Resolution: N/A  
07

MRD10 Product Horizontal Resolution: 2 km, with finer daytime observations  
08

MRD10 Product Mapping Accuracy: 1 km  
09

MRD10 Product Measurement Range: N/A  
10

MRD10 Product Measurement Accuracy: N/A  
11

MRD10 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
12 *(CCR 01899) (CCR 02183 (RDW))*

MRD10 Mission Product Data Latency: 1 min  
13

MRD10 Product Measurement Precision: N/A  
14

MRD10 Temporal Coverage Qualifier: Day and Night  
15 Product Extent Qualifier: N/A  
Cloud Cover Conditions Qualifier: In presence of clear air and clouds  
Product Statistics Qualifier: Over specified geographic coverage

MRD17 **3.3.3.2.13 Cloud and Moisture Imagery: Mesoscale**  
1

MRD17 The GOES-R System **shall** produce a Cloud and Moisture Imagery: Mesoscale product in accordance  
2 with the requirements and qualifiers provided in the product table below.

Cloud and Moisture Imagery reports digital maps of clouds, moisture, and atmospheric windows through which land and water are observed, by reporting radiance measurements converted first to brightness temperature and then digital counts from 0-255 from all of the bands sensing clouds and moisture from an imaging instrument. Infrared imagery bands are often chosen either along spectral absorption features including those of water vapor bands or CO<sub>2</sub> and in regions with no absorption that permit observations of the surface. Visible bands are also chosen to sense the surface and the low-lying cloud and fog interfering with observations of the surface. Low light imagery in the visible band is also included. Cloud and moisture imagery provides input to other algorithms producing other environmental products (same as CONUS product except this version provides mesoscale coverage).

*(CCR 01211) (CCR 01542) (CCR 01611) (CCR 01631)*

MRD10 Product Geographic Coverage/Conditions: Mesoscale  
16

MRD10 Product Vertical Resolution: N/A  
17

**ID                    410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD10    Product Horizontal Resolution: 2 km, with finer daytime observations  
18

MRD10    Product Mapping Accuracy: 1 km  
19

MRD10    Product Measurement Range: N/A  
20

MRD10    Product Measurement Accuracy: N/A  
21

MRD10    Product Refresh Rate/Coverage Time: 30 sec  
22

MRD10    Mission Product Data Latency: 30 sec  
23

MRD10    Product Measurement Precision: N/A  
24

MRD10    Temporal Coverage Qualifier: Day and Night  
25  
Product Extent Qualifier: N/A  
Cloud Cover Conditions Qualifier: In presence of clear air and clouds  
Product Statistics Qualifier: Over specified geographic coverage

MRD17    **3.3.3.2.14 Cloud Optical Depth: CONUS**  
3

MRD17    The GOES-R System **shall** produce a Cloud Optical Depth: CONUS product in accordance with the  
4 requirements and qualifiers provided in the product table below.

Cloud Optical Depth is a measure of the extinction along the vertical column of air due to scattering and absorption in the path associated with water vapor, ice particles, and the associated particle size.

*(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01631)*

MRD10    Product Geographic Coverage/Conditions: CONUS/optical depth > 1  
26

MRD10    Product Vertical Resolution: Total Column  
27

MRD10    Product Horizontal Resolution: 2 km  
28

MRD10    Product Mapping Accuracy: 1 km  
29

MRD10    Product Measurement Range: 1 - 50 (Day), and 1 - 5 (Night) *(CCR 01892)*  
30

MRD10    Product Measurement Accuracy: Liquid phase: Maximum of 2 or 20% (Day), and 30% (Night).  
31 Ice phase: Maximum of 3 or 30% (Day),  
and 30% (Night) *(CCR 01892)*

MRD10    Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
32 *(CCR 01899) (CCR 02183 (RDW))*

MRD10    Mission Product Data Latency: 15 min  
33

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

- MRD10 Product Measurement Precision: Liquid Phase: Maximum of 0.5 or 20% (Day), and Maximum of 0.8 or  
34 30% (Night).  
Ice Phase: Maximum of 0.8 or 30% (Day), and  
Maximum of 0.8 or 30% (Night) (*CCR 01977*) (*CCR01892*)
- MRD10 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees, and  
35 Night with SZA of greater than 96 degrees  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at  
larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1  
Product Statistics Qualifier: Over specified geographic coverage  
(*CCR 01892*)
- MRD17 **3.3.3.2.15 Cloud Optical Depth: Hemispheric**  
5
- MRD17 The GOES-R System **shall** produce a Cloud Optical Depth: Hemispheric product in accordance with  
6 the requirements and qualifiers provided in the product table below.
- Cloud Optical Depth is a measure of the extinction along the vertical column of air due to scattering and  
absorption in the path associated with water vapor, ice particles, and the associated particle size (same  
as CONUS product except this version provides larger coverage).
- (*CCR 01213*) (*CCR 01214*) (*CCR 01211*) (*CCR 01543*) (*CCR 01466*) (*CCR 01542*) (*CCR 01631*)
- MRD10 Product Geographic Coverage/Conditions: Full disk/optical depth > 1  
36
- MRD10 Product Vertical Resolution: Total Column  
37
- MRD10 Product Horizontal Resolution: 4 km  
38
- MRD10 Product Mapping Accuracy: 2 km  
39
- MRD10 Product Measurement Range: 1 - 50 (Day), and 1 - 5 (Night) (*CCR 01892*)  
40
- MRD10 Product Measurement Accuracy: Liquid phase: Maximum of 2 or 20% (Day), and 30% (Night).  
41 Ice phase: Maximum of 3 or 30% (Day), and 30% (Night) (*CCR 01892*)
- MRD10 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
42 (*CCR 01899*) (*CCR 02183* (*RDW*))
- MRD10 Mission Product Data Latency: 3 min (*CCR 01899*) (*CCR 02183* (*RDW*))  
43
- MRD10 Product Measurement Precision: Liquid Phase: Maximum of 0.5 or 20% (Day), and Maximum of 0.8  
44 or 30% (Night).  
Ice Phase: Maximum of 0.8 or 30% (Day), and Maximum of 0.8 or 30% (Night).  
(*CCR 01977*) (*CCR 01892*)



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD10 45 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees, and Night with SZA of greater than 96 degrees  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1  
Product Statistics Qualifier: Over specified geographic coverage  
*(CCR 01892)*
- MRD17 7 **3.3.3.2.16 Cloud Particle Size Distribution: CONUS**
- MRD17 8 The GOES-R System **shall** produce a Cloud Particle Size Distribution: CONUS product in accordance with the requirements and qualifiers provided in the product table below.
- Cloud particle size distribution reports the width or effective variance  $ve$  of a single mode particle size distribution having effective radius  $re$ . By definition, the effective radius is the ratio of the third moment of the size distribution to the second moment; however the higher moments cannot effectively be measured with GOES-R. Thus, the cloud particle size is determined from the radiance measurements and depends on a threshold cloud optical depth varying with conditions.
- (CCR 01213) (CCR 01211) (CCR 01466) (CCR 01542) (CCR 01631)*
- MRD10 46 Product Geographic Coverage/Conditions: CONUS
- MRD10 47 Product Vertical Resolution: Cloud Top
- MRD10 48 Product Horizontal Resolution: 2 km
- MRD10 49 Product Mapping Accuracy: 1 km
- MRD10 50 Product Measurement Range: 2 - 32  $\mu\text{m}$  for liquid phase; 2 - 50  $\mu\text{m}$  for ice phase
- MRD10 51 Product Measurement Accuracy: Liquid phase: 4  $\mu\text{m}$  (Day), and Maximum of 4  $\mu\text{m}$  or 30% (Night). Ice Phase: 10  $\mu\text{m}$  (Day), and 10  $\mu\text{m}$  (Night) *(CCR 01892)*
- MRD10 52 Product Refresh Rate/Coverage Time: 5 min
- MRD10 53 Mission Product Data Latency: 1 min *(CCR 01899) (CCR 02183 (RDW))*
- MRD10 54 Product Measurement Precision: Liquid Phase: 2  $\mu\text{m}$  (Day), and Maximum of 4  $\mu\text{m}$  or 25% (Night). Ice Phase: 4  $\mu\text{m}$  (Day), and Maximum of 10  $\mu\text{m}$  or 25% (Night). *(CCR 01977) (CCR 01892)*
- MRD10 55 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees, and Night with SZA of greater than 96 degrees  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1 and < 50 (Day), and In presence of clouds with optical depth >1 and < 5 (Night)  
Product Statistics Qualifier: Over specified geographic coverage  
*(CCR 01892)*

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD17 3.3.3.2.17 Cloud Particle Size Distribution: Hemispheric**  
9

MRD18 The GOES-R System **shall** produce a Cloud Particle Size Distribution: Hemispheric product in  
0 accordance with the requirements and qualifiers provided in the product table below.

Cloud particle size distribution reports the width or effective variance  $ve$  of a single mode particle size distribution having effective radius  $re$ . By definition, the effective radius is the ratio of the third moment of the size distribution to the second moment; however the higher moments cannot effectively be measured with GOES-R. Thus, the cloud particle size is determined from the radiance measurements and depends on a threshold cloud optical depth varying with conditions (same as CONUS product except this version provides larger coverage).

(CCR 01211) (CCR 01295) (CCR 01466) (CCR 01542) (CCR 01631)

MRD10 Product Geographic Coverage/Conditions: Full Disk  
56

MRD10 Product Vertical Resolution: Cloud Top  
57

MRD10 Product Horizontal Resolution: 2 km  
58

MRD10 Product Mapping Accuracy: 1 km  
59

MRD10 Product Measurement Range: 2 - 32  $\mu\text{m}$  for liquid phase; 2 - 50  $\mu\text{m}$  for ice phase  
60

MRD10 Product Measurement Accuracy: Liquid Phase: 4  $\mu\text{m}$  (Day), and Maximum of 4  $\mu\text{m}$  or 30% (Night).  
61 Ice Phase: 10  $\mu\text{m}$  (Day), and 10  $\mu\text{m}$  (Night) (CCR 01892)

MRD10 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
62 (CCR 01899) (CCR 02183 (RDW))

MRD10 Mission Product Data Latency: 15 min (5 min when 5 minute Full Disk data available)  
63 (CCR 01899) (CCR 02183 (RDW))

MRD10 Product Measurement Precision: Liquid Phase: 2  $\mu\text{m}$  (Day), and  
64 Maximum of 4  $\mu\text{m}$  or 25% (Night).  
Ice Phase: 4  $\mu\text{m}$  (Day), and Maximum of 10  $\mu\text{m}$  or 25% (Night).  
(CCR 01977) (CCR 01892)

MRD10 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees, and Night with SZA of greater  
65 than 96 degrees  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at  
larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1 and < 50 (Day), and  
In presence of clouds with optical depth >1 and < 5 (Night)  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 01892)

**MRD18 3.3.3.2.18 Cloud Particle Size Distribution: Mesoscale**  
1

MRD18 The GOES-R System **shall** produce a Cloud Particle Size Distribution: Mesoscale product in  
2 accordance with the requirements and qualifiers provided in the product table below.

Cloud particle size distribution reports the width or effective variance  $ve$  of a single mode particle size

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD18 distribution having effective radius *re*. By definition, the effective radius is the ratio of the third  
2 moment of the size distribution to the second moment; however the higher moments cannot effectively be measured with GOES-R. Thus, the cloud particle size is determined from the radiance measurements and depends on a threshold cloud optical depth varying with conditions (same as CONUS product except this version provides mesoscale coverage).

(CCR 01211) (CCR 01295) (CCR 01466) (CCR 01542) (CCR 01631)

MRD10 Product Geographic Coverage/Conditions: Mesoscale  
66

MRD10 Product Vertical Resolution: Cloud Top  
67

MRD10 Product Horizontal Resolution: 2 km  
68

MRD10 Product Mapping Accuracy: 1 km  
69

MRD10 Product Measurement Range: 2 - 32  $\mu\text{m}$  for liquid phase; 2 - 50  $\mu\text{m}$  for ice phase  
70

MRD10 Product Measurement Accuracy: Liquid Phase: 4  $\mu\text{m}$  (Day), and Maximum of 4  $\mu\text{m}$  or 30% (Night).  
71 Ice Phase: 10  $\mu\text{m}$  (Day), and 10  $\mu\text{m}$  (Night) (CCR 01892)

MRD10 Product Refresh Rate/Coverage Time: 5 min  
72

MRD10 Mission Product Data Latency: 5 min  
73

MRD10 Product Measurement Precision: Liquid Phase: 2  $\mu\text{m}$  (Day), and Maximum of 4  $\mu\text{m}$  or 25% (Night).  
74 Ice Phase: 4  $\mu\text{m}$  (Day), and Maximum of 10  $\mu\text{m}$  or 25% (Night) (CCR 01977) (CCR 01892)

MRD10 Temporal Coverage Qualifier: Day with SZA of less than 65 degrees, and Night with SZA of greater  
75 than 96 degrees

Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA

Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1 and < 50 (Day), and In presence of clouds with optical depth >1 and < 5 (Night)

Product Statistics Qualifier: Over specified geographic coverage (CCR 01892)

MRD18 **3.3.3.2.19 Cloud Top Phase: CONUS**  
3

MRD18 The GOES-R System **shall** produce a Cloud Top Phase: CONUS product in accordance with the  
4 requirements and qualifiers provided in the product table below.

Cloud Top Phase reports the state of aggregation of a cloud, namely liquid, supercooled, mixed, or solid, for each detectable layer.

(CCR 01213) (CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01631)

MRD10 Product Geographic Coverage/Conditions: CONUS  
76

MRD10 Product Vertical Resolution: Cloud Top  
77

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD10 Product Horizontal Resolution: 2 km  
78

MRD10 Product Mapping Accuracy: 1 km  
79

MRD10 Product Measurement Range: Liquid/Solid/Supercooled/Mixed  
80

MRD10 Product Measurement Accuracy: 80% correct classification  
81

MRD10 Product Refresh Rate/Coverage Time: 5 min  
82

MRD10 Mission Product Data Latency: 1 min (*CCR 01899*) (*CCR 02183 (RDW)*)  
83

MRD10 Product Measurement Precision: Not applicable (*CCR 01892*)  
84

MRD10 Temporal Coverage Qualifier: Day and Night  
85  
Product Extent Qualifier: Quantitative out to at least 70 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage (*CCR 01892*)

MRD18 **3.3.3.2.20 Cloud Top Phase: Hemispheric**  
5

MRD18 The GOES-R System **shall** produce a Cloud Top Phase: Hemispheric product in accordance with the requirements and qualifiers provided in the product table below.  
6

Cloud Top Phase reports the state of aggregation of a cloud, namely liquid, supercooled, mixed, or solid, for each detectable layer (same as CONUS product except this version provides larger coverage).

(*CCR 01213*) (*CCR 01211*) (*CCR 01543*) (*CCR 01466*) (*CCR 01542*) (*CCR 01631*)

MRD10 Product Geographic Coverage/Conditions: Full Disk  
86

MRD10 Product Vertical Resolution: Cloud Top  
87

MRD10 Product Horizontal Resolution: 2 km  
88

MRD10 Product Mapping Accuracy: 1 km  
89

MRD10 Product Measurement Range: Liquid/Solid/Supercooled/Mixed  
90

MRD10 Product Measurement Accuracy: 80% correct classification  
91

MRD10 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
92 (*CCR 01899*) (*CCR 02183 (RDW)*)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD10 Mission Product Data Latency: 3 min (CCR 01899) (CCR 02183 (RDW))  
93
- MRD10 Product Measurement Precision: Not applicable (CCR 01892)  
94
- MRD10 Temporal Coverage Qualifier: Day and Night  
95 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage (CCR 01892)
- MRD18 **3.3.3.2.21 Cloud Top Phase: Mesoscale**  
7
- MRD18 The GOES-R System **shall** produce a Cloud Top Phase: Mesoscale product in accordance with the requirements and qualifiers provided in the product table below.  
8
- Cloud Top Phase reports the state of aggregation of a cloud, namely liquid, supercooled, mixed, or solid, for each detectable layer (same as CONUS product except this version provides mesoscale coverage).
- (CCR 01213) (CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01631)
- MRD10 Product Geographic Coverage/Conditions: Mesoscale  
96
- MRD10 Product Vertical Resolution: Cloud Top  
97
- MRD10 Product Horizontal Resolution: 2 km  
98
- MRD10 Product Mapping Accuracy: 1 km  
99
- MRD11 Product Measurement Range: Liquid/Solid/Supercooled/Mixed  
00
- MRD11 Product Measurement Accuracy: 80% correct classification  
01
- MRD11 Product Refresh Rate/Coverage Time: 5 min  
02
- MRD11 Mission Product Data Latency: 1 min (CCR 01899) (CCR 02183 (RDW))  
03
- MRD11 Product Measurement Precision: Not applicable (CCR 01892)  
04
- MRD11 Temporal Coverage Qualifier: Day and Night  
05 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage (CCR 01892)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD18 3.3.3.2.22 Cloud Top Height: CONUS**  
9

MRD19 The GOES-R System **shall** produce a Cloud Top Height: CONUS product in accordance with the  
0 requirements and qualifiers provided in the product table below.

Cloud Top Height reports the height of the cloud layer above the local terrain or above mean sea level. An average cloud height and thickness is reported for each layer for the portion of the field of view being covered by the cloud layer.

*(CCR 01213) (CCR 01211) (CCR 01543) (CCR 01466) (CCR01542) (CCR 01631)*

MRD11 Product Geographic Coverage/Conditions: CONUS  
06

MRD11 Product Vertical Resolution: Cloud Top  
07

MRD11 Product Horizontal Resolution: 10 km  
08

MRD11 Product Mapping Accuracy: 5 km  
09

MRD11 Product Measurement Range: 100m - 300hPa  
10

MRD11 Product Measurement Accuracy: 500m for clouds with emissivity > 0.8  
11

MRD11 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
12 *(CCR 01899) (CCR 02183 (RDW))*

MRD11 Mission Product Data Latency: 3 min *(CCR 01899) (CCR 02183 (RDW))*  
13

MRD11 Product Measurement Precision: 1500m for clouds with emissivity > 0.8  
14

MRD11 Temporal Coverage Qualifier: Day and Night  
15 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to cloud top  
Product Statistics Qualifier: Over specified geographic coverage  
*(CCR 01892)*

**MRD19 3.3.3.2.23 Cloud Top Height: Hemispheric**  
1

MRD19 The GOES-R System **shall** produce a Cloud Top Height: Hemispheric product in accordance with the  
2 requirements and qualifiers provided in the product table below.

Cloud Top Height reports the height of the cloud layer above the local terrain or above mean sea level. An average cloud height and thickness is reported for each layer for the portion of the field of view being covered by the cloud layer (same as CONUS product except this version provides larger coverage).

*(CCR 01213) (CCR 01211) (CCR 01543) (CCR 01466) (CCR01542) (CCR 01631)*

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD11 Product Geographic Coverage/Conditions: Full Disk  
16

MRD11 Product Vertical Resolution: Cloud Top  
17

MRD11 Product Horizontal Resolution: 10 km  
18

MRD11 Product Mapping Accuracy: 5 km  
19

MRD11 Product Measurement Range: 0 - 15 km  
20

MRD11 Product Measurement Accuracy: 500m for clouds with emissivity > 0.8  
21

MRD11 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
22 (CCR 01899) (CCR 02183 (RDW))

MRD11 Mission Product Data Latency: 3 min (CCR 01899) (CCR 02183 (RDW))  
23

MRD11 Product Measurement Precision: 1500m for clouds with emissivity > 0.8  
24

MRD11 Temporal Coverage Qualifier: Day and Night  
25 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to cloud top  
Product Statistics Qualifier: Over specified geographic coverage (CCR 01892)

MRD19 **3.3.3.2.24 Cloud Top Height: Mesoscale**  
3

MRD19 The GOES-R System **shall** produce a Cloud Top Height: Mesoscale product in accordance with the requirements and qualifiers provided in the product table below.  
4

Cloud Top Height reports the height of the cloud layer above the local terrain or above mean sea level. An average cloud height and thickness is reported for each layer for the portion of the field of view being covered by the cloud layer (same as CONUS product except this version provides mesoscale coverage).

(CCR 01211) (CCR 01543) (CCR 01466) (CCR01542) (CCR 01631)

MRD11 Product Geographic Coverage/Conditions: Mesoscale  
26

MRD11 Product Vertical Resolution: Cloud top  
27

MRD11 Product Horizontal Resolution: 4 km  
28

MRD11 Product Mapping Accuracy: 2 km  
29

MRD11 Product Measurement Range: 0 - 20 km  
30

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD11 Product Measurement Accuracy: 500m for clouds with emissivity > 0.8  
31
- MRD11 Product Refresh Rate/Coverage Time: 5 min  
32
- MRD11 Mission Product Data Latency: 5 min  
33
- MRD11 Product Measurement Precision: 1500m for clouds with emissivity > 0.8  
34
- MRD11 Temporal Coverage Qualifier: Day and Night  
35  
Product Extent Qualifier: Quantitative out to at least 62 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to cloud top  
Product Statistics Qualifier: Over specified geographic coverage  
*(CCR 01892)*
- MRD19 **3.3.3.2.25 Cloud Top Pressure: CONUS**  
5
- MRD19 The GOES-R System **shall** produce a Cloud Top Pressure: CONUS product in accordance with the requirements and qualifiers provided in the product table below.  
6
- Cloud Top Pressure reports the atmospheric pressure at the top of the observed cloud layer. An average cloud top pressure is reported for each layer for the portion of the field of view being covered by the cloud layer.
- (CCR 01211) (CCR 01543) (CCR 01466) (CCR01542) (CCR 01611) (CCR 01631)*
- MRD11 Product Geographic Coverage/Conditions: CONUS  
36
- MRD11 Product Vertical Resolution: Cloud top  
37
- MRD11 Product Horizontal Resolution: 10 km  
38
- MRD11 Product Mapping Accuracy: 5 km  
39
- MRD11 Product Measurement Range: 100 - 1000 hPa  
40
- MRD11 Product Measurement Accuracy: 50 mb for clouds with emissivity > 0.8  
41
- MRD11 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
42  
*(CCR 01899) (CCR 02183 (RDW))*
- MRD11 Mission Product Data Latency: 10 min  
43
- MRD11 Product Measurement Precision: 150 mb for clouds with emissivity > 0.8  
44



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD11 Temporal Coverage Qualifier: Day and Night  
45 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to cloud top  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 01892)
- MRD19 **3.3.3.2.26 Cloud Top Pressure: Hemispheric**  
7
- MRD19 The GOES-R System **shall** produce a Cloud Top Pressure: Hemispheric product in accordance with the requirements and qualifiers provided in the product table below.  
8
- Cloud Top Pressure reports the atmospheric pressure at the top of the observed cloud layer. An average cloud top pressure is reported for each layer for the portion of the field of view being covered by the cloud layer (same as CONUS product except this version provides larger coverage).
- (CCR 01213) (CCR 01211) (CCR 01315) (CCR 01543) (CCR 01466) (CCR01542) (CCR 01611)(CCR 01631)
- MRD11 Product Geographic Coverage/Conditions: Full Disk  
46
- MRD11 Product Vertical Resolution: Cloud top  
47
- MRD11 Product Horizontal Resolution: 10 km  
48
- MRD11 Product Mapping Accuracy: 5 km  
49
- MRD11 Product Measurement Range: 100 - 1000 mb  
50
- MRD11 Product Measurement Accuracy: 50 mb for clouds with emissivity > 0.8  
51
- MRD11 Product Refresh Rate/Coverage Time: 60 min  
52
- MRD11 Mission Product Data Latency: 3 min (CCR 01899) (CCR 02183 (RDW))  
53
- MRD11 Product Measurement Precision: 150 mb for clouds with emissivity > 0.8  
54
- MRD11 Temporal Coverage Qualifier: Day and Night  
55 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to cloud top  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 01892)
- MRD19 **3.3.3.2.27 Cloud Top Temperature: Hemispheric**  
9
- MRD20 The GOES-R System **shall** produce a Cloud Top Temperature: Hemispheric product in accordance with the requirements and qualifiers provided in the product table below.  
0

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD20 Cloud Top Temperature reports the temperature at the top of the observable cloud layer. An average  
0 cloud top temperature is reported for each layer for the portion of the field of view being covered by the cloud layer.

*(CCR 01213) (CCR 01211) (CCR 01543) (CCR 01466) (CCR01542) (CCR 01631)*

MRD11 Product Geographic Coverage/Conditions: Full Disk  
56

MRD11 Product Vertical Resolution: At Cloud Tops  
57

MRD11 Product Horizontal Resolution: 2 km  
58

MRD11 Product Mapping Accuracy: 1 km  
59

MRD11 Product Measurement Range: 180 - 300 K  
60

MRD11 Product Measurement Accuracy: 3 K for clouds with emissivity > 0.8  
61

MRD11 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
62 *(CCR 01899) (CCR 02183 (RDW))*

MRD11 Mission Product Data Latency: 3 min *(CCR 01899) (CCR 02183 (RDW))*  
63

MRD11 Product Measurement Precision: 5 K for clouds with emissivity > 0.8  
64

MRD11 Temporal Coverage Qualifier: Day and Night  
65 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage

MRD20 **3.3.3.2.28 Cloud Top Temperature: Mesoscale**  
1

MRD20 The GOES-R System **shall** produce a Cloud Top Temperature: Mesoscale product in accordance with  
2 the requirements and qualifiers provided in the product table below.

Cloud Top Temperature reports the temperature at the top of the observable cloud layer. An average cloud top temperature is reported for each layer for the portion of the field of view being covered by the cloud layer (same as hemispheric product except this version provides mesoscale coverage).

*(CCR 01211) (CCR 01543) (CCR 01466) (CCR01542) (CCR 01631)*

MRD11 Product Geographic Coverage/Conditions: Mesoscale  
66

MRD11 Product Vertical Resolution: At Cloud Tops  
67

MRD11 Product Horizontal Resolution: 2 km  
68

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD11 Product Mapping Accuracy: 1 km  
69

MRD11 Product Measurement Range: 180 - 300 K  
70

MRD11 Product Measurement Accuracy: 3 K for clouds with emissivity > 0.8  
71

MRD11 Product Refresh Rate/Coverage Time: 5 min  
72

MRD11 Mission Product Data Latency: 5 min  
73

MRD11 Product Measurement Precision: 5 K for clouds with emissivity > 0.8  
74

MRD11 Temporal Coverage Qualifier: Day and Night  
75 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage

MRD20 **3.3.3.2.29 Cloud Type: CONUS**  
3

MRD20 The GOES-R System **shall** produce a Cloud Type: CONUS product in accordance with the requirements and qualifiers provided in the product table below.  
4

Cloud Type reports a cloud genus based on cloud characteristics, both at the microphysical and macrophysical level for all observable cloud layers. For the threshold the seven types of clouds are warm liquid water (water cloud with a cloud top warmer than 273.16 K), supercooled liquid water (water cloud with a cloud top colder than 273.16 K), mixed phase clouds (high probability of containing some ice near cloud top), cirrus clouds (ice clouds that are semi-transparent in the infrared), opaque ice clouds (high emissivity ice clouds), multilayered clouds (most often ice cloud overlapping water cloud) and clear (per the cloud mask).

*(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01466) (CCR01542) (CCR 01631) (CCR 02183 (RDW))*

MRD11 Product Geographic Coverage/Conditions: CONUS *(CCR 02183 (RDW))*  
76

MRD11 Product Vertical Resolution: N/A *(CCR 02183 (RDW))*  
77

MRD11 Product Horizontal Resolution: 10 km *(CCR 02183 (RDW))*  
78

MRD11 Product Mapping Accuracy: 5 km *(CCR 02183 (RDW))*  
79

MRD11 Product Measurement Range: 7 types *(CCR 02183 (RDW))*  
80

MRD11 Product Measurement Accuracy: 60% correct classification *(CCR 02183 (RDW))*  
81

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD11 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
82 (CCR 01899) (CCR 02183 (RDW))
- MRD11 Mission Product Data Latency: 10 min (CCR 02183 (RDW))  
83
- MRD11 Product Measurement Precision: Not applicable (CCR 01892) (CCR 02183 (RDW))  
84
- MRD11 Temporal Coverage Qualifier: Day and Night  
85 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage (CCR 02183 (RDW))
- MRD20 **3.3.3.2.30 Cloud Type: Hemispheric**  
5
- MRD20 The GOES-R System **shall** produce a Cloud Type: Hemispheric product in accordance with the requirements and qualifiers provided in the product table below.  
6
- Cloud Type reports a cloud genus based on cloud characteristics, both at the microphysical and macrophysical level for all observable cloud layers. For the threshold the seven types of clouds are warm liquid water (water cloud with a cloud top warmer than 273.16 K), supercooled liquid water (water cloud with a cloud top colder than 273.16 K), mixed phase clouds (high probability of containing some ice near cloud top), cirrus clouds (ice clouds that are semi-transparent in the infrared), opaque ice clouds (high emissivity ice clouds), multilayered clouds (most often ice cloud overlapping water cloud) and clear (per the cloud mask) (same as CONUS product except this version provides larger coverage).
- (CCR 01211) (CCR01543) (CCR 01466) (CCR01542) (CCR 01631) (CCR 02183 (RDW))
- MRD11 Product Geographic Coverage/Conditions: Full Disk (CCR 02183 (RDW))  
86
- MRD11 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
87
- MRD11 Product Horizontal Resolution: 2 km (CCR 02183 (RDW))  
88
- MRD11 Product Mapping Accuracy: 1 km (CCR 02183 (RDW))  
89
- MRD11 Product Measurement Range: 7 types (CCR 02183 (RDW))  
90
- MRD11 Product Measurement Accuracy: 60% correct classification (CCR 02183 (RDW))  
91
- MRD11 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
92 (CCR 01899) (CCR 02183 (RDW))
- MRD11 Mission Product Data Latency: 3 min (CCR 02183 (RDW))  
93
- MRD11 Product Measurement Precision: Not applicable (CCR 01892) (CCR 02183 (RDW))  
94

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD11 Temporal Coverage Qualifier: Day and Night  
95 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage (CCR 02183 (RDW))
- MRD20 **3.3.3.2.31 Cloud Type: Mesoscale**  
7
- MRD20 The GOES-R System **shall** produce a Cloud Type: Mesoscale product in accordance with the requirements and qualifiers provided in the product table below.  
8
- Cloud Type reports a cloud genus based on cloud characteristics, both at the microphysical and macrophysical level for all observable cloud layers. For the threshold the seven types of clouds are warm liquid water (water cloud with a cloud top warmer than 273.16 K), supercooled liquid water (water cloud with a cloud top colder than 273.16 K), mixed phase clouds (high probability of containing some ice near cloud top), cirrus clouds (ice clouds that are semi-transparent in the infrared), opaque ice clouds (high emissivity ice clouds), multilayered clouds (most often ice cloud overlapping water cloud) and clear (per the cloud mask) (same as CONUS product except this version provides mesoscale coverage).
- (CCR 01211) (CCR 01543) (CCR 01466) (CCR01542) (CCR 01611) (CCR 01631) (CCR 02183 (RDW))
- MRD11 Product Geographic Coverage/Conditions: Mesoscale (CCR 02183 (RDW))  
96
- MRD11 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
97
- MRD11 Product Horizontal Resolution: 2 km (CCR 02183 (RDW))  
98
- MRD11 Product Mapping Accuracy: 1 km (CCR 02183 (RDW))  
99
- MRD12 Product Measurement Range: 7 types (CCR 02183 (RDW))  
00
- MRD12 Product Measurement Accuracy: 60% correct classification (CCR 02183 (RDW))  
01
- MRD12 Product Refresh Rate/Coverage Time: 15 min (CCR 02183 (RDW))  
02
- MRD12 Mission Product Data Latency: 5 min (CCR 02183 (RDW))  
03
- MRD12 Product Measurement Precision: Not applicable (CCR 01892) (CCR 02183 (RDW))  
04
- MRD12 Temporal Coverage Qualifier: Day and Night  
05 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: In presence of clouds with optical depth > 1. Clear conditions down to cloud top associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage (CCR 02183 (RDW))

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD20 3.3.3.2.32 Convective Initiation: CONUS**  
9

MRD21 The GOES-R System **shall** produce a Convective Initiation: CONUS product in accordance with the requirements and qualifiers provided in the product table below.  
0

Convective Initiation reports atmospheric conditions that precede and attend rapid convective storm development based on the rapid evolution and motion of daytime cumulus indicating boundary layer convergence and high water vapor content. Observations of boundary layer moisture can indicate convective initiation even prior to cloud formation and prior to ground-based radar measured rainfall reflectivity of -35 dBZ.

(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01438) (CCR01542) (CCR 01631) (CCR 02183 (RDW))

MRD12 Product Geographic Coverage/Conditions: CONUS (CCR 02183 (RDW))  
06

MRD12 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
07

MRD12 Product Horizontal Resolution: 2 km (CCR 02183 (RDW))  
08

MRD12 Product Mapping Accuracy: 1 km (CCR 02183 (RDW))  
09

MRD12 Product Measurement Range: Binary yes/no detection (CCR 02183 (RDW))  
10

MRD12 Product Measurement Accuracy: 70% correct detection (CCR 02183 (RDW))  
11

MRD12 Product Refresh Rate/Coverage Time: 5 min (CCR 02183 (RDW))  
12

MRD12 Mission Product Data Latency: 3 min (CCR 02183 (RDW))  
13

MRD12 Product Measurement Precision: N/A (CCR 02183 (RDW))  
14

MRD12 Temporal Coverage Qualifier: Day and Night  
15

Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA

Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy.

Product Statistics Qualifier: Over specified geographic coverage (CCR 02183 (RDW))

**MRD79 3.3.3.2.33 Convective Initiation: Mesoscale**  
6

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD79 The GOES-R System **shall** produce a Convective Initiation: Mesoscale product in accordance with the  
7 requirements and qualifiers provided in the product table below.

Convective Initiation reports atmospheric conditions that precede and attend rapid convective storm development based on the rapid evolution and motion of daytime cumulus indicating boundary layer convergence and high water vapor content. Observations of boundary layer moisture can indicate convective initiation even prior to cloud formation and prior to ground-based radar measured rainfall reflectivity of -35 dBZ (same as CONUS product except this version provides mesoscale coverage).

(CCR 01214) (CCR 01211) (CCR01543) (CCR 01438) (CCR01542) (CCR 01631) (CCR 02183 (RDW))

MRD12 Product Geographic Coverage/Conditions: Mesoscale (CCR 02183 (RDW))  
16

MRD12 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
17

MRD12 Product Horizontal Resolution: 2 km (CCR 02183 (RDW))  
18

MRD12 Product Mapping Accuracy: 1 km (CCR 02183 (RDW))  
19

MRD12 Product Measurement Range: Binary yes/no detection (CCR 02183 (RDW))  
20

MRD12 Product Measurement Accuracy: 70% correct detection (CCR 02183 (RDW))  
21

MRD12 Product Refresh Rate/Coverage Time: 5 min (CCR 02183 (RDW))  
22

MRD12 Mission Product Data Latency: 3 min (CCR 02183 (RDW))  
23

MRD12 Product Measurement Precision: N/A (CCR 02183 (RDW))  
24

MRD12 Temporal Coverage Qualifier: Day and Night  
25 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy.  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183 (RDW))

MRD21 **3.3.3.2.34 Enhanced "V"/Overshooting Top Detection: CONUS**  
1

MRD21 The GOES-R System **shall** produce an Enhanced "V"/Overshooting Top Detection: CONUS product in  
2 accordance with the requirements and qualifiers provided in the product table below.

Enhanced "V"/Overshooting Top Detection reports very cold (cirrus) cloud matter in a multiple satellite images with the 'V' pattern likely representing a wake at tropospheric (overshooting) heights resulting from a strong vertical updraft. This updraft results in a warm region inside the V shape that is indicative of very rapid latent heat release in the thunderstorm, indicating intensification is occurring.

(CCR 01214) (CCR 01211) (CCR01543) (CCR 01438) (CCR01542) (CCR 01631) (CCR 02183 (RDW))

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD12 Product Geographic Coverage/Conditions: CONUS (*CCR 02183 (RDW)*)  
26
- MRD12 Product Vertical Resolution: N/A (*CCR 02183 (RDW)*)  
27
- MRD12 Product Horizontal Resolution: 2 km (*CCR 02183 (RDW)*)  
28
- MRD12 Product Mapping Accuracy: 1 km (*CCR 02183 (RDW)*)  
29
- MRD12 Product Measurement Range: Binary yes/no detection (160 - 270 K) (*CCR 02183 (RDW)*)  
30
- MRD12 Product Measurement Accuracy: 75% correct detection (in terms of 1 - False Alarm Rate) (*CCR 02183 (RDW)*)  
31
- MRD12 Product Refresh Rate/Coverage Time: 5 min (*CCR 02183 (RDW)*)  
32
- MRD12 Mission Product Data Latency: 3 min (*CCR 02183 (RDW)*)  
33
- MRD12 Product Measurement Precision: N/A  
34
- MRD12 Temporal Coverage Qualifier: Day and Night  
35  
Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy.  
Product Statistics Qualifier: Over enhanced V / Overshooting top cases  
(*CCR 02183 (RDW)*)
- MRD21 **3.3.3.2.35 Enhanced "V"/Overshooting Top Detection: Mesoscale**  
3
- MRD21 The GOES-R System **shall** produce an Enhanced "V"/Overshooting Top Detection: Mesoscale product in accordance with the requirements and qualifiers provided in the product table below.  
4
- Enhanced "V"/Overshooting Top Detection reports very cold (cirrus) cloud matter in multiple satellite images with the 'V' pattern likely representing a wake at tropospheric (overshooting) heights resulting from a strong vertical updraft. This updraft results in a warm region inside the V shape that is indicative of very rapid latent heat release in the thunderstorm, indicating intensification is occurring (same as CONUS product except this version provides mesoscale coverage).
- (*CCR 01214*) (*CCR 01211*) (*CCR 01438*) (*CCR 01543*) (*CCR01542*) (*CCR 01631*)( *CCR 02183 (RDW)*)
- MRD12 Product Geographic Coverage/Conditions: Mesoscale (*CCR 02183 (RDW)*)  
36
- MRD12 Product Vertical Resolution: N/A (*CCR 02183 (RDW)*)  
37
- MRD12 Product Horizontal Resolution: 2 km (*CCR 02183 (RDW)*)  
38
- MRD12 Product Mapping Accuracy: 1 km (*CCR 02183 (RDW)*)  
39



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD12 Product Measurement Range: Binary yes/no detection (160 - 270 K) (CCR 02183 (RDW))  
40
- MRD12 Product Measurement Accuracy: 75% correct detection (in terms of 1 - False Alarm Rate) (CCR 02183 (RDW))  
41
- MRD12 Product Refresh Rate/Coverage Time: 5 min (CCR 02183 (RDW))  
42
- MRD12 Mission Product Data Latency: 3 min (CCR 02183 (RDW))  
43
- MRD12 Product Measurement Precision: N/A (CCR 02183 (RDW))  
44
- MRD12 Temporal Coverage Qualifier: Day and Night  
45 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy.  
Product Statistics Qualifier: Over enhanced V / Overshooting top cases (CCR 02183 (RDW))
- MRD21 **3.3.3.2.36 Hurricane Intensity**  
5
- MRD21 The GOES-R System **shall** produce a Hurricane Intensity product in accordance with the requirements and qualifiers provided in the product table below.  
6
- Hurricane Intensity will report the position and strength of tropical storms based on the maximum surface wind speed via the Dvorak technique or an improved methodology. Tropical storms and hurricanes will be classified in the North Atlantic Ocean, Caribbean Sea, Gulf of Mexico, and in the Eastern North Pacific off the west coast of Mexico to the International Dateline.
- (CCR 01213) (CCR 01211) (CCR 01420A) (CCR01542) (CCR 01612) (CCR 01631)
- MRD12 Product Geographic Coverage/Conditions: Full Disk  
46
- MRD12 Product Vertical Resolution: N/A  
47
- MRD12 Product Horizontal Resolution: 2 km  
48
- MRD12 Product Mapping Accuracy: 1 km  
49
- MRD12 Product Measurement Range: Dvorak hurricane intensity scale values of 1.5 - 8 or leading to wind speeds of 12.8 m/s (25 knots) to 87.5 m/s (170 knots)  
50
- MRD12 Product Measurement Accuracy: 6.5 m/s over ocean (CCR 01892)  
51
- MRD12 Product Refresh Rate/Coverage Time: 30 min (5 min when 5 minute Full Disk data available) (CCR 01899) (CCR 02183 (RDW))  
52
- MRD12 Mission Product Data Latency: 3 min (CCR 01899) (CCR 02183 (RDW))  
53

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

- MRD12 Product Measurement Precision: 8.0 m/s over ocean (*CCR 01892*)  
54
- MRD12 Temporal Coverage Qualifier: Day and Night  
55 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy.  
Product Statistics Qualifier: Over oceanic tropical systems
- MRD22 **3.3.3.2.37 Lightning Detection: Hemispheric**  
1
- MRD22 The GOES-R System **shall** produce a Lightning Detection: Hemispheric product in accordance with the requirements and qualifiers provided in the product table below.  
2
- The Product will include the collection of Lightning Events, identification of contiguous Events as “Lightning Groups” and events having discrete time and space continuity as “Lightning Flashes.”
- Lightning Detection reports the location of lightning discharges observed by the satellite over the product observing period. The product includes cloud to cloud lightning and cloud to ground lightning when detectable in the near infrared.
- (*CCR 01211*) (*CCR 01345*) (*CCR 01543*) (*CCR01542*) (*CCR 01621*) (*CCR 01631*)
- MRD12 Product Geographic Coverage/Conditions: 100° by 100° rectangle from each satellite centered at nadir; aggregate of two satellites covers 25° W through 175° W and 50° N through 50° S  
56
- MRD12 Product Vertical Resolution: Surface to cloud top  
57
- MRD12 Product Horizontal Resolution: 10 km  
58
- MRD12 Product Mapping Accuracy: 5 km  
59
- MRD12 Product Measurement Range: 41900 events / sec for 0 – 84 events per frame; 0 – 8170 groups /sec for 0 – 16.5 groups per frame; 600 flashes/sec for 0 – 1.5 flashes per frame. (*CCR 01975*) (*CCR 02369*) (*RDW*)  
60
- MRD12 Product Measurement Accuracy: 70% total flash detection  
61
- MRD12 Product Refresh Rate/Coverage Time: 20 sec  
62
- MRD12 Mission Product Data Latency: 20 sec (*CCR 01729*)  
63
- MRD12 Product Measurement Precision: 5%  
64
- MRD12 Temporal Coverage Qualifier: Day and Night  
65 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Cloud cover conditions permitting observation of lightning associated with threshold accuracy  
Product Statistics Qualifier: Over lightning cases

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD22 3.3.3.2.38 Low Cloud and Fog**  
5

MRD22 The GOES-R System **shall** produce a Low Cloud and Fog product in accordance with the requirements  
6 and qualifiers provided in the product table below.

The Low Cloud and Fog product reports the location and thickness of low cloud and fog using multispectral imagery.

*(CCR 01099) (CCR 01211) (CCR 01543) (CCR 01438) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))*

MRD12 Product Geographic Coverage/Conditions: Full Disk *(CCR 02183 (RDW))*  
66

MRD12 Product Vertical Resolution: 0.5 km (depth) *(CCR 02183 (RDW))*  
67

MRD12 Product Horizontal Resolution: 2 km *(CCR 02183 (RDW))*  
68

MRD12 Product Mapping Accuracy: 1 km *(CCR 02183 (RDW))*  
69

MRD12 Product Measurement Range: Binary yes/no detection *(CCR 02183 (RDW))*  
70

MRD12 Product Measurement Accuracy: 70% correct detection *(CCR 02183 (RDW))*  
71

MRD12 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
72 *(CCR 01899) (CCR 02183 (RDW))*

MRD12 Mission Product Data Latency: 3 min *(CCR 02183 (RDW))*  
73

MRD12 Product Measurement Precision: N/A *(CCR 02183 (RDW))*  
74

MRD12 Temporal Coverage Qualifier: Day and Night  
75 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest (no high clouds obscuring fog) associated with threshold accuracy  
Product Statistics Qualifier: Over low cloud and fog cases with at least 42% occurrence in the region *(CCR 02183 (RDW))*

**MRD22 3.3.3.2.39 Tropopause Folding Turbulence Prediction: Hemispheric (CCR 01543)**  
7

MRD22 The GOES-R System **shall** produce a Tropopause Folding Turbulence Prediction: Hemispheric product  
8 in accordance with the requirements and qualifiers provided in the product table below.

Tropopause Folding Turbulence Prediction product reports hazardous vertical windshear conditions associated with upper level fronts and indicated by increased temperature contrast.

*(CCR 01211) (CCR 01347) (CCR 01543) (CCR 01438) (CCR 01542) (CCR 01613) (CCR 01631)(CCR 02183 (RDW))*

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD12 Product Geographic Coverage/Conditions: Full Disk (*CCR 02183 (RDW)*)  
76
- MRD12 Product Vertical Resolution: Sfc-100 mb (*CCR 02183 (RDW)*)  
77
- MRD12 Product Horizontal Resolution: 2 km (*CCR 02183 (RDW)*)  
78
- MRD12 Product Mapping Accuracy: 1 km (*CCR 02183 (RDW)*)  
79
- MRD12 Product Measurement Range: Binary yes/no detection above boundary layer for moderate of greater conditions (*CCR 02183 (RDW)*)  
80
- MRD12 Product Measurement Accuracy: 50% correct detection of moderate or greater turbulence (*CCR 02183 (RDW)*)  
81
- MRD12 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available) (*CCR 01899 (CCR 02183 (RDW))*)  
82
- MRD12 Mission Product Data Latency: 3 min (*CCR 02183 (RDW)*)  
83
- MRD12 Product Measurement Precision: N/A (*CCR 02183 (RDW)*)  
84
- MRD12 Temporal Coverage Qualifier: Day and Night  
85  
Product Extent Qualifier: Quantitative out to at least 70 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy  
Product Statistics Qualifier: Over the lengths of separate flight transects through the regions of positive prediction  
(*CCR 02183 (RDW)*)
- MRD22 **3.3.3.2.40 Tropopause Folding Turbulence Prediction: Mesoscale** (*CCR 01543*)  
9
- MRD23 The GOES-R System **shall** produce a Tropopause Folding Turbulence Prediction: Mesoscale product in accordance with the requirements and qualifiers provided in the product table below.  
0
- Tropopause Folding Turbulence Prediction product reports hazardous vertical windshear conditions associated with upper level fronts and indicated by increased temperature contrast (same as Hemispheric product except this version provides mesoscale coverage).
- (*CCR 01211 (CCR 01543) (CCR 01438) (CCR 01542) (CCR 01613) (CCR 01631) (CCR 02183 (RDW))*)
- MRD12 Product Geographic Coverage/Conditions: Mesoscale (*CCR 02183 (RDW)*)  
86
- MRD12 Product Vertical Resolution: Sfc - 100 mb (*CCR 02183 (RDW)*)  
87
- MRD12 Product Horizontal Resolution: 2 km (*CCR 02183 (RDW)*)  
88
- MRD12 Product Mapping Accuracy: 1 km (*CCR 02183 (RDW)*)  
89

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD12 Product Measurement Range: Binary yes/no detection above boundary layer for moderate of greater  
90 conditions (*CCR 02183 (RDW)*)
- MRD12 Product Measurement Accuracy: 50% correct detection of moderate or greater turbulence  
91 (*CCR 01728 (CCR 02183 (RDW))*)
- MRD12 Product Refresh Rate/Coverage Time: 5 min (*CCR 02183 (RDW)*)  
92
- MRD12 Mission Product Data Latency: 5 min (*CCR 02183 (RDW)*)  
93
- MRD12 Product Measurement Precision: N/A (*CCR 02183 (RDW)*)  
94
- MRD12 Temporal Coverage Qualifier: Day and Night  
95 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy  
Product Statistics Qualifier: Over the lengths of separate flight transects through the regions of positive prediction  
(*CCR 02183 (RDW)*)
- MRD23 **3.3.3.2.41 Visibility: Hemispheric**  
3
- MRD23 The GOES-R System **shall** produce a Visibility: Hemispheric product in accordance with the  
4 requirements and qualifiers provided in the product table below.
- Visibility product reports the greatest horizontal distance at which objects can be seen by the unaided eye before being obscured by clouds, fog, aerosols, or darkness. The product is azimuthally average visibility.
- (*CCR 01211 (CCR 01543 (CCR 01438 (CCR 01542 (CCR 01631 (CCR 02183 (RDW))*)
- MRD12 Product Geographic Coverage/Conditions: Full Disk (*CCR 02183 (RDW)*)  
96
- MRD12 Product Vertical Resolution: N/A (*CCR 02183 (RDW)*)  
97
- MRD12 Product Horizontal Resolution: 10 km (*CCR 02183 (RDW)*)  
98
- MRD12 Product Mapping Accuracy: 5 km (*CCR 02183 (RDW)*)  
99
- MRD13 Product Measurement Range: Clear ( $\text{vis} \geq 30 \text{ km}$ ), Moderate ( $10 \text{ km} \leq \text{vis} < 30 \text{ km}$ ), Low ( $2 \text{ km} \leq \text{vis}$   
00  $< 10 \text{ km}$ ) and Poor ( $\text{vis} < 2 \text{ km}$ ) under the conditions of clear up through clouds of only layer  
(*CCR 02183 (RDW)*)
- MRD13 Product Measurement Accuracy: 80% correct classification (*CCR 02183 (RDW)*)  
01
- MRD13 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
02 (*CCR 01899 (CCR 02183 (RDW))*)
- MRD13 Mission Product Data Latency: 15 min (*CCR 02183 (RDW)*)  
03

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD13 Product Measurement Precision: 1.5 categories (*CCR 02183 (RDW)*)  
04
- MRD13 Temporal Coverage Qualifier: Day  
05 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA (Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage (*CCR 02183 (RDW)*)
- MRD23 **3.3.3.3 Precipitation**  
5
- MRD23 **3.3.3.3.1 Probability of Rainfall**  
6
- MRD23 The GOES-R System **shall** produce a Probability of Rainfall product in accordance with the requirements and qualifiers provided in the product table below.  
7
- Probability (or chance) of Rainfall is the likelihood of occurrence, expressed as a percentage, that measurable rainfall (0.01 inch or more) will occur at any point within a specified forecast area during the next three hours.
- (*CCR 01211*) (*CCR 01460*) (*CCR 01542*) (*CCR 01614*) (*CCR 01631*) (*CCR 02183 (RDW)*)
- MRD13 Product Geographic Coverage/Conditions: Full Disk (*CCR 02183 (RDW)*)  
06
- MRD13 Product Vertical Resolution: N/A (*CCR 02183 (RDW)*)  
07
- MRD13 Product Horizontal Resolution: 2 km (*CCR 02183 (RDW)*)  
08
- MRD13 Product Mapping Accuracy: 1 km (*CCR 02183 (RDW)*)  
09
- MRD13 Product Measurement Range: 0 to 100% (*CCR 02183 (RDW)*)  
10
- MRD13 Product Measurement Accuracy: 25% (*CCR 02183 (RDW)*)  
11
- MRD13 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available) (*CCR 01899*) (*CCR 02183 (RDW)*)  
12
- MRD13 Mission Product Data Latency: 5 min (*CCR 02183 (RDW)*)  
13
- MRD13 Product Measurement Precision: 40% (*CCR 02183 (RDW)*)  
14
- MRD13 Temporal Coverage Qualifier: Day and Night  
15 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA or 60 degrees latitude, whichever is less, and qualitative beyond  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over rain cases and mesoscale-sized surrounding regions (*CCR 02183 (RDW)*)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD23 3.3.3.3.2 Rainfall Potential**  
8

MRD23 The GOES-R System **shall** produce a Rainfall Potential product in accordance with the requirements  
9 and qualifiers provided in the product table below.

Rainfall potential provides a gridded quantitative assessment of the 3-hour rainfall potential.

*(CCR 01211) (CCR 01543) (CCR 01460) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))*

MRD13 Product Geographic Coverage/Conditions: Full Disk *(CCR 02183 (RDW))*  
16

MRD13 Product Vertical Resolution: N/A *(CCR 02183 (RDW))*  
17

MRD13 Product Horizontal Resolution: 2 km *(CCR 02183 (RDW))*  
18

MRD13 Product Mapping Accuracy: 1 km *(CCR 02183 (RDW))*  
19

MRD13 Product Measurement Range: 0 to 100 mm *(CCR 02183 (RDW))*  
20

MRD13 Product Measurement Accuracy: 5 mm for pixels designated as raining *(CCR 02183 (RDW))*  
21

MRD13 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
22 *(CCR 01899) (CCR 02183 (RDW))*

MRD13 Mission Product Data Latency: 5 min *(CCR 02183 (RDW))*  
23

MRD13 Product Measurement Precision: 5 mm for pixels designated as raining *(CCR 02183 (RDW))*  
24

MRD13 Temporal Coverage Qualifier: Day and Night  
25 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA or 60 degrees latitude, whichever  
is less, and qualitative beyond  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over rainfall cases  
*(CCR 02183 (RDW))*

**MRD24 3.3.3.3.3 Rainfall Rate/QPE**  
0

MRD24 The GOES-R System **shall** produce a Rainfall Rate/QPE product in accordance with the requirements  
1 and qualifiers provided in the product table below.

Rainfall Rate/Quantitative Precipitation Estimation (QPE) provides a gridded quantitative estimate of  
instantaneous rainfall rate.

*(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01460) (CCR 01542) (CCR 01631)*

MRD13 Product Geographic Coverage/Conditions: Full Disk  
26

MRD13 Product Vertical Resolution: N/A  
27

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD13 Product Horizontal Resolution: 2 km  
28
- MRD13 Product Mapping Accuracy: 2 km  
29
- MRD13 Product Measurement Range: 0 to 100 mm / hr  
30
- MRD13 Product Measurement Accuracy: 6 mm/hr at 10 mm/hr rate with higher values at higher rates  
31
- MRD13 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
32  
(CCR 01899) (CCR 02183 (RDW))
- MRD13 Mission Product Data Latency: 1 min (CCR 01899) (CCR 02183 (RDW))  
33
- MRD13 Product Measurement Precision: 9 mm/hr at 10 mm/hr rate with higher values at higher rates (CCR  
34  
02551 (RDW))
- MRD13 Temporal Coverage Qualifier: Day and Night  
35  
Product Extent Qualifier: Quantitative out to at least 70 degrees LZA or 60 degrees latitude, whichever  
is less, and qualitative beyond  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over rain cases and mesoscale-sized surrounding regions. Quantitative for  
convective rainfall and qualitative for stratiform rainfall.  
(CCR 01892)
- MRD24 **3.3.3.4 Profiles, Indices, Total Water**  
2
- MRD79 **3.3.3.4.1 Legacy Vertical Moisture Profile: CONUS**  
8
- MRD80 The GOES-R System **shall** produce a Legacy Vertical Moisture Profile: CONUS product in accordance  
1 with the requirements and qualifiers provided in the product table below.
- Legacy Vertical Moisture Profile draws upon Numerical Weather Prediction (NWP) input and adds the  
moisture band information from ABI to provide an improved profile following the inherent vertical  
resolution (or layer averaging) of the input NWP data.
- (CCR 01214) (CCR 01211) (CCR 01543) (CCR 01542) (CCR 01615) (CCR 01631)
- MRD13 Product Geographic Coverage/Conditions: CONUS  
36
- MRD13 Product Vertical Resolution: Reflects layering of NWP Models; inherent vertical resolution is only 3  
37 to 5 km
- MRD13 Product Horizontal Resolution: 10 km  
38
- MRD13 Product Mapping Accuracy: 5 km  
39
- MRD13 Product Measurement Range: 0 to 100%  
40
- MRD13 Product Measurement Accuracy: Sfc-500 mb: 18% relative humidity 500-300 mb: 18% relative  
41 humidity 300-100 mb: 20% relative humidity



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD13 Product Refresh Rate/Coverage Time: 30 min (5 min when 5 minute Full Disk data available)  
42 (CCR 01899) (CCR 02183 (RDW))

MRD13 Mission Product Data Latency: 5 min  
43

MRD13 Product Measurement Precision: Sfc-500mb: 18% relative humidity 500-300 mb: 18% relative  
44 humidity 300-100mb: 20% relative humidity

MRD13 Temporal Coverage Qualifier: Day and Night  
45 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at  
larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD79 **3.3.3.4.2 Legacy Vertical Moisture Profile: Hemispheric**  
9

MRD80 The GOES-R System **shall** produce a Legacy Vertical Moisture Profile: Hemispheric product in  
2 accordance with the requirements and qualifiers provided in the product table below.

Legacy Vertical Moisture Profile draws upon Numerical Weather Prediction (NWP) input and adds the moisture band information from ABI to provide an improved profile following the inherent vertical resolution (or layer averaging) of the input NWP data (same as CONUS product except this version provides hemispheric coverage).

(CCR 01211) (CCR 01543) (CCR 01542) (CCR 01615) (CCR 01631)

MRD13 Product Geographic Coverage/Conditions: Full Disk  
46

MRD13 Product Vertical Resolution: Reflects layering of NWP Models; inherent vertical resolution is only 3  
47 to 5 km

MRD13 Product Horizontal Resolution: 10 km  
48

MRD13 Product Mapping Accuracy: 5 km  
49

MRD13 Product Measurement Range: 0 to 100%  
50

MRD13 Product Measurement Accuracy: Sfc-500 mb: 18% relative humidity 500-300 mb: 18% relative  
51 humidity 300-100 mb: 20% relative humidity

MRD13 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
52 (CCR 01899) (CCR 02183 (RDW))

MRD13 Mission Product Data Latency: 5 min  
53

MRD13 Product Measurement Precision: Sfc-500mb: 18% relative humidity 500-300 mb: 18% relative  
54 humidity 300-100mb: 20% relative humidity

MRD13 Temporal Coverage Qualifier: Day and Night  
55 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at  
larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD80 3.3.3.4.3 Legacy Vertical Moisture Profile: Mesoscale**  
0

MRD80 3 The GOES-R System **shall** produce a Legacy Vertical Moisture Profile: Mesoscale product in accordance with the requirements and qualifiers provided in the product table below.

Legacy Vertical Moisture Profile draws upon Numerical Weather Prediction (NWP) input and adds the moisture band information from ABI to provide an improved profile following the inherent vertical resolution (or layer averaging) of the input NWP data (same as CONUS product except this version provides mesoscale coverage).

*(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01542) (CCR 01615) (CCR 01631)*

MRD13 Product Geographic Coverage/Conditions: Mesoscale  
56

MRD13 Product Vertical Resolution: Reflects layering of NWP Models; inherent vertical resolution is only 3  
57 to 5 km

MRD13 Product Horizontal Resolution: 10 km  
58

MRD13 Product Mapping Accuracy: 5 km  
59

MRD13 Product Measurement Range: 0 to 100%  
60

MRD13 Product Measurement Accuracy: Sfc-500 mb: 18% relative humidity 500-300 mb: 18% relative  
61 humidity 300-100 mb: 20% relative humidity

MRD13 Product Refresh Rate/Coverage Time: 5 min  
62

MRD13 Mission Product Data Latency: 5 min  
63

MRD13 Product Measurement Precision: Sfc-500mb: 18% relative humidity 500-300 mb: 18% relative  
64 humidity 300-100mb: 20% relative humidity

MRD13 Temporal Coverage Qualifier: Day and Night  
65 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

**MRD80 3.3.3.4.4 Legacy Vertical Temperature Profile: CONUS**  
4

MRD80 7 The GOES-R System **shall** produce a Legacy Vertical Temperature Profile: CONUS product in accordance with the requirements and qualifiers provided in the product table below.

Legacy Vertical Temperature Profile draws upon NWP input and adds the moisture band information from ABI to provide an improved profile following the inherent vertical resolution (or layer averaging) of the input NWP data.

*(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01439) (CCR 01542) (CCR 01615) (CCR 01631)*

MRD13 Product Geographic Coverage/Conditions: CONUS  
66

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD13 Product Vertical Resolution: Reflects layering of NWP Models; inherent vertical resolution is only 3  
67 to 5 km

MRD13 Product Horizontal Resolution: 10 km  
68

MRD13 Product Mapping Accuracy: 5 km  
69

MRD13 Product Measurement Range: 180 - 320 K  
70

MRD13 Product Measurement Accuracy: 1K below 400 hPa and above boundary layer  
71

MRD13 Product Refresh Rate/Coverage Time: 30 min (5 min when 5 minute Full Disk data available)  
72 (*CCR 01899*) (*CCR 02183 (RDW)*)

MRD13 Mission Product Data Latency: 5 min  
73

MRD13 Product Measurement Precision: 2K below 400 hPa and above boundary layer  
74

MRD13 Temporal Coverage Qualifier: Day and Night  
75 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD80 **3.3.3.4.5 Legacy Vertical Temperature Profile: Hemispheric**  
5

MRD80 The GOES-R System **shall** produce a Legacy Vertical Temperature Profile: Hemispheric product in  
8 accordance with the requirements and qualifiers provided in the product table below.

Legacy Vertical Temperature Profile draws upon NWP input and adds the moisture band information from ABI to provide an improved profile following the inherent vertical resolution (or layer averaging) of the input NWP data (same as CONUS product except this version provides hemispheric coverage).

(*CCR 01211*) (*CCR 01543*) (*CCR 01439*) (*CCR 01542*) (*CCR 01615*) (*CCR 01631*)

MRD13 Product Geographic Coverage/Conditions: Full Disk  
76

MRD13 Product Vertical Resolution: Reflects layering of NWP Models; inherent vertical resolution is only 3  
77 to 5 km

MRD13 Product Horizontal Resolution: 10 km  
78

MRD13 Product Mapping Accuracy: 5 km  
79

MRD13 Product Measurement Range: 180 - 320 K  
80

MRD13 Product Measurement Accuracy: 1K below 400 hPa and above boundary layer  
81

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD13 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
82 (CCR 01899) (CCR 02183 (RDW))

MRD13 Mission Product Data Latency: 5 min  
83

MRD13 Product Measurement Precision: 2K below 400 hPa and above boundary layer  
84

MRD13 Temporal Coverage Qualifier: Day and Night  
85 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD80 **3.3.3.4.6 Legacy Vertical Temperature Profile: Mesoscale**  
6

MRD80 The GOES-R System **shall** produce a Legacy Vertical Temperature Profile: Mesoscale product in  
9 accordance with the requirements and qualifiers provided in the product table below.

Legacy Vertical Temperature Profile draws upon NWP input and adds the moisture band information from ABI to provide an improved profile following the inherent vertical resolution (or layer averaging) of the input NWP data (same as CONUS product except this version provides mesoscale coverage).

(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01439) (CCR 01542) (CCR 01615) (CCR 01631)

MRD13 Product Geographic Coverage/Conditions: Mesoscale  
86

MRD13 Product Vertical Resolution: Reflects layering of NWP Models; inherent vertical resolution is only 3  
87 to 5 km

MRD13 Product Horizontal Resolution: 10 km  
88

MRD13 Product Mapping Accuracy: 5 km  
89

MRD13 Product Measurement Range: 180 - 320 K  
90

MRD13 Product Measurement Accuracy: 1K below 400 hPa and above boundary layer  
91

MRD13 Product Refresh Rate/Coverage Time: 5 min  
92

MRD13 Mission Product Data Latency: 5 min  
93

MRD13 Product Measurement Precision: 2K below 400 hPa and above boundary layer  
94

MRD13 Temporal Coverage Qualifier: Day and Night  
95 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD24 3.3.3.4.7 Derived Stability Indices: CONUS**  
3

MRD24 The GOES-R System **shall** produce a Derived Stability Indices: CONUS product in accordance with  
4 the requirements and qualifiers provided in the product table below.

The following Derived Stability Indices are addressed by these five products.

*Lifted Index (LI) (Degrees Celsius):* The Lifted Index is calculated by lifting (frontal, orographic, upper air dynamics, etc.) a parcel of air dry adiabatically while conserving moisture until it reaches saturation. At that point the parcel is lifted moist adiabatically up to 500 mb. The Lifted Index is the ambient air temperature minus the lifted parcel temperature at 500 mb.

*Convective Available Potential Energy (CAPE, Joules/kg):* Convective Available Potential Energy, a measure of the cumulative buoyancy of a parcel as it rises, in units of Joules per kilogram. CAPE values larger than 1000 J/kg represent moderate amounts of atmospheric potential energy. Values exceeding 3000 J/kg are indicative of very large amounts of potential energy, and are often associated with strong/severe weather. Graphically, the CAPE is the positively buoyant area (shaded purple) on the skew-t diagram.

*Total Totals Index (TT):* The Total Totals Index is computed using discrete pressure level information and is indicative of severe weather potential. Its formula is:  $TT=(T850+TD850)-(T500)$ . Generally, TT values below 40-45 are indicators of little or no thunderstorm activity, while values exceeding 55 in the Eastern and Central United States or 65 in the Western United States are indicators of considerable severe weather, including the potential for tornadic activity.

*Showalter Index (SI):* The SI is a parcel-based index, calculated in the same manner as the Lifted Index, using a parcel at 850 mb. That is, the 850 mb parcel is lifted to saturation, then moist adiabatically to 500 mb. The difference between the parcel and environment at 500 mb is the Showalter Index.

*K index (KI):* The K-Index is a simple index using data from discrete pressure levels, instead of a lifted parcel. It is based on vertical temperature changes, moisture content of the lower atmosphere, and the vertical extent of the moist layer. The higher the K-Index the more conducive the atmosphere is to convection. The formula for KI is:

$KI=(T850 \text{ mb}-T500 \text{ mb}) + [(TD850 \text{ mb} - (T700 \text{ mb} - TD700 \text{ mb}))]$  where:  
T=Temperature

(CCR 01298) (CCR 01543) (CCR 01439) (CCR 01542) (CCR 01615) (CCR 01631)

MRD13 Product Geographic Coverage/Conditions: CONUS  
96

MRD13 Product Vertical Resolution: N/A  
97

MRD13 Product Horizontal Resolution: 10 km  
98

MRD13 Product Mapping Accuracy: 2 km  
99

MRD14 Product Measurement Range: Lifted Index: -10 K - 40 K CAPE: 0-5000 J/kg Showalter index: >4 to -  
00 10 K Total totals Index: -43 to > 56 K index: 0 - 40

MRD14 Product Measurement Accuracy: Lifted Index: 2.0 K CAPE: 1000 J/ kg Showalter index: 2 Total  
01 totals Index: 1 K index: 2

MRD14 Product Refresh Rate/Coverage Time: 30 min (5 min when 5 minute Full Disk data available)  
02 (CCR 01899) (CCR 02183 (RDW))

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD14 Mission Product Data Latency: 3 min  
03

MRD14 Product Measurement Precision: Lifted Index: 6.5 K; CAPE: 2500 J/kg; Showalter index: 6.5 K;  
04 Total totals Index: 4 K; K-index: 6.5 K (CCR 01977)

MRD14 Temporal Coverage Qualifier: Day and Night  
05 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD82 **3.3.3.4.8 Derived Stability Indices: Hemispheric (CCR 01543)**  
1

MRD82 The GOES-R System **shall** produce a Derived Stability Indices: Hemispheric product in accordance  
2 with the requirements and qualifiers provided in the product table below.

The following Derived Stability Indices are addressed by these five products.

*Lifted Index (LI) (Degrees Celsius):* The Lifted Index is calculated by lifting (frontal, orographic, upper air dynamics, etc.) a parcel of air dry adiabatically while conserving moisture until it reaches saturation. At that point the parcel is lifted moist adiabatically up to 500 mb. The Lifted Index is the ambient air temperature minus the lifted parcel temperature at 500 mb.

*Convective Available Potential Energy (CAPE, Joules/kg):* Convective Available Potential Energy, a measure of the cumulative buoyancy of a parcel as it rises, in units of Joules per kilogram. CAPE values larger than 1000 J/kg represent moderate amounts of atmospheric potential energy. Values exceeding 3000 J/kg are indicative of very large amounts of potential energy, and are often associated with strong/severe weather. Graphically, the CAPE is the positively buoyant area (shaded purple) on the skew-t diagram.

*Total Totals Index (TT):* The Total Totals Index is computed using discrete pressure level information and is indicative of severe weather potential. Its formula is:  $TT=(T850+TD850)-2(T500)$ . Generally, TT values below 40-45 are indicators of little or no thunderstorm activity, while values exceeding 55 in the Eastern and Central United States or 65 in the Western United States are indicators of considerable severe weather, including the potential for tornadic activity.

*Showalter Index (SI):* The SI is a parcel-based index, calculated in the same manner as the Lifted Index, using a parcel at 850 mb. That is, the 850 mb parcel is lifted to saturation, then moist adiabatically to 500 mb. The difference between the parcel and environment at 500 mb is the Showalter Index.

*K index (KI):* The K-Index is a simple index using data from discrete pressure levels, instead of a lifted parcel. It is based on vertical temperature changes, moisture content of the lower atmosphere, and the vertical extent of the moist layer. The higher the K-Index the more conducive the atmosphere is to convection. The formula for KI is:

$KI=(T850 \text{ mb}-T500 \text{ mb}) + [(TD850 \text{ mb} - (T700 \text{ mb} - TD700 \text{ mb}))]$  where:  
T=Temperature

(same as CONUS product except this version provides hemispheric coverage)

(CCR 01543) (CCR 01542) (CCR 01615) (CCR 01631)

MRD14 Product Geographic Coverage/Conditions: Full Disk  
06

MRD14 Product Vertical Resolution: N/A  
07

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD14 Product Horizontal Resolution: 10 km  
08
- MRD14 Product Mapping Accuracy: 2 km  
09
- MRD14 Product Measurement Range: Lifted Index: -10 K - 40 K CAPE: 0-5000 J/kg Showalter index: >4 to -  
10 10 K Total totals Index: -43 to > 56 K index: 0 - 40
- MRD14 Product Measurement Accuracy: Lifted Index: 2.0 K CAPE: 1000 J/ kg Showalter index: 2 Total  
11 totals Index: 1 K index: 2
- MRD14 Product Refresh Rate/Coverage Time: 60 min (15 min when 5 minute data available)  
12 (CCR 01899) (CCR 02183 (RDW))
- MRD14 Mission Product Data Latency: 3 min  
13
- MRD14 Product Measurement Precision: Lifted Index: 6.5 K CAPE: 2500 J/ kg Showalter index: 6.5 K Total  
14 totals Index: 4 K K index: 5 K
- MRD14 Temporal Coverage Qualifier: Day and Night  
15 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

**MRD24 3.3.3.4.9 Derived Stability Indices: Mesoscale**  
5

- MRD24 The GOES-R System **shall** produce a Derived Stability Indices: Mesoscale product in accordance with  
6 the requirements and qualifiers provided in the product table below.

The following Derived Stability Indices are addressed by these five products.

*Lifted Index (LI) (Degrees Celsius):* The Lifted Index is calculated by lifting (frontal, orographic, upper air dynamics, etc.) a parcel of air dry adiabatically while conserving moisture until it reaches saturation. At that point the parcel is lifted moist adiabatically up to 500 mb. The Lifted Index is the ambient air temperature minus the lifted parcel temperature at 500 mb.

*Convective Available Potential Energy (CAPE, Joules/kg):* Convective Available Potential Energy, a measure of the cumulative buoyancy of a parcel as it rises, in units of Joules per kilogram. CAPE values larger than 1000 J/kg represent moderate amounts of atmospheric potential energy. Values exceeding 3000 J/kg are indicative of very large amounts of potential energy, and are often associated with strong/severe weather. Graphically, the CAPE is the positively buoyant area (shaded purple) on the skew-t diagram.

*Total Totals Index (TT):* The Total Totals Index is computed using discrete pressure level information and is indicative of severe weather potential. Its formula is:  $TT=(T850+TD850)-2(T500)$ . Generally, TT values below 40-45 are indicators of little or no thunderstorm activity, while values exceeding 55 in the Eastern and Central United States or 65 in the Western United States are indicators of considerable severe weather, including the potential for tornadic activity.

*Showalter Index (SI):* The SI is a parcel-based index, calculated in the same manner as the Lifted Index, using a parcel at 850 mb. That is, the 850 mb parcel is lifted to saturation, then moist adiabatically to 500 mb. The difference between the parcel and environment at 500 mb is the Showalter Index.

*K index (KI):* The K-Index is a simple index using data from discrete pressure levels, instead of a lifted parcel. It is based on vertical temperature changes, moisture content of the lower atmosphere, and the vertical extent of the moist layer. The higher the K-Index the more conducive the atmosphere is to

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD24 convection. The formula for KI is:  
 6  $KI=(T850\text{ mb}-T500\text{ mb}) + [(TD850\text{ mb} - (T700\text{ mb} - TD700\text{ mb}))]$  where:  
 T=Temperature  
 (same as CONUS product except this version provides mesoscale coverage)  
 (CCR 01214) (CCR 01211) (CCR 01298) (CCR 01543) (CCR 01439) (CCR 01542) (CCR 01615)(CCR 01631)
- MRD14 Product Geographic Coverage/Conditions: Mesoscale  
 16
- MRD14 Product Vertical Resolution: N/A  
 17
- MRD14 Product Horizontal Resolution: 10 km  
 18
- MRD14 Product Mapping Accuracy: 2 km  
 19
- MRD14 Product Measurement Range: Lifted Index: -10 K - 40 K CAPE: 0-5000 J/kg Showalter index: >4 to -  
 20 10 K Total totals Index: -43 to > 56 K index: 0 - 40
- MRD14 Product Measurement Accuracy: Lifted Index: 2.0 K CAPE: 1000 J/ kg Showalter index: 2 Total  
 21 totals Index: 1 K index: 2
- MRD14 Product Refresh Rate/Coverage Time: 5 min  
 22
- MRD14 Mission Product Data Latency: 5 min  
 23
- MRD14 Product Measurement Precision: Lifted Index: 6.5 K CAPE: 2500 J/ kg Showalter index: 6.5 K Total  
 24 totals Index: 4 K K index: 5 K
- MRD14 Temporal Coverage Qualifier: Day and Night  
 25 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage
- MRD81 **3.3.3.4.10 Total Precipitable Water: CONUS (CCR 01214)**  
 2
- MRD81 The GOES-R System **shall** produce a Total Precipitable Water: CONUS product in accordance with the  
 3 requirements and qualifiers provided in the product table below.  
 Total Precipitable Water is the amount of atmospheric water vapor contained in a vertical column of unit cross-sectional area, subdivided by height when more than column measurements are made.  
 (CCR 01214) (CCR 01543) (CCR 01542) (CCR 01631)
- MRD14 Product Geographic Coverage/Conditions: CONUS  
 26
- MRD14 Product Vertical Resolution: N/A  
 27



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD14 Product Horizontal Resolution: 10 km  
28
- MRD14 Product Mapping Accuracy: 2 km  
29
- MRD14 Product Measurement Range: 0 - 100 mm  
30
- MRD14 Product Measurement Accuracy: 1 mm  
31
- MRD14 Product Refresh Rate/Coverage Time: 30 min (5 min when 5 minute Full Disk data available)  
32 (CCR 01899) (CCR 02183 (RDW))
- MRD14 Mission Product Data Latency: 5 min (CCR 01798)  
33
- MRD14 Product Measurement Precision: 3 mm  
34
- MRD14 Temporal Coverage Qualifier: Day and Night  
35 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage
- MRD24 **3.3.3.4.11 Total Precipitable Water: Hemispheric**  
7
- MRD24 The GOES-R System **shall** produce a Total Precipitable Water: Hemispheric product in accordance  
8 with the requirements and qualifiers provided in the product table below.
- Total Precipitable Water is the amount of atmospheric water vapor contained in a vertical column of unit cross-sectional area, subdivided by heights when more than column measurements are made.
- (CCR 01214) (CCR 01211) (CCR 01543) (CCR 01542) (CCR 01614) (CCR 01631)
- MRD14 Product Geographic Coverage/Conditions: Full Disk  
37
- MRD14 Product Vertical Resolution: N/A  
38
- MRD14 Product Horizontal Resolution: 10 km  
39
- MRD14 Product Mapping Accuracy: 2 km  
40
- MRD14 Product Measurement Range: 0 - 100 mm  
41
- MRD14 Product Measurement Accuracy: 1 mm  
42
- MRD14 Product Refresh Rate/Coverage Time: 60 min (15 min when 5 minute data available)  
43 (CCR 01899) (CCR 02183 (RDW))

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD14 Mission Product Data Latency: 15 min  
44
- MRD14 Product Measurement Precision: 3 mm  
45
- MRD14 Temporal Coverage Qualifier: Day and Night  
46 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 01892)
- MRD81 **3.3.3.4.12 Total Precipitable Water: Mesoscale (CCR 01214)**  
4
- MRD81 The GOES-R System **shall** produce a Total Precipitable Water: Mesoscale product in accordance with  
5 the requirements and qualifiers provided in the product table below.
- Total Precipitable Water is the amount of atmospheric water vapor contained in a vertical column of unit cross-sectional area, subdivided by height when more than column measurements are made.
- (CCR 01214) (CCR 01543) (CCR 01542) (CCR 01631)
- MRD14 Product Geographic Coverage/Conditions: Mesoscale  
47
- MRD14 Product Vertical Resolution: N/A  
48
- MRD14 Product Horizontal Resolution: 10 km  
49
- MRD14 Product Mapping Accuracy: 2 km  
50
- MRD14 Product Measurement Range: 0 - 100 mm  
51
- MRD14 Product Measurement Accuracy: 1 mm  
52
- MRD14 Product Refresh Rate/Coverage Time: 5 min  
53
- MRD14 Mission Product Data Latency: 5 min  
54
- MRD14 Product Measurement Precision: 3 mm  
55
- MRD14 Temporal Coverage Qualifier: Day and Night  
56 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA Threshold) and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions down to feature of interest associated with threshold accuracy
- MRD25 **3.3.3.5 Radiances**  
5

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD25 3.3.3.5.1 Clear Sky Masks: CONUS**  
6

MRD25 The GOES-R System **shall** produce a Clear Sky Masks: CONUS product in accordance with the  
7 requirements and qualifiers provided in the product table below.

Clear Sky Mask reports the location of the cloud free vertical columns of the atmosphere. It is the opposite of a cloud mask.

*(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01466) (CCR 01616) (CCR 01631)*

MRD14 Product Geographic Coverage/Conditions: CONUS  
57

MRD14 Product Vertical Resolution: N/A  
58

MRD14 Product Horizontal Resolution: 2 km  
59

MRD14 Product Mapping Accuracy: 1 km  
60

MRD14 Product Measurement Range: Binary yes/no detection  
61

MRD14 Product Measurement Accuracy: 87% correct detection  
62

MRD14 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
63 *(CCR 01899) (CCR 02183 (RDW))*

MRD14 Mission Product Data Latency: 5 min  
64

MRD14 Product Measurement Precision: N/A  
65

MRD14 Temporal Coverage Qualifier: Day and Night  
66 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

**MRD25 3.3.3.5.2 Clear Sky Masks: Hemispheric**  
8

MRD25 The GOES-R System **shall** produce a Clear Sky Masks: Hemispheric product in accordance with the  
9 requirements and qualifiers provided in the product table below.

Clear Sky Mask reports the location of the cloud free vertical columns of the atmosphere. It is the opposite of a cloud mask (same as CONUS product except this version provides larger coverage).

*(CCR 01211) (CCR 01543) (CCR 01466) (CCR 01542) (CCR 01616) (CCR 01631)*

MRD14 Product Geographic Coverage/Conditions: Full Disk  
67

MRD14 Product Vertical Resolution: N/A  
68

**ID                    410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD14    Product Horizontal Resolution: 2 km  
69

MRD14    Product Mapping Accuracy: 1 km  
70

MRD14    Product Measurement Range: Binary yes/no detection  
71

MRD14    Product Measurement Accuracy: 87% correct detection  
72

MRD14    Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
73    (*CCR 01899*) (*CCR 02183 (RDW)*)

MRD14    Mission Product Data Latency: 15 min  
74

MRD14    Product Measurement Precision: N/A  
75

MRD14    Temporal Coverage Qualifier: Day and Night  
76    Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD26    **3.3.3.5.3 Clear Sky Masks: Mesoscale**  
0

MRD26    The GOES-R System **shall** produce a Clear Sky Masks: Mesoscale product in accordance with the  
1    requirements and qualifiers provided in the product table below.

Clear Sky Mask reports the location of the cloud free vertical columns of the atmosphere. It is the opposite of a cloud mask (same as CONUS product except this version provides mesoscale coverage).

(*CCR 01211*) (*CCR 01543*) (*CCR 01466*) (*CCR 01542*) (*CCR 01616*) (*CCR 01631*)

MRD14    Product Geographic Coverage/Conditions: Mesoscale  
78

MRD14    Product Vertical Resolution: N/A  
79

MRD14    Product Horizontal Resolution: 2 km  
80

MRD14    Product Mapping Accuracy: 1 km  
81

MRD14    Product Measurement Range: Binary yes/no detection  
82

MRD14    Product Measurement Accuracy: 87% correct detection  
83

MRD14    Product Refresh Rate/Coverage Time: 5 min  
84

MRD14    Mission Product Data Latency: 5 min  
85

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD14 Product Measurement Precision: N/A  
86

MRD14 Temporal Coverage Qualifier: Day and Night  
87 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD26 **3.3.3.5.4 Radiances: CONUS**  
2

MRD26 The GOES-R System **shall** produce Radiances: CONUS product in accordance with the requirements  
3 and qualifiers provided in the product table below.

Radiances are the spectral radiance measurements resulting from observations of the atmosphere calibrated into units of mW/(m<sup>2</sup> μm sr) or mW/(m<sup>2</sup> cm<sup>-1</sup> sr).

(CCR 01214) (CCR 01211) (CCR 01315) (CCR 01543)(CCR 01542) (CCR 01616) (CCR 01631)(CCR 02071)

MRD14 Product Geographic Coverage/Conditions: CONUS  
88

MRD14 Product Vertical Resolution: N/A  
89

MRD14 Product Horizontal Resolution: Individual channel resolutions (0.5 km, 1.0 km, and 2.0 km) (CCR  
90 02601(RDW))

MRD14 Product Mapping Accuracy: 1 km (CCR 01764)  
91

MRD14 Product Measurement Range: 180K-320K when converted to brightness temperature units  
92

MRD14 Product Measurement Accuracy: 1.0 K when converted to brightness temperature units for known  
93 emissivity

MRD14 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
94 (CCR 01899) (CCR 02183 (RDW))

MRD14 Mission Product Data Latency: 5 min  
95

MRD14 Product Measurement Precision: 0.4 K when converted to brightness temperature units for known  
96 emissivity

MRD14 Temporal Coverage Qualifier: Day and Night  
97 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD26 **3.3.3.5.5 Radiances: Hemispheric**  
4

MRD26 The GOES-R System **shall** produce Radiances: Hemispheric product in accordance with the  
5 requirements and qualifiers provided in the product table below.

Radiances are the spectral radiance measurements resulting from observations of the atmosphere calibrated into units of mW/(m<sup>2</sup> μm sr) or mW/(m<sup>2</sup> cm<sup>-1</sup> sr) (same as CONUS product

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD26  
5 except this version provides larger coverage).  
(CCR 01214) (CCR 01211) (CCR 01315) (CCR 01543) (CCR 01542) (CCR 01616) (CCR 01631)(CCR 02071)
- MRD14  
98 Product Geographic Coverage/Conditions: Full Disk
- MRD14  
99 Product Vertical Resolution: N/A
- MRD15  
00 Product Horizontal Resolution: Individual channel resolutions (0.5 km, 1.0 km, and 2.0 km) (CCR 02601(RDW))
- MRD15  
01 Product Mapping Accuracy: 1 km (CCR 01764)
- MRD15  
02 Product Measurement Range: 180K-320K
- MRD15  
03 Product Measurement Accuracy: 1.0 K when converted to brightness temperature units for known emissivity
- MRD15  
04 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available) (CCR 01899) (CCR 02183 (RDW))
- MRD15  
05 Mission Product Data Latency: 15 min
- MRD15  
06 Product Measurement Precision: 0.4 K when converted to in brightness temperature units for known emissivity
- MRD15  
07 Temporal Coverage Qualifier: Day and Night  
Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage
- MRD26  
6 **3.3.3.5.6 Radiances: Mesoscale**
- MRD26  
7 The GOES-R System **shall** produce Radiances: Mesoscale product in accordance with the requirements and qualifiers provided in the product table below.
- Radiances are the spectral radiance measurements resulting from observations of the atmosphere calibrated into units of mW/(m<sup>2</sup> μm sr) or mW/(m<sup>2</sup> cm<sup>-1</sup> sr) (same as CONUS product except this version provides mesoscale coverage).
- (CCR 01214) (CCR 01211) (CCR 01315) (CCR 01543) (CCR 01542) (CCR 01616) (CCR 01631)(CCR 02071)
- MRD15  
08 Product Geographic Coverage/Conditions: Mesoscale
- MRD15  
09 Product Vertical Resolution: N/A
- MRD15  
10 Product Horizontal Resolution: Individual channel resolutions (0.5 km, 1.0 km, and 2.0 km) (CCR 02601(RDW))
- MRD15  
11 Product Mapping Accuracy: 1 km (CCR 01764)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD15 Product Measurement Range: 180K-320K  
12
- MRD15 Product Measurement Accuracy: 1.0 K when converted to brightness temperature units for known  
13 emissivity
- MRD15 Product Refresh Rate/Coverage Time: 5 min  
14
- MRD15 Mission Product Data Latency: 5 min  
15
- MRD15 Product Measurement Precision: 0.4 K when converted to in brightness temperature units for known  
16 emissivity
- MRD15 Temporal Coverage Qualifier: Day and Night  
17  
Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage
- MRD26 **3.3.3.6 Radiation**  
8
- MRD26 **3.3.3.6.1 Absorbed Shortwave Radiation: Surface/Mesoscale**  
9
- MRD27 The GOES-R System **shall** produce an Absorbed Shortwave Radiation: Surface/Mesoscale product in  
0 accordance with the requirements and qualifiers provided in the product table below.
- Absorbed Shortwave Radiation: Surface reports incoming solar radiation at wavelengths shorter than 4 microns absorbed by the surface of the earth.
- (CCR 01211) (CCR 01543) (CCR 01432A) (CCR 01542) (CCR 01631) (CCR 02183 (RDW))
- MRD15 Product Geographic Coverage/Conditions: Mesoscale (CCR 02183 (RDW))  
18
- MRD15 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
19
- MRD15 Product Horizontal Resolution: 5 km (CCR 02183 (RDW))  
20
- MRD15 Product Mapping Accuracy: 1.0 km (CCR 02183 (RDW))  
21
- MRD15 Product Measurement Range: 0 - 1200 W/m<sup>2</sup> (CCR 02183 (RDW))  
22
- MRD15 Product Measurement Accuracy: 90 W/m<sup>2</sup> at low value (100 W/m<sup>2</sup>); 45 W/m<sup>2</sup> at mid value (400 W/m<sup>2</sup>);  
23 55 W/m<sup>2</sup> at high value (800 W/m<sup>2</sup>) (CCR 02183 (RDW))
- MRD15 Product Refresh Rate/Coverage Time: 60 min (CCR 02183 (RDW))  
24
- MRD15 Mission Product Data Latency: 60 min (CCR 02183 (RDW))  
25
- MRD15 Product Measurement Precision: 75 W/m<sup>2</sup> for low and high values (100 and 800 W/m<sup>2</sup>) and 95 W/m<sup>2</sup>  
26 for mid values (400 W/m<sup>2</sup>) (CCR 02183 (RDW))

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD15 Temporal Coverage Qualifier: Day  
 27 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over specified geographic coverage  
 (CCR 02183 (RDW))

MRD27 **3.3.3.6.2 Downward Longwave Radiation: Surface/CONUS**  
 1

MRD27 The GOES-R System **shall** produce a Downward Longwave Radiation: Surface/CONUS product in  
 2 accordance with the requirements and qualifiers provided in the product table below.

Downward Longwave Radiation: Surface reports the downward component of longwave radiation originating in emission by clouds and greenhouse gases impinging on the earth's surface.

(CCR 01211) (CCR 01432A) (CCR 01542) (CCR 01617) (CCR 01631) (CCR 02183 (RDW))

MRD15 Product Geographic Coverage/Conditions: CONUS (CCR 02183 (RDW))  
 28

MRD15 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
 29

MRD15 Product Horizontal Resolution: 25 km (CCR 02183 (RDW))  
 30

MRD15 Product Mapping Accuracy: 5 km (CCR 02183 (RDW))  
 31

MRD15 Product Measurement Range: 50 -750 W/m<sup>2</sup> (CCR 02183 (RDW))  
 32

MRD15 Product Measurement Accuracy: 25 W/m<sup>2</sup> (CCR 01892) (CCR 02183 (RDW))  
 33

MRD15 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
 34 (CCR 01899) (CCR 02183 (RDW))

MRD15 Mission Product Data Latency: 60 min (CCR 02183 (RDW))  
 35

MRD15 Product Measurement Precision: 20 W/m<sup>2</sup> (CCR 01892) (CCR 02183 (RDW))  
 36

MRD15 Temporal Coverage Qualifier: Day and Night  
 37 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
 (CCR 02183 (RDW))

MRD27 **3.3.3.6.3 Downward Longwave Radiation: Surface/Hemispheric**  
 3



## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

MRD27 The GOES-R System **shall** produce a Downward Longwave Radiation: Surface/Hemispheric product  
4 in accordance with the requirements and qualifiers provided in the product table below.

Downward Longwave Radiation: Surface reports the downward component of longwave radiation originating in emission by clouds and greenhouse gases impinging on the earth's surface (same as CONUS product except this version provides larger coverage).

(CCR 01211) (CCR 01432A) (CCR 01542) (CCR 01617) (CCR 01631) (CCR 02183 (RDW))

MRD15 Product Geographic Coverage/Conditions: Full Disk (CCR 02183 (RDW))  
38

MRD15 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
39

MRD15 Product Horizontal Resolution: 100 km (CCR 02183 (RDW))  
40

MRD15 Product Mapping Accuracy: 4 km (CCR 02183 (RDW))  
41

MRD15 Product Measurement Range: 50 -750 W/m<sup>2</sup> (CCR 02183 (RDW))  
42

MRD15 Product Measurement Accuracy: 25 W/m<sup>2</sup> (CCR 01892) (CCR 02183 (RDW))  
43

MRD15 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
44 (CCR 01899) (CCR 02183 (RDW))

MRD15 Mission Product Data Latency: 15 min (CCR 02183 (RDW))  
45

MRD15 Product Measurement Precision: 20 W/m<sup>2</sup> (CCR 01892) (CCR 02183 (RDW))  
46

MRD15 Temporal Coverage Qualifier: Day and Night  
47 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183 (RDW))

MRD27 **3.3.3.6.4 Downward Shortwave Radiation: Surface/CONUS** (CCR 01543)  
5

MRD27 The GOES-R System **shall** produce a Downward Shortwave Radiation: Surface/CONUS product in  
6 accordance with the requirements and qualifiers provided in the product table below.

Downward Shortwave Radiation: Surface reports the incoming total solar radiation received at the earth's surface from the components of the direct solar radiation and the diffuse sky.

(CCR 01211) (CCR 01543) (CCR 01432A) (CCR 01542) (CCR 01631)

MRD15 Product Geographic Coverage/Conditions: CONUS  
48

MRD15 Product Vertical Resolution: N/A  
49

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD15 Product Horizontal Resolution: 25 km  
50
- MRD15 Product Mapping Accuracy: 2 km  
51
- MRD15 Product Measurement Range: 0 -1500 W/m<sup>2</sup>  
52
- MRD15 Product Measurement Accuracy: 85 W/m<sup>2</sup> at high end of range (1000 W/m<sup>2</sup>); 65 W/m<sup>2</sup> at typical value/midpoint (350 W/m<sup>2</sup>); 110 W/m<sup>2</sup> at low end of range (100 W/m<sup>2</sup>)  
53
- MRD15 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
54 (CCR 01899) (CCR 02183 (RDW))
- MRD15 Mission Product Data Latency: 60 min  
55
- MRD15 Product Measurement Precision: 100 W/m<sup>2</sup> for low and high values (100 and 1000 W/m<sup>2</sup>) and 130 for mid values (350 W/m<sup>2</sup>)  
56
- MRD15 Temporal Coverage Qualifier: Day for SZA values greater than 25 degrees  
57 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over specified geographic coverage
- MRD27 **3.3.3.6.5 Downward Shortwave Radiation: Surface/Hemispheric (CCR 01543)**  
7
- MRD27 The GOES-R System **shall** produce a Downward Shortwave Radiation: Surface/Hemispheric product in accordance with the requirements and qualifiers provided in the product table below.  
8
- Downward Shortwave Radiation: Surface reports the incoming total solar radiation received at the earth's surface from the components of the direct solar radiation and the diffuse sky (same as CONUS product except this version provides larger coverage).
- (CCR 01211) (CCR 01543) (CCR 01432A) (CCR 01542) (CCR 01631)
- MRD15 Product Geographic Coverage/Conditions: Full Disk  
58
- MRD15 Product Vertical Resolution: N/A  
59
- MRD15 Product Horizontal Resolution: 50 km  
60
- MRD15 Product Mapping Accuracy: 4 km  
61
- MRD15 Product Measurement Range: 0 -1500 W/m<sup>2</sup>  
62
- MRD15 Product Measurement Accuracy: 85 W/m<sup>2</sup> at high end of range (1000 W/m<sup>2</sup>); 65 W/m<sup>2</sup> at typical value/midpoint (350 W/m<sup>2</sup>); 110 W/m<sup>2</sup> at low end of range (100 W/m<sup>2</sup>)  
63
- MRD15 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
64 (CCR 01899) (CCR 02183 (RDW))
- MRD15 Mission Product Data Latency: 60 min  
65

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

MRD15 Product Measurement Precision: 100 W/m<sup>2</sup> for low and high values (100 and 1000 W/m<sup>2</sup>) and 130 for  
66 mid values (350 W/m<sup>2</sup>)

MRD15 Temporal Coverage Qualifier: Day for SZA values greater than 25 degrees  
67 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over specified geographic coverage

MRD27 **3.3.3.6.6 Downward Shortwave Radiation: Surface/Mesoscale (CCR 01543)**  
9

MRD28 The GOES-R System **shall** produce a Downward Shortwave Radiation: Surface/Mesoscale product in  
0 accordance with the requirements and qualifiers provided in the product table below.

Downward Shortwave Radiation: Surface reports the incoming total solar radiation received at the earth's surface from the components of the direct solar radiation and the diffuse sky (same as CONUS product except this version provides mesoscale coverage).

(CCR 01211) (CCR 01543) (CCR 01432A) (CCR 01542) (CCR 01631)

MRD15 Product Geographic Coverage/Conditions: Mesoscale  
68

MRD15 Product Vertical Resolution: N/A  
69

MRD15 Product Horizontal Resolution: 5 km  
70

MRD15 Product Mapping Accuracy: 1 km  
71

MRD15 Product Measurement Range: 0 -1500 W/m<sup>2</sup>  
72

MRD15 Product Measurement Accuracy: 85 W/m<sup>2</sup> at high end of range (1000 W/m<sup>2</sup>); 65 W/m<sup>2</sup> at typical  
73 value/midpoint (350 W/m<sup>2</sup>); 110 W/m<sup>2</sup> at low end of range (100 W/m<sup>2</sup>)

MRD15 Product Refresh Rate/Coverage Time: 60 min  
74

MRD15 Mission Product Data Latency: 60 min  
75

MRD15 Product Measurement Precision: 100 W/m<sup>2</sup> for low and high values (100 and 1000 W/m<sup>2</sup>) and 130 for  
76 mid values (350 W/m<sup>2</sup>)

MRD15 Temporal Coverage Qualifier: Day for SZA values greater than 25 degrees  
77 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over specified geographic coverage

MRD28 **3.3.3.6.7 Reflected Shortwave Radiation: TOA/CONUS (CCR 01543)**  
1

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD28 The GOES-R System **shall** produce a Reflected Shortwave Radiation: TOA/CONUS product in  
2 accordance with the requirements and qualifiers provided in the product table below.

Reflected Shortwave Radiation: TOA reports the solar irradiance reflected off the earth's surface back to the top of the atmosphere.

*(CCR 01211) (CCR 01543) (CCR 01432A) (CCR 01542) (CCR 01631)*

MRD15 Product Geographic Coverage/Conditions: CONUS  
78

MRD15 Product Vertical Resolution: N/A  
79

MRD15 Product Horizontal Resolution: 25 km  
80

MRD15 Product Mapping Accuracy: 2 km  
81

MRD15 Product Measurement Range: 0 -1300 W/m<sup>2</sup>  
82

MRD15 Product Measurement Accuracy: 85 W/m<sup>2</sup> at high end of range (1000 W/m<sup>2</sup>); 65 W/m<sup>2</sup> at typical  
83 value/midpoint (350 W/m<sup>2</sup>)

MRD15 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
84 *(CCR 01899) (CCR 02183 (RDW))*

MRD15 Mission Product Data Latency: 60 min  
85

MRD15 Product Measurement Precision: 100 W/m<sup>2</sup> for low and high values (100 and 1000 W/m<sup>2</sup>) and 130 for  
86 mid values (350 W/m<sup>2</sup>)

MRD15 Temporal Coverage Qualifier: Day  
87 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over specified geographic coverage

MRD28 **3.3.3.6.8 Reflected Shortwave Radiation: TOA/Hemispheric (CCR 01543)**  
3

MRD28 The GOES-R System **shall** produce a Reflected Shortwave Radiation: TOA/Hemispheric product in  
4 accordance with the requirements and qualifiers provided in the product table below.

Reflected Shortwave Radiation: TOA reports the solar irradiance reflected off the earth's surface back to the top of the atmosphere (same as CONUS product except this version provides larger coverage).

*(CCR 01211) (CCR 01348) (CCR 01543) (CCR 01432A) (CCR 01542) (CCR 01631)*

MRD15 Product Geographic Coverage/Conditions: Full Disk  
88

MRD15 Product Vertical Resolution: N/A  
89

MRD15 Product Horizontal Resolution: 25 km  
90

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD15 Product Mapping Accuracy: 4 km  
91
- MRD15 Product Measurement Range: 0 -1300 W/m<sup>2</sup>  
92
- MRD15 Product Measurement Accuracy: 85 W/m<sup>2</sup> at high end of range (1000 W/m<sup>2</sup>); 65 W/m<sup>2</sup> at typical  
93 value/midpoint (350 W/m<sup>2</sup>)
- MRD15 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
94 (CCR 01899) (CCR 02183 (RDW))
- MRD15 Mission Product Data Latency: 60 min  
95
- MRD15 Product Measurement Precision: 100 W/m<sup>2</sup> for low and high values (100 and 1000 W/m<sup>2</sup>) and 130 for  
96 mid values (350 W/m<sup>2</sup>)
- MRD15 Temporal Coverage Qualifier: Day  
97 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over specified geographic coverage
- MRD28 **3.3.3.6.9 Upward Longwave Radiation: Surface/CONUS**  
5
- MRD28 The GOES-R System **shall** produce an Upward Longwave Radiation: Surface/CONUS product in  
6 accordance with the requirements and qualifiers provided in the product table below.
- Upward Longwave Radiation: Surface reports outward longwave emitted radiation by the surface and atmosphere of the earth as reported for the surface of the earth. Climate variations can be measured from longer-term variations of upward longwave radiation: Surface/CONUS.
- (CCR 01211) (CCR 01543) (CCR 01542) (CCR 01617) (CCR 01631) (CCR 02183 (RDW))
- MRD15 Product Geographic Coverage/Conditions: CONUS (CCR 02183 (RDW))  
98
- MRD15 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
99
- MRD16 Product Horizontal Resolution: 25 km (CCR 02183 (RDW))  
00
- MRD16 Product Mapping Accuracy: 5 km (CCR 02183 (RDW))  
01
- MRD16 Product Measurement Range: 50 -900 W/m<sup>2</sup> (CCR 02183 (RDW))  
02
- MRD16 Product Measurement Accuracy: 30 W/m<sup>2</sup>  
03
- MRD16 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
04 (CCR 01899) (CCR 02183 (RDW))
- MRD16 Mission Product Data Latency: 60 min (CCR 02183 (RDW))  
05
- MRD16 Product Measurement Precision: 20 W/m<sup>2</sup> (CCR 02183 (RDW))  
06

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD16 Temporal Coverage Qualifier: Day and Night  
 07 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
 (CCR 02183 (RDW))
- MRD28 **3.3.3.6.10 Upward Longwave Radiation: Surface/Hemispheric**  
 7
- MRD28 The GOES-R System **shall** produce an Upward Longwave Radiation: Surface/Hemispheric product in  
 8 accordance with the requirements and qualifiers provided in the product table below.
- Upward Longwave Radiation: Surface/CONUS reports outward longwave emitted radiation by the surface and atmosphere of the earth as reported for the surface of the earth. Climate variations can be measured from longer-term variations of upward longwave radiation: Surface/CONUS (same as CONUS product except this version provides larger coverage).
- (CCR 01211) (CCR 01543) (CCR 01542) (CCR 01617) (CCR 01631) (CCR 02183 (RDW))
- MRD16 Product Geographic Coverage/Conditions: Full Disk (CCR 02183 (RDW))  
 08
- MRD16 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
 09
- MRD16 Product Horizontal Resolution: 100 km (CCR 02183 (RDW))  
 10
- MRD16 Product Mapping Accuracy: 5 km (CCR 02183 (RDW))  
 11
- MRD16 Product Measurement Range: 50 - 900 W/m<sup>2</sup> (CCR 02183 (RDW))  
 12
- MRD16 Product Measurement Accuracy: 30 W/m<sup>2</sup> (CCR 02183 (RDW))  
 13
- MRD16 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
 14 (CCR 01899) (CCR 02183 (RDW))
- MRD16 Mission Product Data Latency: 60 min (CCR 02183 (RDW))  
 15
- MRD16 Product Measurement Precision: 20 W/m<sup>2</sup> (CCR 02183 (RDW))  
 16
- MRD16 Temporal Coverage Qualifier: Day and Night  
 17 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
 (CCR 02183 (RDW))
- MRD28 **3.3.3.6.11 Upward Longwave Radiation: TOA/CONUS**  
 9

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD29 0 The GOES-R System **shall** produce an Upward Longwave Radiation: TOA/CONUS product in accordance with the requirements and qualifiers provided in the product table below.

Upward Longwave Radiation: TOA reports outward longwave emitted by the surface and atmosphere of the earth as observed at the top of the atmosphere. Climate variations can be measured from longer-term variations of upward longwave radiation: TOA.

(CCR 01211) (CCR 01432A) (CCR 01542) (CCR 01617) (CCR 01631) (CCR 02183 (RDW))

MRD16 18 Product Geographic Coverage/Conditions: CONUS (CCR 02183 (RDW))

MRD16 19 Product Vertical Resolution: N/A (CCR 02183 (RDW))

MRD16 20 Product Horizontal Resolution: 25 km (CCR 02183 (RDW))

MRD16 21 Product Mapping Accuracy: 5 km (CCR 02183 (RDW))

MRD16 22 Product Measurement Range: 50 - 450 W/m<sup>2</sup> (CCR 02183 (RDW))

MRD16 23 Product Measurement Accuracy: 20 W/m<sup>2</sup> (CCR 02183 (RDW))

MRD16 24 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available) (CCR 01899) (CCR 02183 (RDW))

MRD16 25 Mission Product Data Latency: 60 min (CCR 02183 (RDW))

MRD16 26 Product Measurement Precision: 5 W/m<sup>2</sup> (CCR 02183 (RDW))

MRD16 27 Temporal Coverage Qualifier: Day and Night  
Product Extent Qualifier: Quantitative out to at least 62 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over specified geographic coverage (CCR 02183 (RDW))

MRD29 1 **3.3.3.6.12 Upward Longwave Radiation: TOA/Hemispheric**

MRD29 2 The GOES-R System **shall** produce an Upward Longwave Radiation: TOA/Hemispheric product in accordance with the requirements and qualifiers provided in the product table below.

Upward Longwave Radiation: TOA reports outward longwave emitted by the surface and atmosphere of the earth as observed at the top of the atmosphere. Climate variations can be measured from longer-term variations of upward longwave radiation: TOA (same as CONUS product except this version provides larger coverage).

(CCR 01211) (CCR 01370) (CCR 01432A) (CCR 01542) (CCR 01617) (CCR 01631) (CCR 02183 (RDW))

MRD16 28 Product Geographic Coverage/Conditions: Full Disk (CCR 02183 (RDW))

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD16 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
29
- MRD16 Product Horizontal Resolution: 25 km (CCR 02183 (RDW))  
30
- MRD16 Product Mapping Accuracy: 5 km (CCR 02183 (RDW))  
31
- MRD16 Product Measurement Range: 50 - 450 W/m<sup>2</sup> (CCR 02183 (RDW))  
32
- MRD16 Product Measurement Accuracy: 20 W/m<sup>2</sup> (CCR 02183 (RDW))  
33
- MRD16 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
34 (CCR 01899) (CCR 02183 (RDW))
- MRD16 Mission Product Data Latency: 60 min (CCR 02183 (RDW))  
35
- MRD16 Product Measurement Precision: 5 W/m<sup>2</sup> (CCR 02183 (RDW))  
36
- MRD16 Temporal Coverage Qualifier: Day and Night  
37 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183 (RDW))
- MRD29 **3.3.3.7 Trace Gases**  
3
- MRD29 **3.3.3.7.1 Ozone Total: CONUS**  
4
- MRD29 The GOES-R System **shall** produce an Ozone Total: CONUS product in accordance with the  
5 requirements and qualifiers provided in the product table below.
- Ozone Total reports the abundance of ozone in the vertical column in terms of Dobson units, which are the number of molecules of ozone in the vertical column normalized by the neutral density under standard temperature and pressure (0.1 atm-cm = 100 DU).
- (CCR 01211) (CCR 01543) (CCR 01482) (CCR 01542) (CCR 01631) (CCR 02183(RDW))
- MRD16 Product Geographic Coverage/Conditions: CONUS (CCR 02183(RDW))  
38
- MRD16 Product Vertical Resolution: Total Column (CCR 02183(RDW))  
39
- MRD16 Product Horizontal Resolution: 10 km (CCR 02183(RDW))  
40
- MRD16 Product Mapping Accuracy: 5 km (CCR 02183(RDW))  
41
- MRD16 Product Measurement Range: 100 - 650 DU (where 1 DU = 2.7 x 10<sup>16</sup> mol/cm<sup>2</sup>) (CCR 02183(RDW))  
42



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD16 Product Measurement Accuracy: 15 Dobson Units (CCR 02183(RDW))  
43
- MRD16 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
44 (CCR 01899) (CCR 02183(RDW))
- MRD16 Mission Product Data Latency: 5 min (CCR 02183(RDW))  
45
- MRD16 Product Measurement Precision: 25 DU (CCR 02183(RDW))  
46
- MRD16 Temporal Coverage Qualifier: Day and Night  
47 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: N/A  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183(RDW))
- MRD29 **3.3.3.7.2 Ozone Total: Hemispheric**  
6
- MRD29 The GOES-R System **shall** produce an Ozone Total: Hemispheric product in accordance with the  
7 requirements and qualifiers provided in the product table below.
- Ozone Total reports the abundance of ozone in the vertical column in terms of Dobson units, which are the number of molecules of ozone in the vertical column normalized by the neutral density under standard temperature and pressure (0.1 atm-cm = 100 DU) (same as CONUS product except this version provides larger coverage).
- (CCR 01211) (CCR 01543) (CCR 01482) (CCR 01542) (CCR 01631) (CCR 02183(RDW))
- MRD16 Product Geographic Coverage/Conditions: Full Disk (CCR 02183(RDW))  
48
- MRD16 Product Vertical Resolution: Total Column (CCR 02183(RDW))  
49
- MRD16 Product Horizontal Resolution: 10 km (CCR 02183(RDW))  
50
- MRD16 Product Mapping Accuracy: 5 km (CCR 02183(RDW))  
51
- MRD16 Product Measurement Range: 100 - 650 DU (where 1 DU =  $2.7 \times 10^{16}$  mol/cm<sup>2</sup>) (CCR 02183(RDW))  
52
- MRD16 Product Measurement Accuracy: 15 Dobson Units (CCR 02183(RDW))  
53
- MRD16 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
54 (CCR 01899) (CCR 02183(RDW))
- MRD16 Mission Product Data Latency: 5 min (CCR 02183(RDW))  
55
- MRD16 Product Measurement Precision: 25 DU (CCR 02183(RDW))  
56

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD16 Temporal Coverage Qualifier: Day and Night  
57 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(*CCR 02183(RDW)*)
- MRD29 **3.3.3.7.3 SO<sub>2</sub> Detection**  
8
- MRD29 The GOES-R System **shall** produce an SO<sub>2</sub> Detection product in accordance with the requirements and  
9 qualifiers provided in the product table below.
- SO<sub>2</sub> Detection only reports regions of high sulfuric acid above a threshold value. SO<sub>2</sub> is produced anthropogenically (coal-fired power plants and other fossil fuel combustion) and naturally (volcanic eruptions).
- (*CCR 01211*) (*CCR 01463*) (*CCR 01543*) (*CCR 01438*) (*CCR 01542*) (*CCR 01631*) (*CCR 02183(RDW)*)
- MRD16 Product Geographic Coverage/Conditions: Full Disk (*CCR 02183(RDW)*)  
58
- MRD16 Product Vertical Resolution: Total Column (*CCR 02183(RDW)*)  
59
- MRD16 Product Horizontal Resolution: 2 km (*CCR 02183(RDW)*)  
60
- MRD16 Product Mapping Accuracy: 1 km (*CCR 02183(RDW)*)  
61
- MRD16 Product Measurement Range: Binary yes/no detection from 10 - 700 Dobson Units (DU) (*CCR 02183*  
62 (*RDW*))
- MRD16 Product Measurement Accuracy: 70% correct detection (*CCR 02183(RDW)*)  
63
- MRD16 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
64 (*CCR 01899*) (*CCR 02183(RDW)*)
- MRD16 Mission Product Data Latency: 15 min (*CCR 02183(RDW)*)  
65
- MRD16 Product Measurement Precision: N/A (*CCR 02183(RDW)*)  
66
- MRD16 Temporal Coverage Qualifier: Day and Night  
67 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(*CCR 01728*) (*CCR 02183(RDW)*)
- MRD30 **3.3.3.8 Winds**  
0
- MRD30 **3.3.3.8.1 Derived Motion Winds: CONUS**  
1
- MRD30 The GOES-R System **shall** produce a Derived Motion Winds: CONUS product in accordance with the  
2 requirements and qualifiers provided in the product table below.

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD30 Derived Motion Winds report atmospheric winds resulting from tracking features in satellite water  
2 vapor and longwave and shortwave IR window channels measurements. These are designated as ‘water  
vapor’ and ‘cloud drift’ (or ‘cloud motion vector’) winds respectively.

*(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01420A) (CCR 01542) (CCR 01612) (CCR 01631)*

MRD16 Product Geographic Coverage/Conditions: CONUS  
68

MRD16 Product Vertical Resolution: Cloud Motion Vector Winds: At cloud tops; Clear-Sky Water Vapor  
69 Winds: 200 mb

MRD16 Product Horizontal Resolution: 38 km *(CCR 01892)*  
70

MRD16 Product Mapping Accuracy: 5 km  
71

MRD16 Product Measurement Range: Speed: 5.83-300 kts (3-155 m/s), Direction: 0 to 360 degrees  
72 *(CCR 01892)*

MRD16 Product Measurement Accuracy: Mean Vector Difference: 7.5 m/s  
73

MRD16 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
74 *(CCR 01899) (CCR 02183(RDW))*

MRD16 Mission Product Data Latency: 3 min *(CCR 01899) (CCR 02183(RDW))*  
75

MRD16 Product Measurement Precision: Mean Vector Difference: 4.2 m/s *(CCR 01892)*  
76

MRD16 Temporal Coverage Qualifier: Day and Night  
77 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD30 **3.3.3.8.2 Derived Motion Winds: Hemispheric**  
3

MRD30 The GOES-R System **shall** produce a Derived Motion Winds: Hemispheric product in accordance with  
4 the requirements and qualifiers provided in the product table below.

Derived Motion Winds report atmospheric winds resulting from tracking features in satellite water  
vapor and longwave and shortwave IR window channels measurements. These are designated as ‘water  
vapor’ and ‘cloud drift’ (or ‘cloud motion vector’) winds respectively (same as CONUS product except  
this version provides larger coverage).

*(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01420A) (CCR 01542) (CCR 01612) (CCR 01631)*

MRD16 Product Geographic Coverage/Conditions: Full Disk  
78

MRD16 Product Vertical Resolution: Cloud Motion Vector Winds: At cloud tops; Clear-Sky Water Vapor  
79 Winds: 200 mb

MRD16 Product Horizontal Resolution: 38 km *(CCR 01892)*  
80

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD16 Product Mapping Accuracy: 5 km  
81

MRD16 Product Measurement Range: Speed: 5.83-300 kts (3-155 m/s), Direction: 0 to 360 degrees  
82 (CCR 01892)

MRD16 Product Measurement Accuracy: Mean Vector Difference: 7.5 m/s  
83

MRD16 Product Refresh Rate/Coverage Time: 60 min (based on a single set of 3 sequential images 5 or more  
84 minutes apart) (15 min updated when set of 5 minute Full Disk data available) (CCR 01899) (CCR  
02183(RDW))

MRD16 Mission Product Data Latency: 3 min (CCR 01899) (CCR 02183(RDW))  
85

MRD16 Product Measurement Precision: Mean Vector Difference: 4.2 m/s (CCR 01892)  
86

MRD16 Temporal Coverage Qualifier: Day and Night  
87 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD30 **3.3.3.8.3 Derived Motion Winds: Mesoscale**  
5

MRD30 The GOES-R System **shall** produce a Derived Motion Winds: Mesoscale product in accordance with  
6 the requirements and qualifiers provided in the product table below.

Derived Motion Winds report atmospheric winds resulting from tracking features in satellite water vapor and longwave and shortwave IR window channels measurements. These are designated as 'water vapor' and 'cloud drift' (or 'cloud motion vector') winds respectively (same as CONUS product except this version provides mesoscale coverage).

(CCR 01214) (CCR 01211) (CCR 01543) (CCR 01420A) (CCR 01542) (CCR 01612) (CCR 01631)

MRD16 Product Geographic Coverage/Conditions: Mesoscale  
88

MRD16 Product Vertical Resolution: Cloud Motion Vector Winds: At cloud tops; Clear-Sky Water Vapor  
89 Winds: 200 mb

MRD16 Product Horizontal Resolution: 38 km (CCR 01892)  
90

MRD16 Product Mapping Accuracy: 5 km  
91

MRD16 Product Measurement Range: Speed: 5.83-300 kts (3-155 m/s), Direction: 0 to 360 degrees  
92 (CCR 01892)

MRD16 Product Measurement Accuracy: Mean Vector Difference: 7.5 m/s  
93

MRD16 Product Refresh Rate/Coverage Time: 5 min  
94

MRD16 Mission Product Data Latency: 3 min (CCR 01899) (CCR 02183(RDW))  
95

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD16 Product Measurement Precision: Mean Vector Difference: 4.2 m/s (*CCR 01892*)  
96

MRD16 Temporal Coverage Qualifier: Day and Night  
97 Product Extent Qualifier: Quantitative out to at least 62 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD30 **3.3.4 Land Products Tables (GOES-R Baseline)**  
7

MRD30 **3.3.4.1 Fire/Hot Spot Characterization**  
8

MRD30 **3.3.4.1.1 Fire/Hot Spot Characterization: CONUS**  
9

MRD31 The GOES-R System **shall** produce a Fire/Hot Spot Characterization: CONUS product in accordance  
0 with the requirements and qualifiers provided in the product table below.

The fire/hot spot characterization product provides a fire mask indicating the location of active fires, saturated pixels, opaque cloud coverage, and processing block-out zones. Sub-pixel fire characterization is provided for non-saturated, clear-sky, active fire pixels (where subpixels assessments are made with pixel values). Fire characterization will consist of instantaneous sub-pixel estimates of fire size and temperature and fire radiative power. Information about pixels with saturated detector samples are used for processing.

(*CCR 01211*) (*CCR 01377*) (*CCR 01542*) (*CCR 01618*) (*CCR 01631*)

MRD16 Product Geographic Coverage/Conditions: CONUS  
98

MRD16 Product Vertical Resolution: N/A  
99

MRD17 Product Horizontal Resolution: 2 km  
00

MRD17 Product Mapping Accuracy: 1 km  
01

MRD17 Product Measurement Range: 275 - 400 K for pixel brightness temperature for 3.9  $\mu\text{m}$  channel; 600 –  
02 1200 K for fire temperature; 0.004 - 4  $\text{km}^2$  for fire size; 75 – 50000 MW for fire radiative power (*CCR 01975*)

MRD17 Product Measurement Accuracy: 2.0 K within dynamic range  
03

MRD17 Product Refresh Rate/Coverage Time: 5 min  
04

MRD17 Mission Product Data Latency: 5 min  
05

MRD17 Product Measurement Precision: 2 K  
06

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD17 Temporal Coverage Qualifier: Day and Night  
 07 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: If feature is obscured by thick clouds, product will not meet threshold measurement accuracy  
Product Statistics Qualifier: Over specified geographic coverage

**MRD31 3.3.4.1.2 Fire/Hot Spot Characterization: Hemispheric**  
1

MRD31 The GOES-R System **shall** produce a Fire/Hot Spot Characterization: Hemispheric product in  
 2 accordance with the requirements and qualifiers provided in the product table below.

The fire/hot spot characterization product provides a fire mask indicating the location of active fires, saturated pixels, opaque cloud coverage, and processing block-out zones. Sub-pixel fire characterization is provided for non-saturated, clear-sky, active fire pixels (where subpixels assessments are made with pixel values). Fire characterization will consist of instantaneous sub-pixel estimates of fire size and temperature and fire radiative power. Information about pixels with saturated detector samples are used for processing (same as CONUS product except this version provides larger coverage).

*(CCR 01211) (CCR 01377) (CCR 01542) (CCR 01618) (CCR 01631)*

MRD17 Product Geographic Coverage/Conditions: Full Disk  
 08

MRD17 Product Vertical Resolution: N/A  
 09

MRD17 Product Horizontal Resolution: 2 km  
 10

MRD17 Product Mapping Accuracy: 1 km  
 11

MRD17 Product Measurement Range: 275 - 400 K for pixel brightness temperature for 3.9  $\mu\text{m}$  channel  
 12

MRD17 Product Measurement Accuracy: 2.0 K within dynamic range  
 13

MRD17 Product Refresh Rate/Coverage Time: 15 min (5 min when 5 minute Full Disk data available)  
 14 *(CCR 01899) (CCR 02183(RDW))*

MRD17 Mission Product Data Latency: 5 min *(CCR 01899) (CCR 02183(RDW))*  
 15

MRD17 Product Measurement Precision: 2.0 K  
 16

MRD17 Temporal Coverage Qualifier: Day and Night  
 17 Product Extent Qualifier: Quantitative out to at least 65 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: If feature is obscured by thick clouds, product will not meet threshold measurement accuracy  
Product Statistics Qualifier: Over specified geographic coverage

**MRD31 3.3.4.2 Flood/Standing Water**  
3**MRD31 3.3.4.2.1 Flood/Standing Water: Hemispheric**  
4

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD31 The GOES-R System **shall** produce a Flood/Standing Water: Hemispheric product in accordance with  
5 the requirements and qualifiers provided in the product table below.

Flood/Standing Water reports significant areas of accumulation of water over areas that are not usually submerged, namely with 5 cm vertical depth or greater.

*(CCR 01213) (CCR 01211) (CCR 01316) (CCR 01543) (CCR 01377) (CCR 01542) (CCR 01618)(CCR 01631) (CCR 02183(RDW))*

MRD17 Product Geographic Coverage/Conditions: Full Disk *(CCR 02183(RDW))*  
18

MRD17 Product Vertical Resolution: N/A *(CCR 02183(RDW))*  
19

MRD17 Product Horizontal Resolution: 10 km *(CCR 02183(RDW))*  
20

MRD17 Product Mapping Accuracy: 5 km *(CCR 02183(RDW))*  
21

MRD17 Product Measurement Range: Binary yes/no detection of water accumulation over 5 cm vertical depth  
22 *(CCR 02183(RDW))*

MRD17 Product Measurement Accuracy: 60% correct classification *(CCR 02183(RDW))*  
23

MRD17 Product Refresh Rate/Coverage Time: 60 min *(CCR 02183(RDW))*  
24

MRD17 Mission Product Data Latency: 6 hr *(CCR 02183(RDW))*  
25

MRD17 Product Measurement Precision: N/A *(CCR 02183(RDW))*  
26

MRD17 Temporal Coverage Qualifier: Day with Sun at less than 67 degrees solar zenith angle  
27 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
*(CCR 02183(RDW))*

MRD31 **3.3.4.2 Flood/Standing Water: Mesoscale**  
6

MRD31 The GOES-R System **shall** produce a Flood/Standing Water: Mesoscale product in accordance with the  
7 requirements and qualifiers provided in the product table below.

Flood/Standing Water reports significant areas of accumulation of water over areas that are not usually submerged, namely with 5 cm vertical depth or greater (same as hemispheric product except this version provides mesoscale coverage).

*(CCR 01213) (CCR 01211) (CCR 01316) (CCR 01543) (CCR 01377) (CCR 01542) (CCR 01618)(CCR 01631) (CCR 02183(RDW))*

MRD17 Product Geographic Coverage/Conditions: Mesoscale *(CCR 02183(RDW))*  
28

MRD17 Product Vertical Resolution: N/A *(CCR 02183(RDW))*  
29

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD17 Product Horizontal Resolution: 10 km (CCR 02183(RDW))  
30
- MRD17 Product Mapping Accuracy: 5 km (CCR 02183(RDW))  
31
- MRD17 Product Measurement Range: Binary yes/no detection of water accumulation over 5 cm vertical depth  
32 (CCR 02183(RDW))
- MRD17 Product Measurement Accuracy: 60% correct classification (CCR 02183(RDW))  
33
- MRD17 Product Refresh Rate/Coverage Time: 60 min (CCR 02183(RDW))  
34
- MRD17 Mission Product Data Latency: 6 hr (CCR 02183(RDW))  
35
- MRD17 Product Measurement Precision: N/A (CCR 02183(RDW))  
36
- MRD17 Temporal Coverage Qualifier: Day with Sun at less than 67 degrees solar zenith angle  
37 Product Extent Qualifier: Quantitative out to at least 55 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183(RDW))
- MRD31 **3.3.4.3 Ice Cover (CCR 01543)**  
8
- MRD31 **3.3.4.3.1 Ice Cover: Hemispheric (CCR 01543)**  
9
- MRD32 The GOES-R System **shall** produce an Ice Cover: Hemispheric product in accordance with the  
0 requirements and qualifiers provided in the product table below.
- Ice Cover product reports the location of ice over frozen inland lakes, rivers, and open waters.
- (CCR 01213) (CCR 01211) (CCR 01316) (CCR 01543) (CCR 01421) (CCR 01542) (CCR 01618)(CCR 01631) (CCR 02183(RDW))
- MRD17 Product Geographic Coverage/Conditions: Full Disk (CCR 02183(RDW))  
38
- MRD17 Product Vertical Resolution: N/A (CCR 02183(RDW))  
39
- MRD17 Product Horizontal Resolution: 2 km (CCR 02183(RDW))  
40
- MRD17 Product Mapping Accuracy: 1 km (CCR 02183(RDW))  
41
- MRD17 Product Measurement Range: Binary yes/no detection (CCR 02183(RDW))  
42
- MRD17 Product Measurement Accuracy: 85% correct detection (CCR 02183(RDW))  
43
- MRD17 Product Refresh Rate/Coverage Time: 180 min (CCR 02183(RDW))  
44



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD17 Mission Product Data Latency: 24 hr (CCR 02183(RDW))  
45

MRD17 Product Measurement Precision: N/A (CCR 02183(RDW))  
46

MRD17 Temporal Coverage Qualifier: Day with Sun at less than 67 degrees solar zenith angle and night  
47 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 01892)

MRD32 **3.3.4.4 Land Surface (Skin) Temperature**  
1

MRD32 **3.3.4.4.1 Land Surface (Skin) Temperature: CONUS**  
2

MRD32 The GOES-R System **shall** produce a Land Surface (Skin) Temperature: CONUS product in  
3 accordance with the requirements and qualifiers provided in the product table below.

Land surface temperature is defined as the skin temperature of the uppermost layer of the land surface. In the event of heavy vegetation where the emission from the ground is not detected, the temperature is defined as the top of canopy temperature. To determine a physical surface temperature instead of an effective surface temperature, the surface emissivity must be known or determined in advance of the surface temperature calculation. In the event of ice covering the land (here including inland lakes and rivers), the temperature is defined at the ice surface instead of the land (here including inland lakes and rivers) surface.

(CCR 01211) (CCR 01317) (CCR 01542) (CCR 01618) (CCR 01631) (CCR 01818)

MRD17 Product Geographic Coverage/Conditions: CONUS  
48

MRD17 Product Vertical Resolution: N/A  
49

MRD17 Product Horizontal Resolution: 2 km  
50

MRD17 Product Mapping Accuracy: 1 km  
51

MRD17 Product Measurement Range: 213 - 330 K  
52

MRD17 Product Measurement Accuracy: 2.5 K with known emissivity, known atmospheric correction, and  
53 80% channel correlation; 5 K otherwise

MRD17 Product Refresh Rate/Coverage Time: 60 min  
54

MRD17 Mission Product Data Latency: 60 min  
55

MRD17 Product Measurement Precision: 2.3 K  
56

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD17 Temporal Coverage Qualifier: Day and Night  
 57 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD32 **3.3.4.4.2 Land Surface (Skin) Temperature: Hemispheric**  
 4

MRD32 The GOES-R System **shall** produce a Land Surface (Skin) Temperature: Hemispheric product in  
 5 accordance with the requirements and qualifiers provided in the product table below.

Land surface temperature is defined as the skin temperature of the uppermost layer of the land surface. In the event of heavy vegetation where the emission from the ground is not detected, the temperature is defined as the top of canopy temperature. To determine a physical surface temperature instead of an effective surface temperature, the surface emissivity must be known or determined in advance of the surface temperature calculation. In the event of ice covering the land (here including inland lakes and rivers), the temperature is defined at the ice surface instead of the land (here including inland lakes and rivers) surface. (same as CONUS product except this version provides larger coverage).

(CCR 01213) (CCR 01211) (CCR 01317) (CCR 01542) (CCR 01618) (CCR 01631) (CCR 01818)

MRD17 Product Geographic Coverage/Conditions: Full Disk  
 58

MRD17 Product Vertical Resolution: N/A  
 59

MRD17 Product Horizontal Resolution: 10 km  
 60

MRD17 Product Mapping Accuracy: 5 km  
 61

MRD17 Product Measurement Range: 213 - 333 K  
 62

MRD17 Product Measurement Accuracy: 2.5 K with known emissivity, known atmospheric correction, and  
 63 80% channel correlation; 5 K otherwise

MRD17 Product Refresh Rate/Coverage Time: 60 min  
 64

MRD17 Mission Product Data Latency: 3 min (CCR 01899) (CCR 02183(RDW))  
 65

MRD17 Product Measurement Precision: 2.3 K  
 66

MRD17 Temporal Coverage Qualifier: Day and Night  
 67 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD32 **3.3.4.4.3 Land Surface (Skin) Temperature: Mesoscale**  
 6

MRD32 The GOES-R System **shall** produce a Land Surface (Skin) Temperature: Mesoscale product in  
 7 accordance with the requirements and qualifiers provided in the product table below.

Land surface temperature is defined as the skin temperature of the uppermost layer of the land surface.

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD32 In the event of heavy vegetation where the emission from the ground is not detected, the temperature is  
7 defined as the top of canopy temperature. To determine a physical surface temperature instead of an effective surface temperature, the surface emissivity must be known or determined in advance of the surface temperature calculation. In the event of ice covering the land (here including inland lakes and rivers), the temperature is defined at the ice surface instead of the land (here including inland lakes and rivers) surface. (same as CONUS product except this version provides mesoscale coverage).

*(CCR 01211) (CCR 01317) (CCR 01542) (CCR 01618) (CCR 01631) (CCR 01818)*

MRD17 Product Geographic Coverage/Conditions: Mesoscale  
68

MRD17 Product Vertical Resolution: N/A  
69

MRD17 Product Horizontal Resolution: 2 km  
70

MRD17 Product Mapping Accuracy: 1 km  
71

MRD17 Product Measurement Range: 213 - 330 K  
72

MRD17 Product Measurement Accuracy: 2.5 K with known emissivity, known atmospheric correction, and  
73 80% channel correlation; 5 K otherwise

MRD17 Product Refresh Rate/Coverage Time: 60 min  
74

MRD17 Mission Product Data Latency: 3 min *(CCR 01899)*  
75

MRD17 Product Measurement Precision: 2.3 K  
76

MRD17 Temporal Coverage Qualifier: Day with Sun at 67 degree solar zenith angle  
77 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD32 **3.3.4.5 Snow Cover/Depth**  
8

MRD32 **3.3.4.5.1 Snow Cover: CONUS**  
9

MRD33 The GOES-R System **shall** produce a Snow Cover: CONUS product in accordance with the  
0 requirements and qualifiers provided in the product table below.  
Snow Cover reports the fractional area covered by snow in each reported product pixel.

*(CCR 01211) (CCR 01316) (CCR 01543) (CCR 01421) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02415)(RDW)*

MRD17 Product Geographic Coverage/Conditions: CONUS  
78

MRD17 Product Vertical Resolution: N/A  
79

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD17 Product Horizontal Resolution: 2 km  
80

MRD17 Product Mapping Accuracy: 1 km  
81

MRD17 Product Measurement Range: 0.0 - 1.0 fractional cover  
82

MRD17 Product Measurement Accuracy: 0.30  
83

MRD17 Product Refresh Rate/Coverage Time: 60 min  
84

MRD17 Mission Product Data Latency: 60 min  
85

MRD17 Product Measurement Precision: 0.15 (CCR 01892)  
86

MRD17 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
87 Product Extent Qualifier: Quantitative out to at least 55 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD33 **3.3.4.5.2 Snow Cover: Hemispheric**  
1

MRD33 The GOES-R System **shall** produce a Snow Cover: Hemispheric product in accordance with the  
2 requirements and qualifiers provided in the product table below.

Snow Cover reports the fractional area covered by snow in each reported product pixel (same as CONUS product except this version provides larger coverage).

(CCR 01211) (CCR 01316) (CCR 01543) (CCR 01421) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02415(RDW))

MRD17 Product Geographic Coverage/Conditions: Full Disk  
88

MRD17 Product Vertical Resolution: N/A  
89

MRD17 Product Horizontal Resolution: 2 km  
90

MRD17 Product Mapping Accuracy: 1 km  
91

MRD17 Product Measurement Range: 0.0 - 1.0 fractional cover  
92

MRD17 Product Measurement Accuracy: 0.30  
93

MRD17 Product Refresh Rate/Coverage Time: 60 min  
94

MRD17 Mission Product Data Latency: 60 min  
95

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD17 Product Measurement Precision: 0.15 (CCR 01892)  
96

MRD17 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
97 Product Extent Qualifier: Quantitative out to at least 55 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD33 **3.3.4.5.3 Snow Cover: Mesoscale**  
3

MRD33 The GOES-R System **shall** produce a Snow Cover: Mesoscale product in accordance with the  
4 requirements and qualifiers provided in the product table below.

Snow Cover reports the fractional area covered by snow in each reported product pixel (same as CONUS product except this version provides mesoscale coverage).

(CCR 01211) (CCR 01316) (CCR 01543) (CCR 01421) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02415(RDW))

MRD17 Product Geographic Coverage/Conditions: Mesoscale  
98

MRD17 Product Vertical Resolution: N/A  
99

MRD18 Product Horizontal Resolution: 2 km  
00

MRD18 Product Mapping Accuracy: 1 km  
01

MRD18 Product Measurement Range: 0.0 - 1.0 fractional cover  
02

MRD18 Product Measurement Accuracy: 0.30  
03

MRD18 Product Refresh Rate/Coverage Time: 60 min  
04

MRD18 Mission Product Data Latency: 60 min  
05

MRD18 Product Measurement Precision: 0.15 (CCR 01892)  
06

MRD18 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
07 Product Extent Qualifier: Quantitative out to at least 55 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD33 **3.3.4.5.4 Snow Depth (over Plains): CONUS**  
5

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD33 The GOES-R System **shall** produce a Snow Depth (over Plains): CONUS product in accordance with  
6 the requirements and qualifiers provided in the product table below.

Snow Depth (over Plains) refers to the depth of snow over regions covered with tall grasses, where snow depth can be sensed.

*(CCR 01211) (CCR 01316) (CCR 01543) (CCR 01421) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02183(RDW))*

MRD18 Product Geographic Coverage/Conditions: CONUS / Tall Grassy Plains Only *(CCR 02183(RDW))*  
08

MRD18 Product Vertical Resolution: N/A *(CCR 02183(RDW))*  
09

MRD18 Product Horizontal Resolution: 2 km *(CCR 02183(RDW))*  
10

MRD18 Product Mapping Accuracy: 1 km *(CCR 02183(RDW))*  
11

MRD18 Product Measurement Range: 0 - 27 cm *(CCR 02183(RDW))*  
12

MRD18 Product Measurement Accuracy: 9 cm *(CCR 02183(RDW))*  
13

MRD18 Product Refresh Rate/Coverage Time: 60 min *(CCR 02183(RDW))*  
14

MRD18 Mission Product Data Latency: 60 min *(CCR 02183(RDW))*  
15

MRD18 Product Measurement Precision: 15 cm *(CCR 02183(RDW))*  
16

MRD18 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
17 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
*(CCR 02183(RDW))*

MRD33 **3.3.4.5.5 Snow Depth (over Plains): Hemispheric**  
7

MRD33 The GOES-R System **shall** produce a Snow Depth (over Plains): Hemispheric product in accordance  
8 with the requirements and qualifiers provided in the product table below.

Snow Depth (over Plains) refers to the depth of snow over regions covered with tall grasses, where snow depth can be sensed (same as CONUS product except this version provides larger coverage).

*(CCR 01211) (CCR 01316) (CCR 01543) (CCR 01421) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02183(RDW))*

MRD18 Product Geographic Coverage/Conditions: Full Disk / Tall Grassy Plains Only *(CCR 02183(RDW))*  
18

MRD18 Product Vertical Resolution: N/A *(CCR 02183(RDW))*  
19

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD18 Product Horizontal Resolution: 2 km (CCR 02183(RDW))  
20

MRD18 Product Mapping Accuracy: 1 km (CCR 02183(RDW))  
21

MRD18 Product Measurement Range: 0 - 27 cm (CCR 02183(RDW))  
22

MRD18 Product Measurement Accuracy: 9 cm (CCR 02183(RDW))  
23

MRD18 Product Refresh Rate/Coverage Time: 60 min (CCR 02183(RDW))  
24

MRD18 Mission Product Data Latency: 60 min (CCR 02183(RDW))  
25

MRD18 Product Measurement Precision: 15 cm (CCR 02183(RDW))  
26

MRD18 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
27 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183(RDW))

MRD33 **3.3.4.5.6 Snow Depth (over Plains): Mesoscale**  
9

MRD34 The GOES-R System **shall** produce a Snow Depth (over Plains): Mesoscale product in accordance with  
0 the requirements and qualifiers provided in the product table below.

Snow Depth (over Plains) refers to the depth of snow over regions covered with tall grasses, where snow depth can be sensed (same as CONUS product except this version provides mesoscale coverage).

(CCR 01211) (CCR 01316) (CCR 01543) (CCR 01421) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02183(RDW))

MRD18 Product Geographic Coverage/Conditions: Mesoscale / Tall Grassy Plains Only (CCR 02183(RDW))  
28

MRD18 Product Vertical Resolution: N/A (CCR 02183(RDW))  
29

MRD18 Product Horizontal Resolution: 2 km (CCR 02183(RDW))  
30

MRD18 Product Mapping Accuracy: 1 km (CCR 02183(RDW))  
31

MRD18 Product Measurement Range: 0 - 27 cm (CCR 02183(RDW))  
32

MRD18 Product Measurement Accuracy: 9 cm (CCR 02183(RDW))  
33

MRD18 Product Refresh Rate/Coverage Time: 60 min (CCR 02183(RDW))  
34

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD18 Mission Product Data Latency: 60 min (CCR 02183(RDW))  
35

MRD18 Product Measurement Precision: 15 cm (CCR 02183(RDW))  
36

MRD18 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
37 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183(RDW))

MRD34 **3.3.4.6 Surface Albedo/Emissivity**  
1

MRD34 **3.3.4.6.1 Surface Albedo: Hemispheric**  
2

MRD34 The GOES-R System **shall** produce a Surface Albedo: Hemispheric product in accordance with the  
3 requirements and qualifiers provided in the product table below.

Surface Albedo reports the ratio of the amount of incoming radiation to the amount of reflected radiation often computed as a proxy using the visible band.

(CCR 01211) (CCR 01316) (CCR 01349) (CCR 01377) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02183(RDW))

MRD18 Product Geographic Coverage/Conditions: Full Disk (CCR 02183(RDW))  
38

MRD18 Product Vertical Resolution: N/A (CCR 02183(RDW))  
39

MRD18 Product Horizontal Resolution: 2 km (CCR 02183(RDW))  
40

MRD18 Product Mapping Accuracy: 2 km (CCR 02183(RDW))  
41

MRD18 Product Measurement Range: 0 - 1 Albedo Units (CCR 02183(RDW))  
42

MRD18 Product Measurement Accuracy: 0.08 (Albedo units) (CCR 02183(RDW))  
43

MRD18 Product Refresh Rate/Coverage Time: 60 min (CCR 02183(RDW))  
44

MRD18 Mission Product Data Latency: 60 min (CCR 02183(RDW))  
45

MRD18 Product Measurement Precision: 10% (CCR 02183(RDW))  
46

MRD18 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
47 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183(RDW))



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD34 3.3.4.6.2 Surface Emissivity**  
4

MRD34 The GOES-R System **shall** produce a Surface Emissivity product in accordance with the requirements  
5 and qualifiers provided in the product table below.

The ratio of the radiation emitted by a surface to the radiation emitted by a perfect blackbody radiator at the same temperature.

*(CCR 01213) (CCR 01211) (CCR 01316) (CCR 01543) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02183(RDW))*

MRD18 Product Geographic Coverage/Conditions: CONUS *(CCR 02183(RDW))*  
48

MRD18 Product Vertical Resolution: N/A *(CCR 02183(RDW))*  
49

MRD18 Product Horizontal Resolution: 10 km *(CCR 02183(RDW))*  
50

MRD18 Product Mapping Accuracy: 5 km *(CCR 02183(RDW))*  
51

MRD18 Product Measurement Range: 0.85 - 1.0 (unitless) *(CCR 02183(RDW))*  
52

MRD18 Product Measurement Accuracy: 0.05 (unitless) *(CCR 02183(RDW))*  
53

MRD18 Product Refresh Rate/Coverage Time: 60 min *(CCR 02183(RDW))*  
54

MRD18 Mission Product Data Latency: 60 min *(CCR 02183(RDW))*  
55

MRD18 Product Measurement Precision: 0.05 *(CCR 01892) (CCR 02183(RDW))*  
56

MRD18 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
57 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
*(CCR 01892) (CCR 02183(RDW))*

**MRD34 3.3.4.7 Vegetation Fraction/Index**  
6**MRD34 3.3.4.7.1 Vegetation Fraction: Green: CONUS (CCR 01892)**  
7

MRD34 The GOES-R System **shall** produce a Vegetation Fraction: Green: CONUS product in accordance with  
8 the requirements and qualifiers provided in the product table below.

Vegetative Fraction: Green reports the unitless fraction of green vegetation occupying each pixel.

*(CCR 01211) (CCR 01316) (CCR 01542) (CCR 01618) (CCR 01631) (CCR 01892) (CCR 02183(RDW))*

MRD18 Product Geographic Coverage/Conditions: CONUS *(CCR 02183(RDW))*  
58

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD18 Product Vertical Resolution: N/A (CCR 02183(RDW))  
59
- MRD18 Product Horizontal Resolution: 2 km (CCR 02183(RDW))  
60
- MRD18 Product Mapping Accuracy: 1 km (CCR 02183(RDW))  
61
- MRD18 Product Measurement Range: 0.0 - 1.0 (unitless) (CCR 02183(RDW))  
62
- MRD18 Product Measurement Accuracy: 0.10 (SZA < 55 degrees), and 0.20 (55 degrees < SZA < 70 degrees)  
63 (CCR 01892) (CCR 02183(RDW))
- MRD18 Product Refresh Rate/Coverage Time: 60 min (CCR 02183(RDW))  
64
- MRD18 Mission Product Data Latency: 60 min (CCR 02183(RDW))  
65
- MRD18 Product Measurement Precision: 0.10 (SZA < 55 degrees), and 0.20 (55 degrees < SZA < 70 degrees)  
66 (CCR 01892) (CCR 02183(RDW))
- MRD18 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
67 Product Extent Qualifier: Quantitative out to at least 55 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183(RDW))
- MRD21 **3.3.4.7.2 Vegetation Fraction: Green: Hemispheric (CCR 01867A)**  
66
- MRD21 The GOES-R System **shall** produce a Vegetation Fraction: Green: Hemispheric product in accordance  
70 with the requirements and qualifiers provided in the product table below.
- Vegetative Fraction: Green reports the unitless fraction of green vegetation occupying each pixel.  
(CCR 01867A)
- MRD21 Product Geographic Coverage/Conditions: Full Disk (CCR 01867A)  
71
- MRD21 Product Vertical Resolution: N/A (CCR 01867A)  
72
- MRD21 Product Horizontal Resolution: 2 km (CCR 01867A)  
73
- MRD21 Product Mapping Accuracy: 1 km (CCR 01867A)  
74
- MRD21 Product Measurement Range: 0.0 - 1.0 (unitless) (CCR 01867A)  
75
- MRD21 Product Measurement Accuracy: 0.10 (SZA < 55 degrees), and 0.20 (55 degrees < SZA < 70 degrees)  
76 (CCR 01867A)
- MRD21 Product Refresh Rate/Coverage Time: 60 min (CCR 01867A)  
77

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD21 Mission Product Data Latency: 60 min (*CCR 01867A*)  
78
- MRD21 Product Measurement Precision: 0.10 (SZA < 55 degrees), and 0.20 (55 degrees < SZA < 70 degrees)  
79 (*CCR 01867A*)
- MRD21 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
80 Product Extent Qualifier: Quantitative out to at least 55 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
  
(*CCR 01867A*)
- MRD34 **3.3.4.7.3 Vegetation Index: CONUS**  
9
- MRD35 The GOES-R System **shall** produce a Vegetation Index: CONUS product in accordance with the  
0 requirements and qualifiers provided in the product table below.  
  
Vegetative Index reports the state of growth (biomass greenness) in units of Normalized Difference  
Vegetation Index (NDVI).  
  
(*CCR 01211*) (*CCR 01316*) (*CCR 01542*) (*CCR 01618*) (*CCR 01631*) (*CCR 02183(RDW)*)
- MRD18 Product Geographic Coverage/Conditions: CONUS (*CCR 02183(RDW)*)  
68
- MRD18 Product Vertical Resolution: N/A (*CCR 02183(RDW)*)  
69
- MRD18 Product Horizontal Resolution: 2 km (*CCR 02183(RDW)*)  
70
- MRD18 Product Mapping Accuracy: 1 km (*CCR 02183(RDW)*)  
71
- MRD18 Product Measurement Range: 0 - 1 (NDVI units) (*CCR 02183(RDW)*)  
72
- MRD18 Product Measurement Accuracy: 0.04 NDVI Units (*CCR 02183(RDW)*)  
73
- MRD18 Product Refresh Rate/Coverage Time: 60 min (*CCR 02183(RDW)*)  
74
- MRD18 Mission Product Data Latency: 60 min (*CCR 02183(RDW)*)  
75
- MRD18 Product Measurement Precision: 0.04 NDVI units (*CCR 02183(RDW)*)  
76
- MRD18 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
77 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(*CCR 02183(RDW)*)
- MRD21 **3.3.4.7.4 Vegetation Index: Hemispheric (*CCR 01867A*)**  
67

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD21 The GOES-R System **shall** produce a Vegetation Index: Hemispheric product in accordance with the  
81 requirements and qualifiers provided in the product table below.

Vegetative Index reports the state of growth (biomass greenness) in units of Normalized Difference Vegetation Index (NDVI).

(CCR 01867A)

MRD21 Product Geographic Coverage/Conditions: Full Disk (CCR 01867A)  
82

MRD21 Product Vertical Resolution: N/A (CCR 01867A)  
83

MRD21 Product Horizontal Resolution: 2 km (CCR 01867A)  
84

MRD21 Product Mapping Accuracy: 1 km (CCR 01867A)  
85

MRD21 Product Measurement Range: 0 - 1 (NDVI units) (CCR 01867A)  
86

MRD21 Product Measurement Accuracy: 0.04 NDVI Units (CCR 01867A)  
87

MRD21 Product Refresh Rate/Coverage Time: 60 min (CCR 01867A)  
88

MRD21 Mission Product Data Latency: 60 min (CCR 01867A)  
89

MRD21 Product Measurement Precision: 0.04 NDVI units (CCR 01867A)  
90

MRD21 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
91 Product Extent Qualifier: Quantitative out to at least 70 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

(CCR 01867A)

### MRD35 **3.3.5 Ocean Products Tables (GOES-R Baseline)** 1

#### MRD35 **3.3.5.1 Currents** 2

##### MRD35 **3.3.5.1.1 Currents: Hemispheric** 3

MRD35 The GOES-R System **shall** produce a Currents: Hemispheric product in accordance with the  
4 requirements and qualifiers provided in the product table below.

Currents product reports large-scale movements of the surface waters of the ocean.

(CCR 01211) (CCR 01543) (CCR 01542) (CCR 01620) (CCR 01631) (CCR 02183(RDW))

MRD18 Product Geographic Coverage/Conditions: Full Disk (CCR 02183(RDW))  
78

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD18 Product Vertical Resolution: Surface (CCR 02183(RDW))  
79
- MRD18 Product Horizontal Resolution: 2 km (CCR 02183(RDW))  
80
- MRD18 Product Mapping Accuracy: 1 km (CCR 02183(RDW))  
81
- MRD18 Product Measurement Range: 0 to 2 m/s (0-7.2 km/hr), 0 to 360 degrees (CCR 02183(RDW))  
82
- MRD18 Product Measurement Accuracy: 1 km/hr (0.3 m/sec) in both meridional and zonal directions (CCR  
83 01892) (CCR 02183(RDW))
- MRD18 Product Refresh Rate/Coverage Time: 6 hr (CCR 02183(RDW))  
84
- MRD18 Mission Product Data Latency: 60 min (CCR 02183(RDW))  
85
- MRD18 Product Measurement Precision: 1 km/hr (0.3 m/sec) in both meridional and zonal directions (CCR  
86 01892) (CCR 02183(RDW))
- MRD18 Temporal Coverage Qualifier: Day and Night  
87 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183(RDW))
- MRD35 **3.3.5.1.2 Currents: Mesoscale**  
5
- MRD35 The GOES-R System **shall** produce a Currents: Mesoscale product in accordance with the requirements  
6 and qualifiers provided in the product table below.
- Currents product reports large-scale movements of the surface waters of the ocean (same as Hemispheric product except this version provides mesoscale coverage).
- (CCR 01211) (CCR 01543) (CCR 01542) (CCR 01620) (CCR 01631) (CCR 01728) (CCR 02183(RDW))
- MRD18 Product Geographic Coverage/Conditions: Mesoscale (CCR 02183(RDW))  
88
- MRD18 Product Vertical Resolution: Surface (CCR 02183(RDW))  
89
- MRD18 Product Horizontal Resolution: 2 km (CCR 02183(RDW))  
90
- MRD18 Product Mapping Accuracy: 1 km (CCR 02183(RDW))  
91
- MRD18 Product Measurement Range: 0 to 2 m/s (0-7.2 km/hr), 0 to 360 degrees (CCR 02183(RDW))  
92
- MRD18 Product Measurement Accuracy: 1 km/hr (0.3 m/sec) in both meridional and zonal directions (CCR  
93 01892) (CCR 02183(RDW))
- MRD18 Product Refresh Rate/Coverage Time: 6 hr (CCR 02183(RDW))  
94

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD18 Mission Product Data Latency: 60 min (CCR 02183(RDW))  
95

MRD18 Product Measurement Precision: 1 km/hr (CCR 02183(RDW))  
96

MRD18 Temporal Coverage Qualifier: Day and Night  
97 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183(RDW))

MRD35 **3.3.5.1.3 Currents: Offshore/CONUS**  
7

MRD35 The GOES-R System **shall** produce a Currents: Offshore/CONUS product in accordance with the  
8 requirements and qualifiers provided in the product table below.

Currents: Offshore product reports large-scale movements of the surface waters of the ocean for the US Exclusive Economic Zone and CONUS waters.

(CCR 01211) (CCR 01542) (CCR 01631) (CCR 02183(RDW))

MRD18 Product Geographic Coverage/Conditions: CONUS and US navigable waters through EEZ (CCR  
98 02183(RDW))

MRD18 Product Vertical Resolution: Surface (CCR 02183(RDW))  
99

MRD19 Product Horizontal Resolution: 2 km (CCR 02183(RDW))  
00

MRD19 Product Mapping Accuracy: 1 km (CCR 02183(RDW))  
01

MRD19 Product Measurement Range: 0 to 7.2 km/hr (CCR 01798) (CCR 02183(RDW))  
02

MRD19 Product Measurement Accuracy: 1 km/hr (0.3 m/sec) in both meridional and zonal directions (CCR  
03 01798) (CCR 01892) (CCR 02183(RDW))

MRD19 Product Refresh Rate/Coverage Time: 180 min (CCR 02183(RDW))  
04

MRD19 Mission Product Data Latency: 60 min (CCR 02183(RDW))  
05

MRD19 Product Measurement Precision: 1 km/hr (0.3 m/sec) in both meridional and zonal directions (CCR  
06 01798) (CCR01892) (CCR 02183(RDW))

MRD19 Temporal Coverage Qualifier: Day and Night  
07 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183(RDW))

MRD35 **3.3.5.1.4 Currents: Offshore/Hemispheric**  
9

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD36 The GOES-R System **shall** produce a Currents: Offshore/Hemispheric product in accordance with the requirements and qualifiers provided in the product table below.

0 Currents: Offshore product reports large-scale movements of the surface waters of the ocean for the US Exclusive Economic Zone and CONUS waters (same as CONUS product except this version provides larger coverage).

(CCR 01211) (CCR 01542) (CCR 01631) (CCR 02183(RDW))

MRD19 Product Geographic Coverage/Conditions: Full Disk (CCR 02183(RDW))  
08

MRD19 Product Vertical Resolution: Surface (CCR 02183(RDW))  
09

MRD19 Product Horizontal Resolution: 2 km (CCR 02183(RDW))  
10

MRD19 Product Mapping Accuracy: 1 km (CCR 02183(RDW))  
11

MRD19 Product Measurement Range: 0 to 7.2 km/hr (CCR 01798)(CCR 02183(RDW))  
12

MRD19 Product Measurement Accuracy: 1 km/hr (0.3 m/sec) in both meridional and zonal directions (CCR 01798) (CCR 01892) (CCR 02183(RDW))  
13

MRD19 Product Refresh Rate/Coverage Time: 180 min (CCR 02183(RDW))  
14

MRD19 Mission Product Data Latency: 60 min (CCR 02183(RDW))  
15

MRD19 Product Measurement Precision: 1 km/hr (0.3 m/sec) in both meridional and zonal directions (CCR 01798) (CCR 01892) (CCR 02183(RDW))  
16

MRD19 Temporal Coverage Qualifier: Day and Night  
17 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage (CCR 02183(RDW))

MRD36 **3.3.5.2 Sea and Lake Ice**  
1

MRD36 **3.3.5.2.1 Sea and Lake Ice: Age/Hemispheric**  
2

MRD36 The GOES-R System **shall** produce a Sea and Lake Ice: Age/Hemispheric product in accordance with the requirements and qualifiers provided in the product table below.  
3

Sea and Lake Ice: Age classifies ice cover by duration. Ice older than first year ice is thicker and more ridged and can be more hazardous to ships. Older ice can be less reflective due to dirt and soot accumulation and can also be melt-water covered if at polar regions during high-sun months.

(CCR 01211) (CCR 01316) (CCR 01543) (CCR 01421) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02183(RDW))

MRD19 Product Geographic Coverage/Conditions: Full Disk (CCR 02183(RDW))  
18

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD19 Product Vertical Resolution: Ice Surface (CCR 02183(RDW))  
19

MRD19 Product Horizontal Resolution: 1 km (CCR 02183(RDW))  
20

MRD19 Product Mapping Accuracy: 3 km (CCR 02183(RDW))  
21

MRD19 Product Measurement Range: Ice free areas, First year ice, Older ice (CCR 02183(RDW))  
22

MRD19 Product Measurement Accuracy: 80% correct classification (CCR 02183(RDW))  
23

MRD19 Product Refresh Rate/Coverage Time: 6 hr (CCR 02183(RDW))  
24

MRD19 Mission Product Data Latency: 60 min (CCR 02183(RDW))  
25

MRD19 Product Measurement Precision: 1 category (CCR 02183(RDW))  
26

MRD19 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
27 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183(RDW))

MRD36 **3.3.5.2.2 Sea and Lake Ice: Concentration/CONUS**  
4

MRD36 The GOES-R System **shall** produce a Sea and Lake Ice: Concentration/CONUS product in accordance  
5 with the requirements and qualifiers provided in the product table below.

Sea and Lake Ice: Concentration reports the fraction (in tenths) of the sea or lake surface covered by ice. Total concentration includes all stages of development that are present. The concentration of sea ice varies within the ice pack due to deformation, new ice development, melting, and motion.

(CCR 01211) (CCR 01316) (CCR 01421) (CCR 01542) (CCR 01618) (CCR 01631) (CCR 02183(RDW))

MRD19 Product Geographic Coverage/Conditions: CONUS / Regional - Great Lakes and US coastal waters  
28 containing sea ice hazards to navigation (CCR 02183(RDW))

MRD19 Product Vertical Resolution: Ice Surface (CCR 02183(RDW))  
29

MRD19 Product Horizontal Resolution: 3 km (CCR 02183(RDW))  
30

MRD19 Product Mapping Accuracy: ≤ 1.5 km (CCR 02183(RDW))  
31

MRD19 Product Measurement Range: Ice concentration - 0/10 to 10/10 (CCR 02183(RDW))  
32

MRD19 Product Measurement Accuracy: Ice concentration: 10% (CCR 02183(RDW))  
33



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD19 Product Refresh Rate/Coverage Time: 180 min (*CCR 02183(RDW)*)  
34
- MRD19 Mission Product Data Latency: 60 min (*CCR 02183(RDW)*)  
35
- MRD19 Product Measurement Precision: 30% (*CCR 02183(RDW)*)  
36
- MRD19 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
37 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(*CCR 02183(RDW)*)
- MRD36 **3.3.5.2.3 Sea and Lake Ice: Concentration Hemispheric**  
6
- MRD36 The GOES-R System **shall** produce a Sea and Lake Ice: Concentration/Hemispheric product in  
7 accordance with the requirements and qualifiers provided in the product table below.
- Sea and Lake Ice: Concentration reports the fraction (in tenths) of the sea or lake surface covered by ice. Total concentration includes all stages of development that are present. The concentration of sea ice varies within the ice pack due to deformation, new ice development, melting, and motion (same as CONUS product except this version provides Hemispheric coverage).
- (*CCR 01211*) (*CCR 01316*) (*CCR 01421*) (*CCR 01542*) (*CCR 01618*) (*CCR 01631*) (*CCR 02183(RDW)*)
- MRD19 Product Geographic Coverage/Conditions: Full Disk / Sea ice covered waters in N. & S. Hemispheres  
38 (*CCR 02183(RDW)*)
- MRD19 Product Vertical Resolution: Ice Surface (*CCR 02183(RDW)*)  
39
- MRD19 Product Horizontal Resolution: 10 km (*CCR 02183(RDW)*)  
40
- MRD19 Product Mapping Accuracy: ≤ 5.0 km (*CCR 02183(RDW)*)  
41
- MRD19 Product Measurement Range: Ice concentration - 0/10 to 10/10 (*CCR 02183(RDW)*)  
42
- MRD19 Product Measurement Accuracy: Ice concentration: 10% (*CCR 02183(RDW)*)  
43
- MRD19 Product Refresh Rate/Coverage Time: 6 hr (*CCR 02183(RDW)*)  
44
- MRD19 Mission Product Data Latency: 180 min (*CCR 02183(RDW)*)  
45
- MRD19 Product Measurement Precision: 30% (*CCR 02183(RDW)*)  
46
- MRD19 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
47 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(*CCR 02183(RDW)*)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD37 3.3.5.2.4 Sea and Lake Ice: Motion/CONUS**  
0

MRD37 The GOES-R System **shall** produce a Sea and Lake Ice: Motion/CONUS product in accordance with  
1 the requirements and qualifiers provided in the product table below.

Sea and Lake Ice: Motion reports the instantaneous measurement of the direction and magnitude of the movement of the ice.

*(CCR 01211) (CCR 01316) (CCR 01543) (CCR 01421) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02183(RDW))*

MRD19 Product Geographic Coverage/Conditions: Great Lakes and Chesapeake and Delaware Bays *(CCR*  
48 *02183(RDW))*

MRD19 Product Vertical Resolution: N/A *(CCR 02183(RDW))*  
49

MRD19 Product Horizontal Resolution: 5 km *(CCR 02183(RDW))*  
50

MRD19 Product Mapping Accuracy: ≤ 2.5 km *(CCR 02183(RDW))*  
51

MRD19 Product Measurement Range: Direction: 0 - 360 degrees Displacement: 0 - 0.6 m/s *(CCR 02183(RDW))*  
52

MRD19 Product Measurement Accuracy: Direction: 22.5° Speed: 3 km/day *(CCR 02183(RDW))*  
53

MRD19 Product Refresh Rate/Coverage Time: 3 hr *(CCR 02183(RDW))*  
54

MRD19 Mission Product Data Latency: 60 min *(CCR 02183(RDW))*  
55

MRD19 Product Measurement Precision: Direction: 30° Speed: 3 km/day *(CCR 02183(RDW))*  
56

MRD19 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
57 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
*(CCR 02183(RDW))*

**MRD37 3.3.5.2.5 Sea and Lake Ice: Motion/Hemispheric**  
2

MRD37 The GOES-R System **shall** produce a Sea and Lake Ice: Motion/Hemispheric product in accordance  
3 with the requirements and qualifiers provided in the product table below.

Sea and Lake Ice: Motion reports the instantaneous measurement of the direction and magnitude of the movement of the ice (same as CONUS product except this version provides larger coverage).

*(CCR 01211) (CCR 01316) (CCR 01543) (CCR 01421) (CCR 01542) (CCR 01618) (CCR 01631)(CCR 02183 (RDW))*

MRD19 Product Geographic Coverage/Conditions: Sea ice covered waters in N. & S. Hemispheres *(CCR 02183*  
58 *(RDW))*

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD19 Product Vertical Resolution: N/A (CCR 02183 (RDW))  
59

MRD19 Product Horizontal Resolution: 15 km (CCR 02183 (RDW))  
60

MRD19 Product Mapping Accuracy:  $\leq 7.5$  km (CCR 02183 (RDW))  
61

MRD19 Product Measurement Range: Direction: 0 - 360° Displacement: 0 - 0.6 m/s (CCR 02183 (RDW))  
62

MRD19 Product Measurement Accuracy: Direction: 22.5° Speed: 3 km/day (CCR 02183 (RDW))  
63

MRD19 Product Refresh Rate/Coverage Time: 6 hr (CCR 02183 (RDW))  
64

MRD19 Mission Product Data Latency: 180 min (CCR 02183 (RDW))  
65

MRD19 Product Measurement Precision: Direction: 30° Speed: 3 km/day (CCR 02183 (RDW))  
66

MRD19 Temporal Coverage Qualifier: Sun at less than 67 degree daytime solar zenith angle  
67 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage  
(CCR 02183 (RDW))

MRD37 **3.3.5.3 Sea Surface Temperature**  
4

MRD37 **3.3.5.3.1 Sea Surface Temperature (skin): Hemispheric (CCR 01543)**  
7

MRD37 The GOES-R System **shall** produce a Sea Surface Temperature (skin): Hemispheric product in  
8 accordance with the requirements and qualifiers provided in the product table below.

Sea Surface Temperature (skin) reports the skin temperature of the ocean at depths on the order of 10 microns.

(CCR 01211) (CCR 01543) (CCR 01542) (CCR 01620) (CCR 01631)

MRD19 Product Geographic Coverage/Conditions: Full Disk  
68

MRD19 Product Vertical Resolution: N/A  
69

MRD19 Product Horizontal Resolution: 2 km  
70

MRD19 Product Mapping Accuracy: 1 km  
71

MRD19 Product Measurement Range: 271 - 313 K  
72

MRD19 Product Measurement Accuracy: 2.1 K with known emissivity, known atmospheric correction, and  
73 80% channel correlation; 3.1 K otherwise

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD19 Product Refresh Rate/Coverage Time: 60 min (5 min when 5 minute Full Disk data available)  
74 (CCR 01899) (CCR 02183 (RDW))

MRD19 Mission Product Data Latency: 15 min  
75

MRD19 Product Measurement Precision: 1.0 K  
76

MRD19 Temporal Coverage Qualifier: Day and Night  
77 Product Extent Qualifier: Quantitative out to at least 67 degrees LZA and qualitative at larger LZA  
Cloud Cover Conditions Qualifier: Clear conditions associated with threshold accuracy  
Product Statistics Qualifier: Over specified geographic coverage

MRD38 **3.3.6 Space and Solar Products Tables (GOES-R Baseline)**  
1

MRD38 **3.3.6.1 Energetic Particles**  
2

MRD38 **3.3.6.1.1 Energetic Heavy Ions**  
3

MRD38 The GOES-R System **shall** produce an Energetic Heavy Ions product in accordance with the  
4 requirements provided in the product table below.

Energetic Heavy Ions reports measurements of energetic heavy ions.

(CCR 01211) (CCR 01542) (CCR 01631) (CCR 01633)

MRD19 Product Orthogonality/Coverage: 1 direction  
78

MRD19 Product Horizontal/Angular Resolution: N/A  
79

MRD19 Product Pointing/Mapping Accuracy: N/A  
80

MRD19 Product Pointing Knowledge/Mapping Uncertainty: N/A  
81

MRD19 Product Measurement Range: 10 -200 MeV/n 5 mass groups: H, He, (C,N,O), Ne-S, & Fe  
82 (CCR 01731)

MRD19 Product Measurement Accuracy: 25% when flux level above background is greater than 10 times  
83 minimum flux; 45% when flux level above background is between minimum flux and 10 times  
minimum flux (N/A when SEISS is operated during spacecraft storage) (CCR 01725) (CCR 02129)

MRD19 Product Refresh Rate/Coverage Time: 5 min (CCR 01503A) (CCR 02129)  
84

MRD19 Mission Product Data Latency: 5 min (36 hours when SEISS is operated during spacecraft storage)  
85 (CCR 02129)

MRD19 Product Measurement Precision: Flux values associated with 10 counts above background in 5-min  
86 interval (N/A when SEISS is operated during spacecraft storage) (CCR 02129) (CCR 03074(RDW))

MRD38 **3.3.6.1.2 Magnetospheric Electrons and Protons: Low Energy**  
5

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD38 The GOES-R System **shall** produce a Magnetospheric Electrons and Protons: Low Energy product in  
6 accordance with the requirements provided in the product table below.

Magnetospheric Electrons and Protons: Low Energy reports measurements of low energy magnetospheric electrons and protons.

(CCR 01211) (CCR 01542) (CCR 01631) (CCR 01633)

MRD19 Product Orthogonality/Coverage: 5 directions  
87

MRD19 Product Horizontal/Angular Resolution: N/A  
88

MRD19 Product Pointing/Mapping Accuracy: N/A  
89

MRD19 Product Pointing Knowledge/Mapping Uncertainty: N/A  
90

MRD19 Product Measurement Range: Electron and Protons: 30 eV - 30 keV  
91

MRD19 Product Measurement Accuracy: 25% when flux level above background is greater than 10 times  
92 minimum flux; 45% when flux level above background is between minimum flux and 10 times  
minimum flux (N/A when SEISS is operated during spacecraft storage) (CCR 01725) (CCR 02129)

MRD19 Product Refresh Rate/Coverage Time: 30 sec  
93

MRD19 Mission Product Data Latency: 1 min, except during Spacecraft storage mode after SEISS operation is  
94 requested wherein latency is 36 hours (CCR 01503A)

MRD19 Product Measurement Precision: Flux values associated with 10 counts above background in 5-min  
95 interval (N/A when SEISS is operated during spacecraft storage) (CCR 02129) (CCR 03075(RDW))

MRD38 **3.3.6.1.3 Magnetospheric Electrons and Protons: Medium and High Energy**  
7

MRD38 The GOES-R System **shall** produce a Magnetospheric Electrons and Protons: Medium and High  
8 Energy product in accordance with the requirements provided in the product table below.

Magnetospheric Electrons and Protons: Medium and High Energy reports measurements of medium and high energy magnetospheric electrons and protons.

(CCR 01211) (CCR 01542) (CCR 01631) (CCR 01633)

MRD19 Product Orthogonality/Coverage: 5 directions  
96

MRD19 Product Horizontal/Angular Resolution: N/A  
97

MRD19 Product Pointing/Mapping Accuracy: N/A  
98

MRD19 Product Pointing Knowledge/Mapping Uncertainty: N/A  
99

MRD20 Product Measurement Range: Electrons: 50 keV - 4 MeV Protons: 80 keV - 10 MeV (CCR 01731)  
00

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD20 Product Measurement Accuracy: 25% when flux level above background is greater than 10 times  
01 minimum flux; 45% when flux level above background is between minimum flux and 10 times  
minimum flux (N/A when SEISS is operated during spacecraft storage) (CCR 01725) (CCR 02129)
- MRD20 Product Refresh Rate/Coverage Time: 30 sec  
02
- MRD20 Mission Product Data Latency: 1 min, except during Spacecraft storage mode after SEISS operation is  
03 requested wherein latency is 36 hours (CCR 01503A)
- MRD20 Product Measurement Precision: Flux values associated with 10 counts above background in 5-min  
04 interval (N/A when SEISS is operated during spacecraft storage) (CCR 02129) (CCR 03088(RDW))
- MRD38 **3.3.6.1.4 Solar and Galactic Protons**  
9
- MRD39 The GOES-R System **shall** produce a Solar and Galactic Protons product in accordance with the  
0 requirements provided in the product table below.
- Solar and Galactic Protons reports measurements of solar energetic protons and galactic cosmic ray  
protons.
- (CCR 01211) (CCR 01542) (CCR 01631) (CCR 01633) (CCR 01731) (CCR 02167)
- MRD20 Product Orthogonality/Coverage: 2 directions  
05
- MRD20 Product Horizontal/Angular Resolution: N/A  
06
- MRD20 Product Pointing/Mapping Accuracy: N/A  
07
- MRD20 Product Pointing Knowledge/Mapping Uncertainty: N/A  
08
- MRD20 Product Measurement Range: Protons: 1 MeV - 500 MeV, > 500 MeV (CCR 01731) (CCR 02167)  
09
- MRD20 Product Measurement Accuracy: 25% when flux level above background is greater than 10 times  
10 minimum flux; 45% when flux level above background is between minimum flux and 10 times  
minimum flux (N/A when SEISS is operated during spacecraft storage) (CCR 01725) (CCR 02129)
- MRD20 Product Refresh Rate/Coverage Time: 1 min  
11
- MRD20 Mission Product Data Latency: 1 min, except during Spacecraft storage mode after SEISS operation is  
12 requested wherein latency is 36 hours (CCR 01503A)
- MRD20 Product Measurement Precision: Flux values associated with 10 counts above background in 5-min  
13 interval (N/A when SEISS is operated during spacecraft storage) (CCR 02129) (CCR 03076(RDW))
- MRD39 **3.3.6.2 Magnetic Field**  
1
- MRD39 **3.3.6.2.1 Geomagnetic Field**  
2
- MRD39 The GOES-R System **shall** produce a Magnetic Field product in accordance with the requirements  
3 provided in the product table below.

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD39 Geomagnetic Field reports measurements of earth's magnetic field and its variations at geosynchronous  
3 orbit.

(CCR 01211) (CCR 01542) (CCR 01630) (CCR 01631)

MRD20 Product Orthogonality/Coverage: 3-axis 0.5°  
14

MRD20 Product Horizontal/Angular Resolution: N/A  
15

MRD20 Product Pointing/Mapping Accuracy:  $\pm 0.25^\circ$  (CCR 02153 (RDW))  
16

MRD20 Product Pointing Knowledge/Mapping Uncertainty:  $\pm 1^\circ$   
17

MRD20 Product Measurement Range:  $\geq \pm 512$  nT/axis (3-axis vector)  
18

MRD20 Product Measurement Accuracy: 1.0 nT (per axis) (CCR 02153 (RDW))  
19

MRD20 Product Refresh Rate/Coverage Time: 2 samples /sec  
20

MRD20 Mission Product Data Latency: Real Time (5 s) (36 hours when SEISS is operated during spacecraft  
21 storage) (CCR 02129)

MRD20 Product Measurement Precision: 0.016 nT (N/A when SEISS is operated during spacecraft storage)  
22 (CCR 02129)

MRD39 **3.3.6.3 Solar**  
4

MRD39 **3.3.6.3.1 Solar Flux: EUV**  
5

MRD39 The GOES-R System **shall** produce a Solar Flux: EUV product in accordance with the requirements  
6 provided in the product table below.

Solar Flux: EUV reports measurements of the disk-integrated solar extreme ultraviolet flux.

(CCR 01211) (CCR 01542) (CCR 01631)

MRD20 Product Orthogonality/Coverage: Solar Disk (40 arcmin)  
23

MRD20 Product Horizontal/Angular Resolution: N/A  
24

MRD20 Product Pointing/Mapping Accuracy: N/A  
25

MRD20 Product Pointing Knowledge/Mapping Uncertainty:  $\pm 2$  arcmin  
26

MRD20 Product Measurement Range: 0.5x Sol Min 10x Sol Max  
27

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

MRD20 Product Measurement Accuracy:  $\pm 20\%$   
28

MRD20 Product Refresh Rate/Coverage Time: 30 sec  
29

MRD20 Mission Product Data Latency: 30 sec  
30

MRD20 Product Measurement Precision: 20% at the specified minimum flux (*CCR 01888*)  
31

MRD20 Long-Term Stability:  $\pm 5\%$  or the ability to track changes  
32

### MRD39 3.3.6.3.2 Solar Flux: X-Ray 7

MRD39 The GOES-R System **shall** produce a Solar Flux: X-Ray product in accordance with the requirements  
8 provided in the product table below.

Solar Flux: X-Ray reports measurements of the disk-integrated solar X-ray flux.

(*CCR 01211*) (*CCR 01542*) (*CCR 01631*)

MRD20 Product Orthogonality/Coverage: Solar Disk (40 arcmin)  
33

MRD20 Product Horizontal/Angular Resolution: N/A  
34

MRD20 Product Pointing/Mapping Accuracy: N/A  
35

MRD20 Product Pointing Knowledge/Mapping Uncertainty:  $\pm 2$  arcmin  
36

MRD20 Product Measurement Range: XRSA:  $5 \times 10^{-9}$  to  $5 \times 10^{-4}$  W/m<sup>2</sup> XRSB:  $2 \times 10^{-8}$  to  $2 \times 10^{-3}$  W/m<sup>2</sup>  
37

MRD20 Product Measurement Accuracy:  $\pm 20\%$  at 20 times the specified minimum flux (*CCR 01888*)  
38

MRD20 Product Refresh Rate/Coverage Time: 3 sec (*CCR 01888*)  
39

MRD20 Mission Product Data Latency: 5 sec (*CCR 01888*)  
40

MRD20 Product Measurement Precision: 2% (*CCR 01888*)  
41

MRD20 Long-Term Stability:  $< 5\%$  over mission, or ability to track changes  
42

### MRD39 3.3.6.3.3 Solar Imagery: EUV (CCR 02662) 9



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD40 The GOES-R System **shall** produce a Solar Imagery: EUV product in accordance with the requirements  
0 provided in the product table below.

Solar Imagery: EUV reports solar images in the EUV region.

*(CCR 01211) (CCR 01542) (CCR 01630) (CCR 01631) (CCR 02662)*

MRD20 Product Orthogonality/Coverage: 0.0-1.3 Solar Radii  
43

MRD20 Product Horizontal/Angular Resolution: 7.0 arcsec  
44

MRD20 Product Pointing/Mapping Accuracy: Pointing Accuracy:  $\pm 3.0$  arcmin (3 sigma) (N-S,E-W) of Sun  
45 Center; Stability during 60 seconds:  $\pm 2.0$  arcsec (1 sigma),  $\pm 6.0$  arcsec (3 sigma) (N-S, E-W)

MRD20 Product Pointing Knowledge/Mapping Uncertainty:  $\pm 2.5$  arcsec  
46

MRD20 Product Measurement Range: Radiance:  $0.3-10^6$  ph/cm<sup>2</sup>/arcsec<sup>2</sup>/ sec *(CCR 01760)*  
47

MRD20 Product Measurement Accuracy:  $\pm 40\%$  in radiance  
48

MRD20 Product Refresh Rate/Coverage Time: Image:  $< 2$  min *(CCR 01760)*  
49

MRD20 Mission Product Data Latency:  $< 1$  min  
50

MRD20 Product Measurement Precision: +/- 40% in radiance  
51

MRD20 Long-Term Stability: 30%  
52

### MRD40 **3.4 Space Segment Requirements** 1

MRD54 The GOES-R Space Segment **shall** employ spacecraft with a reliability of at least 0.73 after 15 years.

Reliability is defined as the probability that each spacecraft performs its required functions over a fifteen year period (five years on-orbit storage plus ten years on-orbit operation). The required performance of the spacecraft includes all functionality required to produce KPP user products. *(CCR 01546) (CCR 02115)*

#### MRD40 **3.4.1 Spacecraft Payloads** 6

MRD40 The GOES-R System **shall** operate the following instrument and auxiliary communication payloads at  
7 each geosynchronous orbital location:

- a) Advanced Baseline Imager (ABI)
- b) EUVS XRS Irradiance Sensors (EXIS)
  - 1) Solar X-Ray Sensor (XRS)
  - 2) Extreme Ultraviolet Sensor (EUVS)
- c) Solar Ultraviolet Imager (SUVI)
- d) Space Environment In-Situ Suite (SEISS)
  - 1) Magnetospheric Particle Sensor (MPS)

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

- MRD40 2) Energetic Heavy Ion Sensor (EHIS)  
7 3) Solar and Galactic Proton Sensor (SGPS)  
e) Geostationary Lightning Mapper (GLM)  
f) Magnetometer  
g) Auxiliary Communication Services  
1) GOES Rebroadcast (GRB)  
2) High Rate Information Transmission/Emergency Managers Weather Information Network (HRIT/EMWIN)  
3) Deleted  
4) Data Collection System (DCS)  
5) Search and Rescue (SAR)  
(CCR01423) (CCR 02115) (CCR 02163)
- MRD21 Upon ground command, the GOES-R system **shall** downlink Magnetometer data and sub-sampled  
01 SEISS data in the telemetry stream. (CCR 01503A)
- MRD41 **3.4.2 Launch Vehicle Compatibility**  
0
- MRD41 The GOES-R Space Segment **shall** employ an Evolved Expendable Launch Vehicle (EELV) - Medium  
1 class for all launches. (CCR 02115)
- MRD41 **3.4.3 Security**  
4
- MRD21 The GOES-R System **shall** encrypt Space Segment commands. (CCR 02115)  
15
- MRD21 The GOES-R System **shall** decrypt encrypted Space Segment commands. (CCR 02115)  
16
- MRD21 The GOES-R Space Segment **shall** respond to encrypted and to unencrypted commands.  
17 (CCR 02115)
- MRD41 **3.4.4 Continuity (CCR 02115)**  
6
- MRD21 The GOES-R Space Segment **shall** operate on-orbit functions continuously during eclipse periods in  
18 geosynchronous orbit. (CCR 02115)
- MRD21 The GOES-R Space Segment **shall** meet Radiances product performance requirements during eclipse  
54 periods in geosynchronous orbit for all data acquired outside of instrument designated zones of reduced  
data quality. (CCR 02115) (CCR 02600)
- MRD42 **3.4.4.1 Autonomous Operations**  
6
- MRD42 The GOES-R Space Segment **shall** autonomously provide real-time instrument data without command  
7 contact between Space and Ground segments for a period of 7 days. (CCR 02115)
- MRD44 **3.4.5 Communications**  
1
- MRD44 The GOES-R Series Satellites - Summary of Parameters for NTIA Filing (as of 1-6-06) is provided in  
2 the table below for reference purposes only. (Note heading are those that are required for NTIA filing.)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD44  
2

**GOES R SERIES SATELLITES – SUMMARY OF PARAMETERS FOR NT IA FILING (Rev of 1-04-07)**

Function	Frequency (MHz)	Emission Designator	Station Class/ Services	Direction	Mean Power (Watts)	Average SPD (dBW/Hz)	Data Rate after coding (bps)	Receive Sys Noise Temp.	Cooperating Earth Stations
DCPC	468.825	88K9G1DDC	EM/Metsat	S-E	10.00	-39.5	350	700	Worldwide
SAR	1544.550	100KG7DBF	EIMSS	S-E	10.0	-40.0	FDM Signal	120	Worldwide
CDA Tlm 1	1672.000	64K0G1DCN 8K00G1DCN	EM/Metsat	S-E	6.0	-40.3 @ 32k -31.2 @ 4k	32k or 4k	100	Wallops CDA Goddard CDA
CDA Tlm 2	1672.250		EM/Metsat	S-E	6.0		32k or 4k	100	
CDA Tlm 3	1672.500		EM/Metsat	S-E	6.0		32k or 4k	100	
CDA Tlm 4	1672.750		EM/Metsat	S-E	6.0		32k or 4k	100	
GRB	1690.000		12M0G1DEN	EM/Metsat	S-E		96.0	-51.0	
EMWIN	1696.700	223KG1DDN	EM/Metsat	S-E	6.3	-41.8	297 k	200	Worldwide
LRIT	1697.600	586KG1DDN	EM/Metsat	S-E	8.0	-48.7	586 k	200	Worldwide
DCPR	1683.3 (Dom) 1683.6 (Intl)	400KG7DBF, 400KG7DEF	EM/Metsat	S-E	14.0	-44.5	FDM Signal	200	US&P
DSN Tlm and Ranging	2211.041	2M10G2DCN (tlm) 1M00G3N (ranging) 2M10G9W (both)	ET/Space Ops	S-E	10.0	-53.2 (telem) -53.0 (ranging) -53.2 (both)	4 k	100	Goldstone DSN Wallops CDA Goddard CDA
Raw Data (Opt. A) <sup>1</sup>	8120.000	180MG1DDN	EM/Metsat	S-E	20.0	-69.5	140 M <sup>2</sup>	400	Wallops CDA Goddard CDA
Raw Data (Opt. B) <sup>1</sup>	8310.000	180MG1DDN	EM/Metsat	S-E	20.0	-69.5			
DCPR (Pilot)	401.700 401.850	N0N	TM, TW/Metsat, EES	E-S	80.0	N/A	N/A	500	Wallops CDA Goddard CDA
DCPR	401.7 - 402.4	1K20G1DEN, 300HG1DEN, 400HG1DBN	TE	E-S	80.0	-11.8 gnd, -5.8 gnd, -7.0 gnd	1800/450/ 100	500	US&P
SAR	406.0 - 406.1	1K60G1D		E-S	2.5	-28.0 gnd	400	500	US&P
LRIT	2028.600	586KG1DDN	TW/EES	E-S	13.0	-46.7 gnd	586 k	600	Wallops CDA Goddard CDA
EMWIN	2030.700	223KG1DDN	TW/EES	E-S	10.0	-43.4 gnd	297 k	600	Wallops CDA Goddard CDA
DCPC	2032.825	88K9G1DDC	TW/EES	E-S	10.0	-39.5 gnd	350	600	Wallops CDA Goddard CDA
Command 1	2034.200	128KG1DCN 40K0G2DCN 34K0G2DCN	TD, TW/Space Ops, EES	E-S	1000.0	-21.1 @64k -16.0 @ 4k -15.3 @ 1k gnd	1k/4k/64k	2900	Wallops CDA Goddard CDA
Command 2	2034.600			E-S	1000.0		1k/4k/64k	2900	Wallops CDA Goddard CDA
Command 3	2035.000			E-S	1000.0		1k/4k/64k	2900	Wallops CDA Goddard CDA
Command 4	2035.400			E-S	1000.0		1k/4k/64k	2900	Wallops CDA Goddard CDA
DSN Command 5 and Ranging	2036.000			40K0G2DCN 1M00G3N	E-S		5000.0	-9.0 (cmd) -23.0 (ranging)	1k/4k
GRB (Opt. 1)	7219.000	12M0G1DEN	TW/EES/SR	E-S	100.0	-51.0 gnd	31 M	600	Wallops CDA Goddard CDA
GRB (Opt. 2)	2049.000	12M0G1DEN	TW/EES	E-S	700.0	-42.0 gnd	31 M	600	Wallops CDA Goddard CDA

Notes:

- Both Raw Data link options are shown with necessary bandwidth for QPSK modulation but power shown is that necessary for 8PSK modulation. No emission limiting filtering is included.
- Both Raw Data link options assume 140 Mbps before FEC coding.
- DCPC (was DCPI) link is CDMA direct sequence spread spectrum with a chip rate of 44.45 kHz. Necessary Bandwidth is 88.9 kHz.
- All GRB link options are shown with power calculated for 8PSK modulation.
- The Average PSD is simply the output power divided by the necessary bandwidth, as defined in the emission designation.

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD44  
2
6. The X-band power levels were taken from Aerospace link analyses.
  7. The L- and S-band power levels were taken from GOES N/P actuals, and scaled when necessary.
  8. Guard bands required relative to IPO (NPOESS) use above 1698 MHz, and NESDIS (GOES) use below 1698 MHz to avoid RFI.
  9. NOAA envisions a spec requiring the use of SRRC filters to allow NOAA to get the BW authorization necessary. NOAA requires out-of-band filtering.
  10. NOAA envisions a spec for directional antenna focused on the CDA stations, which NOAA believes is necessary to get its authorization. Wallops is the prime GOES-R CDA station. Fairmont, WV is the remote backup (RBU).
  11. NTIA oversees use of RF spectrum by all federal agencies.
  12. Earth Exploration Satellite-Service (EESS) - a radio communication payload services between earth stations and one or more space stations. Per ITU definition, Metsats are a subset of EESS used for meteorological purposes.
  13. ITU PFD limits for EESS and Metsat services must be met.
  14. NESDIS is working to obtain operational X-band approval. If this fails it will attempt to obtain Ku (18.1-18.3 GHz) and/or Ka (25.5-27 GHz) operational approval.

*(CCR 01625) (CCR 01636)*

MRD44  
3

**3.4.5.1 Mission Space to Ground Communications**

MRD44  
4

The GOES-R System **shall** maintain radio communication links between the Space and Ground Segments as defined in the SS to C3S IRD. *(CCR 02115)*

MRD44  
6

**3.4.5.2 Auxiliary Communications Services**

MRD44  
7

**3.4.5.2.1 GOES Rebroadcast (GRB)**

MRD44  
8

The GOES Rebroadcast data service provides GOES ground processed sensor data, other NWS products and related information to the weather research and Earth sciences community. The rebroadcast data for GOES-R is called GOES Rebroadcast (GRB).

The GRB link relays the GOES processed sensor data independently through the GOES-East and GOES-West satellites, and downlinks the data to the various GRB users. This system provides unidirectional broadcast link connectivity between the originating uplink from the NOAA Command and Data Acquisition Stations (CDAS) and a large number of outlying GRB Ground Terminals (GRBT) including NOAA's NWS and other research organizations.

MRD45  
1

**3.4.5.2.2 Search and Rescue (SAR)**

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD45 The SAR subsystem onboard each GOES satellite is a dedicated transponder that receives UHF distress  
2 signals broadcast by:

- a) Emergency Locator Transmitters (ELTs) carried on aircraft
- b) Emergency Position Indicating Radio Beacons (EPIRBs) aboard marine vessels
- c) Personal Locator Beacons (PLB) used in land-based applications
- d) System Beacons used for calibration and performance monitoring
- e) Ship Security Alerting System (SSAS) beacons

The distress signals are relayed by the GOES-R satellite to a ground station located within the field of view of the satellite. The information is then ultimately passed to the rescue coordination center from where the help is dispatched.

MRD45 **3.4.5.2.3 Data Collection System (DCS)**  
5

MRD45 The Data Collection System (DCS) provides predominately uplink and the capability for bidirectional  
6 link connectivity between a large number of outlying Data Collection Platforms (DCP) and the NOAA Command and Data Acquisition Stations (CDAS) and/or Direct Readout Ground Stations (DRGS). These DCPs are typically small remote monitoring stations used for the collection and reporting of near real-time environmental data.

The DCS data is provided through the satellite bent pipe transponders. These correspond to (1) the links required for the Data Collection Platforms (DCP's) to provide reported data to the CDAS and other Direct Readout Ground Stations (DRGS) termed Data Collection Platform Report (DCPR) links and (2) an outbound polling link from the CDAS to the DCP's termed the Data Collection Platform Interrogate (DCPI) link. The Data Collection Platform Report (DCPR) transponder supports the link from a large number of small data platforms in the DCS to the CDAS and other Direct Readout Ground Stations (DRGS). The Data Collection Platform Interrogate (DCPI) transponder supports a command link from the CDAS to selected platforms.

MRD46 **3.4.5.2.4 High Rate Information Transmission (HRIT) (CCR 01423)**  
0

MRD46 In response to the World Meteorological Organization's (WMO) recommendations for digital  
1 meteorological satellite broadcasts a new digital service called Low Rate Information Transmission (LRIT) will transition from the (analog) WEFAX format to the digital LRIT format for GOES-NOP. For the GOES-R series, the data rate will again increase and, to keep in agreement with international usage, the new digital service will be called High Rate Information Transmission/Emergency Managers Weather Information Network (HRIT/EMWIN). The HRIT/EMWIN data stream is designed to contain digital images, temperature and moisture profile information, and other products including *in situ* observations, forecasts, analyses, and numeric model output.

The High Rate Information Transmission/Emergency Managers Weather Information Network (HRIT/EMWIN) service provides unidirectional broadcast link connectivity between the originating uplink from the NOAA Command and Data Acquisition Stations (CDAS) and a large number of outlying HRIT/EMWIN terminals. (CCR 01423)

MRD46 **3.4.5.2.5 Emergency Managers Weather Information Network (EMWIN)**  
4

MRD46 The Emergency Manager's Weather Information Network (EMWIN) provides Local Emergency  
5 Managers and the Federal Emergency Management Agency (FEMA) with a method of receiving GOES digital data for their operational needs.

The Emergency Managers Weather Information Network (EMWIN) data will be transmitted from the NOAA Command and Data Acquisition Stations (CDAS) at Wallops Island, Virginia (WCDAS) (or its backup) to the spacecraft for distribution to a large data user community. EMWIN data will be part of

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD46 the High Rate Information Transmission and Emergency Managers Weather Information Network  
5 service. This system provides unidirectional broadcast link connectivity between the originating uplink  
from the CDAS and a large number of outlying ground EMWIN User Terminals (EUTs).  
(CCR 01423)

**MRD47 3.4.6 Software (CCR 02163)**  
5

MRD21 The GOES-R System **shall** utilize open hardware and software standards. (CCR 02115)  
19

**MRD47 3.4.7 Recovery after Spacecraft Maneuvers**  
9

MRD48 The GOES-R Space Segment raw instrument measurement performance requirements **shall** not apply  
0 for up to three total hours per year per spacecraft due to on-orbit maneuvers. (CCR 02115) (CCR 02166)

**MRD48 3.4.8 Observational Payloads**  
1**MRD48 3.4.8.1 Advanced Baseline Imager (ABI)**  
2**MRD48 3.4.8.1.1 Top Priority Imager Requirements**  
3

MRD48 The following four requirements are considered to be the highest priority by NOAA's National Weather  
4 Service for the imager:

- a) Operation during eclipse and keep out zone periods
- b) Meet "simultaneous" global/synoptic/mesoscale imaging needs
- c) Improve the temporal resolution of the imager to address the scan modes below with concurrent image activities such as calibration, space looks, and any necessary star looks
  - 1) Scan mode 3: Full Earth disk (stepped-edge acceptable) every 15-minutes; plus CONUS, or the equivalent of a nadir-viewed rectangle 5000 kilometers by 3000 kilometers in dimension, every 5 minutes and at least one 1000 by 1000 kilometer area (nadir) every 30 seconds.
  - 2) Scan mode 4: Full Earth disk (stepped-edge acceptable) every 5-minutes.
- d) Improve spatial resolution of the imager data by a factor of two

MRD49 The GOES-R System Radiances product performance **shall** not apply in the immediate vicinity of the  
1 solar disk. (CCR 02115) (CCR 02166)

MRD49 The GOES-R Space Segment **shall** acquire Earth images for each product coverage area in a cadence  
3 including simultaneous collection. (CCR 02115) (CCR 02166)

**MRD50 3.4.8.1.2 Imager Performance Summary**  
1

MRD50 A summary of the imager requirements is provided in the ABI Performance Summary Table below and  
2 is intended as a quick reference guide only.

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

### MRD50 ABI Performance Summary Table (Partial List)

2

Requirement Name and Source		Requirement Values
Spatial Resolution and Uniformity	Visible (0.64 $\mu\text{m}$ band)	0.5 km (14 $\mu\text{rad}$ )
	0.47 $\mu\text{m}$ , 0.865 $\mu\text{m}$ , and 1.61 $\mu\text{m}$ bands	1.0 km (28 $\mu\text{rad}$ )
	1.378 $\mu\text{m}$ and all bands > 2 $\mu\text{m}$	2 km (56 $\mu\text{rad}$ )
Spatial Coverage	Full disk	Scan Mode 6: 6 per hour Scan Mode 4: 12 per hour Scan Mode 3: 4 per hour
	CONUS (3000 x 5000 km)	Scan Mode 6: 12 per hour Scan Mode 4: no additional CONUSs Scan Mode 3: 12 per hour
	Mesoscale (1000 x 1000 km) when required	Scan Mode 6: Every 30 sec Scan Mode 4: no additional mesoscales Scan Mode 3: Every 30 sec
Operation During Eclipse		Yes
Simultaneity		Within 5 sec. for all bands at any FOV Within 30 sec. for any adjacent (N/S) pixels Within 15 sec. for any adjacent (E/W) pixels
Number of Bands		16
Spectral Bands, Radiometric Sensitivity, Dynamic Range		
Navigation		$\leq 1.0$ km ( $\leq 28$ $\mu\text{rad}$ )
Registration within Frame		$\leq 1.0$ km ( $\leq 28$ $\mu\text{rad}$ )
Line-to-Line Registration		$\leq 0.25$ km (at SSP) or $\leq 7$ $\mu\text{rad}$
Registration Image to Image		$\leq 0.75$ km (at SSP) or $\leq 21$ $\mu\text{rad}$ for 0.5 km bands and 1.0 km bands $\leq 1.0$ km (at SSP) or 28 $\mu\text{rad}$ for 2.0 km bands
Band to Band Co-Registration (pre-margining)	0.5 km to 2.0 km bands	$\leq 0.3$ km (at SSP) or $\leq 8.4$ $\mu\text{rad}$
	2.0 km to 2.0 km bands	$\leq 0.3$ km (at SSP) or $\leq 8.4$ $\mu\text{rad}$
	0.5 km to 1.0 km bands	$\leq 0.3$ km (at SSP) or $\leq 7$ $\mu\text{rad}$
	1.0 km to 1.0 km bands	$\leq 0.25$ km (at SSP) or $\leq 7$ $\mu\text{rad}$
	1.0 km to 2.0 km bands	$\leq 0.3$ km (at SSP) or $\leq 8.4$ $\mu\text{rad}$
On-Orbit Calibration	Visible and reflected solar < 3 $\mu\text{m}$	Pre-launch to $\pm 5\%$ On-board to $\pm 3\%$ 0.2% short-term repeatability
	Emissive IR	0.2 K repeatability 1.0 K abs. Accuracy
IR Band Linearity		$\pm 1\%$
Lifetime	Ground Storage	5 years
	On-Orbit Storage	5 years is max possible
	Mean Mission Duration (MMD)	8.4 years
	Instrument On life	10 years with R=0.6

(CCR 03006)

### MRD50 3.4.8.1.3 Lifetime

3

## ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)

MRD50 The GOES-R Space Segment **shall** employ an ABI instrument with an 8.4 year Mean Mission Duration  
4 (MMD) at the end of 10 years, or equivalently a reliability of 0.6 after 10 years of on-orbit operations, preceded by up to 5 years of ground storage and up to 5 years of on-orbit storage. (CCR 02115) (CCR 02163)

### MRD50 3.4.8.1.4 Types of Observations and Accuracies 5

MRD50 The GOES-R Space Segment **shall** collect Earth imagery observations in bands meeting the properties  
6 given in the table below: (Some portion of these requirements has been waived) (CCR 01273) (CCR 01866) (CCR 02115) (CCR 02501 (RDW)) (CCR 02601(RDW)) (CCR 02923 (RDW)) (CCR 02924 (RDW))

**Radiometric Sensitivity and Dynamic Range Table**

Wavelength ( $\mu\text{m}$ )	NE $\Delta$ T @ 300K (K)	NE $\Delta$ T @ 240K (K)	NE $\Delta$ N, or SNR at 100% albedo ( $\text{mW}/\text{m}^2/\text{sr}/\text{cm}^{-1}$ )	T <sub>min</sub> (K)	T <sub>max</sub> (K)	R <sub>max</sub> ( $\text{mW}/\text{m}^2/\text{sr}/\text{cm}^{-1}$ )	R <sub>max</sub> /NE $\Delta$ N
0.47 $\pm$ 0.02	-	-	300:1	N/A	-	14.4	-
0.64 $\pm$ 0.05	-	-	300:1, except < 1% smaller than 300:1 and greater than 150:1	N/A	-	21.1 (day) 1.05 (night)	-
0.865 $\pm$ 0.0195	-	-	300:1	N/A	-	22.8	-
1.378 $\pm$ 0.0075	-	-	300:1	N/A	-	21.7	-
1.61 $\pm$ 0.03	-	-	300:1	N/A	-	20.0	-
2.25 $\pm$ 0.025	-	-	300:1	N/A	-	12.1	-
3.9 $\pm$ 0.1	0.10	1.4	0.004	4	400	19.7	4925
6.185 $\pm$ 0.415	0.10	0.4	0.10	4	300	21	210
6.95 $\pm$ 0.2	0.10	0.37	0.09	4	300	37	411
7.34 $\pm$ 0.1	0.10	0.32	0.055	4	320	67.3	1224
8.5 $\pm$ 0.2	0.10	0.27	0.13	4	330	116	892
9.61 $\pm$ 0.19	0.10	0.22	0.154	4	300	93.2	605
10.35 $\pm$ 0.25	0.10	0.21	0.17	4	330	161	947
11.2 $\pm$ 0.4	0.10	0.19	0.17	4	330	176	1035
12.3 $\pm$ 0.5	0.10	0.18	0.18	4	330	190	1118
13.3 $\pm$ 0.3	0.30	0.48	0.53	4	305	150	283

(CCR 01733)

MRD51 Due to the increased spatial resolution of the ABI, the temperature maximum for the 3.9  $\mu\text{m}$  band will  
1 be at least 375 K to maintain the current (GOES-8 and GOES-M and beyond) fire detection capability.

MRD51 The phenomena observed and the critical applications are described by band:  
3

- a) 0.47  $\mu\text{m}$  band: Daytime aerosol-on-land/coastal water mapping.
- b) Visible (0.64  $\mu\text{m}$  band): Daytime cloud imaging; snow and ice cover; severe weather onset detection; low-level cloud drift winds; fog; smoke; volcanic ash; flash flood analyses, hurricane analysis; winter storm analysis.
- c) 0.865  $\mu\text{m}$ : Provides synergy with the AVHRR/3 and VIIRS, as the band is similar to band 2 on AVHRR/3 and matches the band center and bandwidth of a band of VIIRS. This band is used for determining vegetation amount, aerosols and ocean/land studies. Characterizing aerosols and their optical properties is essential for improving a number of satellite products, for example SST, ocean color and surface temperatures. This band also enables very localized vegetation stress monitoring, fire danger monitoring, and albedo retrieval.
- d) 1.378  $\mu\text{m}$ : Similar to a band on MODIS that sees into the lower troposphere due to water vapor sensitivity and thus it provides excellent daytime sensitivity to very thin cirrus.



**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD51  
3 Bandwidth and band center matched to a VIIRS band. This will aid several products relying on clear skies in the infrared windows, for example SST. CIMSS work with MODIS data in this band has set the out-of-band signal level contamination.
- e) 1.61  $\mu\text{m}$ : Daytime cloud/snow/ice discrimination; total cloud cover; aviation weather analyses for icing; smoke from low-burn-rate fires.
  - f) 2.25  $\mu\text{m}$ : Daytime land/cloud properties, particle size, and vegetation. Matches bandwidth and band center of a VIIRS band.
  - g) 3.9  $\mu\text{m}$ : Fog and low-cloud discrimination at night; fire identification; volcanic eruption and ash; daytime reflectivity for snow/ice.
  - h) 6.185  $\mu\text{m}$ : Upper-tropospheric water vapor tracking; jet stream identification; hurricane track forecasting; mid-latitude storm forecasting; severe weather analysis.
  - i) 6.95  $\mu\text{m}$ : Middle-tropospheric water vapor tracking; mid-tropospheric flow tropical storm track prediction weather; winter storm analyses.
  - j) 7.34  $\mu\text{m}$ : Lower tropospheric water vapor tracking and  $\text{SO}_2$  detection.
  - k) 8.5  $\mu\text{m}$ : Allows for detection of volcanic cloud with sulfuric acid aerosols, thin cirrus in conjunction with the 11  $\mu\text{m}$  band and determination of cloud micro-physical properties with the 11.2 and 12.3  $\mu\text{m}$  bands. This includes a more accurate delineation of ice from water clouds during the day or night.
  - l) 9.61  $\mu\text{m}$ : Total Ozone.
  - m) 10.35  $\mu\text{m}$ : Allows for determination of micro-physical properties of clouds with the 11.2 and 12.3  $\mu\text{m}$  bands. This includes a more accurate determination of cloud particle size during the day or night.
  - n) 11.2  $\mu\text{m}$ : Continuous day/night cloud analyses for many general forecasting applications; precipitation estimates; severe weather analyses and prediction; cloud drift winds; hurricane strength and track analyses; cloud top heights; volcanic ash; fog (in multi-band products); winter storms; cloud phase/particle size (in multi-band products).
  - o) 12.3  $\mu\text{m}$ : Continuous cloud monitoring for numerous applications; low-level moisture; volcanic ash trajectories; cloud particle size (in multi-band products).
  - p) 13.3  $\mu\text{m}$ : Cloud top height assignments for cloud-drift winds; cloud products for ASOS supplement; tropopause delineation; cloud opacity.<sup>757</sup>

- MRD51  
9 The GOES-R Space Segment **shall** produce Radiance product observations with relative accuracy in each band within  $1-\sigma$  of the noise of the same band for the following categories of relative error:
- a) Swath to swath (where a swath is one traversal of the scan mirror in the east-west directions over the entire scene of interest)
  - b) Detector to detector
  - c) Channel to channel
  - d) Calibration to calibration. (*CCR 02115*)

(Some portion of these requirements has been waived) (*CCR 01866*) (*CCR 02601(RDW)*)

MRD52  
1 **3.4.8.1.5 Imager System Navigation**

- MRD52  
2 The GOES-R System **shall** navigate Radiance product observations with errors not to exceed 1.0 kilometer ( $3-\sigma$ ) at SSP, except during eclipse. (*CCR 02115*)

- MRD52  
3 The GOES-R System **shall** navigate Radiance product observations with errors not to exceed 1.5 kilometer ( $3-\sigma$ ) at SSP, during eclipse. (*CCR 02115*)

MRD52  
5 **3.4.8.1.6 Data Format**

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD52 The GOES-R System Earth imagery product data samples **shall** have an angular separation that is half  
7 the spatial resolution of each band in both the East/West and North/South dimensions, centered on the  
SSP. (CCR 02115)

MRD52 **3.4.8.1.7 Co-Registration**  
8

MRD52 The GOES-R System **shall** co-register Radiance product observations between spectral bands having  
9 2.0 km spatial resolution with 99.73% absolute error of 0.4 km at SSP. (CCR 02115) (CCR 02166)  
(CCR 02600)

MRD53 The GOES-R System **shall** co-register Radiance product observations between spectral bands having  
0 2.0 km and 0.5 km spatial resolution with 99.73% absolute error of 0.4 km at SSP. (CCR 02115) (CCR  
02166) (CCR 02600)

MRD53 The GOES-R System **shall** co-register Radiance product observations between spectral bands having  
1 2.0 km and 1.0 km spatial resolution with 99.73% absolute error of 0.4 km at SSP. (CCR 02115) (CCR  
02166) (CCR 02600)

MRD53 The GOES-R System **shall** co-register Radiance product observations between spectral bands having  
2 1.0 km spatial resolution with error not to exceed 0.25 km at SSP. (CCR 02115) (CCR 02166)

MRD53 The GOES-R System **shall** co-register Radiance product observations between spectral bands having  
3 1.0 km and 0.5 km spatial resolution with error not to exceed 0.25 km at SSP. (CCR 02115) (CCR  
02166)

MRD53 **3.4.8.1.8 Pixel-to-Pixel Registration Within Frame**  
4

MRD53 The GOES-R System **shall** separate two Radiance product navigated data samples in the same band by a  
5 known fixed distance not to exceed 1.0 km at SSP (28  $\mu$ rad). (CCR 02115) (CCR 02166)

MRD53 The GOES-R System **shall** register to 99.73% absolute error two adjacent Radiance product  
6 lines/swaths of navigated data samples by a known fixed distance of 0.28 km at SSP (7.84  $\mu$ rad). (CCR  
02115) (CCR 02166) (CCR 02600)

MRD53 **3.4.8.1.9 Frame-to-Frame Registration**  
7

MRD53 The GOES-R System **shall** register the same Radiance product sample location in two consecutive  
8 products ("frame-to-frame registration") within 0.75 km at SSP (21  $\mu$ rad) for spectral bands with 0.5 km  
and 1.0 km spatial resolution. (CCR 02115) (CRR 02166)

MRD53 The GOES-R System **shall** register the same Radiance product sample location in two consecutive  
9 products ("frame-to-frame registration") within 1.0 km at SSP (28  $\mu$ rad) for spectral bands with 2.0 km  
spatial resolution. (CCR 02115) (CCR 02166)

MRD54 **3.4.8.1.10 Data Simultaneity**  
0

MRD54 The GOES-R Space Segment **shall** acquire coincident Radiance product measurements of the same  
1 Earth location for all spectral bands within 5 seconds. (CCR 02115)

MRD54 The GOES-R Space Segment **shall** acquire adjacent Radiance product North/South samples within 30  
2 seconds. (CCR 02115) (CCR 02166)

MRD54 The GOES-R Space Segment **shall** acquire adjacent Radiance product East/West measurements within  
3 15 seconds for at least 99.5% of samples. (CCR 02115) (CCR 02166)

MRD54 **3.4.8.1.11 Full Operations**  
4

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD54 5 The GOES-R Space Segment **shall** experience Radiance product measurement non-compliance time following on-orbit maneuvers not to exceed 30 minutes per maneuver. *(CCR 02115)*
- MRD54 6 **3.4.8.1.12 Reflected Solar Calibration**
- MRD21 20 The GOES-R System **shall** provide calibrated Radiances product measurements for the solar reflective channels to within an absolute accuracy of 5%. *(CCR 02115)*
- MRD21 21 The GOES-R System **shall** provide calibrated Radiances product measurements for the solar reflective channels with relative deviations (short-term repeatability) less than 0.2% (1- $\sigma$ ). *(CCR 02115)*
- MRD21 22 The GOES-R System **shall** provide calibrated Radiances product measurements for the solar reflective channels with deviations (long-term drift) less than 1.5%. *(CCR 02115)*
- MRD55 7 **3.4.8.1.13 Emissive Infrared Calibration**
- MRD56 0 Radiometric accuracy of the ABI system should be independent of scan position (or location of the target in the field of regard).
- MRD21 58 The GOES-R System **shall** provide calibrated Radiances product measurements for the emissive infrared channels to within a precision of 0.2 K. *(CCR 02166)*
- MRD56 5 **3.4.8.1.14 Low-Light Imager**
- MRD56 7 The GOES-R System **shall** relieve Radiance product performance for all low light visible samples acquired when any point on the Earth falls within 10 degrees of the sun, as viewed from the operational location. *(CCR 02115)*
- MRD21 56 The GOES-R Space Segment **shall** produce Radiance product observations in low light (5% albedo) conditions in the 0.64 micron band at a 50:1 SNR. (Some portion of this requirement has been waived.) *(CCR 01733) (CCR 02166) (CCR 02588 (RDW))*
- MRD56 9 **3.4.8.2 EUVS XRS Irradiance Sensors (EXIS)**
- MRD81 9 The XRS near-real-time calibrated data product (Level 1b data) algorithm consists of the following operations: background subtraction; application of gain; and application of responsivity to convert to irradiance units; and inclusion of a 1-AU correction factor that is supplied with the data, but not applied. No geometric coordinate transformation is applied. *(CCR 01491)*
- MRD81 7 The EUVS near-real-time calibrated data product algorithm (Level 1b proxy algorithm) consists of the following operations: application of gain and linearity corrections; background and scattered light subtraction; application of responsivity to convert to irradiance units; determination of modeled irradiance product; and inclusion of a 1-AU correction factor that is supplied with the data, but not applied. Note that no geometric coordinate transformation is applied. *(CCR 01492)*
- MRD57 2 The GOES-R Space Segment **shall** employ an EXIS instrument with an 8.4 year Mean Mission Duration (MMD) at the end of 10 years, or equivalently a reliability of 0.6 after 10 years of on-orbit operations, preceded by up to 5 years of ground storage and up to 5 years of on-orbit storage. *(CCR 02115)*
- MRD57 4 **3.4.8.2.1 Extreme Ultraviolet Sensor (EUVS)**

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD57 7 The GOES-R System **shall** constrain the Solar Flux: EUV product long term stability (over the life of the mission) to be less than 5% or have the ability to track changes over mission. *(CCR 02115)*
- MRD57 9 The GOES-R System **shall** measure and track the Solar Flux: EUV product out of band signal if greater than 10%. *(CCR 02115)*
- MRD58 0 The GOES-R Space Segment **shall** constrain Solar Flux: EUV product spatial response variation not to exceed +/- 5% from uniformity. *(CCR 02115)*
- MRD21 57 The GOES-R System **shall** produce a Solar Flux: EUV product for wavelengths from 5 to 127 nm. *(CCR 02166)*
- MRD58 1 Full instrument calibration is required before launch. NIST assets will be brought to bear as appropriate.
- MRD58 2 **3.4.8.2.2 X-Ray Sensor (XRS)**
- MRD58 4 The GOES-R Space Segment **shall** report Solar Flux: X-ray product flux levels throughout solar X-ray flares events. *(CCR 02115)*
- MRD58 6 The GOES-R Space Segment Solar Flux: X-ray product **shall** report flux levels throughout quiet solar activity periods. *(CCR 02115)*
- MRD58 8 The GOES-R System **shall** measure and track Solar Flux: X-ray product out of band signal if greater than 10%. *(CCR 02115)*
- MRD58 9 The GOES-R System Solar Flux: X-ray product mean signal **shall** be greater than the standard deviation of the data over a 10-minute interval for the Product Measurement Range minimum. *(CCR 02115) (CCR 02166)*
- MRD59 1 **3.4.8.3 Solar UltraViolet Imager (SUVI)**
- MRD81 6 The SUVI near-real-time calibrated data product (Level 1b data) algorithm consists of the following operations: application of gain and signal linearity corrections; background subtraction; vignetting corrections; bad pixel corrections (not including cosmic rays); flat fielding; conversion to incident photon flux; application of fixed conversion to radiance; and with time tag, S/C position, and S/C attitude information appended to enable conversion to heliographic coordinate system. *(CCR 01490)*
- MRD59 3 The GOES-R Space Segment **shall** employ a SUVI instrument with an 8.4 year Mean Mission Duration (MMD) at the end of 10 years, or equivalently a reliability of 0.6 after 10 years of on-orbit operations, preceded by up to 5 years of ground storage and up to 5 years of on-orbit storage. *(CCR 02115)*

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD59 The GOES-R Space Segment **shall** collect Solar imagery observations in channels given in the table  
5 below:

**SUVI Spectral Bands Table**

Fe XVIII	[93.9 Å]
Fe VIII	[131.2 Å]
Fe IX	[171.1 Å]
Fe XII	[195.1 Å]
Fe XV	[284.2 Å]
He II	[303.8 Å]

(CCR 01301) (CCR 01424) (CCR 02115)

MRD21 The GOES-R System **shall** detect radiance variations of at least 0.1% in the Solar Imagery: X-Ray  
23 product observations. (CCR 02115)

MRD21 The GOES-R Space Segment **shall** have gaps of not greater than 2 minutes in duration in the Solar  
24 Imagery: X-Ray product observations. (CCR 02115)

MRD59 The GOES-R System **shall** time tag the Solar Imagery: X-ray product with Universal Time with 1.0  
9 msec accuracy (1- $\sigma$ ). (CCR 02115)

MRD60 Full instrument calibration is required before launch. NIST assets will be brought to bear as  
0 appropriate.

**MRD60 3.4.8.4 Space Environment In-Situ Suite (SEISS)**

1

MRD81 SEISS Level 1b data consist of output from algorithms that convert count rate to flux per energy range,  
8 direction, and species; correct out-of-band response using SEISS data only; correct observing direction to produce invariance to yaw flip (i.e. the northernmost (westernmost) measurement would always be expressed as from the northernmost (westernmost) telescope system, regardless of yaw flip), and include dosimeter measurements for higher level product processing.  
(CCR 01489) (CCR 01839)

MRD60 The GOES-R Space Segment **shall** employ a SEISS instrument suite with an 8.4 year Mean Mission  
3 Duration (MMD) at the end of 10 years for each instrument, or equivalently a reliability of 0.6 after 10 years of on-orbit operations, preceded by up to 5 years of ground storage and up to 5 years of on-orbit storage for each instrument.  
(CCR 01633) (CCR 01731) (CCR 02115)

**MRD61 3.4.8.4.1 Stability**

4

MRD61 The GOES-R Space Segment **shall** measure Energetic Heavy Ions, Solar Galactic Protons and  
5 Magnetospheric Electrons and Protons: Medium and High Energy products where energies greater than 30 keV shall have a temporal uncertainty in the energy bandwidth less than 3%. (CCR 02115)

MRD61 The GOES-R Space Segment **shall** measure a Magnetospheric Electrons and Protons: Low Energy  
6 product where energies less than or equal to 30 keV have a temporal uncertainty in the energy bandwidth less than 3%. (CCR 02115) (CCR 02416 (RDW))

**MRD61 3.4.8.4.2 In-Flight Calibration**

7

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD61 9 The GOES-R Space Segment **shall** determine the Magnetospheric Electrons and Protons: Medium and High Energy, Energetic Heavy Ions and Solar Galactic Protons product precision energy uncertainty due to sensor hardware to within  $\pm 3\%$ . (*CCR 02115*)
- MRD62 0 The GOES-R Space Segment **shall** determine the Magnetospheric Electrons and Protons: Low Energy product precision energy uncertainty due to sensor hardware to within  $\pm 3\%$ . (*CCR 02115*)
- MRD62 4 **3.4.8.4.3 Contaminants**
- MRD62 6 Correction algorithms for out-of-band response may be provided if necessary to comply with the out of band response requirement.
- MRD62 9 **3.4.8.5 Geostationary Lightning Mapper (GLM)**
- MRD63 0 The lightning measurements will be related on a continuous basis to other observable data, such as radar returns, cloud images, and other meteorological variables.
- MRD63 1 The GOES-R Space Segment **shall** employ a GLM instrument that will detect lightning in an area spanned by a 100 degree (east-west) by 100 degree (north-south) rectangle, centered at the SSP. (*CCR 02115*)
- MRD63 6 The GOES-R System **shall** navigate Lightning Detection: Hemispheric product observations with errors not to exceed 5.0 km ( $3\text{-}\sigma$ ) at SSP. (*CCR 02115*)
- MRD63 7 The GOES-R System **shall** register the same Lightning Detection: Hemispheric product sample location in two consecutive products ("frame-to-frame registration") within 5.0 km at SSP over 1 second. (*CCR 01621*) (*CCR 02115*)
- MRD63 8 The GOES-R Space Segment **shall** measure the Lightning Detection: Hemispheric product detection of valid lightning events using rapid optical pulses. (*CCR 02115*)
- MRD63 9 The GOES-R System **shall** constrain the Lightning Detection: Hemispheric product to contain no more than a 5% false positive lightning event rate. (*CCR 02115*)
- MRD64 2 The GOES-R Space Segment shall employ a GLM instrument with an 8.4 year Mean Mission Duration (MMD) at the end of 10 years, or equivalently a reliability of 0.6 after 10 years of on-orbit operations, preceded by up to 5 years of ground storage and up to 5 years of on orbit storage. (*CCR02115*) (*CCR 02163*)
- MRD21 92 **3.4.8.5.1**
- MRD64 6 **3.4.8.6 Magnetometer**
- MRD64 7 **3.4.8.6.1 General Magnetometer Requirements**
- MRD79 5 The GOES-R Space Segment **shall** employ a Magnetometer instrument with an 8.4 year Mean Mission Duration (MMD) at the end of 10 years, or equivalently a reliability of 0.6 after 10 years of on-orbit operations, preceded by up to 5 years of ground storage and up to 5 years of on orbit storage. (*CCR 02115*) (*CCR 02163*)
- MRD65 3 **3.4.8.6.2 Data Sampling Rate**
- MRD65 5 The GOES-R Space Segment **shall** sample each Geomagnetic Field product spatial component uniformly in time and simultaneously within 25% of the sample period (i.e., within 0.125 seconds for a 2 Hz sampling rate). (*CCR 02115*)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD65 3.4.8.6.3 Bandwidth**  
6

MRD65 The GOES-R System **shall** discriminate Geomagnetic Field product observations against frequency  
7 aliasing of the data from background sources and instrument-external interference. (CCR 02115)

**MRD66 3.4.8.6.4 Noise**  
1

MRD66 The GOES-R Space Segment **shall** constrain Geomagnetic Field product magnitude outputs computed  
2 on the ground from measurements in each axis from fluctuating by more than 0.3 nT when the  
spacecraft is in a normal operational mode. (CCR 02115)

MRD66 The GOES-R Space Segment **shall** average no more than one transient measurement per hour in the  
3 production of the Geomagnetic Field product. (CR 02115)

MRD66 The GOES-R Space Segment **shall** include transients of no more than five seconds in duration in  
4 Geomagnetic Field product measurements. (CCR 02115)

**MRD67 3.5 Launch Segment Requirements**  
4

MRD21 The GOES-R System **shall** maintain continuous telemetry functions during all mission-critical events.  
25 (CCR 02115)

MRD21 The GOES-R System **shall** maintain continuous command functions during all mission-critical events  
26 that are subsequent to the separation from the launch vehicle. (CCR 02115)

**MRD68 3.6 Ground Segment Requirements**  
6**MRD68 3.6.1 General Ground Segment Requirements**  
7

MRD58 The GOES-R Ground Segment monthly availability **shall** be at least 0.989 over the system lifetime.  
(CCR 02115)

Availability is defined as the fraction of time the ground segment has full functionality over a monthly interval. (CCR 01546)

MRD59 The GOES-R Ground Segment mean time to restore functionality **shall** be less than 2 hours.  
(CCR 01546) (CCR 02115)

MRD70 The GOES-R Ground Segment terrestrial digital communications **shall** conform to IPv6 standards per  
OMB Memorandum M-05-22 [Applicable Document 18]. (CCR 01545) (CCR 02115)

MRD68 The GOES-R Ground Segment **shall** provide mission management, product generation and product  
8 distribution functionality. (CCR 02115)

MRD21 The GOES-R System **shall** provide command and control of the satellites in the GOES-R series during  
27 all test phases for the life of the GOES-R mission set. (CCR 02115)

MRD21 The GOES-R Ground Segment **shall** archive all software versions for the life of the GOES-R mission  
28 set. (CCR 02115) (CCR 02166)

MRD21 The GOES-R Ground Segment **shall** archive data supporting product performance evaluation.  
29 (CCR02115)

MRD69 The GOES-R System **shall** have a primary location distributed over the NOAA facilities in Suitland,  
4 MD and Wallops, VA. (CCR 02115)

## **ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD69 5 The GOES-R System **shall** have a back-up ground station at Fairmont, WV. (*CCR 01625*) (*CCR 02115*)

MRD21 30 The GOES-R Ground Segment **shall** monitor the quality of all products. (*CCR 02115*)

MRD70 5 The GOES-R Ground Segment **shall** maintain operational software. (*CCR 02115*)

MRD21 02 The GOES-R System **shall** make Magnetometer data and sub-sampled SEISS data available to users when received via the telemetry stream. (*CCR 01503A*)

MRD65 The GOES-R Ground Segment **shall** comply with security standards listed in Security Requirements for Information Management Technology Resources [Applicable Document 1]. (*CCR 01572A*) (*CCR 02115*)

MRD66 The GOES-R Ground Segment **shall** conform to the NOAA IT standards listed in U.S. Department of Commerce IT Security Program Policy (2009). [Applicable Document 2] (*CCR 01572A*) (*CCR 02115*)

### MRD70 9 **3.6.2 Mission Management**

MRD71 3 The GOES-R Ground Segment **shall** provide terrestrial interface components to support the SS to C3S IRD [Applicable Document 11]. (*CCR 02115*)

MRD71 4 The GOES-R Ground Segment **shall** perform engineering analysis on telemetry, command and event data for the life of the mission. (*CCR 02115*)

MRD71 9 The GOES-R Ground Segment **shall** perform satellite alignment activities. (*CCR 02115*)

MRD72 2 The GOES-R Ground Segment Maximum Time To Restore (MaxTTR) functionality related to system health and safety shall be no greater than 5 minutes. (*CCR 02115*)

MRD72 8 The GOES-R Ground Segment **shall** monitor the quality of communications links with the Space Segment. (*CCR 02115*)

MRD75 2 The GOES-R Ground Segment **shall** collect and report metrics related to system performance and product production. (*CCR 02115*)

### MRD72 9 **3.6.3 Product Generation (CCR 02163)**

MRD73 1 The GOES-R Ground Segment **shall** store all data required to reproduce the full compliment of GOES-R series products (all Level 1b, Level 2, and Level 2+ products) for 7 days from all input data (Level 0 data), auxiliary and metadata. (*CCR 02115*)

MRD21 31 The GOES-R Ground Segment **shall** provide for the maintenance of product quality. (*CCR 02115*)(*CCR 02166*)

MRD73 7 The GOES-R Ground Segment **shall** provide for the correction of the long-term radiometric drift of the Radiances product accuracy by 1% over its lifetime. (*CCR 01116*) (*CCR 02115*) (*CCR 02166*)

MRD73 9 The GOES-R Ground Segment **shall** employ algorithms that produce the Atmospheric product group. (*CCR 02115*)

MRD74 0 The GOES-R Ground Segment **shall** employ algorithms that produce the Land product group. (*CCR 02115*)

MRD74 1 The GOES-R Ground Segment **shall** employ algorithms that produce the Ocean product group. (*CCR 02115*)



**ID                    410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

- MRD74    The GOES-R Ground Segment **shall** employ algorithms that produce the Space and Solar product  
2        group. (CCR 02115)
- MRD21    The GOES-R Space Segment **shall** develop a ground processing algorithm for the Radiances product.  
32        (CCR 02115)
- MRD21    The GOES-R Space Segment **shall** develop a ground processing algorithm for the Lightning Detection:  
33        Hemispheric product. (CCR 02115)
- MRD21    The GOES-R Space Segment **shall** develop a ground processing algorithm for the Solar Imagery: X-ray  
34        product. (CCR 02115)
- MRD21    The GOES-R Space Segment **shall** develop a ground processing algorithm for the Energetic Heavy Ions  
35        product. (CCR 02115)
- MRD21    The GOES-R Space Segment **shall** develop a ground processing algorithm for the Magnetospheric  
36        Electrons and Protons: Low Energy. (CCR 02115)
- MRD21    The GOES-R Space Segment **shall** develop a ground processing algorithm for the Magnetospheric  
37        Electrons and Protons: Medium and High Energy product. (CCR 02115)
- MRD21    The GOES-R Space Segment **shall** develop a ground processing algorithm for the Solar and Galactic  
38        Protons product. (CCR 02115)
- MRD21    The GOES-R Space Segment **shall** develop a ground processing algorithm for the Geomagnetic Field  
39        product. (CCR 02115)
- MRD21    The GOES-R Space Segment **shall** develop a ground processing algorithm for the Solar Flux: EUV  
40        product. (CCR 02115)
- MRD21    The GOES-R Space Segment **shall** develop a ground processing algorithm for the Solar Flux: X-Ray.  
41        (CCR 02115)
- MRD21    The GOES-R Ground Segment **shall** implement a ground processing algorithm for the Radiances  
42        product. (CCR 02115)
- MRD21    The GOES-R Ground Segment **shall** implement a ground processing algorithm for the Lightning  
43        Detection: Hemispheric product. (CCR 02115)
- MRD21    The GOES-R Ground Segment **shall** implement a ground processing algorithm for the Solar Imagery:  
44        X-ray product.(CCR 02115)
- MRD21    The GOES-R Ground Segment **shall** implement a ground processing algorithm for the Energetic Heavy  
45        Ions product. (CCR 02115)
- MRD21    The GOES-R Ground Segment **shall** implement a ground processing algorithm for the Magnetospheric  
46        Electrons and Protons: Low Energy. (CCR 02115)
- MRD21    The GOES-R Ground Segment **shall** implement a ground processing algorithm for the Magnetospheric  
47        Electrons and Protons: Medium and High Energy product. (CCR 02115)
- MRD21    The GOES-R Ground Segment **shall** implement a ground processing algorithm for the Solar and  
48        Galactic Protons product. (CCR 02115)
- MRD21    The GOES-R Ground Segment **shall** implement a ground processing algorithm for the Geomagnetic  
49        Field product. (CCR 02115)
- MRD21    The GOES-R Ground Segment **shall** implement a ground processing algorithm for the Solar Flux: EUV  
51        product. (CCR 02115)

**ID                    410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD21    The GOES-R Ground Segment **shall** implement a ground processing algorithm for the Solar Flux: X-  
50        Ray. *(CCR 02115)*

MRD74    The GOES-R Ground Segment **shall** produce content for the GRB communication link to include  
3        product data, ancillary and metadata. *(CCR 02115)*

MRD76    **3.6.4 Ground Segment Design and Construction (CCR 02163)**  
3

MRD76    The GOES-R Ground Segment **shall** scale up to 100% for all functionalities and interfaces supporting  
4        product generation and distribution. *(CCR 01625) (CCR 02115)*

MRD76    **3.6.5 Integrated Logistics**  
8

MRD76    **3.6.5.1 Maintenance**  
9

MRD21    The GOES-R System **shall** provide components and interfaces for the maintenance of operational  
52        functions. *(CCR 02115)*

MRD21    The GOES-R Ground Segment **shall** provide components and interfaces for the development of  
53        operational functions. *(CCR 02115)*

MRD77    The GOES-R System **shall** remain operational during all planned maintenance activities.  
1        *(CCR 02115)*

MRD77    **3.6.5.2 Training**  
4

MRD77    The GOES-R System **shall** simulate operational activities with high fidelity. *(CCR 02115)*  
5

**ID                    410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD77    4 Validation and Verification (CCR 02163)**  
**6**

MRD20    A Verification approach and method for each System level requirement will be found in the GOES-R  
88    Series, Program Verification and Validation Plan, 410-R-PLN-0083 [Applicable Document 40]. The  
reader is referred to the V&V Plan for details of a specific verification approach. (*CCR 01623*)

MRD20    The requirements in sections 3.4, 3.5 and 3.6 of this document will be verified as part of the Flight  
89    Project and Ground Project verification activities. (*CCR 01623*)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD78 5 Definitions and Abbreviations**  
8

MRD78 The following definitions are provided here to clarify requirements using the defined terms.

9 **Anomaly:** a deviation or departure from the normal. It doesn't necessarily require an action, but it needs to be explained and or investigated.

**Bus:** is also a spacecraft (see Spacecraft definition).

**Contingency:** either a description of an activity, or a type of procedure or other documentation written to correct, and/or prevent, and/or mitigate a potential problem or an anomaly.

**Constellation:** is the grouping of GOES satellites in orbit.

**Critical Life and Property Products:** are those ranked as Key Performance Parameters.

**Discussion:** is text appearing below a requirement provides background, additional information, or rationale for a requirement. It is not a requirement.

**East Geostationary Orbit Location:** is at 75 degrees West Longitude.

**Guidance Navigation and Control (GN&C):** comprises the disciplines of attitude determination and control, orbit determination, propulsion, and flight dynamics.

**Information Rate:** is the rate of earth observation data prior to coding or other overhead that contributes to the total transmission rate.

**Instruments:** are highly valuable measurement devices for atmospheric, space environment, and solar data collection forming a subset of the payloads.

**Inter-Grouping Communications:** are communications between the functional groupings of the ground segments.

**Level 0:** Raw data reconstructed to unprocessed instrument data at full space-time resolution with all available supplemental information to be used in subsequent processing (e.g. ephemeris, health and safety) appended.

**Level 1a:** Unpacked, reformatted and resampled Level 0 data with all supplemental information to be used in subsequent processing appended. Data generally presented as full space/time resolution. A wide variety of sub-level products are possible.

**Level 1b data:** Unpacked, reformatted, and resampled Level 0 data with all supplemental information to be used in subsequent processing appended. Radiometric and geometric correction applied to produce parameters in physical units. Data generally presented as full space/time resolution. (This is identical to the earth-referenced instrument data with radiometric calibration applied and all calibration data appended).

**Level 2:** Retrieved environmental variables (e.g. sea surface temperature) at the same resolution and location as the Level 1 source.

**Level 2+:** All Level 2 and higher products.

**Level 3:** Data or retrieved environmental variables which have been spatially and/or temporally resampled (i.e. derived from Level 1 or 2). Such resampling may include averaging and compositing.

**Level 4:** Model output or results from analyses of lower level data (i.e. variable that is not directly measured by the instruments, but are derived from these measurements).

**Mean Time Between Failure:** the average time that a system/component that works without failure.

**Mean Time to Failure:** the expected time that a system/component will operate before the first failure will occur.

**Mean Time to Repair:** the average time required to repair a system/component.

**Metadata:** is non-radiometric data that provides additional information on the data collection conditions including latitude and longitude information, day, time, data quality flags that depend on the

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD78 level (0, 1, 1b, 2, etc.) of the data associated with the metadata, and any additional space-ground ICD  
9 required information.

**Mission Availability:** is the probability that the entire GOES-R series system can be successfully used for its specified mission over the stated period of time.

**Non-Interference Basis:** means that no interference causing loss of data or reduction in data quality occurs between affected systems.

**Notifications:** unsolicited communications from the Ground Segment to Users. These messages may be communicated using a variety of communication methods.

**Off-Line Development:** is the build-up and testing of components for an operational system without interference with the operational system.

**On-Orbit Check-Out Location:** is at 90 degrees West Longitude.

**On-Orbit Storage Location:** is at 105 degrees West Longitude.

**Operational Lifetime:** of the GOES-R series begins immediately after instrument check-out of the first satellite on-orbit and extends through the operational usage of a GOES-R series satellite (providing at least partial CONUS coverage) while meeting the mission availability requirements.

**Payloads:** are the highly valuable contents of the satellite and include the instruments and the Payload Services including both the GRB and the Unique Payload Services.

**Primary Instruments:** are the ABI instruments.

**Raw Data:** X-band data (instrument and some telemetry data) in their original packets, as received from a satellite.

**Real Time:** the designation applied to the propagation of data through a system with minimum time delays. Examples of minimum time delays include any of the following: speed of light propagation; buffering due to compressing, packetizing, framing, and coding; and channel sharing such as required for the CCSDS CVCDU protocols.

**Satellite:** consists of a spacecraft to support the instruments, the instruments, the associated communication systems, and the communications payload services.

**Satellite Failure:** occurs when one of the primary instruments fails to meet the specified performance required to produce its prioritization product set 1 products. A satellite failure may be caused by a hardware or software failure on the satellite that prevents the satellite from fulfilling its mission. A satellite may be deemed a failure as a result of a primary instrument failure, described under primary instrument failure or a communications failure that does not permit the primary instruments to downlink their instrument data. In addition, all conditions that produce no signal or permit no data transmission on the data downlink and consequently yield indeterminate instrument noise performance also constitute a failure. NOAA will review the operational status if the level of performance for a given satellite is sufficient to continue operations when any requirement for the primary instruments is unmet; instrument requirements already reflect end-of life operational performance criteria. NOAA will also decide if the level of performance for a given satellite is sufficient to continue operation of any satellite beyond the lifetime of the primary instrument.

**Service Request:** any type of request for information or service including requests for products.

**Service Response:** a response to the customer regarding a service request.

**Single point failure:** is a failure of a hardware or software element with no redundancy.

**Single string of equipment:** is a system capable of performing all required functionality from data input through data output.

**Spacecraft:** is a vehicle without instruments, but including the magnetometer and the raw data downlink satellite service, propulsion system, power system, thermal system, GN&C, and structure, that is intended to be launched into space by a launch vehicle.

**Space and Launch Segment Availability:** is the probability that the Space and Launch Segment can be successfully used for any specified mission over the stated period of time; this is a probability of

**ID                    410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD78    success.

9

**Transmission rate:** is the total downlink or uplink data rate that includes the rate of observation data as well as coding or other overhead.

**User Community:** is a general term describing the aggregate of GOES-R users composed of the subset of rebroadcast users, data subscription users, data products subscription users, retrospective users, and communication systems data users.

**User Service Functionality:** includes the software and hardware of the system that provides the capacity of the system to interface with the user through the Mission Management Functionality.

**West Geostationary Orbit Location:** is at 137 degrees West Longitude. (*CCR 01186*) (*CCR 01622*)

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)****MRD79 6 Acronyms**  
0

MRD79	ABI	Advanced Baseline Imager
1	ANSI	American National Standards Institute
	AVHRR	Advanced Very High Resolution Radiometer
	AWG	Algorithm Working Group
	BW	Bandwidth
	CAPE	Convective Available Potential Energy
	CCAS	Cape Canaveral Air Station (Florida)
	CCSDS	Consultative Committee for Space Data Systems
	CDA(S)	Command Data Acquisition (Station)
	CDRL	Contract Data Requirements List
	CLASS	Comprehensive Large Array-data Stewardship System
	CIMSS	Cooperative Institute for Meteorological Satellite Studies
	CONUS	Contiguous United States
	CORL	Consolidated Observational Requirements List
	DAPS	DCS Automated Processing System
	dBZ	Radar Reflectivity Factor (10logZ)
	DCS	Data Collection Systems
	DCP	Data Collection Platforms
	DCPI	Data Collection Platform Interrogate
	DCPR	Data Collection Platform Report
	DRGS	Direct Readout Ground Stations
	DU	Dobson Units
	EELV	Evolved expendable launch vehicle
	EELVM	Evolved Expendable Launch Vehicle - Medium
	EESS	Earth Exploration Satellite Services
	EEZ	Exclusive Economic Zone
	EHIS	Energetic Heavy Ion Sensor
	ELT	Emergency Locator Transmitters
	EM	Enterprise Management
	EMWIN	Emergency Managers Weather Information Network
	EPIRB	Emergency Position Indicating Radio Beacons
	EUVS	Extreme Ultraviolet Sensor
	EXIS	EUVS XRS Irradiance Sensors
	F&PS	Functional and Performance Specifications
	FEC	Forward Error Correction
	FEMA	Federal Emergency Management Agency
	FOC	Full Operation Capability
	FWHM	Full Width Half Maximum
	GIRD	General Interface Requirements Document
	GLM	Geostationary Lightning Mapper
	GN&C	Guidance Navigation and Control
	GOES-R	Geostationary Operational Environmental Satellite - R
	GRB	GOES Rebroadcast
	GRBT	GOES Rebroadcast Terminals
	GS	Ground Station
	GSE	Ground Support Equipment
	hPa	Hectopascals
	HRIT/EMWIN	High Rate Information Transmission/Emergency Managers Weather Information Network (formerly known as EMWIN/LRIT)
	ILS	Integrated Logistics Support
	IPO	Integrated Program Office
	IR	Infrared
	IRD	Interface Requirements Documents
	ISO	International Office for Standardization
	IT	Information Technology
	ITU	International Telecommunications Union

**ID 410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD79	K	kelvin
1	KI	K-Index
	km	kilometer
	KPP	Key Performance Parameter
	LI	Lifted Index
	LRIT	Low Rate Information Transmission
	LV	Launch Vehicle
	LZA	Local Zenith Angle
	m	meter
	MAP	Mission Assurance Plan
	MHz	Megahertz
	MODIS	Moderate Resolution Imaging Spectrometer
	MM	Mission Management
	mm	millimeter
	MMD	Mean Mission Duration
	MPS	Magnetospheric Particle Sensor
	MRD	Mission Requirements Document
	MTF	Modulation Transfer Function
	MTTR	Mean Time to Restore
	NEdT	Noise Equivalent Delta Temperature
	NESDIS	National Environmental Satellite, Data and Information Service
	NIST	National Institute of Standards and Technology
	NOAA	The National Oceanic and Atmospheric Administration
	NOSA	NOAA Observing System Architecture
	NSOF	NOAA Satellite Operations Facility
	NTIA	National Telecommunications and Information Administration
	NWP	Numerical Weather Prediction
	NWS	National Weather Service
	PD	Product Distribution
	PFD	Power Flux Density
	PG	Product Generation
	PLB	Personal Locator Beacons
	PORD	Performance and Operational Requirements Document
	PRAD	Payload Resource Allocation Document
	PSD	Power Spectral Density
	QPE	Quantitative Precipitation Estimation
	QPSK	Quadrature Phase Shift Keying (modulation)
	RBU	Remote Backup facility
	RFI	Radio Frequency Interference
	RMA	Reliability, Maintainability and Availability
	SAR	Search and Rescue
	SARSAT	Search and Rescue Satellite Aided Tracking
	SCGPS	Solar and Galactic Proton Sensor
	SEISS	Space Environment in-Situ Suite
	Sfc	Surface
	SI	International System of Units
	SI	Saltwater Index
	SIS	Solar Imaging Suite
	SOCC	Satellite Operational Control Center
	SOW	Statement of Work
	sr	Steradian
	SRRC	Square Root Raised Cosine
	SSAS	Ship Security Alerting System
	SSP	Sub-Satellite Point
	SST	Sea Surface Temperature
	SUVI	Solar UltraViolet Imager
	TBD	To be Determined
	TBR	To be Refined/Reviewed
	TOA	Top of Atmosphere



**ID                    410-R-MRD-0070, RM Version, Mission Requirements Document (MRD)**

MRD79	TT	Total Totals Index
1	UIID	Unique Instrument Interface Document
	VIIRS	Visible Infrared Imaging Radiometer Suite
	WCDAS	Wallops Command and Data Acquisition Station
	WEFAX	Weather Facsimile
	WMO	World Meteorological Organization
	Wx	Weather
	XRS	Solar X-Ray Sensor

*(CCR 01121) (CCR 01423) (CCR 01761)*