

## The Recommended GHRSSST Data Specification (GDS) Revision 2.0

# GDS 2.0 Technical Specifications

Document Management			
<b>Reference:</b>	GDS2.0_TechnicalSpecifications_v2.0.doc		
<b>Version:</b>	2.0	<b>Document Revision:</b>	02.007
<b>Last save date:</b>	01/10/2010 13:52:002010 13:29 UTC		
<b>Date of issue:</b>	01/10/2010 13:52:002010 14:00 UTC		
<b>Document type:</b>	Microsoft Word [Compatibility Mode]		
<b>BookCaptain:</b>	Kenneth S. Casey and Craig Donlon		
<b>Author:</b>	The Group for High Resolution Sea Surface Temperature Science Team		
<b>Master File Location:</b>	URL to location of online resource: <b>Approved version:</b> <a href="http://www.ghrsst.org/documents.htm?parent=708">http://www.ghrsst.org/documents.htm?parent=708</a> <b>Development version:</b> <a href="http://www.ghrsst.org/documents.htm?parent=709">http://www.ghrsst.org/documents.htm?parent=709</a>		

**Please reference this document as:**

*GHRSSST Science Team (2010), The Recommended GHRSSST Data Specification (GDS) Revision 2.0 Technical Specifications, available from the GHRSSST International Project Office, <http://www.ghrsst.org>, pp 120.*





**The Recommended  
GHRSSST Data Specification (GDS)  
Revision 2.0**

**GDS 2.0 Technical Specifications**





Compiled by the GHRSSST International Science Team

Published by the International GHRSSST Project Office  
Department of Meteorology,  
University of Reading,  
Reading  
United Kingdom

Tel +44 (0) 118 3785579  
Fax +44 (0) 118 3785576  
E-mail: [ghrsst-po@nceo.ac.uk](mailto:ghrsst-po@nceo.ac.uk)

## Document Approval Record

This document has been approved for release only when signed and dated signatures are present for the entities listed below. Documents may be digitally signed.

Role	Name	Representing Entity	Signature(s)	Date(s)
Book Captains	Kenneth Casey and Craig Donlon	GHSST Science Team		30/9/2010
GHSST Project Office	Andrea Kaiser-Weiss	GHSST Quality Assurance and Revision Control		1/10/2010
GHSST GDS 2.0 Internal Review Board	Andrew Bingham	For the Data Assembly and Systems Technical Advisory Group (DAS-TAG)		
GDS 2.0 External Review Board	Anne O'Carroll	GHSST External Review Board		1/10/2010
GHSST Advisory Council	Jacob Høyer	GHSST Advisory Council		1/10/2010

## Document History

Author	Version description	Version number	Date of Revision
K Casey	Edits based on external review and inputs from the GHRSSST Science Team	v2.006	27 <sup>th</sup> September 2010
A Kaiser-Weiss	Release version	v2.007	1 <sup>st</sup> October 2010

## Document Change Record

Author	Reason for Change	Pages/paragraphs Changed	Date of Revision

## The GHR SST Science Team 2010/11

O Arino	European Space Agency, Italy
E Armstrong	NASA/JPL, USA
I Barton	CSIRO Marine Research, Australia
H Beggs	Bureau of Meteorology, Melbourne Australia
A Bingham	NASA/JPL, USA
K S Casey	NOAA/NODC, USA
S Castro	University of Colorado, USA
M Chin	NASA/JPL, USA
G Corlett	University of Leicester, UK
P Cornillon	University of Rhode Island, USA
C J Donlon (Chair)	European Space Agency, The Netherlands
S Eastwood	Met.no, Norway
B Evans	RSMAS, University of Miami, USA
C Gentemann	Remote Sensing systems Inc., USA
A Harris	NOAA/CICS, USA
J Hoeyer	DMI, Denmark
A Kaplan	Lamont-Doherty Earth Observatory of Columbia University, USA
P LeBorgne	EUMETSAT OSI-SAF, France
D Llewellyn-Jones	University of Leicester, UK
L Majewski	Bureau of Meteorology, Australia
M Martin	MetOffice, UK
D May	Naval Oceanographic Office, USA
C Merchant	University of Edinburgh, Scotland
P Minnett	RSMAS, University of Miami, USA
T Nightingale	RAL, UK
A O'Carroll	EUMETSAT, Germany
J-F Piolle	IFREMER, France
D J Poulter	National Oceanography Centre, UK
N Rayner	MetOffice Hadley Centre, UK
R Reynolds	NOAA/NCDC, USA
I S Robinson	National Oceanography Centre, UK
J Vazquez	NASA/JPL, USA
G Wick	NOAA/ETL, USA

## Executive Summary

A new generation of integrated Sea Surface Temperature (SST) data products are being provided by the Group for High Resolution Sea Surface Temperature (GHRSSST). L2 products are provided by a variety of data providers in a common format. L3 and L4 products combine, in near-real time, various SST data products from several different satellite sensors and in situ observations and maintain fine spatial and temporal resolution needed by SST inputs to a variety of ocean and atmosphere applications in the operational and scientific communities. Other GHRSSST products provide diagnostic data sets and global multi-product ensemble analysis products. Retrospective reanalysis products are provided in a non real time critical offline manner. All GHRSSST products have a standard format, include uncertainty estimates for each measurement, and are served to the international user community free of charge through a variety of data transport mechanisms and access points that are collectively referred to as the GHRSSST Regional/Global Task Sharing (R/GTS) framework.

The GHRSSST Data Specification (GDS) Version 2.0 is a technical specification of GHRSSST products and services. It consists of a technical specification document (this volume) and a separate Interface Control Document (ICD). The GDS technical documents are supported by a User Manual and a complete description of the GHRSSST ISO-19115-2 metadata model. GDS-2.0 represents a consensus opinion of the GHRSSST international community on how to optimally combine satellite and in situ SST data streams within the R/GTS. The GDS also provides guidance on how data providers might implement SST processing chains that contribute to the R/GTS.

This document first provides an overview of GHRSSST followed by detailed technical specifications of the adopted file naming specification and supporting definitions and conventions used throughout GHRSSST and the technical specifications for all GHRSSST Level 2P, Level 3, Level 4, and GHRSSST Multi-Product Ensemble data products. In addition, the GDS 2.0 Technical Specification provides controlled code tables and best practices for identifying sources of SST and ancillary data that are used within GHRSSST data files.

The GDS document has been developed for data providers who wish to produce any level of GHRSSST data product and for all users wishing to fully understand GHRSSST product conventions, GHRSSST data file contents, GHRSSST and Climate Forecast definitions for SST, and other useful information. For a complete discussion and access to data products and services see <http://www.ghrsst.org>, which is a central portal for all GHRSSST activities.

## Table of Contents

Document Approval Record .....	4
Document History.....	5
Document Change Record.....	5
The GHRSSST Science Team 2010/11 .....	6
Executive Summary .....	7
Table of Contents .....	8
Figures in this document .....	11
Tables in this document .....	11
1 Applicable Documents.....	13
2 Reference Documents.....	13
3 Acronym and abbreviation list .....	15
4 Document Conventions .....	17
4.1 Use of text types .....	17
4.2 Use of colour in tables .....	17
4.3 Definitions of storage types within the GDS 2.0 .....	17
5 Scope and Content of this Document.....	18
6 Overview of GHRSSST and the GDS 2.0.....	19
6.1 The Importance of SST.....	19
6.2 GHRSSST History.....	19
6.3 GHRSSST Organization .....	20
6.4 Overview of the GDS 2.0.....	21
7 GDS 2.0 Filenames and Supporting Conventions .....	23
7.1 Overview of Filename Convention and Example Filenames.....	23
7.2 <Indicative Date> .....	24
7.3 <Indicative Time> .....	24
7.4 <RDAC>.....	24
7.5 <Processing Level> .....	25
7.6 <SST Type>.....	26
7.7 <Product String>.....	30
7.8 <Additional Segregator> .....	32
7.9 GHRSSST Unique Text Strings and Numeric Codes .....	32
8 GDS 2.0 Data Product File Structure .....	37
8.1 Overview of the GDS 2.0 netCDF File Format .....	37
8.2 GDS 2.0 netCDF Global Attributes.....	38
8.3 GDS 2.0 netCDF Variable Attributes .....	40
8.4 GDS 2.0 coordinate variable definitions .....	42
Regular latitude/longitude grids.....	44
Non-regular latitude/longitude grids (projection) .....	45
Non-regular latitude/longitude grids (swath) .....	46
9 Level 2 Pre-processed (L2P) Product Specification.....	47
9.1 Overview description of the GHRSSST L2P data product.....	47
9.2 L2P data record format specification .....	49
9.3 Variable sea_surface_temperature.....	54
9.4 Variable sst_mtime .....	54
9.5 Variable sses_bias.....	55
9.6 Variable sses_standard_deviation.....	56
9.7 Variable dt_analysis.....	56
9.8 Variable wind_speed.....	59
9.9 Variable wind_speed_mtime_from_sst .....	60
9.10 Variable sources_of_wind_speed.....	61
9.11 Variable sea_ice_fraction.....	62
9.12 Variable sea_ice_fraction_mtime_from_sst .....	63
9.13 Variable sources_of_sea_ice_fraction.....	64
9.14 Variable aerosol_dynamic_indicator .....	65
9.15 Variable adi_mtime_from_sst.....	66



9.16	Variable <code>sources_of_adi</code> .....	66
9.17	Variable <code>l2p_flags</code> .....	67
9.18	Variable <code>quality_level</code> .....	70
9.19	Optional Variable <code>satellite_zenith_angle</code> .....	70
9.20	Optional Variable <code>solar_zenith_angle</code> .....	71
9.21	Optional Variable <code>surface_solar_irradiance</code> .....	72
9.22	Optional Variable <code>ssi_dtime_from_sst</code> .....	73
9.23	Optional Variable <code>sources_of_ssi</code> .....	74
9.24	Optional experimental L2P variables included by data provider .....	75
9.25	CDL example L2P data set .....	76
10	Level 3 (L3) Product Specification .....	81
10.1	Overview description of the L3 data product .....	81
10.2	L3 data record format specification .....	82
10.3	Variable <code>sea_surface_temperature</code> .....	87
10.4	Variable <code>sst_dtime</code> .....	87
10.5	Variable <code>sses_bias</code> .....	87
10.6	Variable <code>sses_standard_deviation</code> .....	87
10.7	Variable <code>dt_analysis</code> .....	87
10.8	Variable <code>wind_speed</code> .....	87
10.9	Variable <code>wind_speed_dtime_from_sst</code> .....	87
10.10	Variable <code>sources_of_wind_speed</code> .....	87
10.11	Variable <code>sea_ice_fraction</code> .....	87
10.12	Variable <code>sea_ice_fraction_dtime_from_sst</code> .....	87
10.13	Variable <code>sources_of_sea_ice_fraction</code> .....	87
10.14	Variable <code>aerosol_dynamic_indicator</code> .....	87
10.15	Variable <code>adi_dtime_from_sst</code> .....	88
10.16	Variable <code>sources_of_adi</code> .....	88
10.17	Variable <code>l2p_flags</code> .....	88
10.18	Variable <code>quality_level</code> .....	88
10.19	Optional or experimental L3 variables included by data provider .....	88
10.20	Variable <code>or_latitude</code> .....	88
10.21	Variable <code>or_longitude</code> .....	88
10.22	Variable <code>or_number_of_pixels</code> .....	89
10.23	Variable <code>sum_sst</code> .....	89
10.24	Variable <code>sum_square_sst</code> .....	90
10.25	Variable <code>adjusted_sea_surface_temperature</code> .....	90
10.26	Variable <code>adjusted_standard_deviation_error</code> .....	91
10.27	Variable <code>bias_to_reference_sst</code> .....	91
10.28	Variable <code>standard_deviation_to_reference_sst</code> .....	92
10.29	Variable <code>source_of_sst</code> .....	92
10.30	Sample GHRSSST L3 file (CDL header) .....	93
10.31	Best Practices for Remapping Level 2 Data to a Fixed Grid .....	96
10.32	Best Practices for Collating Data from the Same Sensor and Platform .....	98
10.33	Best Practices for Adjustments .....	99
10.34	Best Practices for Super-Collating Data from Multiple Sensors and Platforms .....	99
11	Level 4 (L4) Product Specification .....	100
11.1	Overview description of the GHRSSST L4 data product .....	100
11.2	L4 data record format specification .....	100
11.3	Variable <code>analysed_sst</code> .....	101
11.4	Variable <code>analysis_error</code> .....	101
11.5	Variable <code>sea_ice_fraction</code> .....	102
11.6	Variable <code>mask</code> .....	102
11.7	Optional Variable <code>sea_ice_fraction_error</code> .....	103
11.8	Sample GHRSSST L4 file (CDL header) .....	103
12	GHRSSST Multi-Product Ensemble (GMPE) Product Specification .....	107
12.1	Overview description of the GMPE data product .....	107
12.2	GMPE data record format specification .....	107

12.3	Variable analysed_sst.....	108
12.4	Variable standard_deviation.....	108
12.5	Variable analysis_number.....	109
12.6	Variable anomaly_fields.....	109
12.7	Sample GMPE file (CDL header).....	110
13	GHRSSST Metadata Specification.....	113
13.1	Overview Description of the GHRSSST Metadata Model.....	113
13.2	Evolution from the GHRSSST GDS 1.0 Metadata Model.....	113
13.3	The ISO 19115-2 Metadata Model.....	113
14	GDS 2.0 Document Management Policy.....	116
14.1	GDS Document Management Definitions.....	116
14.2	GDS Document Management Policy Statement.....	116
14.3	GDS Document Management Policy Responsibility.....	117
14.4	GHRSSST GDS Recordkeeping and Document Management System.....	117
14.5	GDS Document location.....	118
14.6	GDS Document Publication.....	118
14.7	GDS Document formats.....	118
14.8	GDS Document filing.....	118
14.9	Document retrieval.....	118
14.10	Document security.....	118
14.11	Retention and long term archive.....	118
14.12	Document workflow.....	119
14.13	Document creation.....	119

## Figures in this document

Figure 5-1. Schematic overview of the GHRSSST Data Specification Version 2.0 document pack. ....	18
Figure 6-1. Schematic of the GHRSSST Regional/Global Task Sharing (R/GTS) framework. ....	21
Figure 7-1. Overview of SST measurement types used within GHRSSST. ....	27
Figure 10-1 To illustrate the approach when the L3 product output grid is over-sampled by the L2P input data. All pixels labelled <i>p</i> in the input data are possible contributors to the value for new cell <i>A</i> . ....	97
Figure 10-2 To illustrate the approach when the L3 output grid is under-sampled by the L2P data. Either Grid cell <i>C</i> is assigned the value of pixel <i>p</i> , Or grid cell <i>A</i> is assigned the value of pixel <i>p</i> and grid cell <i>B</i> is assigned the weighted average of <i>p</i> and <i>q</i> provided they both have quality flags with the same rating. ....	98
Figure 13-1. ISO Metadata Objects and their sources. ....	114
Figure 13-2. Initial GHRSSST Metadata Translation Approach to ISO record. ....	115

## Tables in this document

Table 4-1 Definition of text styles used in the GDS. ....	17
Table 4-2 Definition of colour styles used in the GDS. ....	17
Table 4-3 Storage type definitions used in the GDS. ....	17
Table 6-1 GHRSSST data products specified by the GDS 2.0. ....	22
Table 7-1. GDS 2.0 Filenaming convention components. ....	23
Table 7-2: Regional Data Assembly Centre (RDAC) code table. ....	25
Table 7-3. GHRSSST Processing Level Conventions and Codes. ....	25
Table 7-4. GHRSSST <SST Type> code and summary table. ....	29
Table 7-5. GHRSSST L2P <Product String> Table, with Platforms and Sensors. ....	30
Table 7-6. GHRSSST L3 <Product String> Table. ....	31
Table 7-7. GHRSSST L4 <Product String> Table. ....	31
Table 7-8. GHRSSST GMPE <Product String> Table. ....	31
Table 7-9. L4 area code definitions. Geographical limits are approximate, and users are advised to retrieve the precise latitude and longitude limits from within the L4 data files. ....	32
Table 7-10. GHRSSST Unique SST Data Set Strings and Numeric Codes. ....	33
Table 8-1 Mandatory global attributes for GDS 2.0 netCDF data files. ....	38
Table 8-2. Variable attributes for GDS 2.0 netCDF data files. ....	40
Table 8-3 Example CDL for GDS-2.0 geographic regular latitude/longitude grids. ....	44
Table 8-4 Example CDL for Non-regular latitude/longitude grids (projections). ....	45
Table 8-5 Example CDL for GDS-2.0 Non-regular latitude/longitude grids (swath). ....	46
Table 9-1 Summary description of the contents of a GHRSSST L2P data file. ....	48
Table 9-2 L2P SST data record content. ....	49
Table 9-3 CDL example description of <i>sea_surface_temperature</i> variable. ....	54
Table 9-4 GHRSSST short SST names and CF-1.4 standard names for <i>sea_surface_temperature</i> . ....	54
Table 9-5 CDL example description of <i>sst_dtime</i> variable. ....	54
Table 9-6 CDL example description of <i>sses_bias</i> variable. ....	55
Table 9-7 CDL example description of <i>sses_standard_deviation</i> variable. ....	56
Table 9-8 Reference SST data sets for use in <i>dt_analysis</i> computation. ....	57
Table 9-9 CDL example description of <i>dt_analysis</i> variable. ....	58
Table 9-10 CDL example description of <i>wind_speed</i> variable. ....	60
Table 9-11 CDL example description of <i>wind_speed_dtime_from_sst</i> variable. ....	61
Table 9-12 CDL example description of <i>sources_of_wind_speed</i> variable. ....	61
Table 9-13 CDL example description of <i>sea_ice_fraction</i> variable. ....	63
Table 9-14. CDL example description of <i>sea_ice_fraction_dtime_from_sst</i> variable. ....	63
Table 9-15 CDL example description of <i>sources_of_sea_ice_fraction</i> variable. ....	64
Table 9-16 CDL example description of <i>aerosol_dynamic_indicator</i> variable. ....	65
Table 9-17 CDL example description of <i>adi_dtime_from_sst</i> variable. ....	66
Table 9-18 CDL example description of <i>sources_of_adi</i> variable. ....	67
Table 9-19 Bit field definitions for the L2P variable <i>l2p_flags</i> . ....	68
Table 9-20 CDL example description of <i>l2p_flags</i> variable. ....	69

Table 9-21 CDL example description of <code>quality_level</code> variable .....	70
Table 9-22 CDL example description of <code>satellite_zenith_angle</code> variable.....	71
Table 9-23 CDL example description of <code>solar_zenith_angle</code> variable.....	71
Table 9-24 CDL example description of <code>surface_solar_irradiance</code> variable.....	73
Table 9-25 CDL example description of <code>ssi_dtime_from_sst</code> variable.....	73
Table 9-26 CDL example description of <code>sources_of_ssi</code> variable .....	74
Table 9-27 Example text string and numeric codes used to identify the sources of data in <code>surface_solar_irradiance:sources</code> and <code>sources_of_ssi</code> .....	74
Table 9-28 CDL template for data provider defined L2P variables.....	75
Table 10-1 Summary description of the contents within a GHRSSST L3 data product.....	82
Table 10-2 L3 SST data record content.....	82
Table 10-3 CDL example description of <code>or_latitude</code> variable .....	88
Table 10-4 CDL example description of <code>or_longitude</code> variable.....	89
Table 10-5 CDL example description of <code>or_number_of_pixels</code> variable.....	89
Table 10-6 CDL example description of <code>sum_sst</code> variable.....	89
Table 10-7 CDL example description of <code>sum_square_sst</code> variable .....	90
Table 10-8 CDL example description of <code>adjusted_sea_surface_temperature</code> variable .....	90
Table 10-9 CDL example description of <code>adjusted_standard_deviation_error</code> variable .....	91
Table 10-10 CDL example description of <code>bias_to_reference_sst</code> variable .....	91
Table 10-11 CDL example description of <code>standard_deviation_to_reference_sst</code> variable...	92
Table 10-12 CDL description of <code>source_of_sst</code> variable .....	92
Table 11-1 Summary description of the contents within a GHRSSST L4 data product.....	100
Table 11-2 L4 SST product data fields .....	101
Table 11-3 CDL example description of <code>analysed_sst</code> variable.....	101
Table 11-4 CDL example description of <code>analysis_error</code> variable .....	102
Table 11-5 CDL example description of <code>sea_ice_fraction</code> variable .....	102
Table 11-6 CDL example description of <code>mask</code> variable .....	102
Table 11-7 CDL example description of <code>sea_ice_fraction_error</code> variable .....	103
Table 12-1 Summary description of the contents within a GMPE data product .....	107
Table 12-2 L4 SST product data fields .....	107
Table 12-3 CDL example description of <code>analysed_sst</code> variable.....	108
Table 12-4 CDL example description of <code>standard_deviation</code> variable.....	108
Table 12-5. CDL example description of <code>analysis_number</code> variable .....	109
Table 13-1. Major ISO Objects. Objects in use in the GHRSSST metadata model are shaded in gray. .....	114

## 1 Applicable Documents

The following documents contain requirements and information applicable to this document and must be consulted together with this document.

- [AD-1] GDS 2.0 Interface control Document (ICD) , Version 1.0, available from <http://www.ghrsst.org/documents.htm?parent=50>
- [AD-2] GDS 2.0 User's Manual Version 1.0 available from <http://www.ghrsst.org/documents.htm?parent=50>
- [AD-3] netCDF user manuals and tools available from <http://www.unidata.ucar.edu/packages/netcdf/>
- [AD-4] netCDF Climate and Forecast (CF) Metadata Conventions version 1.4 available from <http://cf-pcmdi.llnl.gov/documents/cf-conventions/1.4/cf-conventions-multi.html>
- [AD-5] COARDS Conventions available from [http://ferret.wrc.noaa.gov/noaa\\_coop/coop\\_cdf\\_profile.html](http://ferret.wrc.noaa.gov/noaa_coop/coop_cdf_profile.html)
- [AD-6] UDUNITS-2 package available from <http://www.unidata.ucar.edu/software/udunits/udunits-2/udunits2.html>
- [AD-7] ISO 8601, The International Standard for the representation of dates and times, [http://www.iso.org/iso/date\\_and\\_time\\_format](http://www.iso.org/iso/date_and_time_format)
- [AD-8] Unidata Attribute Conventions for Dataset Discovery (ACDD), available from <http://www.unidata.ucar.edu/software/netcdf-java/formats/DataDiscoveryAttConvention.html>
- [AD-9] Current version (CF-1.4) of the standard name table can be found at <http://cf-pcmdi.llnl.gov/documents/cf-standard-names/standard-name-table/11/standard-name-table>
- [AD-10] NetCDF Climate and Forecast (CF) community mail list, available at <http://mailman.cgd.ucar.edu/mailman/listinfo/cf-metadata>
- [AD-11] NASA Global Change Master directory (GCMD) Science Keywords and Associated Directory Keywords, available at [http://gcmd.nasa.gov/Resources/valids/archives/keyword\\_list.html](http://gcmd.nasa.gov/Resources/valids/archives/keyword_list.html)

## 2 Reference Documents

The following documents can be consulted when using this document as they contain relevant information:

- [RD-1] Donlon, C. J. and the GHRSSST-PP Science Team, 2004. The GHRSSST-PP Data processing Specification version 1.6, available from the International GHRSSST Project Office, <http://www.ghrsst.org>. pp 241.
- [RD-2] Donlon, C. J., I. Robinson, K. S Casey, J. Vazquez-Cuervo, E Armstrong, O. Arino, C. Gentemann, D. May, P. LeBorgne, J. Piollé, I. Barton, H Beggs, D. J. S. Poulter, C. J. Merchant, A. Bingham, S. Heinz, A Harris, G. Wick, B. Emery, P. Minnett, R. Evans, D. Llewellyn-Jones, C. Mutlow, R. Reynolds, H. Kawamura and N. Rayner, 2007. The Global Ocean Data Assimilation Experiment (GODAE) high Resolution Sea Surface Temperature Pilot Project (GHRSSST-PP). *Bull. Am. Meteorol. Soc.*, Vol. 88, No. 8, pp. 1197-1213, (DOI:10.1175/BAMS-88-8-1197).
- [RD-3] Donlon, C. J., I. Robinson, K. S Casey, J. Vazquez-Cuervo, E Armstrong, O. Arino, C. Gentemann, D. May, P. LeBorgne, J. Piollé, I. Barton, H Beggs, D. J. S. Poulter, C. J. Merchant, A. Bingham, S. Heinz, A Harris, G. Wick, B. Emery, P. Minnett, R. Evans, D. Llewellyn-Jones, C. Mutlow, R. Reynolds, H. Kawamura and N. Rayner, 2009. The Global Ocean Data Assimilation Experiment (GODAE) high Resolution Sea Surface Temperature Pilot Project (GHRSSST-PP). *Oceanography*, Vol. 22, No. 3.

- [RD-4] Donlon, C. J., P. Minnett, C. Gentemann, T. J. Nightingale, I. J. Barton, B. Ward and, J. Murray, 2002. Towards Improved Validation of Satellite Sea Surface Skin Temperature Measurements for Climate Research, *J. Climate*, Vol. 15, No. 4, pp. 353-369.
- [RD-5] Donlon, C. J. and the GHRSSST-PP Science Team, 2006. The GHRSSST-PP User Requirement Document, available from the International GHRSSST Project Office, <http://www.ghrsst.org/documents.htm?parent=43>.
- [RD-6] Donlon, C. J. and the GHRSSST-PP Science Team, 2006. The GHRSSST-PP Development and Implementation Plan (GDIP), available from the International GHRSSST Project Office <http://www.ghrsst.org/modules/documents/documents/GDIP-v0.6.pdf>.
- [RD-7] Global Climate Observing system, 2004. Implementation plan for the Global observing system for climate in support of the UNFCCC, GCOS – 92, WMO/TD No. 1219, available from World Meteorological Organization.
- [RD-8] Donlon, C. J. and the GHRSSST-PP Science Team, 2006. The GHRSSST-PP User Requirement Document, available from the International GHRSSST Project Office, <http://www.ghrsst.org/documents.htm?parent=43>.
- [RD-9] Donlon, C. J. and the GHRSSST-PP Science Team. The GHRSSST-PP Development and Implementation Plan (GDIP), available from the International GHRSSST Project Office <http://www.ghrsst.org/modules/documents/documents/GDIP-v0.6.pdf>.
- [RD-10] Faugere, Y., P. Le Borgne and H. Roquet, 2001. Realisation d'une climatologie mondiale de la temperature de surface de la mer a echelle fine, *La Meteorologie*, Vol. 35, pp. 24-35.
- [RD-11] Reynolds, R. W., T. M. Smith, C. Liu, D. B. Chelton, K. S. Casey, and M. G. Schlax, 2007: Daily high-resolution blended analyses for sea surface temperature. *J. Climate*, 20, 5473-5496. Analysis data available from <http://www.ncdc.noaa.gov/oa/climate/research/sst/oi-daily.php> and from the GHRSSST LTSRF at <http://ghrsst.nodc.noaa.gov>.
- [RD-12] Smith, N.R. and Koblinsky, C., 2001. The ocean observing system for the 21st Century, a consensus statement. In: Koblinsky, C. and Smith, N.R. (Eds.), *Observing the Oceans in the 21st Century*, pp 1-25, GODAE Project Office, Bureau of Meteorology, Melbourne, Australia.
- [RD-13] The Second Report on the Adequacy of the Global Observing Systems for Climate in Support of the UNFCCC, GCOS – 82, April 2003 (WMO/TD No. 1143), Available online at <http://www.wmo.int/pages/prog/gcos/index.php>
- [RD-14] Satellite Observation of the Climate System: The Committee on Earth Observation Satellites (CEOS) Response to the Global Climate Observing System (GCOS) Implementation Plan, Available online at [http://www.ceos.org/pages/CEOSResponse\\_1010A.pdf](http://www.ceos.org/pages/CEOSResponse_1010A.pdf)
- [RD-15] Smith, N. 2001. Report of the GODAE High Resolution SST Workshop. October 30–November 1, 2000. Available from the International GODAE Project Office, Bureau of Meteorology, Melbourne, Australia (<http://www.godae.org/Project-Office.html>), 64 pp.
- [RD-16] Casey, K.S. and P. Cornillon, 1999. A comparison of satellite and in situ based sea surface temperature climatologies, *J. Climate*, vol. 12, no. 6, pp. 1848-1863. Original climatology data available from [http://podaac.jpl.nasa.gov/DATA\\_CATALOG/avhrrinfo.html](http://podaac.jpl.nasa.gov/DATA_CATALOG/avhrrinfo.html) and most recent versions from <http://pathfinder.nodc.noaa.gov>.

### 3 Acronym and abbreviation list

AATSR	Advanced Along Track Scanning Radiometer
ABOM	Australian Bureau of Meteorology RDAC
ACDD	Unidata Attribute Conventions for Dataset Discovery
AD	Applicable Document
AMSR-E	Advanced Microwave Scanning Radiometer - Earth Observing System
AUS	Australian regional analysis area
AVHRR	Advanced Very High Resolution Radiometer
CDL	network Common Data form Language
CF	Climate Forecast (convention of netCDF)
CICS	Cooperative Institute for Climate and Satellites
CTD	Conductivity, Temperature, Depth (in situ ocean measurements)
DAS-TAG	Data Assembly and Systems Technical Advisory Group
DMI	Danish Meteorological Institute
ECV	Essential Climate Variable
ECMWF	European Centre for Medium-range Weather Forecasting
ENVISAT	Environmental Satellite
EO	Earth Observation
ESA	European Space Agency
EUMETSAT	European Organisation for the Exploitation of Meteorological Satellites
EUR	European RDAC
GAL	Area around the Galapagos Islands
GCOS	Global Climate Observing System
GDAC	Global Data Assembly Centre
GDIP	GHRSSST development and implementation plan
GDS	GHRSSST Data Specification
GHRSSST	Group for High Resolution SST
GHRSSST-PO	International GHRSSST Project Office
GHRSSST-PP	The GODAE High Resolution Sea Surface Temperature Pilot Project
GMES	Global Monitoring for Environment and Security
GMPE	GHRSSST Multi Product Ensemble
GLOB	Global coverage data sets
GODAE	Global Ocean Data Assimilation Experiment
GOES	Geostationary Operational Environmental Satellite
GOS	Gruppo di Oceanografia da Satellite
ICD	Interface Control Document
IC-TAG	Inter comparison Technical Advisory Group
IR	Infrared
ISO	International Organization for Standardization
JAXA	Japan Aerospace Exploration Agency
JPL	Jet Propulsion Laboratory
L2	Level-2 data products
L2P	Level-2 Pre-processed data product
L3	Level 3 data products
L3U	Level 3 un-collated data product
L3C	Level 3 collated data product
L3S	Level 3 super-collated product
L4	Level 4 data product
LAS	Live Access Server
LTSRF	Long Term Stewardship and Reanalysis Facility
MED	Mediterranean Sea area
METNO	Norwegian Meteorological Institute
MMR	Master Metadata Repository
MODIS	Moderate Resolution Imaging Spectroradiometer
MSG	METEOSAT Second Generation
MTSAT	Multi-functional Transport Satellite Imager
MW	MicroWave
MYO	MyOcean

NAAPS	Navy Aerosol Analysis Prediction System
NAVO	US Naval Oceanographic Office
NCEP	NOAA National Centers for Environmental Prediction (US)
NCDC	NOAA National Climatic Data Center (US)
netCDF	Network Common Data Format
NEODAAS	NERC Observation Data Acquisition and Analysis Service
NIR	Near Infrared
NOAA	National Oceanic and Atmospheric Administration (US)
NOC	National Oceanography Centre, Southampton
NODC	NOAA National Oceanographic Data Center (US)
NOP	Numerical Ocean Prediction
NSEABALTIC	North Sea and Baltic Region
NWE	North-West of Europe
NWP	Numerical Weather Prediction
OI	Optimal Interpolation
OSDPD	NOAA Office of Satellite Data Processing and Distribution (US)
OSISAF	EUMETSAT Ocean and Sea Ice Satellite Applications Facility
PO.DAAC	Physical Oceanography Distributed Active Archive Centre (US)
RD	Reference document
RDAC	Regional Data Assembly Centre
REMSS	Remote Sensing Systems, CA, USA
R/GTS	Regional/Global Task Sharing framework of GHRSSST
RSMAS	Rosenstiel School of Marine and Atmospheric Science, University of Miami
SEVIRI	Spinning Enhanced Visible and Infrared Imager
SLSTR	Sea and Land Surface Temperature Radiometer
SSI	Surface Solar Irradiance
SSM/I	Special sensor microwave imager
SSES	Sensor Specific Error Statistics
SST	Sea Surface Temperature
STVAL	Sea Surface Temperature Validation Working Group
TAG	Technical Advisory Group
THREDDS	Thematic Realtime Environmental Distributed Data Services
TIR	Thermal Infrared
TMI	TRMM Microwave Imager
TRMM	Tropical Rainfall Mapping Mission
UKMO	UK Met Office
UNFCCC	United Nations Framework Convention on Climate Change
UPA	United Kingdom Multi-Mission Processing and Archiving Facility
URL	Universal Resource Locator
UTC	Coordinated Universal Time
WG	Working Group
WMO	World Meteorological Organization
XML	Extensible Mark-up Language



## 4 Document Conventions

The following sub-sections describe the notation conventions and data storage types that are used throughout this GDS 2.0 Technical Specification. Implementation projects are expected to adhere to the nomenclature and style of the GDS 2.0 in their own documentation as much as possible to facilitate international coordination of documentation describing the data products and services within the GHR SST R/GTS framework [RD-2].

### 4.1 Use of text types

The text styles defined in Table 4-1 are used throughout the GDS.

**Table 4-1 Definition of text styles used in the GDS**

Text type	Meaning	Example
Bold Courier font	Denotes a variable name	<b>dt_analysis</b>
Bold Courier font	Denotes a netCDF attribute name	<b>gds_version_id</b>
Arial	Denotes regular text.	This is normal text.

### 4.2 Use of colour in tables

The colours defined in Table 4-2 are used throughout the GDS.

**Table 4-2 Definition of colour styles used in the GDS**

Colour	Meaning	Example
Grey	Denotes a table column name	<b>Variable</b>
Blue	Denotes a mandatory item	<b>analysed_sst</b>
Violet	Denotes an item mandatory for only certain situations	<b>dt_analysis</b>
Yellow	Denotes an optional item	<b>experimental_field</b>
Green	Denotes grid dimensions	<b>ni=1024</b>
Pink	Denotes grid variable dimensions	<b>float lat(nj, ni)</b>

### 4.3 Definitions of storage types within the GDS 2.0

Computer storage types referred to in the GDS are defined in Table 4-3 and follow those used in netCDF.

**Table 4-3 Storage type definitions used in the GDS**

Name	Storage Type
byte	8 bit signed integer
short	16 bit signed integer
int (or long)	32 bit signed integer
float	32 bit floating point
double	64 bit floating point
string	Character string

## 5 Scope and Content of this Document

The GDS Technical Specification is written for those wishing to create or use any GHRSSST product and requiring detailed technical information on their contents and specifications. It provides the technical specifications for all GHRSSST data sets used within the GHRSSST Regional/Global Task Sharing (R/GTS) Framework. An overview of GHRSSST and the GDS presented followed by a detailed technical specification of the GHRSSST file naming specification, supporting definitions and conventions. The technical specifications for all GHRSSST Level 2P (L2P), Level 3 (L3), Level 4 (L4), and GHRSSST Multi-Product Ensemble (GMPE) data products are then provided. The GDS also provides code tables and best practices for identifying sources of SST and ancillary data within GHRSSST data files.

This document has been developed for data providers who wish to produce any level of GHRSSST data product and for all users wishing to fully understand the file naming convention, GHRSSST data file contents, GHRSSST and Climate Forecast definitions for SST, and other useful information. Additional information describing GHRSSST and its component international services is available at <http://www.ghrsst.org> and many relevant GHRSSST web sites are listed on the last page of this document.

The GDS Technical Specification document forms a component document of the GDS 2.0 document set, which is shown schematically in Figure 5-1 below. Other documents from the GDS 2.0 document pack that are specified in the Applicable Documents section of this document shall be consulted when using this document.

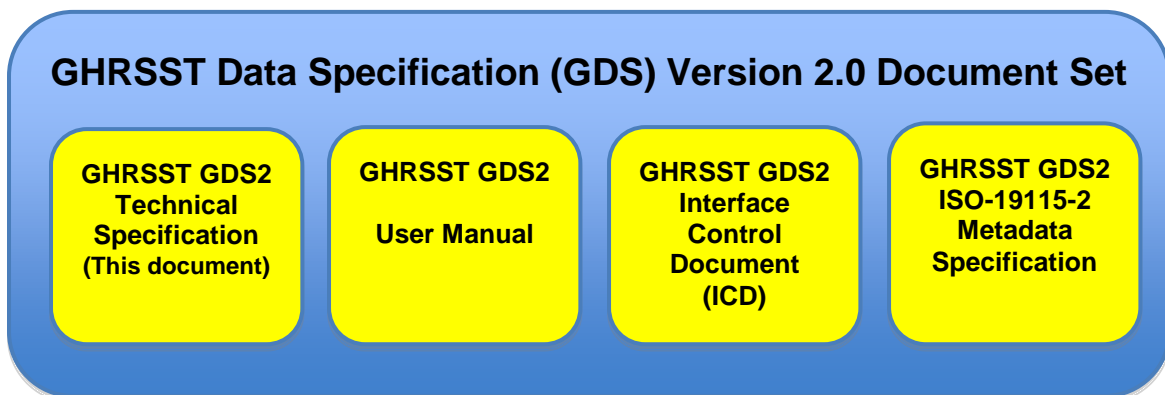


Figure 5-1. Schematic overview of the GHRSSST Data Specification Version 2.0 document pack.

## 6 Overview of GHRSSST and the GDS 2.0

GHRSSST [RD-2] is an international consortium representing commercial enterprises, academic institutions, research organizations, and operational agencies that collaborate to provide accurate, high resolution, and consistently formatted SST observations and analyses from space-based platforms. This section briefly provides information on the importance of SST, an overview and history of GHRSSST, and context for understanding the GDS 2.0.

### 6.1 The Importance of SST

Sea Surface Temperature at the ocean-atmosphere interface is a fundamental variable for understanding, monitoring and predicting fluxes of heat, momentum and gas at a variety of scales that determine complex interactions between atmosphere and ocean. The ocean stores heat from the sun and redistributes it from the tropical regions to higher latitudes and to the less dense atmosphere regulating global weather and climate. Through the hydrological cycle the coupled system controls terrestrial life by redistributing fresh water over the land surface. From large ocean gyres and atmospheric circulation cells that fuel atmospheric depression systems, storms and hurricanes with their attendant wind waves and storm surges, to local scale phenomena such as the generation of sea breezes and convection clouds, SST at the ocean-atmosphere interface has a significant societal impact.

Accurate knowledge of global SST distribution and temporal variation at finer spatial resolution is needed as a key input to numerical weather prediction (NWP) and numerical ocean prediction (NOP) systems to constrain the modelled upper-ocean circulation and thermal structure at daily, seasonal, decadal and climatic time scales, for the exchange of energy between the ocean and atmosphere in coupled ocean-atmosphere models, and as boundary conditions for ocean forecasting models. Such models are widely used operationally for various applications including maritime safety, military operations, ecosystem assessments, fisheries support, and tourism.

In addition, well-defined and quantified error estimates of SST are also required for climate time series that can be analysed to reveal the role of the ocean in short and long term climate variability. A 30 year record of satellite SST observations is available now, that grows on a daily basis. SST climate data records that are used to provide the GCOS SST Essential Climate Variable (ECV) [RD-7], [RD-13], [RD-14] are essential to monitoring and understanding climate variability, climate-ecosystem interactions such as coral reef health and sustainable fisheries management, and critical issues like sea level rise and changing sea ice patterns.

### 6.2 GHRSSST History

In 1998, SST data production was considered a mature component of the observing system with demonstrated capability and data products. However, SST product availability was limited to a few data sets that were large, scientific in format and difficult to exchange in a near real time manner. Product accuracy was considered insufficient for the emerging NWP and NOP systems. Uncertainty estimates for SST products were unavailable with SST products complicating their application by the NWP and NOP data assimilation community. At the same time the number of applications requiring an accurate high resolution SST data stream was growing.

Considering these issues, the Global Ocean Data Assimilation Experiment (GODAE) [RD-12] defined the minimum data specification required for use in operational ocean models, stating that SST observations with global coverage, a spatial resolution of 10 km and an accuracy of <0.4 K need to be updated every six hours [RD-12].

Despite the network of SST observations from ships and buoys, the only way to achieve these demanding specifications was to make full use of space-based observations. An integrated and international approach was sought to improve satellite SST measurements, based on four principles:

- (1) Respond to user SST requirements through a consensus approach
- (2) Organize activities according to principles of shared responsibility and subsidiarity, handling matters with the lowest, smallest, or least centralized competent group possible

- (3) Develop complementarities between independent measurements from earth observation satellites and in situ sensors
- (4) Maximize synergy benefits of an integrated SST measurement system and end-to-end user service

These foundations enabled the international ocean remote sensing community, marine meteorologists, Space Agencies, and ocean modellers to combine their energies to meet the GODAE requirements by establishing the GODAE High Resolution Sea Surface Temperature Pilot Project (GHRSSST-PP). GHRSSST-PP established four main tasks relevant to the development of the SST observing system:

- (1) Improve SST data assembly/delivery
- (2) Test available SST data sources
- (3) Perform inter-comparison of SST products
- (4) Develop applications and data assimilation of SST to demonstrate the benefit of the improved observing system

GHRSSST-PP successfully demonstrated that the requirements of GODAE could be met when significant amounts of GHRSSST-PP data became available in 2006, and was instrumental in defining the shape and form of the modern-era SST measurement system and user service over the last 10 years [RD-2].

At the end of the GODAE period in 2009, the GHRSSST-PP evolved into the Group for High Resolution SST (GHRSSST). GHRSSST built on the successes of the pilot project phase and continued a series of international workshops that were held during 2000-2009. These workshops established a set of user requirements for all GHRSSST activities in five areas:


- (1) Scientific development and applications,
- (2) Operational agency requirements,
- (3) SST product specifications,
- (4) Programmatic organization of an international SST service,
- (5) Developing scientific techniques to improve products and exploit the observing system.

These requirements were critical to establishing the GHRSSST framework and work plan, and formed an essential part of the GHRSSST evolution. By establishing and documenting clear requirements in a consultative manner at the start of the project and through all stages of its development, GHRSSST was able to develop confidently and purposefully to address the needs of the international SST user community

### **6.3 GHRSSST Organization**

Over the last decade, GHRSSST established and now continues to provide an internationally distributed suite of user focused services in a sustained Regional/Global Task Sharing (R/GTS) framework [RD-2] that addresses international organizational challenges and recognizes the implementing institutional capacities, capabilities, and funding prospects. Long term stewardship, user support and help services, and standards-based data management and interoperability have been developed and are operated within the R/GTS on a daily basis.

GHRSSST data flow from numerous Regional Data Assembly Centre's (RDACs) to a Global Data Assembly Centre (GDAC) in near real time. Thirty days after observation, the data are transferred to a Long Term Stewardship and Reanalysis Facility (LTSRF). At present, RDACs from across Europe, Japan, Australia, and the United States contribute GHRSSST data to the GDAC, operated by the NASA Jet Propulsion Laboratory, which in turn provides the data to the LTSRF operated by the NOAA National Oceanographic Data Center. The GHRSSST R/GTS is shown schematically below in Figure 6-1.

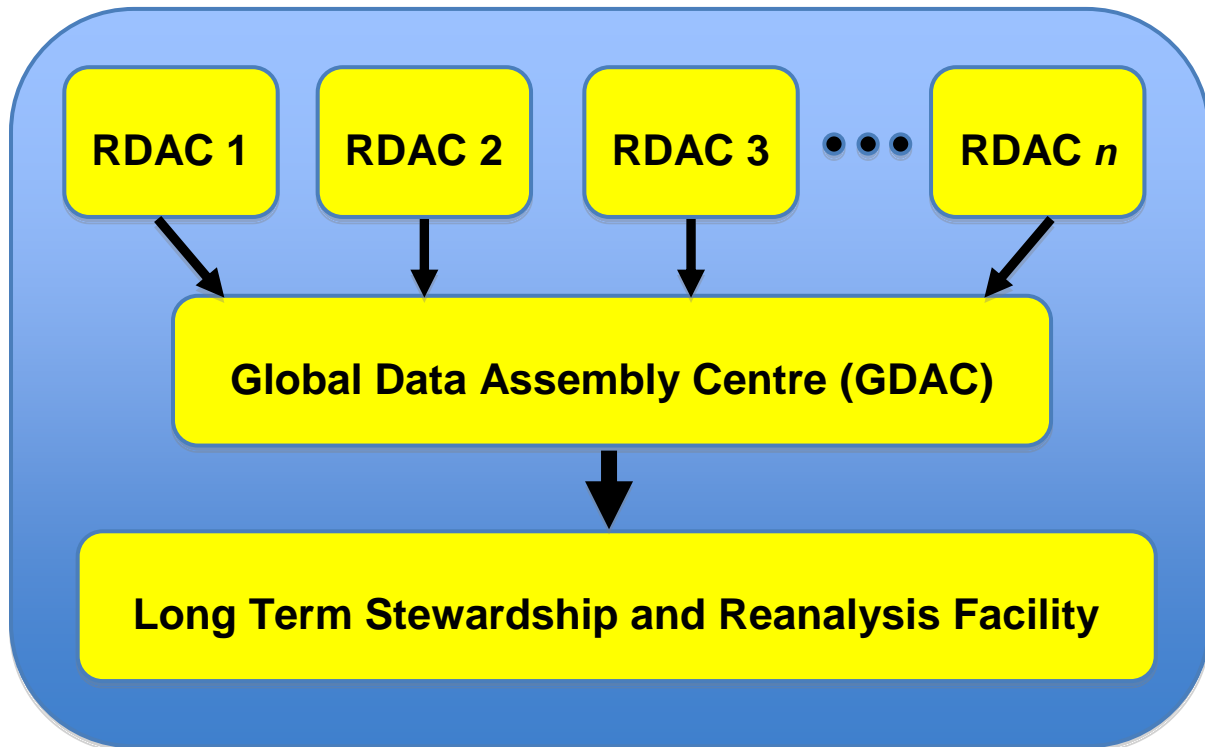

**Figure 6-1. Schematic of the GHRSSST Regional/Global Task Sharing (R/GTS) framework.**

Since large-scale GHRSSST data production and dissemination commenced in 2006, the GHRSSST GDAC and LTSRF have combined to provide over 50,000 users more than 100 terabytes of GHRSSST data. Over 28 terabytes of data are in NODC's LTSRF holdings with another approximately 10 Terabyte added each year. The detailed interactions of the R/GTS components are described in the GHRSSST Interface Control Document [AD-1].

Each component of the R/GTS is independently managed and operated by different institutions and agencies. The R/GTS itself is coordinated by the international GHRSSST Science Team, which receives guidance and advice from the GHRSSST Advisory Council. A GHRSSST Project Office coordinates the overall framework. A full discussion of GHRSSST over the last 10 years is reported in [RD-2] and [RD-3].

## 6.4 Overview of the GDS 2.0

The GHRSSST R/GTS was made possible through the establishment of a rigorous GHRSSST Technical Data Specification (GDS), which instructed international satellite data providers on how to process satellite data streams, defined the format and content of the data and metadata, and documented the basic approaches to providing uncertainty estimates and auxiliary data sets. The GHRSSST-PP established the first GDS (v1.6) [RD-1], which formed the basis of all GHRSSST data production from 2005 through 2011. In 2010 the Version 2 of the GDS described in this document will go into operations following a phased implementation schedule.

All GHRSSST products entering the R/GTS must strictly follow the common GDS when generating L2P, L3, L4, and GMPE data. As a result, users with common tools to read data from one RDAC can securely use data from any of the others as well as the GDAC and LTSRF without a need to re-code. Table 6-1 provides a summary of GDS 2.0 data products and their basic characteristics.

The remainder of this document provides the detailed specifications for GHRSSST L2P, L3, L4, and GMPE products, their file naming convention, metadata requirements, and all necessary tables, conventions, and best practices for creating and using GHRSSST data.

Table 6-1 GHRSSST data products specified by the GDS 2.0.

SST Product	L2 Pre-Processed [Section 8]	L3 Uncollated [Section 1010]	L3 Collated [Section 10]	L3 Super-collated [Section 10]	Analyzed SST [Section 11]	GHRSSST Multi-Product Ensemble SST [Section 12]
<b>Acronym</b>	L2P	L3U	L3C	L3S	L4	GMPE
<b>Description</b>	<p>Geophysical variables derived from Level 1 source data at the same resolution and location as the Level 1 data, typically in a satellite projection with geographic information. These data form the fundamental basis for higher-level GHRSSST products and require ancillary data and uncertainty estimates.</p> <p>No adjustments to input SST have been made.</p>	<p>L2 data granules remapped to a space grid without combining any observations from overlapping orbits.</p> <p>L3 GHRSSST products do not use analysis or interpolation procedures to fill gaps where no observations are available</p>	<p>SST measurements combined from a single instrument into a space-time grid.</p> <p>Multiple passes/scenes of data can be combined.</p> <p>Adjustments may be made to input SST data.</p>	<p>SST measurements combined from multiple instruments into a space-time grid.</p> <p>Multiple passes/scenes of data are combined.</p> <p>Adjustments may be made to input SST data.</p>	<p>Data sets created from the analysis of lower level data that results in gridded, gap-free products. SST data generated from multiple sources of satellite data using optimal interpolation are an example of L4 GHRSSST products</p>	<p>GMPE provides ensemble information about various L4 data products. It provides gridded, gap-free SST information as well as information about the spread in the various L4 products.</p>
<b>Grid specification</b>	Native to SST data format	Defined by data provider	Defined by data provider	Defined by data provider	Defined by data provider	Defined by data provider
<b>Temporal resolution</b>	Native to SST data stream	Native to data stream	Defined by data provider	Defined by data provider	Defined by data provider	Defined by data provider
<b>Delivery timescale</b>	As available, Ideally within 3 hours from acquisition at satellite	As available, Ideally within 3 hours from acquisition at satellite	As available, Ideally within 3 hours from acquisition at satellite	As available, Ideally within 3 hours from acquisition at satellite	Analyzed product processing window as defined by data provider.	As available, ideally within 24 hours of the input L4 products being available.
<b>Target accuracy</b>	Native to data stream	Native to data stream	<0.4 K	<0.4 K	< 0.4 K absolute, 0.1 K relative	< 0.4 K
<b>Error statistics</b>	Native to data stream if available, Sensor Specific error statistics otherwise	Native to data stream if available, Sensor Specific error statistics otherwise	Derived from input data for each output grid point.	Derived from input data for each output grid point.	Analysis error defined by data provider for each output grid point (no input data statistics are retained)	The standard deviation of the input L4 analyses is provided. This is not an error estimate, but provides some idea of uncertainty.
<b>Coverage</b>	Native to data stream	Native to data stream	Defined by data provider	Defined by data provider	Defined by data provider	Defined by data provider

## 7 GDS 2.0 Filenames and Supporting Conventions

Striving to achieve a flexible naming convention that maintains consistency across processing levels and better serves user needs, the GDS 2.0 uses a single form for all GHRSSST data files. An overview of the format is presented below in Section 7.1 along with example filenames. Details on each of the filename convention components are provided in Sections 7.2 through 7.8.

In addition, a best practice has been established for creating character strings used to describe GHRSSST SST products and sources of ancillary data. These strings, and associated numeric codes for the SST products, are used within some GHRSSST data files but are not part of the filename convention itself. The best practice is described in Section 7.9.

### 7.1 Overview of Filename Convention and Example Filenames

The filenaming convention for the GDS 2.0 is shown below.

**<Indicative Date><Indicative Time>-<RDAC>-<Processing Level>\_GHRSSST-<SST Type>-<Character String>-<Additional Segregator>-v<GDS Version>-fv<File Version>.<File Type>**

The variable components within braces (“< >”) are summarized in Table 7-1 below and detailed in the following sections. Note that dashes (“-”) **are reserved** to separate elements of the file name and **should not** be used in any GHRSSST code or the <Additional Segregator> element. Example filenames are given later in this section. While no strict limit to filename length is mandated, RDACs are encouraged to keep the length to less than 240 characters to increase readability and usability.

**Table 7-1. GDS 2.0 Filenaming convention components.**

Name	Definition	Description
<Indicative Date>	YYYYMMDD	The identifying date for this data set. See Section 7.2.
<Indicative Time>	HHMMSS	The identifying time for this data set. The time used is dependent on the <Processing Level> of the data set: L2P: start time of granule L3U: start time of granule L3C and L3S: centre time of the collation window L4 and GMPE: nominal time of analysis All times should be given in UTC. See Section 7.3.
<RDAC>	The RDAC where the file was created	The Regional Data Assembly Centre (RDAC) code, listed in Section 7.4.
<Processing Level>	The data processing level code (L2P, L3U, L3C, L3S, or L4)	The data processing level code, defined in Section 7.5.
<SST Type>	The type of SST data included in the file.	Conforms to the GHRSSST definitions for SST, defined in Section 7.6.
<Product String>	A character string identifying the SST product set. The string is used uniquely within an RDAC but may be shared across RDACs.	The unique “name” within an RDAC of the product line. See Section 7.7 for the product string lists, one each for L2P, L3, L4, and GMPE products. See Section 7.7.
<Additional Segregator>	Optional text to distinguish between files with the same <Product String>. Dashes are not allowed within this element.	This text is used since the other filename components are sometimes insufficient to uniquely identify a file. For example, in L2P or L3U (un-collated) products this is often the original file name or processing algorithm. Note, underscores should be used, not dashes. For L4 files, this element should begin with the appropriate regional code as defined in Section

		7.8. This component is optional but must be used in those cases where non-unique filenames would otherwise result.
<GDS Version>	<i>nn.n</i>	Version number of the GDS used to process the file. For example, GDS 2.0 = "02.0".
<File Version>	<i>xx.x</i>	Version number for the file, for example, "01.0".
<File Type>	netCDF data file suffix (nc) or ISO metadata file suffix (xml)	Indicates this is a netCDF file containing data or its corresponding ISO-19115 metadata record in XML.

**L2\_GHRSSST Filename Example**

20070503132300-NAVO-L2P\_GHRSSST-SSTblend-AVHRR17\_L-SST\_s0123\_e0135-v02.0-fv01.0.nc

The above file contains GHRSSST L2P blended SST data for 03 May 2007, from AVHRR LAC data collected from the NOAA-17 platform. The granule begins at 13:23:00 hours. It is version 1.0 of the file and was produced by the NAVO RDAC in accordance with the GDS 2.0. The <Additional Segregator> text is "SST\_s0123\_e0135".

**L3\_GHRSSST Filename Example**

20070503110153-REMSS-L3C\_GHRSSST-SSTsubskin-TMI-tmi\_20070503rt-v02.0-fv01.0.nc

The above file was produced by the REMSS RDAC and contains collated L3 sub-skin SST data from the TMI instrument for 03 May 2007. The collated file has a centre time of at 11:01:53 hours. It is version 1.0 of the file and was produced according to GDS 2.0 specifications. Its <Additional Segregator> text is "tmi\_20070503rt".

**L4\_GHRSSST Filename Example**

20070503120000-UKMO-L4\_GHRSSST-SSTfnd-OSTIA-GLOB-v02.0-fv01.0.nc

The above file contains L4 foundation SST data produced at the UKMO RDAC using the OSTIA system. It is global coverage, contains data for 03 May 2007, was produced to GDS 2.0 specifications and is version 1.0 of the file. The nominal time of the OSTIA analysis is 12:00:00 hours.

**7.2 <Indicative Date>**

The identifying date for this data set, using the format YYYYMMDD, where YYYY is the four-digit year, MM is the two-digit month from 01 to 12, and DD is the two-digit day of month from 01 to 31. The date used should best represent the observation date for the dataset.

**7.3 <Indicative Time>**

The identifying time for this data set in UTC, using the format HHMMSS, where HH is the two-digit hour from 00 to 23, MM is the two-digit minute from 00 to 59, and SS is the two-digit second from 00 to 59. The time used is dependent on the <Processing Level> of the data set:

L2P: start time of granule  
 L3U: start time of granule  
 L3C and L3S: centre time of the collation window  
 L4 and GMPE: nominal time of analysis

All times should be given in UTC and should be chosen to best represent the observation time for this dataset. Note: RDACs should ensure the applications they use to determine UTC properly account for leap seconds.

**7.4 <RDAC>**

Codes used for GHRSSST Regional Data Assembly Centres (RDACs) are provided in the table below. New codes are assigned by the GHRSSST Data And Systems Technical Advisory Group (DAS-TAG) and entered into the table upon agreement by the GDAC, LTSRF, and relevant RDACs.



**Table 7-2: Regional Data Assembly Centre (RDAC) code table.**

RDAC Code	GHRSSST RDAC Name
ABOM	Australian Bureau of Meteorology
DMI	Danish Meteorological Institute
EUR	European RDAC
GOS	Gruppo di Oceanografia da Satellite
JPL	JPL Physical Oceanography Distributed Active Archive Center
JPL_OUROCEAN	JPL OurOcean Project
METNO	Norwegian Meteorological Institute
MYO	MyOcean
NAVO	Naval Oceanographic Office
NCDC	NOAA National Climatic Data Center
NEODAAS	NERC Observation Data Acquisition and Analysis Service
NOC	National Oceanography Centre, Southampton
NODC	NOAA National Oceanographic Data Center
OSDPD	NOAA Office of Satellite Data Processing and Distribution
OSISAF	EUMETSAT Ocean and Sea Ice Satellite Applications Facility
REMSS	Remote Sensing Systems, CA, USA
RSMAS	University of Miami, RSMAS
UKMO	UK Meteorological Office
UPA	United Kingdom Multi-Mission Processing and Archiving Facility
New codes	Please contact the GHRSSST international Project Office if you require new codes to be included in future revisions of the GDS.

## 7.5 <Processing Level>

Satellite data processing level definitions can lead to ambiguous situations, especially regarding the distinction between L3 and L4 products. GHRSSST identified the use of analysis procedures to fill gaps where no observations exist to resolve this ambiguity. Within GHRSSST filenames, the <Processing Level> codes are shown below in Table 7-3. GHRSSST currently establishes standards for L2P, L3U, L3C, L3S, and L4 (GHRSSST Multi-Product Ensembles known as GMPE are a special kind of L4 product for which GHRSSST also provides standards).

**Table 7-3. GHRSSST Processing Level Conventions and Codes**

Level	<Processing Level> Code	Description
Level 0	L0	Unprocessed instrument and payload data at full resolution. GHRSSST does not make recommendations regarding formats or content for data at this processing level.
Level 1A	L1A	Reconstructed unprocessed instrument data at full resolution, time referenced, and annotated with ancillary information, including radiometric and geometric calibration coefficients and geo-referencing parameters, computed and appended, but not applied, to L0 data. GHRSSST does not make recommendations regarding formats or content for data at this processing level.
Level 1B	L1B	Level 1A data that have been processed to sensor units. GHRSSST does not currently make recommendations regarding formats or content for L1B data.
Level 2 Pre-processed	L2P	Geophysical variables derived from Level 1 source data at the same resolution and location as the Level 1 data, typically in a satellite projection with geographic information. These data form the fundamental basis for higher-level GHRSSST products and require ancillary data and uncertainty estimates.
Level 3	L3U L3C L3S	Level 2 variables mapped on a defined grid with reduced requirements for ancillary data. Uncertainty estimates are still mandatory. Three types of L3 products are defined: <ul style="list-style-type: none"> <li>• <b>Un-collated (L3U):</b> L2 data granules remapped to a space grid</li> </ul>

		<p>without combining any observations from overlapping orbits</p> <ul style="list-style-type: none"> <li>• <b>Collated (L3C):</b> observations combined from a single instrument into a space-time grid</li> <li>• <b>Super-collated (L3S):</b> observations combined from multiple instruments into a space-time grid.</li> </ul> <p>Note that L3 GHRSSST products do not use analysis or interpolation procedures to fill gaps where no observations are available.</p>
Level 4	L4	Data sets created from the analysis of lower level data that result in gridded, gap-free products. SST data generated from multiple sources of satellite data using optimal interpolation are an example of L4 GHRSSST products. GMPE products are a type of L4 dataset.


Note that within GHRSSST, all L2P files require a full set of extensive ancillary data such as wind speeds and times of observation that are provided as 'dynamic flags' that users can manipulate to filter data according to their own quality criteria. L2P files form the basis of higher-level products and are often the best level products for data assimilation. The requirement for dynamic flags is particularly important in this context. Higher-level L3 products are often intended for general use or created for input to Level 4 analysis systems so the requirement for extensive ancillary data is reduced. Since some GHRSSST RDACs only process data natively on grids (especially in the case of geostationary platform observations), the GDS 2.0 L3 specification is flexible enough to allow for the creation of L3 files which meet all the content requirements of a L2P file. In all L2P and L3 cases, bias and standard deviation uncertainty estimates are mandatory.

The distinction between L3 GHRSSST and L4 GHRSSST data is made primarily on whether or not any gap-filling techniques are employed, not on whether data from multiple instruments is used in the L3 product. If no gap filling procedure (such as optimal interpolation) is used, then the product remains a L3 GHRSSST product. GHRSSST defines three kinds of L3 files: un-collated (L3U), collated (L3C), and super-collated (L3S). If gap filling is used to fill all observations gaps, then the resulting gap-free data are considered L4 GHRSSST data products.

## 7.6 <SST Type>

In conjunction with the NetCDF Climate and Forecast (CF) community [AD-10] the GHRSSST Science Team agreed on the CF standard names for "SST" shown in the following figure and described in more detail below. The names were first included in CF-1.3, and the current version (CF-1.4) of the standard name table that can be found in [AD-9]. In addition, the GHRSSST Science Team agreed to use the CF Naming Convention [AD-4] for variable names that do not already exist as part of the CF Convention. CF definitions are used in the GDS and across GHRSSST and are shown schematically in Figure 7-1. The different kinds of SST are detailed later in this section and the relevant <SST Type> codes to be used in the filenames are provided.

# Measurements of SST

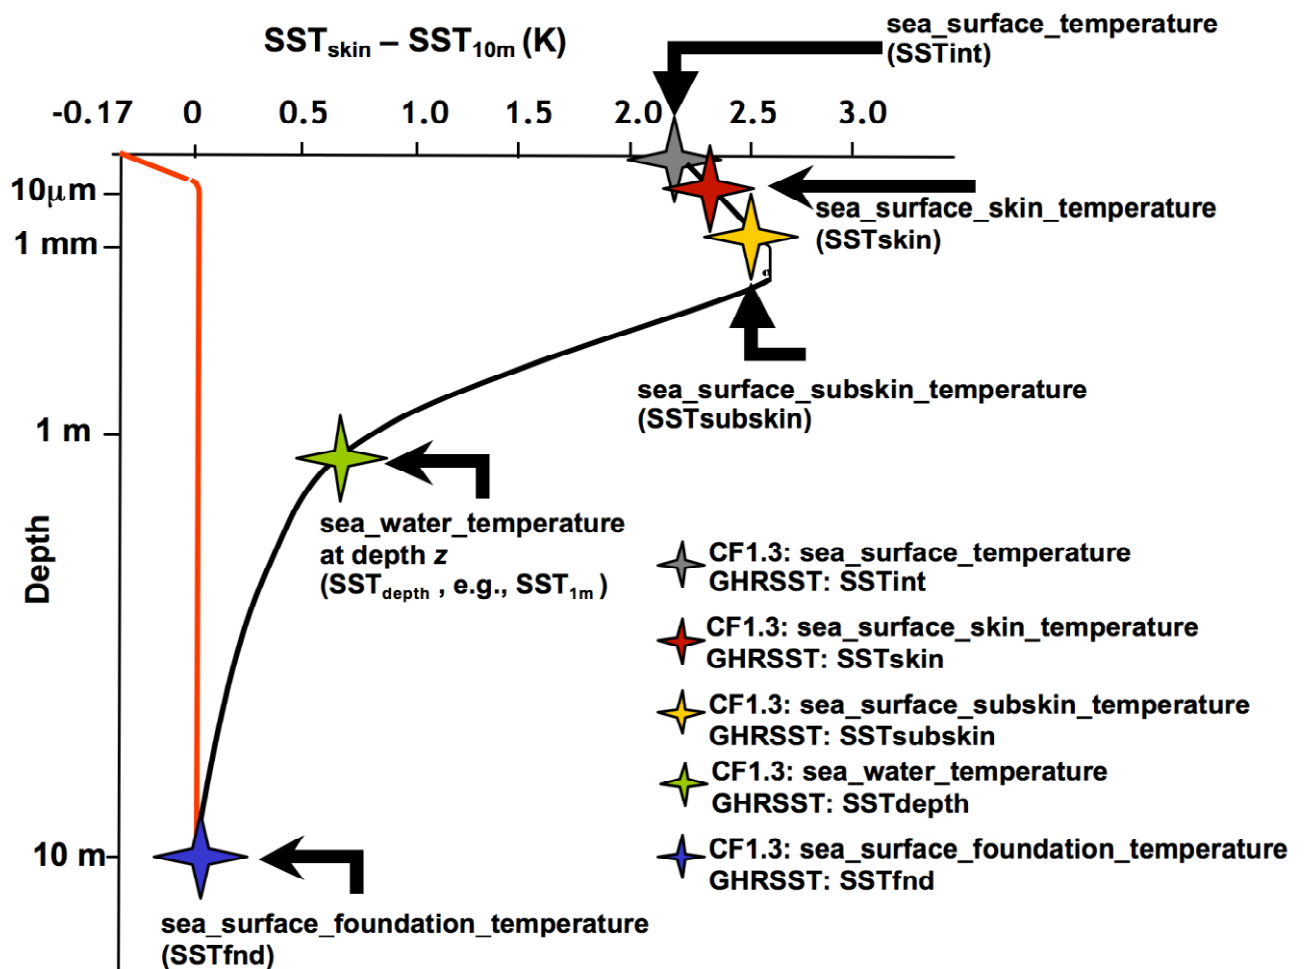

1. Night-time or strong winds profile in red
2. Daytime, strong solar radiation, and light winds profile in black

Figure 7-1. Overview of SST measurement types used within GHRSSST.

## Sea\_surface\_temperature (GHRSSST <SST Type>: SSTint):

CF Definition: *sea\_surface\_temperature* is usually abbreviated as "SST". It is the temperature of sea water near the surface (including the part under sea-ice, if any), and not the interface temperature, whose standard name is *surface\_temperature*. For the temperature of sea water at a particular depth or layer, a data variable of *sea\_water\_temperature* with a vertical coordinate axis should be used.

Additional details: The interface temperature (SSTint) is a theoretical temperature at the precise air-sea interface. It represents the hypothetical temperature of the topmost layer of the ocean water and could be thought of as an even mix of water and air molecules. SSTint is of no practical use because it cannot be measured using current technology. It is important to note that it is the SSTint that interacts with the atmosphere. Within GHRSSST, most variables containing SST are named "sea\_surface\_temperature" to simplify the development of client applications wishing to read these variables. The variable attribute "standard\_name" indicates the precise form of the SST, using the following definitions. More detail is given in the Level 2P (Section 9), Level 3 (Section 10), and Level 4 (Section 11) specification.

**Sea\_surface\_skin\_temperature (GHRSSST <SST Type>: SSTskin):**

CF Definition: *The surface called "surface" means the lower boundary of the atmosphere. The sea surface skin temperature is the temperature measured by an infrared radiometer typically operating at wavelengths in the range 3.7 - 12 micrometers. It represents the temperature within the conductive diffusion-dominated sub-layer at a depth of approximately 10 - 20 micrometers below the air-sea interface. Measurements of this quantity are subject to a large potential diurnal cycle including cool skin layer effects (especially at night under clear skies and low wind speed conditions) and warm layer effects in the daytime.*

Additional Details: The sea surface skin temperature (SSTskin) as defined above represents the actual temperature of the water across a very small depth of approximately 20 micrometers. This definition is chosen for consistency with the majority of infrared satellite and ship mounted radiometer measurements.

**Sea\_surface\_subskin\_temperature (GHRSSST <SST Type>: SSTsubskin):**

CF Definition: *The surface called "surface" means the lower boundary of the atmosphere. The sea surface subskin temperature is the temperature at the base of the conductive laminar sub-layer of the ocean surface, that is, at a depth of approximately 1 - 1.5 millimetres below the air-sea interface. For practical purposes, this quantity can be well approximated to the measurement of surface temperature by a microwave radiometer operating in the 6 - 11 gigahertz frequency range, but the relationship is neither direct nor invariant to changing physical conditions or to the specific geometry of the microwave measurements. Measurements of this quantity are subject to a large potential diurnal cycle due to thermal stratification of the upper ocean layer in low wind speed high solar irradiance conditions.*

Additional Details: The sea surface subskin temperature (SSTsubskin) represents the temperature at the base of the thermal skin layer. The difference between SSTint and SSTsubskin is related to the net flux of heat through the thermal skin layer. SSTsubskin is the temperature of a layer approximately 1 mm thick at the ocean surface.

**Sea\_water\_temperature (GHRSSST <SST Type>: SSTdepth or SST<sub>z</sub>):**

CF Definition: *The general term, "bulk" sea surface temperature, has the standard name sea\_surface\_temperature with no associated vertical coordinate axis. The temperature of sea water at a particular depth (other than the foundation level) should be reported using the standard name sea\_water\_temperature and, wherever possible, supplying a vertical coordinate axis or scalar coordinate variable.*

Additional Details: Sea water temperature (SSTdepth or SST<sub>z</sub>, for example SST<sub>1.5m</sub>) is the terminology adopted by GHRSSST to represent in situ measurements near the surface of the ocean that have traditionally been reported simply as SST or "bulk" SST. For example SST<sub>6m</sub> would refer to an SST measurement made at a depth of 6 m. Without a clear statement of the precise depth at which the SST measurement was made, and the circumstances surrounding the measurement, such a sample lacks the information needed for comparison with, or validation of satellite-derived estimates of SST using other data sources. The terminology has been introduced to encourage the reporting of depth (z) along with the temperature.

All measurements of water temperature beneath the SSTsubskin are obtained from a wide variety of sensors such as drifting buoys having single temperature sensors attached to their hull, moored buoys that sometimes include deep thermistor chains at depths ranging from a few meters to a few thousand meters, thermosalinograph (TSG) systems aboard ships recording at a fixed depth while the vessel is underway, Conductivity Temperature and Depth (CTD) systems providing detailed vertical profiles of the thermohaline structure used during hydrographic surveys and to considerable depths of several thousand meters, and various expendable bathythermograph systems (XBT). In all cases, these temperature observations are distinct from those obtained using remote sensing techniques and measurements at a given depth should be referred to as sea\_water\_temperature qualified by a depth in meters rather than sea surface temperatures. The situation is complicated further when one

considers ocean model outputs for which the SST may be the mean SST over a layer of the ocean several tens of meters thick.

**Sea\_surface\_foundation\_temperature (GHRSSST <SST Type>: SSTfnd):**

CF Definition: *The surface called "surface" means the lower boundary of the atmosphere. The sea surface foundation temperature is the water temperature that is not influenced by a thermally stratified layer of diurnal temperature variability (either by daytime warming or nocturnal cooling). The foundation temperature is named to indicate that it is the temperature from which the growth of the diurnal thermocline develops each day, noting that on some occasions with a deep mixed layer there is no clear foundation temperature in the surface layer. In general, sea surface foundation temperature will be similar to a night-time minimum or pre-dawn value at depths of between approximately 1 and 5 meters. In the absence of any diurnal signal, the foundation temperature is considered equivalent to the quantity with standard name sea\_surface\_subskin\_temperature. The sea surface foundation temperature defines a level in the upper water column that varies in depth, space, and time depending on the local balance between thermal stratification and turbulent energy and is expected to change slowly over the course of a day. If possible, a data variable with the standard name sea\_surface\_foundation\_temperature should be used with a scalar vertical coordinate variable to specify the depth of the foundation level. Sea surface foundation temperature is measured at the base of the diurnal thermocline or as close to the water surface as possible in the absence of thermal stratification. Only in situ contact thermometry is able to measure the sea surface foundation temperature. Analysis procedures must be used to estimate sea surface foundation temperature value from radiometric satellite measurements of the quantities with standard names sea\_surface\_skin\_temperature and sea\_surface\_subskin\_temperature. Sea surface foundation temperature provides a connection with the historical concept of a "bulk" sea surface temperature considered representative of the oceanic mixed layer temperature that is typically represented by any sea temperature measurement within the upper ocean over a depth range of 1 to approximately 20 meters. The general term, "bulk" sea surface temperature, has the standard name sea\_surface\_temperature with no associated vertical coordinate axis. Sea surface foundation temperature provides a more precise, well-defined quantity than "bulk" sea surface temperature and, consequently, is more representative of the mixed layer temperature. The temperature of sea water at a particular depth (other than the foundation level) should be reported using the standard name sea\_water\_temperature and, wherever possible, supplying a vertical coordinate axis or scalar coordinate variable.*

Additional Details: Through the definition of the CF standard names, GHRSSST is attempting to discourage the use of the term "bulk SST", replacing it instead with sea\_water\_temperature (SSTdepth) and a depth coordinate, or sea\_surface\_foundation\_temperature (SSTfnd) and a depth coordinate if possible, if the observation comes from the base of the diurnal thermocline.

**Blended SST (GHRSSST <SST Type>: SSTblend):**

In addition to the CF standard names defined above, GHRSSST also uses the term "Blended SST" for ambiguous cases when the depth or type of SST is not well known. This ambiguity in depth may arise in some L4 analysis products that merge multiple types of SST from satellite and in situ observations. Note, however, that many L4 analysis systems do attempt to specifically create a sea surface foundation temperature, SSTfnd.

The SST codes and CF standard names defined above and used within GHRSSST are summarized along with their key characteristics in Table 7-4.

**Table 7-4. GHRSSST <SST Type> code and summary table.**

GHRSSST <SST Type>	CF Standard Name	Approximate Depth	Typically Observed by...
SSTint	sea_surface_temperature	0 meters	Not presently measureable
SSTskin	sea_surface_skin_temperature	10 – 20 micrometers	Infrared radiometers operating in a range of wavelengths form 3.7 to 12 micrometers

SSTsubskin	<b>sea_surface_subskin_temperature</b>	1 – 1.5 millimetres	Microwave radiometers operating in a range of frequencies from 6-11 gigahertz
SSTdepth	<b>sea_water_temperature</b>	Specified by vertical coordinate (e.g., SST <sub>5m</sub> )	In situ observing systems
SSTfnd	<b>sea_surface_foundation_temperature</b>	1-5 meters pre-dawn	In situ observing systems
SSTblend	None	Unknown	Blend of satellite and in situ observations

## 7.7 <Product String>

The current set of GHRSSST product strings is listed in tables below, in one table each for L2P (Table 7-5), L3 (Table 7-6), L4 (Table 7-7) and GMPE (Table 7-8) products. Included in the L2P table are also codes for satellite platforms and sensors. New strings are entered into the tables upon registration by the DAS-TAG and agreement by the GDAC, LTSRF, and relevant RDACs. These product strings are used within the GHRSSST filename convention and within the GHRSSST unique data set codes described in Section 7.9. The satellite platform and satellite sensor entries are also used in the netCDF global attributes, **platform** and **sensor**, for all GHRSSST product files. See Section 8.2 for more information on the required **global attributes**.

**Table 7-5. GHRSSST L2P <Product String> Table, with Platforms and Sensors**

L2P <Product String>	Satellite Platform	Satellite Sensor	Description
AMSRE	Aqua	AMSRE	Advanced Microwave Scanning Radiometer-EOS (AMSRE)
ATS_NR_2P	Envisat	AATSR	Advanced Along Track Scanning Radiometer (AATSR) - Near Real time
AVHRR<X>_G	NOAA-<X>	AVHRR_GAC	Advanced Very High Resolution Radiometer (AVHRR) Global Area Coverage (GAC) on NOAA-<X>, where X is one of 7,9,10,11,12,14,15,16,17,18, or 19
AVHRR<X>_L	NOAA-<X>	AVHRR_LAC	AVHRR Local Area Coverage (LAC) on NOAA-<X>, where X is one of 7,9,10,11,12,14,15,16,17,18, or 19
AVHRR<X>_D	NOAA-<X>	AVHRR	AVHRR High Resolution Picture Transmission (HRPT) or other Direct broadcast at full resolution on NOAA-<X>, where X is one of 7,9,10,11,12,14,15,16,17,18, or 19
AVHRRMTA_G	MetOpA	AVHRR_GAC	AVHRR GAC on Metop-A (reduced resolution)
AVHRRMTA (also in use AVHRR_METOP_A)	MetOpA	AVHRR	AVHRR on Metop-A at full resolution
AVHRR_Pathfinder	NOAA-<x>	AVHRR	AVHRR Pathfinder data from NOAA-<X>, where X is one of 7,9,10,11,12,14,15,16,17,18, or 19
GOES11	GOES11	GOES_Imager	Geostationary Operational Environmental Satellite (GOES) Imager, on GOES-11 platform
GOES12	GOES12	GOES_Imager	GOES Imager, on GOES-12 platform
GOES13	GOES13	GOES_Imager	GOES Imager, on GOES-13 platform

MODIS_A	Aqua	MODIS	Moderate Resolution Imaging Spectroradiometer (MODIS), on NASA Aqua platform
MODIS_T	Terra	MODIS	MODIS, on NASA Terra platform
MTSAT_1R (also in use MTSAT1R)	MTSAT1R	JAMI	Multi-functional Transport Satellite Imager (MTSAT)
NAR16_SST	NOAA16	AVHRR_HRPT	AVHRR HRPT from NOAA-16 in North Atlantic region
NAR17_SST	NOAA17	AVHRR_HRPT	AVHRR HRPT from NOAA-17 in North Atlantic Region
NAR18_SST	NOAA18	AVHRR_HRPT	AVHRR HRPT from NOAA-18 in North Atlantic Region
NARMTA	MetOpA	AVHRR	North Atlantic Regional AVHRR
SEVIRI_SST (also in use MSG01 and MSG02)	MSG1 or 2	SEVIRI	Spinning Enhanced Visible and Infra-Red Imager (SEVIRI)
TMI	TRMM	TMI	Tropical Rainfall Measuring Mission (TRMM) Microwave Imager
New codes			Please contact the GHRSSST international Project Office if you require new codes to be included in future revisions of the GDS.

Table 7-6. GHRSSST L3 &lt;Product String&gt; Table.

L3 <Product String>	RDAC	Description
AVHRR<X>_D	ABOM	AVHRR High Resolution Picture Transmission (HRPT) or other Direct broadcast remapped at 1 km resolution on NOAA-<X>, where X is one of 7,9,10,11,12,14,15,16,17,18, or 19
AVHRR_Pathfinder	NODC	L3U and L3C AVHRR Pathfinder data from NOAA-<X>, where X is one of 7,9,10,11,12,14,15,16,17,18, or 19
AVHRR_METOP_A	EUR	L3 products from AVHRR on Metop-A at full resolution
New codes		Please contact the GHRSSST international Project Office if you require new codes to be included in future revisions of the GDS.

Table 7-7. GHRSSST L4 &lt;Product String&gt; Table.

L4 <Product String>	RDAC	Description
AVHRR_OI	NCDC	Daily, 25 km optimal interpolation product created using in situ observations and AVHRR data
AVHRR_AMSRE_OI	NCDC	Daily, 25 km optimal interpolation product created using in situ observations, AMSR-E data, and AVHRR data
OSTIA	UKMO	Operational Sea Surface Temperature and Sea Ice Analysis, The analysis is produced daily at a resolution of 1/20° (approx. 5km).
ODYSSEA	EUR	Global and regional 0.1 degree analysis products
DMI_OI	DMI	Danish Met Institutes SST analysis
K10_SST	NAVO	US Navy's K-10 analysis
GAMSSA_28km	ABOM	Global SST analysis product
RAMSSA_09km	ABOM	Australian Regional SST analysis product
mw_ir_OI	REMSS	9 km microwave and infrared SST analysis at 9 km resolution
New codes		Please contact the GHRSSST international Project Office if you require new codes to be included in future revisions of the GDS.

Table 7-8. GHRSSST GMPE &lt;Product String&gt; Table.

GMPE <Product String>	RDAC	Description
-----------------------	------	-------------

GLOBAL	UKMO	Daily, 25 km median average SST and sea ice product created using 10 operational SST analysis products from operational centres around the world
New codes		Please contact the GHRSSST international Project Office if you require new codes to be included in future revisions of the GDS.

## 7.8 <Additional Segregator>

It is possible for the preceding combination of filename components to result in a non-unique filename for any GHRSSST product level. In those situations, the use of the <Additional Segregator> must be used to ensure each distinct file has a unique file name. In addition, RDACs are free to use this component to add other information to their file names. Some providers, for example, use the name of the original L1b file. Others enter start and stop times of the file in this component. Note that in the case of GHRSSST L4 files the <Additional Segregator> element must begin with a code that specifies the approximate region covered by the SST analysis product. There are two primary reasons for this requirement, the first of which is to ensure uniqueness in the file names in the cases where an RDAC is using the same L4 analysis system (for example, "ODYSSEA") to create products for multiple regions (for example, "GAL" (Galapagos Islands Region) and "MED" (Mediterranean Region)). The second reason is that users need to quickly identify at a glance the approximate domain of the L4 products. Users should note that the geographical coordinates associated with each area code in Table 7-9 are explicitly intended to be only approximate, and not strict. For example, an RDAC producing a near-global coverage data may choose to only produce data on a grid that extends to 85°S. Such a product would use the "GLOB" code. Users must retrieve the precise latitude and longitude limits directly from the L4 netCDF data files. New codes are assigned by the GHRSSST Data And Systems Technical Advisory Group (DAS-TAG) and entered into the table upon agreement by the GDAC, LSTRF, and relevant RDACs.

**Table 7-9. L4 area code definitions. Geographical limits are approximate, and users are advised to retrieve the precise latitude and longitude limits from within the L4 data files.**

Code	Approximate Region	Description
GLOB	90°S to 90°N, 180°W to 180°E	Global coverage data sets
MED	30°N to 46°N, 18°W to 36.5°E	Mediterranean Sea area
AUS	70°S to 20°N, 60°E to 170°W	Australian regional analysis area
NWE	43°N to 60°N, 13°W to 9°E	North-West of Europe
NSEABALTIC	66°N to 48°N, 10°W to 30°E	North Sea and Baltic Region
GAL	20°S to 20°N, 120°W to 69°W	Area around the Galapagos Islands
NCAMERICA	20°S to 62°N, 165°W to 30°W	Area around the east and west coasts of North and Central America
New codes		Please contact the GHRSSST international Project Office if you require new codes to be included in future revisions of the GDS.

## 7.9 GHRSSST Unique Text Strings and Numeric Codes

This section describes the best practices that have been developed for creating unique text strings and numeric codes that are needed in various places within some GHRSSST files. Note that these strings are not part of the filename convention described above, but, like filenames, they apply to all GHRSSST product levels and so are described in this part of the GDS.

### SST Variable Text Strings and Numeric Codes

For each official GHRSSST product, a unique numeric code and associated text string is defined. The string is listed in the global attribute `id` (see Section 8.2) for each netCDF file in the product collection. The unique numerical values and text strings for GHRSSST SST datasets are identified in Table 7-10 below and are established by agreement between the relevant RDAC, GDAC, and the LSTRF, following the Best Practice defined later in this Section. The GHRSSST L2P, L3, L4 and GMPE product specifications (Sections 9, 10, 11, and 12, respectively) also require the providing RDAC to use these



text strings directly within the netCDF global attribute `source` to indicate the sources of SST used to create the product. In the event that a non-GHRSSST dataset is used as a source, as in the case of an L2P product that uses a Level 1 dataset as its source, it too must have an established text string following the best practice below (to the extent possible).

The associated numeric codes are used in some L3S files, which must describe the SST sources pixel-by-pixel in a variable named `source_of_sst` if more than one SST source is used. If only one source is used, the variable `source_of_sst` is not needed and instead the source is indicated simply by using the text string in the global attribute `source` (see Section 8.2 and Section 10.29) as indicated earlier.

#### Ancillary and Optional Variable Text Strings and Numeric Codes

GHRSSST L2P, L3, L4 and GMPE product specifications (Sections 9, 10, 11, and 12, respectively) also require the providing RDAC to indicate text strings and associated numeric codes directly within the netCDF global and variable attributes for the ancillary sea ice fraction, aerosol depth indicator, climatologies, surface solar irradiance, wind speed, and when relevant, for optional and experimental variables. These text strings and codes do not need to be unique across different data sets, but must be consistent within a given data set and clearly specified within each netCDF file. In these cases, the variable in question should contain an attribute called `flag_meanings` together with a variable called `flag_values`. The `flag_values` attribute shall contain a comma-separated list of the numeric codes for the sources of data used whose order matches the space-separated text strings in the `flag_meanings` attribute.

#### Best Practice for Establishing Character Strings

A best practice has been established for defining the text strings to be used in these GHRSSST attributes. While a rigid standard for the text strings is not possible, the following best practice should be applied to the extent possible for GHRSSST SST datasets and the ancillary and optional variables:

**<Product String>-<RDAC>-<Processing Level>-<Additional Segregator>-v<Product Version>**

The definitions of the components match the definitions from the file naming convention, found in Table 7-1. The component <Product Version> is used to distinguish different versions of the same dataset and should be of the form x.y where x is the major and y is the minor version. For ancillary and optional variables, an attempt should be made to follow these conventions to the extent possible. If there is no appropriate GHRSSST RDAC to use in the string, then it is recommended that a commonly used acronym for the centre responsible be used. It is recommended that the <Additional Segregator> should be one of ICE, ADI, CLIM, SSI, and WSP, for ancillary sea ice fraction, aerosol depth indicator, climatologies, surface solar irradiance, and wind speed variables, respectively.

Note that many SST text strings not meeting this best practice were established under the GDS version 1 and are already in use, so are listed in the tables as well. These non-compliant strings are indicated with an asterisk. New codes are assigned by the GHRSSST Data And Systems Technical Advisory Group (DAS-TAG) and entered into the table upon agreement by the GDAC, LTSRF, and relevant RDACs.

**Table 7-10. GHRSSST Unique SST Data Set Strings and Numeric Codes.**

Unique Data Set String	Product Version	Numeric Code	Description
ABOM-L4HRfnd-AUS-RAMSSA_09km*	1	1	Australian Bureau of Meteorology Australian Regional SST analysis product
ABOM-L4LRfnd-GLOB-GAMSSA_28km*	1	2	Australian Bureau of Meteorology Australian Regional SST analysis product
EUR-L2P-AMSRE*	1	3	European regional subset L2P of REMSS AMSRE products.
REMSS-L2P-AMSRE*	1	4	L2P orbital AMSRE data from Remote Sensing Systems

REMSS-L2P_GRIDDED_25-AMSRE*	1	5	Gridded L2P AMSRE data from Remote Sensing Systems
EUR-L2P-ATS_NR_2P*	1	6	ENVISAT AATSR 1km SST product from European RDAC (EUR)
UPA-L2P-ATS_NR_2P*	1	7	ENVISAT AATSR 1km SST product from UPA
EUR-L2P-AVHRR16_G*	1	8	AVHRR NOAA-16 GAC products from EUR
EUR-L2P-AVHRR16_L*	1	9	AVHRR NOAA-16 LAC product from EUR
EUR-L2P-AVHRR17_G*	1	10	AVHRR NOAA-17 GAC product from EUR
NAVO-L2P-AVHRR17_G*	1	11	AVHRR NOAA-17 GAC product from NAVOCEANO
EUR-L2P-AVHRR17_L*	1	12	AVHRR NOAA-17 LAC L2P product from EUR
NAVO-L2P-AVHRR17_L*	1	13	AVHRR NOAA-17 LAC product from NAVOCEANO
NEODAAS-L2P-AVHRR17_L*	1	14	AVHRR NOAA-17 LAC product from NEODAAS
NAVO-L2P-AVHRR18_G*	1	15	AVHRR NOAA-18 GAC product from NAVOCEANO
NAVO-L2P-AVHRR17_L*	1	16	AVHRR NOAA-18 LAC product from NAVOCEANO
NEODAAS-L2P-AVHRR18_L*	1	17	AVHRR NOAA-18 LAC product from NEODAAS
NAVO-L2P-AVHRRMTA_G*	1	18	METOP-A AVHRR L2P GAC data from NAVOCEANO
DMI-L4UHfnd-NSEABALTIC-DMI_OI*	1	19	L4 Ultra-high resolution Foundation SST analysis for the North Sea – Baltic region from DMI
EUR-L4HRfnd-GLOB-ODYSSEA*	1	20	ODYSSEA-based high resolution global analysis from the EUR RDAC
EUR-L4UHfnd-GAL-ODYSSEA*	1	21	ODYSSEA-based ultra high resolution Galapagos regional analysis from the EUR RDAC
EUR-L4UHFnd-MED-v01*	1	22	Non-ODYSSEA-based ultra high resolution Mediterranean regional analysis from the EUR RDAC
EUR-L4UHfnd-MED-ODYSSEA*	1	23	ODYSSEA-based ultra high resolution Mediterranean regional analysis from the EUR RDAC
EUR-L4UHfnd-NWE-ODYSSEA*	1	24	ODYSSEA-based ultra high resolution Northwestern European Seas regional analysis from the EUR RDAC
OSDPD-L2P-GOES11*	1	25	GOES-11 L2P data from the NOAA OSDPD
OSDPD-L2P-GOES12*	1	26	GOES-12 L2P data from the NOAA OSDPD
JPL-L2P-MODIS_A*	1	27	Aqua MODIS L2P from JPL RDAC
JPL-L2P-MODIS_T*	1	28	Terra MODIS L2P from JPL RDAC

EUR-L2P-NAR16_SST*	1	29	AVHRR HRPT data from NOAA-16 for the North Atlantic region, from the EUR RDAC
EUR-L2P-NAR17_SST*	1	30	AVHRR HRPT data from NOAA-17 for the North Atlantic region, from the EUR RDAC
EUR-L2P-NAR18_SST*	1	31	AVHRR HRPT data from NOAA-18 for the North Atlantic region, from the EUR RDAC
NAVO-L4HR1m-GLOB-K10_SST*	1	32	K10-based high resolution global L4 analysis from the NAVOCEANO RDAC
NCDC-L4LRfnd-GLOB-AVHRR_AMSRE_OI*	1	33	25-km resolution global L4 analysis from the NCDC RDAC using AVHRR and AMSR-E data
NCDC-L4LRfnd-GLOB-AVHRR_OI*	1	34	25-km resolution global L4 analysis from the NCDC RDAC using data
REMSS-L4HRfnd-GLOB-mw_ir_OI*	1	35	High resolution global L4 analysis from Remote Sensing Systems using microwave and infrared data
EUR-L2P-SEVIRI_SST*	1	36	SEVIRI L2P from EUR RDAC
EUR-L2P-TMI*	1	37	TMI L2P from EUR RDAC
REMSS-L2P-TMI*	1	38	TMI L2P from Remote Sensing Systems
REMSS-L2P_GRIDDED_25-TMI*	1	39	Gridded TMI L2P from Remote Sensing Systems
UKMO-L4HRfnd-GLOB-OSTIA*	1	40	OSTIA-based High resolution global L4 analysis from UK Met Office
JPL-L4UHfnd-NCAMERICA-MUR*	1	41	MUR-system based ultra high resolution North American L4 regional analysis from JPL
JPL_OUROCEAN-L4UHfnd-GLOB-G1SST*	1	42	OUROCEAN "G1SST"-based ultra high resolution global L4 analysis from JPL
UKMO-L4LRens-GLOB-GMPE*	1	43	GHRSSST global coverage multi product ensemble (GMPE) from the UK Met Office as part of the MyOcean project.
EUR-L3P-GLOB_AVHRR_METOP_A*	1	44	Global, level 3 data from the AVHRR on METOP-A from EUR
EUR-L2P-AVHRR_METOP_A*	1	45	Level 2P data from the AVHRR on METOP-A from EUR
EUR-L3P-NAR_AVHRR_METOP_A*	1	46	North Atlantic Regional level 3 data from the AVHRR on METOP-A from EUR
OSDPD-L2P-GOES13*	1	47	GOES-13 L2P data from the NOAA OSDPD
OSDPD-L2P-MTSAT1R*	1	48	MTSAT-1R L2P data from OSDPD RDAC
OSDPD-L2P-MSG02*	1	49	MSG-2 L2P data from OSDPD RDAC
NAVO-L2P-AVHRR19_L*	1	50	AVHRR NOAA-19 LAC product from NAVOCEANO
NAVO-L2P-AVHRR19_G*	1	51	AVHRR NOAA-19 GAC product from NAVOCEANO

NEODAAS-L2P-AVHRR19_L*	1	52	AVHRR NOAA-19 LAC product from NEODAAS
SEVIRI_SST-OSISAF-L3C-v1.0	1	53	Level 3 Collated SEVIRI data from OSISAF RDAC
GOES13-OSISAF-L3C-v1.0	1	54	Level 3 Collated GOES-13 data from OSISAF RDAC
AVHRR09_D-ABOM-L2P-v1.0	1	55	AVHRR HRPT from NOAA-09 received by ABOM at full resolution covering the AUS region
AVHRR10_D-ABOM-L2P-v1.0	1	56	AVHRR HRPT from NOAA-10 received by ABOM at full resolution covering the AUS region
AVHRR11_D-ABOM-L2P-v1.0	1	57	AVHRR HRPT from NOAA-11 received by ABOM at full resolution covering the AUS region
AVHRR12_D-ABOM-L2P-v1.0	1	58	AVHRR HRPT from NOAA-12 received by ABOM at full resolution covering the AUS region
AVHRR14_D-ABOM-L2P-v1.0	1	59	AVHRR HRPT from NOAA-14 received by ABOM at full resolution covering the AUS region
AVHRR15_D-ABOM-L2P-v1.0	1	60	AVHRR HRPT from NOAA-15 received by ABOM at full resolution covering the AUS region
AVHRR16_D-ABOM-L2P-v1.0	1	61	AVHRR HRPT from NOAA-16 received by ABOM at full resolution covering the AUS region
AVHRR17_D-ABOM-L2P-v1.0	1	62	AVHRR HRPT from NOAA-17 received by ABOM at full resolution covering the AUS region
AVHRR18_D-ABOM-L2P-v1.0	1	63	AVHRR HRPT from NOAA-18 received by ABOM at full resolution covering the AUS region
AVHRR19_D-ABOM-L2P-v1.0	1	64	AVHRR HRPT from NOAA-19 received by ABOM at full resolution covering the AUS region
AVHRR_Pathfinder-NODC-L2P-v6.0	6	65	AVHRR Pathfinder Version 6.0 L2P from NODC
AVHRR_Pathfinder-NODC-L3U-v6.0	6	66	AVHRR Pathfinder Version 6.0 L3U from NODC
AVHRR_Pathfinder-NODC-L3C-v6.0	6	67	AVHRR Pathfinder Version 6.0 L3C from NODC
New codes			Please contact the GHRSSST Project Office if you require new codes to be included in future revisions of the GDS.

## 8 GDS 2.0 Data Product File Structure

### 8.1 Overview of the GDS 2.0 netCDF File Format

GDS 2.0 data files preferentially use the **netCDF-4 Classic** format. However, as netCDF-4 is a relatively new format and includes a significant number of new features that may not be well supported by existing user applications and tools, the GHR SST Science Team agreed to support both netCDF-3 and netCDF-4 format data files during a transition period. At the 11<sup>th</sup> GHR SST Science Team meeting, Lima Peru, 21-25<sup>th</sup> June 2010 it was agreed that the transition period would end in 2013 at which point (subject to positive developments in the user community using netCDF-4) the use of netCDF-3 format data products will cease within the GHR SST R/GTS framework. **NetCDF-3 data products shall be delivered to the GDAC with an accompanying MMR file records as described in Section 13.** While netCDF-3 can store the metadata, it is computationally expensive to extract it from externally-compressed netCDF-3 files. A major advantage to the use of NetCDF-4 format products from the producer's perspective is that no additional metadata records are required when using this format since the GDAC and LTSRF can easily extract it from the files without having to decompress the entire file.

These GDS 2.0 formatted data sets must comply with the Climate and Forecast (CF) Conventions, v1.4 [AD-4] or later because these conventions provide a practical standard for storing oceanographic data in a robust, easily-preserved for the long-term, and interoperable manner. The CF-compliant netCDF data format is flexible, self-describing, and has been adopted as a *de facto* standard for many operational and scientific oceanography systems. Both netCDF and CF are actively maintained including significant discussions and inputs from the oceanographic community (see <http://cf-pcmdi.llnl.gov/discussion/index.html>). The CF convention generalizes and extends the Cooperative Ocean/Atmosphere Research Data Service (COARDS, [AD-5]) Convention but relaxes the COARDS constraints on dimension order and specifies methods for reducing the size of datasets. The purpose of the CF Conventions is to require conforming datasets to contain sufficient metadata so that they are self-describing, in the sense that each variable in the file has an associated description of what it represents, physical units if appropriate, and that each value can be located in space (relative to earth-based coordinates) and time. In addition to the CF Conventions, GDS 2.0 formatted files follow some of the recommendations of the Unidata Attribute Convention for Dataset Discovery (ACDD, [AD-8]).

In the context of netCDF, a variable refers to data stored in the file as a vector or as a multidimensional array. Each variable in a GHR SST netCDF file consists of a 2-dimensional [i x j], 3-dimensional [i x j x k], or 4-dimensional [i x j x k x l] array of data. The dimensions of each variable must be explicitly declared in the dimension section.

Within the netCDF file, global attributes are used to hold information that applies to the whole file, such as the data set title. Each individual variable must also have its own attributes, referred to as variable attributes. These variable attributes define, for example, an offset, scale factor, units, a descriptive version of the variable name, and a fill value, which is used to indicate array elements that do not contain valid data. Where applicable, SI units should be used and described by a character string, which is compatible with the Unidata UDUNITS-2 package [AD-6].

All GHR SST GDS 2.0 files conform to this structure and share a common set of netCDF global attributes. These global attributes include those required by the CF Convention plus additional ones required by the GDS 2.0. The required set of global attributes is described in Section 8.2 and entities within the GHR SST R/GTS framework are free to add their own, as long as they do not contradict the GDS 2.0 and CF requirements.

Following the CF convention, each variable also has a set of variable attributes. The required variable attributes are described in Section 8.3. In a few cases, some of these variable attributes may not be relevant for certain variables or additional variable attributes may be required. In those cases, the variable descriptions in each of the L2P, L3, L4, and GMPE product specifications (Sections 9, 10, 11, and 12) will identify the differences and specify requirements for each product. As with the global attributes, entities within the GHR SST R/GTS framework are free to add their own variable attributes, as long as they do not contradict the GDS 2.0 and CF requirements.

While the exact volumes can vary, an average L2P file will use about 33 bytes per pixel, an L3 file 28 bytes per pixel, and an L4 file about 8 bytes per pixel. The data type encodings for each variable are fixed except for the experimental fields, which are flexible and can be chosen by the producing RDAC.

## 8.2 GDS 2.0 netCDF Global Attributes

Table 8-1 below summarizes the global attributes that are mandatory for every GDS 2.0 netCDF data file. More details on the CF-mandated attributes (as indicated in the Source column) are available at: <http://cf-pcmdi.llnl.gov/documents/cf-conventions/1.4/cf-conventions.html#attribute-appendix> and information on the ACDD recommendations is available at <http://www.unidata.ucar.edu/software/netcdf-java/formats/DataDiscoveryAttConvention.html>.

**Table 8-1 Mandatory global attributes for GDS 2.0 netCDF data files**

Global Attribute Name	Format	Description	Source
<b>Conventions</b>	string	A text string identifying the netCDF conventions followed. This attribute should be set to the version of CF used and should also include the ACDD. For example: "CF-1.4, Unidata Observation Dataset v1.0".	CF
<b>title</b>	string	A descriptive title for the GHRSSST data set	CF, ACDD
<b>summary</b>	string	A paragraph describing the dataset.	ACDD
<b>references</b>	string	Published or web-based references that describe the data or methods used to produce it.	CF
<b>institution</b>	string	GHRSSST RDAC code where the data were produced. See Table 7-2 for available codes.	CF, ACDD
<b>history</b>	string	History of all applications that have modified the original data to create this file.	CF, ACDD
<b>comment</b>	string	Miscellaneous information about the data or methods used to produce it.	CF, ACDD
<b>license</b>	string	Describe any restrictions to data access, use, and distribution. GHRSSST data sets should be freely and openly available to comply with the R/GTS framework, with no restrictions. However, if a user should submit a simple registration via a web form, for example, the URL could be given here. Default to "GHRSSST protocol describes data use as free and open."	ACDD
<b>id</b>	string	The unique GHRSSST character string for this product. All GHRSSST SST products have one, and they are listed in Table 7-10.	ACDD
<b>naming_authority</b>	string	Fixed as "org.ghrsst" following ACDD convention	ACDD
<b>product_version</b>	string	The product version of this data file, which may be different than the file version used in the file naming convention (Section 7).	GDS
<b>uuid</b>	string	A Universally Unique Identifier (UUID). Numerous, simple tools can be used to create a UUID, which is inserted as the value of this attribute. See <a href="http://en.wikipedia.org/wiki/Universally_Unique_Identifier">http://en.wikipedia.org/wiki/Universally_Unique_Identifier</a> for more information and tools.	GDS
<b>gds_version_id</b>	string	GDS version used to create this data file. For example, "2.0".	GDS
<b>netcdf_version_id</b>	string	Version of netCDF libraries used to create this file. For example, "4.1.1"	GDS
<b>date_created</b>	string	The date and time the data file was created in the form "yyyymmddThhmmssZ". This time format is ISO 8601 compliant.	ACDD

<b>file_quality_level</b>	integer	A code value: 0 = unknown quality 1 = extremely suspect (frequent problems, e.g. with known satellite problems) 2 = suspect (occasional problems, e.g. after launch) 3 = excellent (no known problems)	GDS
<b>spatial_resolution</b>	string	A string describing the approximate resolution of the product. For example, "1.1km at nadir"	GDS
<b>start_time</b>	string	Date and time of the first measurement in the data file in the form "yyyymmddThhmmssZ". This time format is ISO 8601 compliant.	GDS
<b>time_coverage_start</b>	string	Identical to <b>start_time</b> . Included for increased ACDD compliance.	ACDD
<b>stop_time</b>	string	Date and time of the last measurement in the data file in the form "yyyymmddThhmmssZ". This time format is ISO 8601 compliant.	GDS
<b>time_coverage_end</b>	string	Identical to <b>stop_time</b> . Included for increased ACDD compliance.	ACDD
<b>northernmost_latitude</b>	float	Decimal degrees north, range -90 to +90. This is equivalent to ACDD <code>geospatial lat max</code> .	GDS
<b>southernmost_latitude</b>	float	Decimal degrees north, range -90 to +90. This is equivalent to ACDD <code>geospatial lat min</code> .	GDS
<b>easternmost_longitude</b>	float	Decimal degrees east, range -180 to +180. This is equivalent to ACDD <code>geospatial lon max</code> .	GDS
<b>westernmost_longitude</b>	float	Decimal degrees east, range -180 to +180. This is equivalent to ACDD <code>geospatial lon min</code> .	GDS
<b>source</b>	string	Comma separated list of all source data present in this file. List SST sources first, followed by Auxiliary sources. If the source is a GHRSSST product, use the GHRSSST unique string listed in Table 7-10. For other sources, following the best practice described in Section 7.9.	CF
<b>platform</b>	string	Satellite(s) used to create this data file. Select from the entries found in the Satellite Platform column of Table 7-5 and provide as a comma separated list if there is more than one.	GDS
<b>sensor</b>	string	Sensor(s) used to create this data file. Select from the entries found in the Satellite Sensor column of Table 7-5 and provide as a comma separated list if there is more than one.	GDS
<b>metadata_conventions</b>	string	Unidata Dataset Discovery v1.0	ACDD
<b>metadata_link</b>	string	Link to collection metadata record at archive	ACDD
<b>keywords</b>	string	Typically GCMD Science Keyword: "Oceans > Ocean Temperature > Sea Surface Temperature"	ACDD
<b>keywords_vocabulary</b>	string	"NASA Global Change Master Directory (GCMD) Science Keywords" as defined in [AD-11]	ACDD
<b>standard_name_vocabulary</b>	string	"NetCDF Climate and Forecast (CF) Metadata Convention"	ACDD
<b>geospatial_lat_units</b>	string	Units of the latitudinal resolution. Typically "degrees_north"	ACDD
<b>geospatial_lat_resolution</b>	float	Latitude Resolution in units matching <b>geospatial lat units</b> .	ACDD
<b>geospatial_lon_units</b>	string	Units of the longitudinal resolution. Typically "degrees_east"	ACDD
<b>geospatial_lon_resolution</b>	float	Longitude Resolution in units matching <b>geospatial lon resolution</b> .	ACDD

<b>acknowledgment</b>	string	Information about funding source and how to cite the use of these data.	ACDD
<b>creator_name</b>	string	Provide a name and email address for the most relevant point of contact at the producing RDAC, as well as a URL relevant to this data set.	ACDD
<b>creator_email</b>	string		ACDD
<b>creator_url</b>	string		ACDD
<b>project</b>	string	"Group for High Resolution Sea Surface Temperature"	ACDD
<b>publisher_name</b>	string	The GHRSSST Project Office	ACDD
<b>publisher_url</b>	string	<a href="http://www.ghrsst.org">http://www.ghrsst.org</a>	ACDD
<b>publisher_email</b>	string	<a href="mailto:ghrsst-po@nceo.ac.uk">ghrsst-po@nceo.ac.uk</a>	ACDD
<b>processing_level</b>	string	GHRSSST definitions are the options: L2P, L3U, L3C, L3S, L4 and GMPE	ACDD, GDS
<b>cdm_data_type</b>	string	"swath" or "grid"	ACDD

### 8.3 GDS 2.0 netCDF Variable Attributes

Table 8-2. Variable attributes for GDS 2.0 netCDF data files

Variable Attribute Name	Format	Description	Source
<b>_FillValue</b>	Must be the same as the variable type	A value used to indicate array elements containing no valid data. This value must be of the same type as the storage (packed) type; should be set as the minimum value for this type. Note that some netCDF readers are unable to cope with signed bytes and may, in these cases, report fill as 128. Some cases will be reported as unsigned bytes 0 to 255.	CF
<b>units</b>	string	Text description of the units, preferably S.I., and must be compatible with the Unidata UDUNITS-2 package [AD-6]. For a given variable (e.g. wind speed), these must be the same for each dataset.	CF, ACDD
<b>scale_factor</b>	Must be expressed in the unpacked data type	To be multiplied by the variable to recover the original value. Defined by the producing RDAC. Valid values within <b>value_min</b> and <b>valid_max</b> should be transformed by <b>scale_factor</b> and <b>add_offset</b> , otherwise skipped to avoid floating point errors.	CF
<b>add_offset</b>	Must be expressed in the unpacked data type	To be added to the variable after multiplying by the scale factor to recover the original value. If only one of <b>scale_factor</b> or <b>add_offset</b> is needed, then both should be included anyway to avoid ambiguity, with <b>scale_factor</b> defaulting to 1.0 and <b>add_offset</b> defaulting to 0.0. Defined by the producing RDAC.	CF
<b>long_name</b>	string	A free-text descriptive variable name.	CF, ACDD
<b>valid_min</b>	Expressed in same data type as variable	Minimum valid value for this variable once they are packed (in storage type). The fill value should be outside this valid range. Note that some netCDF readers are unable to cope with signed bytes and may, in these cases, report valid min as 129. Some cases as unsigned bytes 0 to 255. Values outside of <b>valid_min</b> and <b>valid_max</b> will be treated as missing values.	CF



<b>valid_max</b>	Expressed in same data type as variable	Maximum valid value for this variable once they are packed (in storage type). The fill value should be outside this valid range. Note that some netCDF readers are unable to cope with signed bytes and may, in these cases, report valid min as 127	CF
<b>standard_name</b>	string	Where defined, a standard and unique description of a physical quantity. For the complete list of standard name strings, see [AD-9]. <b>Do not</b> include this attribute if no <code>standard_name</code> exists.	CF, ACDD
<b>comment</b>	string	Miscellaneous information about the data or the methods used to produce it.	CF
<b>source</b>	string	<p><b>For L2P and L3 files:</b> For a data variable with a single source, use the GHRSSST unique string listed in Table 7-10 if the source is a GHRSSST SST product. For other sources, following the best practice described in Section 7.9 to create the character string.</p> <p>If the data variable contains multiple sources, set this string to be the relevant “sources of” variable name. For example, if multiple wind speed sources are used, set <code>source = sources_of_wind_speed</code>.</p> <p><b>For L4 and GMPE files:</b> follow the <code>source</code> convention used for the global attribute of the same name, but provide in the comma-separated list only the sources relevant to this variable.</p>	CF
<b>references</b>	string	Published or web-based references that describe the data or methods used to produce it. Note that while at least one reference is required in the global attributes (See Table 8-1), references to this specific data variable may also be given.	CF
<b>axis</b>	string	For use with coordinate variables only. The attribute ‘axis’ may be attached to a coordinate variable and given one of the values “X”, “Y”, “Z”, or “T”, which stand for a longitude, latitude, vertical, or time axis respectively. See: <a href="http://cf-pcmdi.llnl.gov/documents/cf-conventions/1.4/cf-conventions.html#coordinate-types">http://cf-pcmdi.llnl.gov/documents/cf-conventions/1.4/cf-conventions.html#coordinate-types</a>	CF
<b>positive</b>	string	For use with a vertical coordinate variables only. May have the value “up” or “down”. For example, if an oceanographic netCDF file encodes the depth of the surface as 0 and the depth of 1000 meters as 1000 then the axis would set positive to “down”. If a depth of 1000 meters was encoded as -1000, then positive would be set to “up”. See the section on vertical-coordinate in [AD-4]	CF
<b>coordinates</b>	string	Identifies auxiliary coordinate variables, label variables, and alternate coordinate variables. See the section on coordinate-system in [AD-4]	CF

<b>grid_mapping</b>	string	Use this for data variables that are on a projected grid. The attribute takes a string value that is the name of another variable in the file that provides the description of the mapping via a collection of attached attributes. That named variable is called a <i>grid mapping variable</i> and is of arbitrary type since it contains no data. Its purpose is to act as a container for the attributes that define the mapping. See the section on mappings-and-projections in [AD-4]	CF
<b>flag_meanings</b>	string	Space-separated list of text descriptions. Words within a phrase should be connected with underscores. Used only for flag and "sources_of_xxx" variables.	CF
<b>flag_values</b>	string	Comma-separated array of valid, mutually exclusive variable values (required when the bit field contains enumerated values). Used only for flag and "sources_of_xxx" variables.	CF
<b>flag_masks</b>	string	Array of valid variable masks (required when the bit field contains independent Boolean conditions). Used only for flag and "sources_of_xxx" variables.	CF

## 8.4 GDS 2.0 coordinate variable definitions

NetCDF coordinate variables provide scales for the space and time axes for the multidimensional data arrays, and must be included for all dimensions that can be identified as spatio-temporal axes. Coordinate arrays are used to geolocate data arrays on non-orthogonal grids, such as images in the original pixel/scan line space, or complicated map projections. Required attributes are **units** and **\_FillValue**. Elements of the coordinate array need not be monotonically ordered. The data type can be any and scaling may be implemented if required. **add\_offset** and **scale\_factor** have to be adjusted according to the sensor resolution and the product spatial coverage. If the packed values can not stand on a short, float can be used instead (multiplying the size of these variables by two).

'**time**' is the reference time of the SST data array. The GDS 2.0 specifies that this reference time should be extracted or computed to the nearest second and then coded as continuous UTC time coordinates in **seconds from 00:00:00 UTC January 1, 1981** (which is the definition of the **GHRSSST origin time**, chosen to approximate the start of useful AVHRR SST data record). Note that the use of UDUNITS in GHRSSST implies that that calendar to be used is the default mixed Gregorian/Julian calendar.

The reference time used is dependent on the <Processing Level> of the data and is defined as follows:

- L2P: start time of granule;
- L3U: start time of granule;
- L3C and L3S: centre time of the collation window;
- L4 and GMPE: nominal time of the analysis

The coordinate variable '**time**' is intended to minimize the size of the **sst\_dtime** variable (e.g., see Section 9.4), which stores offsets from the reference time in seconds for each SST pixel. '**time**' also facilitates aggregation of all files of a given dataset along the time axis with such tools as THREDDS and LAS.

x (columns) and y (lines) grid dimensions are referred either as '**lat**' and '**lon**' or as '**ni**' and '**nj**'. **lon** and **lat** must be used if data are mapped on a regular grid (some geostationary products). **ni**

and  $n_j$  are used if data are mapped on a non-regular grid (curvilinear coordinates) or following the sensor scanning pattern (scan line, swath). It is preferred that  $n_i$  should be used for the across-track dimension and  $n_j$  for the along-track dimension.

Coordinate vectors are used for data arrays located on orthogonal (but not necessarily regularly spaced) grids, such as a geographic (lat-lon) map projections. The only required attribute is **units**. The elements of a coordinate vector array should be in monotonically increasing or decreasing order. The data type can be any and scaling may be implemented if required.

A **coordinate's** variable (= "lon lat"): must be provided if the data are on a non-regular lat/lon grid (map projection or swath data).

A **grid\_mapping** (= "projection name"): must be provided if the data are mapped following a projection. Refer to the CF convention [AD-4] for standard projection names.

### Regular latitude/longitude grids

This is the simplest case. Many L3, L4, and GMPE products as well as some geostationary L2P products are provided on a regular lat/lon grid. On such a projection, only two coordinate variables are requested and they can be stored as vector arrays. Longitudes should range from -180 to +180, corresponding to 180 degrees West to 180 degrees East. Latitudes should range from -90 to +90, corresponding to 90 degrees South to 90 degrees North. There should be no `_FillValue` for latitude and longitude and all SST pixels should have a valid value latitude and longitude.

It is recommended that for Level 3 and Level 4 data products the `time` dimension be specified as `unlimited`. **Note that the time dimension for L2P data files is strictly defined as `time=1` (unlimited dimension not allowed).** This strict definition is because L2P data are swath based and the geospatial information may change across consecutive time slabs. Although in GHRSSST L3 and L4 granules there is only one time dimension (`time=1`) and variable `time` has only one value (seconds since 1981), setting an unlimited dimension for `time` will allow netCDF tools and utilities to easily concatenate (and average for example) a series of time consecutive GHRSSST granules. The following CDL is provided as an example:

```
netcdf example {
    dimensions:
        lat = 1801 ;
        lon = 3600 ;
        time = UNLIMITED ; // (strictly set to 1 for L2P)
    variables:
        ...
}
```

For these cases, `dimension` and `coordinate` variables shall be used for a regular lat/lon grid as shown in Table 8-3. No specific variable attributes are required for other variables (like `sea_surface_temperature` as shown in the example given in Table 8-3.

**Table 8-3 Example CDL for GDS-2.0 geographic regular latitude/longitude grids**

<pre>netcdf example { dimensions: lat = 1024 ; lon = 1024 ; time = unlimited ;</pre>
<pre>variables: float lat(lat) ;     lat:standard_name = "latitude" ;     lat:units = "degrees_north" ;     lat:valid_min = -90. ;     lat:valid_max = 90. ;     lat:reference_datum = "geographical coordinates, WGS84 projection" ; float lon(lon) ;     lon:standard_name = "longitude" ;     lon:units = "degrees_east" ;     lon:valid_min = -180. ;     lon:valid_max = 180. ;     lon:reference_datum = "geographical coordinates, WGS84 projection" ; long time(time) ;     time:long_name = "reference time of sst file" ;     time:standard_name = "time" ;     time:units = "seconds since 1981-01-01 00:00:00" ;</pre>
<pre>short sea_surface_temperature(time, lat, lon) ;     sea_surface_temperature:standard_name="sea_surface_skin_temperature";     sea_surface_temperature:long_name="Skin temperature of the sea surface";     sea_surface_temperature:units = "kelvin" ;</pre>

```

sea_surface_temperature:_FillValue = -32768s ;
sea_surface_temperature:add_offset = 273.15 ;
sea_surface_temperature:scale_factor = 0.01 ;
sea_surface_temperature:valid_min = -5000s ;
sea_surface_temperature:valid_max = 5000s ;
sea_surface_temperature:source = "EUMETSAT SAF O&SI" ;
sea_surface_temperature:comment = "These SST values are representative
of the top 10 micrometers of the sea surface and were generated on a
regular grid" ;
}

```

### Non-regular latitude/longitude grids (projection)

For gridded data using a specific projection (such as stereographic projection), lat/lon have to be stored in 2-D arrays. When data are gridded following the sensor pattern, no projection can be associated and lat/lon data have to be stored in 2-D arrays. Dimensions cannot be referred to as lat/lon any more since the x and y axis of the grid are not related to the latitude or longitude axis. Each variable must explicitly provide a reference to its coordinate variables (**coordinates** variable attribute) and to the related projection (**grid\_mapping** variable attribute) described in a specific variable (for example, **stereographic\_polar** in the example given in Table 8-4; refer to CF convention [AD-4] for standard names).

In these cases, **dimension** and **coordinate** variables shall be used for a non-regular lat/lon grid (projection) as shown in Table 8-4. A specific projection coordinate variable shall be added (for example, **polar\_stereographic**), following the CF-1.4 convention. The specific variable attributes '**coordinates = "lon lat"**' and '**grid\_mapping = "polar\_stereographic"**' are required for each other variables (like '**sea\_surface\_temperature**' in the example given in Table 8-4). If the projection has additional information e.g. polar\_projection details, these shall be included in the **comment** attribute.

Note that variable attributes such as **grid\_mapping** may be set differently (when using a different kind of projection) or completely removed (for swath products or regular grids if required).

**Table 8-4 Example CDL for Non-regular latitude/longitude grids (projections)**

```

netcdf example {
dimensions:
  ni = 1024 ;
  nj = 1024 ;
  time = 1 ;
variables:
  float lat(nj, ni) ;
    lat:standard_name = "latitude" ;
    lat:units = "degrees_north" ;
    lat:valid_min = -90. ;
    lat:valid_max = 90. ;
    lat:reference_datum = "geographical coordinates, WGS84 projection" ;
  float lon(nj, ni) ;
    lon:standard_name = "longitude" ;
    lon:units = "degrees_east" ;
    lon:valid_min = -180. ;
    lon:valid_max = 180. ;
    lon:reference_datum = "geographical coordinates, WGS84 projection" ;
  long time(time) ;
    time:long_name = "reference time of sst file" ;
    time:standard_name = "time" ;
    time:units = "seconds since 1981-01-01 00:00:00 " ;
  short sea_surface_temperature(time, nj, ni) ;
    sea_surface_temperature:standard_name="sea_surface_skin_temperature";
    sea_surface_temperature:long_name="Skin temperature of the sea

```

```

surface";
  sea_surface_temperature:units = "kelvin" ;
  sea_surface_temperature:_FillValue = -32768s ;
  sea_surface_temperature:add_offset = 273.15 ;
  sea_surface_temperature:scale_factor = 0.01 ;
  sea_surface_temperature:valid_min = -200s ;
  sea_surface_temperature:valid_max = 5000s ;
  sea_surface_temperature:coordinates = "lon lat" ;
  sea_surface_temperature:grid_mapping = "polar_stereographic" ;
  sea_surface_temperature:source = "EUMETSAT SAF O&SI" ;
  sea_surface_temperature:comment = "These SST values are representative
of the top 10 micrometers of the sea surface and were projected on a polar
stereographic grid" ;
}

```

### Non-regular latitude/longitude grids (swath)

In this case where data are gridded following the sensor pattern, no projection can be associated and lat/lon data have to be stored in 2-D arrays. Dimensions cannot be referred to as lat/lon anymore since x and y axis of the grid are no more related to the latitude or longitude axis. Each variable must explicitly provide a reference to its coordinate variables (using the `coordinates` variable attribute).

Dimension and coordinate variables shall be used for a non-regular lat/lon grid (swath product file) as shown in Table 8-5. The specific variable attribute '`coordinates = "lon lat"`' is required for each of the variables (like '`sea_surface_temperature`' below).

**Table 8-5 Example CDL for GDS-2.0 Non-regular latitude/longitude grids (swath)**

```

netcdf example {
dimensions:
  ni = 1000 ;
  nj = 40000 ;
  time = 1 ;
variables:
  float lat(nj, ni) ;
    lat:standard_name = "latitude" ;
    lat:units = "degrees_north" ;
  float lon(nj, ni) ;
    lon:standard_name = "longitude" ;
    lon:units = "degrees_east" ;
  long time(time) ;
    time:long_name = "reference time of sst file" ;
    time:standard_name = "time" ;
    time:units = "seconds since 1981-01-01 00:00:00" ;
  short sea_surface_temperature(time, nj, ni) ;
    sea_surface_temperature:standard_name="sea_surface_skin_temperature";
    sea_surface_temperature:long_name="Skin temperature of the sea
surface";
    sea_surface_temperature:units = "kelvin" ;
    sea_surface_temperature:_FillValue = -32768s ;
    sea_surface_temperature:add_offset = 273.15 ;
    sea_surface_temperature:scale_factor = 0.01 ;
    sea_surface_temperature:valid_min = -5000s ;
    sea_surface_temperature:valid_max = 5000s ;
    sea_surface_temperature:coordinates = "lon lat" ;
    sea_surface_temperature:source = "EUMETSAT SAF O&SI" ;
    sea_surface_temperature:comment = "These SST values are representative
of the top 10 micrometers of the sea surface and are provided on their
native, non regular latitude/longitude grid (swath).";
}

```

## 9 Level 2 Pre-processed (L2P) Product Specification

### 9.1 Overview description of the GHRSSST L2P data product

The GHRSSST Level-2 Pre-processed (L2P) products are the basic building blocks from which all other GHRSSST SST data products can be derived. L2P data products should ideally be made available within the GHRSSST R/GTS framework to the user community in real time within 3 hours after the reception of data at the satellite. For every L2P file that is generated, appropriate ISO metadata (specified in Section 12.1) must also be created and registered at the GHRSSST Master Metadata Repository (MMR) system (see [AD-1] for more details).

L2P products include SST data as delivered by a data provider in their native format (swath, grid, or vector), together with a number of ancillary fields that simplify interpretation an application of the SST data. The main difference between input L2 SST data file and the output GHRSSST L2P data file is that additional confidence data and sensor specific error estimates for each pixel value are included and the original SST data files are reformatted into the L2P specification. No adjustments to the input L2 SST measurements are allowed but instead, single sensor error statistics are used to provide bias error and standard deviation estimates. A user wishing to correct L2P SST data can apply these estimates to the SST values directly. Full orbit input data files may be split into ascending and descending files or smaller granules and a unique L2P output may be generated for each file. The common format of L2P products allows data users to code with the security so that as new satellite derived SST data sets are brought on-line, very minimal code changes are required to make full use of new L2P data. Time previously spent on coding different i/o routines for each satellite data set can now be spent applying the data to various applications and societal benefits instead.

The GHRSSST Science Team agreed at the 6<sup>th</sup> GHRSSST Science Team Meeting, Met Office, Exeter, United Kingdom, May 14th – 20th 2005, which 6 mandatory fields form the core data content of a GHRSSST L2P data file. These fields will be known as L2P 'core' (L2Pcore) fields. In addition to metadata records, global attributes and geo-location information, RDACs must produce the following L2Pcore within an L2P file:

- Sea Surface Temperature data (SST)
- Time differences of SST measurements from a reference time (`sst_dtime`)
- SST Single Sensor Error Statistic (SSES) measurement bias estimate (`sses_bias`)
- SSES measurement standard deviation estimate (`sses_standard_deviation`)
- Flags specific to each L2P data set that help users interpret data (`l2p_flags`)
- A quality level for each measurement (`quality_level`)
- An overall quality level for the L2P data file

In addition there are a number of auxiliary fields (L2Paux) that must be provided before the L2P data product is admitted into the GHRSSST R/GTS:

- `dt_analysis` – the difference between satellite SST measurements and a defined reference climatology of SST
- An estimate of surface wind speed (`wind_speed`)
- An estimate of sea ice fraction (`sea_ice_fraction`)
- An estimate of atmospheric aerosol (as an aerosol dynamic indicator, `aerosol_dyanamic_indicator`)

When an L2P file contains all L2Pcore and L2Paux fields together with full L2P ISO metadata, it will be called a full-L2P file. Best practice dictates that RDACs should add the remaining auxiliary fields (L2Paux) prior to submission at the GDAC. Only full L2P data files should be registered and ingested at the GHRSSST GDAC and LTSRF system. These distinctions will assist in the data management of the GHRSSST GDS 2.0.

Missing L2Paux fields not provided by an RDAC may be added by the GDAC with prior arrangement. In this case data required the L2Paux files will be procured, checked for quality and interpolated or processed according to the GDS 2.0 specification by the GDAC.

Optional experimental fields may be used by RDAC to provide additional information at the data provider's discretion. It may be necessary to use an additional netCDF coordinate variable when including experimental fields.

GDS 2.0 L2P data products are configured as shown in Table 9-1, which can be used to locate appropriate information in this document.

Table 9-1 Summary description of the contents of a GHR SST L2P data file

netCDF File Contents	Description	Units	Section	Required
<b>Global Attributes</b>	A collection of required global attributes describing general characteristics of the file	Various	8.2	Mandatory
<b>Geolocation Data</b>	Information to permit locating data on non-orthogonal grids	RDAC defined	8.4	Mandatory
<code>sea_surface_temperature</code>	SST measurement	K	9.3	Mandatory
<code>sst_dtime</code>	Deviation in time of SST measurement from reference time	sec	9.4	Mandatory
<code>sses_bias</code>	Single Sensor Error Statistic (SSES) bias error	K	9.5	Mandatory
<code>sses_standard_deviation</code>	SSES standard deviation uncertainty	K	9.6	Mandatory
<code>dt_analysis</code>	The difference between input SST and a GHR SST L4 SST analysis from the previous 24 hour period	K	9.7	Mandatory
<code>wind_speed</code>	Closest (in time) 10 m surface wind speed from satellite or analysis	ms <sup>-1</sup>	9.8	Mandatory
<code>wind_speed_dtime_from_sst</code>	Time difference of <code>wind_speed</code> data from input L2 SST measurement	hours	9.9	Mandatory
<code>sources_of_wind_speed</code>	Sources of <code>wind_speed</code> data	code	9.10	Mandatory when multiple sources used
<code>sea_ice_fraction</code>	Closest (in time) sea ice fraction from satellite or analysis	Unit less	9.11	Mandatory
<code>sea_ice_fraction_dtime_from_sst</code>	Time difference of <code>sea_ice_fraction</code> data from input L2 SST measurement specified in hours.  For single sources, simply set a variable attribute <code>sea_ice_fraction:sea_ice_fraction_dtime_from_sst = "difference time in hours"</code> .	hours	9.12	Mandatory when multiple sources used
<code>sources_of_sea_ice_fraction</code>	Sources of <code>sea_ice_fraction</code> data	code	9.13	Mandatory when multiple sources used



<b>aerosol_dynamic_indicator</b>	Atmospheric aerosol indicator	Various	9.14	Mandatory infrared SST data
<b>adi_dtime_from_sst</b>	Time difference between the <b>aerosol_dynamic_indicator</b> value and SST measurement	hours	9.15	Mandatory when <b>aerosol_dynamic_indicator</b> included
<b>sources_of_adi</b>	Source of atmospheric aerosol indicator data	code	9.16	Mandatory when multiple sources used
<b>l2p_flags</b>	Data flag values	code	9.17	Mandatory
<b>quality_level</b>	Overall indication of L2P data quality	code	9.18	Mandatory
<b>satellite_zenith_angle</b>	Calculated satellite zenith angle (measured at the Earth's surface between the satellite and the zenith)	degrees	9.19	Optional
<b>solar_zenith_angle</b>	Calculated solar zenith angle (the angle between the local zenith and the line of sight to the sun, measured at the Earth's surface)	degrees	9.20	Optional
<b>surface_solar_irradiance</b>	Near contemporaneous surface solar irradiance	Wm <sup>-2</sup>	9.21	Optional
<b>ssi_dtime_from_sst</b>	Time difference between the <b>surface_solar_irradiance</b> value and SST measurement	hours	9.22	Mandatory when <b>surface_solar_irradiance</b> included
<b>sources_of_ssi</b>	Sources of <b>surface_solar_irradiance</b> data	code	9.23	Optional
<b>Optional experimental fields defined by RDAC</b>	Optional/experimental data	RDAC defined	9.24	Optional

## 9.2 L2P data record format specification

Table 9-2 provides an overview of the GHRSSST L2P product pixel data record that should be created for each input L2 SST measurement contained within a L2P file. In the following sections, each variable within the L2P data file is described in detail.

**Table 9-2 L2P SST data record content.**

Variable Name (Definition Section, CDL Example)	Description	Units / data type
<b>sea_surface_temperature</b>  (Section 9.3, Table 9-3)	SST measurement values from input L2 satellite data set. L2 SST data are not adjusted in any manner and are identical to the input data set.  Use attribute ' <b>sea_surface_temperature:source</b> = "<code from Section 7.9>" to specify the L2 input product source.	kelvin int

<b>sst_dtime</b>  (Section 9.4, Table 9-5)	Deviation in time of SST measurement from reference time stored in the netCDF global variable <code>time</code> (defined as the start time of granule for L2P). Minimum resolution should be one second.	seconds short
<b>sses_bias</b>  (Section 9.5, Data producers are reminded to choose appropriate <code>scale_factors</code> and <code>add_offsets</code> for their data, and to strive for <code>scale_factors</code> as close to 0.01 as possible without “oversaturating” the values. Table 9-6)	Single Sensor Error Statistic (SSES) bias error estimate generated by data provider  The specific SSES methodology should be described in L2P documentation from the data provider. The GHRSSST ST-VAL TAG will maintain a summary document of all SSES schemes at <a href="http://www.ghrsst.org/STVAL-TAG-SSES-Schemes.html">http://www.ghrsst.org/STVAL-TAG-SSES-Schemes.html</a>	kelvin byte
<b>sses_standard_deviation</b>  (Section 9.6, Table 9-7)	SSES standard deviation uncertainty generated by data provider.  The specific SSES methodology should be described in L2P documentation from the data provider. The GHRSSST ST-VAL TAG will maintain a summary document of all SSES schemes at <a href="http://www.ghrsst.org/STVAL-TAG-SSES-Schemes.html">http://www.ghrsst.org/STVAL-TAG-SSES-Schemes.html</a>	kelvin byte
<b>dt_analysis</b>  (Section 9.7, Table 9-9)	The difference between input SST and a GHRSSST L4 SST analysis from the previous 24 hour period.  The GHRSSST L4 analysis chosen for a given L2P data set variable should be consistent for all L2P products as far as practically possible.  If no L4 analysis is available then an alternative L4 analysis or a reference mean SST climatology may be used.	kelvin byte
<b>wind_speed</b>  (Section 9.8, Table 9-10)	10 m surface wind speed near contemporaneous to the input SST measurement from satellite or analysis.  Wind speed data should be provided at a minimum resolution of $1 \text{ ms}^{-1}$ and data producers shall use <code>scale_factor</code> and <code>add_offset</code> to scale data to an appropriate resolution (higher resolution is better).  The difference in time between SST measurement and <code>wind_speed</code> data shall be recorded in the L2P variable <code>wind_speed_dtime_from_sst</code> . If all the times have the same value, then using an attribute <code>wind_speed:time_offset</code> is sufficient and the variable <code>wind_speed_dtime_from_sst</code> is not required.  If multiple sources of wind speed data are used, the variable <code>sources_of_wind_speed</code> shall be used to indicate their source following the format requirements shown in Section 7.9. In addition, the units of all sources used in the file shall be identical.  If a unique source is used (this is recommended) the attribute <code>wind_speed:source = “&lt; string defined by best practice in Section 7.9&gt;”</code> is considered sufficient.	$\text{ms}^{-1}$ byte

<p><b>wind_speed_dtime_from_sst</b></p> <p>(Section 9.9, Table 9-11)</p>	<p>Time difference of <b>wind_speed</b> data from input L2 SST measurement specified in hours.</p>	<p>Hours byte</p>
<p><b>sources_of_wind_speed</b></p> <p>(Section 9.10, Table 9-12)</p>	<p>When multiple sources of wind speed data are used in the variable <b>wind_speed</b>, the variable <b>sources_of_wind_speed</b> shall be used to record the source of the wind speed data used.</p> <p>If a unique source of wind speed data is used (this is recommended) the variable attribute '<b>wind_speed:source</b> = "&lt;string defined by best practice in Section 7.9&gt;" shall be sufficient and the variable <b>sources_of_wind_speed</b> is not required. &gt;". If the values in that single source all have the same time, then a variable level attribute <b>wind_speed:time_offset</b> = "difference time in hours" are considered sufficient and the variable <b>wind_speed_dtime_from_sst</b> is not required.</p>	<p>Code byte</p>
<p><b>sea_ice_fraction</b></p> <p>(Section 9.11, Table 9-13)</p>	<p>Fractional Sea Ice contamination data. Ranges from 0 to 1. This field is only required if there is actually sea ice in the input L2 data set. Do not provide an array of missing data values.</p> <p>When multiple sources of sea ice fraction data are used in the variable <b>sea_ice_fraction</b>, the variable <b>sources_of_sea_ice_fraction</b> shall be used to record the source of the sea ice fraction data used and the difference in time between SST measurement and <b>sea_ice_fraction</b> data shall be recorded in the variable <b>sea_ice_fraction_dtime_from_sst</b>. In addition, the units of all sources used in the file shall be identical.</p> <p>If a unique source of sea ice fraction data is used (this is recommended), the variable attribute '<b>sea_ice_fraction:source</b> = "&lt;string defined by best practice in Section 7.9&gt;". If the values in that single source all have the same time, then a variable level attribute <b>sea_ice_fraction:time_offset</b> = "difference time in hours" are considered sufficient and the variables <b>sources_of_sea_ice_fraction</b> and <b>sea_ice_fraction_dtime_from_sst</b> are not required.</p> <p>The variable attribute <b>sea_ice_fraction:sea_ice_treatment</b> shall specify how the sea ice information has been treated by the data provider.</p>	<p>Percent byte</p>
<p><b>sea_ice_fraction_dtime_from_sst</b></p> <p>(Section 9.12, Table 9-14)</p>	<p>Time difference of <b>sea_ice_fraction</b> data from input L2 SST measurement specified in hours. This variable is mandatory when multiple sources of <b>sea_ice_fraction</b> are used. If only one source is used, simply set a variable attribute <b>sea_ice_fraction:time_offset</b> = "difference time in hours".</p>	<p>Hours byte</p>

<p><b>sources_of_sea_ice_fraction</b></p> <p>(Section 9.13, Table 9-15)</p>	<p>When multiple sources of sea ice fraction data are used in the variable <b>sea_ice_fraction</b>, the variable <b>sources_of_sea_ice_fraction</b> shall be used to record the source of the sea ice fraction data used.</p> <p>If a unique source of sea ice fraction data is used (this is recommended), the variable attribute '<b>sea_ice_fraction:source</b> = "&lt;string defined by best practice in Section 7.9&gt;" ' is sufficient and the variable <b>sources_of_sea_ice_fraction</b> is not needed.</p>	<p>Code byte</p>
<p><b>aerosol_dynamic_indicator</b></p> <p>(Section 9.14, Table 9-16)</p>	<p>The variable <b>aerosol_dynamic_indicator</b> (ADI) is used to indicate the presence of atmospheric aerosols that may cause errors in the atmospheric correction of infrared satellite data when retrieving SST.</p> <p>The variable <b>aerosol_dynamic_indicator</b> is mandatory only when the input SST data set has been derived from an infrared satellite instrument.</p> <p>The atmospheric aerosol data used to fill the variable <b>aerosol_dynamic_indicator</b> is chosen by the data provider as the most appropriate aerosol indicator for a given input SST data set. (e.g., SDI might be used for MSG SEVIRI, a view difference might be used for AATSR, and aerosol optical depth may be used from a model or another satellite system).</p> <p>When multiple sources of atmospheric aerosol indicator data are used in the variable <b>aerosol_dynamic_indicator</b>, the variable <b>sources_of_adi</b> shall be used to record the source of the aerosol indicator data used. In addition, the units of all sources used in the file shall be identical.</p> <p>If a unique source of atmospheric aerosol indicator data is used (this is recommended), the variable attribute '<b>aerosol_dynamic_indicator:source</b> = "&lt;string defined by best practice in Section 7.9&gt;" ' is sufficient and the variable <b>sources_of_aerosol_dynamic_indicator</b> is not required. If all the times have the same value, then using an attribute <b>aerosol_dynamic_indicator:time_offset</b> is sufficient and the variable <b>adi_dtime_from_sst</b> is not required.</p>	<p>Scaled value byte</p>
<p><b>adi_dtime_from_sst</b></p> <p>(Section 9.15, Table 9-17)</p>	<p>The time difference between the <b>aerosol_dynamic_indicator</b> value and SST measurement recorded in hours.</p>	<p>Hours byte</p>
<p><b>sources_of_adi</b></p> <p>(Section 9.16, Table 9-18)</p>	<p>When multiple sources of atmospheric aerosol indicator data are used in the variable <b>aerosol_dynamic_indicator</b>, the variable <b>sources_of_adi</b> shall be used to record the source of</p>	<p>Code byte</p>

	<p>the aerosol indicator data used.</p> <p>If a unique source of atmospheric aerosol indicator data is used (this is recommended), the variable attribute '<b>aerosol_dynamic_indicator:source</b> = "&lt;string defined by best practice in Section 7.9&gt;" is sufficient and the variable <b>sources_of_adi</b> is not required.</p>																			
<p><b>12p_flags</b> (Section 9.17, Table 9-20)</p>	<p>The variable <b>12p_flags</b> is used to (a) specify the type of input SST data (either infrared or passive microwave instrument derived), (b) pass through native flags from the input L2 SST data set and (c) record any additional information considered important for the user of an L2P data set.</p> <p>The variable <b>12p_flags</b> is split into two sections: the first 6 bits of the L2P variable <b>12p_flags</b> are generic flags that are common to all L2P data files; bits 6-15 are defined by the L2P data provider and are specific to each L2 input data stream.</p> <p>The tables below define the bit field and their meanings. The least significant bit (bit 0) starts on the right.</p> <table border="1" data-bbox="596 943 1206 1211"> <thead> <tr> <th>Bit</th> <th>Common flags</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>1 if passive microwave data 0 if Infrared data</td> </tr> <tr> <td>1</td> <td>Land</td> </tr> <tr> <td>2</td> <td>Ice</td> </tr> <tr> <td>3</td> <td>Lake (if known)</td> </tr> <tr> <td>4</td> <td>River (if known)</td> </tr> <tr> <td>5</td> <td>Spare</td> </tr> </tbody> </table> <table border="1" data-bbox="596 1272 1206 1527"> <thead> <tr> <th>Bit</th> <th>12p_flags definition</th> </tr> </thead> <tbody> <tr> <td>6-15</td> <td>Defined by L2 data provider and described in the <b>flag_meanings</b>, <b>flag_masks</b> and <b>flag_values</b> variable attributes.  Please refer to L2P data provider documentation</td> </tr> </tbody> </table>	Bit	Common flags	0	1 if passive microwave data 0 if Infrared data	1	Land	2	Ice	3	Lake (if known)	4	River (if known)	5	Spare	Bit	12p_flags definition	6-15	Defined by L2 data provider and described in the <b>flag_meanings</b> , <b>flag_masks</b> and <b>flag_values</b> variable attributes.  Please refer to L2P data provider documentation	<p>Flags int</p>
Bit	Common flags																			
0	1 if passive microwave data 0 if Infrared data																			
1	Land																			
2	Ice																			
3	Lake (if known)																			
4	River (if known)																			
5	Spare																			
Bit	12p_flags definition																			
6-15	Defined by L2 data provider and described in the <b>flag_meanings</b> , <b>flag_masks</b> and <b>flag_values</b> variable attributes.  Please refer to L2P data provider documentation																			
<p><b>quality_level</b> (Section 9.18, Table 9-21)</p>	<p>The L2P variable <b>quality_level</b> is used to provide an overall indication of L2P data quality.</p> <p>The L2P variable <b>quality_level</b> will reflect CEOS QA4EO (Quality Indicator) guidelines.</p> <p>An incremental scale from 0 no data, 1 (bad e.g. cloud, rain, to close to land – under no conditions use this data) 2 (worst quality usable data), to 5 (best quality usable data) shall be used.</p>	<p>Code byte</p>																		
<p>Optional/experimental fields defined by data provider (Section 9.24, Table 9-28)</p>	<p>Optional/experimental data</p>	<p>Defined by RDAC</p>																		

### 9.3 Variable sea\_surface\_temperature

The variable 'sea\_surface\_temperature' contains the native unmodified L2 SST of the input data file. The 'sea\_surface\_temperature' variable shall be included in a L2P product with the format requirements shown in Table 9-3.

Table 9-3 CDL example description of sea\_surface\_temperature variable

Storage type definition	Variable name definition	Description	Unit
Short	sea_surface_temperature	Pixel sea surface temperature value	K
<b>Example CDL Description</b>			
<pre>short sea_surface_temperature(time, nj, ni) ;   sea_surface_temperature:long_name = "sea surface skin temperature" ;   sea_surface_temperature:standard_name="sea_surface_skin_temperature" ;   sea_surface_temperature:units = "kelvin" ;   sea_surface_temperature:_FillValue = -32768s ;   sea_surface_temperature:add_offset = 273.15 ;   sea_surface_temperature:scale_factor = 0.01 ;   sea_surface_temperature:valid_min = -200s ;   sea_surface_temperature:valid_max = 5000s ;   sea_surface_temperature:coordinates = "lon lat" ;   sea_surface_temperature:grid_mapping = "polar_stereographic" ;   sea_surface_temperature:comment = "Temperature of the skin of the ocean."   sea_surface_temperature:depth = "10 micrometers"</pre>			
<b>Comments</b>			
The standard_name attribute should be CF-1.4 compliant as described in Table 9-4. More details on standard names for SST are given in Table 7-4.			

Table 9-4 GHRSSST short SST names and CF-1.4 standard names for sea\_surface\_temperature

GHRSSST name	CF-1.4 standard name definitions [AD-4]
SSTint	sea_surface_temperature
SSTskin	sea_surface_skin_temperature
SSTsubskin	sea_surface_subskin_temperature
SSTfnd	sea_surface_foundation_temperature
SSTdepth	sea_water_temperature Note the attribute "depth" should be used to indicate the depth for which the SST data are valid e.g.: <pre>sea_surface_temperature:standard_name="sea_water_temperature";   sea_surface_temperature:units = "kelvin" ;   sea_surface_temperature:depth = "1 metre" ;</pre>

### 9.4 Variable sst\_dtime

The difference in seconds from the reference time, stored in the netCDF coordinate variable time (Section 8). The variable 'sst\_dtime' shall be included with the format requirements shown in Table 9-5. Note that in L2P, the storage type is short, but for L3, the storage type is long.

Table 9-5 CDL example description of sst\_dtime variable

Storage type definition	Variable name definition	Description	Unit
short (long in	sst_dtime	Deviation from reference time stored in	second

L3)		the coordinate variable, <code>time</code> .	
<b>Example CDL Description</b>			
<pre>short sst_dtime (time, nj, ni) ;   sst_dtime:long_name = "time difference from reference time" ;   sst_dtime:units = "seconds" ;   sst_dtime:_FillValue = -32768s ;   sst_dtime:add_offset = 0 ;   sst_dtime:scale_factor = 1 ;   sst_dtime:valid_min = -32767s ;   sst_dtime:valid_max = 32767s ;   sst_dtime:coordinates = "lon lat" ;   sst_dtime:grid_mapping = "polar_stereographic" ;   sst_dtime:comment = "time plus sst_dtime gives seconds after 00:00:00 UTC January 1, 1981"</pre>			
<b>Comments</b>			
Pixel-by-pixel time difference from <code>time</code> variable defined by data provider. Add <code>sst_dtime</code> to reference time stored in variable <code>time</code> to get seconds since 00:00:00 UTC, 01 January 1981.			

## 9.5 Variable `sses_bias`

Providing uncertainty estimates for each SST measurement is one of the key user requirements for GHRSSST L2P SST data products. Uncertainty estimates allow users to select the accuracy level suitable for their application and to make optimum use of the SST observations (e.g. in data assimilation).

The uncertainties associated with each observation in a data stream are provided as Single Sensor Error Statistic (SSES) <http://www.ghrsst.org/SSES-Single-Sensor-Error-Statistics.html>. The SSES are based on understanding the errors associated with the in-flight performance of an individual satellite instrument for the retrieval of SST from the measured radiances. The SSES are provided as a mean bias error and its associated standard deviation.

There are a variety of methods for determining SSES as they depend on the specific characteristics of each satellite instrument. Consequently, the L2P provider can define their own scheme for producing SSES that is tailored to their specific dataset. However, the SSES scheme must conform to a set of agreed SSES common principles.

The SSES common principles are maintained on the GHRSSST website at <http://www.ghrsst.org/SSES-Common-Principles.html>, and have been approved by the GHRSSST Science Team. The L2P provider must provide documentation that summarizes the theoretical basis of their SSES scheme, its implementation, any recommendations for users, and its conformance to the agreed SSES common principles. The SSES documentation will be maintained through the GHRSSST website at <http://www.ghrsst.org/SSES-Description-of-schemes.html>.

The variable '`sses_bias`' is used to store SSES bias estimates and shall be included with the L2P format requirements shown in Data producers are reminded to choose appropriate `scale_factors` and `add_offsets` for their data, and to strive for `scale_factors` as close to 0.01 as possible without "oversaturating" the values.

Table 9-6. Data producers are reminded to choose appropriate `scale_factors` and `add_offsets` for their data, and to strive for `scale_factors` as close to 0.01 as possible without "oversaturating" the values.

**Table 9-6 CDL example description of `sses_bias` variable**

Storage type definition	Variable name definition	Description	Unit
byte	<code>sses_bias</code>	SSES bias estimate	K
<b>Example CDL Description</b>			
<pre>byte sses_bias (time, nj, ni) ;   sses_bias:long_name = "SSES bias estimate" ;</pre>			



```

sses_bias:units = "kelvin" ;
sses_bias:_FillValue = -128b ;
sses_bias:add_offset = 0. ;
sses_bias:scale_factor = 0.02 ;
sses_bias:valid_min = -127b ;
sses_bias:valid_max = 127b ;
sses_bias:coordinates = "lon lat" ;
sses_bias:grid_mapping = "polar_stereographic" ;
sses_bias:comment = "Bias estimate derived using the techniques
described at http://www.ghrsst.org/SSES-Description-of-schemes.html"

```

**Comments**

SSES bias values are derived by the data provider according to a documented methodology. Please consult the data provider L2P documentation for details. A summary of all SSES schemes is provided at <http://www.ghrsst.org/SSES-Description-of-schemes.html>.

## 9.6 Variable `sses_standard_deviation`

SSES standard deviation estimates are generated by the L2P data provider and are specific to a particular satellite instrument, and must conform to the SSES common principles. The SSES common principles are maintained on the GHRSSST website at <http://www.ghrsst.org/SSES-Common-Principles.html>, and have been approved by the GHRSSST Science Team. The L2P provider must provide documentation that summarises the theoretical basis of their SSES scheme, its implementation, any recommendations for users, and its conformance to the agreed SSES common principles. The SSES documentation will be maintained through the GHRSSST website at <http://www.ghrsst.org/SSES-Description-of-schemes.html>.

The variable '`sses_standard_deviation`' shall be included with the format requirements shown in Table 9-7. Data producers are reminded to choose appropriate `scale_factors` and `add_offsets` for their data, and to strive for `scale_factors` as close to 0.01 as possible without "oversaturating" the values.

**Table 9-7 CDL example description of `sses_standard_deviation` variable**

Storage type definition	Variable name definition	Definition description	Unit
byte	<code>sses_standard_deviation</code>	SSES standard deviation.	K
<b>Example CDL Description</b>			
<pre> byte sses_standard_deviation (time, nj, ni) ;   sses_standard_deviation:long_name = "SSES standard deviation" ;   sses_standard_deviation:units = "kelvin" ;   sses_standard_deviation:_FillValue = -128b ;   sses_standard_deviation:add_offset = 2.54. ;   sses_standard_deviation:scale_factor = 0.02 ;   sses_standard_deviation:valid_min = -127b ;   sses_standard_deviation:valid_max = 127b ;   sses_standard_deviation:coordinates = "lon lat" ;   sses_standard_deviation:grid_mapping = "polar_stereographic" ;   sses_bias:comment = "Standard deviation estimate derived using the techniques described at <a href="http://www.ghrsst.org/SSES-Description-of-schemes.html">http://www.ghrsst.org/SSES-Description-of-schemes.html</a>" </pre>			
<b>Comments</b>			
<p>SSES standard deviation values are derived by the data provider according to a documented methodology. Please consult the data provider L2P documentation for details. A summary of all SSES schemes is provided at <a href="http://www.ghrsst.org/SSES-Description-of-schemes.html">http://www.ghrsst.org/SSES-Description-of-schemes.html</a></p>			

## 9.7 Variable `dt_analysis`

The L2P variable `dt_analysis` is the temperature difference between an input L2 SST measurement and a reference SST L4 analysis data set. `dt_analysis` may be used to indicate potential areas of diurnal variability or gross outliers in the L2 input SST measurement data set by



looking for large deviations from the previous analysis SST data. Note that **dt\_analysis** is an indicator field and the temperature anomalies may be difficult to interpret in regions of high SST gradients. Furthermore, interpretation requires a good understanding of the strengths and weaknesses (e.g. space and time de-correlations) of the chosen reference L4 analysis system.

The GDS 2.0 specifies the following:

**dt\_analysis** shall be derived using:

$$\text{(Equation 9-1)} \quad dt\_analysis = SST_{input} - L4_{SST}$$

Where  $SST_{input}$  is the input satellite L2 measurement and  $L4_{SST}$  is a previous day analysis from a GHRSSST L4 System selected by the data provider as defined in Table 7-7 or Table 7-8. If a previous analysis  $SST_{fnd}$  data file is not available for use in (Equation 9-1, then a mean reference SST or climatology should be used in its place as defined in Table 9-8.

The **dt\_analysis** value shall be inserted into the **dt\_analysis** field of the L2P product for the pixel in question as described in Table 9-9.

**Table 9-8 Reference SST data sets for use in dt\_analysis computation**

Name	Description	Reference
Use code from Table 7-7	The mean SSTfnd computed for a n- day period. This product is computed from data provider SSTfnd data products in real time each day	Table 7-7
GMPE_GLOBAL	Daily, 25 km median average SST and sea ice product created using 10 operational SST analysis products from operational centres around the world	Table 7-8
OI.v2: Reynolds Optimal Interpolated SST analysis v2	OI.v2 is a SST analysis produced by a blend of AVHRR and in situ data (ship and buoy). The analysis is produced operational weekly on a one-degree spatial grid.	[RD-10]
Pathfinder monthly SST climatology (Erosion filter version)	9.28km resolution monthly Pathfinder + Erosion Sea Surface Temperature climatology. 1985-1997	[RD-16]

Table 9-9 CDL example description of dt\_analysis variable

Storage type definition	Variable name definition	Description	Unit
byte	dt_analysis	Deviation from previous day (T-1) L4 SSTfnd analysis as defined in Table 9-8  If no analysis is available, the reference mean SST climatology should be used as defined in Table 9-8	K
<b>Example CDL Description</b>			
<pre> byte dt_analysis (time, nj, ni) ;   dt_analysis:long_name = "Deviation from last SST analysis" ;   dt_analysis:units = "kelvin" ;   dt_analysis:_FillValue = -128b ;   dt_analysis:add_offset = 0. ;   dt_analysis:scale_factor = 0.1 ;   dt_analysis:valid_min = -127b ;   dt_analysis:valid_max = 127b ;   dt_analysis:coordinates = "lon lat" ;   dt_analysis:grid_mapping = "polar_stereographic" ;   dt_analysis:reference = "OSTIA" ;   dt_analysis:comment = "The difference between this SST and the previous day's SST." </pre>			
<b>Comments</b>			
The <b>reference</b> variable attribute should be used to specify the analysis or climatology used to compute dt_analysis as shown in the example above following the guidelines in Table 9-8 and 7.9.			

## 9.8 Variable `wind_speed`

The L2P variable `wind_speed` contains a best estimate of the **10m surface wind speed, ideally at the time of SST data acquisition** (although this is rarely possible). Wind speed measurements are required within the GDS as an indicator of the turbulent state of the air sea interface to interpret the relationship between satellite and subsurface SST data and assess the severity of any skin SST temperature deviation, thermal stratification and for use in diurnal variability adjustment schemes. At low wind speeds, especially in clear sky conditions, stronger diurnal variability is expected leading to higher surface layer temperature gradients and the potential for significant de-coupling of the skin/sub-skin SST from the SST at depth.

Ideally a near contemporaneous wind speed measurement from satellite sensors should be used but this is impossible for all sensors due to the limited number of satellite wind speed sensors available. As a surrogate for a measured wind speed value, analysis product estimates (e.g., from numerical weather prediction models) may be used as an indication of the surface wind speed. The GDS specifies the following rules:

A 10m surface wind speed value assigned to each SST measurement pixel using the variable '`wind_speed`'. The following criteria shall apply:

Simultaneous microwave 10m wind speed measurements obtained from the same instrument providing the SST measurement shall be used when available to set the L2P confidence data variable `wind_speed`.

In the absence of a simultaneous surface wind speed measurement, an analysis product estimated 10m surface wind speed shall be used to set the L2P variable `wind_speed`.

The difference in time expressed in hours between the time of SST measurement and the time of wind speed data should be entered into the L2P confidence data variable `wind_speed_dtime_from_sst` as described in Section 9.9. In the case of an analysis field, this should be the central (mean) time of an integrated value. If all of the wind speeds have a single time value, as in the case of an analysis or model that gives the wind speeds at an instant in time, then the `wind_speed_dtime_from_sst` variable is not needed and instead a variable level attribute named `time_offset` is used. The attribute `time_offset` should store the difference in hours between the `wind_speed` and the reference time, stored in the variable `time`.

If a single source of data is used in the L2P variable `wind_speed`, the L2P variable `sources_of_wind_speed` is not required and the `wind_speed:source` attribute value is sufficient. In that case, it shall be a single source text string defined by the data provider using the text string naming best practice given in Section 7.9.

If multiple sources of data are used, source information should be indicated in the L2P variable `sources_of_wind_speed` as defined by the data provider and as described in detail in Section 9.10, and the `wind_speed:source` attribute shall have the value "`sources_of_wind_speed`". In addition, the units of all sources used in the file shall be identical.

The GDS L2P variable `wind_speed` shall be included in GDS 2.0 L2P products with the format requirements shown in Table 9-10.

Table 9-10 CDL example description of `wind_speed` variable

Storage type definition	Variable name definition	Description	Unit
byte	<code>wind_speed</code>	Surface wind speed at 10m height. Resolution should be no less than 1 ms <sup>-1</sup>	m s <sup>-1</sup>
<b>Example CDL Description</b>			
<pre>byte wind_speed (time, nj, ni);   wind_speed:long_name = "10m wind speed" ;   wind_speed:standard_name = "wind_speed" ;   wind_speed:units = "m s-1" ;   wind_speed:height = "10 m" ;   wind_speed:_FillValue = -128b ;   wind_speed:add_offset = 0. ;   wind_speed:scale_factor = 1. ;   wind_speed:valid_min = -127b ;   wind_speed:valid_max = 127b ;   wind_speed:time_offset = 2. ;   wind_speed:coordinates = "lon lat" ;   wind_speed:grid_mapping = "polar_stereographic" ;   wind_speed:source = "ECMWF_Analysis_V2" ;   wind_speed:comment = "These wind speeds were created by the ECMWF and represent winds at 10 metres above the sea surface."</pre>			
<b>Comments</b>			
<p>A single source of wind data is shown in this example which is reported as <code>wind_speed:source = "ECMWF_Analysis_V2"</code> the code has been defined by the data provider using the ancillary data naming rules given in Section 7.9. Since all of the wind speeds have the same time, the attribute <code>time_offset</code> is used instead of the variable <code>wind_speed_dtime_from_sst</code>.</p>			

## 9.9 Variable `wind_speed_dtime_from_sst`

The variable `wind_speed_dtime_from_sst` reports the time difference between wind speed data and SST measurement in hours. The variable '`wind_speed_dtime_from_sst`' shall be included with the format requirements shown in Table 9-11. In the case of an analysis field, the central (mean) time of an integrated value should be used. If all of the values are the same, this variable is not required. Instead, use the variable level attribute named `time_offset` with the variable `wind_speed`.

Table 9-11 CDL example description of `wind_speed_dtime_from_sst` variable

Storage type definition	Variable name definition	Description	Unit
byte	<code>wind_speed_dtime_from_sst</code>	This variable reports the time difference of wind speed measurement from SST measurement in hours.	hour
<b>Example CDL Description</b>			
<pre>byte wind_speed_dtime_from_sst (time, nj, ni) ;   wind_speed_dtime_from_sst:long_name = "time difference of wind speed measurement from sst measurement" ;   wind_speed_dtime_from_sst:units = "hour" ;   wind_speed_dtime_from_sst: FillValue = -128b ;   wind_speed_dtime_from_sst:add_offset = 0. ;   wind_speed_dtime_from_sst:scale_factor = 0.1 ;   wind_speed_dtime_from_sst:valid_min = -127b ;   wind_speed_dtime_from_sst:valid_max = 127b ;   wind_speed_dtime_from_sst:coordinates = "lon lat" ;   wind_speed_dtime_from_sst:grid_mapping = "polar_stereographic" ;   wind_speed+dtme_from_sst:comment = "The hours between the wind speed measurement and the SST observation"</pre>			
<b>Comment</b>			

## 9.10 Variable `sources_of_wind_speed`

The source of data used to set the L2P ancillary data variable `wind_speed` shall be indicated in the L2P variable `sources_of_wind_speed` when more than one source of wind speed data is used in the L2P product. When only one source is used, this variable is not needed and the appropriate text string indicating the source is placed in the `source` attribute of the `wind_speed` variable. For multiple sources, the GDS 2.0 requires the following:

The variable in question should contain an attribute called `flag_meanings` and another one called `flag_values`. The `flag_values` attribute shall contain a comma-separated list of the numeric codes for the sources of data used whose order matches the comma-separated text strings in the `flag_meanings` attribute.

These text strings and numeric codes do not need to be unique across different data sets or even ancillary variables, but must be consistent within a given variable and clearly specified within each netCDF variable and its attributes. A best practice for naming the text strings is provided in Section 7.9.

The variable '`sources_of_wind_speed`' shall conform to the format requirements shown in Table 9-12.

Table 9-12 CDL example description of `sources_of_wind_speed` variable

Storage type definition	Variable name definition	Description	Unit
byte	<code>sources_of_wind_speed</code>	Sources of <code>wind_speed</code> values	none
<b>Example CDL Description</b>			
<pre>byte sources_of_wind_speed (time, nj, ni) ;   sources_of_wind_speed:long_name = "sources of wind speed" ;   sources_of_wind_speed:coordinates = "lon lat" ;   sources_of_wind_speed:grid_mapping = "polar_stereographic" ;   sources_of_wind_speed:flag_meanings = "WSP-ESA-ASCAT-V2 WSP-NCEP- Analysis-V3 WSP-ECMWF-Forecast-V6" ;   sources_of_wind_speed:flag_values = 0b, 1b, 2b ;   sources_of_wind_speed:valid_min = 0b;</pre>			

<pre>sources_of_wind_speed:valid_max = 2b; sources_of_wind_speed:comment = "This variable provides a pixel by pixel description of where the wind speeds were derived from." sources_of_wind_speed: FillValue=-128b;</pre>
<b>Comments</b>
In this example, <b>flag_meanings</b> and <b>flag_values</b> contain strings and numeric codes provided by the data provider according to the best practices specified in Section 7.9.

## 9.11 Variable `sea_ice_fraction`

Some SST data are contaminated in part or wholly by sea ice and the L2P variable `sea_ice_fraction` is used to quantify the fraction of an area contaminated with sea ice. Some input SST data streams provide a flag to indicate that the SST measurement is contaminated by sea ice (e.g., AMSR-E). The GDS 2.0 specifies the following rules:

If an input data set pixel fractional sea ice estimate exists, this should be used to in the L2P variable `sea_ice_fraction` as described Table 9-13.

Best practice suggests that one should approach the issue in the following way. If an input data set pixel sea ice flag does not exist, and the pixel is located in or close to a region that may be ice contaminated, a reference sea ice data set defined should be used to determine the value of the L2P confidence flag `sea_ice_fraction`.

If an input data set pixel sea ice **flag** exists (i.e. indicating sea ice but not the fractional amount of coverage), this should be used to set the L2P variable `sea_ice_fraction` to 1.

If the SST input data set includes a sea ice flag in the data stream, bit 3 of the L2P confidence data variable `l2p_flag` should be set for this pixel as described in Section 9.17.

The difference in time expressed in hours between the time of SST measurement and the time of sea ice fraction measurement should be entered into the L2P variable `sea_ice_fraction_dtime_from_sst` as described in Section 9.12. In the case of an analysis field, this should be the central (mean) time of an integrated value. . If all of the ice observations have a single time value, as in the case of an analysis or model that gives the sea ice values at an instant in time, then the `sea_ice_fraction_dtime_from_sst` variable is not needed and instead a variable level attribute named `time_offset` is used. The attribute `time_offset` should store the difference in hours between the `sea_ice_fraction` and the reference time, stored in the variable `time`.

If a single source of data is used in the L2P variable `sea_ice_fraction`, the L2P variable `sources_of_sea_ice_fraction` is not required and instead the `sea_ice_fraction:source` attribute value is sufficient. It shall be a single source text string defined by the data provider using the text string naming best practice given in Section 7.9.

If multiple sources of data are used, source information should be indicated in the L2P variable `sources_of_sea_ice_fraction` as defined by the data provider and as described in detail in Section 9.13, and the `sea_ice_fraction:source` attribute shall have the value "`sources_of_sea_ice_fraction`". In addition, the units of all sources used in the file shall be identical.

The variable attribute `sea_ice_fraction:sea_ice_treatment` shall specify how the sea ice information has been treated by the data provider. Valid options are: "Use unmodified (one source)", "use unmodified (multiple ice sources)", or "modified using onboard sensors"

The variable `sea_ice_fraction` will be included with the format requirements shown in Table 9-13.

**Table 9-13 CDL example description of `sea_ice_fraction` variable**

Storage type definition	Variable name definition	Description	Unit
byte	<code>sea_ice_fraction</code>	fractional of sea ice contamination in a given pixel. Ranges from 0 to 1.	Unit less
<b>Example CDL Description</b>			
<pre>byte sea_ice_fraction(time, nj, ni) ;   sea_ice_fraction:long_name = "sea ice fraction" ;   sea_ice_fraction:standard_name = "sea_ice_area_fraction" ;   sea_ice_fraction:units = "" ;   sea_ice_fraction:FillValue = -128b ;   sea_ice_fraction:add_offset = 0. ;   sea_ice_fraction:scale_factor = 0.01 ;   sea_ice_fraction:valid_min = 0b ;   sea_ice_fraction:valid_max = 100b ;   sea_ice_fraction:time_offset = 2. ;   sea_ice_fraction:coordinates = "lon lat" ;   sea_ice_fraction:grid_mapping = "polar_stereographic" ;   sea_ice_fraction:source = "REMSS_AMSRE_V5" ;   sea_ice_fraction:sea_ice_treatment = " Use unmodified (one source) " ;   sea_ice_fraction:comment = "Fractional sea ice cover from Remote Sensing Systems V5 AMSRE ice product"</pre>			
<b>Comments</b>			
<p>A single source of sea ice fraction data is shown in this example which is reported as <code>sea_ice_fraction:source = "REMSS_AMSRE_V5"</code> following the ancillary data naming conventions specified in Section 7.9. Since all of ice values have the same time, the attribute <code>time_offset</code> is used instead of the variable <code>sea_ice_fraction_dtime_from_sst</code>.</p>			

## 9.12 Variable `sea_ice_fraction_dtime_from_sst`

The variable `sea_ice_fraction_dtime_from_sst` reports the time difference between sea ice fraction data from SST measurement in hours. The variable `sea_ice_fraction_dtime_from_sst` shall be included with the format requirements shown in Table 9-14. In the case of an analysis field, this should be the central (mean) time of an integrated value. If all of the values are the same, this variable is not required. Instead, use the variable level attribute named `time_offset` with the variable `sea_ice_fraction`. The attribute `time_offset` should store the difference in hours between the `sea_ice_fraction` and the reference time, stored in the variable `time`.

**Table 9-14. CDL example description of `sea_ice_fraction_dtime_from_sst` variable**

Storage type definition	Variable name definition	Description	Unit
byte	<code>sea_ice_fraction_dtime_from_sst</code>	This variable reports the time difference between sea ice fraction data from SST measurement in hours.	hour
<b>Example CDL Description</b>			
<pre>byte sea_ice_fraction_dtime_from_sst (time, nj, ni) ;   sea_ice_fraction_dtime_from_sst :long_name = "time difference of sea ice fraction measurement from sst measurement" ;   sea_ice_fraction_dtime_from_sst:units = "hour" ;   sea_ice_fraction_dtime_from_sst:FillValue = -128b ;   sea_ice_fraction_dtime_from_sst:add_offset = 0. ;</pre>			

```

sea_ice_fraction_dtime_from_sst:scale_factor = 0.1 ;
sea_ice_fraction_dtime_from_sst:valid_min = -127b ;
sea_ice_fraction_dtime_from_sst:valid_max = 127b ;
sea_ice_fraction_dtime_from_sst:coordinates = "lon lat" ;
sea_ice_fraction_dtime_from_sst:grid_mapping = "polar_stereographic" ;
sea_ice_fraction_dtime_from_sst:comment = "The time difference in
hours is estimated from the SST and sea ice data sets"
    
```

**Comment**

This variable is mandatory when multiple sources of sea\_ice\_fraction are used. If only one source is used, instead simply set a variable attribute  
 sea\_ice\_fraction:sea\_ice\_fraction\_dtime\_from\_sst = "difference time in hours".

### 9.13 Variable sources\_of\_sea\_ice\_fraction

The source of data used to set the L2P ancillary data variable **sea\_ice\_fraction** shall be indicated in the L2P variable **sources\_of\_sea\_ice\_fraction** when more than one source of sea ice fraction data is used in the L2P product. When only one source is used, this variable is not needed and the appropriate text string indicating the source is placed in the **source** attribute of the **sea\_ice\_fraction** variable. For multiple sources, the GDS 2.0 requires the following:

The variable in question should contain an attribute called **flag\_meanings** and another one called **flag\_values**. The **flag\_values** attribute shall contain a comma-separated list of the numeric codes for the sources of data used whose order matches the comma-separated text strings in the **flag\_meanings** attribute.

These text strings and numeric codes do not need to be unique across different data sets or even ancillary variables, but must be consistent within a given variable and clearly specified within each netCDF variable and its attributes. A best practice for naming the text strings is provided in Section 7.9.

The variable 'sources\_of\_sea\_ice\_fraction' shall conform to the format requirements shown in Table 9-15.

**Table 9-15 CDL example description of sources\_of\_sea\_ice\_fraction variable**

Storage type definition	Variable name	Description	Unit
byte	sources_of_sea_ice_fraction	Source(s) of sea ice values	none
<b>Example CDL Description</b>			
<pre> byte sources_of_sea_ice_fraction(time, nj, ni) ; sources_of_sea_ice_fraction:long_name = "sources of sea ice fraction"; sources_of_sea_ice_fraction:coordinates = "lon lat" ; sources_of_sea_ice_fraction:grid_mapping = "polar_stereographic" ; sources_of_sea_ice_fraction:flag_meanings = "ICE-NSIDC-AMSRE-V3 ICE-ECMWF-Forecast-V3" ; sources_of_sea_ice_fraction:flag_values = 0b, 1b ; sources_of_sea_ice_fraction:valid_min = 0b; sources_of_sea_ice_fraction:valid_max = 1b; sources_of_sea_ice_fraction:comment = "This variable provides a pixel by pixel description of where sea ice fraction were derived from." ; sources_of_sea_ice_fraction: FillValue=-128b;                     </pre>			
<b>Comments</b>			
In this example, <b>flag_meanings</b> and <b>flag_values</b> contain strings and numeric codes provided by the data provider according to the best practices specified in Section 7.9.			



## 9.14 Variable `aerosol_dynamic_indicator`

The L2P variable `aerosol_dynamic_indicator` contains an indicator of potential atmospheric aerosol contamination of infrared satellite SST data. Infrared-absorbing atmospheric aerosols are a major source of error in satellite-derived sea surface temperature retrievals. Atmospheric aerosol, such as Saharan dust outbreaks, volcanic eruptions or from coastal mega cities causes errors in the atmospheric correction of top of the atmosphere radiances when retrieving SST from infrared and visible band data sets. A systematic bias in the tropical North Atlantic Ocean and Arabian Sea due to desert dust outflows in those regions is apparent. The GDS requires the following:

An aerosol indicator (e.g., derived from satellite measurements or models) value is assigned to the L2P variable '`aerosol_dynamic_indicator`' for each corresponding infrared retrieved SST measurement pixel using data chosen by the data provider to indicate aerosol contamination. The aerosol indicator data nearest in space and time to the input pixel SST value should be used.

In the case of microwave SST measurements there is no requirement to include the `aerosol_dynamic_indicator` L2P variable as MW SST retrievals are not affected by atmospheric aerosols. However, MW SST data providers may include `aerosol_dynamic_indicator` in an L2P product.

If a single source of data is used in the L2P variable `aerosol_dynamic_indicator`, the L2P variable `sources_of_adi` is not required and instead the `aerosol_dynamic_indicator:source` attribute value is sufficient. It shall be a single source text string defined by the data provider using the text string naming best practice given in Section 7.9. If all the times have the same value, then using an attribute `aerosol_dynamic_indicator:time_offset` is sufficient and the variable `adi_dtime_from_sst` is not required.

If multiple sources of ADI information are used then, the `aerosol_dynamic_indicator:source` attribute shall have the value "`sources_of_adi`". In addition, the units of all sources used in the file shall be identical.

The difference in time expressed in hours between the time of SST measurement and the time of aerosol indicator data should be entered into the L2P variable `adi_dtime_from_sst` as described in Section 9.15. In the case of an analysis field, this should be the central (mean) time of an integrated value.

If the variable '`aerosol_dynamic_indicator`' is provided in an L2P product, it shall be included with the format requirements shown in Table 9-16.

**Table 9-16 CDL example description of `aerosol_dynamic_indicator` variable**

Storage type definition	Variable name definition	Description	Unit
byte	<code>aerosol_dynamic_indicator</code>	Indicator of potential aerosol contamination of infrared satellite data	Provider defined
<b>Example CDL description</b>			
<pre>byte aerosol_dynamic_indicator (time, nj, ni) ;   aerosol_dynamic_indicator:long_name = "aerosol dynamic indicator" ;   aerosol_dynamic_indicator:units = " " ;   aerosol_dynamic_indicator:_FillValue = -128b ;   aerosol_dynamic_indicator:add_offset = 0. ;   aerosol_dynamic_indicator:scale_factor = 1. ;   aerosol_dynamic_indicator:valid_min = -127b ;   aerosol_dynamic_indicator:valid_max = 127b ;   aerosol_dynamic_indicator:time_offset = 2. ;</pre>			

```

aerosol_dynamic_indicator:coordinates = "lon lat" ;
aerosol_dynamic_indicator:grid_mapping = "polar_stereographic" ;
aerosol_dynamic_indicator:source = "NAVO_SDI_V2" ;
aerosol_dynamic_indicator: comment = "Estimate of the potential for
aerosol contamination based on the NAVO SDI_V2 product. The units are in
counts, but this is not a valid UDUNITS so the attribute units is set to a
single space."

```

**Comment**

A single source of `aerosol_dynamic_indicator` has been used in this example indicated using the `aerosol_dynamic_indicator:source` and are defined by the data provider using the ancillary data naming best practice given in Section 7.9. Since all of the values have the same time, the attribute `time_offset` is used instead of the variable `aerosol_sst_dtime_from_sst`.

## 9.15 Variable `adi_dtime_from_sst`

The variable `adi_dtime_from_sst` reports the time difference between aerosol indicator data from input L2 SST measurement in hours. The variable '`adi_dtime_from_sst`' shall be included in L2P products with the format requirements shown in Table 9-17. In the case of an analysis field, this should be the central (mean) time of an integrated value. If all of the values are the same, this variable is not required. Instead, use the variable level attribute named `time_offset` with the variable `aerosol_dynamic_indicator`.

Table 9-17 CDL example description of `adi_dtime_from_sst` variable

Storage type definition	Variable name definition	Description	Unit
byte	<code>adi_dtime_from_sst</code>	Time difference of aerosol dynamic indicator data from SST measurement in hours.	hour
<b>Example CDL description</b>			
<pre> byte adi_dtime_from_sst(time, nj, ni) ;   adi_dtime_from_sst:long_name = "time difference of ADI data from sst measurement" ;   adi_dtime_from_sst:units = "hour" ;   adi_dtime_from_sst:_FillValue = -128b ;   adi_dtime_from_sst:add_offset = 0. ;   adi_dtime_from_sst:scale_factor = 0.1 ;   adi_dtime_from_sst:valid_min = -127b ;   adi_dtime_from_sst:valid_max = 127b ;   adi_dtime_from_sst:coordinates = "lon lat" ;   adi_dtime_from_sst:grid_mapping = "polar_stereographic" ;   adi_dtime_from_sst:comment = "Difference in hours between the ADI and SST data" </pre>			
<b>Comments</b>			

## 9.16 Variable `sources_of_adi`

The source of data used to set the L2P ancillary data variable `aerosol_dynamic_indicator` shall be indicated in the L2P variable `sources_of_adi` when more than one source of SSI data is used in the L2P product. When only one source is used, this variable is not needed and the appropriate text string indicating the source is placed in the `sources` attribute of the `aerosol_dynamic_indicator` variable. For multiple sources, the GDS 2.0 requires the following:

The variable in question should contain an attribute called `flag_meanings` and another one called `flag_values`. The `flag_values` attribute shall contain a comma-separated list of

the numeric codes for the sources of data used whose order matches the comma-separated text strings in the `flag_meanings` attribute.

These text strings and numeric codes do not need to be unique across different data sets or even ancillary variables, but must be consistent within a given variable and clearly specified within each netCDF variable and its attributes. A best practice for naming the text strings is provided in Section 7.9.

The variable '`sources_of_adi`' shall conform to the with the format requirements shown in Table 9-18.

**Table 9-18 CDL example description of `sources_of_adi` variable**

Storage type definition	Variable name definition	Description	Unit
byte	<code>sources_of_adi</code>	Sources of aerosol dynamic indicator values	none
<b>Example CDL Description</b>			
<pre>byte sources_of_adi(time, nj, ni) ;   sources_of_adi:long_name = "sources of aerosol optical depth" ;   sources_of_adi:coordinates = "lon lat" ;   sources_of_adi:grid_mapping = "polar_stereographic" ;   sources_of_adi:flag_meanings = "no_data ADI-NAVO-SDI-V2" ;   sources_of_adi:flag_values = 0b, 1b ;   sources_of_adi:valid_min = 0b;   sources_of_adi:valid_max = 1b;   sources_of_adi:comment = "This variable provides a pixel by pixel description of where aerosol optical depth were derived from." ;   sources_of_adi:_FillValue=-128b;</pre>			
<b>Comments</b>			
In this example, <code>flag_meanings</code> and <code>flag_values</code> contain strings and numeric codes provided by the data provider according to the best practices specified in Section 7.9.			

### 9.17 Variable `12p_flags`

The GDS 2.0 L2P variable `12p_flags` is used to

- Specify the type of input SST data (either infrared or passive microwave instrument derived),
- Pass through native flags from the input L2 SST data set and
- Record any additional information considered important for the user of an L2P data set.

The variable `12p_flags` is split into two sections:

- The first 6 bits of the L2P variable `12p_flags` are generic flags that are common to all L2P data files as defined in Table 9-19,
- Bits 6-15 are defined by the L2P data provider and are specific to each L2 input data stream.

**Table 9-19 Bit field definitions for the L2P variable `l2p_flags`**

Bit	Common flags
0	0 if infrared data 1 if passive microwave data
1	0 if over the ocean 1 if over land
2	Set if pixel is over ice
3	Set if pixel is over a lake (if known)
4	Set if pixel is over a river (if known)
5	Reserved for future use
6-15	Defined by L2 data provider

The least significant bit (bit 0) starts on the right. The GDS 2.0 requires the following:

The L2P variable `l2p_flags` may hold a combination of Boolean (single bit) and enumerated codes.

The meaning of each Boolean and enumerated code in the L2P variable `l2p_flags` shall be detailed in its `flag_meanings`, `flag_masks` and `flag_values` attributes.

The `flag_meanings` attribute shall contain a space-separated list of descriptions for each distinct flag value. For descriptions containing multiple words, the words shall be linked by underscores.

The `flag_masks` attribute shall contain a comma-separated list of mask values that isolate the bit or bits that encode each flag value, whose order matches that of the `flag_meanings` values.

The `flag_values` attribute shall contain a comma-separated list of masked flag values, whose order matches that of the `flag_meanings` values.

Bit 0 of the L2P `l2p_flags` is used to record if an input pixel SST is derived from an infrared satellite sensor or a passive microwave sensor. The GDS 2.0 specifies the following:

If an input pixel is derived from an infrared sensor, bit 0 of the L2P `l2p_flags` variable should be set to 0.

If an input pixel is derived from a passive microwave sensor, bit 0 of the L2P `l2p_flags` variable should be set to 1.

Bit 1 of the L2P `l2p_flags` variable is used to record if an input pixel is over land or ocean surfaces. The GDS specifies the following:

If an input pixel is classified as over ocean bit 1 of the L2P `l2p_flags` variable should be set to equal 0.

If an input pixel is classified as land covered bit 1 of the L2P `l2p_flags` variable should be set to equal 1.

Bit 2 of the L2P `l2p_flags` variable is used to record if an input pixel records ice contamination. The GDS specifies the following rules:

If an input pixel is classified as ice contaminated bit 2 of the L2P `l2p_flags` variable should be set to 1 otherwise bit 2 of the L2P `l2p_flags` variable should be set to 0.

Bit 3 of the L2P `l2p_flags` variable is used to record if an input pixel contains any part of a lake, as defined by the GHRSSST definition of lakes (mask). The GDS specifies the following:

If an input pixel contains any part of a lake, as defined by the GHRSSST definition of lakes (mask), bit 3 of the L2P `l2p_flags` variable should be set to 1 otherwise bit 3 of the L2P `l2p_flags` variable should be set to 0.

Bit 4 of the L2P `l2p_flags` variable is optionally used to record if an input pixel contains any part of a river, as defined by the GHRSSST definition of rivers (mask). The GDS specifies the following:

If an input pixel contains any part of a river, as defined by the GHRSSST definition of rivers (mask), bit 4 of the L2P `l2p_flags` variable should be set to 1 otherwise bit 4 of the L2P `l2p_flags` variable should be set to 0.

Flags or other information provided with the input L2 SST data should be defined and assigned to the `l2p_flags` variable using bits 6-15 of the L2P variable `l2p_flags`. It is recommended to use single bits for any information, no combination of multiple bits. If that is not possible, then an additional experimental byte field should be used instead. Definitions for bits 6-15, if used, should be given using the variable comment attribute.

The L2P variable '`l2p_flags`' shall be included in GDS 2.0 L2P data files with the format requirements shown in Table 9-20.

**Table 9-20 CDL example description of `l2p_flags` variable**

Storage type definition	Variable name definition	Description	Unit
short	<code>l2p_flags</code>	The variable <code>l2p_flags</code> is used to  (a) specify the type of input SST data (either infrared or passive microwave instrument derived), (b) pass through native flags from the input L2 SST data set and (c) record any additional information considered important for the user of an L2P data set.	Bit field
<b>Example CDL Description</b>			
<pre>short l2p_flags(time, nj, ni) ;   l2p_flags:long_name = "L2P flags" ;   l2p_flags:coordinates = "lon lat" ;   l2p_flags:grid_mapping = "polar_stereographic" ;   l2p_flags:flag_meanings = "microwave land ice lake river sun_glint SST_algorithm_A SST_algorithm_B SST_algorithm_C SST_algorithm_D";   l2p_flags:flag_masks = 1, 2, 4, 8, 16, 32, 64, 128, 256, 512 ;   l2p_flags:comment = "These flags are important to properly use the data"</pre>			
<b>Comments</b>			
<p>The meaning of each bit of the L2P variable <code>l2p_flags</code> shall be detailed in its <code>flag_meanings</code>, <code>flag_masks</code> and <code>flag_values</code> attributes</p> <p>b0:0 = infrared source data 1 = passive microwave source data;  b1:0 = ocean surface 1 = land surface;  b2:1 = ice contamination;  b3:1 = input data over lake surface;  b4:1 = input data over river;  b5: spare;</p> <p>b6:b15 set by the data provider. In this example bit b6 flags sun glint and bits b7:b8 are used to</p>			

enumerate an SST algorithm type
---------------------------------

## 9.18 Variable `quality_level`

The L2P variable '`quality_level`' provides an indicator of the overall quality of an SST measurement in an L2P file. The GDS requires the following:

The L2P variable '`quality_level`' shall use an incremental scale from 0 to 5 to provide the user with an indication of the quality of the L2P SST data. The value 0 shall be used to indicate missing data and the value 1 shall be used to indicate invalid data (e.g. cloud, rain, too close to land - under no conditions use this data). The remaining values from 2-5 are set at the discretion of the L2P provider with the proviso that the value 2 shall be used to indicate the worst quality of usable data and the value 5 shall be used to indicate the best quality usable data. The L2P provider is required to provide a description of the quality levels provided as part of the product documentation. A summary list will be maintained on the GHRSSST website (<http://www.ghrsst.org/L2P-Quality-Levels.html>) and in the GHRSSST user manual.

The L2P variable `quality_level` reflects the quality of SST data from a single sensor and does not provide an indication of the relative quality between sensors.

The L2P variable `quality_level` shall be included with the format requirements shown in Table 9-21.

**Table 9-21 CDL example description of `quality_level` variable**

Storage type definition	Variable name definition	Description	Unit
byte	<code>quality_level</code>	Overall indicator of SST measurement quality	none
<b>Example CDL Description</b>			
<pre>byte quality_level (time, nj, ni) ; quality_level:long_name = "quality level of SST pixel" ; quality_level:coordinates = "lon lat" ; quality_level:grid_mapping = "polar_stereographic" ; quality_level:flag_meanings = "no_data bad_data worst_quality                                low_quality acceptable_quality                                best_quality" ; quality_level:flag_values = 0b, 1b, 2b, 3b, 4b, 5b ; quality_level:comment = "These are the overall quality indicators and are used for all GHRSSST SSTs"</pre>			
<b>Comments</b>			

## 9.19 Optional Variable `satellite_zenith_angle`

Sea surface temperature retrievals from satellite instruments degrade as the sensor zenith angle increases. Measurements made with high viewing angles relative to nadir appear to be considerably colder than they are in reality. The L2P variable `satellite_zenith_angle` contains the calculated satellite zenith angle (measured at the Earth's surface between the satellite and the zenith) for the input L2 SST based on the satellite geometry at the time of SST data acquisition.

The GDS L2P variable `satellite_zenith_angle` is an optional field that may be provided by a data provider. The following criteria shall apply:

The satellite zenith angle for each input pixel measurement should be recorded in the L2P variable `satellite_zenith_angle` having a range of -90° to +90°.

If the L2P variable `satellite_zenith_angle` is included in a L2P data product it shall conform to the format requirements shown in Table 9-22.

**Table 9-22 CDL example description of `satellite_zenith_angle` variable**

Storage type definition	Variable name definition	Description	Unit
byte	<code>satellite_zenith_angle</code>	Calculated satellite zenith angle (measured at the Earth's surface between the satellite and the local zenith) for the input L2 SST based on the satellite geometry at the time of SST data acquisition.  Ranges from -90 to 90 degrees.	degree
<b>Example CDL Description</b>			
<pre>byte satellite_zenith_angle(time, nj, ni) ;   satellite_zenith_angle:long_name = "satellite zenith angle" ;   satellite_zenith_angle:units = "angular_degree" ;   satellite_zenith_angle:FillValue = -128b ;   satellite_zenith_angle:add_offset = 0. ;   satellite_zenith_angle:scale_factor = 1. ;   satellite_zenith_angle:valid_min = -90b ;   satellite_zenith_angle:valid_max = 90b ;   satellite_zenith_angle:coordinates = "lon lat" ;   satellite_zenith_angle:grid_mapping = "polar_stereographic" ;   satellite_zenith_angle:comment = "the satellite zenith angle at the time of the SST observations"</pre>			
<b>Comments</b>			

## 9.20 Optional Variable `solar_zenith_angle`

The L2P variable `solar_zenith_angle` contains the calculated solar zenith angle (the angle between the local zenith and the line of sight to the sun, measured at the Earth's surface) for the input L2 SST based on the satellite geometry at the time of SST data acquisition. Solar zenith angle is a function of time, day number and latitude.

The GDS L2P variable `solar_zenith_angle` is an optional field that may be provided by a data provider. The following criteria shall apply:

The solar zenith angle for each input pixel measurement should be recorded in the L2P variable `solar_zenith_angle` having a range of 0° to 180°.

If the L2P variable `solar_zenith_angle` is included in a L2P data product it shall conform to the format requirements shown in Table 9-23.

**Table 9-23 CDL example description of `solar_zenith_angle` variable**

Storage type definition	Variable name definition	Description	Unit
byte	<code>solar_zenith_angle</code>	Calculated solar zenith angle (measured at the Earth's surface between the sun and the local zenith) for the input SST based on the solar geometry at the time of SST data acquisition.  Ranges from 0 to 180 degrees.	degree

**Example CDL Description**

```

byte solar_zenith_angle(time, nj, ni) ;
  solar_zenith_angle:long_name = "solar zenith angle" ;
  solar_zenith_angle:standard_name = "zenith_angle" ;
  solar_zenith_angle:units = "angular_degree" ;
  solar_zenith_angle:FillValue = -128b ;
  solar_zenith_angle:add_offset = 0. ;
  solar_zenith_angle:scale_factor = 1. ;
  solar_zenith_angle:valid_min = 0b ;
  solar_zenith_angle:valid_max = 180b ;
  solar_zenith_angle:coordinates = "lon lat" ;
  solar_zenith_angle:grid_mapping = "polar_stereographic" ;
  solar_zenith_angle:comment "the solar zenith angle at the time of the
SST observations"

```

**Comments**

## 9.21 Optional Variable `surface_solar_irradiance`

Surface Solar Irradiance (SSI) data were originally required within the GDS 1.6 to assess the magnitude and variability of significant diurnal SST variations, for use in diurnal variability correction schemes, for use in L4 SST analysis procedures and to interpret the relationship between satellite and in situ SST data. In the GDS 2.0, it is an optional variable. Ideally a near contemporaneous SSI measurement from satellite sensors should be used but this is impossible for all areas due to the limited number of geostationary satellite sensors available. As a surrogate for a measured SSI value, analysis estimates may be used.

Surface solar Irradiance (SSI) data may be assigned to each L2P SST measurement pixel using the variable '`surface_solar_irradiance`'. The following criteria shall apply:

An integrated down-welling SSI measurement (e.g., derived from satellite measurements) should be assigned to each SST pixel value using the `surface_solar_irradiance` L2P variable. The SSI measurement nearest in space and time before the input pixel SST value should be used.

If no SSI measurement is available, an integrated SSI value derived from an analysis system nearest in space and time to the SST measurement should be used to set the value of `surface_solar_irradiance`.

The difference in time expressed in hours between the time of SST measurement and the time of surface solar irradiance data should be entered into the L2P confidence data variable `ssi_dtime_from_sst`. In the case of an analysis field, this should be the central (mean) time of an integrated value. If all of the values have the same time, the attribute `time_offset` is used instead of the variable `ssi_dtime_fraction_dtime_from_sst`. The attribute `time_offset` should store the difference in hours between the `surface_solar_irradiance` and the reference time, stored in the variable `time`.

If a single source of data is used in the L2P variable `surface_solar_irradiance`, the L2P variable `sources_of_ssi` is not required and instead the `surface_solar_irradiance:source` attribute value is sufficient. It shall be a single source text string defined by the data provider using the text string naming best practice given in Section 7.9.

If multiple sources of data are used, source information should be indicated in the L2P variable `sources_of_ssi` as defined by the data provider and as described in detail in Section 9.23. Then, the `surface_solar_irradiance:source` attribute shall have the value "`sources_of_ssi`".



The L2P variable 'surface\_solar\_irradiance' may be included by a data provider with the format requirements shown in Table 9-24.

**Table 9-24 CDL example description of surface\_solar\_irradiance variable**

Storage type definition	Variable name definition	Description	Unit
byte	surface_solar_irradiance	Near contemporaneous integrated Surface Solar Irradiance (SSI) data.	Wm <sup>-2</sup>
<b>Example CDL Description</b>			
<pre>byte surface_solar_irradiance(time, nj, ni) ;   surface_solar_irradiance:long_name = "surface solar irradiance" ;   surface_solar_irradiance:units = "W m-2" ;   surface_solar_irradiance:FillValue = -128b ;   surface_solar_irradiance:add_offset = 127. ;   surface_solar_irradiance:scale_factor = -1.36 ;   surface_solar_irradiance:valid_min = -127b ;   surface_solar_irradiance:valid_max = 127b ;   surface_solar_irradiance:source = "SSI-MSG_SEVIRI-V1" ;   surface_solar_irradiance:coordinates = "lon lat" ;   surface_solar_irradiance:grid_mapping = "polar_stereographic" ;   surface_solar_irradiance:comment = "The surface solar irradiance as close to the SST observation times as possible."</pre>			
<b>Comments</b>			
<p>A single source of SSI data is shown in this example which is reported as <code>surface_solar_irradiance:source = "SSI-MSG_SEVIRI-V1"</code>. The text string has been defined by the data provider using the text string naming best practice given in Section 7.9. Since all of the SSI values have the same time, the attribute <code>time_offset</code> is used instead of the variable <code>ssi_dtime_from_sst</code>.</p>			

## 9.22 Optional Variable ssi\_dtime\_from\_sst

The variable `ssi_dtime_from_sst` reports the time difference between SSI data from SST measurement in hours. The variable 'ssi\_dtime\_from\_sst' shall be included with the format requirements shown in Table 9-25. In the case of an analysis field, the central (mean) time of an integrated value should be used.

**Table 9-25 CDL example description of ssi\_dtime\_from\_sst variable**

Storage type definition	Variable name definition	Description	Unit
byte	ssi_dtime_from_sst	This variable reports the time difference between SSI data from SST measurement in hours.	hour
<b>Example CDL Description</b>			
<pre>byte ssi_dtime_from_sst (time, nj, ni) ;   ssi_dtime_from_sst:long_name = "time difference of surface solar irradiance measurement from sst measurement" ;   ssi_dtime_from_sst:units = "hour" ;   ssi_dtime_from_sst:FillValue = -128b ;   ssi_dtime_from_sst:add_offset = 0. ;   ssi_dtime_from_sst:scale_factor = 0.1 ;   ssi_dtime_from_sst:valid_min = -127b ;   ssi_dtime_from_sst:valid_max = 127b ;   ssi_dtime_from_sst:coordinates = "lon lat" ;   ssi_dtime_from_sst:grid_mapping = "polar_stereographic" ;   ssi_dtime_from_sst:comment = "The hours between the SSI and SST data"</pre>			
<b>Comment</b>			

## 9.23 Optional Variable `sources_of_ssi`

The source of data used to set the L2P ancillary data variable `surface_solar_irradiance` shall be indicated in the L2P variable `sources_of_ssi` when more than one source of SSI data is used in the L2P product. When only one source is used, this variable is not needed and the appropriate text string indicating the source is placed in the `sources` attribute of the `surface_solar_irradiance` variable. For multiple sources, the GDS 2.0 requires the following:

The variable in question should contain an attribute called `flag_meanings` and another one called `flag_values`. The `flag_values` attribute shall contain a comma-separated list of the numeric codes for the sources of data used whose order matches the comma-separated text strings in the `flag_meanings` attribute.

These text strings and numeric codes do not need to be unique across different data sets or even ancillary variables, but must be consistent within a given variable and clearly specified within each netCDF variable and its attributes. A best practice for naming the text strings is provided in Section 7.9.

The variable '`sources_of_ssi`' shall conform to the format requirements shown in Table 9-26.

**Table 9-26 CDL example description of `sources_of_ssi` variable**

Storage type definition	Variable name	Description	Unit
byte	<code>sources_of_ssi</code>	Sources of surface solar irradiance values	code
<b>Example CDL Description</b>			
<pre>byte sources_of_ssi(time, nj, ni) ;   sources_of_ssi:long_name = "sources_of_surface_solar_irradiance" ;   sources_of_ssi:coordinates = "lon lat" ;   sources_of_ssi:grid_mapping = "polar_stereographic" ;   sources_of_ssi:flag_meanings = "no_data SSI-MSG_SEVIRI-V1 SSI-NOAA-GOES_E-V1 SSI-NOAA-GOES_W-V1 SSI-ECMWF-V1 SSI-NCEP-V1 SSI-NAAPS-V1 spare" ;   sources_of_ssi:flag_values = 0, 1, 2, 3, 4, 5, 6, 7 ;   sources_of_ssi:comment = "This variable provides a pixel by pixel description of where surface solar irradiance were derived from.""</pre>			
<b>Comments</b>			
In this example, <code>flag_meanings</code> and <code>flag_values</code> contain code data provided by the data provider according to the best practices specified in Section 7.9. An example of these codes is given in Table 9-27.			

**Table 9-27 Example text string and numeric codes used to identify the sources of data in `surface_solar_irradiance:sources` and `sources_of_ssi`**

Numeric Code	Text String	Sources of surface solar irradiance Description
0	no_data	No surface solar irradiance set
1	SSI-MSG_SEVIRI-V1	SSI from Meteosat Second Generation SEVIRI instrument (EUMETSAT OSISAF)
2	SSI-NOAA-GOES_E-V1	GOES_E SSI data from NOAA
3	SSI-NOAA-GOES_W-V1	GOES_W SSI data from NOAA
4	SSI-ECMWF-V1	SSI data from European Centre for

		Medium Range Weather Forecasting
5	SSI-NCEP-V1	SSI data from NOAA's National Center for Environmental Prediction
6	SSI-NAVY-NAAPS-V1	SSI data from the US Navy Atmospheric aerosol Prediction system
7		Spare to be defined as required

## 9.24 Optional experimental L2P variables included by data provider

Flexibility of L2P product content is provided through the netCDF API, which allows fully self-describing fields and additional L2P variables may be included by L2P data providers if they are considered relevant for L2P users. The GDS 2.0 also permits the inclusion of R&D variables (e.g. channel radiance data sets, estimates of Chlorophyll\_a, fields that facilitate flagging of diurnal variability, etc.) and 32 bytes per pixel of SST are available in total for optional/experimental variables in any combination (i.e., variables can be defined as 32 x byte, 16 x short, 3 x int + 4 x byte, etc). The use of optional/experimental variables provides a limited amount of flexibility within the GDS 2.0 for regional user requirements while maintaining an overall upper limit on GDS 2.0 L2P products for data management groups and archive scaling.

The GDS 2.0 issues the following guidance on the inclusion of optional or experimental variables within L2P data products:

The sum total of all experimental variables shall not increase L2P record size by more than 32 bytes per SST pixel.

CF-1.4 compliance should be maintained for all optional/experimental variables. Where available, a **standard\_name** attribute should be used.

It is permitted to use a provider defined coordinate variable associated with experimental fields but this shall be documented in data provider documentation.

Time difference data (dtime values) should be provided for variables when appropriate.

The source of data should be indicated: in the single source case as a variable attribute; as a dedicated variable when mixed data sources are present.

Use of experimental variables requires clear documentation by the RDAC. Data providers shall provide adequate documentation that describes each variable following the CDL examples provided in this document.

The variable attribute **comment** shall be used to provide a URL link to a full description of each data producer defined variable included in the L2P product.

Experimental L2P variables if present in an L2P product will be included with the minimum format requirements shown in Table 9-28.

Additional global variables may be declared within the L2P product.

**Table 9-28 CDL template for data provider defined L2P variables**

Storage type definition	Variable name definition	Description	Unit
Byte	Provide a variable name in lower case using underscore	Provide a description of <b>my_variable</b> stating content	Units of <b>my_variable</b>

	separators e.g. <code>my_variable</code>	purpose and units.
<b>Example CDL Description</b>		
<pre>byte my_variable (time, nj, ni);   my_variable:long_name = "estimated diurnal variability" ;   my_variable:standard_name = "use_a_CF_standard_name_if_available" ;   my_variable:units = "kelvin" ;   my_variable:source = "MY-SOURCES-V1" ;   my_variable:_FillValue = -128b ;   my_variable:add_offset = 0. ;   my_variable:scale_factor = 1. ;   my_variable:valid_min = -127b ;   my_variable:valid_max = 127b ;   my_variable:coordinates = "lon lat" ;   my_variable:grid_mapping = "polar_stereographic" ;   my_variable:comment = "this field is fully documented at http://www.mysite.com/my_variable-description.html"</pre>		
<b>Comments</b>		
<p>A URL should be used to provide a live link to the documentation describing <code>my_variable</code>. CF-1.4 compliance should be maintained when using optional/experimental fields (particularly for the variable attribute <code>standard_name</code>).</p>		

## 9.25 CDL example L2P data set

The following CDL has been generated for an SST data set derived from the Sentinel-3A Sea and Land Surface Temperature (SLSTR) data set. It includes a set of experimental fields for that particular sensor.

```
netcdf l2p {
  dimensions:
    ni = 1760;
    nj = 40000;
    time = 1;
    channel = 3;
    view = 2;
  variables:
    float lat(nj, ni) ;
      lat:standard_name = "latitude" ;
      lat:units = "degrees_north" ;
      lat:valid_min = -90. ;
      lat:valid_max = 90. ;
      lat:reference_datum = "geographical coordinates, WGS84
projection" ;
    float lon(nj, ni) ;
      lon:standard_name = "longitude" ;
      lon:units = "degrees_east" ;
      lon:valid_min = -180. ;
      lon:valid_max = 180. ;
      lon:reference_datum = "geographical coordinates, WGS84
projection" ;
    int time(time);
      time:long_name = "reference time of SST file";
      time:units = "seconds since 1981-01-01T00:00:00Z";
    short sea_surface_temperature(time, nj, ni);
      sea_surface_temperature:long_name = "sea surface skin temperature";
      sea_surface_temperature:standard_name = "sea_surface_skin_temperature";
      sea_surface_temperature:units = "kelvin";
      sea_surface_temperature:add_offset = 290.0;
      sea_surface_temperature:scale_factor = 1.0e-3;
      sea_surface_temperature:valid_min = -32767s;
```

```

sea_surface_temperature:valid_max = 32767s;
sea_surface_temperature:_FillValue = -32768s;
sea_surface_temperature:coordinates = "lon lat";
sea_surface_temperature:comment = "Skin temperature of the ocean";
short sst_dtime (time, nj, ni);
sst_dtime:long_name = "time difference from reference time";
sst_dtime:units = "second";
sst_dtime:add_offset = 0s;
sst_dtime:scale_factor = 1s;
sst_dtime:valid_min = -32767s;
sst_dtime:valid_max = 32767s;
sst_dtime:_FillValue = -32768s;
sst_dtime:coordinates = "lon lat";
sst_dtime:comment = "time plus sst_dtime gives seconds after 00:00:00
UTC January 1, 1981";
byte sses_bias (time, nj, ni);
sses_bias:long_name = "SSES bias estimate";
sses_bias:units = "kelvin";
sses_bias:add_offset = 0.0;
sses_bias:scale_factor = 0.02;
sses_bias:valid_min = -127b;
sses_bias:valid_max = 127b;
sses_bias:_FillValue = -128b;
sses_bias:coordinates = "lon lat";
sses_bias:comment = "Estimated bias as described at
http://www.ghrsst.org/SSES-Description-of-schemes.html";
byte sses_standard_deviation (time, nj, ni);
sses_standard_deviation:long_name = "SSES standard deviation";
sses_standard_deviation:units = "kelvin";
sses_standard_deviation:add_offset = 1.27;
sses_standard_deviation:scale_factor = 0.01;
sses_standard_deviation:valid_min = -127b;
sses_standard_deviation:valid_max = 127b;
sses_standard_deviation:_FillValue = -128b;
sses_standard_deviation:coordinates = "lon lat";
sses_standard_deviation:comment = "Estimated standard deviation as
described at http://www.ghrsst.org/SSES-Description-of-schemes.html";
byte dt_analysis (time, nj, ni);
dt_analysis:long_name = "deviation from SST reference climatology";
dt_analysis:units = "kelvin";
dt_analysis:add_offset = 0.;
dt_analysis:scale_factor = 0.1;
dt_analysis:valid_min = -127b;
dt_analysis:valid_max = 127b;
dt_analysis:_FillValue = -128b;
dt_analysis:coordinates = "lon lat";
dt_analysis:reference = "OSTIA";
byte wind_speed (time, nj, ni);
wind_speed:long_name = "10m wind speed";
wind_speed:standard_name = "wind_speed";
wind_speed:units = "m s-1";
wind_speed:height = "10 m";
wind_speed:add_offset = 25.4;
wind_speed:scale_factor = 0.2;
wind_speed:valid_min = -127b;
wind_speed:valid_max = 127b;
wind_speed:_FillValue = -128b;
wind_speed:coordinates = "lon lat";
wind_speed:sources = "ECMWF_A";
byte wind_speed_dtime_from_sst (time, nj, ni);

```

```

    wind_speed_dtime_from_sst :long_name = "time difference of wind speed
measurement from sst measurement";
    wind_speed_dtime_from_sst :units = "hour";
    wind_speed_dtime_from_sst :add_offset = 12.7;
    wind_speed_dtime_from_sst :scale_factor = 0.1;
    wind_speed_dtime_from_sst :valid_min = -127b;
    wind_speed_dtime_from_sst :valid_max = 127b;
    wind_speed_dtime_from_sst :_FillValue = -128b;
    wind_speed_dtime_from_sst :coordinates = "lon lat";
byte sea_ice_fraction(time, nj, ni);
    sea_ice_fraction:long_name = "sea ice fraction";
    sea_ice_fraction:standard_name = "sea_ice_area_fraction";
    sea_ice_fraction:units = "percent";
    sea_ice_fraction:add_offset = 0.;
    sea_ice_fraction:scale_factor = 0.01 ;
    sea_ice_fraction:valid_min = 0b;
    sea_ice_fraction:valid_max = 100b;
    sea_ice_fraction:_FillValue = -128b;
    sea_ice_fraction:coordinates = "lon lat";
    sea_ice_fraction:sources = "ECMWF_A";
byte sea_ice_fraction_dtime_from_sst (time, nj, ni);
    sea_ice_fraction_dtime_from_sst :long_name = "time difference of sea
ice fraction measurement from sst measurement";
    sea_ice_fraction_dtime_from_sst:units = "hour";
    sea_ice_fraction_dtime_from_sst:add_offset = 0.;
    sea_ice_fraction_dtime_from_sst:scale_factor = 0.1;
    sea_ice_fraction_dtime_from_sst:valid_min = -127b;
    sea_ice_fraction_dtime_from_sst:valid_max = 127b;
    sea_ice_fraction_dtime_from_sst:_FillValue = -128b;
    sea_ice_fraction_dtime_from_sst:coordinates = "lon lat";
byte aerosol_dynamic_indicator(time, nj, ni);
    aerosol_dynamic_indicator:long_name = "aerosol dynamic indicator";
    aerosol_dynamic_indicator:units = " ";
    aerosol_dynamic_indicator:_FillValue = -128b;
    aerosol_dynamic_indicator:add_offset = 0.;
    aerosol_dynamic_indicator:scale_factor = 1.;
    aerosol_dynamic_indicator:valid_min = -127b;
    aerosol_dynamic_indicator:valid_max = 127b;
    aerosol_dynamic_indicator:coordinates = "lon lat";
    aerosol_dynamic_indicator:sources = "SDI";
byte adi_dtime_from_sst(time, nj, ni);
    adi_dtime_from_sst:long_name = "time difference of ADI data from sst
measurement";
    adi_dtime_from_sst:units = "hour";
    adi_dtime_from_sst:_FillValue = -128b;
    adi_dtime_from_sst:add_offset = 0.;
    adi_dtime_from_sst:scale_factor = 0.1;
    adi_dtime_from_sst:valid_min = -127b;
    adi_dtime_from_sst:valid_max = 127b;
    adi_dtime_from_sst:coordinates = "lon lat";
short l2p_flags(time, nj, ni);
    l2p_flags:long_name = "L2P flags";
    l2p_flags:coordinates = "lon lat";
    l2p_flags:flag_meanings = "infrared microwave ocean land ice lake river
no_retrieval N2_retrieval N3R_retrieval N3_retrieval D2_retrieval D3_retrieval
cloud sun_glint cosmetic_fill validation underflow overflow exception";
    l2p_flags:flag_masks = 1s, 1s, 2s, 3s, 4s, 8s, 16s, 32s, 64s, 128s,
192s, 256s, 320s, 512s, 1024s, 2048s, 4096s, 8192s, 16384s, -32768s;
    l2p_flags:flag_values = 0s, 1s, 2s, 3s, 4s, 8s, 16s, 32s, 64s, 128s,
192s, 256s, 320s, 512s, 1024s, 2048s, 4096s, 8192s, 16384s, -32768s;
byte quality_level (time, nj, ni);

```

```

    quality_level:long_name = "SST measurement quality" ;
    quality_level:coordinates = "lon lat" ;
    quality_level:flag_meanings = "no_data bad_data worst_quality
low_quality acceptable_quality best_quality";
    quality_level:flag_values = 0b, 1b, 2b, 3b, 4b, 5b;
// Experimental fields (32 bytes)
    byte satellite_zenith_angle(time, view, nj, ni);
    satellite_zenith_angle:long_name = "satellite zenith angle";
    satellite_zenith_angle:standard_name = "zenith_angle";
    satellite_zenith_angle:units = "angular_degree";
    satellite_zenith_angle:add_offset = 30.5;
    satellite_zenith_angle:scale_factor = 0.2;
    satellite_zenith_angle:valid_min = -127b;
    satellite_zenith_angle:valid_max = 127b;
    satellite_zenith_angle:_FillValue = -128b;
    satellite_zenith_angle:coordinates = "lon lat";
    short brightness_temperature(time, channel, view, nj, ni);
    brightness_temperature:long_name = "brightness temperature";
    brightness_temperature:standard_name = "brightness_temperature";
    brightness_temperature:units = "kelvin";
    brightness_temperature:add_offset = 260.;
    brightness_temperature:scale_factor = 2.5e-3;
    brightness_temperature:valid_min = -32767s;
    brightness_temperature:valid_max = 32767s;
    brightness_temperature:_FillValue = -32768s;
    brightness_temperature:coordinates = "lon lat";
// Global attributes
    :Conventions = "CF-1.4";
    :title = "SENTINEL-3A SLSTR L2P product";
    :summary = "The L2P product for the Sentinel-3A mission. This data set
is the follow-on the ATSR-1, ATSR-2, and AATSR series of instruments dating back to
1991.";
    :references =
"http://sentinel.esa.int/handbooks/SLSTR_product_handbook.pdf";
    :institution = "ESA";
    :history = "processor XXX.YY";
    :comment = "SST from Sentinel-3A";
    :license = "These data are available free of charge under the GMES data
policy.";

    :id = "SLSTR-EUR-L2P-Sentinel3A-v1";
    :naming_authority = "org.ghrsst";
    :product_version = "1.0";
    :uuid = "D7A88FA8-7421-4039-807C-B551D638EDC6";
    :gds_version_id = "2.0";
    :necdf_version_id = "4.1";
    :date_created = "20100201T120000Z";
    :file_quality_level=1;
    :spatial_resolution = "1 km";
    :start_time = "20100131T001223Z";
    :time_coverage_start = "20100131T001223Z";
    :stop_time = "20100131T001418Z";
    :time_coverage_end = "20100131T001418Z";
    :northernmost_latitude = 85.;
    :southernmost_latitude = -85.;
    :westernmost_longitude = -180.;
    :easternmost_longitude = 180.;
    :source = "S3A_SLSTR_OSTIA_ECMWF_A";
    :platform = "SENTINEL_3A";
    :sensor = "SLSTR";
    :metadata_conventions = "Unidata Observation Dataset v1.0";

```

```
        :metadata_link = "http://data.nodc.noaa.gov/waf/FGDC-GHRSST_all-SLSTR-
EUR-L2P-Sentinel3A-v1.html";
        :keywords = "Oceans > Ocean Temperature > Sea Surface Temperature";
        :keywords_vocabulary = "NASA Global Change Master Directory (GCMD)
Science Keywords";
        :standard_name_vocabulary = "NetCDF Climate and Forecast (CF) Metadata
Convention";
        :geospatial_lat_units = "degrees north";
        :geospatial_lat_resolution = "1";
        :geospatial_lon_units = "degrees east";
        :geospatial_lon_resolution = "1";
        :acknowledgment = "Please acknowledge the use of these data with the
following statement: These data were provided by GHRSST and its European Regional
Data Assembly Center";
        :creator_name = "European Space Agency";
        :creator_email = "eohelp@esa.int";
        :creator_url = "http://sentinel.esa.int";
        :project = "Group for High Resolution SST";
        :publisher_name = "GHRSST Project Office";
        :publisher_url = "http://www.ghrsst.org";
        :publisher_email = "ghrsst-po@nceo.ac.uk";
        :processing_level = "L2P";
        :cdm_data_type = "swath";
    }
```



## 10 Level 3 (L3) Product Specification

### 10.1 Overview description of the L3 data product

GHRSSST L3 data have been introduced to provide users with gridded, synthetic, and potentially adjusted SST products, bringing added value with respect to the original L2P but still allowing traceability to the original dataset. GHRSSST L3 products do not use analysis or interpolation procedure to fill gaps where no observations are available. The GHRSSST L3 products include:

- **Un-collated** data that represent a straightforward remapping of L2P GHRSSST data granules to a space grid without combining any observations from overlapping orbits or times. Although in principle these data may or may not be adjusted to a reference sensor, in practice the un-collated L3 will normally be a remapped L2P dataset. For remapping best practices, see Section 10.31.
- **Collated** data that grid observations from a single instrument and a single platform into space and/or time bins. These data may or may not be adjusted to a reference sensor. For collating best practices see Section 10.32, and for adjustment best practices see Section 10.33.
- **Super-collated** data that combine observations from a multiple instruments into a space-time grid. In this case, the adjustment to a common reference is necessary to avoid heterogeneities in the resulting field. For best practices concerning the creation of super collated files see Section 10.34.

As a result, the format of a L3 file will be able to cope with the three kinds of L3 SST presented above. The L3 format will include the following parts:

- 1) **In case the L3 is un-adjusted, a mandatory section containing the original L2P information** remapped onto the grid point: the original sea surface temperature, quality level and SSES information. An optional section including the remapping condition information may also be provided. These files are essentially gridded L2P files.
- 2) **In case the L3 is adjusted to a reference**, the adjusted SST value must be provided, together with the local bias to the reference, the error generated by the adjustment processing, and the overall error resulting from the combination of the SSES and the adjustment processing error.
- 3) **In case the L3 is super-collated**, the source of SST at each pixel is mandatory.

**Un-adjusted files:** In the case of **un-collated or collated un-adjusted L3 files** the L3 file is derived from L2P data by a remapping process. The remapping and collating best practices are given in the Section 10.31. Their content is thus identical to that of the L2P, but complementary, optional information on the remapping conditions may be provided.

**Adjusted files:** Collated files may or may not be adjusted, but a super-collated file is necessarily adjusted. The super-collating and adjustment best practices are described in Sections 10.32 and 10.33. The principle governing this format is to allow traceability to the original L2P, while providing the best-adjusted SST value. A first section (in blue in Table 10-2) reproduces the original L2P SST and SSES information as in the un-adjusted version. The reference used to adjust the SST must be given in the "reference" attribute of the `adjusted_sea_surface_temperature` variable. The adjusted SST and some error information are also mandatory. This information (in yellow in Table 10-2) is:

- `adjusted_standard_deviation_error`: the total error resulting from the combination of the SSES error and the adjustment procedure error, `standard_deviation_to_reference_sst`.
- `bias_to_reference_sst`: the local value of the estimated difference between the original SST and the reference SST
- `standard_deviation_to_reference_sst`: an estimate of the error resulting from the adjustment procedure. If the procedure consists of analysing a field of differences of original SST and reference SST, the `standard_deviation_to_reference_sst` will be the error of this analysis.

The GHRSSST Science Team determined that 5 mandatory fields will form the core data content of a GHRSSST L3 data file. In addition to global attributes and geo-location information, RDACs must produce the following within a L3 file:

- Sea Surface temperature data (SST)
- Time of SST measurement
- Bias and Standard Deviation error estimates for SST data
- Data quality

There are a number of optional fields that may be used at the data provider's discretion that will form the core data content of a GHRSSST data file (table 10-1)".

For every L3 file that is generated, appropriate ISO metadata (specified in Section 12.1) must also be created and registered at the GHRSSST Master Metadata Repository (MMR) system. The GHRSSST L3 file contents are summarized in Table 10-1 below.

**Table 10-1 Summary description of the contents within a GHRSSST L3 data product**

Description	Required	Relevant Section
Dimensions (e.g., i x j x k)	Mandatory	Section 8
Global attributes	Mandatory	Section 8.2
[i x j x k] geolocation data	Mandatory	Section 8.4
[i x j x k] array of SST data	Mandatory	Section 9.3
[i x j x k] array of <code>sst_dtime</code> data	Mandatory	Section 9.4
[i x j x k] array of <code>sses_bias</code> data	Mandatory	Section 9.5
[i x j x k] array of <code>sses_standard_deviation</code> data	Mandatory	Section 9.6
[i x j x k] array of <code>quality_level</code> data	Mandatory	Section 9.18
[i x j x k] array of optional/experimental data	Optional	Section 9.24

## 10.2 L3 data record format specification

This table provides an overview of the GHRSSST L3 product pixel data record that should be created for each input data. Within GHRSSST L3 data files, there are many variables that are defined identically to their L2P counterparts. In addition, there are several variables that are unique to L3. Both types are listed below in Table 10-2. In the following sections, each variable within the L3 data file that is unique to L3 is described in detail.

**Table 10-2 L3 SST data record content.**

Variable Name (Definition Section, CDL Example)	Description	Units type
<code>sea_surface_temperature</code>  (Section 9.3, Table 9-3)	SST measurement values from input L2 satellite data set. L2 SST data are not adjusted in any manner and are identical to the input data set.  Use attribute ' <code>sea_surface_temperature:source = "&lt;code from Section 7.9, Table 7-10&gt;"</code> ' to specify the L2 input product source.	kelvin int
<code>sst_dtime</code>  (Section 10.4, Table 9-5)	Deviation in time of SST measurement from reference time stored in the netCDF global variable <code>time</code> (defined as the start time of granule for L3U and the centre time of the collation window for L3C and L3S). Minimum resolution should be one second.	seconds long

<p><b>sses_bias</b></p> <p>(Section 9.5, Data producers are reminded to choose appropriate <code>scale_factors</code> and <code>add_offsets</code> for their data, and to strive for <code>scale_factors</code> as close to 0.01 as possible without “oversaturating” the values. Table 9-6)</p>	<p>Single Sensor Error Statistic (SSES) bias error estimate generated by data provider</p> <p>The specific SSES methodology should be described in L2P documentation from the data provider. The GHRSSST ST-VAL TAG will maintain a summary document of all SSES schemes at <a href="http://www.ghrsst.org/STVAL-TAG-SSES-Schemes.html">http://www.ghrsst.org/STVAL-TAG-SSES-Schemes.html</a></p>	kelvin byte
<p><b>sses_standard_deviation</b></p> <p>(Section 9.6, Table 9-7)</p>	<p>SSES standard deviation uncertainty generated by data provider.</p> <p>The specific SSES methodology should be described in L2P documentation from the data provider. The GHRSSST ST-VAL TAG will maintain a summary document of all SSES schemes at <a href="http://www.ghrsst.org/STVAL-TAG-SSES-Schemes.html">http://www.ghrsst.org/STVAL-TAG-SSES-Schemes.html</a></p>	kelvin byte
<p><b>dt_analysis</b></p> <p>(Section 9.7, Table 9-9)</p>	<p>The difference between input SST and a GHRSSST L4 SST analysis from the previous 24 hour period.</p> <p>The GHRSSST L4 analysis chosen for a given L2P data set variable should be consistent for all L2P products as far as practically possible.</p> <p>If no L4 analysis is available then an alternative L4 analysis or a reference mean SST climatology may be used.</p>	kelvin byte
<p><b>wind_speed</b></p> <p>(Section 9.8, Table 9-10)</p>	<p>10 m surface wind speed near contemporaneous to the input SST measurement from satellite or analysis.</p> <p>Wind speed data should be provided at a minimum resolution of <math>1 \text{ ms}^{-1}</math> and data producers shall use <code>scale_factor</code> and <code>add_offset</code> to scale data to an appropriate resolution (higher resolution is better).</p> <p>The difference in time between SST measurement and <code>wind_speed</code> data shall be recorded in the L2P variable <code>wind_speed_mtime_from_sst</code></p> <p>If multiple sources of wind speed data are used, the variable <code>sources_of_wind_speed</code> shall be used to indicate their source following the format requirements shown Section 7.9. Units of multiple sources of information shall be identical.</p> <p>If a unique source is used (this is recommended) the attribute <code>'wind_speed:source = "&lt; string defined following best practice in Section 7.9&gt;"</code> is considered sufficient.</p>	$\text{ms}^{-1}$ byte
<p><b>wind_speed_mtime_from_sst</b></p> <p>(Section 9.9, Table 9-11)</p>	<p>Time difference of <code>wind_speed</code> data from input L2 SST measurement specified in hours.</p> <p>Units of multiple sources of information shall be identical.</p>	Hours byte

<p><b>sources_of_wind_speed</b></p> <p>(Section 9.10, Table 9-12)</p>	<p>When multiple sources of wind speed data are used in the variable <b>wind_speed</b>, the variable <b>sources_of_wind_speed</b> shall be used to record the source of the wind speed data used. Units of multiple sources of information shall be identical.</p> <p>If a unique source of wind speed data is used (this is recommended) the variable attribute <b>'wind_speed:source = "&lt;string defined following best practice defined in Section 7.9&gt;"</b> shall be sufficient and the variable <b>sources_of_wind_speed</b> is not required.</p>	<p>Code byte</p>
<p><b>sea_ice_fraction</b></p> <p>(Section 9.11, Table 9-13)</p>	<p>Fractional Sea Ice contamination data. Ranges from 0 to 1. This field is only required if there is actually sea ice in the input L2 data set. Do not provide an array of missing data values.</p> <p>When multiple sources of sea ice fraction data are used in the variable <b>sea_ice_fraction</b>, the variable <b>sources_of_sea_ice_fraction</b> shall be used to record the source of the sea ice fraction data used and the difference in time between SST measurement and <b>sea_ice_fraction</b> data shall be recorded in the variable <b>sea_ice_fraction_dtime_from_sst</b>. Units of multiple sources of information shall be identical.</p> <p>If a unique source of sea ice fraction data is used (this is recommended), the variable attribute <b>'sea_ice_fraction:source = "&lt; string defined following best practice defined in Section 7.9&gt;"</b> and an attribute <b>sea_ice_fraction:time_offset = "difference time in hours"</b> are considered sufficient and the variables <b>sources_of_sea_ice_fraction</b> and <b>sea_ice_fraction_dtime_from_sst</b> are not required.</p>	<p>Percent byte</p>
<p><b>sea_ice_fraction_dtime_from_sst</b></p> <p>(Section 9.12, Table 9-14)</p>	<p>Time difference of <b>sea_ice_fraction</b> data from input L2 SST measurement specified in hours. This variable is mandatory when multiple sources of <b>sea_ice_fraction</b> are used. If only one source is used and the values all have one time, simply set a variable attribute <b>sea_ice_fraction:time_offset = "difference time in hours"</b>.</p>	<p>Hours byte</p>
<p><b>sources_of_sea_ice_fraction</b></p> <p>(Section 9.13, Table 9-15)</p>	<p>When multiple sources of sea ice fraction data are used in the variable <b>sea_ice_fraction</b>, the variable <b>sources_of_sea_ice_fraction</b> shall be used to record the source of the sea ice fraction data used. Units of multiple sources of information shall be identical.</p> <p>If a unique source of sea ice fraction data is used (this is recommended), the variable attribute <b>'sea_ice_fraction:source = "&lt; string defined following best practice defined in Section 7.9&gt;"</b> is sufficient and the variable <b>sources_of_sea_ice_fraction</b> is not needed.</p>	<p>Code byte</p>
<p><b>aerosol_dynamic_indicator</b></p>	<p>The variable <b>aerosol_dynamic_indicator</b> (ADI) is used to indicate the presence of atmospheric aerosols that</p>	<p>Scaled value byte</p>

(Section 9.14, Table 9-16)	<p>may cause errors in the atmospheric correction of infrared satellite data when retrieving SST.</p> <p>The variable <b>aerosol_dynamic_indicator</b> is mandatory only when the input SST data set has been derived from an infrared satellite instrument.</p> <p>The atmospheric aerosol data used to fill the variable <b>aerosol_dynamic_indicator</b> is chosen by the data provider as the most appropriate aerosol indicator for a given input SST data set. (e.g., SDI might be used for MSG SEVIRI, a view difference might be used for AATSR, and aerosol optical depth may be used from a model or another satellite system).</p> <p>When multiple sources of atmospheric aerosol indicator data are used in the variable <b>aerosol_dynamic_indicator</b>, the variable <b>sources_of_sea_aerosol_dynamic_indicator</b> shall be used to record the source of the aerosol indicator data used. Units of multiple sources of information shall be identical.</p> <p>If a unique source of atmospheric aerosol indicator data is used (this is recommended), the variable attribute <b>'aerosol_dynamic_indicator:source = "&lt;string defined following best practice defined in Section 7.9&gt;"</b> is sufficient and the variable <b>sources_of_aerosol_dynamic_indicator</b> is not required. If only one source is used and the values all have one time, simply set a variable attribute <b>sea_ice_fraction:time_offset = "difference time in hours"</b>.</p>	
<b>adi_dtime_from_sst</b> (Section 9.15, Table 9-17)	<p>The time difference between the <b>aerosol_dynamic_indicator</b> value and SST measurement recorded in hours.</p>	<p>Hours byte</p>
<b>sources_of_adi</b> (Section 9.16, Table 9-18)	<p>When multiple sources of atmospheric aerosol indicator data are used in the variable <b>aerosol_dynamic_indicator</b>, the variable <b>sources_of_sea_aerosol_dynamic_indicator</b> shall be used to record the source of the aerosol indicator data used.</p> <p>If a unique source of atmospheric aerosol indicator data is used (this is recommended), the variable attribute <b>'aerosol_dynamic_indicator:source = "&lt;string defined following best practice defined in Section 7.9&gt;"</b> is sufficient and the variable <b>sources_of_aerosol_dynamic_indicator</b> is not required.</p>	<p>Code byte</p>
<b>l2p_flags</b> (Section 9.17, Table 9-20)	<p>The variable <b>l2p_flags</b> is used to (a) specify the type of input SST data (either infrared or passive microwave instrument derived), (b) pass through native flags from the input L2 SST data set and (c) record any additional information considered important for the user of an L2P</p>	<p>Flags int</p>

	<p>data set.</p> <p>The variable <b>12p_flags</b> is split into two sections: the first 6 bits of the L2P variable <b>12p_flags</b> are generic flags that are common to all L2P data files; bits 6-15 are defined by the L2P data provider and are specific to each L2 input data stream.</p> <p>The tables below define the bit field and their meanings.</p> <table border="1" data-bbox="568 506 1177 775"> <thead> <tr> <th>Bit</th> <th>Common flags</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>1 if passive microwave data 0 if Infrared data</td> </tr> <tr> <td>1</td> <td>Land</td> </tr> <tr> <td>2</td> <td>Ice</td> </tr> <tr> <td>3</td> <td>Lake (if known)</td> </tr> <tr> <td>4</td> <td>River (if known)</td> </tr> <tr> <td>5</td> <td>Spare</td> </tr> </tbody> </table> <table border="1" data-bbox="568 835 1177 1088"> <thead> <tr> <th>Bit</th> <th>12p_flags definition</th> </tr> </thead> <tbody> <tr> <td>6-15</td> <td>Defined by L2 data provider and described in the <b>flag_meanings</b>, <b>flag_masks</b> and <b>flag_values</b> variable attributes.  Please refer to L2P data provider documentation</td> </tr> </tbody> </table>	Bit	Common flags	0	1 if passive microwave data 0 if Infrared data	1	Land	2	Ice	3	Lake (if known)	4	River (if known)	5	Spare	Bit	12p_flags definition	6-15	Defined by L2 data provider and described in the <b>flag_meanings</b> , <b>flag_masks</b> and <b>flag_values</b> variable attributes.  Please refer to L2P data provider documentation	
Bit	Common flags																			
0	1 if passive microwave data 0 if Infrared data																			
1	Land																			
2	Ice																			
3	Lake (if known)																			
4	River (if known)																			
5	Spare																			
Bit	12p_flags definition																			
6-15	Defined by L2 data provider and described in the <b>flag_meanings</b> , <b>flag_masks</b> and <b>flag_values</b> variable attributes.  Please refer to L2P data provider documentation																			
<p><b>quality_level</b>  (Section 9.18, Table 9-21)</p>	<p>The L2P variable <b>quality_level</b> is used to provide an overall indication of L2P data quality.</p> <p>The L2P variable <b>quality_level</b> will reflect CEOS QA4EO (Quality Indicator) guidelines.</p> <p>An incremental scale from 0 no data, 1 (bad e.g. cloud, rain, to close to land – under no conditions use this data) 2 (worst quality usable data), to 5 (best quality usable data) shall be used.</p>	<p>Code byte</p>																		
<p><b>or_latitude</b> (Section 10.20, Table 10-3)</p>	<p>Original latitude of the satellite measurement as provided in the L2P</p>	<p>Degree short</p>																		
<p><b>or_longitude</b> (Section 10.21, Table 10-4)</p>	<p>Original longitude of the satellite measurement as provided in the L2P</p>	<p>Degree short</p>																		
<p><b>or_number_of_pixels</b> (Section 10.22, Table 10-5)</p>	<p>Number of original pixels from the L2P contributing to the binned (space and/or time) average</p>	<p>Number short</p>																		
<p><b>sum_sst</b> (Section 10.23, Table 10-6)</p>	<p>Sum of the pixel values going into the space and/or time bin</p>	<p>kelvin float</p>																		
<p><b>sum_square_sst</b> (Section 10.24, Table 10-7)</p>	<p>Sum of the pixel value squares going into the space and/or time bin</p>	<p>kelvin<sup>2</sup> float</p>																		
<p><b>adjusted_sea_surface_temperature</b> (Section 10.25, Table 10-8)</p>	<p>SST adjusted to the reference Mandatory for adjusted type file</p>	<p>kelvin short</p>																		
<p><b>adjusted_standard_deviation_error</b> (Section 10.26, Table 10-9)</p>	<p>Total error standard deviation estimate derived from SSES and adjustment method Mandatory for adjusted type file</p>	<p>kelvin byte</p>																		

<b>bias_to_reference_sst</b> (Section 10.27, Table 10-10)	Bias error derived from comparison with the reference Mandatory for adjusted type file	kelvin short
<b>standard_deviation_to_reference_sst</b> (Section 10.28, Table 10-11)	Error standard deviation resulting from the bias estimation method Mandatory for adjusted type file	kelvin byte
<b>sources_of_sst</b> (Section 10.29, Table 10-12)	Source of SST data Mandatory for a super-collated type file	Code byte
Optional/experimental fields defined by data provider (Section 9.24, Table 9-28)	Optional/experimental data	Defined by RDAC

### 10.3 Variable **sea\_surface\_temperature**

Defined identically to L2P variable of the same name. See Section 9.3 for more details.

### 10.4 Variable **sst\_dtime**

Defined identically to L2P variable of the same name except the storage type is long instead of short. See Section 9.4.

### 10.5 Variable **sses\_bias**

Defined identically to L2P variable of the same name. See Section 9.5.

### 10.6 Variable **sses\_standard\_deviation**

Defined identically to L2P variable of the same name. See Section 9.6.

### 10.7 Variable **dt\_analysis**

Defined identically to L2P variable of the same name. See Section 9.7.

### 10.8 Variable **wind\_speed**

Defined identically to L2P variable of the same name. See Section 9.8.

### 10.9 Variable **wind\_speed\_dtime\_from\_sst**

Defined identically to L2P variable of the same name. See Section 9.9.

### 10.10 Variable **sources\_of\_wind\_speed**

Defined identically to L2P variable of the same name. See Section 9.10.

### 10.11 Variable **sea\_ice\_fraction**

Defined identically to L2P variable of the same name. See Section 9.11.

### 10.12 Variable **sea\_ice\_fraction\_dtime\_from\_sst**

Defined identically to L2P variable of the same name. See Section 9.12.

### 10.13 Variable **sources\_of\_sea\_ice\_fraction**

Defined identically to L2P variable of the same name. See Section 9.13.

### 10.14 Variable **aerosol\_dynamic\_indicator**

Defined identically to L2P variable of the same name. See Section 9.14.

### 10.15 Variable `adi_dtime_from_sst`

Defined identically to L2P variable of the same name. See Section 9.15.

### 10.16 Variable `sources_of_adi`

Defined identically to L2P variable of the same name. See Section 9.16.

### 10.17 Variable `l2p_flags`

Defined identically to L2P variable of the same name. See Section 9.17.

### 10.18 Variable `quality_level`

Defined identically to L2P variable of the same name. See Section 9.18.

### 10.19 Optional or experimental L3 variables included by data provider

Defined similarly to experimental L2P variables. See Section 9.24.

### 10.20 Variable `or_latitude`

The variable '`or_latitude`' will be included either:

- As a floating point variable similarly to the grid latitude and longitude
- As a short variable with the format requirements shown in Table 10-3, if the required precision is compatible.

This variable is the original latitude of the contributing pixel in case of remapping to the nearest pixel, or the average latitude of the contributing pixels in case of averaging.

Table 10-3 CDL example description of `or_latitude` variable

Storage type	Name	Description	Unit
short	<code>or_latitude</code>	Original latitude of the satellite measurement	degree
<b>CDL description</b>			
<pre>short or_latitude(time, lat, lon) ;   or_latitude:long_name = "original latitude of the SST value" ;   or_latitude:standard_name = "latitude" ;   or_latitude:units = "degrees_north" ;   or_latitude:_FillValue = -32768s ;   or_latitude:valid_min = -9000s ;   or_latitude:valid_max = 9000s ;   or_latitude:add_offset = 0. ;   Or_latitude:scale_factor = 0.01 ;</pre>			
<b>Comments</b>			

### 10.21 Variable `or_longitude`

The variable '`or_longitude`' shall be included either

- As a floating point variable similarly to the grid latitude and longitude
- As a short variable with the format requirements shown in Table 10-4, if the required precision is compatible.



This variable is the original longitude of the contributing pixel in case of remapping to the nearest pixel, or the average longitude of the contributing pixels in case of averaging.

**Table 10-4 CDL example description of `or_longitude` variable**

Storage type	Name	Description	Unit
short	<code>or_longitude</code>	Original longitude of the satellite measurement	degree
<b>CDL description</b>			
<pre>short or_longitude(time, lat, lon) ;   or_longitude:long_name = "original longitude of the SST value" ;   or_longitude:standard_name = "longitude" ;   or_longitude:units = "degrees_east" ;   or_longitude:FillValue = -32768s ;   or_longitude:valid_min = -18000s ;   or_longitude:valid_max = 18000s ;   or_longitude:add_offset = 0. ;   Or_longitude:scale_factor = 0.01 ;</pre>			
<b>Comments</b>			

## 10.22 Variable `or_number_of_pixels`

The variable '`or_number_of_pixels`' shall be included with the format requirements shown in Table 10-5.

**Table 10-5 CDL example description of `or_number_of_pixels` variable**

Storage type	Name	Description	Unit
short	<code>or_number_of_pixels</code>	Number of pixels from the L2P contributing to the SST value	none
<b>CDL description</b>			
<pre>short or_number_of_pixels(time, lat, lon) ;   or_number_of_pixels:long_name = "number of pixels from the L2Ps     contributing to the SST value" ;   or_number_of_pixels:units = "1" ;   or_number_of_pixels:FillValue = -32768s;   or_number_of_pixels:add_offset = 0 ;   or_number_of_pixels:scale_factor = 1 ;   or_number_of_pixels:valid_min = 0 ;   or_number_of_pixels:valid_max = 32767s ;</pre>			
<b>Comments</b>			
This variable records the number of original L2P contributing to the SST in case of averaging during the L3 fabrication.			

## 10.23 Variable `sum_sst`

The variable '`sum_sst`' shall be included with the format requirements shown in Table 10-6.

**Table 10-6 CDL example description of `sum_sst` variable**

Storage type	Name	Description	Unit
float	<code>sum_sst</code>	Sum of the pixel values going into the space and/or time bin	kelvin

CDL description
<pre>float sum_sst(time, lat, lon) ;   sum_sst:long_name = "sum of contributing pixel sst values" ;   sum_sst:FillValue = -1f ;   sum_sst:units = "kelvin" ;   sum_sst:add_offset =0.;   sum_sst:scale_factor =1.;   sum_sst:valid_min =-200.;   sum_sst:valid_max =200. ;</pre>
Comments
This variable records the sum of the original SST values in case of averaging during the L3 fabrication.

## 10.24 Variable `sum_square_sst`

The variable '`sum_square_sst`' shall be included with the format requirements shown in Table 10-7.

Table 10-7 CDL example description of `sum_square_sst` variable

Storage type	Name	Description	Unit
float	<code>sum_square_sst</code>	Sum of the pixel value squares going into the space and/or time bin	kelvin**2
CDL description			
<pre>float sum_square_sst(time, lat, lon) ;   sum_square_sst:long_name = "sum of contributing pixel sst value squares" ;   sum_square_sst:standard_name =     sum_of_contributing_pixel_sst_value_squares_D;   sum_square_sst:FillValue = -1f ;   sum_square_sst:units = "kelvin2" ;   sum_square_sst:add_offset =0.;   sum_square_sst:scale_factor =1.;   sum_square_sst:valid_min =0.;   sum_square_sst:valid_max = 50000;</pre>			
Comments			
This variable records the sum of squares of the original SST values in case of averaging during the L3 fabrication			

## 10.25 Variable `adjusted_sea_surface_temperature`

The variable '`adjusted_sea_surface_temperature`' shall be included with the format requirements shown in Table 10-8. see the principles of the adjustment procedure in Section 10.33.

Table 10-8 CDL example description of `adjusted_sea_surface_temperature` variable

Storage type	Name	Description	Unit
short	<code>adjusted_sea_surface_temperature</code>	SST values after adjustment to the reference	kelvin
CDL description			
<pre>short adjusted_sea_surface_temperature(time, lat, lon) ;   adjusted_sea_surface_temperature:long_name = "adjusted sea surface temperature" ;   adjusted_sea_surface_temperature:standard_name =     "sea_surface_skin_temperature, sea_surface_subskin_temperature or     sea_surface_foundation_temperature " ;</pre>			

<pre> adjusted_sea_surface_temperature:units = "kelvin" ; adjusted_sea_surface_temperature:_FillValue = -32768s ; adjusted_sea_surface_temperature:add_offset = 273.15 ; adjusted_sea_surface_temperature:scale_factor = 0.01 ; adjusted_sea_surface_temperature:valid_min = -300s ; adjusted_sea_surface_temperature:valid_max = 4500s ; adjusted_sea_surface_temperature:reference="ATS_NR_2P" ; adjusted_sea_surface_temperature:comment="priorities: example:   ATS_NR_2P, AVHRRMTA, NAR17_SST, NAR18_SST, AVHRR17_L, AVHRR_18_L,   AVHRR17_L, AVHRR18_G, SEVIRI_1H_SST, GOES_12_1H_SST, AMSRE, TMI,   MODIS_A, MODIS_T" </pre>
<b>Comments</b>

## 10.26 Variable `adjusted_standard_deviation_error`

The variable 'adjusted\_standard\_deviation\_error' shall be included with the format requirements shown in Table 10-9. This variable represents the total error associated with the `adjusted_sea_surface_temperature` variable. It represents the accumulated error of the SST production (the `sses_standard_deviation`) and the SST adjustment (`standard_deviation_to_reference_sst`).

Table 10-9 CDL example description of `adjusted_standard_deviation_error` variable

Storage type	Name	Description	Unit
byte	<code>adjusted_standard_deviation_error</code>	Total error standard deviation estimate derived from SSES and adjustment method	kelvin
<b>CDL description</b>			
<pre> byte adjusted_standard_deviation_error(time, lat, lon) ;   adjusted_standard_deviation_error:long_name = "standard deviation error   based on L2P SSES and adjustment method" ; adjusted_standard_deviation_error:units = "kelvin" ; adjusted_standard_deviation_error:_FillValue = -128b ; adjusted_standard_deviation_error:add_offset = 1. ; adjusted_standard_deviation_error:scale_factor = 0.01 ; adjusted_standard_deviation_error:valid_min = -127b ; adjusted_standard_deviation_error:valid_max = 127b ; </pre>			
<b>Comments</b>			
This represents the cumulated errors of SSES and adjustment method			

## 10.27 Variable `bias_to_reference_sst`

The variable 'bias\_to\_reference\_sst' shall be included with the format requirements shown in Table 10-10. This quantity represents the local value of the adjustment to the reference.

Table 10-10 CDL example description of `bias_to_reference_sst` variable

Storage type	Name	Description	Unit
short	<code>bias_to_reference_sst</code>	Bias error derived from comparison with the reference	kelvin
<b>CDL description</b>			
<pre> short bias_to_reference_sst (time, lat, lon) ;   bias_to_reference_sst:long_name = "bias error derived from   reference" ; </pre>			

<pre> bias_to_reference_sst:units = "kelvin" ; bias_to_reference_sst:_FillValue = -32768s ; bias_to_reference_sst:add_offset = 0. ; bias_to_reference_sst:scale_factor = 0.01 ; bias_to_reference_sst:valid_min = -32767s ; bias_to_reference_sst:valid_max = 32767s; </pre>
<b>Comments</b>
This represents the bias estimate derived from comparison between the original SST (native SSES being applied) and the reference sensor SST (original SST - reference SST)

## 10.28 Variable standard\_deviation\_to\_reference\_sst

The variable 'standard\_deviation\_to\_reference\_sst' shall be included with the format requirements shown in Table 10-11.

Table 10-11 CDL example description of standard\_deviation\_to\_reference\_sst variable

Storage type	Name	Description	Unit
byte	standard_deviation_to_reference_sst	Error standard deviation resulting from the bias estimation method	kelvin
<b>CDL description</b>			
<pre> byte standard_deviation_to_reference_sst(time, lat, lon) ;   standard_deviation_to_reference_sst:long_name = "standard deviation of the reference error" ;   standard_deviation_to_reference_sst:units = "kelvin" ;   standard_deviation_to_reference_sst:_FillValue = -128b ;   standard_deviation_to_reference_sst:add_offset = 1. ;   standard_deviation_to_reference_sst:scale_factor = 0.01 ;   standard_deviation_to_reference_sst:valid_min = -127b ;   standard_deviation_to_reference_sst:valid_max = 127b ; </pre>			
<b>Comments</b>			
This represents the error standard deviation estimate resulting from the bias estimation method			

## 10.29 Variable source\_of\_sst

In a super-collated file (L3S), the variable 'source\_of\_sst' shall be included with the format requirements shown in Table 10-12.

Table 10-12 CDL description of source\_of\_sst variable

Storage type	Name	Description	Unit
byte	source_of_sst	Origin of the SST at pixel level	Code table
<b>CDL description</b>			
<pre> byte source_of_sst(time, lat, lon) ;   source_of_sst:long_name = "SST product origin" ;   source_of_sst:standard_name =TBD;   source_of_sst:units = "1" ;   source_of_sst:_FillValue = -128b ;   source_of_sst:valid_min = 1b ;   source_of_sst:valid_max = 127b ;   source_of_sst:comment = "codes listed in Table 7-10" ; </pre>			
<b>Comments</b>			

## 10.30 Sample GHRSSST L3 file (CDL header)

A complete CDL description of a L3S file is given below : `satellite_zeith_angle` and `solar_zenith_angle` are optional fields.

```
netcdf 20090831120000-MYO-L3S_GHRSSST-SSTfnd-CMSscolated2km-EURSEAS-
adjusted_002x002_0024-v02-fv01 {
dimensions:
    time = 1 ;
    lat = 250 ;
    lon = 475 ;
variables:
    int time(time) ;
        time:long_name = "reference time" ;
        time:units = "seconds since 1981-01-01 00:00:00" ;
    float lat(nj, ni) ;
        lat:standard_name = "latitude" ;
        lat:units = "degrees_north" ;
        lat:valid_min = -90. ;
        lat:valid_max = 90. ;
        lat:reference_datum = "geographical coordinates, WGS84
projection" ;
    float lon(nj, ni) ;
        lon:standard_name = "longitude" ;
        lon:units = "degrees_east" ;
        lon:valid_min = -180. ;
        lon:valid_max = 180. ;
        lon:reference_datum = "geographical coordinates, WGS84
projection" ;
    short sst_dtime(time, lat, lon) ;
        sst_dtime:long_name = "time difference from reference time" ;
        sst_dtime:units = "seconds" ;
        sst_dtime:_FillValue = -32768s ;
        sst_dtime:add_offset = 0. ;
        sst_dtime:scale_factor = 1. ;
        sst_dtime:valid_min = -32767s ;
        sst_dtime:valid_max = 32767s ;
    short sea_surface_temperature(time, lat, lon) ;
        sea_surface_temperature:long_name = "sea surface temperature" ;
        sea_surface_temperature:standard_name =
"sea_surface_foundation_temperature" ;
        sea_surface_temperature:units = "kelvin" ;
        sea_surface_temperature:_FillValue = -32768s ;
        sea_surface_temperature:add_offset = 273.15 ;
        sea_surface_temperature:scale_factor = 0.01 ;
        sea_surface_temperature:valid_min = -300s ;
        sea_surface_temperature:valid_max = 4500s ;
    byte quality_level(time, lat, lon) ;
        quality_level:long_name = "quality level of the original SST" ;
        quality_level:_FillValue = -128b ;
        quality_level:valid_min = -127b ;
        quality_level:valid_max = 127b ;
    byte sses_bias (time, lat, lon) ;
        sses_bias:long_name = "SSES bias error" ;
        sses_bias:units = "kelvin" ;
        sses_bias:_FillValue = -128b ;
        sses_bias:add_offset = 0. ;
        sses_bias:scale_factor = 0.01 ;
        sses_bias:valid_min = -127b ;
```

```

    sses_bias:valid_max = 127b ;
byte sses_standard_deviation (time, lat, lon) ;
    sses_standard_deviation:long_name = "SSES standard deviation
error" ;
    sses_standard_deviation:units = "kelvin" ;
    sses_standard_deviation:_FillValue = -128b ;
    sses_standard_deviation:add_offset = 1.27 ;
    sses_standard_deviation:scale_factor = 0.01 ;
    sses_standard_deviation:valid_min = -127b ;
    sses_standard_deviation:valid_max = 127b ;
short or_latitude(time, lat, lon) ;
    or_latitude:long_name = "original latitude of the SST value" ;
    or_latitude:units = "degrees_north" ;
    or_latitude:_FillValue = -32768s ;
    or_latitude:valid_min = -9000s ;
    or_latitude:valid_max = 9000s ;
    or_latitude:add_offset = 0. ;
    or_latitude:scale_factor = 0.01 ;
short or_longitude(time, lat, lon) ;
    or_longitude:long_name = "original longitude of the SST value"
;
    or_longitude:units = "degrees_east" ;
    or_longitude:_FillValue = -32768s ;
    or_longitude:valid_min = -18000s ;
    or_longitude:valid_max = 18000s ;
    or_longitude:add_offset = 0. ;
    or_longitude:scale_factor = 0.01 ;
short or_number_of_pixels(time, lat, lon) ;
    or_number_of_pixels:long_name = "number of pixels from the L2Ps
contributing to the SST value" ;
    or_number_of_pixels:_FillValue = -32768s ;
    or_number_of_pixels:valid_min = 0 ;
    or_number_of_pixels:valid_max = 32767s ;
short adjusted_sea_surface_temperature(time, lat, lon) ;
    adjusted_sea_surface_temperature:long_name = "adjusted sea
surface temperature" ;
    adjusted_sea_surface_temperature:standard_name =
"sea_surface_foundation_temperature" ;
    adjusted_sea_surface_temperature:units = "kelvin" ;
    adjusted_sea_surface_temperature:_FillValue = -32768s ;
    adjusted_sea_surface_temperature:add_offset = 273.15 ;
    adjusted_sea_surface_temperature:scale_factor = 0.01 ;
    adjusted_sea_surface_temperature:valid_min = -300s ;
    adjusted_sea_surface_temperature:valid_max = 4500s ;
    adjusted_sea_surface_temperature:reference="ref=ATS_NR_2P" ;
    adjusted_sea_surface_temperature:comment="priorities
:ATS_NR_2P, AVHRRMTA, NAR17_SST, NAR18_SST, AVHRR17_L, AVHRR_18_L,
AVHRR17_L, AVHRR18_G, SEVIRI_1H_SST, GOES_12_1H_SST, AMSRE, TMI, MODIS_A,
MODIS_T" ;
byte adjusted_standard_deviation_error(time, lat, lon) ;
    adjusted_standard_deviation_error:long_name = "standard
deviation error based on SSES and adjustment method" ;
    adjusted_standard_deviation_error:units = "kelvin" ;
    adjusted_standard_deviation_error:_FillValue = -128b ;
    adjusted_standard_deviation_error:add_offset = 0. ;
    adjusted_standard_deviation_error:scale_factor = 0.01 ;
    adjusted_standard_deviation_error:valid_min = -127b ;
    adjusted_standard_deviation_error:valid_max = 127b ;
short bias_to_reference_sst(time, lat, lon) ;
    bias_to_reference_sst:long_name = "bias error derived from
reference" ;

```

```

    bias_to_reference_sst:units = "kelvin" ;
    bias_to_reference_sst:_FillValue = -32768s ;
    bias_to_reference_sst:add_offset = 0. ;
    bias_to_reference_sst:scale_factor = 0.01 ;
    bias_to_reference_sst:valid_min = -32767s ;
    bias_to_reference_sst:valid_max = 32768s ;
byte standard_deviation_to_reference_sst(time, lat, lon)
    standard_deviation_to_reference_sst:long_name =
"standard_deviation error derived from reference" ;
    standard_deviation_to_reference_sst:units = "kelvin" ;
    standard_deviation_to_reference_sst:_FillValue = -128b ;
    standard_deviation_to_reference_sst:add_offset = 0. ;
    standard_deviation_to_reference_sst:scale_factor = 0.01 ;
    standard_deviation_to_reference_sst:valid_min = -32767s ;
    standard_deviation_to_reference_sst:valid_max = 32767s ;
byte source_of_sst(time, lat, lon) ;
    source_of_sst:long_name = "SST product origin" ;
    source_of_sst:_FillValue = -128b ;
    source_of_sst:valid_min = -127b ;
    source_of_sst:valid_max = 127b ;
    source_of_sst:comment = "codes listed in GDS2.0 Table 7-10" ;
byte satellite_zenith_angle(time, lat, lon) ;
    satellite_zenith_angle:long_name = "satellite zenith angle" ;
    satellite_zenith_angle:units = "degrees" ;
    satellite_zenith_angle:_FillValue = -128b ;
    satellite_zenith_angle:add_offset = 0. ;
    satellite_zenith_angle:scale_factor = 1. ;
    satellite_zenith_angle:valid_min = -90b ;
    satellite_zenith_angle:valid_max = 90b ;
byte solar_zenith_angle(time, lat, lon) ;
    solar_zenith_angle:long_name = "sun zenith angle" ;
    solar_zenith_angle:units = "degrees" ;
    solar_zenith_angle:_FillValue = -128b ;
    solar_zenith_angle:add_offset = 90. ;
    solar_zenith_angle:scale_factor = 1. ;
    solar_zenith_angle:valid_min = -127b ;
    solar_zenith_angle:valid_max = 127b ;

// global attributes:
:Conventions = "CF-1.4";
:title = "Multi-Sensor Merged Sea Surface Temperature";
:summary = "A merged, multi-sensor L3S Foundation SST product
from MyOcean.";
:references = "http://www.myocean.eu.org/products-
services.html";
:institution = "MyOcean";
:history = "MyOcean processor XXX.YY";
:comment = "WARNING:Some applications are unable to properly
handle signed byte values. If values are encountered > 127, please
substract 256 from this reported value." ;
:license = "These data are available free of charge under the
GMES data policy.";
:id = " CMSscolated2km-MYO-L3S-EURSEAS_AdjustedSST-v1";
:naming_authority = "org.ghrsst";
:product_version = "1.0";
:uuid = "B475601B-163E-4FC0-850D-14DD1EE32B7A";
:gds_version_id = "2.0";
:necdf_version_id = "4.1";
:date_created = "20090831T120000Z" ;
:start_time = "20090830T120000Z" ;
:time_coverage_start = "20090830T120000Z" ;

```

```

:stop_time = "20090830T123000Z" ;
:time_coverage_end = "20090830T123000Z" ;
:file_quality_level=1;
:source = " ATS_NR_2P, AVHRRMTA, NAR17_SST, NAR18_SST,
AVHRR17_L, AVHRR_18_L, AVHRR17_L, AVHRR18_G, SEVIRI_1H_SST, GOES_12_1H_SST,
AMSRE, TMI, MODIS_A, MODIS_T";
:platform = "Envisat, NOAA-17, NOAA-18, MetOpA, GOES12, Aqua,
Terra, MTSAT1R, MSG1, TRMM" ;
:sensor = "AATSR, AVHRR, AVHRR_GAC, SEVIRI, GOES_Imager, MODIS,
TMI, ";
:metadata_conventions = "Unidata Observation Dataset v1.0";
:metadata_link = "http://data.nodc.noaa.gov/waf/FGDC-
GHRSSST_all-CMSscolated2km-MYO-L3S-EURSEAS_AdjustedSST -v1.html";
:keywords = "Oceans > Ocean Temperature > Sea Surface
Temperature";
:keywords_vocabulary = "NASA Global Change Master Directory
(GCMD) Science Keywords";
:standard_name_vocabulary = "NetCDF Climate and Forecast (CF)
Metadata Convention";
:westernmost_longitude = "-40.000" ;
:easternmost_longitude = "55.000" ;
:southernmost_latitude = "20.000" ;
:northernmost_latitude = "70.000" ;
:spatial_resolution = "0.020 degree" ;
:geospatial_lat_units = "degrees north";
:geospatial_lat_resolution = "0.020";
:geospatial_lon_units = "degrees east";
:geospatial_lon_resolution = "0.020";
:acknowledgment = "Please acknowledge the use of these data
with the following statement: These data were provided by GHRSSST and the
MyOcean Regional Data Assembly Centre";
:creator_name = "MyOcean";
:creator_email = "Francoise.Orain@meteo.fr ";
:creator_url = " http://www.myocean.eu.org/";
:project = "Group for High Resolution SST";
:publisher_name = "GHRSSST Project Office";
:publisher_url = "http://www.ghrsst.org";
:publisher_email = "ghrsst-po@nceo.ac.uk";
:processing_level = "L3S";
:cdm_data_type = "grid";
}

```


### 10.31 Best Practices for Remapping Level 2 Data to a Fixed Grid

The remapping procedure consists in remapping the original L2P in swath projection onto a fixed grid. This remapping should preserve the traceability of the SST at pixel level and keep the best quality data.

**If the original and final grid resolutions are similar**, the nearest pixel remapping should be adopted. To do so, either a “source to target” or a “target to source” approach may be used. The latter, target to source, which consists in scanning the target grid points to find the nearest pixel in the source, is recommended since it avoids creating holes in the remapped field.

**If the original grid resolution is finer than the output grid**, (Figure 10-1) an averaging procedure can be adopted. For these cases the best practice is to average the values of all pixels which overlap the product cell entirely and which have a L2P confidence record `quality_level` value equal to the highest encountered within the cell, to produce a single value.



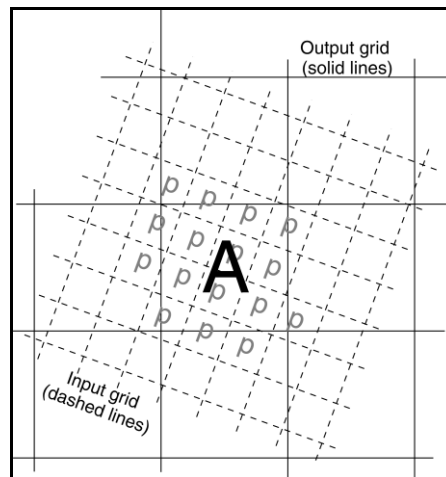

**Figure 10-1** To illustrate the approach when the L3 product output grid is over-sampled by the L2P input data. All pixels labelled *p* in the input data are possible contributors to the value for new cell *A*.

The following practices are recommended by the GDS:

- 1) In the case of a smaller L2P input pixel than the grid cell size, L3 data product cell values are derived from an average of the L2P pixel which completely overlap the product cell and which have a L2P quality record `quality_level` value equal to the highest encountered within the cell, to produce a single value.
- 2) For input pixels that straddle the boundary between output grid cells, a weighting function may be applied to the input values according to the degree of coverage of the output grid cell and according to the SSES.
- 3) Only the best quality original data within a grid cell should be averaged to produce the resulting SST value, to preserve the homogeneity of the SST quality (recommendation 1 above). In the case of averaging, the number of contributors can be recorded as well as the sum of the SST values and the sum of the square values of the SST. The SSES and ancillary data (if needed, for instance if there may be more than one SSES couple of values (bias and standard deviation) by quality level) must be averaged accordingly: the `s ses_bias` values are averaged similarly as the SST values, the new `s ses_standard_deviation` value is the square root of the averaged squared values of the contributing `s ses_standard_deviations`. The averaging should account for the nature of the original `L2P_flags`.
- 4) In the case of a larger pixel than the L3 grid cell size, 2 approaches can be adopted:
  1. The value of the L2P pixel is allocated to the grid cell the closest to the pixel centre.
  2. The output grid cell takes the value of the L2P pixel in which its centre lies. In this case **the original latitudes and longitudes of the pixel must be recorded**, to be able to detect where the original L2P pixel value has been duplicated.

**If the original grid resolution is larger than the output grid** (e.g., microwave instruments), as illustrated in Figure 10-2, the following practices are recommended by the GDS:

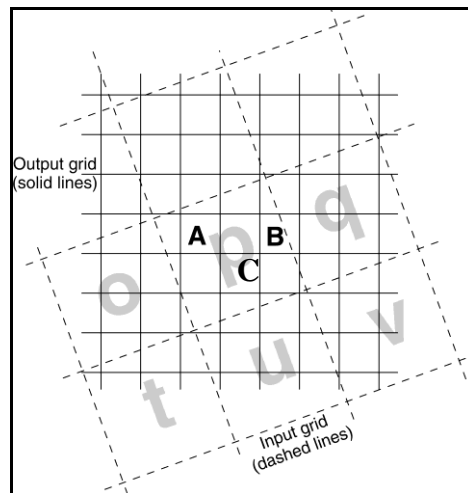


Figure 10-2 To illustrate the approach when the L3 output grid is under-sampled by the L2P data. Either Grid cell C is assigned the value of pixel *p*, Or grid cell A is assigned the value of pixel *p* and grid cell B is assigned the weighted average of *p* and *q* provided they both have quality flags with the same rating.

### 10.32 Best Practices for Collating Data from the Same Sensor and Platform

The collating procedure consists of gathering over a unique grid several orbits or slots (in the case of a geostationary satellite) of the **same sensor** on the **same platform**. This process is often known as “binning” the data. The collating procedure merges data with different times of observation.

- 1) For situations in which the collation is to be done for data collected within the same day, two cases are met in practice: collation of consecutive orbits in the case of data collected from polar orbiting sensors, or the merging of consecutive slots in the case of geostationary satellites. In both cases there may be multiple candidates for a grid cell.
  - a. To collate observations from overlapping orbits of the polar orbiting sensors, the selection procedure should prioritize data first by using the highest available quality data. If multiple observations share the same highest quality, one of two approaches should be taken: either the observation with the minimum satellite zenith angle should be selected, or the observations should be averaged. If the minimum satellite zenith angle approach is taken, the corresponding `sses_bias` and `sses_standard_deviation` should be selected as well. If the averaging approach is followed, the `sses_bias` and `sses_standard_deviation` should be averaged similarly (note that the new `sses_standard_deviation` value is the square root of the averaged squared values of the contributing `sses_standard_deviation` values). Also in the case of averaging, it is good practice to record the number of observations being averaged, the sum of the SST values, and the sum of the squared SST values. These values can be stored in the `or_number_pixels`, `sum_sst`, and `sum_square_sst` variables listed in Sections and 8 and 9.
  - b. In the case of geostationary data, the selection procedure must prioritize data showing the best quality level, and if equal, data closest to the representative time (central time) of the L3 time window. In the case of geostationary satellites, remapping is not a preliminary step to the collating procedure.
- 2) If averaging over multiple days, only the best quality original data within a grid cell should be averaged to produce the resulting SST value, to preserve the homogeneity of the SST quality. The number of contributors can be recorded (`or_number_pixels`) as well as the sum of the SST values (`sum_sst`) and the sum of the square values of the SST (`sum_square_sst`). The SSES values should be averaged accordingly: the `sses_bias` values are averaged in the same manner as the SST values and the new `sses_standard_deviation` value is the square root of the averaged squared values of

the contributing `ssea_standard_deviation` values. The averaging should preserve the nature of the original `L2P_flags`.

### 10.33 Best Practices for Adjustments

Most of individual sensors show regional biases resulting in limitations of the applied algorithms. The objective of the adjustment procedure is to provide a correction to these regional biases by comparison with a “reference sensor”, supposedly free from such biases. A variety of sources can be adopted as references in the adjustment procedure, ranging from AATSR or in situ measurement to using a median of sensors approach. The adopted reference must be recorded in the `adjusted_sea_surface_temperature` variable “reference” attribute.

The adjustment procedure includes the following steps:

1. application of the SSES,
2. determination of the bias adjustment to the reference,
3. evaluation of the error of the adjustment procedure

NB: A skin to subskin conversion may be needed. In that case, please refer to the STVAL recommendations. The type of the SST variables must be recorded in the `standard_names` of the `sea_surface_temperature` and `adjusted_sea_surface_temperature` variables. The bias adjustment value at pixel and the error of the adjustment procedure must be recorded in the corresponding variables (mandatory).

### 10.34 Best Practices for Super-Collating Data from Multiple Sensors and Platforms

The building of a super-collated file takes place by merging adjusted collated L3 files from various sensors over the same grid and over the same time window. There is one input candidate file (and hence one candidate observation) per sensor. There may be multiple candidates for a given grid cell originating from different sensors. To make the selection from among the candidates, a “decision tree” or selection hierarchy should be established *a priori*. This hierarchy depends on the objective of the super-collation procedure, and may be quite different for a moderate resolution (10km) super-collated over 24h aiming to feed a foundation SST analysis and for a high resolution (2km) hourly subskin SST super-collated aiming to feed a diurnal warming analysis, for example. Because the hierarchy must be established based on the intended use of the super-collated dataset that results, it is out of the scope of this document to define any single hierarchy. However, the adopted hierarchy must be described in the `comment` attribute of the `adjusted_sea_surface_temperature` variable. In addition, it is mandatory to provide the source of the SST (`source_of_sst`) at the grid cell level.

## 11 Level 4 (L4) Product Specification

### 11.1 Overview description of the GHRSSST L4 data product

L4 products are the analyzed SST products, usually derived from GHRSSST L2P products. L4 data products should ideally be made available within the GHRSSST R/GTS framework to the user community within 24 hours. For every L4 file that is generated, appropriate ISO metadata (specified in Section 12.1) must also be created and registered at the GHRSSST Master Metadata Repository (MMR) system.

L4 products include gap-free analyzed SST data together with a number of ancillary fields that simplify interpretation and application of the SST data. Data providers are responsible for providing documentation on their analysis procedure. The common format of L4 products allows data users to code with the security that as new SST data products are brought on-line, very minimal code changes are required to make full use of new L4 product. Time previously spent on coding different I/O routines for each satellite data set can be spent working with the data to produce results.

The GHRSSST Science Team determined that there will be 4 mandatory fields that form the core data content of a GHRSSST L4 data file. In addition to global attributes and geo-location information, RDACs must produce the following within a L4 file:

- Sea Surface temperature data (SST)
- Error estimates for SST data
- Sea ice fraction
- Land/sea/ice flag

In addition there are a number of optional fields that may be used at the data provider's discretion.

**Table 11-1 Summary description of the contents within a GHRSSST L4 data product**

Description	Required	Relevant section of this document
Dimensions (e.g., $i \times j \times k$ )	Mandatory	Section 8.1
Global attributes	Mandatory	Section 8.2
$[i \times j \times k]$ geolocation data	Mandatory	Section 8.4
$[i \times j \times k]$ array of SST data	Mandatory	Section 11.3
$[i \times j \times k]$ array of error estimates	Mandatory	Section 11.4
$[i \times j \times k]$ array of sea ice fraction	Mandatory	Section 11.5
$[i \times j \times k]$ array of land/sea/ice mask	Mandatory	Section 11.6
$[i \times j \times k]$ array of optional fields	Optional	

### 11.2 L4 data record format specification

L4 analysed data products are derived from an analysis procedure implemented at regular intervals (daily, six-hourly or other time periods). L4 data products include SST, error statistics, sea ice fraction, land/sea/ice `mask`, and other optional data for each grid-cell. A six-byte experimental block is available for data providers to test new aspects of the file or information specific to the analysis system that will eventually transition into a GHRSSST standard L4 analysis field once tested.

Table 11-2 describes the format of GDS L4 grid cell ancillary data that should be created for each L4 grid cell. In the following sections, each variable within the L4 data file is described in detail.

Table 11-2 L4 SST product data fields

Name	Description	Units
<b>analysed_sst</b>	SST from analysis system	K, scaled, short
<b>analysis_error</b>	Error standard deviation estimate	K, scaled, short
<b>sea_ice_fraction</b>	Fractional Sea Ice area concentration.	0-1 scaled byte
<b>mask</b>	land/ice/lake mask	Flag [8bits]
<b>sea_ice_fraction_error</b>	If the error estimates on the sea ice field are available, it is recommended to provide this information as an experimental field called <b>sea_ice_fraction_error</b> variable.	0-1 scaled byte
Experimental fields	Each grid cell has a 6 byte storage space available for RDACs and other users to include specific information. The policy for use of these fields is that they should make a useful contribution to the data sets and to GHRSSST. Ideally experimental fields should transition into full fields once stable and agreed by the GHRSSST Science Team. Use of these fields requires that a description of the content and specification is agreed with the GHRSSST Data Assembly and Systems Technical Advisory Group and that GDS 2.0 variable attributes are included in the variable. See Section 8.3.	6 bytes (maximum). Defined by data providers.

### 11.3 Variable analysed\_sst

The variable 'analysed\_sst' will be included with the format requirements shown in Table 11-3. The data provider is responsible for providing GHRSSST with documentation on how the analysed SST is determined. Note that the RDAC should place `_FillValue` in pixels that fall on land.

Table 11-3 CDL example description of analysed\_sst variable

Storage type	Name	Description	Unit
short	<b>analysed_sst</b>	SST values from analysis systems	kelvin
<b>CDL example description</b>			
<pre>short analysed_sst(time, lat, lon) ;   analysed_sst:long_name = "analysed sea surface temperature" ;   analysed_sst:standard_name = "sea_surface_foundation_temperature" ;    analysed_sst:units = "kelvin" ;   analysed_sst:_FillValue = -32768 ;   analysed_sst:add_offset = 273.15 ;   analysed_sst:scale_factor = 0.01 ;   analysed_sst:valid_min = -300 ;   analysed_sst:valid_max = 4500 ;   analysed_sst:source='AQUA_AMSRE_V5, AQUA_MODIS_V3, NOAA16_AVHRR_V4.1   analysed_sst:comment = "This will be different for each analysis system"</pre>			

### 11.4 Variable analysis\_error

The variable 'analysis\_error' will be included with the format requirements shown in Table 11-4. The data provider is responsible for providing GHRSSST with documentation on how **analysis\_error** is determined.

Table 11-4 CDL example description of `analysis_error` variable

Storage type	Name	Description	Unit
short	<code>analysis_error</code>	Error estimate from analysis system	kelvin
<b>CDL example description</b>			
<pre>short analysis_error(time, lat, lon) ;   analysis_error:long_name = "estimated error standard deviation of analysed_sst" ;   analysis_error:standard_name = "sea_surface_temperature_error" ;   analysis_error:units = "kelvin" ;   analysis_error:_FillValue = -32768;   analysis_error:add_offset = 0. ;   analysis_error:scale_factor = 0.01 ;   analysis_error:valid_min = 0;   analysis_error:valid_max = 32767;   analysis_error:comment = "This will be different for each system"</pre>			

## 11.5 Variable `sea_ice_fraction`

The variable '`sea_ice_fraction`' will be included with the format requirements shown in Table 11-5. Some SST data are contaminated in part or wholly by sea ice and the L4 variable `sea_ice_fraction` is used to quantify the fraction of an area contaminated with sea ice.

If the error estimates on the sea ice field are available, it is recommended to provide this information as an experimental field called `sea_ice_fraction_error` variable.

Table 11-5 CDL example description of `sea_ice_fraction` variable

Storage type	Name	Description	Unit
byte	<code>sea_ice_fraction</code>	Fractional sea ice area concentration	Fraction
<b>CDL example description</b>			
<pre>byte sea_ice_fraction(time, lat, lon) ;   sea_ice_fraction:long_name = "sea ice area fraction" ;   sea_ice_fraction:standard_name = "sea_ice_area_fraction" ;   sea_ice_fraction:units = "1" ;   sea_ice_fraction:_FillValue = -128 ;   sea_ice_fraction:add_offset = 0. ;   sea_ice_fraction:scale_factor = 0.01 ;   sea_ice_fraction:valid_min = 0 ;   sea_ice_fraction:valid_max = 100 ;   sea_ice_fraction:source = "EUMETSAT SAF O&amp;SI sea ice version 1.0"   sea_ice_fraction:comment = "This will be different for each system"</pre>			
<b>Comments</b>			
Sea Ice area fraction units are between 0 -> 1.0. Include source and version number in <code>sea_ice_fraction:source</code> .			

## 11.6 Variable `mask`

The variable '`mask`' will be included with the format requirements shown in Table 11-6.

Table 11-6 CDL example description of `mask` variable

Storage type	Name	Description	Unit
byte	<code>Mask</code>	land/sea/ice/lake mask	none
<b>CDL example description</b>			

<pre> byte mask(time, lat, lon) ;   mask:long_name = "land sea ice lake bit mask" ;   mask:_FillValue = 0;   mask:valid_min = 0b;   mask:valid_max = 4b;   mask:flag_masks = "0b, 1b, 2b, 3b, 4b"; ...mask:flag_values = "0, 1, 2, 4, 8";   mask:flag_meanings = "water land optional_lake_surface sea_ice optional_river_surface";   mask:source = "NAVOCEANO_landmask_v1.0 NSIDC_icemask_4.5 GSFC_MODIS_lakemask_v3.1"; </pre>
<p><b>Comments</b></p> <p>This is a land/sea/ice mask with the following bit values:  Bit 0=1 water in grid  Bit 1=1=land in grid  Bit 2=1=optional: lake surface in grid  Bit 3=1=sea ice  Bit 4=1= optional: river surface in grid  Bits [5-7] spare  Note that the lake and river surface bit values are optional.  The <code>source</code> attribute should list any data products used in creating this mask. List <code>provider_type_of_mask_version_mask</code>.</p>

## 11.7 Optional Variable `sea_ice_fraction_error`

If the error estimates on the sea ice field are available, it is recommended to provide this information as an experimental field called `sea_ice_fraction_error` variable. The data provider is responsible for providing GHRSSST with documentation on how `sea_ice_fraction_error` is determined.

Table 11-7 CDL example description of `sea_ice_fraction_error` variable

Storage type	Name	Description	Unit
byte	<code>sea_ice_fraction_error</code>	Fractional sea ice area concentration	Fraction
<b>CDL example description</b>			
<pre> byte sea_ice_fraction_error(time, lat, lon) ;   sea_ice_fraction_error:long_name = "sea ice area fraction error estimate" ;   sea_ice_fraction_error:units = "1" ;   sea_ice_fraction_error:_FillValue = -128 ;   sea_ice_fraction_error:add_offset = 0. ;   sea_ice_fraction_error:scale_factor = 0.01 ;   sea_ice_fraction_error:valid_min = 0 ;   sea_ice_fraction_error:valid_max = 100 ;   sea_ice_fraction_error:source = "EUMETSAT SAF O&amp;SI sea ice version 1.0"   sea_ice_fraction_error:comment = "This will be different for each system" </pre>			

## 11.8 Sample GHRSSST L4 file (CDL header)

A complete CDL description of a Level 4 data file (without an experimental field) is given below:

```

dimensions:
  time = 1 ;
  lat = 800 ;
  lon = 2125 ;

```

```

variables:
    long time(time) ;
        time:long_name = "reference time of sst field" ;
        time:standard_name = "time";
        time:axis = "T";
        time:calendar = "Gregorian"
        time:units = "seconds since 1981-01-01 00:00:00" ;
    float lat(lat) ;
        lat:standard_name = "latitude" ;
        lat:units = "degrees_north" ;
        lat:valid_min = -90. ;
        lat:valid_max = 90. ;
        lat:axis = "Y";
        lat:reference_datum = "geographical coordinates, WGS84
projection" ;
    float lon(lon) ;
        lon:standard_name = "longitude" ;
        lon:units = "degrees_east" ;
        lon:valid_min = -180. ;
        lon:valid_max = 180. ;
        lon:reference_datum = "geographical coordinates, WGS84
projection" ;
        lon:axis = "X";
    short analysed_sst(time, lat, lon) ;
        analysed_sst:long_name = "analysed sea surface temperature" ;
        analysed_sst:standard_name = "sea_surface_foundation_temperature" ;
        analysed_sst:units = "kelvin" ;
        analysed_sst:FillValue = -32768 ;
        analysed_sst:add_offset = 273.15 ;
        analysed_sst:scale_factor = 0.01 ;
        analysed_sst:valid_min = -300 ;
        analysed_sst:valid_max = 4500 ;
        analysed_sst:source='AQUA_AMSRE_V5, AQUA_MODIS_V3,
NOAA16_AVHRR_V4.1
        analysed_sst:comment = "This will be different for each analysis
system"
    short analysis_error(time, lat, lon) ;
        analysis_error:long_name = "estimated error standard deviation of
analysed_sst" ;
        analysis_error:standard_name = "sea_surface_temperature_error" ;
        analysis_error:units = "kelvin" ;
        analysis_error:FillValue = -32768;
        analysis_error:add_offset = 0. ;
        analysis_error:scale_factor = 0.01 ;
        analysis_error:valid_min = 0;
        analysis_error:valid_max = 32767;
        analysis_error:comment = "This will be different for each system" byte
    sea_ice_fraction(time, lat, lon) ;
        sea_ice_fraction:long_name = "sea ice area fraction" ;
        sea_ice_fraction:standard_name = "sea_ice_area_fraction" ;
        sea_ice_fraction:units = "1" ;
        sea_ice_fraction:FillValue = -128 ;
        sea_ice_fraction:add_offset = 0. ;
        sea_ice_fraction:scale_factor = 0.01 ;
        sea_ice_fraction:valid_min = 0 ;
        sea_ice_fraction:valid_max = 100 ;
        sea_ice_fraction:source = "EUMETSAT SAF O&SI sea ice version 1.0"
        sea_ice_fraction:comment = "This will be different for each system"
    byte mask(time, lat, lon) ;
        mask:long_name = "land sea ice lake bit mask" ;
        mask:FillValue = 0;

```



```

mask:valid_min = 0b;
mask:valid_max = 4b;
mask:flag_masks = "0b, 1b, 2b, 3b, 4b";
..mask:flag_values = "0, 1, 2, 4, 8";
mask:flag_meanings = "water land optional_lake_surface sea_ice
optional_river_surface";
mask:source = "NAVOCEANO_landmask_v1.0 NSIDC_icemask_4.5
GSFC_MODIS_lakemask_v3.1";

// global attributes:
:Conventions = "CF-1.4";
:title = "Analysed foundation sea surface temperature over the
global ocean ";
:summary = "A merged, multi-sensor L4 Foundation SST product
from MyOcean.";
:references = "http://www.myocean.eu.org/products-
services.html";
:institution = "MyOcean";
:history = "MyOcean processor XXX.YY";
:comment = "WARNING:Some applications are unable to properly
handle signed byte values. If values are encountered > 127, please
subtract 256 from this reported value." ;
:license = "These data are available free of charge under the
GMES data policy.";
:id = "20070503T120000-UKMO-L4_GHRSSST-SSTfnd-OSTIA-GLOB-v02.0-
fv01.0.nc ";
:naming_authority = "org.ghrsst";
:product_version = "1.0";
:uuid = "B475601B-163E-4FC0-850D-14DD1EE32B7Z";
:gds_version_id = "2.0";
:necdf_version_id = "4.1";
:date_created = "20090831T120000Z" ;
:start_time = "20090830T120000Z" ;
:time_coverage_start = "20090830T120000Z" ;
:stop_time = "20090830T123000Z" ;
:time_coverage_end = "20090830T123000Z" ;
:file_quality_level=1;
:source = "ATS_NR_2P, AVHRRMTA, NAR17_SST, NAR18_SST,
AVHRR17_L, AVHRR_18_L, AVHRR17_L, AVHRR18_G, SEVIRI_1H_SST, GOES_12_1H_SST,
AMSRE, TMI, MODIS_A, MODIS_T";
:platform = "Envisat, NOAA-17, NOAA-18, MetOpA, GOES12, Aqua,
Terra, MTSAT1R, MSG1, TRMM" ;
:sensor = "AATSR, AVHRR, AVHRR_GAC, SEVIRI, GOES_Imager, MODIS,
TMI, ";
:metadata_conventions = "Unidata Observation Dataset v1.0";
:metadata_link = "http://data.nodc.noaa.gov/waf/FGDC-
GHRSSST_all-CMSscolated2km-MYO-L3S-EURSEAS_AdjustedSST -v1.html";
:keywords = "Oceans > Ocean Temperature > Sea Surface
Temperature";
:keywords_vocabulary = "NASA Global Change Master Directory
(GCMD) Science Keywords";
:standard_name_vocabulary = "NetCDF Climate and Forecast (CF)
Metadata Convention";
:westernmost_longitude = "-180.000" ;
:easternmost_longitude = "180.000" ;
:southernmost_latitude = "90.000" ;
:northernmost_latitude = "90.000" ;
:spatial_resolution = "0.005 degree" ;
:geospatial_lat_units = "degrees north";
:geospatial_lat_resolution = "0.005";
:geospatial_lon_units = "degrees east";

```

```
        :geospatial_lon_resolution = "0.005";
        :acknowledgment = "Please acknowledge the use of these data
with the following statement: These data were provided by GHR SST and the
MyOcean Regional Data Assembly Centre";
        :creator_name = "MyOcean";
        :creator_email = "Francoise.Orain@meteo.fr ";
        :creator_url = "http://www.myocean.eu.org/";
        :project = "Group for High Resolution SST";
        :publisher_name = "GHR SST Project Office";
        :publisher_url = "http://www.ghrsst.org";
        :publisher_email = "ghrsst-po@nceo.ac.uk";
        :processing_level = "L4";
        :cdm_data_type = "grid";
}
```

## 12 GHRSSST Multi-Product Ensemble (GMPE) Product Specification

### 12.1 Overview description of the GMPE data product

The GMPE product is a combination of analysed L4 SST products (which in turn are derived from GHRSSST L2P and L3 products). The GMPE data product is made available within the GHRSSST R/GTS framework to the user community in real time within 24 hours of the L4 analyses becoming available. For every GMPE file that is generated, appropriate ISO metadata (Section 12.1) must also be created and registered at the GHRSSST Master Metadata Repository (MMR) system.

The GMPE product includes gap-free ensemble median and standard deviation SST data. Each of the contributing L4 analyses is obtained through the GHRSSST R/GTS framework once per day. The L4 products are interpolated onto a common 1/4° resolution grid and the ensemble median and standard deviation are calculated. These fields and the anomalies of each of the L4 analyses to the ensemble median are then output to a netCDF file with the format described in this Section. These fields, along with global attributes and geo-location information, form the core data content of a GMPE data file:

- Ensemble median Sea Surface Temperature (SST)
- Ensemble standard deviation SST
- Number of analyses contributing to the ensemble at each grid point
- Anomaly of each contributing analysis from the ensemble median.

In addition there are optional fields that may be used at the data provider's discretion. GMPE products also require three new dimensions not used in other GHRSSST products levels. These dimensions are `fields`, `nv`, and `field_name_length`. The number of input L4 analysis products is used for `fields` and `field_name_length` is set to 50 to account for the length of the input L4 analysis product names. A GMPE variable, `time_bounds`, requires the dimension `nv`.

The GMPE product information is summarized in Table 12-1.

**Table 12-1 Summary description of the contents within a GMPE data product**

Description	Required	Relevant section of this document
Dimensions (e.g., i x j x k x l)	Mandatory	Section 8.1
Global attributes	Mandatory	Section 8.2
[i x j x k] geolocation data	Mandatory	Section 8.4
[i x j x k] array of median SST	Mandatory	Section 12.3
[i x j x k] array of standard deviation SST	Mandatory	Section 12.4
[i x j x k] array of number of contributing analyses	Mandatory	Section 12.5
[i x j x l x k] array of anomaly fields	Mandatory	Section 12.6
[l x j x k] array of optional fields	Optional	

### 12.2 GMPE data record format specification

GMPE data products are derived from a procedure produced at regular daily time periods. The product includes ensemble median SST, ensemble standard deviation SST, number of contributing analyses, and anomalies of each input L4 analysis to the ensemble median.

**Table 12-2 L4 SST product data fields**

Name	Description	Units
------	-------------	-------

<b>analysed_sst</b>	Ensemble median SST of input L4 analyses	K, scaled, short
<b>standard_deviation</b>	Ensemble standard deviation of input L4 analyses	K, scaled, short
<b>analysis_number</b>	Number of contributing L4 analyses for each grid point	Number, byte
<b>anomaly_fields</b>	Differences between each of the input L4 analyses and the ensemble median SST.	K, scaled, short

## 12.3 Variable analysed\_sst

The variable 'analysed\_sst' will be included with the format requirements shown in Table 12-3.

Table 12-3 CDL example description of analysed\_sst variable

Storage type	Name	Description	Unit
short	analysed_sst	Ensemble median SST of input L4 analyses	kelvin
<b>CDL example description</b>			
<pre>short analysed_sst(time, lat, lon) ;   analysed_sst:long_name = " median SST from GMPE " ;   analysed_sst:standard_name = "sea_surface_temperature" ;   analysed_sst:units = "kelvin" ;   analysed_sst:_FillValue = -32768s ;   analysed_sst:add_offset = 273.15 ;   analysed_sst:scale_factor = 0.01 ;   analysed_sst:valid_min = -300s ;   analysed_sst:valid_max = 4500s ;   analysed_sst:comment = "" ;   analysed_sst:source = "ABOM-L4LRfnd-GLOB-GAMSSA_28km, EUR- L4HRfnd-GLOB-ODYSSEA, NAVO-L4HR1m-GLOB-K10_SST, NCDC-L4LRfnd-GLOB- AVHRR_AMSRE_OI, NCDC-L4LRfnd-GLOB-AVHRR_OI, REMSS-L4HRfnd-GLOB- amsre_OI, REMSS-L4HRfnd-GLOB-mw_ir_OI, UKMO-L4HRfnd-GLOB-OSTIA" ;</pre>			

## 12.4 Variable standard\_deviation

The variable 'standard\_deviation' will be included with the format requirements shown in Table 12-4. The current CF conventions don't contain a standard name for SST standard deviation, so the standard name attribute is not currently included in this variable.

Table 12-4 CDL example description of standard\_deviation variable

Storage type	Name	Description	Unit
short	standard_deviation	Ensemble standard deviation of input L4 analyses	kelvin
<b>CDL example description</b>			
<pre>short standard_deviation (time, lat, lon) ;   standard_deviation:long_name = "Standard deviation of input analyses" ;   standard_deviation:units = "kelvin" ;   standard_deviation:_FillValue = -32768s ;   standard_deviation:add_offset = 32. ;   standard_deviation:scale_factor = 0.001 ;   standard_deviation:valid_min = -32000s ;   standard_deviation:valid_max = 32000s ;   standard_deviation:comment = "" ;   standard_deviation:source = "ABOM-L4LRfnd-GLOB-GAMSSA_28km,</pre>			

```
EUR-L4HRfnd-GLOB-ODYSSEA, NAVO-L4HR1m-GLOB-K10_SST, NCDC-L4LRfnd-
GLOB-AVHRR_AMSRE_OI, NCDC-L4LRfnd-GLOB-AVHRR_OI, REMSS-L4HRfnd-GLOB-
amsre_OI, REMSS-L4HRfnd-GLOB-mw_ir_OI, UKMO-L4HRfnd-GLOB-OSTIA" ;
```

## 12.5 Variable analysis\_number

The variable 'analysis\_number' will be included with the format requirements shown in Table 8-4. The current CF conventions don't contain a standard name for this type of variable, so the standard name attribute is not currently included in this variable.

Table 12-4 CDL example description of analysis\_number variable

Storage type	Name	Description	Unit
byte	analysis_number	Number of L4 analyses contributing to the ensemble at each grid point	Unit
<b>CDL example description</b>			
<pre>byte analysis_number (time, lat, lon) ;   analysis_number:long_name = "Number of contributing analyses" ;   analysis_number:units = " " ;   analysis_number:FillValue = -128b;   analysis_number:add_offset = 0. ;   analysis_number:scale_factor = 1. ;   analysis_number:valid_min = -127b ;   analysis_number:valid_max = 127b ;   analysis_number:comment = "" ;   analysis_number:source = "ABOM-L4LRfnd-GLOB-GAMSSA_28km, EUR- L4HRfnd-GLOB-ODYSSEA, NAVO-L4HR1m-GLOB-K10_SST, NCDC-L4LRfnd-GLOB- AVHRR_AMSRE_OI, NCDC-L4LRfnd-GLOB-AVHRR_OI, REMSS-L4HRfnd-GLOB- amsre_OI, REMSS-L4HRfnd-GLOB-mw_ir_OI, UKMO-L4HRfnd-GLOB-OSTIA" ;</pre>			

## 12.6 Variable anomaly\_fields

The variable 'anomaly\_fields' will be included with the format requirements shown in Table 12-5. The current CF conventions don't contain a standard name for this type of variable, so the standard name attribute is not currently included in this variable. A new dimension, **fields**, is required for this variable to account for the number of each input L4 field going into the ensemble.

Table 12-5. CDL example description of analysis\_number variable

Storage type	Name	Description	Unit
short	anomaly_fields	Difference of each input L4 field and the ensemble median.	K
<b>CDL example description</b>			
<pre>short anomaly_fields (time, fields, lat, lon) ;   anomaly_fields:long_name = "Anomaly of input analyses from the ensemble median" ;   anomaly_fields:units = "kelvin" ;   anomaly_fields:FillValue = -32768s ;   anomaly_fields:add_offset = 0.0 ;   anomaly_fields:scale_factor = 0.01 ;   anomaly_fields:valid_min = -3000s ;   anomaly_fields:valid_max = 3000s ;   anomaly_fields:comment = "" ;   anomaly_fields:source = "ABOM-L4LRfnd-GLOB-GAMSSA_28km, EUR- L4HRfnd-GLOB-ODYSSEA, NAVO-L4HR1m-GLOB-K10_SST, NCDC-L4LRfnd-GLOB- AVHRR_AMSRE_OI, NCDC-L4LRfnd-GLOB-AVHRR_OI, REMSS-L4HRfnd-GLOB-</pre>			

```
amsre_OI, REMSS-L4HRfnd-GLOB-mw_ir_OI, UKMO-L4HRfnd-GLOB-OSTIA" ;
```

## 12.7 Sample GMPE file (CDL header)

A complete CDL description of a GMPE data file is given below:

```
dimensions:
    lon = 1440 ;
    lat = 720 ;
    time = 1 ;
    fields = 8 ;
    field_name_length = 50;
    nv = 2 ;
variables:
    long time(time) ;
        time:long_name = "reference time of sst field" ;
        time:standard_name = "time";
        time:axis = "T";
        time:calendar = "Gregorian"
        time:units = "seconds since 1981-01-01 00:00:00" ;
    float lat(lat) ;
        lat:standard_name = "latitude" ;
        lat:units = "degrees_north" ;
        lat:valid_min = -90. ;
        lat:valid_max = 90. ;
        lat:axis = "Y";
        lat:reference_datum = "geographical coordinates, WGS84
projection" ;
    float lon(lon) ;
        lon:standard_name = "longitude" ;
        lon:units = "degrees_east" ;
        lon:valid_min = -180. ;
        lon:valid_max = 180. ;
        lon:reference_datum = "geographical coordinates, WGS84
projection" ;
        lon:axis = "X";
    int time_bounds(time, nv) ;
        time_bounds:long_name = "time spanned by input L4 analyses" ;
    char field_name(fields, field_name_length) ;
        fields:long_name = "name of the contributing L4 analyses" ;
        fields:units = " " ;
        fields:comment = "" ;
    short analysed_sst(time, lat, lon) ;
        analysed_sst:long_name = " median SST from GMPE " ;
        analysed_sst:standard_name = "sea_surface_temperature" ;
        analysed_sst:units = "kelvin" ;
        analysed_sst:FillValue = -32768s ;
        analysed_sst:add_offset = 273.15 ;
        analysed_sst:scale_factor = 0.01 ;
        analysed_sst:valid_min = -300s ;
        analysed_sst:valid_max = 4500s ;
        analysed_sst:comment = "" ;
        analysed_sst:source = "ABOM-L4LRfnd-GLOB-GAMSSA_28km, EUR-L4HRfnd-
GLOB-ODYSSEA, NAVO-L4HR1m-GLOB-K10_SST, NCDC-L4LRfnd-GLOB-AVHRR_AMSRE_OI,
NCDC-L4LRfnd-GLOB-AVHRR_OI, REMSS-L4HRfnd-GLOB-amsre_OI, REMSS-L4HRfnd-
GLOB-mw_ir_OI, UKMO-L4HRfnd-GLOB-OSTIA" ;
        short standard_deviation (time, lat, lon) ;
            standard_deviation:long_name = "Standard deviation of input
analyses" ;
            standard_deviation:units = "kelvin" ;
```

```

standard_deviation:FillValue = -32768s ;
standard_deviation:add_offset = 32. ;
standard_deviation:scale_factor = 0.001 ;
standard_deviation:valid_min = -32000s ;
standard_deviation:valid_max = 32000s ;
standard_deviation:comment = "" ;
standard_deviation:source = "ABOM-L4LRfnd-GLOB-GAMSSA_28km, EUR-
L4HRfnd-GLOB-ODYSSEA, NAVO-L4HR1m-GLOB-K10_SST, NCDC-L4LRfnd-GLOB-
AVHRR_AMSRE_OI, NCDC-L4LRfnd-GLOB-AVHRR_OI, REMSS-L4HRfnd-GLOB-amsre_OI,
REMSS-L4HRfnd-GLOB-mw_ir_OI, UKMO-L4HRfnd-GLOB-OSTIA" ;
byte analysis_number (time, lat, lon) ;
analysis_number:long_name = "Number of contributing analyses" ;
analysis_number:units = " " ;
analysis_number:FillValue = -128b;
analysis_number:add_offset = 0. ;
analysis_number:scale_factor = 1. ;
analysis_number:valid_min = -127b ;
analysis_number:valid_max = 127b ;
analysis_number:comment = "" ;
analysis_number:source = "ABOM-L4LRfnd-GLOB-GAMSSA_28km, EUR-
L4HRfnd-GLOB-ODYSSEA, NAVO-L4HR1m-GLOB-K10_SST, NCDC-L4LRfnd-GLOB-
AVHRR_AMSRE_OI, NCDC-L4LRfnd-GLOB-AVHRR_OI, REMSS-L4HRfnd-GLOB-amsre_OI,
REMSS-L4HRfnd-GLOB-mw_ir_OI, UKMO-L4HRfnd-GLOB-OSTIA" ;
short anomaly_fields (time, fields, lat, lon) ;
anomaly_fields:long_name = "Anomaly of input analyses from the
ensemble median" ;
anomaly_fields:units = "kelvin" ;
anomaly_fields:FillValue = -32768s ;
anomaly_fields:add_offset = 0.0 ;
anomaly_fields:scale_factor = 0.01 ;
anomaly_fields:valid_min = -3000s ;
anomaly_fields:valid_max = 3000s ;
anomaly_fields:comment = "" ;
anomaly_fields:source = "ABOM-L4LRfnd-GLOB-GAMSSA_28km, EUR-
L4HRfnd-GLOB-ODYSSEA, NAVO-L4HR1m-GLOB-K10_SST, NCDC-L4LRfnd-GLOB-
AVHRR_AMSRE_OI, NCDC-L4LRfnd-GLOB-AVHRR_OI, REMSS-L4HRfnd-GLOB-amsre_OI,
REMSS-L4HRfnd-GLOB-mw_ir_OI, UKMO-L4HRfnd-GLOB-OSTIA" ;

// global attributes:
:Conventions = "CF-1.4";
:title = " GHRSSST Multiproduct Ensemble (GMPE) data ";
:summary = "A multi-product ensemble median SST for the global
ocean together with anomaly fields from each ensemble member and
uncertainty estimates.";
:references = "http://www.metoffice.gov.uk";
:institution = "MetOffice UK";
:history = "GMPE processor XXX.YY";
:comment = "WARNING:Some applications are unable to properly
handle signed byte values. If values are encountered > 127, please
substract 256 from this reported value." ;
:license = "These data are available free of charge under the
GMES data policy.";
:id = " 20070503T120000-UKMO-L4LRens-GLOB-GMPE-v02.0-fv01.0.nc
";

:naming_authority = "org.ghrsst";
:product_version = "1.0";
:uuid = "B475601B-163E-4FC0-850D-14DD1EE32B7Z";
:gds_version_id = "2.0";
:necdf_version_id = "4.1";
:date_created = "20090831T120000Z" ;
:start_time = "20090830T120000Z" ;

```

```

:time_coverage_start = "20090830T120000Z" ;
:stop_time = "20090830T123000Z" ;
:time_coverage_end = "20090830T123000Z" ;
:file_quality_level=1;
:source = "
OSTIA_filename.nc,rtg_filename.nc,NAVO_K10_sst_filename.nc,mgdsst_filename.
nc,rssmw_filename.nc,rssmwir_filename.nc,FNMOC_filename.nc,AVHRR_OI_filenam
e.nc,ODYSSEA_filename.nc,CMC_filename.nc,GAMSSA_filename.nc";
:platform = "Envisat, NOAA-17, NOAA-18, MetOpA, GOES12, Aqua,
Terra, MTSAT1R, MSG1, TRMM" ;
:sensor = "AATSR, AVHRR, AVHRR_GAC, SEVIRI, GOES_Imager, MODIS,
TMI, ";
:metadata_conventions = "Unidata Observation Dataset v1.0";
:metadata_link = "http://data.nodc.noaa.gov/waf/FGDC-
GHRSSST_all-UKMO-L4LRens-GLOB-GMPE-v02.0-v1.html";
:keywords = "Oceans > Ocean Temperature > Sea Surface
Temperature";
:keywords_vocabulary = "NASA Global Change Master Directory
(GCMD) Science Keywords";
:standard_name_vocabulary = "NetCDF Climate and Forecast (CF)
Metadata Convention";
:westernmost_longitude = "-180.000" ;
:easternmost_longitude = "180.000" ;
:southernmost_latitude = "-90.000" ;
:northernmost_latitude = "90.000" ;
:spatial_resolution = "0.25 degree" ;
:geospatial_lat_units = "degrees north";
:geospatial_lat_resolution = "0.25";
:geospatial_lon_units = "degrees east";
:geospatial_lon_resolution = "0.25";
:acknowledgment = "Please acknowledge the use of these data
with the following statement: These data were provided by GHRSSST and the
MyOcean Regional Data Assembly Centre";
:creator_name = "MyOcean";
:creator_email = "Francoise.Orain@meteo.fr ";
:creator_url = "http://www.myocean.eu.org/";
:project = "Group for High Resolution SST";
:publisher_name = "GHRSSST Project Office";
:publisher_url = "http://www.ghrsst.org";
:publisher_email = "ghrsst-po@nceo.ac.uk";
:processing_level = "L4_GMPE";
:cdm_data_type = "grid";
}

```



## 13 GHRSSST Metadata Specification

### 13.1 Overview Description of the GHRSSST Metadata Model

The GHRSSST data are global collections compiled by scientists and data production systems in many countries, so the ISO 19115-2 International Geographic Metadata Standard (remote sensing extensions) has been adopted as the standard for GDS 2.0 metadata. This standard provides a structured way to manage not just the data usage and granule-level discovery metadata provided by the CF metadata in the GHRSSST netCDF files, but also collection-level discovery, data quality, lineage, and other information needed for long-term stewardship and necessary metadata management. The GHRSSST GDAC and LTSRF work with individual RDACs to create and maintain the collection-level ISO record for each of their datasets (one collection level record for each product line). The collection level record will be combined by the GDAC with metadata embedded in the netCDF-4 files preferred by the GDS 2.0. In the event that an RDAC chooses to produce netCDF-3 files instead of netCDF-4, they must also create a separate XML metadata record for each granule (following the GDS 1.6 specification detail in [RD-1]). RDACs will assist with maintaining the collection portion of the ISO metadata record and will update it on an as-needed basis. This approach ensures that for every L2P, L3, L4, or GMPE granule that is generated, appropriate ISO metadata can be registered at the GHRSSST Master Metadata Repository (MMR) system. Details of this approach are provided in Section 13.3 after a brief description of the heritage GDS 1.0 metadata approach.

### 13.2 Evolution from the GHRSSST GDS 1.0 Metadata Model

The GDS 1.6 specification metadata model ([RD-1]) contained three distinct metadata records. The Data Set Descriptions (DSD) included metadata that provided an overall description of a GHRSSST product, including discovery and distribution. These metadata changed infrequently and were termed collection level metadata. The File Records (FR) contained metadata that describe a single data file or granule (traditionally called granule metadata). Finally there was also granule metadata captured in the CF attributes of a netCDF3 file. Under the new GDS 2.0 initial GHRSSST 2.0 Metadata Model, all three types of metadata are leveraged into a single ISO-compliant metadata file as shown in Figure 13-2. Future revisions of the GDS 2.0 will incorporate more of the ISO metadata capabilities.

### 13.3 The ISO 19115-2 Metadata Model

The ISO metadata model is made up of a set of containers (also referred to as classes or objects) that contain metadata elements or other objects that, in turn, contain other elements or objects (see Figure 13-1 and

Table 13-1). The root element is MI\_Metadata<sup>1</sup>. It contains twelve major classes that document various aspects of the resource (series or dataset) being described. The MD\_DataIdentification object contains other major classes that also describe various aspects of the dataset.

---

<sup>1</sup> The ISO Standard for Geographic Data has two parts. ISO 19115 is the base standard. ISO 19115-2 includes 19115 and adds extensions for images and gridded data. We will use both parts in this model and refer to the standard used as 19115-2.

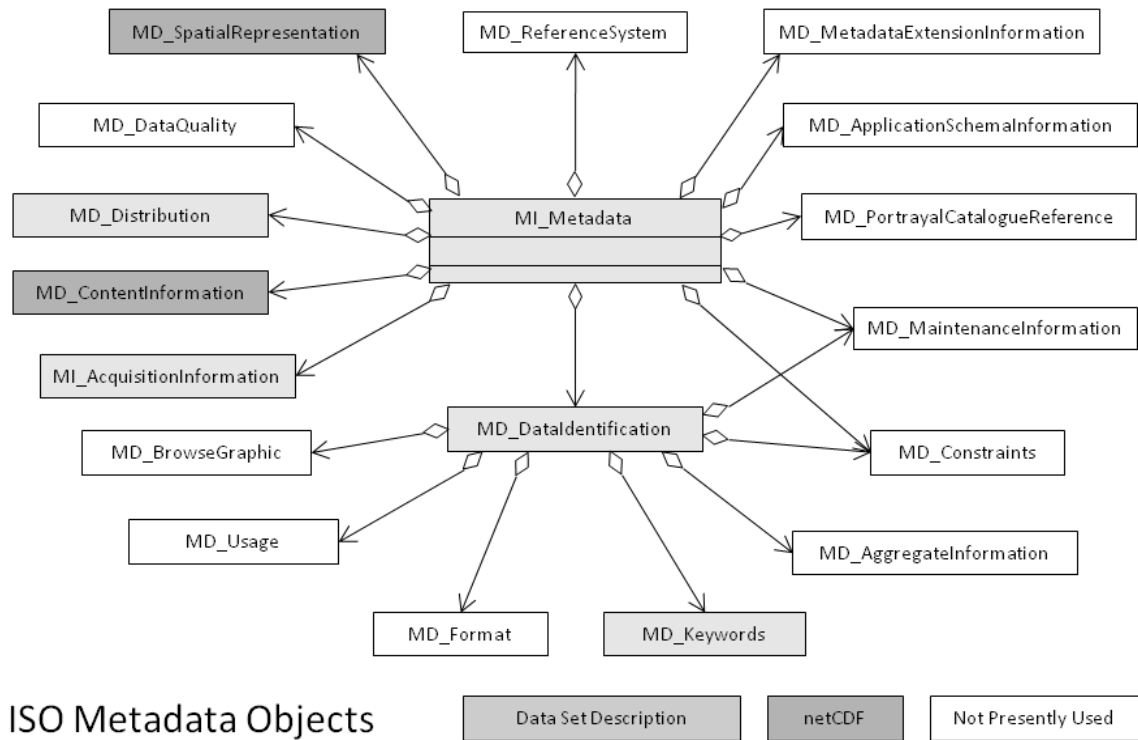


Figure 13-1. ISO Metadata Objects and their sources

Table 13-1. Major ISO Objects. Objects in use in the GHRSS metadata model are shaded in gray.

ISO Object	Explanation
MI_Metadata	Root element that contains information about the metadata itself.
MI_AcquisitionInformation	Information about instruments, platforms, operations and other element of data acquisition.
MD_ContentInformation	Information about the physical parameters and other attributes contained in a resource.
MD_Distribution	Information about who makes a resource available and how to get it.
MD_DataQuality	Information about the quality and lineage of a resource.
MD_SpatialRepresentation	Information about the geospatial representation of a resource.
MD_ReferenceSystem	Information about the spatial and temporal reference systems used in the resource
MD_MetadataExtensionInformation	Information about user specified extensions to the metadata standard used to describe the resource.
MD_ApplicationSchemaInformation	Information about the application schema used to build a dataset (not presently used for GHRSS metadata).
MD_PortrayalCatalogueReference	Information identifying portrayal catalogues used for the resource (not presently used for GHRSS metadata).
MD_MaintenanceInformation	Information about maintenance of the metadata and the resource it describes.
MD_Constraints	Information about constraints on the use of the metadata and the resource it describes.
MD_DataIdentification	Information about constraints on the use of the metadata and the resource it describes.
MD_AggregateInformation	Information about groups that the resource belongs to.
MD_Keywords	Information about discipline, themes, locations, and times included in the resource.
MD_Format	Information about formats that the resource is available in.

MD_Usage	Information about how the resource has been used and identified limitations.
MD_BrowseGraphic	Information about graphical representations of the resource.

MI\_Metadata objects can be aggregated into several kinds of series that include metadata describing particular elements of the series, termed dataset metadata, as well as metadata describing the entire series (i.e. series or collection metadata). Unlike the GDS 1.0 Metadata Model, the ISO-based GDS 2.0 model combines both collection level and granule level metadata into a single XML file. The initial approach will be to extract and translate granule metadata from netCDF-4 CF attributes in conjunction with collection level metadata from existing GDS 1.0 compliant DSD records. In the case of a data producer providing a netCDF-3 granule, an additional FR metadata record **must** still be provided (see GDS 1.6 for details on the format of the FR metadata records). The flow of metadata production is described below in two scenarios:

Existing GDS 1.0 GHRSSST products

1. Generate ISO collection level metadata from existing GDS 1.0 DSD records
2. Generate ISO granule level metadata from CF attributes embedded in a GDS 2.0 specification netCDF4 granule
3. Combine 1 and 2 into a complete GDS 2.0 ISO 19115-2 record
4. If the granule is GDS 1.0 netCDF3 format the RDAC must provide a File Record

GDS 2.0 GHRSSST products

1. Use existing ISO collection level metadata. RDACs will provide the initial metadata record from a template.
2. Generate ISO granule level metadata from CF attributes embedded in a GDS 2.0 specification netCDF4 granule
3. Combine 1 and 2 into a complete GDS 2.0 ISO 19115-2 record

In both cases, the GDAC has the primary role to create the ISO metadata records in steps 1-3. A RDAC can also choose to do steps 1-3, or maintain only the collection level portion.

A diagram of the production approach is shown in Figure 13-2. The root element for the combined file is DS\_Series which includes dataset and series metadata. Dataset metadata will be constructed using metadata extracted from the netCDF-4 CF attributes (or a FR record if the file is in netCDF3 format). Series Metadata will be constructed with information from (initially) the DSD or the collection level portion of an existing GDS 2.0 specification ISO record.

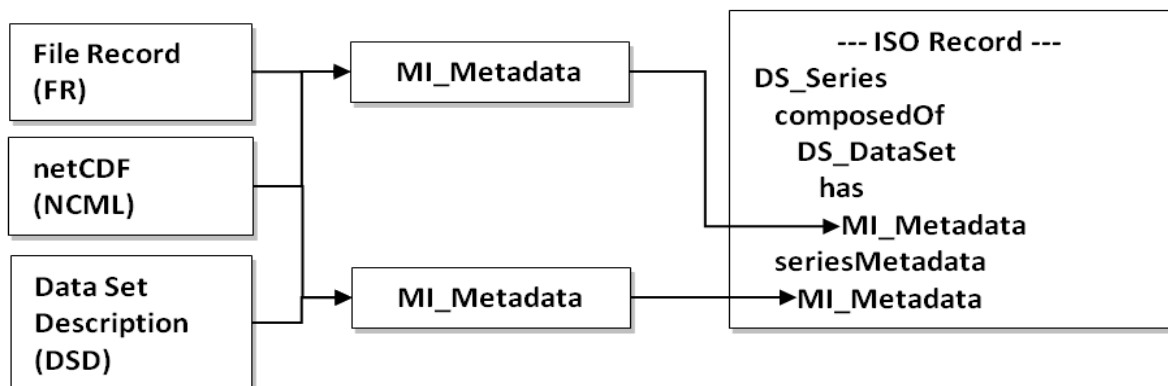


Figure 13-2. Initial GHRSSST Metadata Translation Approach to ISO record

To see the comprehensive details of the GHRSSST GDS 2.0 metadata model refer to the GDS 2.0 Metadata Specification documents and example at the GDAC (<http://ghrsst.jpl.nasa.gov>).

## 14 GDS 2.0 Document Management Policy

The purpose of a GDS document management Policy is to establish the framework under which official records and documents of GHRSSST are created and managed. It lists the responsibilities of key actors, and articulates the principles underpinning the processes outlined in the records and document management guidelines.

The **intent** of this Policy is to ensure that the GHRSSST GPO, Science Team and actors working within GHRSSST have the appropriate governance and supporting structure in place to enable them to manage their records and documents in a manner that is planned, controlled, monitored, recorded and audited, using an authorized system.

This Policy states the key strategic and operational requirements for adequate recordkeeping and document management of the GDS to ensure that evidence, accountability and information about GHRSSST activities are met.

The **scope** of this Policy is applicable to all people working in GHRSSST and to all official records and documents, in any format and from any source. Examples include paper, electronic messages, digital documents and records, video, DVD, web-based content, plans, and maps. This Policy does not apply to public domain material.

### 14.1 GDS Document Management Definitions

<b>Document:</b>	Structured units of information recorded in any format and on any medium and managed as discrete units or objects. Some documents are records because they have participated in a business transaction, or were created to document such a transaction. Conversely, some documents are not records because they do not function as evidence of a business transaction.
<b>Email:</b>	The transmission of text messages and optional file attachments over a network.
<b>ERDMS:</b>	Electronic Records and Document Management System.
<b>Records:</b>	Information created, received, and maintained as evidence and information by an organization or person, in pursuance of legal obligations or in the transaction of business.
<b>Records Management:</b>	Field of management responsible for the efficient and systematic control of the creation, receipt, maintenance, use and disposition of records, including processes for capturing and maintaining evidence of and information about business activities and transactions in the form of records.

### 14.2 GDS Document Management Policy Statement

GDS records and documents created, received or used by GHRSSST in the normal course of activities are the property of the GHRSSST project, unless otherwise agreed. This includes reports compiled by external consultants commissioned by the GHRSSST Project Office or Science Team.

GHRSSST official records constitute its corporate memory, and as such are a vital asset for ongoing operations, and for providing evidence of activities and transactions. They assist the GPO and

GHRSSST Science Team in making better informed decisions and improving best practice by providing an accurate record of what has occurred before.

Thus GDS records are to be:

- managed in a consistent and structured manner;
- managed in accordance with best practice guidelines and procedures;
- stored in a secure manner.
- disposed of, or permanently archived appropriately;
- captured and registered using an authorized recordkeeping system

GHRSSST GDS documents are to be

- created by authorized officers and managed by the GPO
- version controlled by authorized officers

### **14.3 GDS Document Management Policy Responsibility**

The GHRSSST Science Team is responsible for GDS Records Management and has delegated responsibility for records management to the GPO coordinator.

The Coordinator is accountable for providing assistance in the overall management of the GDS and documents, including:

- management of the GHRSSST Document Management System (GHRSSST Website document repository);
- providing assistance on the implementation and interpretation of the GDS Document Management;
- maintaining and developing GHRSSST GDS document Management policy and promulgating this across GHRSSST as a whole;
- identifying retention and disposal requirements for GHRSSST records;
- providing training in GDS document management processes and the GHRSSST website document repository.

### **14.4 GHRSSST GDS Recordkeeping and Document Management System**

The GHRSSST recordkeeping and document management system assists people working in GHRSSST to capture records, protect their integrity and authenticity, provide access through time, dispose of records no longer required by GHRSSST in the conduct of its activities, and ensure records of enduring value are retained. It also facilitates the creation, version control, and authority of official corporate documents.

The GHRSSST recordkeeping and document management system is managed by the GPO which provides ongoing support, development and training, so that GHRSSST community responsibilities are met.

The GHRSSST authorized recordkeeping and document management system is the GHRSSST Project Office Web site document library (<http://www.ghrsst.org>).

All GHRSSST actors are to use <http://www.ghrsst.org> to ensure that:

- GDS official records and documents are routinely captured and subjected to the relevant retention and disposal policy;
- access to records and documents is managed according to authorized access and appropriate retention times regardless of international location;
- records and documents are protected from unauthorized alteration or deletion;
- documents are version controlled as required;
- there is one authoritative and primary source of information documenting GHRSSST GDS decisions and actions.

All GHRSSST actors who create, receive and keep records and documents as part of their GHRSSST work, should do so in accordance with these policies, procedures and standards. GHRSSST actors should not undertake disposal of records without the authority of the GPO – and only in accordance with authorized disposal schedules.

### **14.5 GDS Document location**

1. An approved and complete version of the GDS shall be stored on the GHRSSST web site (<http://www.ghrsst.org>) under the documents -> GDS -> operational section of the web site. This version shall be the Operational version of the GDS.
2. A development version of the GDS shall be stored on the GHRSSST web site (<http://www.ghrsst.org>) under the documents -> GDS -> development section of the web site. This version shall be the development version of the GDS
3. An archive of all GDS documents shall be stored on the GHRSSST web site (<http://www.ghrsst.org>) under the documents -> GDS -> archive section of the web site.
4. A single zip file containing all operational documents shall be available at the GHRSSST web site

### **14.6 GDS Document Publication**

1. The GHRSSST Project Office is responsible for publication of GDS operational documents.
2. A document BookCaptain is responsible for the publication of development GDS documents and shall inform the GHRSSST project office when new documents have been published.

### **14.7 GDS Document formats**

1. Operational GDS documents shall be stored as pdf documents.
2. Development GDS documents shall be stored as Microsoft word documents.
3. Both word and pdf documents shall be stored in the GDS archive.

### **14.8 GDS Document filing**

1. Documents shall be numbered using the following nomenclature suffix to be appended at the end of a filename :

MM.mmm

where MM is the major revision e.g. 2 and mmm is a minor revision e.g. 019. for example, the following GDS filename is valid

GDS2.0\_TechnicalSpecifications\_rev02.001.doc

2. Following any change to a document, a new revision number shall be assigned to the document by the BookCaptain before publication.

### **14.9 Document retrieval**

1. Free and open access to all GDS documents shall be provided by the GHRSSST web page interface.

### **14.10 Document security**

1. GDS documents stored within the GHRSSST web page are backed up by the web hosting company every night.
2. An independent backup copy of all GDS documents shall be maintained by the GHRSSST Project Office.

### **14.11 Retention and long term archive**

1. GDS documents shall be retained in perpetuity within a stewardship facility.

## **14.12 Document workflow**

1. Each GDS document shall be owned and administered by a document Book Captain.
2. A GDS BookCaptain is a central point of contact that is responsible for managing and maintaining the content of their GDS document
3. All revisions must be approved by a GDS document Book Captain.
4. All updates and revisions shall be entered into the Document change record.
5. A revised version of the GDS is the passed to the GPO coordinator for registration and document management (revision control).
6. A revised version of the GDS is the passed by the GPO to the GHRSSST Data and Systems Technical Advisory Group (DAS-TAG) for review.
7. If required, the GPO may convene an external review Board to subject the revised GDS document to an independent peer review.
8. Proposed changes to the GDS, as provided by the DAS-TAG (and independent peer review if convened) are passed back to the Book Captains for implementation.
9. A final version of the GDS documents is passed back to the GPO.
10. A final version of the GDS is passed to the GHRSSST Advisory council for approval.
11. The GPO publishes the GDS document on the GHRSSST web site in the appropriate location of the GHRSSST document library.


## **14.13 Document creation**

1. The GHRSSST Project Office, in collaboration with the GHRSSST Science Team is responsible for the creation of new GDS documents.
2. The GHRSSST Project Office may delegate the responsibility to create new documents to a member of the GHRSSST Science Team.

# *How to find out more about GHR SST:*

A complete description of GHR SST together with all project documentation can be found at the following web spaces:

Main GHR SST portal	<a href="http://www.ghrsst.org">http://www.ghrsst.org</a>
GHR SST GDAC (rolling archive)	<a href="http://ghrsst.jpl.nasa.gov">http://ghrsst.jpl.nasa.gov</a>
GHR SST LTSRF (Archive)	<a href="http://ghrsst.nodc.noaa.gov">http://ghrsst.nodc.noaa.gov</a>
GHR SST HRDDS (diagnostics)	<a href="http://www.hrdds.net">http://www.hrdds.net</a>
GHR SST MDB (validation)	<a href="http://www.ifremer.fr/matchupdb">http://www.ifremer.fr/matchupdb</a>
GHR SST GMPE (L4 ensembles)	<a href="http://ghrsst-pp.metoffice.com/pages/latest_analysis/sst_monitor/daily/ens/index.html">http://ghrsst-pp.metoffice.com/pages/latest_analysis/sst_monitor/daily/ens/index.html</a>
GHR SST data discovery	<a href="http://ghrsst.jpl.nasa.gov/data_search.html">http://ghrsst.jpl.nasa.gov/data_search.html</a>
GHR SST data visualisation (EU)	<a href="http://www.naiad.fr">http://www.naiad.fr</a>
GHR SST data visualisation (USA)	<a href="http://podaac-tools.jpl.nasa.gov/dataminer/">http://podaac-tools.jpl.nasa.gov/dataminer/</a>

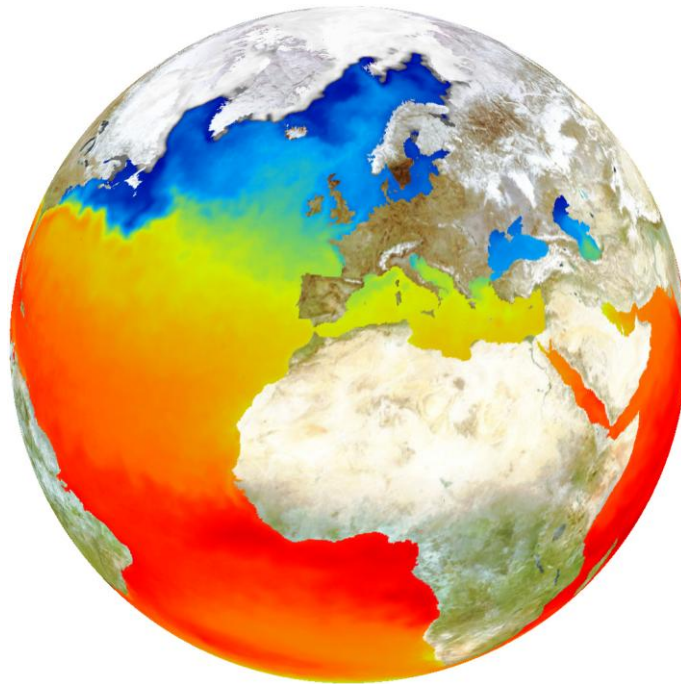

## ***GHR SST International Project Office***

Department of Meteorology,  
University of Reading,  
Reading  
United Kingdom

Tel +44 (0) 118 3785579

Fax +44 (0) 118 3785576

E-mail:

[ghrsst-po@nceo.ac.uk](mailto:ghrsst-po@nceo.ac.uk)