Tracking the Deployment of the Integrated Metropolitan Intelligent Transportation Systems Infrastructure in Nashville, TN

FY04 Results

June 2005

For additional information, please contact:

Joseph I. Peters, Ph.D.
ITS Program Assessment Coordinator
ITS Joint Program Office, Room 3416
Federal Highway Administration (HOIT-1)
400 Seventh St., S.W.
Washington, D.C. 20590
PHONE: (202) 366-2202, FAX: (202) 493-2027

E-mail: Joe.peters@fhwa.dot.gov

Notice

The Federal Highway Administration provides high-quality information to serve Government, industry, and the public in a manner that promotes public understanding. Standards and policies are used to ensure and maximize the quality, objectivity, utility, and integrity of its information. FHWA periodically reviews quality issues and adjusts its programs and processes to ensure continuous quality improvement..

Nashville, TN ii

Report No.	2. Government	Accession No.	3.	Recipient's Cata	log No.		
4. Title and Subtitle		5.	Report Date				
Tracking the Deployment of the Integrate	ted Metropolitan Inte	elligent		July 2005			
Transportation Systems Infrastructure in			6.	Performing Orga	nization Code		
7. Author(s)			8.	Performing Orga	nization Report No.		
Steve Gordon and Jeffrey Trombly	I A -I -I		1.0				
Performing Organization Name and	Address		10.	Work Unit No. (7	RAIS)		
Oak Ridge National Laboratory P.O. Box 2008, Bldg 4500N, MS 6206 Oak Ridge, TN 37831-6206							
			11.	Contract or Gran	nt No.		
Science Applications International Corp 301 Laboratory Road Oak Ridge, TN 37831	oration			DTFH61-00-	Y-30014		
12. Sponsorship Agency Name and A	ddress		13.	Type of Report a	and Period Covered		
Department of Transportation FHWA ITS Joint Program Office			14.	Sponsoring Age	ncy Code		
400 Seventh Street, S.W Room 3422				HOIT			
Washington, DC 20590 15. Supplementary Notes							
Contact person at JPO - Joseph Peters 16. Abstract							
This report describes the results of a major data gathering effort aimed at tracking deployment of nine infrastructure components of the metropolitan ITS infrastructure in Nashville. The nine components are: Freeway Management, Incident Management, Arterial Management, Electronic Toll Collection, Electronic Fare Payment, Transit Management, Highway-Rail Intersections, Emergency Management, and Regional Multimodal Traveler Information. Deployment is tracked through the use of indicators tied to the major functions of each component. In addition, integration of components is tracked through examining the transfer of information between agencies operating.							
17. Key Words	18. Distribution St	tatem	ent				
Intelligent Transportation Systems, ITS, Deployment Tracking, ITS Component Regional ITS Planning, National ITS Inf	No restrictions. This document is available to the public from: National Technical Information Service						
Nashville	00 00 00 00	Springfield, Virginia			OO Dries		
19. Security Classif. (of this report)	20. Security Clas	ssir. (or this page)	21.	No. of Pages	22. Price		

Unclassified Unclassified 43

Form DOT F 1700.7 (8-72) Reproduction of completed page authorized

Nashville, TN


Table of Contents

Metropolitan Area Map	v
Background and Purpose	
Summary 2004 Survey Results	3
Component	3
Integration	6
Detailed 2004 Survey Results	12
Freeway Management Components	13
Freeway Management Integration	14
Freeway and Arterial Incident Management Components	15
Incident Management Integration	16
Arterial Management Components	17
Arterial Management Integration	18
Transit Management Components	19
Transit Management Integration	20
Electronic Fare Payment Components	21
Electronic Fare Payment Integration	22
Highway-Rail Intersections Components	23
Highway-Rail Intersections Integration	
Emergency Management Components	
Emergency Management Integration	
Regional Multimodal Traveler Information Components	27
Regional Multimodal Traveler Information Integration	28
Electronic Toll Collection Components	
Electronic Toll Collection Integration	
$\boldsymbol{\varepsilon}$	

List of appendices:

Appendix A. Component Indicators Appendix B. Integration Indicators Appendix C. Surveyed Agencies

Metropolitan Area Map NASHVILLE AREA METROPOLITAN PLANNING ORGANIZATION, TN

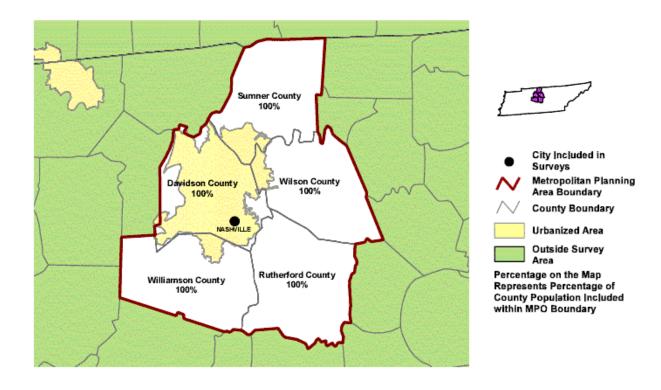

Nashville, TN

Background and Purpose

In January 1996, former Secretary Peña set a goal of deploying the integrated metropolitan Intelligent Transportation System (ITS) infrastructure in 75¹ of the nation's largest metropolitan areas by the end of 2005.

"I'm setting a national goal: to build an intelligent transportation infrastructure across the United States to save time and lives, and improve the quality of life for Americans. I believe that what we do, we must measure . . . Let us set a very tangible target that will focus our attention . . . I want 75 of our largest metropolitan areas outfitted with a complete intelligent transportation infrastructure in 10 years."

-- former Secretary Peña, 1996

In 1997, the United States Department of Transportation (U.S. DOT) initiated an effort to track progress toward fulfillment of this goal by conducting a survey of deployment in the nation's largest metropolitan areas. Traditionally, the product of a transportation infrastructure investment consists of a fixed asset such as a highway, bridge, or public transportation vehicle developed, constructed, or purchased by a single agency. Tracking the level of deployment for such traditional fixed assets can be accomplished by simply counting the number of such assets deployed. Measuring the deployment of the metropolitan ITS infrastructure is more complex because it consists of a set of systems, often deployed by multiple agencies, and integrated through a combination of complex institutional and technical arrangements. In brief, it is often difficult to simply count the number of systems deployed without first developing a measurement approach that captures the essential features of such systems in a consistent fashion across many deployment environments.

In order to track progress toward fulfillment of the Secretary's goal for deployment, the U.S. DOT ITS Joint Program Office developed the metropolitan ITS deployment tracking methodology. This methodology tracks deployment of the nine components that make up the Metropolitan ITS infrastructure: Freeway Management; Incident Management; Arterial Management; Emergency Management; Transit Management; Electronic Toll Collection; Electronic Fare Payment; Highway-Rail Intersections; and Regional Multimodal Traveler Information. Through a set of indicators tied to the major functions of each component, the level of deployment is tracked for the nation's largest metropolitan areas. In addition, the integration links between agencies operating the infrastructure are also tracked.

During the spring and summer of 2004, the U.S. DOT undertook a new data collection effort for the purpose of examining ITS deployment progress in the nation's largest metropolitan areas. The Nashville metropolitan area was among the areas surveyed in 1997, 1999, 2000, 2002, and again in 2004. This report presents the results of the 2004 survey efforts and compares the

Nashville, TN

¹ Since former Secretary Peña's speech, the number of metropolitan areas that DOT will measure has been increased from 75 to 78. However, to maintain reporting consistency across the 10-year goal period, this report considers only the original 75 metropolitan areas.

² Excerpt of a speech delivered by former Secretary of Transportation Peña at the Transportation Research Board in Washington, DC on January 10, 1996.

results of the 1997, 1999, 2000, 2002, and 2004 data gathering efforts. The overall response rate for the surveys administered in the Nashville region was 100% in 1997, 75% in 1999, 100% in 2000, 100% in 2002, and 100% in 2004.

The next section contains a summary of the results for the city of Nashville and for the nation as a whole. This is followed by detailed information on each infrastructure component for Nashville. Included in this report is a set of appendices containing tables with all the indicators, a list of local contacts surveyed along with a status of their response to the survey, and a summary of the data collected from the surveys.

Agencies are encouraged to review the data presented in this report for completeness and accuracy and to direct any comments or corrections to the contacts listed below:

Steve Gordon
Oak Ridge National Laboratory
P.O. Box 2008, 4500N, MS-6207
Oak Ridge, TN 37831-6207
(865) 576-8416 (voice)
(865) 574-3895 (fax)
gordonsr@ornl.gov

Jeff Trombly
Science Applications International Corporation
P.O.Box 2501, 301 Laboratory Road
Oak Ridge, TN 37831-2501
(865) 481-8563 (voice)
(865) 481-2941 (fax)
jeffrey.w.trombly@saic.com

Summary 2004 Survey Results


Component

Deployment indicators have been developed for two broad areas of interest: (1) the individual components, including their basic functions and characteristics and (2) integration of components, including how these components work together to provide coordinated regional service. As mentioned earlier, these indicators are expressed as percentages of the possible deployment opportunity and not necessarily what should be deployed based on local needs. Requirements for deployment and integration between each component will vary based on local conditions and cannot be assigned without extensive coordination with individual metropolitan areas.

The following two figures portray the surrogate indicators for each of the nine components in Nashville and the same indicators at the national level. These are judged to be the single best representative of a component and are being used as summary indicators for each component. The summary indicators are expressed as a percentage; however, because deployment goals have yet to be established, these indicators should not be read as a comparison of what is deployed versus eventual deployment goals. Instead, they only reflect what is deployed compared to full market saturation (i.e., opportunity for deployment).

Each component indicator was selected to reflect a critical function of the individual components. For example, in the case of Freeway Management, three basic functions were defined: surveillance, traffic control, and information display. The three indicators developed to reflect these functions are: percentage of freeway centerline miles under electronic surveillance (surveillance function), percentage of freeway entrance ramps managed by ramp meters (traffic control function), and percentage of freeway centerline miles covered by permanent Variable Message Signs (VMS) or Highway Advisory Radio (HAR). The indicators are surrogates that do not necessarily reflect the full breadth of metropolitan ITS deployment activity.

Data are shown for each year surveyed and, in addition, an estimate for what the level of deployment will be in the year 2005.

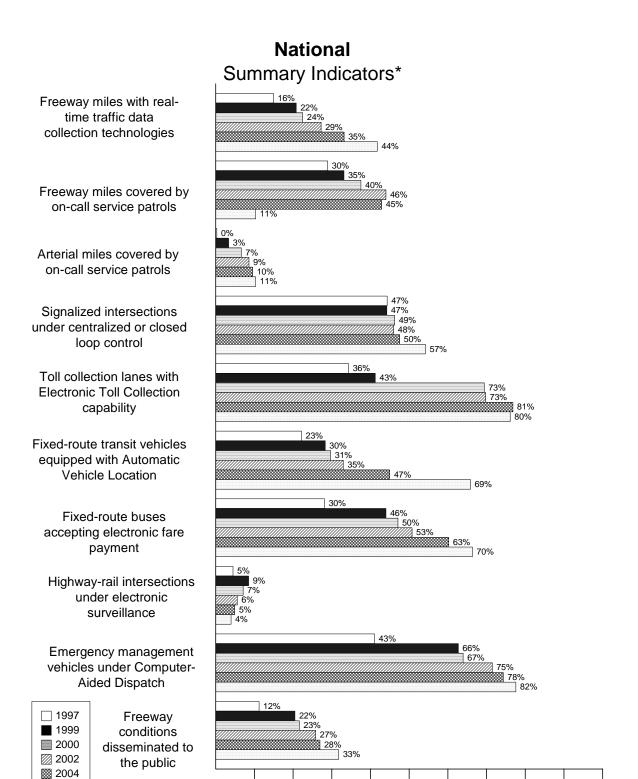

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

30%

40%

50%

Percent Deployment Opportunity**

60%

70% 80%

90%

100%


20%

10%

0%

2005

^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

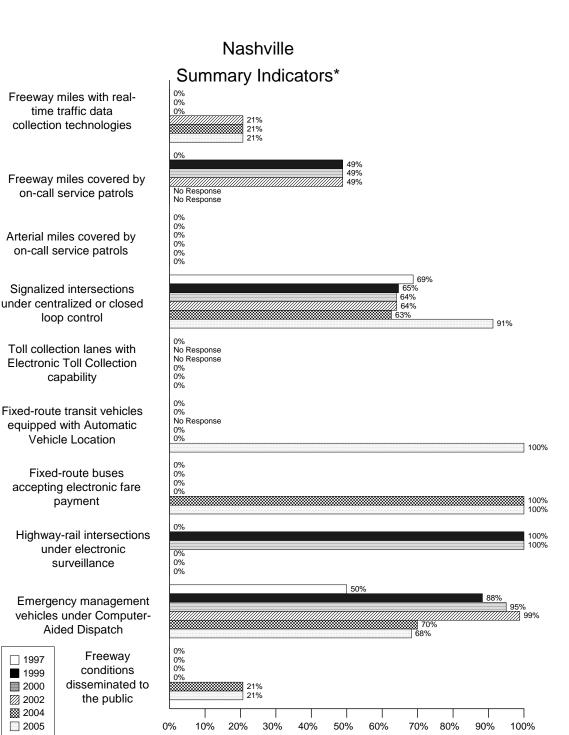

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

Percent Deployment Opportunity**

1997

1999

2000

2002 ₩ 2004

2005


^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

Integration

A critical aspect of ITS that provides much of its capability is the integration of individual components to form a unified regional traffic control system. The individual ITS components routinely collect information that is used for purposes internal to that component. For example, the Arterial Management component monitors arterial conditions to revise signal timing and to convey these conditions to travelers through such technologies as variable message signs and highway advisory radio. Other ITS components can make use of this information in formulating their control strategies. For example, Transit Management may alter routes and schedules based on real-time information on arterial traffic conditions, and Freeway Management may alter ramp metering or diversion recommendations based on the same information.


As with the component indicators, definitions for inter- and intra-component integration were developed for each component, and indicators, derived from these definitions, were produced for each component. A total of 34 individual integration indicators was specified and is portrayed in the third figure that follows. Each integration indicator has been assigned a number and an origin/destination path from one ITS infrastructure component to another. For example, the number "10" identifies the integration of information from the Freeway Management component to the Regional Multimodal Traveler Information component. The following two figures portray the national integration indicators and the integration indicators for Nashville as of 2004.

78 Large Metropolitan Areas Integration Links

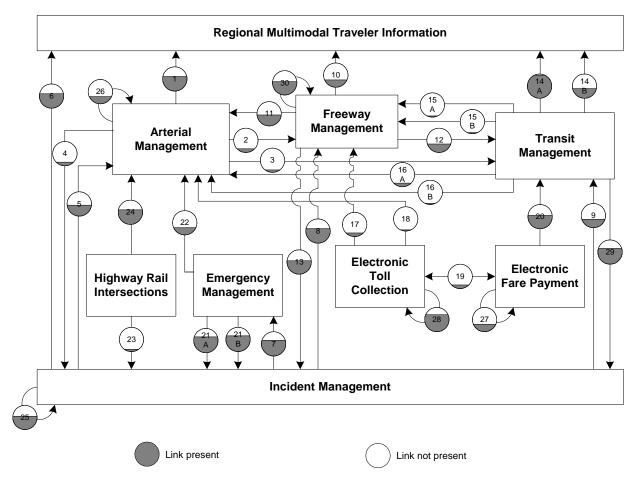

Note: Shading indicates the value of the link. For example a circle half shaded equals 50%

Nashville Integration Links

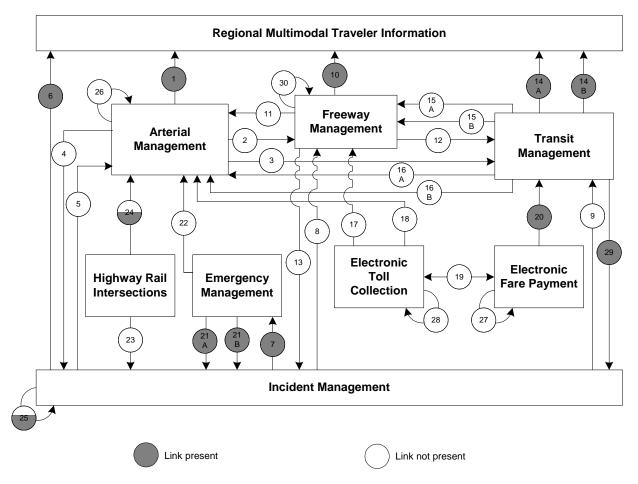

Note: Shading indicates the value of the link. For example a circle half shaded equals 50%

Link	Description	Purpose
1	Arterial Management to	Arterial travel time, speed, and condition
	Regional Multimodal	information are displayed by Regional Multimodal
	Traveler Information	Traveler Information media.
2	Arterial Management to	Freeway Management Center monitors arterial
	Freeway Management	travel times, speeds, and conditions using data
		provided from Traffic Signal Control in order to
		adjust ramp meter timing, lane control or HAR in
		response to changes in real-time conditions on a
		parallel arterial.
3	Arterial Management to	Transit Management adjusts transit routes and
	Transit Management	schedules in response to arterial travel times,
		speeds, and conditions information collected as part
		of Traffic Signal Control.
4	Arterial Management to	Incident Management monitors real-time arterial
	Incident Management	travel times, speeds, and conditions using data
		provided from Traffic Signal Control to detect
		arterial incidents and manage incident response
		activities.
5	Incident Management to	Traffic Signal Control monitors incident severity,
	Arterial Management	location, and type information collected by Incident
		Management to adjust traffic signal timing or
		information provided to travelers in response to
		incident management activities.
6	Incident Management to	Incident location, severity, and type information are
	Regional Multimodal	displayed by Regional Multimodal Traveler
	Traveler Information	Information media.
7	Incident Management to	Incident severity, location, and type data collected
	Emergency Management	as part of Incident Management are used to notify
		Emergency Management for incident response.
8	Incident Management to	Incident severity, location, and type data collected
	Freeway Management	by Incident Management are monitored by Freeway
		Management for the purpose of adjusting ramp
		meter timing, lane control or HAR messages in
		response to freeway or arterial incidents.
9	Incident Management to	Transit Management adjusts transit routes and
	Transit Management	schedules in response to incident severity, location,
		and type data collected as part of Incident
10		Management.
10	Freeway Management to	Freeway travel time, speed, and condition
	Regional Multimodal	information are displayed by Regional Multimodal
	Traveler Information	Traveler Information media.

Link	Description	Purpose
11	Freeway Management to Arterial Management	Freeway travel time, speeds, and conditions data collected by Freeway Management are used by Traffic Signal Control to adjust arterial traffic signal timing or arterial VMS messages in response to changing freeway conditions.
12	Freeway Management to Transit Management	Transit Management adjusts transit routes and schedules in response to freeway travel times, speeds, and conditions information collected as part of Freeway Management.
13	Freeway Management to Incident Management	Incident Management monitors freeway travel time, speed, and condition data collected by Freeway Management to detect incidents or manage incident response.
14a	Transit Management to Regional Multimodal Traveler Information (static route information)	Transit routes, schedules, and fare information are displayed on Regional Multimodal Traveler Information media.
14b	Transit Management to Regional Multimodal Traveler Information (schedule adherence information)	Transit schedule adherence information are displayed on Regional Multimodal Traveler Information media.
15a	Transit Management to Freeway Management	Freeway ramp meters are adjusted in response to receipt of transit vehicle pre-emption signal.
15b	Transit Management to Freeway Management (transit vehicle probes)	Transit vehicles equipped as probes are monitored by Freeway Management for the purpose of determining freeway travel speeds or travel times.
16a	Transit Management to Arterial Management	Traffic signals are adjusted in response to receipt of transit vehicle pre-emption signal.
16b	Transit Management to Arterial Management (transit vehicle probes)	Transit vehicles equipped as probes are monitored by Traffic Signal Control for the purpose of determining arterial speeds or travel times.
17	Electronic Toll Collection to Freeway Management (ETC equipped probes)	Vehicles equipped with electronic toll collection (ETC) tags are monitored by Freeway Management for the purpose of determining freeway travel speeds or travel times.
18	Electronic Toll Collection to Arterial Management (ETC equipped probes)	Vehicles equipped with electronic toll collection (ETC) tags are monitored by Traffic Signal Control for the purpose of determining arterial travel speeds or travel times.
19	Electronic Fare Payment and Electronic Toll Collection	Transit operators accept ETC- issued tags to pay for transit fares.
20	Electronic Fare Payment to Transit Management	Rider ship details collected as part of Electronic Fare Payment are used in transit service planning by Transit Management.

Link	Description	Purpose
21a	Emergency Management to	Incident Management is notified of incident
	Incident Management	location, severity, and type by Emergency
	(incident notification)	Management for the purpose of identifying
		incidents on freeways or arterials.
21b	Emergency Management to	Incident Management is notified of incident
	Incident Management	clearance activities by Emergency Management for
	(incident clearance)	the purpose of managing incident response on
		freeways or arterials.
22	Emergency Management to	Emergency Management vehicles are equipped
	Arterial Management	with traffic signal priority capability.
23	Highway-rail intersections to	Incident Management is notified of crossing
	Incident Management	blockages by Highway-rail intersection for the
	(crossing status)	purpose of managing incident response.
24	Highway-rail intersections to	Highway-rail intersection and Traffic Signal
	Arterial Management	Control are interconnected for the purpose of
	(crossing status)	adjusting traffic signal timing in response to train
		crossing.
25	Incident Management intra-	Agencies participating in formal working
	component	agreements or incident management plans
		coordinate incident detection, verification, and
		response.
26	Arterial Management intra-	Agencies operating traffic signals along common
	component	corridors sharing information and possibly control
		of traffic signals to maintain progression on arterial
		routes.
27	Electronic Fare Payment	Operators of different public transit services share
• •	intra-component.	common electronic fare payment media.
28	Electronic Toll Collection	Electronic Toll Collection agencies share a
	intra-component	common toll tag for the purpose of facilitating
20	T	"seam less" toll transactions.
29	Transit Management to	Transit agency operators or dispatchers report
	Incident Management	traffic incidents (e.g. stalled vehicles, crashes) as
	(incident reporting)	part of an organized regional incident management
20	F M	program.
30	Freeway Management intra-	Freeway travel time, speeds, and conditions data
	component	collected by Freeway Management agencies are
		used by other Freeway Management agencies in
		response to changing freeway conditions for the
		purpose of adjusting ramp meter timing, lane
		control or HAR messages in response to freeway or
		arterial incidents.

Detailed 2004 Survey Results

The following figures summarize the complete set of component and integration indicators developed for the Nashville metropolitan area. In some cases a decrease in deployment or integration over time occurs. This may be due to differences in reporting from year to year, agencies responding one year and not the other, or an actual decrease in the level of deployment. The figures summarizing the component indicators consist of a bar chart portraying the deployment levels for 1997, 1999, 2000, 2002, 2004, and 2005 estimates.

Example: Calculating Component Indicators for Freeway Management

Consider a metropolitan area with 100 miles of freeway and 25 freeway entrance ramps. The area has no ramp meters, 10 freeway miles for which traffic data are collected electronically, and 5 freeway miles, which are covered by highway advisory radio.

The component indicator for electronic surveillance is calculated as (10/100) or 10%.

The component indicator for ramp meter control is calculated as (0/25) or 0%.

The component indicator for HAR coverage is calculated as (5/100) or 5%.

The summary indicator for the metropolitan area is calculated as (10%+0%+5%)/3=5%.


The figures summarizing the integration indicators consist of a diagram for each of the nine metropolitan ITS components portraying the integration level for 2004. Each diagram portrays the proportion of agencies providing information to a component (e.g., the flow of incident information from Incident Management to Freeway Management) and the proportion of agencies providing information from one component to other components (e.g., the flow of freeway travel condition information from Freeway Management to Arterial Management).

Example: Calculating Integration between Arterial Management and Regional Multimodal Traveler Information

Consider a metropolitan area with three arterial management agencies. One out of three provides information to the public using a Regional Multimodal Traveler Information Media (e.g., internet, kiosk, pager, etc...). The integration indicator is 1/3 or 33%.

Freeway Management Components

Nashville Freeway Management*

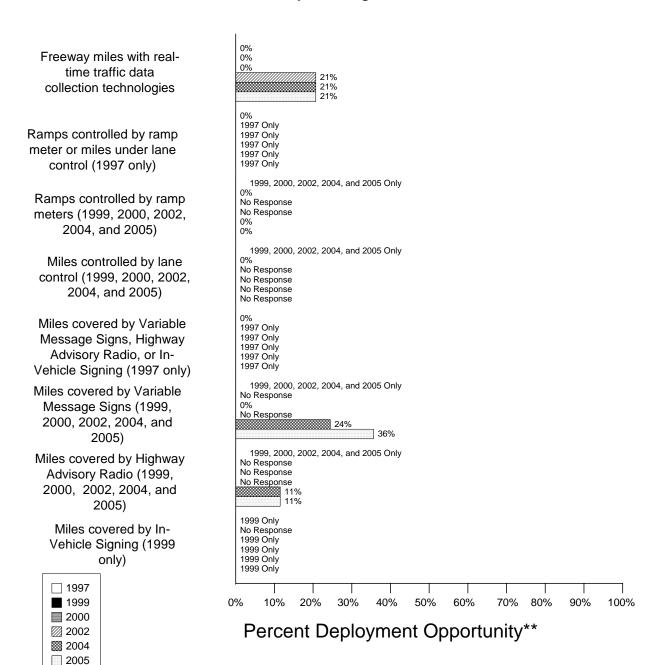

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

Freeway Management Integration


Nashville Freeway Management Integration*

Inputs Outputs Adjust Arterial Signals 0% 0% **Arterial** Affect Conditions **Travel Decisions** Incident (10) Adjust Routes/ Ramp Priority **Schedules** Probe Detect Inc. & Adjust Response

st Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

Freeway and Arterial Incident Management Components

Nashville Freeway and Arterial Incident Management*

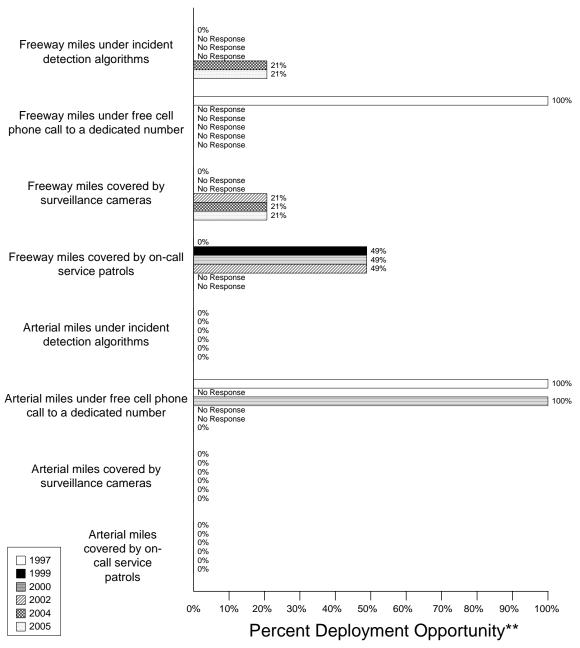


^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

Incident Management Integration

Nashville Incident Management Integration*

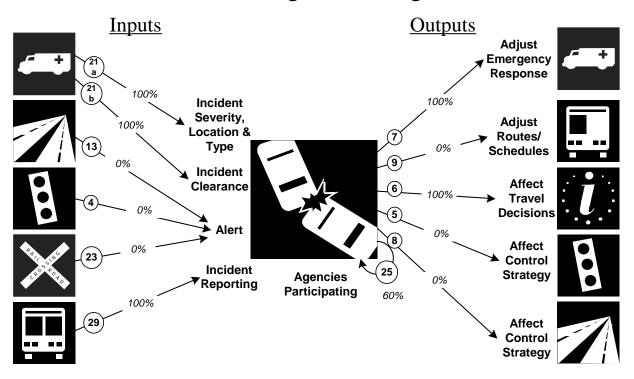


^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

Arterial Management Components

Nashville

Arterial Management*

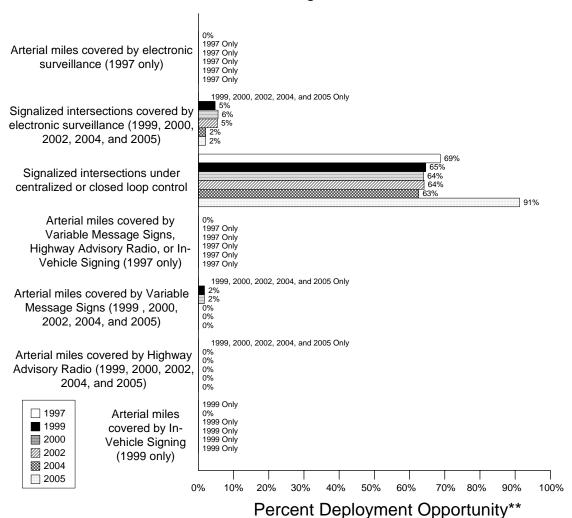


^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

Arterial Management Integration

Nashville Arterial Management Integration*

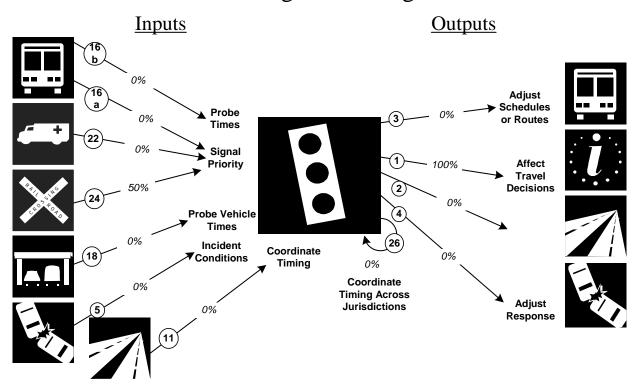


^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

Transit Management Components

Nashville

Transit Management*

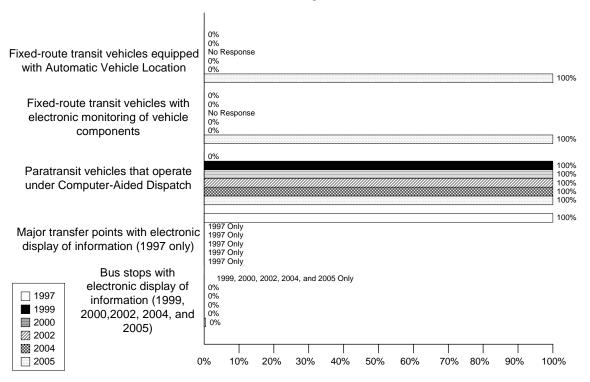


Percent Deployment Opportunity**

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

Transit Management Integration

Nashville Transit Management Integration*

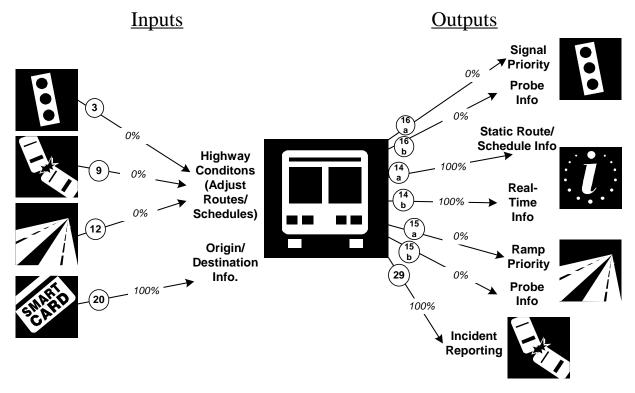


^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

Electronic Fare Payment Components

Nashville

Electronic Fare Payment*

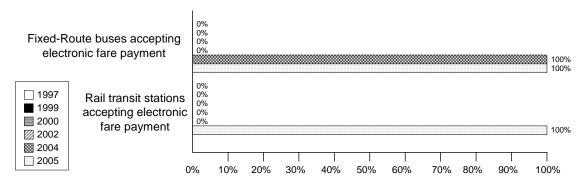


Percent Deployment Opportunity**

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

Electronic Fare Payment Integration

Nashville Electronic Fare Payment Integration* Outputs

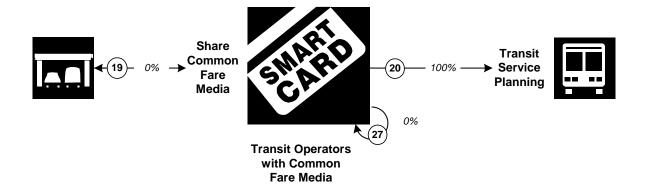

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

Highway-Rail Intersections Components

Nashville


Highway-Rail Intersections* 0% 100% 100% Highway-rail intersections under 1997 1999 electronic surveillance 2000 ፟ 2002 ₩ 2004 0% 10% 20% 30% 40% 50% 60% 70% 80% 90% 100% 2005 Percent Deployment Opportunity**

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

Highway-Rail Intersections Integration

Nashville Highway-Rail Intersections Integration* Inputs Outputs

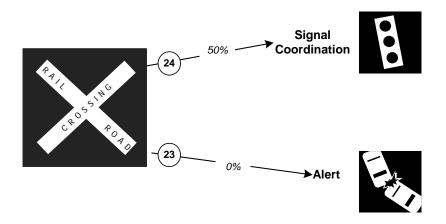


^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

Emergency Management Components

Nashville

Emergency Management*

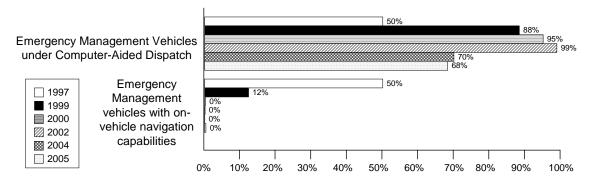


Percent Deployment Opportunity**

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

Emergency Management Integration


Nashville Emergency Management Integration* Inputs Outputs

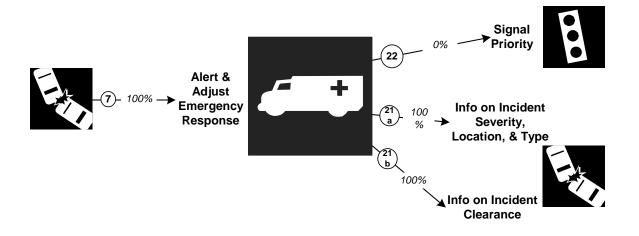

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

Regional Multimodal Traveler Information Components

Nashville Regional Multimodal Traveler Information*

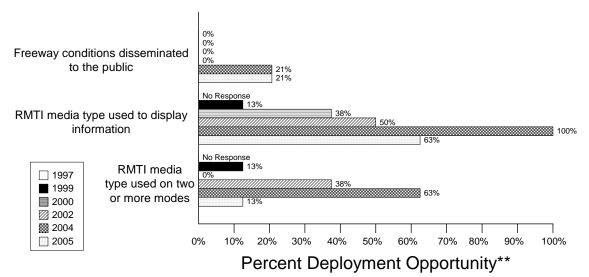


^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

Regional Multimodal Traveler Information Integration

Nashville


Regional Multimodal Traveler Information Integration* <u>Inputs</u> <u>Outputs</u>

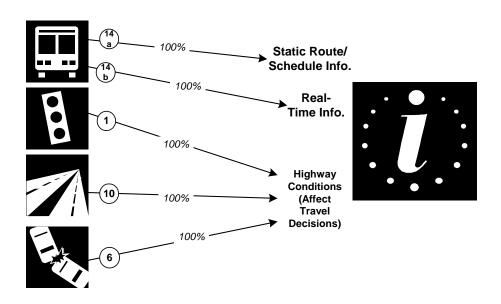

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

Electronic Toll Collection Components

Nashville Electronic Toll Collection*

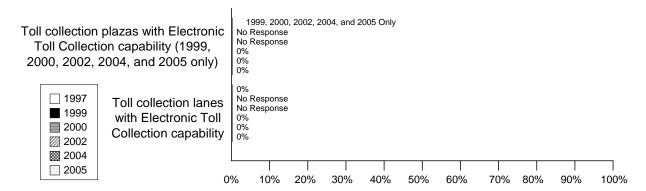


Percent Deployment Opportunity**

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

^{**} Deployment opportunity reflects potential totals that do not necessarily reflect actual need.

Electronic Toll Collection Integration

Nashville Electronic Toll Collection Integration* Inputs Outputs

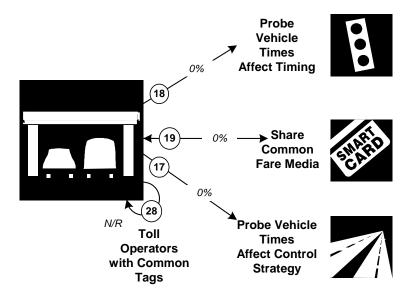

^{*} Indicators are single surrogates that do not necessarily reflect the full breadth of ITS deployment activity.

Appendix A. Component Indicators

Freeway Management Component Indicators

Description	1997	1999	2000	2002	2004	2005
Freeway centerline miles are under	0%	0%	0%	21%	21%	21%
electronic surveillance for monitoring						
traffic flow						
Freeway entrance ramps are controlled	0%					
by ramp meters or miles under lane						
control						
Freeway entrance ramps are controlled		0%	NR	NR	0%	0%
by ramp meters						
Freeway centerline miles will be		0%	NR	NR	NR	NR
controlled by lane control						
Freeway miles are covered by VMS,	0%					
HAR, or In-Vehicle Signing (IVS)						
Freeway miles are covered by VMS		NR	0%	NR	24%	36%
Freeway miles are covered by HAR		NR	NR	NR	11%	11%
Freeway miles are covered by IVS		NR				

Incident Management Component Indicators

Description	1997	1999	2000	2002	2004	2005
Freeway miles covered by incident	0%	NR	NR	NR	21%	21%
detection algorithms						
Freeway miles covered by free cellular	100%	NR	NR	NR	NR	NR
phone calls to a dedicated number						
Freeway miles covered by surveillance	0%	NR	NR	21%	21%	21%
cameras						
Freeway miles covered by on-call	0%	49%	49%	49%	NR	NR
publicly sponsored service patrol or						
towing services						
Arterial miles covered by incident	0%	0%	0%	0%	0%	0%
detection algorithms						
Arterial miles covered by free cellular	100%	NR	100%	NR	NR	NR
phone calls to a dedicated number						
Arterial miles covered by surveillance	0%	0%	0%	0%	0%	0%
cameras						
Arterial miles covered by on-call	0%	0%	0%	0%	0%	0%
publicly-sponsored service patrol or						
towing services						

Arterial Management Component Indicators

Description	1997	1999	2000	2002	2004	2005
Arterial miles covered by electronic surveillance	0%					
Signalized intersections are covered by electronic surveillance for monitoring traffic flow		5%	6%	5%	2%	2%
Signalized intersections are under centralized or closed loop control	69%	65%	64%	64%	63%	91%
Arterial miles are covered by VMS, HAR, or IVS	0%					
Arterial miles are covered by VMS		2%	2%	0%	0%	0%
Arterial miles are covered by HAR		0%	0%	0%	0%	0%
Arterial miles are covered by IVS		0%				

Electronic Toll Collection Component Indicators

Description	1997	1999	2000	2002	2004	2005
Toll collection plazas with ETC capability		NR	NR	NR	NR	NR
Toll collection lanes with ETC capability	NR	NR	NR	NR	NR	NR

Transit Management Component Indicators

Description	1997	1999	2000	2002	2004	2005
Fixed-route transit vehicles are equipped	0%	0%	NR	0%	0%	100%
with Automatic Vehicle Location (AVL)						
Fixed-route transit vehicles are equipped	0%	0%	NR	0%	0%	100%
with electronic monitoring of vehicle						
component						
Paratransit vehicles operate under	0%	100%	100%	100%	100%	100%
computer-aided dispatch						
Percent fixed-route transfer locations with	100%					
electronic display of information						
Bus stops display information to the public		0%	0%	0%	0%	0%
				1		

Electronic Fare Payment Component Indicators

Description	1997	1999	2000	2002	2004	2005
Fixed-route transit vehicles that accept	0%	0%	0%	0%	100%	100%
electronic payment						
Rail transit stations that accept electronic	0%	0%	NR	0%	0%	100%
payment						

Highway Rail Intersection Component Indicators

Description	1997	1999	2000	2002	2004	2005
Highway-rail intersections are under	0%	100%	100%	0%	0%	0%
electronic surveillance						

Emergency Management Component Indicators

Description	1997	1999	2000	2002	2004	2005	
Public sector emergency vehicles that	50%	88%	95%	99%	70%	68%	
operate under computer-aided dispatch							
Public sector emergency vehicles that have	50%	12%	0%	0%	0%	0%	
in-vehicle route guidance capability							

Regional Multimodal Traveler Information (RMTI) Component Indicators

Description	1997	1999	2000	2002	2004	2005	
Freeway conditions disseminated to	0%	0%	0%	0%	21%	21%	
travelers							
Possible RMTI media types are used to	NR	13%	38%	50%	100%	63%	
display information to travelers							

Description	1997	1999	2000	2002	2004	2005
Possible RMTI media are used to display information on <i>two or more modes</i> to	NR	13%	0%	38%	63%	13%
travelers						

Appendix B. Integration Indicators

IndicatorsLink Description	1999	2000	2002	2004	
Arterial Management agencies disseminate	0%	0%	0%	100%	
arterial travel times, speeds, and conditions to the					
public					
2. Arterial Management agencies sending	0%	0%	0%	0%	
information to Freeway Management					
3. Arterial Management agencies transfer arterial	0%	0%	0%	0%	
travel times, speeds, and conditions to Transit					
Management					
4. Arterial Management agencies sending arterial	0%	0%	0%	0%	
conditions to Incident Management					
5. Incident Management agencies transfer	0%	0%	0%	0%	
information describing incident severity, location,					
and type to Arterial Management agencies					
6. Incident Management agencies disseminate	0%	0%	100%	100%	
information describing incident severity, location,					
and type to the public					
7. Incident management agencies transfer	100%	100%	100%	100%	
information describing incident severity, location,					
and type to Emergency Management agencies					
8. Incident Management agencies sending	0%	0%	0%	0%	
information describing incident severity, location,					
and type to Freeway Management agencies					
9. Incident Management agencies transfer	0%	0%	0%	0%	
information describing incident severity, location,					
and type to Transit Management agencies					
10. Freeway Management agencies disseminating	0%	0%	0%	100%	
freeway conditions to the public					
11. Freeway Management agencies sending	0%	0%	0%	0%	
information to Arterial Management					
12. Freeway Management agencies sending	0%	0%	0%	0%	
freeway conditions to Transit Management					
13. Freeway Management agencies sending	0%	0%	0%	0%	
freeway conditions to Incident Management					
14a. Transit Management agencies disseminate	100%	0%	100%	100%	
information describing transit routes, schedules,					
and fares to travelers					
14b. Transit Management agencies disseminate	100%	100%	100%	100%	
information describing schedule/route adherence to					
travelers					
15a. Transit management agencies with vehicles	0%	0%	0%	0%	
equipped with ramp meter priority		- / -	- , -	- , -	
15b. Transit Management agencies with vehicles	0%	0%	0%	0%	
equipped as probes		- / *		- , -	

IndicatorsLink Description	1999	2000	2002	2004
16a. Transit management agencies with vehicles	0%	0%	0%	0%
equipped with traffic signal priority				
16b. Transit Management agencies have vehicles	0%	0%	0%	0%
equipped as probes on arterials				
17. Freeway Management agencies receiving	0%	0%	0%	0%
freeway conditions from vehicle probes				
18. Number of Arterial Management agencies	0%	0%	0%	0%
receiving information from vehicle probes				
19. Transit agencies that accept electronic payment	0%	0%	0%	0%
through the use of electronic toll collection media				
20. Transit Management agencies using Electronic	100%	100%	100%	100%
Fare Payment data in transit service planning				
21a. Incident management agencies receiving	100%	100%	100%	100%
incident severity from Emergency Management				
21b. Incident management agencies receiving	100%	100%	100%	100%
incident clearance activities from Emergency				
Management				
22. Emergency Management agencies have	0%	0%	0%	0%
vehicles equipped with traffic signal preemption				
capability				
23. Arterial Management agencies receive	0%	0%	0%	0%
information on highway-rail intersection crossing				
blockages for the purpose of managing incident				
response				
24. Arterial Management agencies have traffic	50%	50%	50%	50%
signals within 200 feet of a highway-rail				
intersection with the capability of having their				
signal timing adjusted in response to a train				
crossing				
25. Police, fire, and EMS agencies participating in	100%	17%	33%	60%
a formal incident management plan/team				
26. Arterial Management agencies under	0%	0%	0%	0%
cooperative agreement to share traffic signal timing				
for coordinated response	_		_	_
27. Transit Management agencies that use the same	0%	0%	0%	0%
electronic payment system				
28. Toll operators using common toll tag	NR	NR	NR	
technology	4.00:		400	4.0.0
29. Transit Management agencies report traffic	100%	0%	100%	100%
incidents as part of an organized regional incident				
management program	_		_	_
30. Freeway Management agencies sending	0%	0%	0%	0%
information to another Freeway Management				
agency				

Appendix C. Surveyed Agencies

Nashville

	1997		1999		2000		2002		2004	
Agency Name	Date Out	Date In	Date Out	Date In	Date Out	Date In	Date Out	Date In	Date Out	Date In
Arterial Management										
Davidson Metro	8/5/1997	8/7/1997	8/5/1999	9/27/1999	7/18/2000	10/2/2000	5/16/2002	7/22/2002	6/14/2004	7/22/2004
Rutherford County	8/6/1997	8/28/1997	8/5/1999	10/12/1999	7/18/2000	11/7/2000	5/16/2002	8/8/2002	6/14/2004	7/12/2004
Emergency Management										
Davidson County Sheriffs Office			9/21/1999							
Metro Office of Emergency Management	8/6/1997	10/13/1997	6/3/1999	6/3/1999	6/29/2000	1/11/2001	5/6/2002	6/13/2002	5/17/2004	7/16/2004
Nashville Fire Department			9/21/1999	10/11/1999	6/29/2000	11/2/2000	4/24/2002	7/9/2002	5/17/2004	7/20/2004
Nashville Fire Department-EMS Division			9/21/1999		6/29/2000	1/11/2001	4/24/2002	9/13/2002	5/17/2004	6/24/2004
Nashville Police Department			9/22/1999		6/29/2000	7/18/2000	4/26/2002	8/1/2002	5/17/2004	9/24/2004
Tennessee Emergency Management Agency	8/6/1997	10/14/1997	6/3/1999	6/7/1999	6/29/2000	1/30/2001	6/14/2002	11/19/2002		
Tennessee Highway Patrol-Nashville Division			9/21/1999	9/29/1999	6/29/2000	10/11/2000	5/15/2002	6/10/2002	5/17/2004	7/26/2004
Freeway Management										
Tennessee Department of Transportation	8/6/1997	8/27/1997	7/29/1999	9/20/1999	7/12/2000	7/31/2000	3/13/2002	4/5/2002	7/7/2004	7/23/2004
MPO										
Nashville Metropolitan Planning Commission	Not Survey	ed in 1997	7/15/1999	8/13/1999	6/19/2000	6/30/2000	Not Surve	yed in 2002	6/1/2004	6/23/2004
Transit Management										
Metropolitan Transit Authority	7/21/1997	7/31/1997	8/9/1999	10/25/1999	8/2/2000	12/5/2000	5/22/2002	8/21/2002	6/1/2004	6/1/2004

Nashville, TN C-1

To access an electronic version of this publication visit the ITS Deployment Tracking Web Site: http://www.itsdeployment.its.dot.gov/

Visit our ITS WEB site ITS Joint Program office: http://www.its.dot.gov