COORDINATES					
PT.	STATION	NAD 27		NAD 83	
NO.	W/OFFSET	EAST (X)	NORTHING (Y)	EAST (X)	NORTHING (Y)
	1144+00N 350R	2,520,743.52	490,583.09	2,520,744.75	490,750.34
	1134+93.57N 350R	2,519,861.71	490,647.22	2,519,862.99	490,814.21
	1120+30.93N 200L	2,518,364.86	491,116.74	2,518,366.12	491,283.27
	1120+30.93N 200R	2,518,443.76	490,720.54	2,518,445.12	490,887.12
	1118+38.71N 200R	2,518,315.62	490,675.28	2,518,317.01	490,841.83
	1118+38.71N 200L	2,518,130.58	491,034.12	2,518,131.88	491,200.59
	1107+42.34N 300R	2,517,576.98	490,033.32	2,517,578.60	490,199.71
	1107+42.34N 200R	2,517,493.48	490,096.80	2,517,495.09	490,263.17
	1091+78.22N 200L	2,516,624.81	488,850.20	2,516,626.83	489,016.42
	1091+78.22N 200R	2,516,978.45	488,651.01	2,516,980.50	488,817.35
	1091+78.22N 160R	2,516,943.09	488,670.93	2,516,945.14	488,837.26
	1076+64.37N 200R	2,516,041.86	487,501.26	2,516,044.31	487,667.43
	1076+64.37N 200L	2,515,647.95	487,650.97	2,515,650.38	487,817.01
	1076+64.37N 160L	2,515,687.34	487,636.00	2,515,689.77	487,802.06

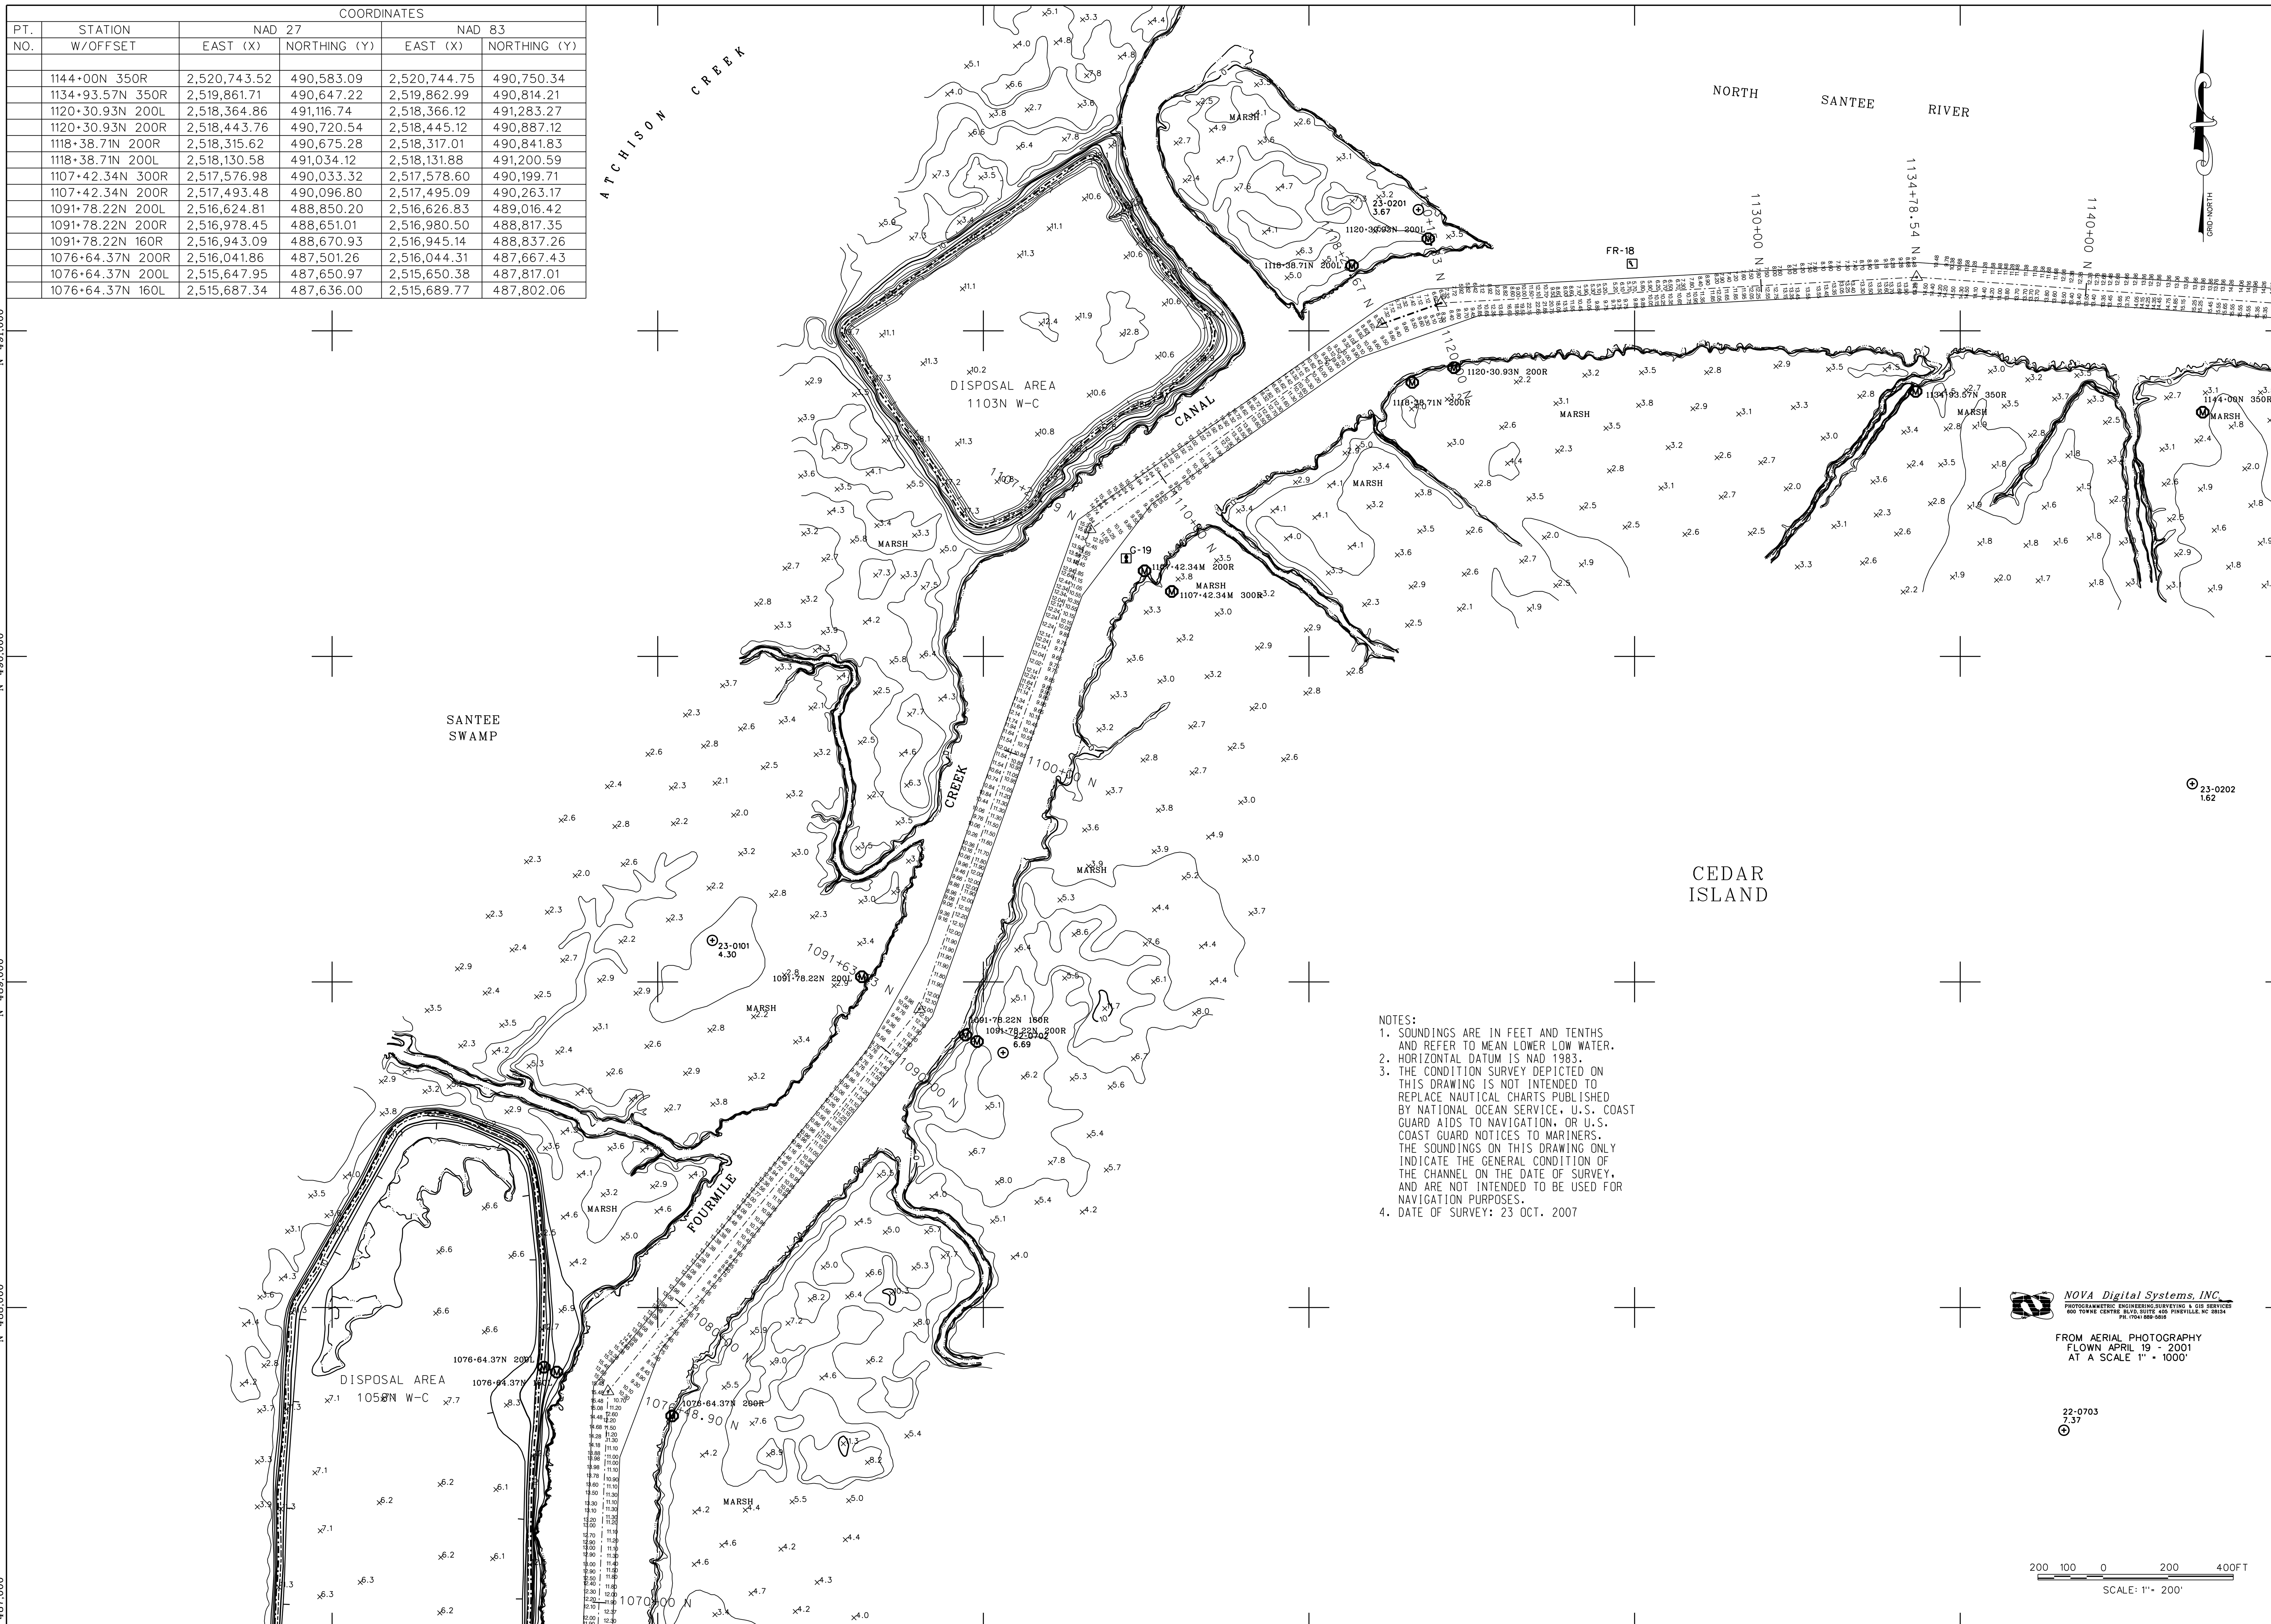

NOTES:
1. SOUNDINGS ARE IN FEET AND TENTHS AND REFER TO MEAN LOWER LOW WATER.
2. HORIZONTAL DATUM IS NAD 1983.
3. THE CONDITION SURVEY DEPICTED ON THIS DRAWING IS NOT INTENDED TO REPLACE NAUTICAL CHARTS PUBLISHED BY NATIONAL OCEAN SERVICE, U.S. COAST GUARD AIDS TO NAVIGATION, OR U.S. COAST GUARD NOTICES TO MARINERS. THE SOUNDINGS ON THIS DRAWING ONLY INDICATE THE GENERAL CONDITION OF THE CHANNEL ON THE DATE OF SURVEY, AND ARE NOT INTENDED TO BE USED FOR NAVIGATION PURPOSES.
4. DATE OF SURVEY: 23 OCT. 2007

NOVA Digital Systems, INC.
PHOTOGRAMMETRIC ENGINEERING, SURVEYING & GIS SERVICES
600 TOWNE CENTRE BLVD, SUITE 405 PINEVILLE, NC 28134
PH. (704) 889-5816

FROM AERIAL PHOTOGRAPHY
FLOWN APRIL 19 - 2001
AT A SCALE 1" = 1000'

200 100 0 200 400FT
SCALE: 1"= 200'

US Army Corps of Engineers
Charleston District

MARK	DESCRIPTION	DATE	APPRV.

MARK	DESCRIPTION	DATE	APPRV.

Designed by:
Drawn by: MRV
Ckd by:
Reviewed by:
Submitted by:
Date: OCT. 07
Rev:
Design file no. 9191
Drawing Code:
File name:
Plot date:
Dwg scale: 1" = 200'

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
CHARLESTON, SOUTH CAROLINA

AIWW, WINYAH BAY TO CHARLESTON

STA. 1069+06N TO STA. 1146+15N

9191

GEORGETOWN,CHARLESTON COUNTIES, SOUTH CAROLINA

SHEET REFERENCE NUMBER

SHEET 10 OF 62

WC-S10.DGN

...\9191S10.DGN 10/30/2007 11:06:07 AM