COORDINATES					
PT.	STATION	NAD 27		NAD 83	
NO.	W/OFFSET	EAST (X)	NORTHING (Y)	EAST (X)	NORTHING (Y)
	764+00N 250L	2,494,757.05	468,481.05	2,494,766.18	468,642.79
	764+00N 300R	2,494,930.94	467,959.07	2,494,940.20	468,120.89
	750+00N 300R	2,493,602.61	467,516.87	2,493,612.07	467,678.36
	750+00N 250L	2,493,428.90	468,038.76	2,493,438.23	468,200.17
	735+65.30N 250L	2,492,007.66	467,565.52	2,492,017.21	467,726.58
	735+65.32N 300R	2,492,313.66	467,087.72	2,492,323.31	467,248.90
	735+65.30N 400R	2,492,369.32	467,000.89	2,492,378.99	467,162.09
	720+00N 300R	2,491,293.50	465,999.37	2,491,303.51	466,160.35
	720+00N 250L	2,490,892.30	466,375.45	2,490,902.23	466,536.29

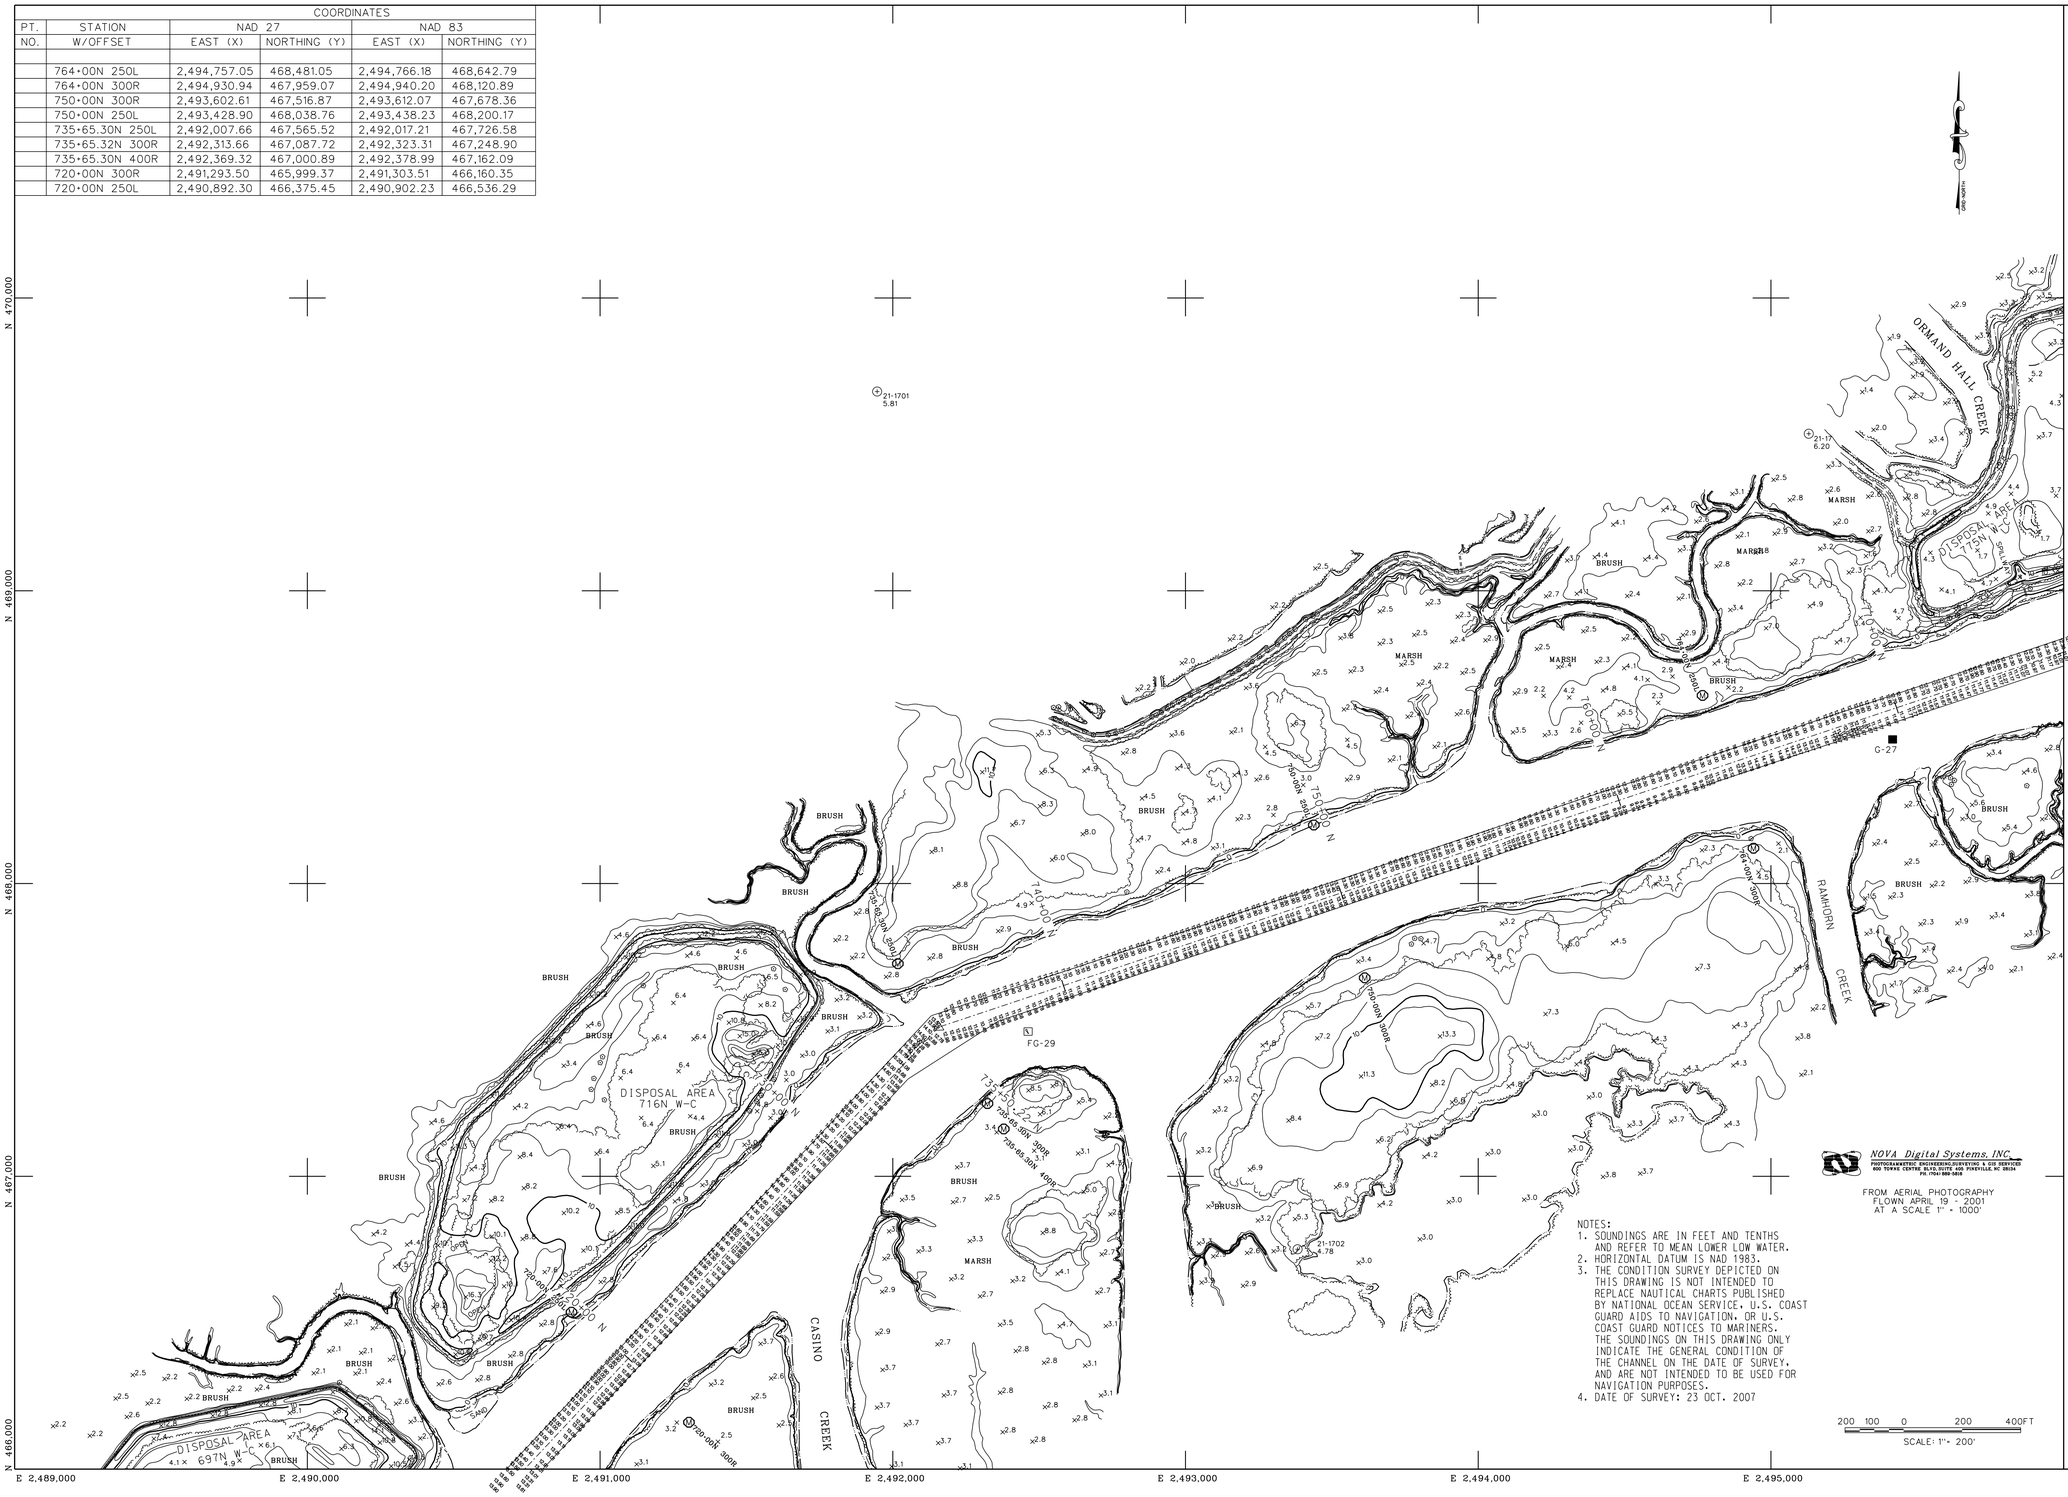

NOVA Digital Systems, INC.
PHOTOGRAMMETRIC ENGINEERING,SURVEYING & GIS SERVICES
800 TOWNE CENTRE BLVD, SUITE 400 PINEVILLE, NC 28134
PH. (704) 889-9808

FROM AERIAL PHOTOGRAPHY
FLOWN APRIL 19 - 2001
AT A SCALE 1" = 1000'

NOTES:
1. SOUNDINGS ARE IN FEET AND TENTHS AND REFER TO MEAN LOWER LOW WATER.
2. HORIZONTAL DATUM IS NAD 1983.
3. THE CONDITION SURVEY DEPICTED ON THIS DRAWING IS NOT INTENDED TO REPLACE NAUTICAL CHARTS PUBLISHED BY NATIONAL OCEAN SERVICE, U.S. COAST GUARD AIDS TO NAVIGATION, OR U.S. COAST GUARD NOTICES TO MARINERS. THE SOUNDINGS ON THIS DRAWING ONLY INDICATE THE GENERAL CONDITION OF THE CHANNEL ON THE DATE OF SURVEY, AND ARE NOT INTENDED TO BE USED FOR NAVIGATION PURPOSES.
4. DATE OF SURVEY: 23 OCT. 2007

200 100 0 200 400FT
SCALE: 1" = 200'

US Army Corps of Engineers
Charleston District

DESCRIPTION	DATE	APPR.	MARK	DESCRIPTION	DATE	APPR.

Designed by:
Drawn by: MRV
Checked by:
Submitted by:
Date: OCT. 07
Rev.
Design file no. 9191
Drawing Code:
File name:
Plot date:
Dwg scale: 1" = 200'

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
CHARLESTON, SOUTH CAROLINA

AIWW, WINYAH BAY TO CHARLESTON
STA. 714+82 TO STA. 776+02N
9191
GEORGETOWN,CHARLESTON COUNTIES, SOUTH CAROLINA

SHEET REFERENCE NUMBER
SHEET 16 OF 62

WC-S16.DGN

...\9191S16.DGN 10/30/2007 12:23:43 PM