COORDINATES					
PT.	STATION	NAD 27		NAD 83	
NO.	W/OFFSET	EAST (X)	NORTHING (Y)	EAST (X)	NORTHING (Y)
	74+00S 280R	2,426,415.54	424,985.96	2,426,439.09	425,133.16
	90+00S 280R	2,425,324.53	423,815.62	2,425,348.39	423,962.64
	90+00S 275L	2,425,730.48	423,437.20	2,425,754.41	423,584.33
	106+00S 275L	2,424,639.65	422,266.93	2,424,663.89	422,413.88
	106+00S 280R	2,424,233.69	422,645.37	2,424,257.86	422,792.20

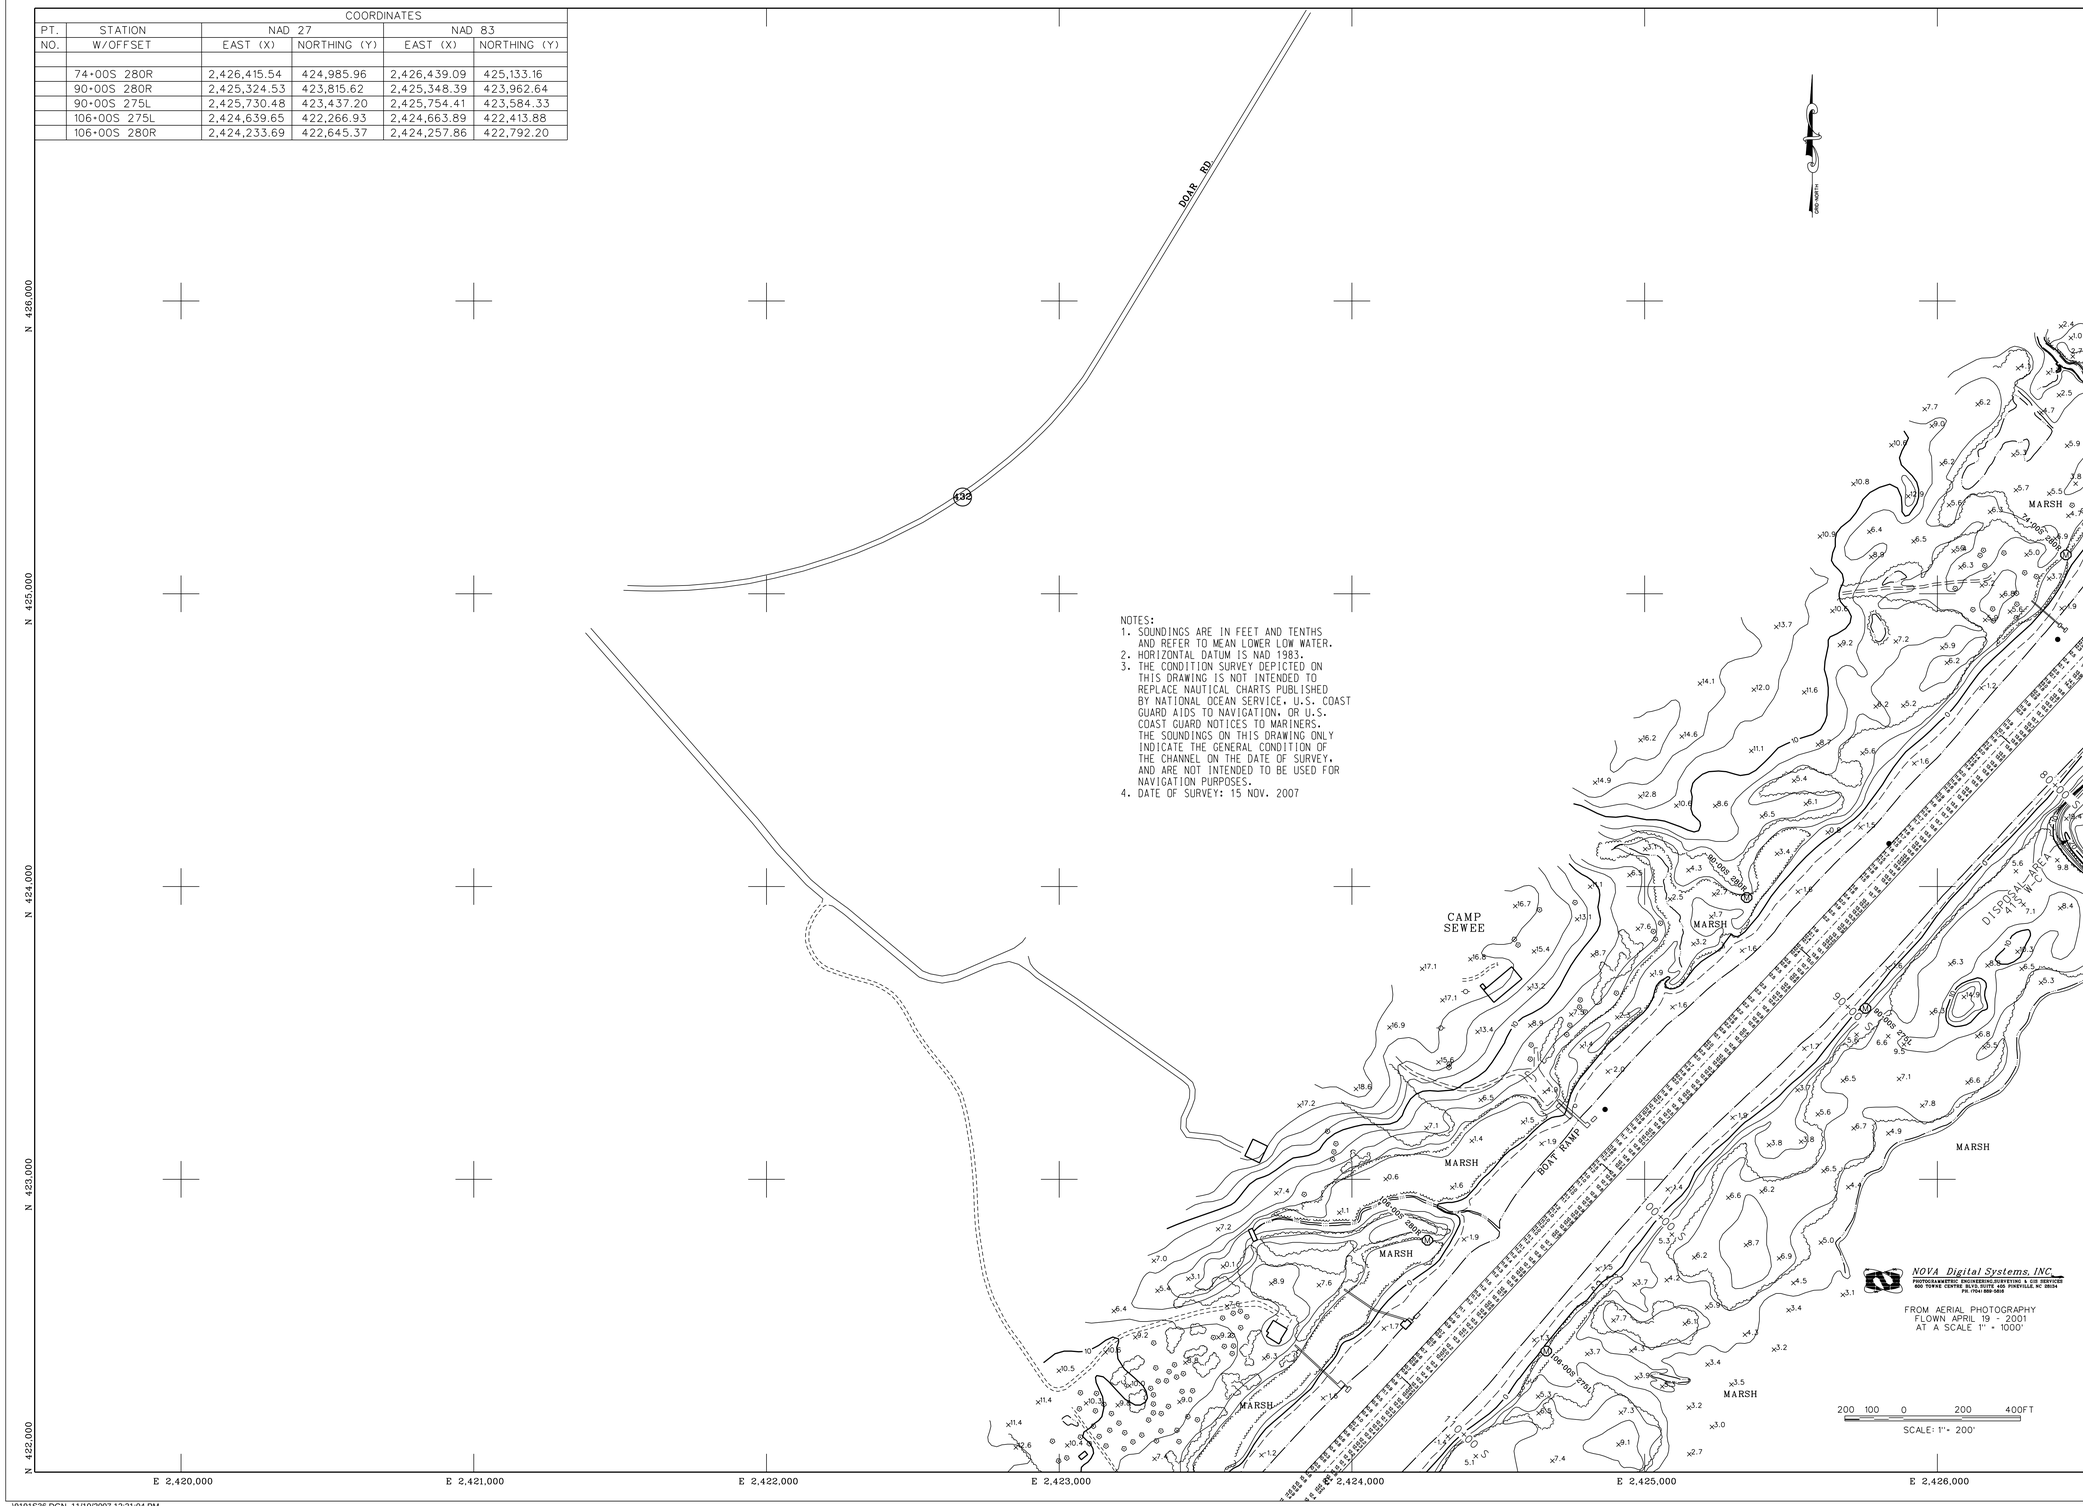

NOTES:
1. SOUNDINGS ARE IN FEET AND TENTHS AND REFER TO MEAN LOWER LOW WATER.
2. HORIZONTAL DATUM IS NAD 1983.
3. THE CONDITION SURVEY DEPICTED ON THIS DRAWING IS NOT INTENDED TO REPLACE NAUTICAL CHARTS PUBLISHED BY NATIONAL OCEAN SERVICE, U.S. COAST GUARD AIDS TO NAVIGATION, OR U.S. COAST GUARD NOTICES TO MARINERS. THE SOUNDINGS ON THIS DRAWING ONLY INDICATE THE GENERAL CONDITION OF THE CHANNEL ON THE DATE OF SURVEY, AND ARE NOT INTENDED TO BE USED FOR NAVIGATION PURPOSES.
4. DATE OF SURVEY: 15 NOV. 2007

US Army Corps of Engineers
Charleston District

APPR.	DATE	DESCRIPTION	MARK	APPR.	DATE	DESCRIPTION

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
CHARLESTON, SOUTH CAROLINA

Designed by:
Drawn by: MRV
Cad by:
Reviewed by:
Submitted by:
Date: NOV. 07
Design file no. 9191
Drawing Code:
File name: 9191S36
Dwg scale: 1" = 200'
Rev:

AIWW, WINYAH BAY TO CHARLESTON
STA. 76+09S TO STA. 114+20S
9191
GEORGETOWN,CHARLESTON COUNTIES, SOUTH CAROLINA

SHEET REFERENCE NUMBER
SHEET 36 OF 62

WC-536.DGN

..\9191S36.DGN 11/19/2007 12:21:04 PM