
Farley 1
4Q/2000 Performance Indicators

Licensee's General Comments: none

Unplanned Scrams per 7000 Critical Hrs

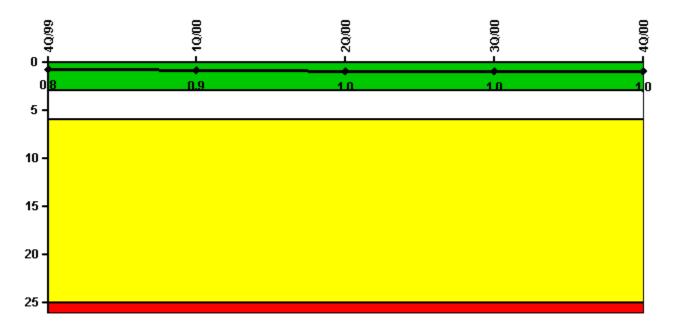


Thresholds: White > 3.0 Yellow > 6.0 Red > 25.0

Notes

Unplanned Scrams per 7000 Critical Hrs	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Unplanned scrams	0	0	1.0	0	0
Critical hours	2209.0	1512.6	882.7	2208.0	2209.0
Indicator value	0.8	0.9	1.0	1.0	1.0

Scrams with Loss of Normal Heat Removal

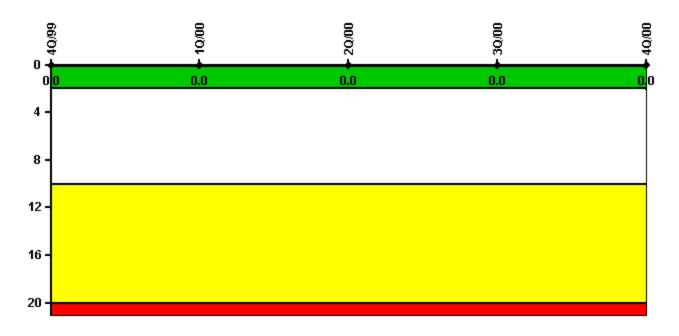


Thresholds: White > 2.0 Yellow > 10.0 Red > 20.0

Notes

Scrams with Loss of Normal Heat Removal	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Scrams	0	0	0	0	0
Indicator value	0	0	0	0	0

Unplanned Power Changes per 7000 Critical Hrs

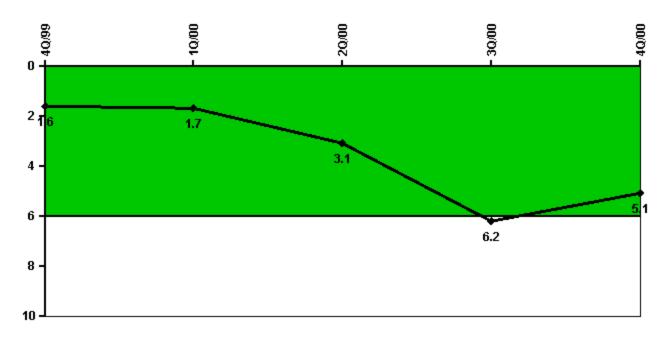

Thresholds: White > 6.0


Notes

Unplanned Power Changes per 7000 Critical Hrs	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Unplanned power changes	1.0	1.0	1.0	3.0	0
Critical hours	2209.0	1512.6	882.7	2208.0	2209.0
Indicator value	1.6	1.7	3.1	6.2	5.1

Licensee Comments:

4Q/00: White entry Q3 2000 due to cooling tower structural problems and distribution header leaks. Reentry to Green Q4 2000 due to rollout of Q4 1999 transient.

Safety System Unavailability, Emergency AC Power, >2EDG

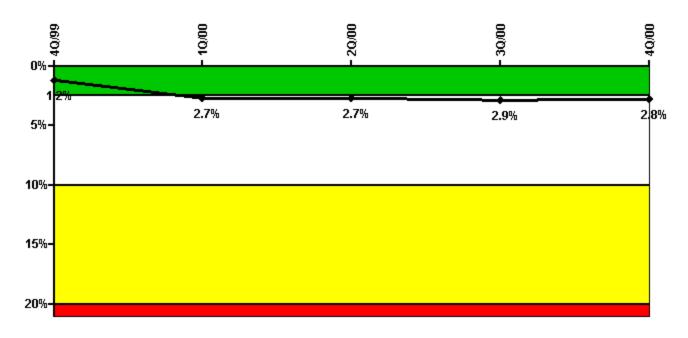

Thresholds: White > 2.5% Yellow > 10.0% Red > 20.0%

Notes

Safety System Unavailability, Emergency AC Power, >2ED	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Train 1					
Planned unavailable hours	1.00	17.10	8.00	132.50	193.50
Unplanned unavailable hours	0	0	0	0.60	0
Fault exposure hours	0	0	0	0	0
Effective Reset hours	0	0	0	0	0
Required hours	2209.00	2184.00	2183.00	2208.00	2209.00
Train 2					
Planned unavailable hours	0	0	3.20	0	0.80
Unplanned unavailable hours	0	0	0	0	11.10
Fault exposure hours	0	0	0	0	0
Effective Reset hours	0	0	0	0	0
Required hours	2209.00	2184.00	2183.00	2208.00	2209.00
Train 3					
Planned unavailable hours	4.60	0	0	0	0.70
Unplanned unavailable hours	6.90	0	0	13.50	0
Fault exposure hours	0	1228.50	0	0	0
Effective Reset hours	0	0	0	0	0
Required hours	2209.00	2184.00	2183.00	2208.00	2209.00
Indicator value	1.2%	2.7%	2.7%	2.9%	2.8%

Licensee Comments:

4Q/00: One of 3 diesel generators unavailable (Q1 2000) due to lack of automatic power transfer capability. DG was operable per Technical Specifications. Reasonable operator action is not credited under this indicator. White threshhold entered Q1 2000. 12.6 hours planned unavailability for Train 3 EDG in February 2000 not reported since fault exposure was reported for the entire month.


4Q/00: One of 3 diesel generators unavailable (Q1 2000) due to lack of automatic power transfer capability. DG was operable per Technical Specifications. Reasonable operator action is not credited under this indicator. White threshhold entered Q1 2000. 12.6 hours planned

unavailability for Train 3 EDG in February 2000 not reported since fault exposure was reported for the entire month.

1Q/00: One of 3 diesel generators unavailable due to lack of automatic power transfer capability. DG was operable per Technical Specifications. Reasonable operator action not credited under this indicator. WHITE entry.

1Q/00: One of 3 diesel generators unavailable due to lack of automatic power transfer capability. DG was operable per Technical Specifications. Reasonable operator action not credited under this indicator. Q1 2001 removed Q1 2000 Fault Exposure Hours for Train 3. Replaced 12.6 Planned Unavailable hours for same train. Color returns green.

Safety System Unavailability, High Pressure Injection System (HPSI)

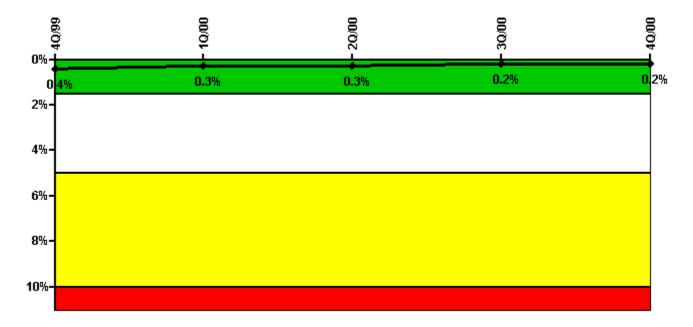

Thresholds: White > 1.5% Yellow > 5.0% Red > 10.0%

Notes

Safety System Unavailability, High Pressure Injection System (HPSI)	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Train 1					
Planned unavailable hours	0	0	2.20	5.40	6.40
Unplanned unavailable hours	0	0	0	0.60	0
Fault exposure hours	0	0	0	0	0
Effective Reset hours	0	0	0	0	0
Required hours	2209.00	1512.60	882.70	2208.00	2209.00
Train 2					
Planned unavailable hours	0	0	6.80	3.30	6.20
Unplanned unavailable hours	0	0	0	0	0.30
Fault exposure hours	0	0	0	0	0
Effective Reset hours	0	0	0	0	0
Required hours	2209.00	1512.60	882.70	2208.00	2209.00
Indicator value	0.4%	0.3%	0.3%	0.2%	0.2%


Licensee Comments:

4Q/00: Reactor Protection System testing hours added with 1Q2001 report. Color unaffected.

3Q/00: Reactor Protection System testing hours added with 1Q2001 report. Color unaffected.

2Q/00: Reactor Protection System testing hours added with 1Q2001 report. Color unaffected.

Safety System Unavailability, Heat Removal System (AFW)

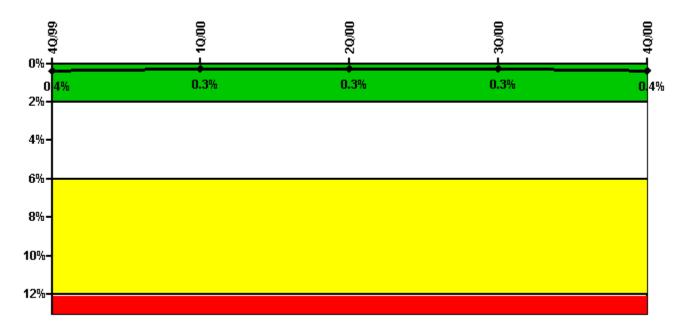

Thresholds: White > 2.0% Yellow > 6.0% Red > 12.0%

Notes

Safety System Unavailability, Heat Removal System (AFW)	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Train 1					
Planned unavailable hours	0	1.10	4.60	6.00	17.70
Unplanned unavailable hours	0	0	0	0.60	0
Fault exposure hours	0	0	0	0	0
Effective Reset hours	0	0	0	0	0
Required hours	2209.00	1512.60	882.70	2208.00	2209.00
Train 2					
Planned unavailable hours	0	0.40	9.20	3.90	7.30
Unplanned unavailable hours	0	0	0	0	0.30
Fault exposure hours	0	0	0	0	0
Effective Reset hours	0	0	0	0	0
Required hours	2209.00	1512.60	882.70	2208.00	2209.00
Train 3					
Planned unavailable hours	16.00	0.90	0	1.50	38.10
Unplanned unavailable hours	0	0	0	0	0
Fault exposure hours	0	0	0	0	0

Effective Reset hours	0	0	0	0	0
Required hours	2209.00	1512.60	882.70	2208.00	2209.00
Indicator value	0.4%	0.3%	0.3%	0.3%	0.4%

Licensee Comments:

4Q/00: Reactor Protection System testing hours added with 1Q2001 report. Color unaffected.

3Q/00: Reactor Protection System testing hours added with 1Q2001 report. Color unaffected.

2Q/00: Reactor Protection System testing hours added with 1Q2001 report. Color unaffected.

Safety System Unavailability, Residual Heat Removal System



Thresholds: White > 1.5% Yellow > 5.0% Red > 10.0%

Notes

Safety System Unavailability, Residual Heat Removal System	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Train 1					
Planned unavailable hours	19.40	1.40	2.60	13.50	7.80
Unplanned unavailable hours	0	0	0	0.60	0
Fault exposure hours	0	0	0	0	0
Effective Reset hours	0	0	0	0	0
Required hours	2209.00	2184.00	2183.00	2208.00	2209.00
Train 2					
Planned unavailable hours	13.30	0	11.60	15.20	6.60
Unplanned unavailable hours	0	0	0	0	0.30
Fault exposure hours	0	0	0	0	0

Effective Reset hours	0	0	0	0	0
Required hours	2209.00	2184.00	2183.00	2208.00	2209.00
Indicator value	0.4%	0.3%	0.3%	0.3%	0.3%


Licensee Comments:

4Q/00: Reactor Protection System testing hours added with 1Q2001 report. Color unaffected.

3Q/00: Reactor Protection System testing hours added with 1Q2001 report. Color unaffected.

2Q/00: Reactor Protection System testing hours added with 1Q2001 report. Color unaffected.

Safety System Functional Failures (PWR)

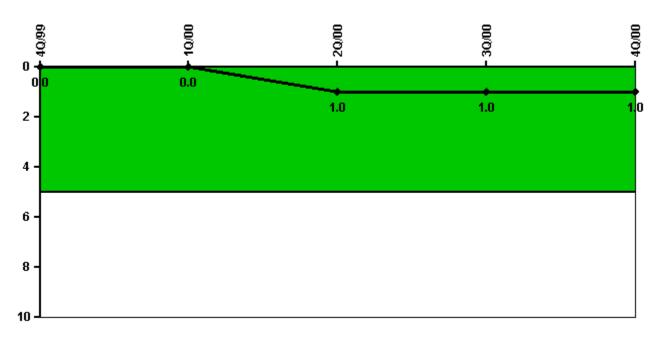


Thresholds: White > 5.0

Notes

Safety System Functional Failures (PWR)	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Safety System Functional Failures	0	0	1	0	0
Indicator value	0	0	1	1	1

Reactor Coolant System Activity

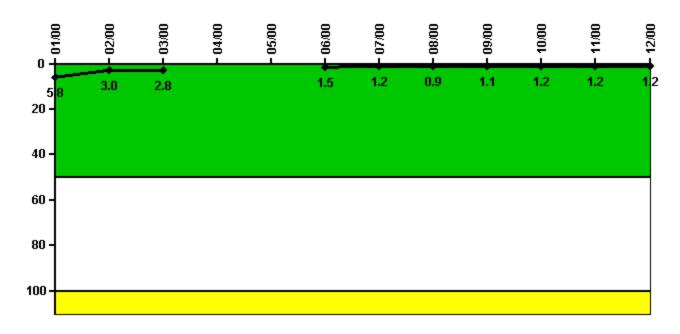


Thresholds: White > 50.0 Yellow > 100.0

Notes

Reactor Coolant System Activity	1/00	2/00	3/00	4/00	5/00	6/00	7/00	8/00	9/00	10/00	11/00	12/00
Maximum activity	0.017310	0.009058	0.008488	N/A	N/A	0.007439	0.006018	0.004440	0.005290	0.005990	0.006200	0.005943
Technical specification limit	0.3	0.3	0.3	N/A	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Indicator value	5.8	3.0	2.8	N/A	N/A	1.5	1.2	0.9	1.1	1.2	1.2	1.2

Reactor Coolant System Leakage

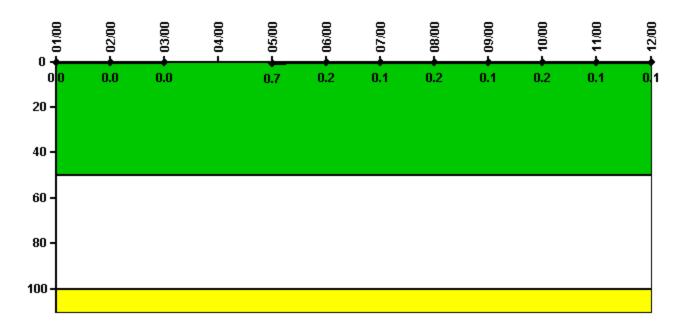


Thresholds: White > 50.0 Yellow > 100.0

Notes

Reactor Coolant System Leakage	1/00	2/00	3/00	4/00	5/00	6/00	7/00	8/00	9/00	10/00	11/00	12/00
Maximum leakage	0	0	0	N/A	0.069	0.017	0.012	0.020	0.012	0.018	0.012	0.012
Technical specification limit	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
Indicator value	0	0	0	N/A	0.7	0.2	0.1	0.2	0.1	0.2	0.1	0.1

Drill/Exercise Performance

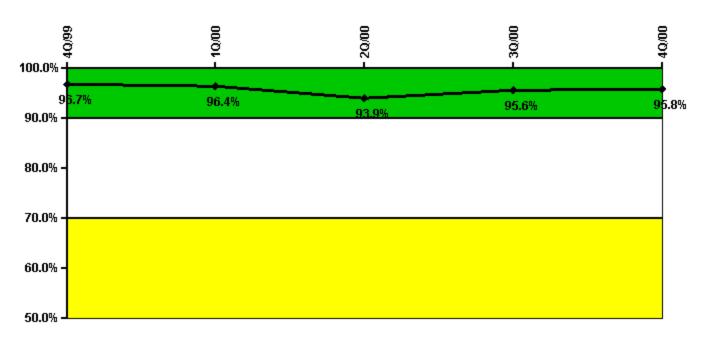


Thresholds: White < 90.0% Yellow < 70.0%

Notes

Drill/Exercise Performance	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Successful opportunities	0	6.0	15.0	65.0	56.0
Total opportunities	0	6.0	18.0	66.0	58.0
Indicator value	96.7%	96.4%	93.9%	95.6%	95.8%

ERO Drill Participation

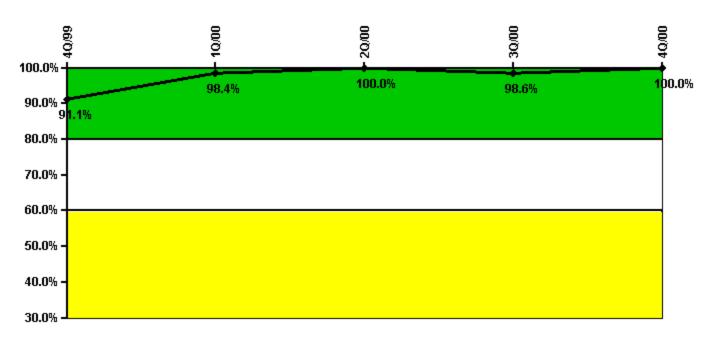


Thresholds: White < 80.0% Yellow < 60.0%

Notes

ERO Drill Participation	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Participating Key personnel	112.0	121.0	121.0	141.0	103.0
Total Key personnel	123.0	123.0	121.0	143.0	103.0
Indicator value	91.1%	98.4%	100.0%	98.6%	100.0%

Alert & Notification System

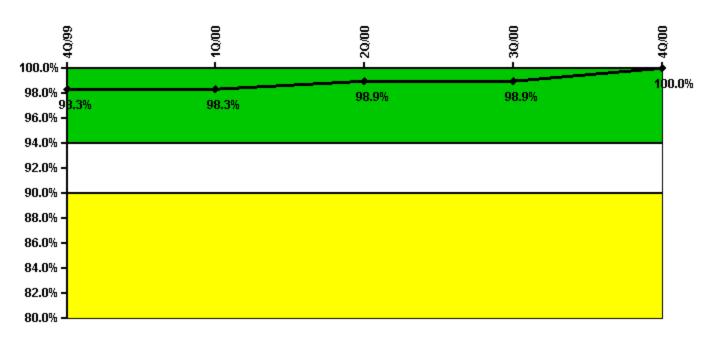

Thresholds: White < 94.0% Yellow < 90.0%

Notes

Alert & Notification System	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Successful siren-tests	46	42	48	42	45
Total sirens-tests	48	42	48	42	45
Indicator value	98.3%	98.3%	98.9%	98.9%	100.0%

Occupational Exposure Control Effectiveness




Thresholds: White > 2.0 Yellow > 5.0

Notes

Occupational Exposure Control Effectiveness	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
High radiation area occurrences	0	0	0	0	0
Very high radiation area occurrences	0	0	0	0	0
Unintended exposure occurrences	1	0	0	0	0
Indicator value	1	1	1	1	0

RETS/ODCM Radiological Effluent

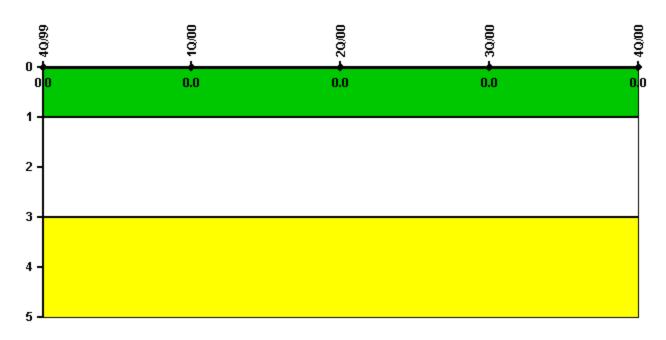


Thresholds: White > 1.0 Yellow > 3.0

Notes

RETS/ODCM Radiological Effluent	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
RETS/ODCM occurrences	0	0	0	0	0
Indicator value	0	0	0	0	0

Protected Area Security Performance Index

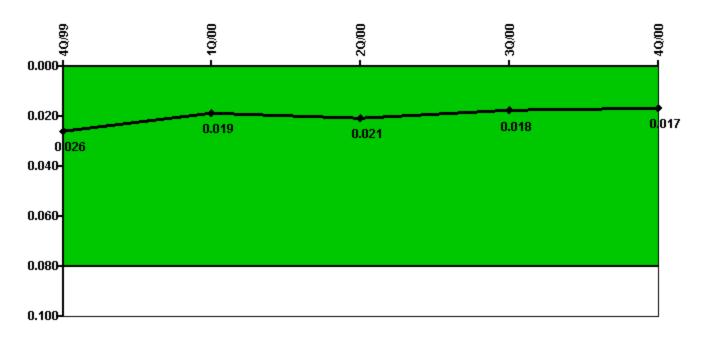


Thresholds: White > 0.080

Notes

Protected Area Security Performance Index	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
IDS compensatory hours	87.50	6.30	231.40	119.10	88.37
CCTV compensatory hours	35.5	17.0	0	20.7	9.3
IDS normalization factor	1.70	1.70	1.70	1.70	1.70
CCTV normalization factor	1.2	1.2	1.2	1.2	1.2
Index Value	0.026	0.019	0.021	0.018	0.017

Personnel Screening Program

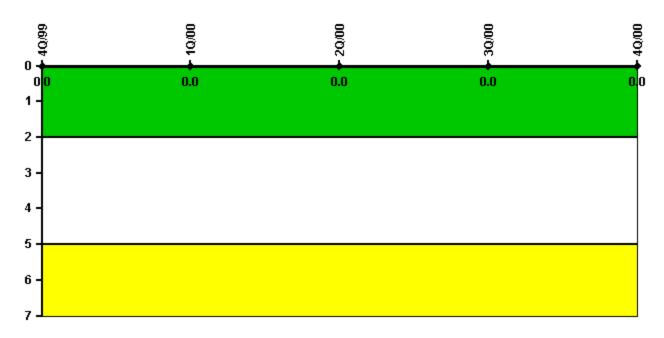


Thresholds: White > 2.0 Yellow > 5.0

Notes

Personnel Screening Program	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Program failures	0	0	0	0	0
Indicator value	0	0	0	0	0

FFD/Personnel Reliability

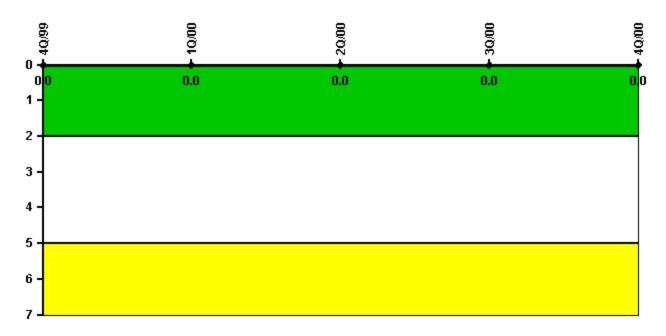

Thresholds: White > 2.0 Yellow > 5.0

Notes

FFD/Personnel Reliability	4Q/99	1Q/00	2Q/00	3Q/00	4Q/00
Program Failures	0	0	0	0	0
Indicator value	0	0	0	0	0

Licensee Comments: none

A PI Summary | Inspection Findings Summary | Action Matrix Summary | Reactor Oversight Process

Last Modified: March 28, 2002