


# Limitations for Trench Sanitary Landfills - Florida (2008)



## Sanitary Landfills (Trench)

Sanitary landfill (trench) is a method of disposing solid waste by placing refuse in successive layers in an excavated trench. The waste is spread, compacted, and covered daily with a thin layer of soil that is excavated from the trench. When the trench is full, a final cover of soil material at least 2 feet thick is placed over the landfill.



Soils are rated and placed into sanitary landfill (trench) interpretive rating classes per their rating indices. These are not limited (rating index = 0), somewhat limited (rating index = 1), or very limited (rating index = 1.0). These are based on physical properties and related to the depth of excavation required for trenching (approximately 5 to 6 feet). However, because trenches may be as deep as 15 feet or more, geologic investigations are needed to determine the potential for pollution of ground water as well as to determine the design needed. These investigations include the examination of stratification, rock formations, and geologic conditions that might lead to the conducting of leachates to aquifers, wells, watercourses, and other water sources.

Properties that influence the risk of pollution, ease of excavation, traffability, and revegetation are major considerations. Soils that flood or have a water table within the depth of excavation present a potential pollution hazard and are difficult to excavate. Slope is an important consideration because it affects the work involved in road construction, the performance of the roads, and the control of surface water

around the landfill. It may also cause difficulty in constructing trenches for which the trench bottom must be kept level and oriented to follow the contour.

The ease with which the trench is dug and with which a soil can be used as daily and final covers is based largely on texture and consistency of the soil. The texture and consistency of a soil determine the degree of workability of the soil both when dry and when wet. Soils that are plastic and sticky when wet are difficult to excavate, grade, or compact and hard to place as a daily or final cover over a layer of refuse. The preferred material for a cover should be a soil material that is favorable for the growth of plants. It should not contain excess sodium or salt and should not be too acid. In comparison with other horizons, the A horizon in most soils has the best workability and the highest content of organic matter. Thus, for a trench-type landfill operation it may be desirable to stockpile the surface layer for use in the final blanketing of the fill.

This interpretation is applicable to both heavily populated and sparsely populated areas. While some general observations may be made, on-site evaluation is required before the final site is selected. Improper site selection, design, or installation may cause contamination of ground water, seepage, and/or contamination of stream systems from surface drainage or floodwater. Potential contamination may be reduced or eliminated by installing systems designed to overcome or reduce the effects of the limiting soil property.

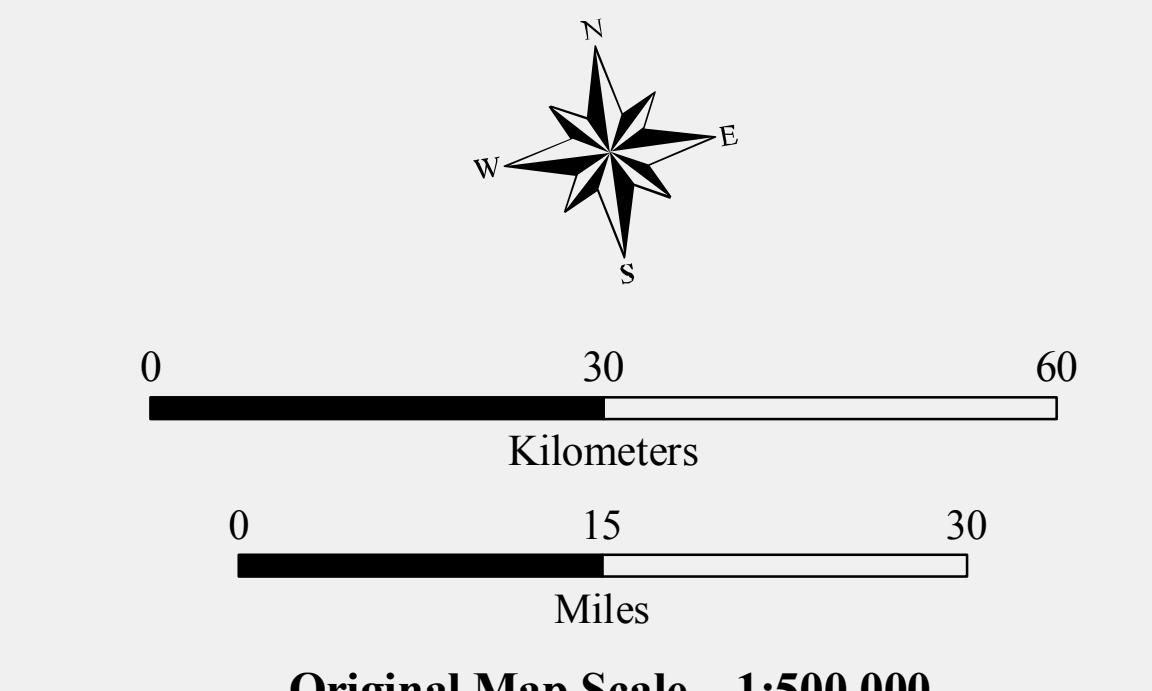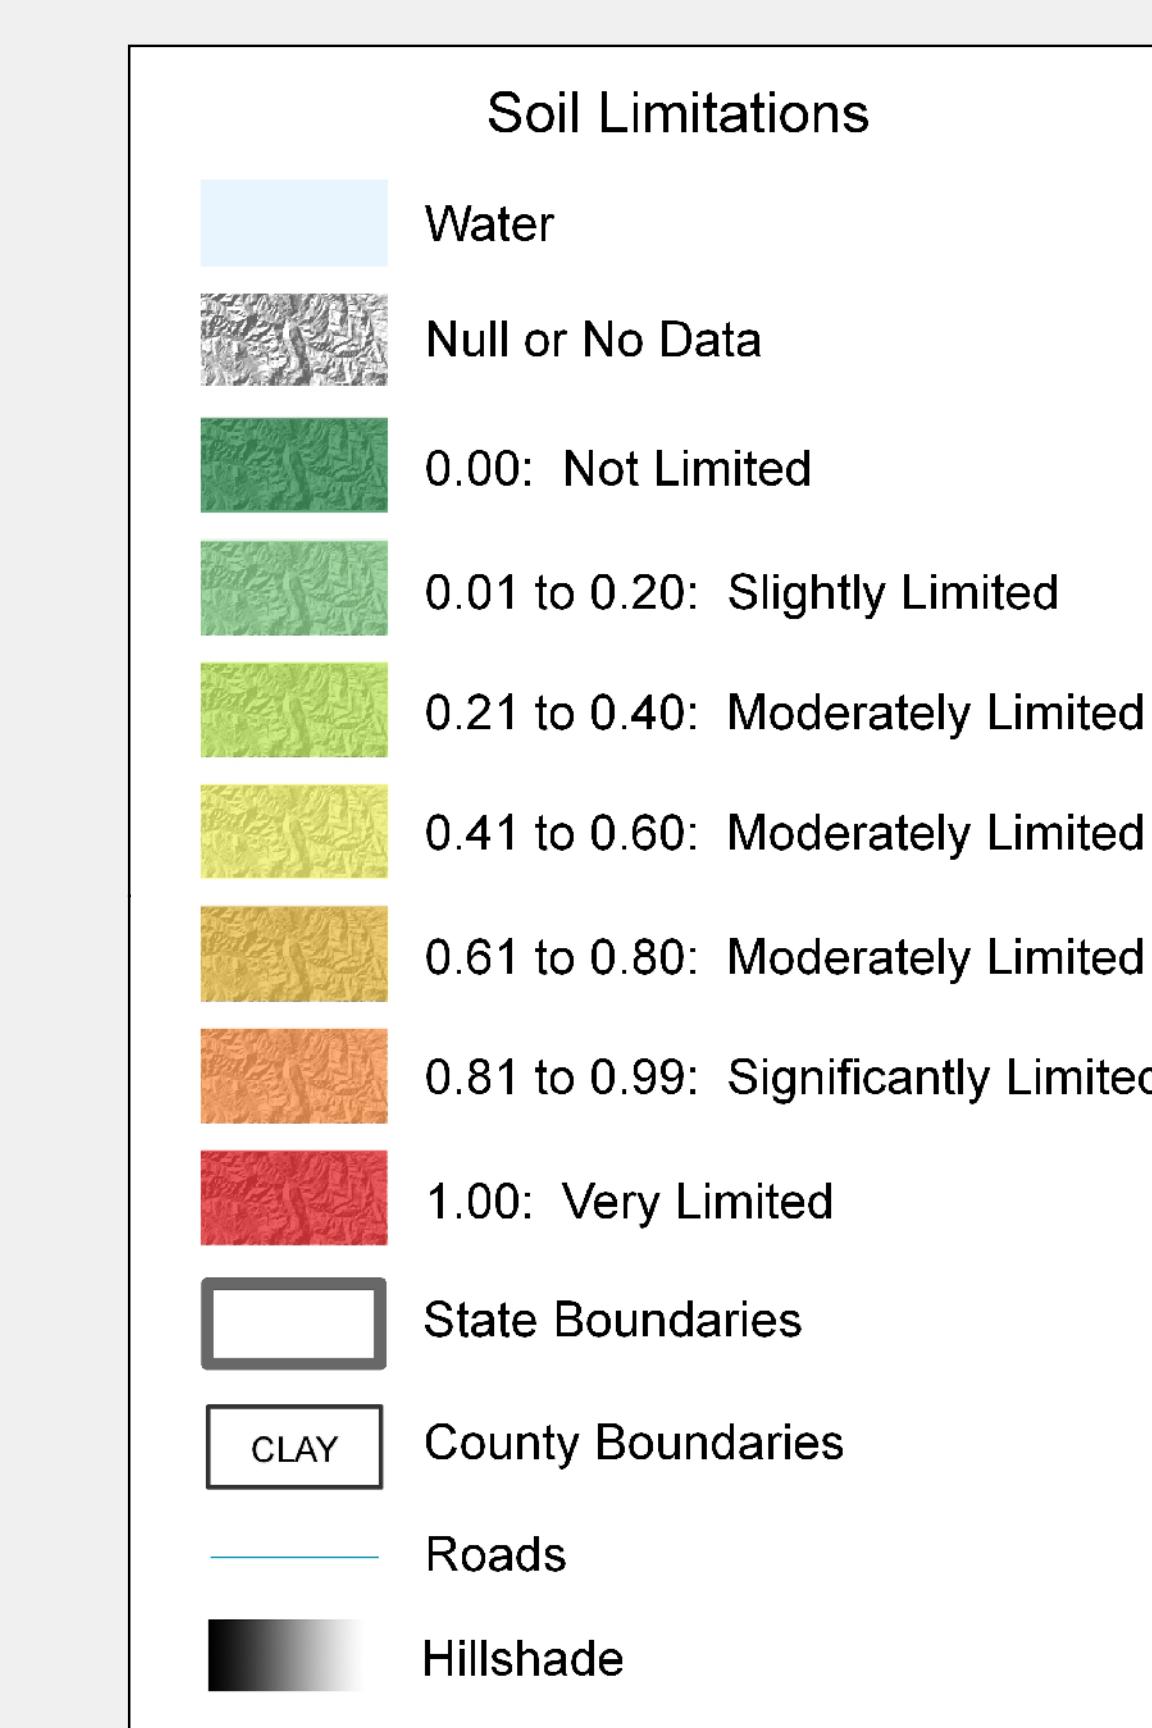

Albers Equal Area Map Projection  
North American Datum of 1983  
**NRCS** Natural Resources Conservation Service