



APPROACHES FOR UNCURBED HIGHWAYS
TYPE 1 AND TYPE 2

NOTE:

1. TYPE 1 APPROACH:
Top width (W) - 16' minimum
Radius - 20' minimum
2. TYPE 2 APPROACH:
Top width (W) - 24' minimum
Radius - 30' minimum
3. GRADING REQUIREMENTS: Construct sideslopes of finish approaches compatible with adjacent roadway construction.
4. PAVEMENT STRUCTURE REQUIREMENTS: Extend the surface course to the right-of-way or easement line unless otherwise shown on the plans.
5. Finish approaches to public roads used for commercial purposes with same treatment as shown for the adjacent roadbed.
6. Finish other approaches with aggregate base. Provide a surface course of the same treatment as shown for the adjacent roadbed, but do not exceed 1/2" in depth.

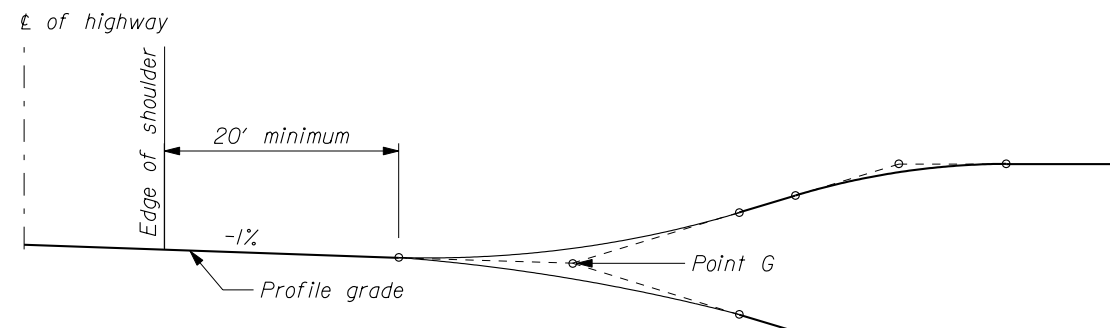

APPROACH PROFILE

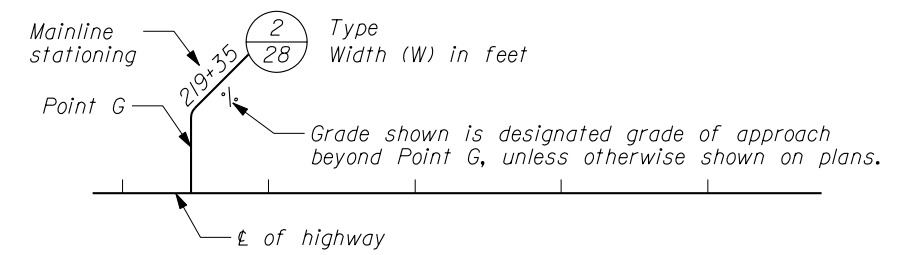

ROAD APPROACH LOCATIONS
ON PLAN SHEETS

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION WESTERN FEDERAL LANDS HIGHWAY DIVISION	
DETAIL	
STANDARD IDAHO ROAD APPROACH	
DETAIL APPROVED FOR USE 3/2003	DETAIL
REVISED:	W200-5

3/18/2003
f:\StandDraw\Western\w20005.dgn