



**US Army Corps  
of Engineers**

Hydrologic Engineering Center

---

# **Use of Computer Program HEC-5 for Water Supply Analysis**

**August 1984**

# REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

**PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ORGANIZATION.**

<b>1. REPORT DATE</b> (DD-MM-YYYY) August 1984		<b>2. REPORT TYPE</b> Technical Paper		<b>3. DATES COVERED</b> (From - To)	
<b>4. TITLE AND SUBTITLE</b> Use of Computer Program HEC-5 for Water Supply Analysis				<b>5a. CONTRACT NUMBER</b>	
				<b>5b. GRANT NUMBER</b>	
				<b>5c. PROGRAM ELEMENT NUMBER</b>	
<b>6. AUTHOR(S)</b> Richard J. Hayes, Bill S. Eichert				<b>5d. PROJECT NUMBER</b>	
				<b>5e. TASK NUMBER</b>	
				<b>5f. WORK UNIT NUMBER</b>	
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> US Army Corps of Engineers Institute for Water Resources Hydrologic Engineering Center (HEC) 609 Second Street Davis, CA 95616-4687				<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b> TP-101	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b>				<b>10. SPONSOR/ MONITOR'S ACRONYM(S)</b>	
				<b>11. SPONSOR/ MONITOR'S REPORT NUMBER(S)</b>	
<b>12. DISTRIBUTION / AVAILABILITY STATEMENT</b> Approved for public release; distribution is unlimited.					
<b>13. SUPPLEMENTARY NOTES</b> Presented at the Twentieth Annual American Water Resources Association Conference, Washington, D.C., 14 August 1984.					
<b>14. ABSTRACT</b> Computer program HEC-5, "Simulation of Flood control and Conservation System", has extensive capabilities for the analysis of water supply systems. HEC-5, developed by the U.S. Army Corps of Engineers, Hydrologic Engineering Center in Davis, California, is the Corps principal reservoir simulation model. Water supply analysis capabilities include options for period-of-record optimization of water supply storage and yields, conservation operation which distinguishes between desired and required (essential) water supply demands, provisions for monthly or seasonally varying reservoir operation levels (rule curves), a variety of water supply diversions, and consideration of evaporation. Multi-purpose, multi-reservoir systems may be simulated with hourly, daily, weekly or monthly simulation intervals.  In addition to Corps of Engineers applications, the HEC-5 program has been widely applied by other federal agencies, state water resource agencies and domestic and foreign engineering firms. The 1979 and 1982 versions of HEC-5 will be replaced by the soon to be released 1984 version which will provide improved analysis capabilities for water supply, hydropower, and flood control simulations. In addition, the 1984 version will incorporate code modifications which simplify and modularize the code in order to minimize program maintenance, enhance readability, facilitate program improvements and enhance hardware adaptability.					
<b>15. SUBJECT TERMS</b> reservoir system analysis, optimization, reservoir operation					
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b> UU	<b>18. NUMBER OF PAGES</b> 16	<b>19a. NAME OF RESPONSIBLE PERSON</b>
<b>a. REPORT</b> U	<b>b. ABSTRACT</b> U	<b>c. THIS PAGE</b> U			<b>19b. TELEPHONE NUMBER</b>

# **Use of Computer Program HEC-5 for Water Supply Analysis**

**August 1984**

US Army Corps of Engineers  
Institute for Water Resources  
Hydrologic Engineering Center  
609 Second Street  
Davis, CA 95616

(530) 756-1104  
(530) 756-8250 FAX  
[www.hec.usace.army.mil](http://www.hec.usace.army.mil)

TP-101

Papers in this series have resulted from technical activities of the Hydrologic Engineering Center. Versions of some of these have been published in technical journals or in conference proceedings. The purpose of this series is to make the information available for use in the Center's training program and for distribution with the Corps of Engineers.

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

USE OF COMPUTER PROGRAM HEC-5  
FOR  
WATER SUPPLY ANALYSIS<sup>1</sup>

Richard J. Hayes and Bill S. Eichert<sup>2</sup>  
ABSTRACT

Computer program HEC-5, "Simulation of Flood Control and Conservation Systems," has extensive capabilities for the analysis of water supply systems. HEC-5, developed by the U.S. Army Corps of Engineers, Hydrologic Engineering Center in Davis, California, is the Corps principal reservoir simulation model. Water supply analysis capabilities include options for period-of-record optimization of water supply storage and yields, conservation operation which distinguishes between desired and required (essential) water supply demands, provisions for monthly or seasonally varying reservoir operation levels (rule curves), a variety of water supply diversions, and consideration of evaporation. Multipurpose, multireservoir systems may be simulated with hourly, daily, weekly or monthly simulation intervals.

In addition to Corps of Engineers applications, the HEC-5 program has been widely applied by other federal agencies, state water resource agencies and domestic and foreign engineering firms. The 1979 and 1982 versions of HEC-5 will be replaced by the soon to be released 1984 version which will provide improved analysis capabilities for water supply, hydropower, and flood control simulations. In addition, the 1984 version will incorporate code modifications which simplify and modularize the code in order to minimize program maintenance, enhance readability, facilitate program improvements and enhance hardware adaptability.

#### INTRODUCTION

Computer program HEC-5 "Simulation of Flood Control and Conservation Systems," (HEC, 1982) has been developed at the Hydrologic Engineering Center (HEC) by Bill S. Eichert, Director of the HEC. HEC-5 has evolved during the eleven years (1973-1984) of its development from a single purpose, single flood event simulation model to a comprehensive multiple purpose, period-of-record simulation model which has become the principal reservoir system analysis program of the Corps of Engineers. The HEC-5 development has expanded in that period in response to specific needs of the Corps of Engineers. The initial development focused on the simulation of flood control reservoir systems during individual floods and the determination of flood damages. During the latter seventies, in response to the Corps leadership role in the National Hydropower Study, enhanced capabilities for the simulation and sizing of hydropower facilities were added. During the past two years, in response to increased Corps interest in the solution of water supply problems, there have been a series of program improvements directly related to water supply analysis. In addition to expected further development for water supply analysis, planned program development in the next two years includes: continued efforts to modernize and improve program code to ease program maintenance, efficiency and adaptability; addition of more detailed hydropower design related options; and application and testing of the water quality version HEC-5Q (HEC, 1982) of the program.

<sup>1</sup>Presented at the Twentieth Annual American Water Resources Association Conference, Washington, D. C., August 14, 1984.

<sup>2</sup>Respectively, Hydraulic Engineer and Director, U.S. Army Corps of Engineers, The Hydrologic Engineering Center, 609 Second Street, Davis, CA 95616

HEC-5 is currently being applied by the HEC in two on-going Corps of Engineers water supply investigations. These studies not only provide needed assistance to the local Corps District office, but also provide the HEC with an opportunity to test program developments in a variety of field conditions. The HEC also is currently providing assistance to other agencies in the application of HEC-5 to water supply analysis, most notably, the U.S. Bureau of Reclamation and the United Nations Development Program in India.

## OVERVIEW OF HEC-5 CAPABILITIES

HEC-5 is capable of simulating the operation of systems of reservoirs for both flood control and conservation requirements. Detailed information on the program's capabilities, as well as example applications is contained in the HEC-5 Users Manual (HEC, 1982); a brief listing of HEC-5 capabilities is also displayed in the accompanying Table 1. Reservoir operation for conservation can include hydropower and water supply releases which consider the availability of reservoir storage. Releases can be based on requirements at the reservoir or at any number of downstream control points. Flood control releases for downstream control points include the impact of routing as well as intervening local flows. To provide realistic simulations, a forecast time (for downstream flows) and a contingency factor may be specified. Five hydrologic routing methods including Muskingum and Modified Puls are available for use with HEC-5.

The allocation of reservoir storage or levels (see Figure 1) for flood control and conservation storage can vary monthly or on a seasonal basis. The basic operation of the program, while a reservoir is above the top of the conservation storage (i.e., in the flood control storage zone), is to maximize reservoir releases without causing flooding at downstream locations until such a time as the reservoir is lowered to the top of the conservation zone.

Flood control releases consider: capacities of spillways and other outlet works; rates of change; safe channel capacities at the dam and at designated downstream control points; the effects of routing; releases from other reservoirs; local uncontrolled flows; forecasting; contingencies and operational priorities.

During time periods when a reservoir level is below the top of the conservation level the basic operation is based on minimizing releases while providing for all conservation demands until such a time as the reservoir must make flood control releases. Within the conservation storage zone is another storage level termed the buffer level. Releases made while storage is below the buffer level are only made to satisfy essential water supply requirements (called required flows in HEC-5 output). Conservation releases consider: specified flow requirements at the dam and at designated downstream control points; availability of conservation storage (i.e., desired flows when storage is sufficient and required flows when main conservation storage is depleted); hydropower generation requirements; downstream diversions; releases from other reservoirs; routing effects; local uncontrolled flows;

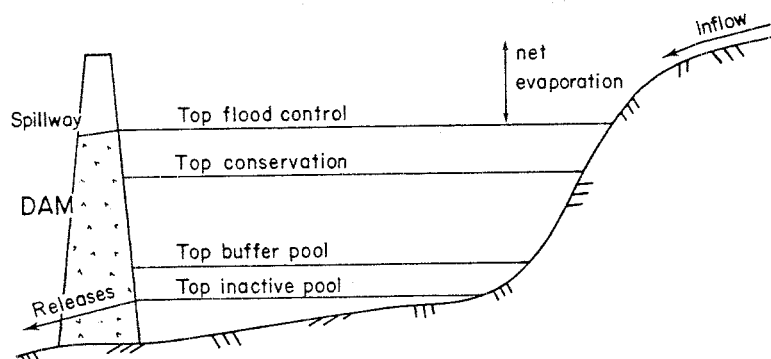


Fig. 1 Reservoir Operating Levels

## GENERAL CAPABILITIES

Any configuration of reservoir system (the upstream most locations must be reservoirs)

Operation of gated reservoir outlets based on downstream flows considering routing effects.

Flexible output - user designed, sequential, annual summaries, flood summaries, etc.

Hydrologic routing methods.

Forecasting ability and contingency factor which limit operation efficiency.

User override of reservoir releases.

Variable time steps (hourly, daily, weekly, monthly or mixture).

Capable of period-of-record simulations, any number of floods - unlimited number of time periods.

Inflows may be incremental or cumulative, and average or end of period.

Seasonal Reservoir operation (rule curves)

## FLOOD CONTROL OPERATION

Flood damages or average annual damage - annual peaks or seasonal and duration effects.

Flood control system operation.

Emergency Gate Regulation.

Variable channel capacity.

## HYDROPOWER OPERATION

Optimization of installed capacity or monthly energy production based on firm energy approach.

Energy demands: system and at site (monthly, daily, hourly) or plant factor vs percent conservation storage.

Tailwater: rating curve, downstream reservoir or block loading.

Peaking capability.

Pumped storage simulation.

## WATER SUPPLY OPERATION

Optimization of reservoir storage, yields and diversions.

Optimization of downstream control point water supply demands.

Specification of required and desired flow goals at reservoirs and at control points.

Diversions to upstream or downstream locations.

Balanced reservoir levels for operation of reservoir systems.

## WATER QUALITY OPERATION (ONLY AVAILABLE IN HEC-5Q VERSION)

Multi-level gate operation.

Flow alteration.

Temperature analysis.

3 nonconservative parameters.

3 conservative parameters.

Phytoplankton analysis.

Daily and monthly time steps.

forecasting; contingencies; and operational priorities. Optimization studies can also be accomplished with HEC-5 to determine reservoir storages, water supply yields, diversions, and hydropower capacities and energy production.

Time series data (i.e., inflows) may be specified with time increments ranging from one hour to one month. Any number of flow periods may be specified, and time intervals may be varied within a given simulation. Inflow data may be either cumulative or incremental and either average or end of period values may be specified. Metric or English units may be specified.

## HEC-5 WATER SUPPLY ANALYSIS CAPABILITIES

Reservoir operation to provide water supplies to meet downstream low flow requirements such as municipal and industrial, irrigation, navigation, fishery maintenance, recreation or water quality needs may be simulated with HEC-5. Detailed information on the application of HEC-5 for the simulation of water supply reservoirs is contained in Draft Training Document 20, Water Supply Simulation Using HEC-5 (HEC, 1983). Two types of low flow releases may be specified: minimum desired flows and minimum required flows. Reservoirs operate to release flows to satisfy minimum desired flow criteria when operating in the conservation storage zone while above the buffer level. In HEC-5 the buffer level represents the storage level at which a transition is made from normal water supply operation (minimum desired flows) to an operation for water supply (minimum required flows) during drought conditions. Minimum desired and required flows may be specified at reservoirs or non-reservoir control points as constant values, as flows which vary monthly or as minimum flows which vary period by period.

Water supply diversions, often primary features in typical water supply systems, may be included in HEC-5 simulation models. HEC-5 diversion options include constant, monthly varying, period varying, as well as diversions which are functions of stream flow, reservoir storage, or available pumping energy. Diversions may be made at both reservoirs and non-reservoir control points and may return to the system at upstream or downstream locations. Routing effects and percent of flow returning to the system can also be specified.

During water supply reservoir planning studies it is usually desirable to determine the minimum conservation storage based on a flow sequence (usually the historic period-of-record) which will be required to meet projected water supply requirements. The yield problem, in which a fixed amount of conservation storage is available and it is desired to determine the reliable water supply yield, is also typically addressed in water supply planning studies. Solutions to these two planning problems can be derived with the HEC-5 optimization options.

The HEC-5 optimization solution process employs iterative simulations using a monthly time step and user-defined allowable error criteria. In order to reduce the number of period-of-record simulations to a minimum, the program uses either a user supplied or an HEC-derived rule of thumb approach to define a critical period. When the optimization process has determined a minimum storage or reservoir yield, using the program-determined critical period that satisfies the user-supplied error criteria, the program will then check the results of the optimization process by simulating the optimized storage or yield with the entire period-of-record. The program's optimization option can be directed to repeat the entire sequence (critical period determination; optimization; period-of-record simulation) up to two more times if required.



The optimization for reservoir yield can be conducted for both the minimum desired flow (using the conservation pool above the buffer level) and the minimum required flow (using the entire conservation storage). Diversion schedules may also be optimized by the program. The 1984 version of HEC-5 provides for the optimization of yields (minimum desired and required flows) and diversions at downstream locations with consideration for local flows. Earlier versions restrict the optimization to yields and diversions at the dam. Currently, reservoirs may only be optimized singly. It is anticipated that with continued interest by the various Corps District offices, the HEC-5 optimization capability will be extended to provide the ability to optimize yields for multiple reservoir systems.

## USE OF HEC-5 IN WATER SUPPLY STUDIES

The HEC has recently completed a comprehensive application of HEC-5 for analysis of existing and proposed reservoirs in the Lehigh River Basin, Pennsylvania, for the Philadelphia District, U.S. Army Corps of Engineers. The primary emphasis of the study was the analysis of reallocation of flood control storage to hydropower and water supply storage.

The HEC developed four sets of HEC-5 models for analysis of the various reservoir alternatives. Ten alternative reservoir systems were analyzed with a daily simulation interval for water supply and hydropower production. Simulations were made with a 50-year period of mean daily natural flows. The 50-year daily simulation models were kept as simple as possible in order to keep execution times on the HEC HARRIS 500 computer to a minimum. A schematic of the HEC-5 daily simulation model for the Lehigh Basin is shown in Figure 2. In contrast, the HEC-5 two-hour flood simulation model of the Lehigh Basin for a nine-day flood event required operation for thirty-one control points (reservoirs and damage centers).

Reservoir yields for selected conservation storages at the existing and proposed reservoirs were determined with a set of HEC-5 models using a 50-year period of monthly flows. Additional hydropower simulations were made with a one-hour simulation interval to determine the performance of proposed pumped storage hydropower alternatives.

The HEC is currently applying HEC-5 in two ongoing Corps of Engineers water supply studies in Georgia and California. HEC-5 is also being applied with assistance from the HEC in two USBR studies in California and Arizona and by the United Nations Development Program personnel in India.

## SUMMARY

HEC-5 is a widely utilized U.S. Army Corps of Engineers reservoir system simulation model which has broad water supply analysis capabilities. The program source code, documentation, and applications assistance are available from the Hydrologic Engineering Center, 609 Second Street, Davis, California, 95616. It is anticipated that a new version of HEC-5 which incorporates water supply analysis and hardware adaptability enhancements will be released in the fall of 1984.

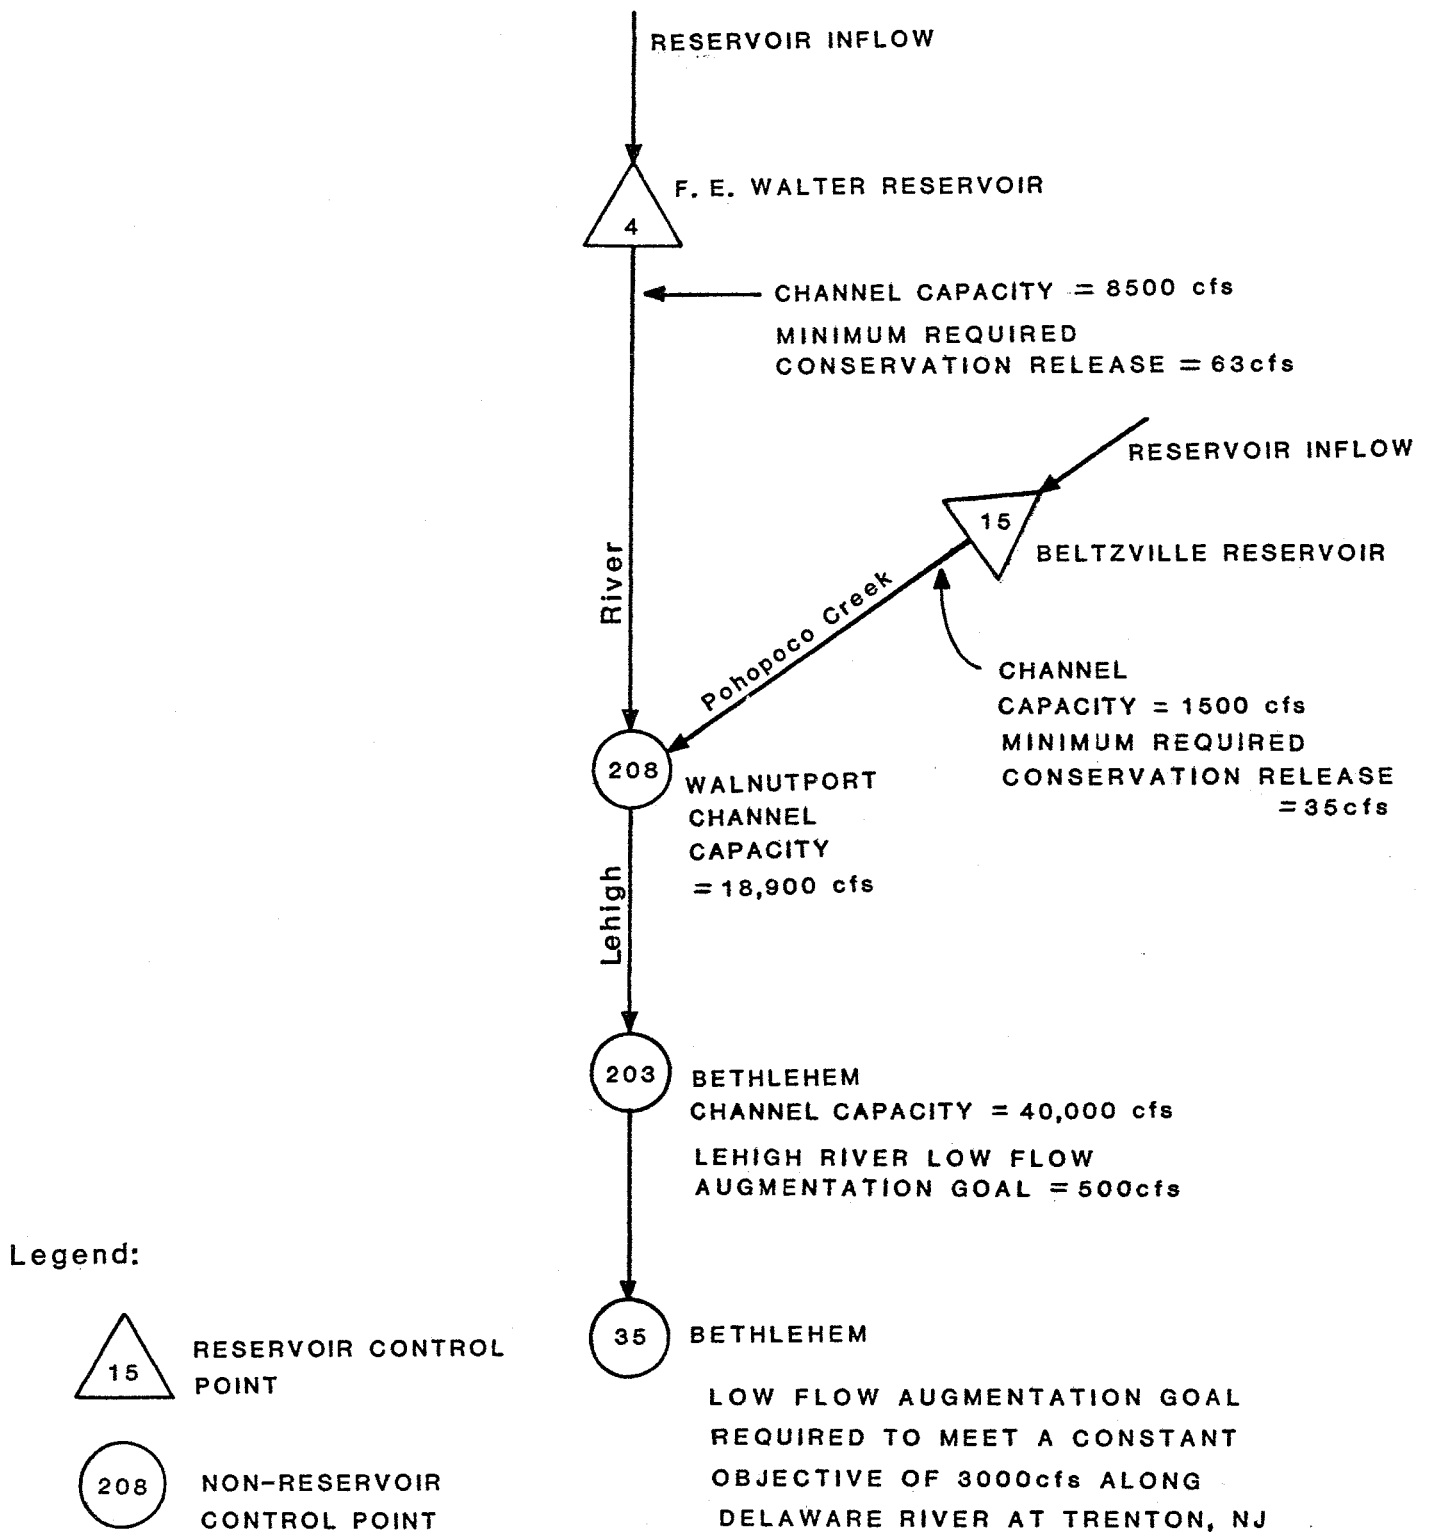


Figure 2

LEHIGH RIVER BASIN HEC-5 DAILY OPERATION MODEL - SCHEMATIC DIAGRAM

## REFERENCES

1. HEC-5, Simulation of Flood Control and Conservation Systems, Computer Program, U.S. Army Corps of Engineers, The Hydrologic Engineer Center, April 1982.
2. HEC-5Q, Simulation of Flood Control and Conservation Systems (Including Water Quality Analysis), Computer Program, U.S. Army Corps of Engineers, The Hydrologic Engineering Center, October 1982.
3. HEC-5, Simulation of Flood Control and Conservation Systems, Users Manual, U.S. Army Corps of Engineers, The Hydrologic Engineering Center, April 1982.
4. Training Document No. 20 (Draft), Water Supply Simulation Using HEC-5, U.S. Army Corps of Engineers, The Hydrologic Engineering Center, July 1983.



## Technical Paper Series

TP-1	Use of Interrelated Records to Simulate Streamflow	TP-39	A Method for Analyzing Effects of Dam Failures in Design Studies
TP-2	Optimization Techniques for Hydrologic Engineering	TP-40	Storm Drainage and Urban Region Flood Control Planning
TP-3	Methods of Determination of Safe Yield and Compensation Water from Storage Reservoirs	TP-41	HEC-5C, A Simulation Model for System Formulation and Evaluation
TP-4	Functional Evaluation of a Water Resources System	TP-42	Optimal Sizing of Urban Flood Control Systems
TP-5	Streamflow Synthesis for Ungaged Rivers	TP-43	Hydrologic and Economic Simulation of Flood Control Aspects of Water Resources Systems
TP-6	Simulation of Daily Streamflow	TP-44	Sizing Flood Control Reservoir Systems by System Analysis
TP-7	Pilot Study for Storage Requirements for Low Flow Augmentation	TP-45	Techniques for Real-Time Operation of Flood Control Reservoirs in the Merrimack River Basin
TP-8	Worth of Streamflow Data for Project Design - A Pilot Study	TP-46	Spatial Data Analysis of Nonstructural Measures
TP-9	Economic Evaluation of Reservoir System Accomplishments	TP-47	Comprehensive Flood Plain Studies Using Spatial Data Management Techniques
TP-10	Hydrologic Simulation in Water-Yield Analysis	TP-48	Direct Runoff Hydrograph Parameters Versus Urbanization
TP-11	Survey of Programs for Water Surface Profiles	TP-49	Experience of HEC in Disseminating Information on Hydrological Models
TP-12	Hypothetical Flood Computation for a Stream System	TP-50	Effects of Dam Removal: An Approach to Sedimentation
TP-13	Maximum Utilization of Scarce Data in Hydrologic Design	TP-51	Design of Flood Control Improvements by Systems Analysis: A Case Study
TP-14	Techniques for Evaluating Long-Term Reservoir Yields	TP-52	Potential Use of Digital Computer Ground Water Models
TP-15	Hydrostatistics - Principles of Application	TP-53	Development of Generalized Free Surface Flow Models Using Finite Element Techniques
TP-16	A Hydrologic Water Resource System Modeling Techniques	TP-54	Adjustment of Peak Discharge Rates for Urbanization
TP-17	Hydrologic Engineering Techniques for Regional Water Resources Planning	TP-55	The Development and Servicing of Spatial Data Management Techniques in the Corps of Engineers
TP-18	Estimating Monthly Streamflows Within a Region	TP-56	Experiences of the Hydrologic Engineering Center in Maintaining Widely Used Hydrologic and Water Resource Computer Models
TP-19	Suspended Sediment Discharge in Streams	TP-57	Flood Damage Assessments Using Spatial Data Management Techniques
TP-20	Computer Determination of Flow Through Bridges	TP-58	A Model for Evaluating Runoff-Quality in Metropolitan Master Planning
TP-21	An Approach to Reservoir Temperature Analysis	TP-59	Testing of Several Runoff Models on an Urban Watershed
TP-22	A Finite Difference Methods of Analyzing Liquid Flow in Variably Saturated Porous Media	TP-60	Operational Simulation of a Reservoir System with Pumped Storage
TP-23	Uses of Simulation in River Basin Planning	TP-61	Technical Factors in Small Hydropower Planning
TP-24	Hydroelectric Power Analysis in Reservoir Systems	TP-62	Flood Hydrograph and Peak Flow Frequency Analysis
TP-25	Status of Water Resource System Analysis	TP-63	HEC Contribution to Reservoir System Operation
TP-26	System Relationships for Panama Canal Water Supply	TP-64	Determining Peak-Discharge Frequencies in an Urbanizing Watershed: A Case Study
TP-27	System Analysis of the Panama Canal Water Supply	TP-65	Feasibility Analysis in Small Hydropower Planning
TP-28	Digital Simulation of an Existing Water Resources System	TP-66	Reservoir Storage Determination by Computer Simulation of Flood Control and Conservation Systems
TP-29	Computer Application in Continuing Education	TP-67	Hydrologic Land Use Classification Using LANDSAT
TP-30	Drought Severity and Water Supply Dependability	TP-68	Interactive Nonstructural Flood-Control Planning
TP-31	Development of System Operation Rules for an Existing System by Simulation	TP-69	Critical Water Surface by Minimum Specific Energy Using the Parabolic Method
TP-32	Alternative Approaches to Water Resources System Simulation		
TP-33	System Simulation of Integrated Use of Hydroelectric and Thermal Power Generation		
TP-34	Optimizing flood Control Allocation for a Multipurpose Reservoir		
TP-35	Computer Models for Rainfall-Runoff and River Hydraulic Analysis		
TP-36	Evaluation of Drought Effects at Lake Atitlan		
TP-37	Downstream Effects of the Levee Overtopping at Wilkes-Barre, PA, During Tropical Storm Agnes		
TP-38	Water Quality Evaluation of Aquatic Systems		

- TP-70 Corps of Engineers Experience with Automatic Calibration of a Precipitation-Runoff Model
- TP-71 Determination of Land Use from Satellite Imagery for Input to Hydrologic Models
- TP-72 Application of the Finite Element Method to Vertically Stratified Hydrodynamic Flow and Water Quality
- TP-73 Flood Mitigation Planning Using HEC-SAM
- TP-74 Hydrographs by Single Linear Reservoir Model
- TP-75 HEC Activities in Reservoir Analysis
- TP-76 Institutional Support of Water Resource Models
- TP-77 Investigation of Soil Conservation Service Urban Hydrology Techniques
- TP-78 Potential for Increasing the Output of Existing Hydroelectric Plants
- TP-79 Potential Energy and Capacity Gains from Flood Control Storage Reallocation at Existing U.S. Hydropower Reservoirs
- TP-80 Use of Non-Sequential Techniques in the Analysis of Power Potential at Storage Projects
- TP-81 Data Management Systems of Water Resources Planning
- TP-82 The New HEC-1 Flood Hydrograph Package
- TP-83 River and Reservoir Systems Water Quality Modeling Capability
- TP-84 Generalized Real-Time Flood Control System Model
- TP-85 Operation Policy Analysis: Sam Rayburn Reservoir
- TP-86 Training the Practitioner: The Hydrologic Engineering Center Program
- TP-87 Documentation Needs for Water Resources Models
- TP-88 Reservoir System Regulation for Water Quality Control
- TP-89 A Software System to Aid in Making Real-Time Water Control Decisions
- TP-90 Calibration, Verification and Application of a Two-Dimensional Flow Model
- TP-91 HEC Software Development and Support
- TP-92 Hydrologic Engineering Center Planning Models
- TP-93 Flood Routing Through a Flat, Complex Flood Plain Using a One-Dimensional Unsteady Flow Computer Program
- TP-94 Dredged-Material Disposal Management Model
- TP-95 Infiltration and Soil Moisture Redistribution in HEC-1
- TP-96 The Hydrologic Engineering Center Experience in Nonstructural Planning
- TP-97 Prediction of the Effects of a Flood Control Project on a Meandering Stream
- TP-98 Evolution in Computer Programs Causes Evolution in Training Needs: The Hydrologic Engineering Center Experience
- TP-99 Reservoir System Analysis for Water Quality
- TP-100 Probable Maximum Flood Estimation - Eastern United States
- TP-101 Use of Computer Program HEC-5 for Water Supply Analysis
- TP-102 Role of Calibration in the Application of HEC-6
- TP-103 Engineering and Economic Considerations in Formulating
- TP-104 Modeling Water Resources Systems for Water Quality
- TP-105 Use of a Two-Dimensional Flow Model to Quantify Aquatic Habitat
- TP-106 Flood-Runoff Forecasting with HEC-1F
- TP-107 Dredged-Material Disposal System Capacity Expansion
- TP-108 Role of Small Computers in Two-Dimensional Flow Modeling
- TP-109 One-Dimensional Model for Mud Flows
- TP-110 Subdivision Froude Number
- TP-111 HEC-5Q: System Water Quality Modeling
- TP-112 New Developments in HEC Programs for Flood Control
- TP-113 Modeling and Managing Water Resource Systems for Water Quality
- TP-114 Accuracy of Computer Water Surface Profiles - Executive Summary
- TP-115 Application of Spatial-Data Management Techniques in Corps Planning
- TP-116 The HEC's Activities in Watershed Modeling
- TP-117 HEC-1 and HEC-2 Applications on the Microcomputer
- TP-118 Real-Time Snow Simulation Model for the Monongahela River Basin
- TP-119 Multi-Purpose, Multi-Reservoir Simulation on a PC
- TP-120 Technology Transfer of Corps' Hydrologic Models
- TP-121 Development, Calibration and Application of Runoff Forecasting Models for the Allegheny River Basin
- TP-122 The Estimation of Rainfall for Flood Forecasting Using Radar and Rain Gage Data
- TP-123 Developing and Managing a Comprehensive Reservoir Analysis Model
- TP-124 Review of U.S. Army corps of Engineering Involvement With Alluvial Fan Flooding Problems
- TP-125 An Integrated Software Package for Flood Damage Analysis
- TP-126 The Value and Depreciation of Existing Facilities: The Case of Reservoirs
- TP-127 Floodplain-Management Plan Enumeration
- TP-128 Two-Dimensional Floodplain Modeling
- TP-129 Status and New Capabilities of Computer Program HEC-6: "Scour and Deposition in Rivers and Reservoirs"
- TP-130 Estimating Sediment Delivery and Yield on Alluvial Fans
- TP-131 Hydrologic Aspects of Flood Warning - Preparedness Programs
- TP-132 Twenty-five Years of Developing, Distributing, and Supporting Hydrologic Engineering Computer Programs
- TP-133 Predicting Deposition Patterns in Small Basins
- TP-134 Annual Extreme Lake Elevations by Total Probability Theorem
- TP-135 A Muskingum-Cunge Channel Flow Routing Method for Drainage Networks
- TP-136 Prescriptive Reservoir System Analysis Model - Missouri River System Application
- TP-137 A Generalized Simulation Model for Reservoir System Analysis
- TP-138 The HEC NexGen Software Development Project
- TP-139 Issues for Applications Developers
- TP-140 HEC-2 Water Surface Profiles Program
- TP-141 HEC Models for Urban Hydrologic Analysis

- TP-142 Systems Analysis Applications at the Hydrologic Engineering Center
- TP-143 Runoff Prediction Uncertainty for Ungauged Agricultural Watersheds
- TP-144 Review of GIS Applications in Hydrologic Modeling
- TP-145 Application of Rainfall-Runoff Simulation for Flood Forecasting
- TP-146 Application of the HEC Prescriptive Reservoir Model in the Columbia River Systems
- TP-147 HEC River Analysis System (HEC-RAS)
- TP-148 HEC-6: Reservoir Sediment Control Applications
- TP-149 The Hydrologic Modeling System (HEC-HMS): Design and Development Issues
- TP-150 The HEC Hydrologic Modeling System
- TP-151 Bridge Hydraulic Analysis with HEC-RAS
- TP-152 Use of Land Surface Erosion Techniques with Stream Channel Sediment Models
- TP-153 Risk-Based Analysis for Corps Flood Project Studies - A Status Report
- TP-154 Modeling Water-Resource Systems for Water Quality Management
- TP-155 Runoff simulation Using Radar Rainfall Data
- TP-156 Status of HEC Next Generation Software Development
- TP-157 Unsteady Flow Model for Forecasting Missouri and Mississippi Rivers
- TP-158 Corps Water Management System (CWMS)
- TP-159 Some History and Hydrology of the Panama Canal
- TP-160 Application of Risk-Based Analysis to Planning Reservoir and Levee Flood Damage Reduction Systems
- TP-161 Corps Water Management System - Capabilities and Implementation Status

